



FCC PART 15C TEST REPORT

No. I19Z60374-IOT03

for
Q INNOVATIONS PRIVATE LIMITED

Mobile Phone

Q28A/ Q28C

with

FCC ID: 2AO6NF001

Hardware Version: 01

Software Version: 9AS8/9AT1

Issued Date: 2019-05-17



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z60374-IOT03	Rev.0	1st edition	2019-4-17
I19Z60374-IOT03	Rev.1	Delete the result of 40M	2019-5-17

CONTENTS

1.	TEST LABORATORY	5
1.1.	INTRODUCTION & ACCREDITATION.....	5
1.2.	TESTING LOCATION	5
1.3.	TESTING ENVIRONMENT.....	5
1.4.	PROJECT DATA	6
1.5.	SIGNATURE.....	6
2.	CLIENT INFORMATION.....	7
2.1.	APPLICANT INFORMATION.....	7
2.2.	MANUFACTURER INFORMATION.....	7
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT	8
3.3.	INTERNAL IDENTIFICATION OF AE	8
3.4.	EUT SET-UPS	9
3.5.	GENERAL DESCRIPTION	9
3.6.	INTERPRETATION OF THE TEST ENVIRONMENT	9
4.	REFERENCE DOCUMENTS	9
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	9
4.2.	REFERENCE DOCUMENTS FOR TESTING	9
5.	TEST RESULTS	10
5.1.	SUMMARY OF TEST RESULTS	10
5.2.	STATEMENTS.....	10
5.3.	TEST CONDITIONS.....	10
6.	TEST FACILITIES UTILIZED	11
7.	MEASUREMENT UNCERTAINTY	12
7.1.	MAXIMUM OUTPUT POWER	12
7.2.	PEAK POWER SPECTRAL DENSITY.....	12
7.3.	DTS 6-DB SIGNAL BANDWIDTH	12
7.4.	BAND EDGES COMPLIANCE.....	12
7.5.	TRANSMITTER SPURIOUS EMISSION.....	12
7.6.	AC POWER-LINE CONDUCTED EMISSION.....	12



ANNEX A: DETAILED TEST RESULTS.....	13
A.1. MEASUREMENT METHOD.....	13
A.2. MAXIMUM OUTPUT POWER.....	14
A.2.1. PEAK OUTPUT POWER-CONDUCTED	14
A.2.2. AVERAGE OUTPUT POWER-CONDUCTED.....	15
A.3. PEAK POWER SPECTRAL DENSITY.....	17
A.4. DTS 6-DB SIGNAL BANDWIDTH	23
A.5. BAND EDGES COMPLIANCE	29
A.6. TRANSMITTER SPURIOUS EMISSION.....	33
A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED	33
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	73
A.7. AC POWER-LINE CONDUCTED EMISSION	84
ANNEX B: ACCREDITATION CERTIFICATE.....	89



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(BDA)

Address: No. 18 Jia Kangding Street, BDA District, Beijing, P. R.
China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C

Extreme Temperature: -10/+55°C

Relative Humidity: 20-75%

**1.4. Project data**

Testing Start Date: 2019-03-12
Testing End Date: 2019-04-15

1.5. Signature

A handwritten signature in black ink, appearing to read "江雪".

Jiang Xue
(Prepared this test report)

A handwritten signature in black ink, appearing to read "郑伟".

Zheng Wei
(Reviewed this test report)

A handwritten signature in black ink, appearing to read "高宏".

Gao Hong
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Q INNOVATIONS PRIVATE LIMITED
Address: 25, Shakuntala Farm, M G Road, Sultanpur, New Delhi-110030
City: /
Postal Code: 110030
Country: /
Telephone: 91-124-4648000/8111
Fax: /

2.2. Manufacturer Information

Company Name: Q INNOVATIONS PRIVATE LIMITED
Address: 25, Shakuntala Farm, M G Road, Sultanpur, New Delhi-110030
City: /
Postal Code: 110030
Country: /
Telephone: 91-124-4648000/8111
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Mobile Phone
Model name	Q28A/ Q28C
FCC ID	2AO6NF001
IC ID	/
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	23.24dBm(OFDM)
Power Supply	3.8V DC by Battery

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	356228100002087	01	9AS8
EUT2	356228100003580	01	9AS8

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	Charger	/	/
AE4	USB Cable	/	/
AE1	Model	Lithium-ion	
	Manufacturer	Lishen Electronic Co.,Ltd.	
	Capacitance	1500mAh	
	Nominal voltage	3.8 V	
AE2	Model	CY050055US-L	
	Manufacturer	Jiangsu Chenyang Electronic Co.,Ltd..	
	Length of cable	/	
AE3	Model	PA-5V550mA-005	
	Manufacturer	Huizhou Puan Electronic Co.,Ltd	
	Length of cable	/	
AE4			

Model /
Manufacturer /
Length of cable /

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.11	EUT1+ AE1+ AE2	WIFI
Set.12	EUT1+ AE1+ AE3	WIFI

3.5. General Description

The Equipment under Test (EUT) is a model of Mobile Phone with integrated antenna and inbuilt battery.

It has Bluetooth (EDR) function.

It consists of normal options: travel charger, USB cable and Phone.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.6. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor k=2.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2016
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013

5. Test Results

5.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTLL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

5.2. Statements

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTLL and according to the standards or reference documents listed in section 4.2

The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

The Equipment Under Test (EUT) model Q28A (SW: 9AS8) is a prototype product of Q28C (SW:9AT1).We tested the Q28A,Q28C shares the result of Q28A.

5.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.8V(By battery)
Humidity	H nom	20-75%

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2019-05-17
2	LISN	ENY216	101200	Rohde & Schwarz	1 year	2019-04-15
3	Test Receiver	ESCI 3	100344	Rohde & Schwarz	1 year	2020-02-14
4	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	1 year	2019-11-27
2	BiLog Antenna	VULB9163	9163-482	Schwarzbeck	1 year	2019-09-21
3	Dual-Ridge Waveguide Horn Antenna	3117	00139065	ETS-Lindgren	1 year	2019-11-15
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	3 years	2020-05-31
5	Vector Signal Analyzer	FSV40	101047	Rohde & Schwarz	1 year	2019-07-21

7. Measurement Uncertainty

7.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

7.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

7.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

7.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

7.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	1.22
2GHz ≤ f ≤ 3.6GHz	1.22
3.6GHz ≤ f ≤ 8GHz	1.22
8GHz ≤ f ≤ 12.75GHz	1.51
12.75GHz ≤ f ≤ 26GHz	1.51
26GHz ≤ f ≤ 40GHz	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
30MHz ≤ f ≤ 1GHz	5.40
1GHz ≤ f ≤ 18GHz	4.32
18GHz ≤ f ≤ 40GHz	5.26

7.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

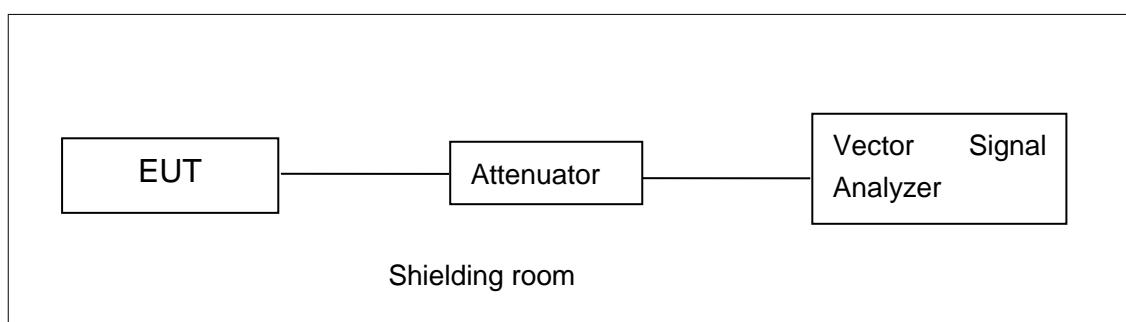


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

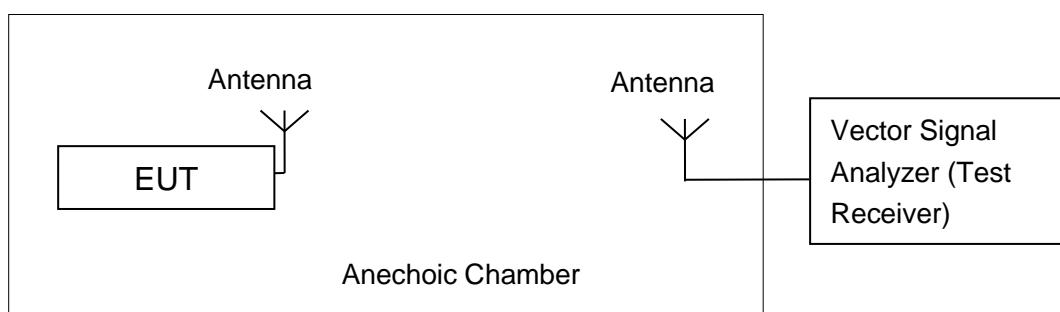


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

A.2. Maximum Output Power

Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.2

- a) Set the RBW = 1 MHz.
- b) Set the VBW = 3 MHz.
- c) Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector).

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

EUT ID: EUT2

A.2.1. Peak Output Power-conducted

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	20.25	/	/
	2	20.36	/	/
	5.5	21.58	/	/
	11	23.03	22.79	23.24
802.11g	6	21.95	/	/
	9	21.88	/	/
	12	21.56	/	/
	18	21.63	/	/
	24	22.09	/	/
	36	22.06	/	/
	48	22.09	/	/
	54	22.15	21.86	22.06

The data rate 11Mbps and 54Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	18.55	/	/
	MCS1	18.32	/	/
	MCS2	18.25	/	/
	MCS3	18.76	/	/
	MCS4	18.81	/	/
	MCS5	18.86	/	/
	MCS6	18.88	18.84	18.76
	MCS7	18.82	/	/

The data rate MCS6 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: Pass
A.2.2. Average Output Power-conducted
Method of Measurement: See ANSI C63.10-2013-clause 11.9.2.2.2

The procedure for this method is as follows:

- a) Set span = 1.5OBW.
- b) Set RBW = 1MHz.
- c) Set VBW = 3MHz
- d) Number of points in sweep = 625
- e) Sweep time = auto.
- f) Detector = RMS.
- g) If transmit duty cycle < 98%, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFFintervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- h) Trace average 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

802.11b/g mode

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	18.19	18.04	18.44
802.11g	14.68	14.79	15.21

802.11n-HT20 mode

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	11.50	11.82	12.09

Conclusion: Pass

A.3. Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-2013-clause 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11b	1	Fig.A.3.1	-6.83	P
	6	Fig.A.3.2	-5.28	P
	11	Fig.A.3.3	-7.01	P
802.11g	1	Fig.A.3.4	-11.99	P
	6	Fig.A.3.5	-10.74	P
	11	Fig.A.3.6	-14.10	P

802.11n-HT20 mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-16.31	P
	6	Fig.A.3.8	-13.51	P
	11	Fig.A.3.9	-16.75	P

Conclusion: Pass

Test graphs as below: