


RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : IPAN IPAN
Address : 218/228 avenue du Haut Leveque, batiment 5 PESSAC France 33600
Manufacturer/Factory : Shenzhen Huagon Technology Co., LTD
Address : 6th floor No.2, Lingbei 4 road, the first industrial area of Phoenix, Fuyong town Bao'an District, Shenzhen (518000)
E.U.T. : Wireless charger
Brand Name : N/A
Model No. : IPN-INT-WDCK
FCC ID : 2A06R-IPN-WDCK
Measurement Standard : FCC PART 15 Subpart C
Date of Receiver : April 13, 2018
Date of Test : April 14, 2018 to May 07, 2018
Date of Report : May 07, 2018

This Test Report is Issued Under the Authority of :

Prepared by



Alina Guo / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.



Table of Contents

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 4 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST | 4 |
| 1.2 RELATED SUBMITTAL(S) / GRANT (S)..... | 5 |
| 1.3 TEST METHODOLOGY | 5 |
| 1.4 EQUIPMENT MODIFICATIONS | 5 |
| 1.5 SUPPORT DEVICE | 5 |
| 1.6 TEST FACILITY AND LOCATION..... | 6 |
| 1.7 SUMMARY OF TEST RESULTS | 6 |
| 2. SYSTEM TEST CONFIGURATION..... | 7 |
| 2.1 EUT CONFIGURATION | 7 |
| 2.2 SPECIAL ACCESSORIES..... | 7 |
| 2.3 DESCRIPTION OF TEST MODES | 7 |
| 2.4 EUT EXERCISE | 7 |
| 3. CONDUCTED EMISSIONS TEST | 8 |
| 3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 8 |
| 3.2 TEST CONDITION | 8 |
| 3.3 MEASUREMENT RESULTS..... | 8 |
| 4. RADIATED EMISSION TEST | 9 |
| 4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 9 |
| 4.2 MEASUREMENT PROCEDURE | 10 |
| 4.3 LIMIT..... | 11 |
| 4.4 MEASUREMENT RESULTS | 12 |
| 5. 20DB BANDWIDTH..... | 18 |
| 5.1 MEASUREMENT PROCEDURE | 18 |
| 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 18 |
| 5.3 MEASUREMENT RESULTS..... | 18 |
| 6. TEST EQUIPMENT LIST..... | 21 |

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

| | |
|------------------|---|
| Product name | : Wireless Charger |
| Main model | : IPN-INT-WDCK |
| Additional model | : N/A |
| Model difference | : N/A |
| Power Supply | : Input: DC 5V From battery Output: DC 5V 1A |
| Test voltage | : DC 5V From battery |
| Adapter | : N/A |
| Cable | : N/A |
| Software version | : V1.0 |
| Hardware version | : V1.0 |
| Note | : N/A |
| Remark | : N/A |
| Frequency Range | : 110.5-204.5KHz |

Note: The Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

| Channel | Frequency KHz |
|---------|------------------|
| 1 | 110.5 |
| 51 | 155.5 |
| 100 | 204.5 |

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AO6R-IPN-WDCK** filing to comply with FCC Part 15 (2017), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Mobile Phone : Manufacturer: SAMAUNG
M/N: Galaxy S9



1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 14, 2015
 The certificate is valid until August 13, 2018
 The Laboratory has been assessed and proved to be in compliance with CNAS/CL01
 The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
 The certificate is valid until December 31, 2019
 The Laboratory has been assessed and proved to be in compliance with ISO17025
 The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
 The Designation Number is CN1214
 Test Firm Registration Number: 907417

Listed by Industry Canada, June 08, 2017
 The Certificate Registration Number. Is 46405-9743
 Name of Firm : Dongguan Nore Testing Center Co., Ltd.
 (Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park,
 Zhouxi Longxi Road, Nancheng District, Dongguan City, Guangdong Province, China

1.7 Summary of Test Results

| FCC Rules | Description Of Test | Uncertainty | Result |
|-------------|-----------------------------|---------------------------|----------------|
| §15.35 | 20dB Bandwidth | ±1.42 x10 ⁻⁴ % | Compliant |
| §15.207 (a) | AC Power Conducted Emission | ±1.06dB | Not Applicable |
| §15.209 | Radiated Emission | ±3.70dB | Compliant |

Note: Due to this EUT is powered by battery only, the AC Power Conducted Emission is not applicable.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing.


2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

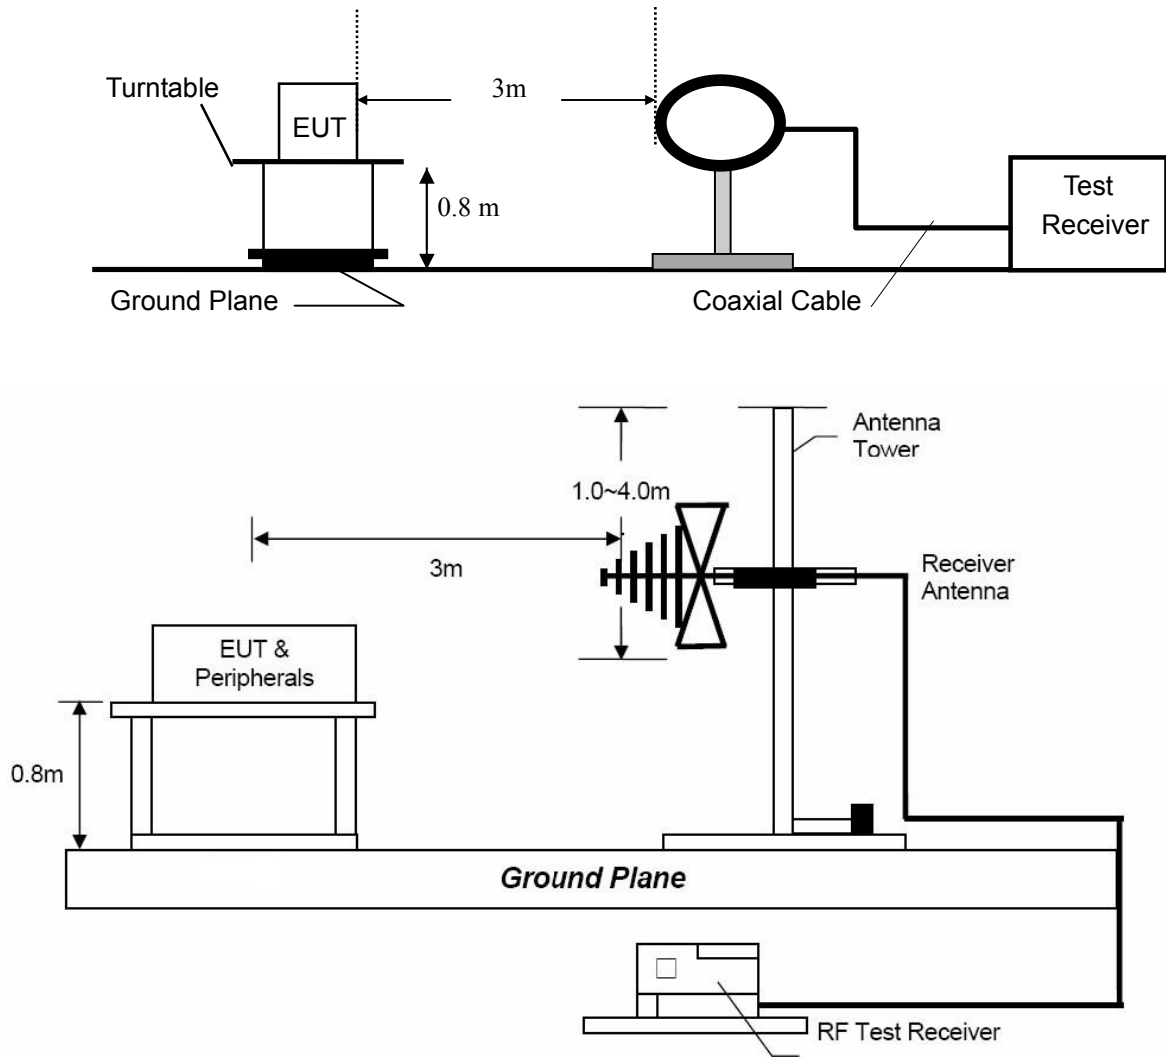

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

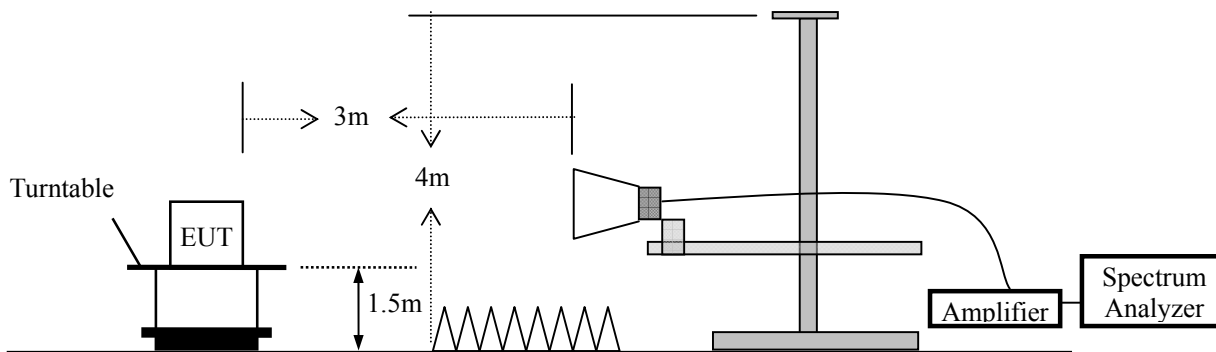

4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

| Frequency Band (MHz) | Level | Resolution Bandwidth | Video Bandwidth |
|----------------------|---------|----------------------|-----------------|
| 30 to 1000 | QP | 120 kHz | 300 kHz |
| Above 1000 | Peak | 1 MHz | 3 MHz |
| | Average | 1 MHz | 10 Hz |

4.3 Limit

| Frequency range MHz | Distance Meters | Field Strengths Limit (15.209) |
|---------------------|-----------------|--------------------------------|
| | | $\mu\text{V/m}$ |
| 0.009 ~ 0.490 | 300 | $2400/F(\text{kHz})$ |
| 0.490 ~ 1.705 | 30 | $24000/F(\text{kHz})$ |
| 1.705 ~ 30 | 30 | 30 |
| 30 ~ 88 | 3 | 100 |
| 88 ~ 216 | 3 | 150 |
| 216 ~ 960 | 3 | 200 |
| Above 960 | 3 | 500 |

- Remark :
- (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

| Receiver Parameter | Setting |
|------------------------|---------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9KHz~90KHz/ RB 200Hz for AV |
| | 90KHz~110KHz/ RB 200Hz for QP |
| | 110KHz~490KHz/ RB 200Hz for AV |
| | 490KHz~30MHz/ RB 9KHz for QP |
| | 30MHz~1000MHz/ RB 120KHz for QP |

FCC 15.209 (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4 Measurement Results


Please refer to following plots of the worst case.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :IPN-INT-WDCK Data :#2 Date: 2018-4-17 Time: 18:07:08
 137.0 dBuV/m

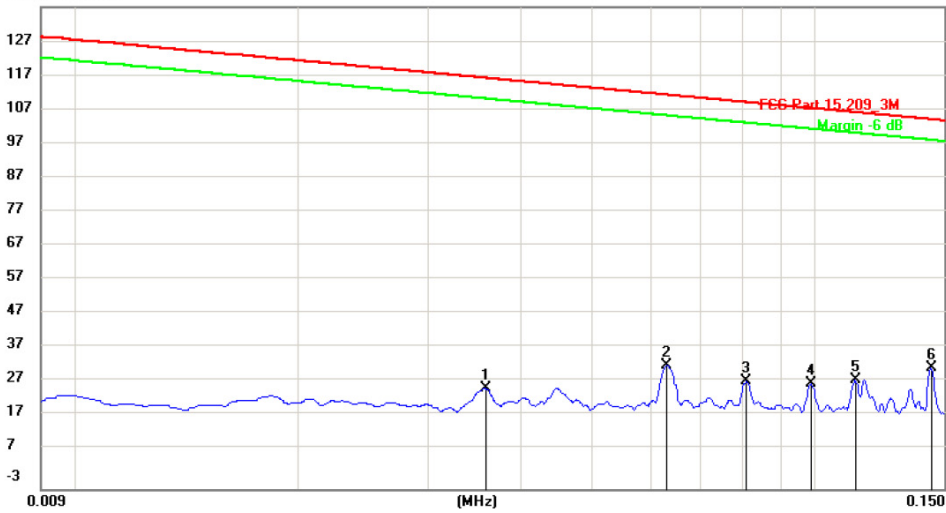

Site: Polarization: *Horizontal* Temperature: 26
 Limit: FCC Part 15.209_3M Power: DC5V Humidity: 60 %
 EUT: Wireless Charger Distance:
 M/N: IPN-INT-WDCK
 Mode: Full Load
 Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree | |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree | Comment |
| 1 | | 0.0359 | 5.59 | 20.55 | 26.14 | 116.38 | -90.24 | | | peak |
| 2 | | 0.0632 | 12.32 | 20.53 | 32.85 | 111.49 | -78.64 | | | peak |
| 3 | | 0.0810 | 7.67 | 20.53 | 28.20 | 109.35 | -81.15 | | | peak |
| 4 | | 0.0990 | 7.00 | 20.54 | 27.54 | 107.61 | -80.07 | | | peak |
| 5 | | 0.1136 | 8.04 | 20.53 | 28.57 | 106.43 | -77.86 | | | peak |
| 6 | * | 0.1439 | 11.78 | 20.53 | 32.31 | 104.38 | -72.07 | | | peak |

*:Maximum data x:Over limit !:over margin

(Reference Only)


Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :IPN-INT-WDCK Data :#1 Date: 2018-4-17 Time: 18:00:36

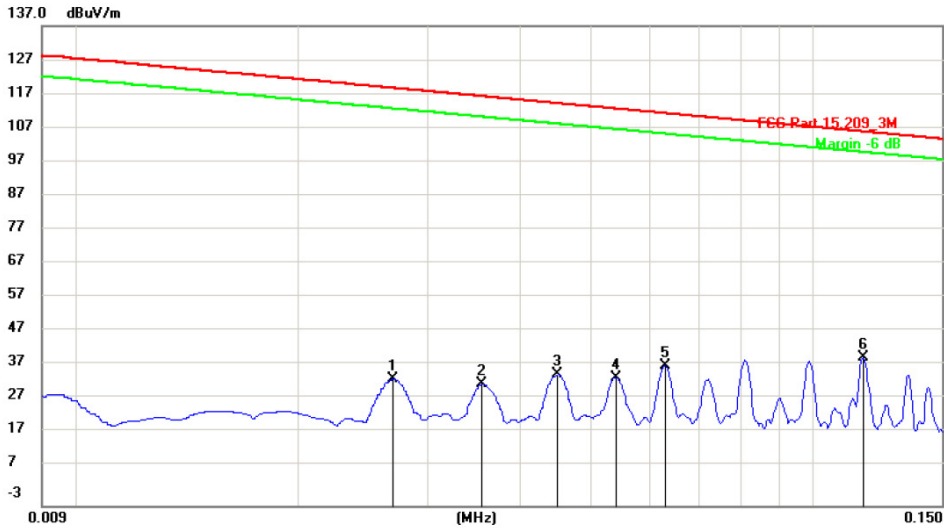

Site: Polarization: **Vertical** Temperature: 26
 Limit: FCC Part 15.209_3M Power: DC5V Humidity: 60 %
 EUT: Wireless Charger Distance:
 M/N: IPN-INT-WDCK
 Mode: Full Load
 Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------------|--------------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree |
| 1 | | 0.0269 | 13.41 | 20.49 | 33.90 | 118.87 | -84.97 | peak | |
| 2 | | 0.0355 | 11.88 | 20.54 | 32.42 | 116.47 | -84.05 | peak | |
| 3 | | 0.0451 | 14.61 | 20.59 | 35.20 | 114.41 | -79.21 | peak | |
| 4 | | 0.0541 | 13.71 | 20.59 | 34.30 | 112.83 | -78.53 | peak | |
| 5 | | 0.0631 | 17.33 | 20.53 | 37.86 | 111.50 | -73.64 | peak | |
| 6 | * | 0.1173 | 19.75 | 20.53 | 40.28 | 106.15 | -65.87 | peak | |

*:Maximum data x:Over limit !:over margin (Reference Only)


Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: Http://www.ntc-c.com

Radiated Emission Measurement

File :IPN-INT-WDCK Data :#7 Date: 2018-4-17 Time: 18:42:44

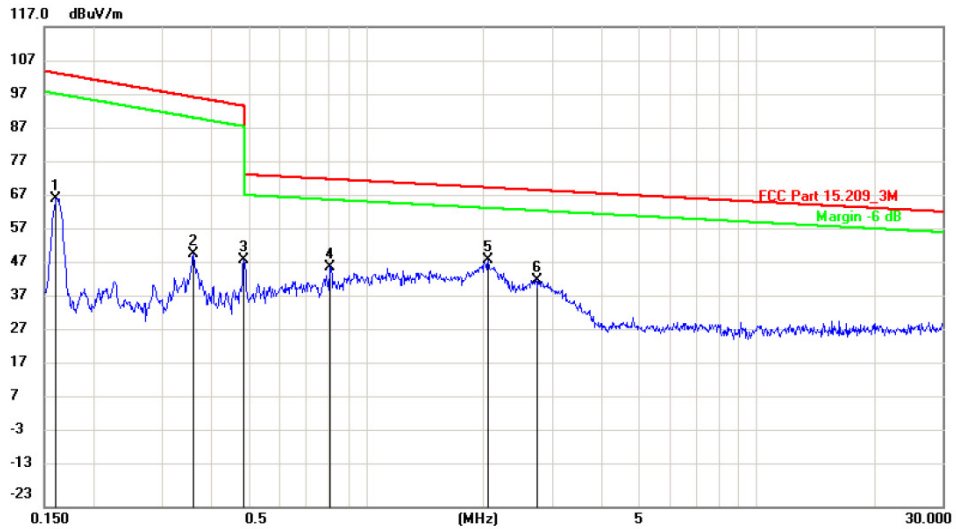

| | | |
|---------------------------|---------------------------------|-----------------|
| Site | Polarization: <i>Horizontal</i> | Temperature: 26 |
| Limit: FCC Part 15.209_3M | Power: DC5V | Humidity: 60 % |
| EUT: Wireless Charger | Distance: | |
| M/N: IPN-INT-WDCK | | |
| Mode: Full Load | | |
| Note: | | |

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree | |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree | Comment |
| 1 | | 0.1607 | 46.42 | 20.52 | 66.94 | 103.43 | -36.49 | | | peak |
| 2 | | 0.3614 | 30.08 | 20.47 | 50.55 | 96.43 | -45.88 | | | peak |
| 3 | | 0.4863 | 28.54 | 20.45 | 48.99 | 93.87 | -44.88 | | | peak |
| 4 | | 0.8087 | 26.54 | 20.41 | 46.95 | 72.48 | -25.53 | | | peak |
| 5 | * | 2.0548 | 28.38 | 20.40 | 48.78 | 70.03 | -21.25 | | | peak |
| 6 | | 2.7212 | 22.75 | 20.40 | 43.15 | 69.29 | -26.14 | | | peak |

*:Maximum data x:Over limit !:over margin (Reference Only)

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :IPN-INT-WDCK Data :#8 Date: 2018-4-17 Time: 18:49:00
 117.0 dBuV/m



Site: Polarization: **Vertical** Temperature: 26
 Limit: FCC Part 15.209_3M Power: DC5V Humidity: 60 %
 EUT: Wireless Charger Distance:
 M/N: IPN-INT-WDCK
 Mode: Full Load
 Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------------|--------------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree |
| 1 | | 0.1615 | 41.64 | 20.52 | 62.16 | 103.39 | -41.23 | peak | |
| 2 | | 0.3595 | 31.35 | 20.47 | 51.82 | 96.47 | -44.65 | peak | |
| 3 | | 0.6010 | 32.27 | 20.44 | 52.71 | 73.26 | -20.55 | peak | |
| 4 | | 0.9890 | 36.85 | 20.40 | 57.25 | 71.95 | -14.70 | peak | |
| 5 | * | 2.0333 | 38.46 | 20.40 | 58.86 | 70.05 | -11.19 | peak | |
| 6 | | 2.6640 | 32.94 | 20.40 | 53.34 | 69.34 | -16.00 | peak | |

*:Maximum data x:Over limit !:over margin <Reference Only


Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: <http://www.ntc-c.com>

Radiated Emission Measurement

File :IPN-INT-WDCK Data :#21 Date: 2018-4-17 Time: 19:24:56

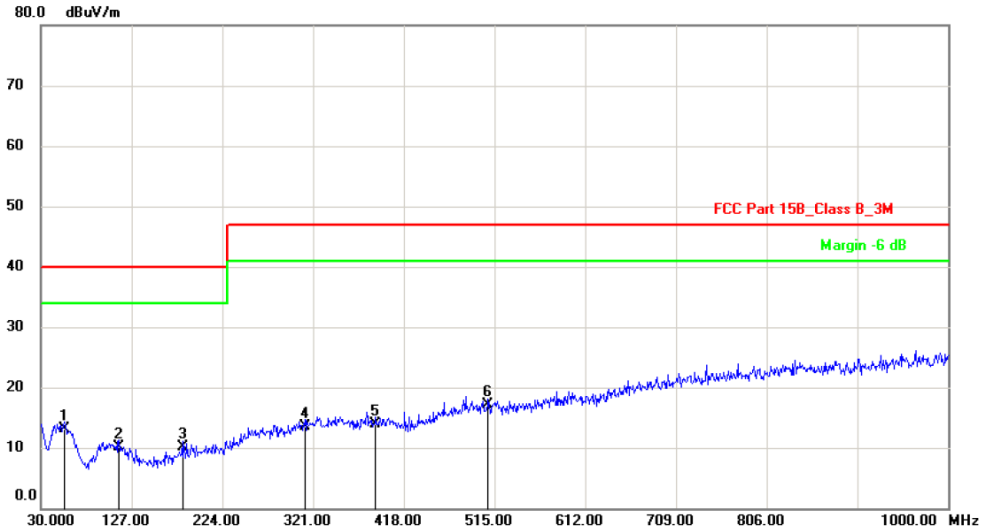

Site: Polarization: *Vertical* Temperature: 26
 Limit: FCC Part 15B_Class B_3M Power: DC 5V Humidity: 47 %
 EUT: Wireless Charger Distance: 3m
 M/N: IPN-INT-WDCK
 Mode: Full Load
 Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree |
| 1 | * | 55.2199 | 26.92 | -13.72 | 13.20 | 40.00 | -26.80 | QP | |
| 2 | | 113.4200 | 26.23 | -16.03 | 10.20 | 40.00 | -29.80 | QP | |
| 3 | | 181.3199 | 27.26 | -17.06 | 10.20 | 40.00 | -29.80 | QP | |
| 4 | | 312.2699 | 25.73 | -12.13 | 13.60 | 47.00 | -33.40 | QP | |
| 5 | | 387.9300 | 25.16 | -11.16 | 14.00 | 47.00 | -33.00 | QP | |
| 6 | | 508.2099 | 25.85 | -8.75 | 17.10 | 47.00 | -29.90 | QP | |

*:Maximum data x:Over limit !:over margin

<Reference Only


5. 20dB Bandwidth

5.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.35:

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Refer to attached data chart.

| | | | |
|---------------|-------|--------------------|--------------|
| RBW: | 30Hz | VBW: | 100Hz |
| Test By: | Sance | Spectrum Detector: | PK |
| Temperature : | 24 °C | Test Date : | May 07, 2018 |
| Test Result: | PASS | Humidity : | 50 % |


| Channel frequency (KHz) | 20dB Down BW(Hz) |
|-------------------------|------------------|
| 110.5 | 79.00 |
| 155.5 | 79.10 |
| 204.5 | 79.33 |

Lowest Channel

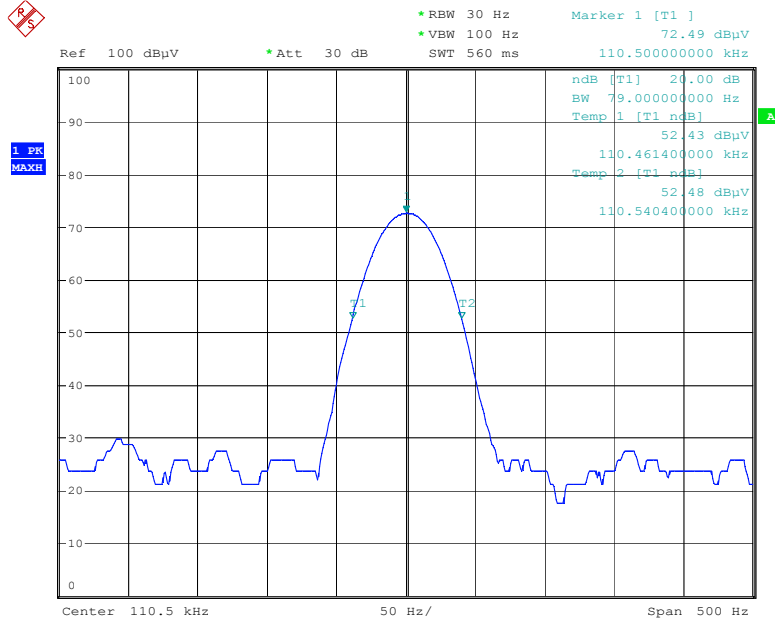


Date: 7.MAY.2018 16:02:20

Middle Channel

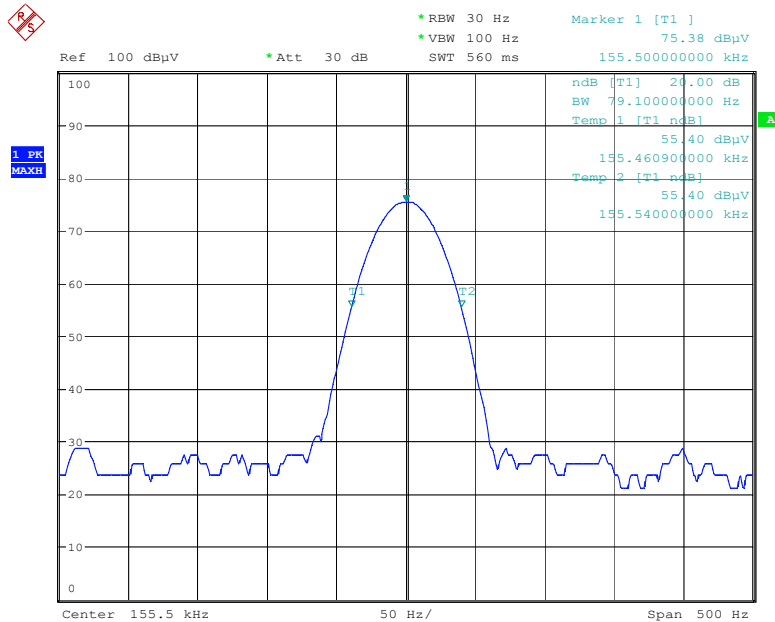

Date: 7.MAY.2018 16:02:46

Highest Channel

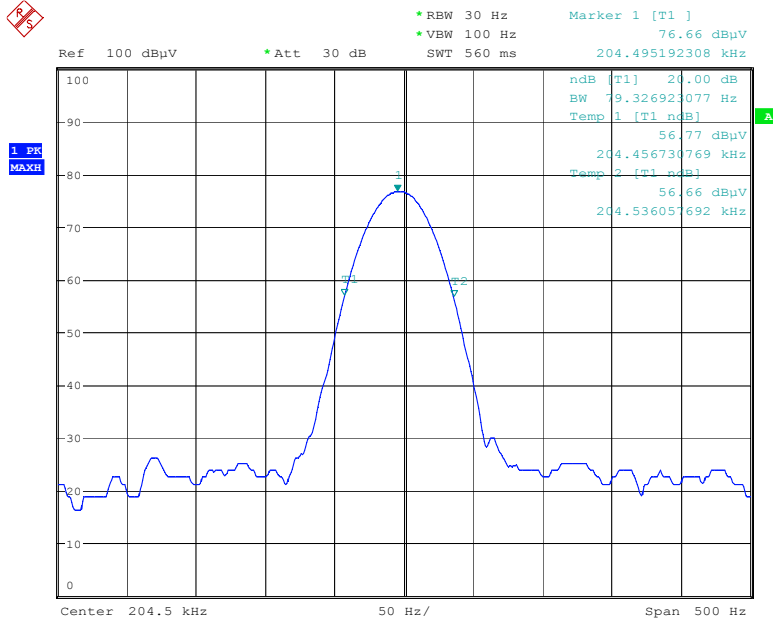

Date: 7.MAY.2018 16:03:29

6. Test Equipment List

| Description | Manufacturer | Model Number | Serial Number | Characteristics | Calibration Date | Calibration Due Date |
|-----------------------------|-----------------|--------------|---------------|-----------------|------------------|----------------------|
| Test Receiver | Rohde & Schwarz | ESCI7 | 100837 | 9KHz~7GHz | Mar. 14, 2018 | Mar. 13, 2019 |
| Antenna | Schwarzbeck | VULB9162 | 9162-010 | 30MHz~7GHz | Mar. 15, 2018 | Mar. 14, 2019 |
| Cable | Huber+Suhner | CBL2-NN-1M | 22390001 | 9KHz~7GHz | Mar. 14, 2018 | Mar. 13, 2019 |
| Cable | Huber+Suhner | CIL02 | N/A | 9KHz~7GHz | Mar. 14, 2018 | Mar. 13, 2019 |
| RF Cable | Huber+Suhner | SF-104 | MY16559/4 | 9KHz~25GHz | Apr. 25, 2018 | Apr. 25, 2019 |
| Power Amplifier | HP | HP 8447D | 1145A00203 | 100KHz~1.3GHz | Mar. 14, 2018 | Mar. 13, 2019 |
| Horn Antenna | Schwarzbeck | BBHA9170 | 9170-242 | 15GHz~40GHz | Mar. 14, 2018 | Mar. 13, 2019 |
| Horn Antenna | Com-Power | AH-118 | 071078 | 1GHz~18GHz | Mar. 15, 2018 | Mar. 14, 2019 |
| RF Cable | Huber+Suhner | SF-104 | N/A | 9KHz~40GHz | Apr. 25, 2018 | Apr. 24, 2019 |
| Loop antenna | Daze | ZA30900A | 0708 | 9KHz~30MHz | Apr. 25, 2018 | Apr. 24, 2019 |
| Spectrum Analyzer | Rohde & Schwarz | FSU26 | 200409/026 | 20Hz~26.5GHz | Apr. 25, 2018 | Apr. 24, 2019 |
| Spectrum Analyzer | Rohde & Schwarz | FSV40 | 101003 | 10Hz~40GHz | Apr. 06, 2018 | April. 05, 2019 |
| Pre-Amplifier | EMCI | EMC 184045 | 980102 | 18GHz~40GHz | Nov. 03, 2017 | Nov. 02, 2018 |
| Pre-Amplifier | Agilent | 8449B | 3008A02964 | 1GHz~26.5GHz | Apr. 25, 2018 | Apr. 24, 2019 |
| L.I.S.N. | Rohde & Schwarz | ENV 216 | 101317 | 9KHz~30MHz | Mar. 14, 2018 | Mar. 13, 2019 |
| Temporary antenna connector | TESCOM | SS402 | N/A | 9KHz-25GHz | N/A | N/A |
| Power Meter | Anritsu | ML2495A | 1139001 | 100k-65GHz | Nov. 03, 2017 | Nov. 02, 2018 |
| Power Sensor | Anritsu | MA2411B | 100345 | 300M-40GHz | Nov. 03, 2017 | Nov. 02, 2018 |

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---