



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313  
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372  
3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372  
13501 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

June 22, 2018

Busch-Jaeger Elektro GmbH  
Freisenbergstr. 2,  
Luedenscheid, Germany 58513

Dear Scott Keeling,

Enclosed is the EMC Wireless test report for compliance testing of the Busch-Jaeger Elektro GmbH, 5 products as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Joel Huna  
Documentation Department

Reference: (\Busch-Jaeger Elektro GmbH\EMC98334-FCC247)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.



*The Nation's First Licensed Nationally Recognized Testing Laboratory*

## **Electromagnetic Compatibility Criteria Test Report**

for the

**Busch-Jaeger Elektro GmbH  
5 products**

**Tested under**  
the FCC Certification Rules  
contained in  
15.247 Subpart C for Intentional Radiators

**MET Report: EMC98334-FCC247**

June 22, 2018

**Prepared For:**

**Busch-Jaeger Elektro GmbH  
Freisenbergstr. 2,  
Luedenscheid, Germany 58513**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 West Patapsco Avenue,  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**Busch-Jaeger Elektro GmbH**  
**5 products**

**Tested under**  
the FCC Certification Rules  
contained in  
15.247 Subpart C for Intentional Radiators



Donald Salguero, Project Engineer  
Electromagnetic Compatibility Lab



Joel Huna  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



John Mason,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	June 22, 2018	Initial Issue.
1	July 17, 2018	Updated Procedures for Peak Output Power and Spectral Density
2	July 23, 2018	Engineer Corrections

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview .....	4
	B. References .....	5
	C. Test Site .....	5
	D. Measurement Uncertainty .....	5
	E. Description of Test Sample .....	6
	F. Equipment Configuration .....	9
	G. Support Equipment .....	9
	H. Ports and Cabling Information .....	10
	I. Mode of Operation .....	10
	J. Method of Monitoring EUT Operation .....	10
	K. Modifications .....	10
	a) Modifications to EUT .....	10
	b) Modifications to Test Standard .....	10
	L. Disposition of EUT .....	10
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators .....</b>	<b>11</b>
	§ 15.203 Antenna Requirement .....	12
	§ 15.207(a) Conducted Emissions Limits .....	13
	§ 15.247(a)(a) 6 dB and 99% Bandwidth .....	26
	§ 15.247(b) Peak Power Output .....	29
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge .....	32
	§ 15.247(c) Spurious Emissions in Non-restricted Bands .....	68
	§ 15.247(e) Peak Power Spectral Density .....	73
	§ 15.247(i) Maximum Permissible Exposure .....	75
<b>IV.</b>	<b>Test Equipment .....</b>	<b>76</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>78</b>
	A. Certification Information .....	79
	B. Label and User's Manual Information .....	83

## List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2. EUT Summary Table.....	4
Table 3. References .....	5
Table 4. Uncertainty Calculations Summary.....	5
Table 5. Equipment Configuration .....	9
Table 6. Support Equipment.....	9
Table 7. Ports and Cabling Information .....	10
Table 8. Antenna List .....	12
Table 9. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	13
Table 10. Conducted Emissions, 15.207(a), 2 wire dimmer, Phase Line, Test Results.....	14
Table 11. Conducted Emissions, 15.207(a), 2 wire dimmer, Neutral Line, Test Results .....	15
Table 12. Conducted Emissions, 15.207(a), 3 wire dimmer, Phase Line, Test Results.....	16
Table 13. Conducted Emissions, 15.207(a), Neutral Line, Test Results .....	17
Table 14. Conducted Emissions, 15.207(a), Key Pad Switch, Phase Line, Test Results .....	18
Table 15. Conducted Emissions, 15.207(a), Key Pad Switch, Neutral Line, Test Results .....	19
Table 16. Conducted Emissions, 15.207(a), Standard Switch, Phase Line, Test Results .....	20
Table 17. Conducted Emissions, 15.207(a), Standard Switch, Neutral Line, Test Results .....	21
Table 18. Conducted Emissions, 15.207(a), Fan Controller, Phase, Test Results .....	22
Table 19. Conducted Emissions, 15.207(a), Fan Controller, Neutral, Test Results .....	23
Table 20. 6 dB Occupied Bandwidth, Test Results .....	27
Table 21. Output Power Requirements from §15.247(b) .....	29
Table 22. Peak Power Output, Test Results .....	30
Table 23. Restricted Bands of Operation.....	32
Table 24. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	33
Table 25. Radiated Spurious Emissions, 2 wire dimmer, Test Results .....	38
Table 26. Radiated Emissions, 3 wire dimmer, Test Results .....	45
Table 27. Radiated Emissions, Fan Controller, Test Results.....	57
Table 28. Peak Power Spectral Density, Test Results .....	73
Table 29. Test Equipment List .....	77

## List of Plots

Plot 1. Conducted Emissions, 15.207(a), 2 wire dimmer, Phase Line.....	14
Plot 2. Conducted Emissions, 15.207(a), 2 wire dimmer, Neutral Line .....	15
Plot 3. Conducted Emissions, 15.207(a), 3 wire dimmer, Phase Line.....	16
Plot 4. Conducted Emissions, 15.207(a), Neutral Line .....	17
Plot 5. Conducted Emissions, 15.207(a), Key Pad, Phase Line .....	18
Plot 6. Conducted Emissions, 15.207(a), Key Pad, Neutral Line.....	19
Plot 7. Conducted Emissions, 15.207(a), Standard Switch, Phase Line .....	20
Plot 8. Conducted Emissions, 15.207(a), Standard Switch, Neutral Line .....	21
Plot 9. Conducted Emissions, 15.207(a), Fan Controller, Phase.....	22
Plot 10. Conducted Emissions, 15.207(a), Fan Controller, Neutral .....	23
Plot 11. 6 dB Occupied Bandwidth, Low Channel, CF 2405 MHz.....	28
Plot 12. 6 dB Occupied Bandwidth, Mid Channel, CF 2440 MHz .....	28
Plot 13. 6 dB Occupied Bandwidth, High Channel, CF 2480 MHz .....	28
Plot 14. Peak Power Output, Low Channel, CF 2405 MHz .....	31
Plot 15. Peak Power Output, Mid Channel, CF 2440 MHz.....	31
Plot 16. Peak Power Output, High Channel, CF 2480 MHz, lowest setting .....	31
Plot 17. Radiated Emissions, Average, high channel, 2480M, 1-18GHz - 2w dimmer .....	34
Plot 18. Radiated Emissions, Average, low channel, 2405M, 1-18GHz - 2w dimmer.....	34

Plot 19. Radiated Emissions, Average, low channel, 2405M, 1-18GHz, 3rd harmonic - 2w dimmer .....	34
Plot 20. Radiated Emissions, Average, low channel, 2405M, 1-18GHz, 4th harmonic - 2w dimmer .....	35
Plot 21. Radiated Emissions, Average, low channel, 2405M, 1-18GHz, 5th harmonic - 2w dimmer .....	35
Plot 22. Radiated Emissions, Average, mid channel, 2440M, 1-18GHz - 2w dimmer .....	35
Plot 23. Radiated Emissions, Average, mid channel, 2440M, 1-18GHz, 4th harmonic - 2w dimmer .....	36
Plot 24. Radiated Emissions, Average, mid channel, 2440M, 1-18GHz, 5th harmonic - 2w dimmer .....	36
Plot 25. Radiated Emissions, Peak, high channel, 2480M, 1-18GHz - 2w dimmer .....	36
Plot 26. Radiated Emissions, Peak, low channel, 2405M, 1-18GHz - 2w dimmer .....	37
Plot 27. Radiated Emissions, Peak, mid channel, 2440M, 1-18GHz - 2w dimmer .....	37
Plot 28. Radiated Emissions, high channel, 2480M, 0.03-1GHz - 2w dimmer .....	39
Plot 29. Radiated Emissions, low channel, 2405M, 0.03-1GHz - 2w dimmer .....	39
Plot 30. Radiated Emissions, mid channel, 2440M, 0.03-1GHz - 2w dimmer .....	39
Plot 31. Radiated Emissions, Average, High Channel, CF 2480MHz, 1-18GHz, 3 wire dimmer .....	40
Plot 32. Radiated Emissions, Average, Low Channel, CF 2405MHz, 1-18GHz, 3 wire dimmer .....	40
Plot 33. Radiated Emissions, Average, Low Channel, CF 2405MHz, 2nd harmonic, 3 wire dimmer .....	40
Plot 34. Radiated Emissions, Average, Low Channel, CF 2405MHz, 3rd harmonic, 3 wire dimmer .....	41
Plot 35. Radiated Emissions, Average, Low Channel, CF 2405MHz, 5th harmonic, 3 wire dimmer .....	41
Plot 36. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 1-18GHz, 3 wire dimmer .....	41
Plot 37. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 2nd harmonic, 3 wire dimmer .....	42
Plot 38. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 3rd harmonic, 3 wire dimmer .....	42
Plot 39. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 4th harmonic, 3 wire dimmer .....	42
Plot 40. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 5th harmonic, 3 wire dimmer .....	43
Plot 41. Radiated Emissions, Peak, High Channel, CF 2480MHz, 1-18GHz, 3 wire dimmer .....	43
Plot 42. Radiated Emissions, Peak, Low Channel, CF 2405MHz, 1-18GHz, 3 wire dimmer .....	43
Plot 43. Radiated Emissions, Peak, Mid Channel, CF 2440MHz, 1-18GHz, 3 wire dimmer .....	44
Plot 44. Radiated Emissions, High Channel, 2480M, 0.03-1GHz - 3w dimmer .....	46
Plot 45. Radiated Emissions, Low Channel, 2405M, 0.03-1GHz - 3w dimmer .....	46
Plot 46. Radiated Emissions, Mid Channel, 2440M, 0.03-1GHz - 3w dimmer .....	46
Plot 47. Radiated Emissions, Average, High Channel, 2480M, 1-18GHz - keypad .....	47
Plot 48. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz - keypad .....	47
Plot 49. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 2nd Harmonic - Keypad .....	47
Plot 50. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 3rd Harmonic - Keypad .....	48
Plot 51. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 4th Harmonic - Keypad .....	48
Plot 52. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz - Keypad .....	48
Plot 53. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 3rd Harmonic - Keypad .....	49
Plot 54. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 4th Harmonic - Keypad .....	49
Plot 55. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 5th Harmonic - Keypad .....	49
Plot 56. Radiated Emissions, Peak, High Channel, 2480M, 1-18GHz - Keypad .....	50
Plot 57. Radiated Emissions, Peak, Low Channel, 2405M, 1-18GHz - Keypad .....	50
Plot 58. Radiated Emissions, Peak, Mid Channel, 2440M, 1-18GHz - Keypad .....	50
Plot 59. Radiated Emissions, High Channel, 2480M, 0.03-1GHz - Keypad .....	51
Plot 60. Radiated Emissions, Low Channel, 2405M, 0.03-1GHz - Keypad .....	51
Plot 61. Radiated Emissions, Mid Channel, 2440M, 0.03-1GHz - Keypad .....	51
Plot 62. Radiated Emissions, Average, High Channel, 2480M, 1-18GHz, Lowest Setting, Switch .....	52
Plot 63. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, Switch .....	52
Plot 64. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 2nd Harmonic, Switch .....	52
Plot 65. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 3rd Harmonic, Switch .....	53
Plot 66. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 4th Harmonic, Switch .....	53
Plot 67. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 5th Harmonic, Switch .....	53
Plot 68. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, Switch .....	54
Plot 69. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 4th Harmonic, Switch .....	54
Plot 70. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 5th Harmonic, Switch .....	54
Plot 71. Radiated Emissions, Peak, High Channel, 2480M, 1-18GHz, Lowest Setting, Switch .....	55

Plot 72. Radiated Emissions, Peak, Low Channel, 2405M, 1-18GHz, Switch.....	55
Plot 73. Radiated Emissions, Peak, Mid Channel, 2440M, 1-18GHz, Switch .....	55
Plot 74. Radiated Emissions, High Channel, 2480M, 0.03-1GHz - Switch .....	56
Plot 75. Radiated Emissions, Low Channel, 2405M, 0.03-1GHz - Switch .....	56
Plot 76. Radiated Emissions, Mid Channel, 2440M, 0.03-1GHz – Switch .....	56
Plot 77. Radiated Emissions, Fan Controller, 30 MHz – 1 GHz .....	57
Plot 78. Radiated Restricted Bandedge, high channel, Average, CF 2480M, 2-wire dimmer.....	58
Plot 79. Radiated Restricted Bandedge, high channel, Peak, CF 2480M, 2-wire dimmer .....	58
Plot 80. Radiated Restricted Bandedge, low channel, Average, CF 2405M, 2-wire dimmer.....	59
Plot 81. Radiated Restricted Bandedge, low channel, PK, CF 2405M, 2-wire dimmer .....	59
Plot 82. Radiated Emissions, Average, Low Channel, CF 2405MHz, low bandedge, 3 wire dimmer.....	59
Plot 83. Radiated Emissions, Peak, Low Channel, CF 2405MHz, low bandedge, 3 wire dimmer .....	60
Plot 84. Radiated Restricted Band Edge, high channel, Average, CF 2480M, 3 wire dimmer .....	60
Plot 85. Radiated Restricted Band Edge, high channel, Peak, CF 2480M , 3 wire dimmer .....	60
Plot 86. Radiated Restricted Band Edge, High Channel, Average, CF 2480M, KEYPAD.....	61
Plot 87. Radiated Restricted Band Edge, High Channel, Peak, CF 2480M, KEYPAD .....	61
Plot 88. Radiated Restricted Band Edge, Low Channel, Average, CF 2405M, KEYPAD .....	61
Plot 89. Radiated Restricted Band Edge, Low Channel, Peak, CF 2405M, KEYPAD .....	62
Plot 90. Radiated Restricted Band Edge, High Channel, Average, CF 2480M, Switch.....	62
Plot 91. Radiated Restricted Band Edge, High Channel, Peak, CF 2480M, Switch .....	62
Plot 92. Radiated Restricted Band Edge, Low Channel, Average, CF 2405M, Switch .....	63
Plot 93. Radiated Restricted Band Edge, Low Channel, Peak, CF 2405M, Switch .....	63
Plot 94. 100 kHz Spurious Emissions, high channel, CF 2480M, reference level .....	69
Plot 95. 100 kHz Spurious Emissions, high channel, CF 2480M, 1-6GHz .....	69
Plot 96. 100 kHz Spurious Emissions, high channel, CF 2480M, 6-18GHz.....	69
Plot 97. 100 kHz Spurious Emissions, high channel, CF 2480M, bandedge 2483.5MHz .....	70
Plot 98. 100 kHz Spurious Emissions, low channel, CF 2405M, reference level .....	70
Plot 99. 100 kHz Spurious Emissions, low channel, CF 2405M, 1-6GHz .....	70
Plot 100. 100 kHz Spurious Emissions, low channel, CF 2405M, 6-18GHz .....	71
Plot 101. 100 kHz Spurious Emissions, low channel, CF 2405M, bandedge 2400MHz.....	71
Plot 102. 100 kHz Spurious Emissions, mid channel, CF 2440M, reference level .....	71
Plot 103. 100 kHz Spurious Emissions, mid channel, CF 2440M, 1-6GHz .....	72
Plot 104. 100 kHz Spurious Emissions, mid channel, CF 2440M, 6-18GHz.....	72
Plot 105. Power Density, high channel, CF 2480MHz, lowest setting.....	74
Plot 106. Power Density, low channel, CF 2405MHz.....	74
Plot 107. Power Density, mid channel, CF 2440MHz .....	74

## List of Figures

Figure 1. Block Diagram of Test Configuration, Switch.....	6
Figure 2. Block Diagram of Test Configuration, 300 W Dimmer (No Neutral) .....	6
Figure 3. Block Diagram of Test Configuration, 600 W Dimmer.....	7
Figure 4. Block Diagram of Test Configuration, Fan Controller .....	7
Figure 5. Block Diagram of Test Configuration, Keypad .....	8
Figure 6. Block Diagram, Occupied Bandwidth Test Setup.....	26

## List of Photographs

Photograph 1. Conducted Emissions, 15.207(a), 2 wire dimmer, Test Setup .....	24
Photograph 2. Conducted Emissions, 15.207(a), 3 wire dimmer, Test Setup .....	24
Photograph 3. Conducted Emissions, 15.207(a), Key Pad Switch, Test Setup .....	25



Photograph 4. Conducted Emissions, 15.207(a), Standard Switch, Test Setup.....	25
Photograph 5. Radiated Emissions, Setup Below 1GHz - 2w Dimmer.....	64
Photograph 6. Radiated Emissions, Setup Above 1GHz - 2w Dimmer.....	64
Photograph 7. Radiated Emissions, Setup Below 1GHz - 3w Dimmer.....	65
Photograph 8. Radiated Emissions, Setup Above 1GHz - 3w Dimmer.....	65
Photograph 9. Radiated Emissions, Setup Below 1GHz - Switch.....	66
Photograph 10. Radiated Emissions, Setup Above 1GHz - Switch.....	66
Photograph 11. Radiated Emissions, Setup Below 1GHz - Keypad.....	67
Photograph 12. Radiated Emissions, Spurs Above 1GHz - Keypad .....	67

## List of Terms and Abbreviations

<b>AC</b>	<b>Alternating Current</b>
<b>ACF</b>	<b>Antenna Correction Factor</b>
<b>Cal</b>	<b>Calibration</b>
<b><i>d</i></b>	<b>Measurement Distance</b>
<b>dB</b>	<b>Decibels</b>
<b>dB<math>\mu</math>A</b>	<b>Decibels above one microamp</b>
<b>dB<math>\mu</math>V</b>	<b>Decibels above one microvolt</b>
<b>dB<math>\mu</math>A/m</b>	<b>Decibels above one microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	<b>Decibels above one microvolt per meter</b>
<b>DC</b>	<b>Direct Current</b>
<b>E</b>	<b>Electric Field</b>
<b>DSL</b>	<b>Digital Subscriber Line</b>
<b>ESD</b>	<b>Electrostatic Discharge</b>
<b>EUT</b>	<b>Equipment Under Test</b>
<b><i>f</i></b>	<b>Frequency</b>
<b>FCC</b>	<b>Federal Communications Commission</b>
<b>GRP</b>	<b>Ground Reference Plane</b>
<b>H</b>	<b>Magnetic Field</b>
<b>HCP</b>	<b>Horizontal Coupling Plane</b>
<b>Hz</b>	<b>Hertz</b>
<b>IEC</b>	<b>International Electrotechnical Commission</b>
<b>kHz</b>	<b>kilohertz</b>
<b>kPa</b>	<b>kilopascal</b>
<b>kV</b>	<b>kilovolt</b>
<b>LISN</b>	<b>Line Impedance Stabilization Network</b>
<b>MHz</b>	<b>Megahertz</b>
<b><math>\mu</math>H</b>	<b>microhenry</b>
<b><math>\mu</math></b>	<b>microfarad</b>
<b><math>\mu</math>s</b>	<b>microseconds</b>
<b>NEBS</b>	<b>Network Equipment-Building System</b>
<b>PRF</b>	<b>Pulse Repetition Frequency</b>
<b>RF</b>	<b>Radio Frequency</b>
<b>RMS</b>	<b>Root-Mean-Square</b>
<b>TWT</b>	<b>Traveling Wave Tube</b>
<b>V/m</b>	<b>Volts per meter</b>
<b>VCP</b>	<b>Vertical Coupling Plane</b>

# **I. Executive Summary**

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Busch-Jaeger Elektro GmbH 5 products, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the 5 products. Busch-Jaeger Elektro GmbH should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the 5 products, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Busch-Jaeger Elektro GmbH, purchase order number 4100990732. All tests were conducted using measurement procedure ANSI C63.4-2014.

<b>FCC Reference 47 CFR Part 15.247:2005</b>	<b>Description</b>	<b>Compliance</b>
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(c)	Spurious Emissions in Non-restricted Bands	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	Maximum Permissible Exposure (MPE)	Compliant

**Table 1. Executive Summary of EMC Part 15.247 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Busch-Jaeger Elektro GmbH to perform testing on the 5 products, under Busch-Jaeger Elektro GmbH's purchase order number 4100990732.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Busch-Jaeger Elektro GmbH, 5 products.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	5 products	
<b>Model(s) Covered:</b>	5 products	
<b>EUT Specifications:</b>	Primary Power: 120 VAC 60 Hz	
	FCC ID: 2AO6WFHIWD1US	
	Type of Modulations:	DSSS
	Equipment Code:	DSSS
	Peak RF Output Power:	16.53 dBm
	EUT Frequency Ranges:	2405 – 2480 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Donald Salguero	
<b>Report Date(s):</b>	June 22, 2018	

**Table 2. EUT Summary Table**

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices
<b>KDB 558074 v04</b>	Guidance For Performing Compliance Measurements On Digital Transmission Systems (DTS) Operating Under Section 15.247

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
<b>RF Frequencies</b>	±4.52 Hz	2	95%
<b>RF Power Conducted Emissions</b>	±2.32 dB	2	95%
<b>RF Power Conducted Spurious Emissions</b>	±2.25 dB	2	95%
<b>RF Power Radiated Emissions</b>	±3.01 dB	2	95%

**Table 4. Uncertainty Calculations Summary**

## E. Description of Test Sample

The Busch-Jaeger Elektro GmbH 5 products, Equipment Under Test (EUT), are described by the following:

Each module can either directly control its output as indicated (switch or dimmer controls a connected light, etc.) by manual activation of the front paddle, or can receive commands via an RF input from another module, or from a System Access Point. This System Access Point can be provided, but is already certified. RF inputs can also be sent from the 4 button keypad (this has no AC output, only RF output).

RF signal is a proprietary IEEE 802.15.4 signal. These modules are intended for use in residential settings in the US, Canada and Mexico.

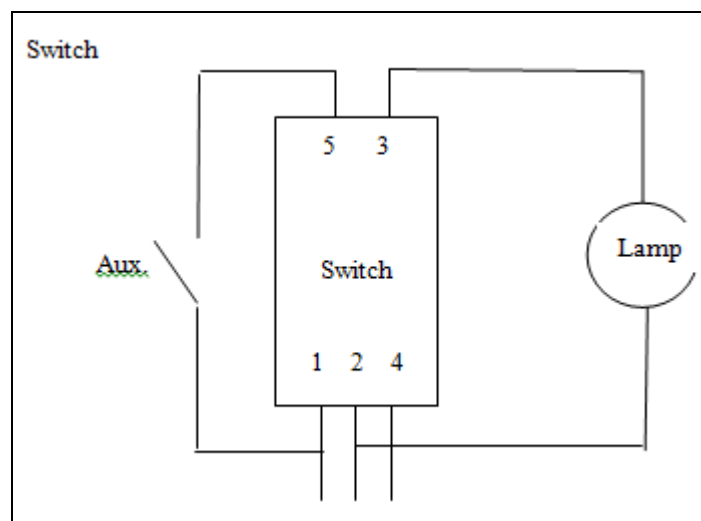


Figure 1. Block Diagram of Test Configuration, Switch

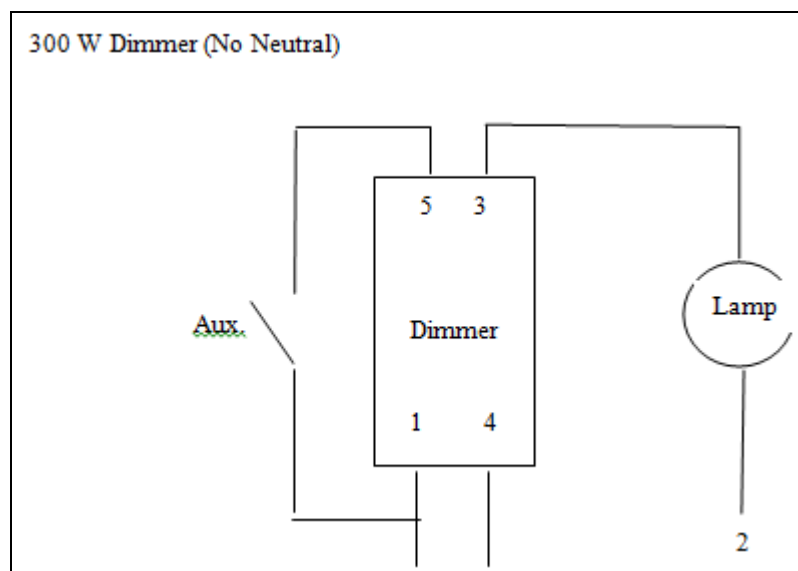


Figure 2. Block Diagram of Test Configuration, 300 W Dimmer (No Neutral)



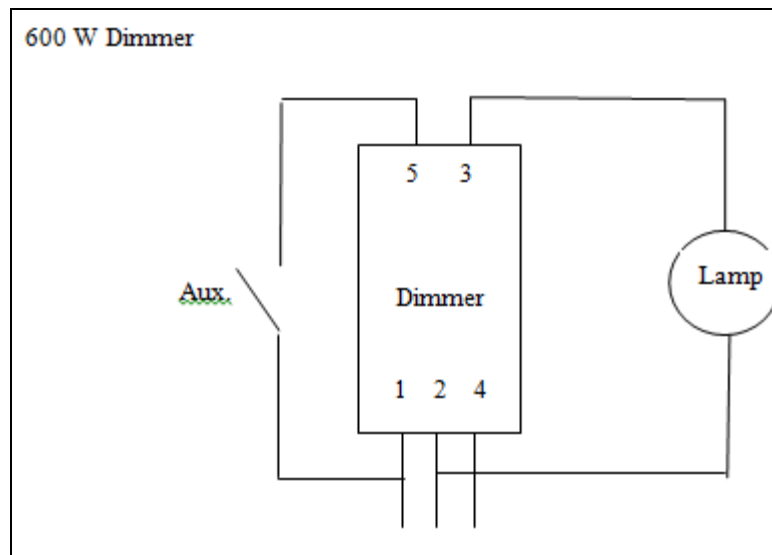


Figure 3. Block Diagram of Test Configuration, 600 W Dimmer


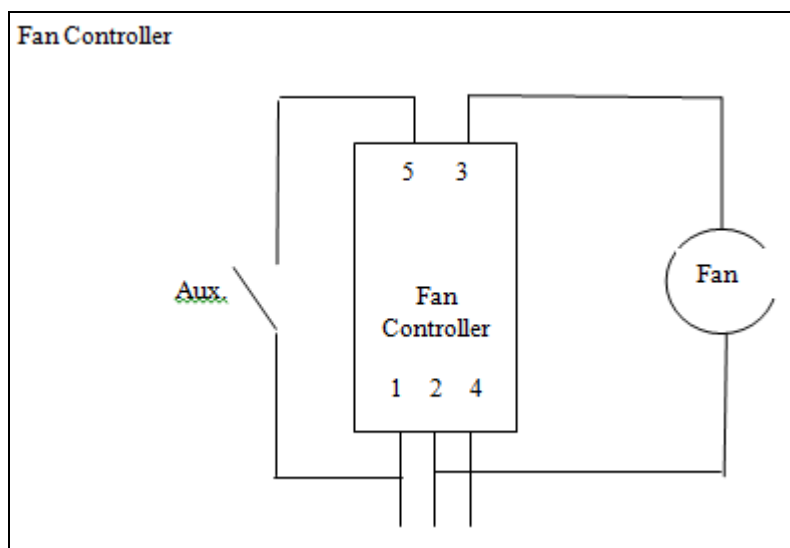


Figure 4. Block Diagram of Test Configuration, Fan Controller

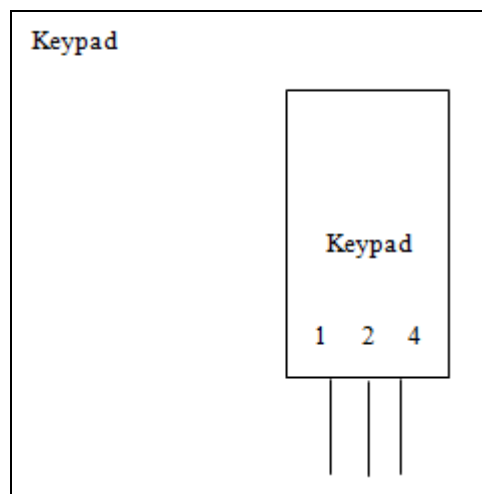

**Figure 5. Block Diagram of Test Configuration, Keypad**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number (White / Light Almond)	Serial Number	Rev. #
		Switch	LS-1.1-xx	2CQA100001A0011 / 2CQA100002A0011		
		300 W Dimmer	DS-3.1-xx	2CQA100038A0011 / 2CQA100039A0011		
		600 W Dimmer	DS-6.1-xx	2CQA100004A0011 / 2CQA100005A0011		
		Fan Controller	FC-3.1-xx	2CQA100010A0011 / 2CQA100011A0011		
		Keypad	KP-4.1-xx	2CQA100007A0011 / 2CQA100008A0011		

Table 5. Equipment Configuration

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
	Lamp		Generic	N/A
	Ceiling Fan		Generic	N/A
	Aux switch		Generic	N/A
	CDR	Atmel	ATSAMR21-XPRO	N/A

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

Table 6. Support Equipment

## H. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1		Black – 120 VAC Line input					
2		White - Neutral					
3		Red – 120 VAC Line output					
4		Green - Ground					
5		Blue 120 VAC Aux Input					

Table 7. Ports and Cabling Information

## I. Mode of Operation

Each module can be connected to a lamp or fan as appropriate to indicate functionality (on / off, dim up / dim down, etc.) with the exception of the keypad which has no AC output. This is only used as an input to the wireless mesh network. Each module also has indicator LED's visible through the front paddle, which correspond to the output. (LED = dim when output off (locating mode), LED is bright when output is ON)

A switch or other module can be programmed to receive RF commands from the keypad, and toggle its output in response to the manual activation of a button on the keypad, even though the keypad is not directly connected to the switch.

## J. Method of Monitoring EUT Operation

Switch – Output (Lamp and indicator LED) remain on – working, Output turns off – Not working  
Dimmers – Output (Lamp and indicator LED's) remain on – working, Output turns off – Not working  
Fan Controller - Output (Fan and indicator LED's) remain on – working, Output turns off – Not working  
Keypad - Output indicator LED's remain on – working, Output turns off – Not working

## K. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Busch-Jaeger Elektro GmbH upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. EUT uses a built-in antenna

**Test Engineer(s):** Donald Salguero

**Test Date(s):** May 14, 2018

Antenna Type:	Inverted-F PCB trace
Maximum Antenna Gain:	0.51dBi @ 2405MHz
	0.82dBi @ 2440MHz
	-0.13dBi @ 2480MHz

**Table 8. Antenna List**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):** § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

**Table 9. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Test Results:** The EUT was compliant with this requirement. Measured emissions were within applicable limits.

**Test Engineer(s):** Donald Salguero and Deepak Giri


**Test Date(s):** May 4 and 14, 2018

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
*0.1925	61.15	0	61.15	63.93	-2.78	31.58	0	31.58	53.93	-22.35
*0.15	64.74	0	64.74	66	-1.26	35.89	0	35.89	56	-20.11
*0.167	63.76	0	63.76	65.11	-1.35	33.74	0	33.74	55.11	-21.37
0.3	49.22	0	49.22	60.24	-11.02	25.24	0	25.24	50.24	-25
0.417	41.24	0	41.24	57.51	-16.27	22.28	0	22.28	47.51	-25.23
6.4675	25.57	0	25.57	60	-34.43	7.633	0	7.633	50	-42.367

**Table 10. Conducted Emissions, 15.207(a), 2 wire dimmer, Phase Line, Test Results**

Note 1: \* - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

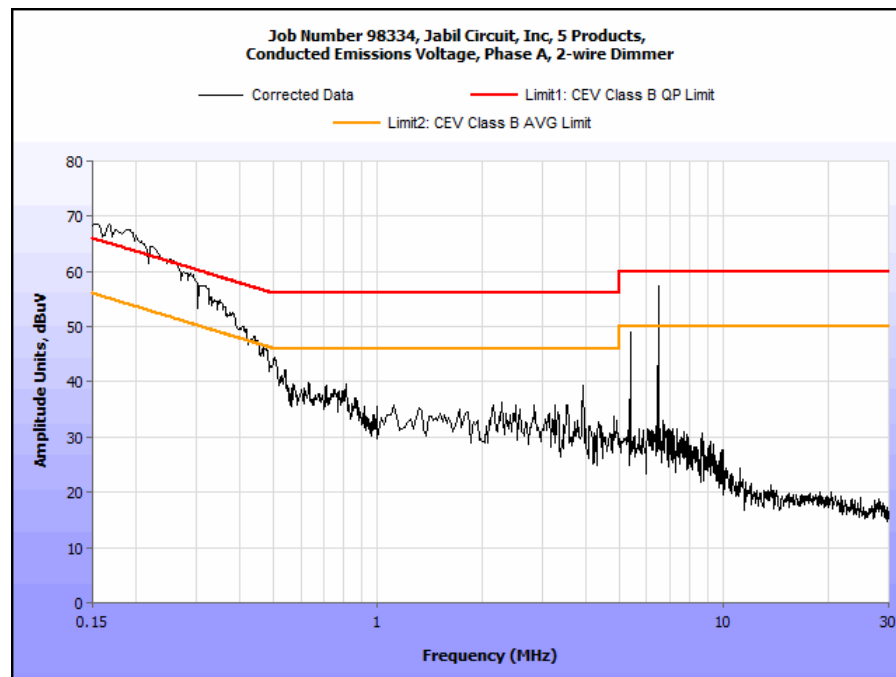

**Plot 1. Conducted Emissions, 15.207(a), 2 wire dimmer, Phase Line**




## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
*0.169125	63.85	0	63.85	65	-1.15	32.8	0	32.8	55	-22.2
*0.15	65.3	0	65.3	66	-0.7	36.11	0	36.11	56	-19.89
*0.2	60.9	0	60.9	63.61	-2.71	33.3	0	33.3	53.61	-20.31
0.3	50.28	0	50.28	60.24	-9.96	26.88	0	26.88	50.24	-23.36
0.8045	33.47	0	33.47	56	-22.53	21.66	0	21.66	46	-24.34
6.4675	27.05	0	27.05	60	-32.95	8.197	0	8.197	50	-41.803

**Table 11. Conducted Emissions, 15.207(a), 2 wire dimmer, Neutral Line, Test Results**

Note 1: \* - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

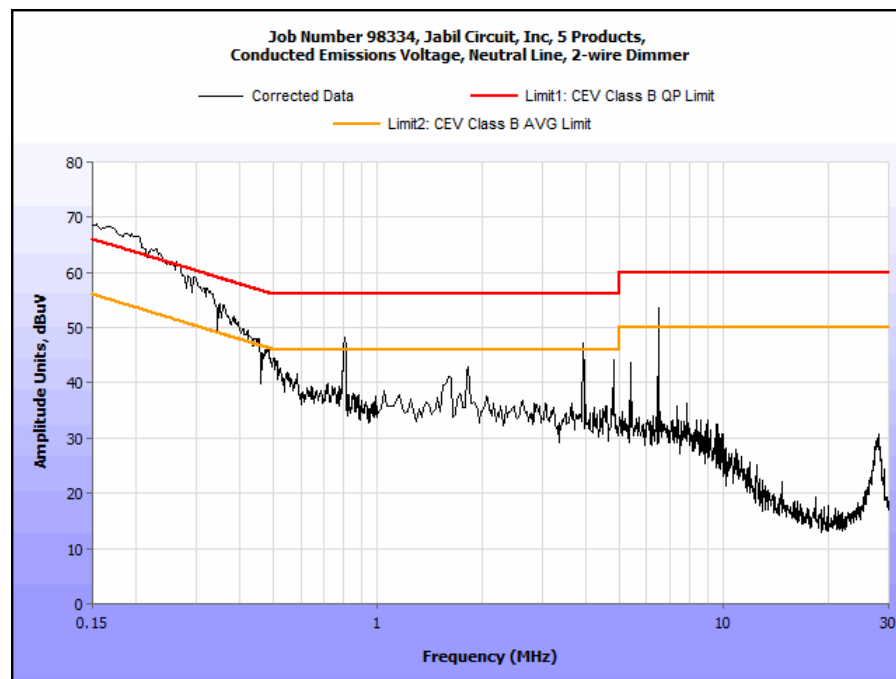


**Plot 2. Conducted Emissions, 15.207(a), 2 wire dimmer, Neutral Line**

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.42625	39.26	0	39.26	57.33	-18.07	32.99	0	32.99	47.33	-14.34
0.38162	41	0	41	58.24	-17.24	33.47	0	33.47	48.24	-14.77
0.31575	39.27	0	39.27	59.82	-20.55	32.13	0	32.13	49.82	-17.69
0.762	48.19	0	48.19	56	-7.81	36.45	0	36.45	46	-9.55
0.462375	40.81	0	40.81	56.65	-15.84	30.35	0	30.35	46.65	-16.3
6.4675	30.16	0	30.16	60	-29.84	13.1	0	13.1	50	-36.9

**Table 12. Conducted Emissions, 15.207(a), 3 wire dimmer, Phase Line, Test Results**

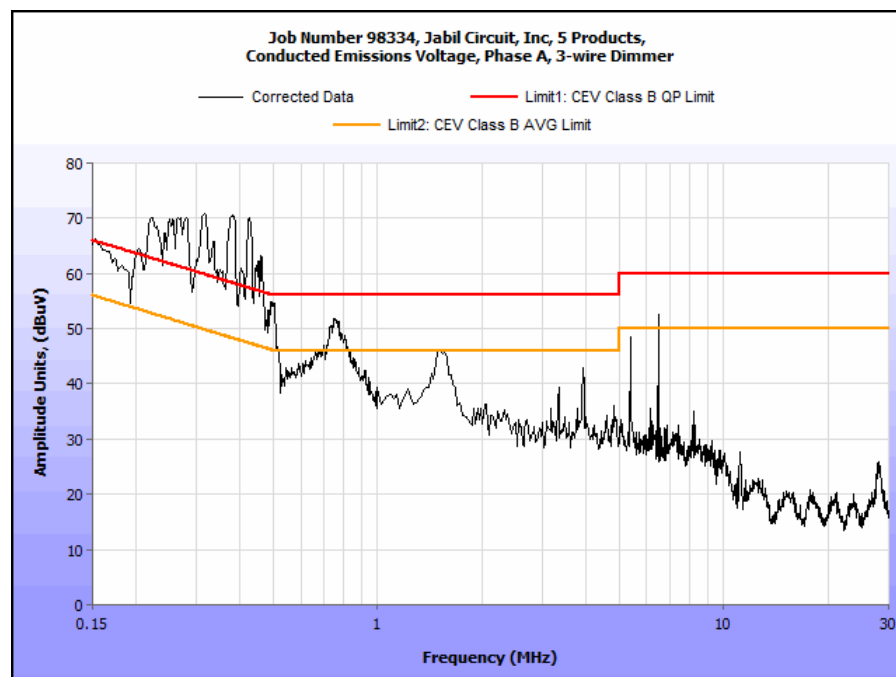


**Plot 3. Conducted Emissions, 15.207(a), 3 wire dimmer, Phase Line**

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.368875	48.8	0	48.8	58.53	-9.73	32.86	0	32.86	48.53	-15.67
0.275375	55.16	0	55.16	60.95	-5.79	34.57	0	34.57	50.95	-16.38
<b>*0.184</b>	<b>62.47</b>	<b>0</b>	<b>62.47</b>	<b>64.3</b>	<b>-1.83</b>	40.33	0	40.33	54.3	-13.97
0.56225	40.26	0	40.26	56	-15.74	32.02	0	32.02	46	-13.98
0.483625	42.31	0	42.31	56.28	-13.97	30.42	0	30.42	46.28	-15.86
6.4675	30.03	0	30.03	60	-29.97	15.34	0	15.34	50	-34.66

**Table 13. Conducted Emissions, 15.207(a), Neutral Line, Test Results**

Note 1: \* - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

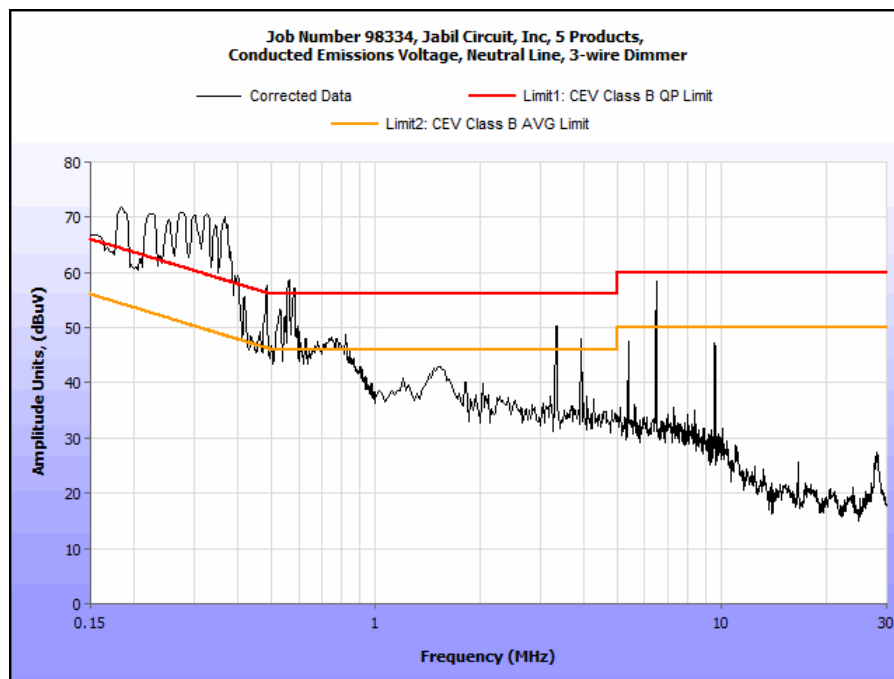


**Plot 4. Conducted Emissions, 15.207(a), Neutral Line**

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.154	40.77	0	40.77	65.78	-25.01	22.77	0	22.77	55.78	-33.01
0.253	40.19	0	40.19	61.66	-21.47	23.49	0	23.49	51.66	-28.17
0.329	36.98	0	36.98	59.48	-22.5	21.77	0	21.77	49.48	-27.71
0.399	35.42	0	35.42	57.87	-22.45	19.76	0	19.76	47.87	-28.11
0.444	33.21	0	33.21	56.99	-23.78	22.73	0	22.73	46.99	-24.26
0.499	31.79	0	31.79	56.02	-24.23	19.43	0	19.43	46.02	-26.59

Table 14. Conducted Emissions, 15.207(a), Key Pad Switch, Phase Line, Test Results

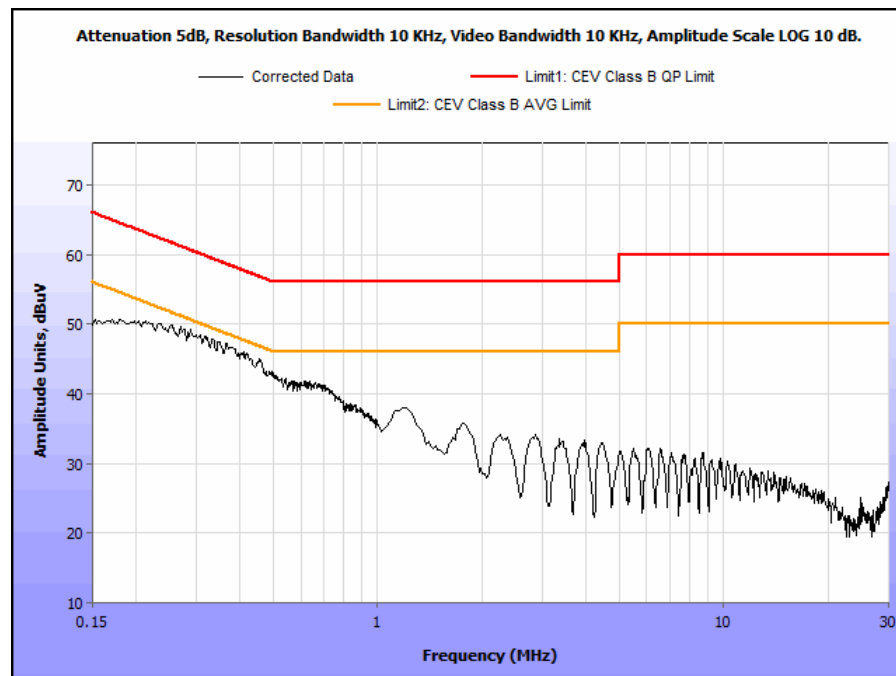


Plot 5. Conducted Emissions, 15.207(a), Key Pad, Phase Line

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.156	41.26	0	41.26	65.67	-24.41	21.78	0	21.78	55.67	-33.89
0.251	39.11	0	39.11	61.72	-22.61	22.33	0	22.33	51.72	-29.39
0.341	37.42	0	37.42	59.18	-21.76	20.19	0	20.19	49.18	-28.99
0.448	33.21	0	33.21	56.91	-23.7	19.18	0	19.18	46.91	-27.73
0.479	31.11	0	31.11	56.36	-25.25	17.46	0	17.46	46.36	-28.9
0.566	32.47	0	32.47	56	-23.53	13.41	0	13.41	46	-32.59

Table 15. Conducted Emissions, 15.207(a), Key Pad Switch, Neutral Line, Test Results

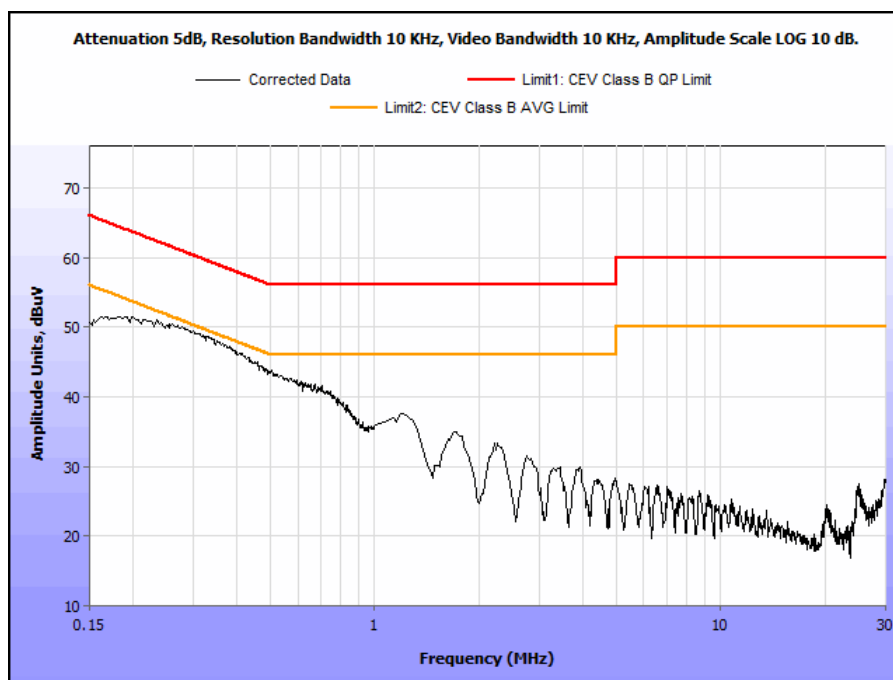


Plot 6. Conducted Emissions, 15.207(a), Key Pad, Neutral Line

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.155	52.38	0	45.21	65.73	-20.52	31.12	0	31.12	55.73	-24.61
0.231	53.22	0	40.77	62.41	-21.64	30.11	0	30.11	52.41	-22.3
0.366	53.23	0	43.66	58.59	-14.93	31.78	0	31.78	48.59	-16.81
0.431	51.82	0	40.21	57.23	-17.02	32.47	0	32.47	47.23	-14.76
0.478	53.49	0	39.78	56.37	-16.59	25.76	0	25.76	46.37	-20.61
0.561	54.63	0	38.77	56	-17.23	21.36	0	21.36	46	-24.64

Table 16. Conducted Emissions, 15.207(a), Standard Switch, Phase Line, Test Results

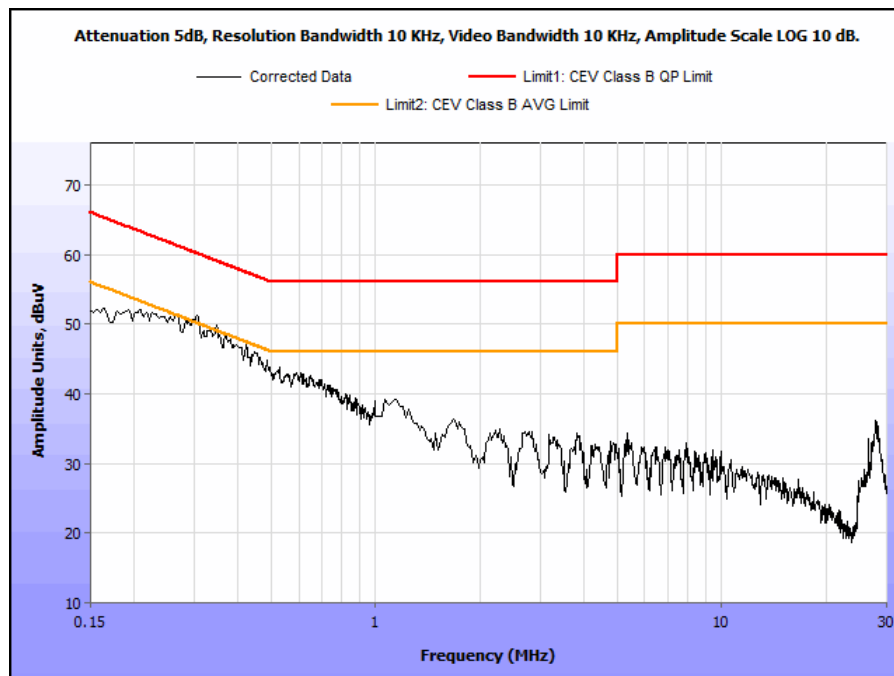


Plot 7. Conducted Emissions, 15.207(a), Standard Switch, Phase Line

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.153	47.22	0	47.22	65.84	-18.62	37.88	0	37.88	55.84	-17.96
0.242	45.61	0	45.61	62.03	-16.42	37.61	0	37.61	52.03	-14.42
0.356	44.19	0	44.19	58.82	-14.63	36.19	0	36.19	48.82	-12.63
0.398	44.71	0	44.71	57.9	-13.19	36.11	0	36.11	47.9	-11.79
0.471	43.12	0	43.12	56.5	-13.38	35.41	0	35.41	46.5	-11.09
0.573	40.21	0	40.21	56	-15.79	32.61	0	32.61	46	-13.39

Table 17. Conducted Emissions, 15.207(a), Standard Switch, Neutral Line, Test Results

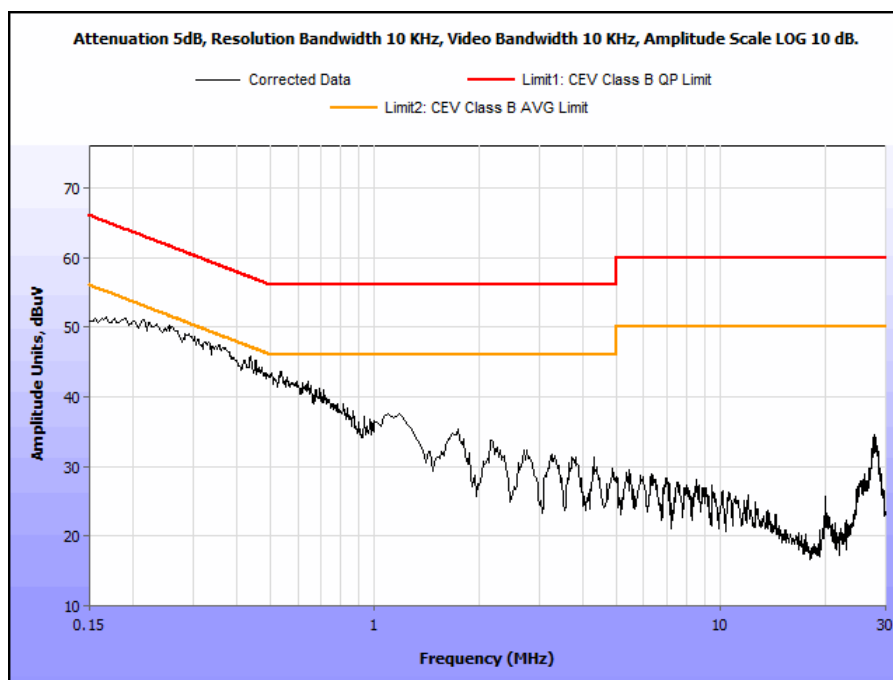


Plot 8. Conducted Emissions, 15.207(a), Standard Switch, Neutral Line

## Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.156	54.09	0	54.09	79	-24.91	50.55	0	50.55	66	-15.45
0.201	51.84	0	51.84	79	-27.16	49.46	0	49.46	66	-16.54
0.279	49.33	0	49.33	79	-29.67	47.15	0	47.15	66	-18.85
0.808	40.62	0	40.62	73	-32.38	37.14	0	37.14	60	-22.86
1.4	35.53	0	35.53	73	-37.47	31.96	0	31.96	60	-28.04
18.59	31.36	0.15	31.51	73	-41.49	25.17	0.15	25.32	60	-34.68

Table 18. Conducted Emissions, 15.207(a), Fan Controller, Phase, Test Results

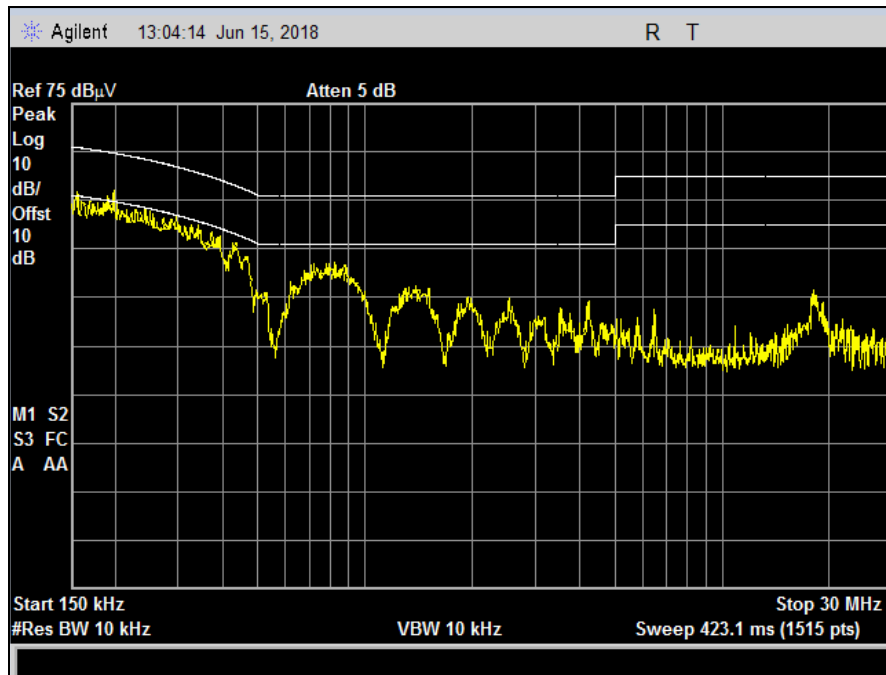


Plot 9. Conducted Emissions, 15.207(a), Fan Controller, Phase



### Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.151	54.03	0	54.03	79	-24.97	50.72	0	50.72	66	-15.28
0.165	52.45	0	52.45	79	-26.55	49.58	0	49.58	66	-16.42
0.182	52.22	0	52.22	79	-26.78	49.75	0	49.75	66	-16.25
0.203	51.09	0	51.09	79	-27.91	48.67	0	48.67	66	-17.33
0.813	37.84	0	37.84	73	-35.16	35.42	0	35.42	60	-24.58
18.52	30.39	0.15	30.54	73	-42.46	23.88	0.15	24.03	60	-35.97

Table 19. Conducted Emissions, 15.207(a), Fan Controller, Neutral, Test Results

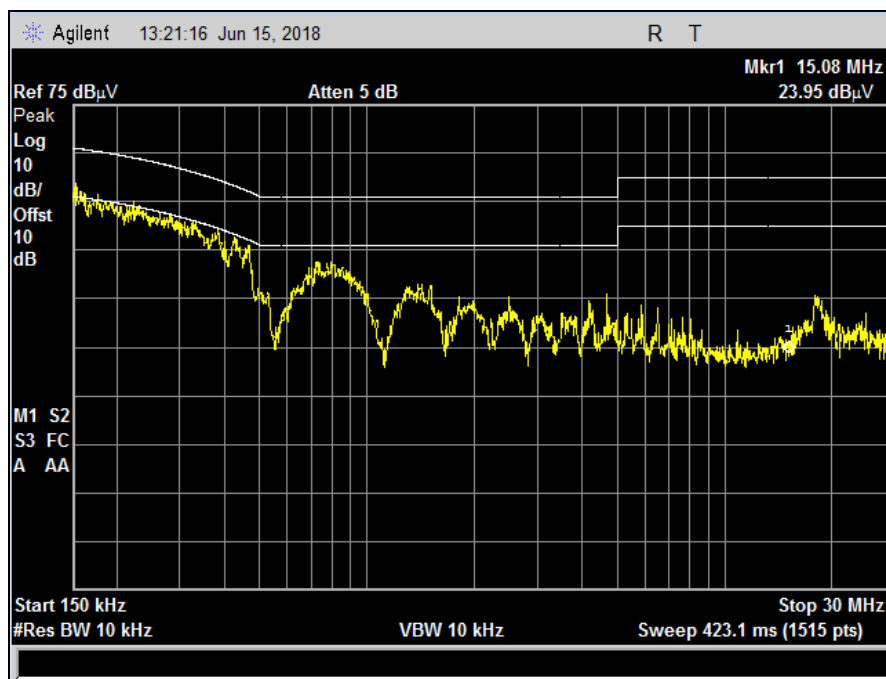

Plot 10. Conducted Emissions, 15.207(a), Fan Controller, Neutral


### 15.207(a) Conducted Emissions Test Setup Photo



**Photograph 1. Conducted Emissions, 15.207(a), 2 wire dimmer, Test Setup**



**Photograph 2. Conducted Emissions, 15.207(a), 3 wire dimmer, Test Setup**

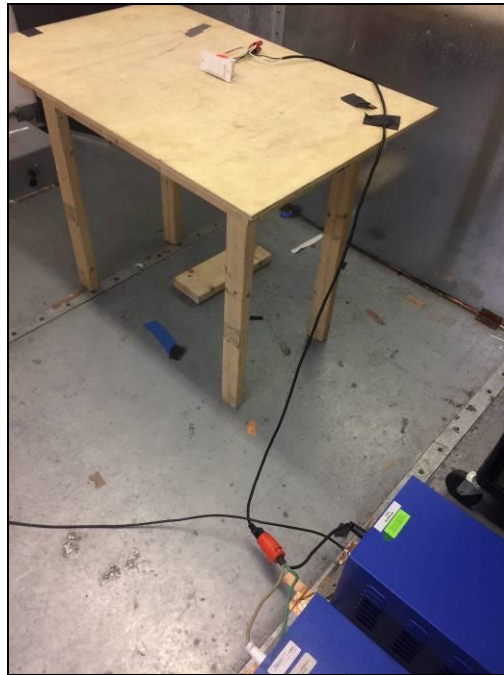

**Photograph 3. Conducted Emissions, 15.207(a), Key Pad Switch, Test Setup**



**Photograph 4. Conducted Emissions, 15.207(a), Standard Switch, Test Setup**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(2) 6 dB Bandwidth

**Test Requirements:** § 15.247(a)(2): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.


**Test Procedure:** The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW = 100kHz, VBW = 3\*RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

**Test Results** The EUT was compliant with § 15.247 (a)(2). No anomalies detected.

The 6 dB Bandwidth was determined from the plots on the following pages.

**Test Engineer(s):** Donald Salguero

**Test Date(s):** April 26, 2018




**Figure 6. Block Diagram, Occupied Bandwidth Test Setup**

## Occupied Bandwidth Test Results


Occupied Bandwidth		
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)
Low	2405	1.573
Mid	2440	1.602
High	2480	1.593

**Table 20. 6 dB Occupied Bandwidth, Test Results**


## 6 dB Occupied Bandwidth Test Results

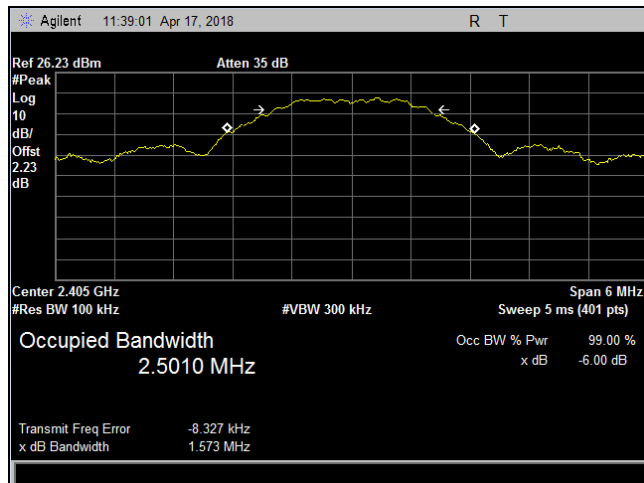

Plot 11. 6 dB Occupied Bandwidth, Low Channel, CF 2405 MHz

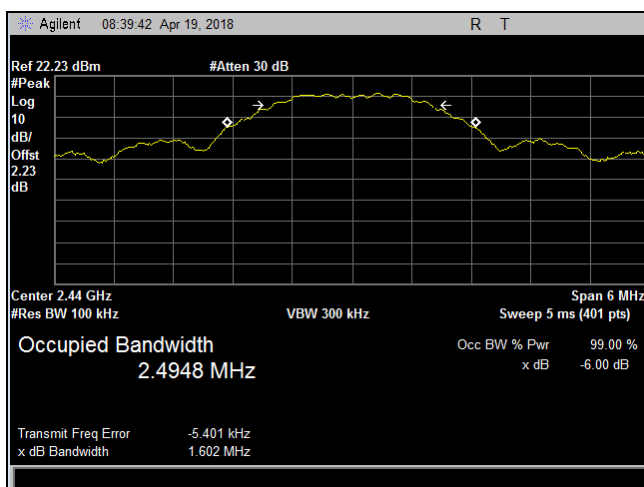

Plot 12. 6 dB Occupied Bandwidth, Mid Channel, CF 2440 MHz

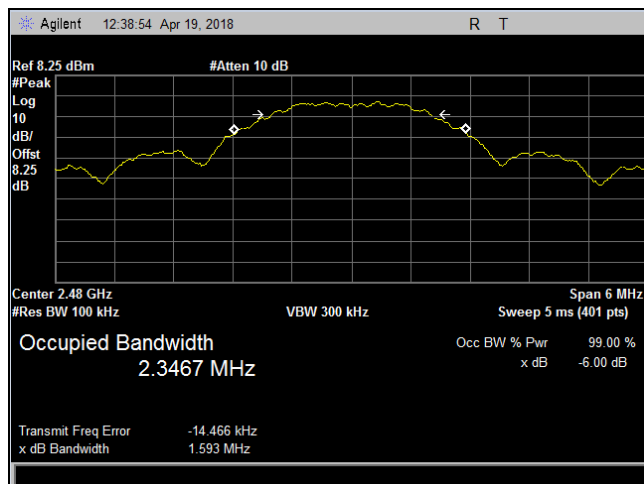

Plot 13. 6 dB Occupied Bandwidth, High Channel, CF 2480 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
2400–2483.5	1.000

**Table 21. Output Power Requirements from §15.247(b)**

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the 9, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Procedure:** The EUT was measured at the low, mid and high channels of each band at the maximum power level. Measurements were performed on a radiated setup, with the receive antenna placed 1m away from the EUT.

**Test Results:** The EUT was compliant with the Peak Power Output limits of §15.247(b). No anomalies detected.

**Test Engineer(s):** Donald Salguero

**Test Date(s):** April 26, 2018


## Peak Power Output Test Results

Peak Conducted Output Power				
Carrier Channel	Frequency (MHz)	Measured EIRP (dBm)	Antenna Gain (dBi)	Average Conducted Power (dBm)
Low	2405	17.04	0.51	16.53
Mid	2440	16.79	0.82	15.97
High	2480	1.59	-0.13	1.72


**Table 22. Peak Power Output, Test Results**




## Peak Power Output Test Results

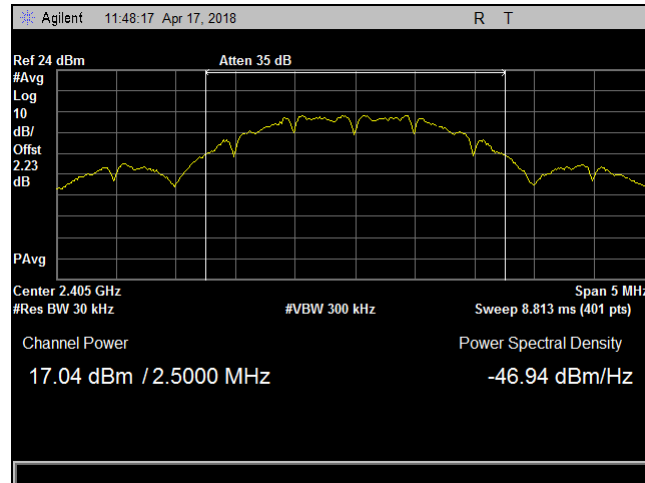

Plot 14. Peak Power Output, Low Channel, CF 2405 MHz

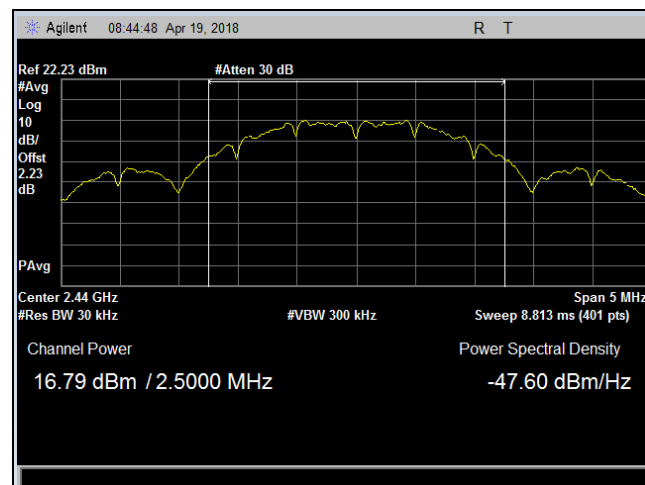

Plot 15. Peak Power Output, Mid Channel, CF 2440 MHz

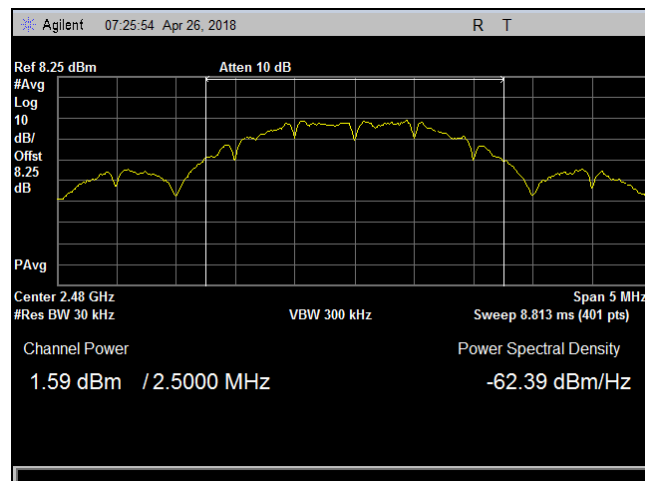

Plot 16. Peak Power Output, High Channel, CF 2480 MHz, lowest setting

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.209 Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 23. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 24.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 24. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**


**Test Procedures:** The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d) and § 15.209. Measured emissions were within applicable limits.


**Test Engineer(s):** Donald Salguero

**Test Date(s):** May 14, 2018


## Radiated Spurious Emissions, 2 wire dimmer Test Results

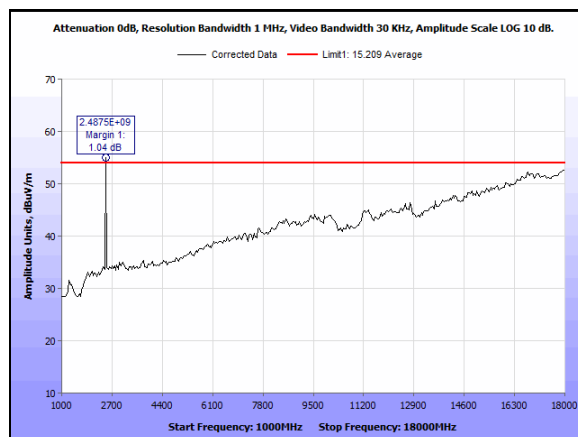


Plot 17. Radiated Emissions, Average, high channel, 2480M, 1-18GHz - 2w dimmer

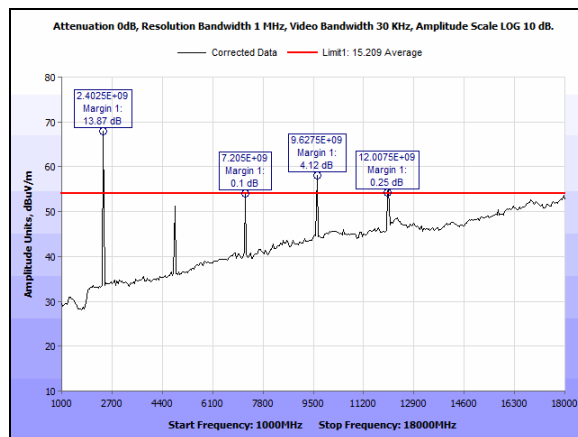


Plot 18. Radiated Emissions, Average, low channel, 2405M, 1-18GHz - 2w dimmer

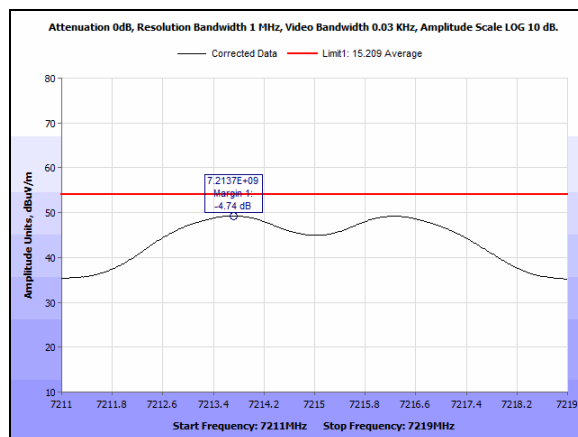


Plot 19. Radiated Emissions, Average, low channel, 2405M, 1-18GHz, 3rd harmonic - 2w dimmer

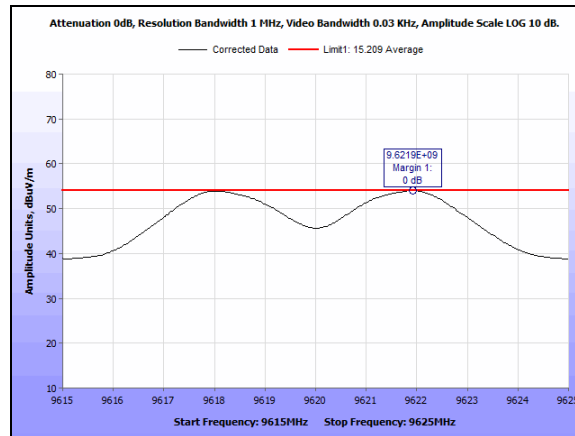


Plot 20. Radiated Emissions, Average, low channel, 2405M, 1-18GHz, 4th harmonic - 2w dimmer

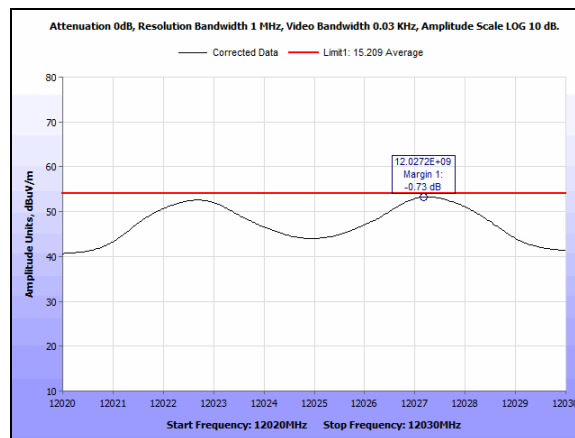


Plot 21. Radiated Emissions, Average, low channel, 2405M, 1-18GHz, 5th harmonic - 2w dimmer

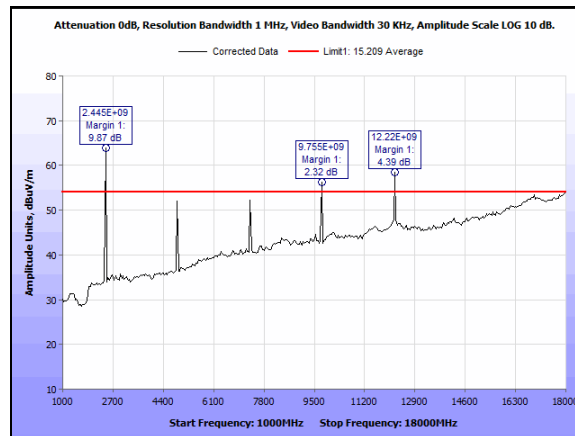


Plot 22. Radiated Emissions, Average, mid channel, 2440M, 1-18GHz - 2w dimmer

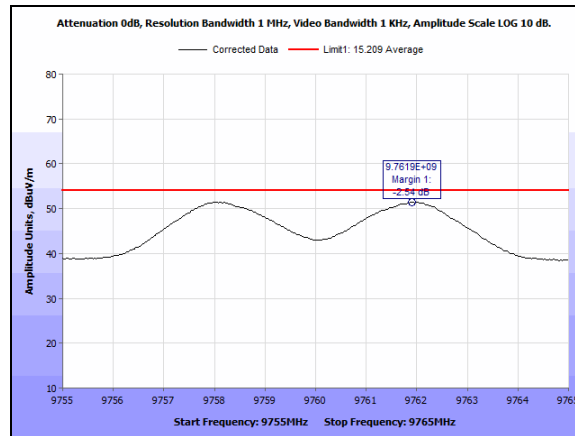


**Plot 23. Radiated Emissions, Average, mid channel, 2440M, 1-18GHz, 4th harmonic - 2w dimmer**

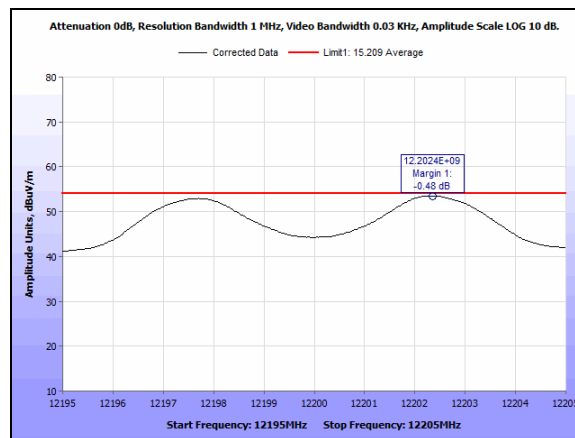


**Plot 24. Radiated Emissions, Average, mid channel, 2440M, 1-18GHz, 5th harmonic - 2w dimmer**

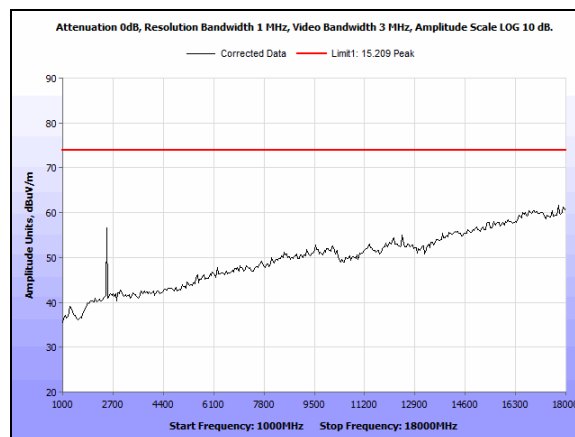

**Plot 25. Radiated Emissions, Peak, high channel, 2480M, 1-18GHz - 2w dimmer**

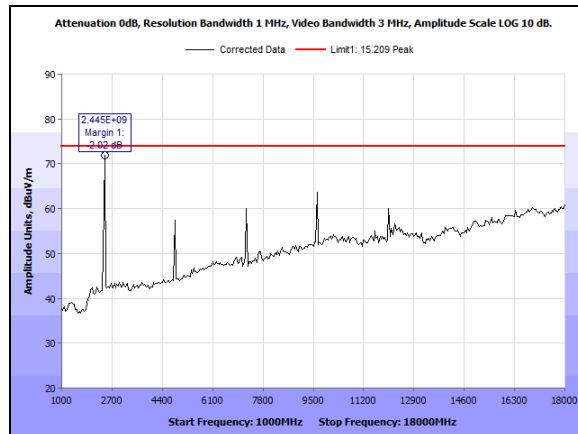

**Plot 26. Radiated Emissions, Peak, low channel, 2405M, 1-18GHz - 2w dimmer**

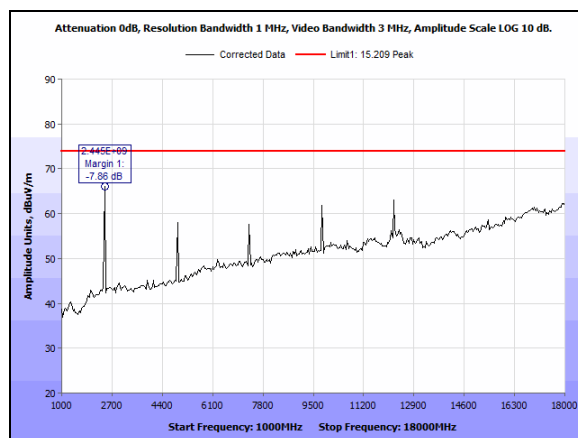


**Plot 27. Radiated Emissions, Peak, mid channel, 2440M, 1-18GHz - 2w dimmer**


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected EMI Meter Reading (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss/Pre-amp (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
819.21844	330	H	1.2791	6.78	22.38	4.29	0	33.45	46	-12.55
819.21844	114	V	1.28	6.44	22.38	4.29	0	33.11	46	-12.89
451.82365	321	H	1.2791	13.98	17.40	3.20	0	34.58	46	-11.42
451.82365	103	V	1.2795	6.09	17.40	3.20	0	26.69	46	-19.31
543.18637	297	H	1.2791	11.44	18.84	3.54	0	33.82	46	-12.18
543.18637	42	V	1.39	8.3	18.84	3.54	0	30.68	46	-15.32
156.35271	15	H	2.4065	15.89	13.50	1.84	0	31.23	43.5	-12.27
156.35271	83	V	1.2791	10.41	13.50	1.84	0	25.75	43.5	-17.75
30	4	H	1.6652	5.65	22.70	1.05	0	29.40	40	-10.60
30	335	V	1.2791	6.37	22.70	1.05	0	30.12	40	-9.88
825.0501	345	H	1.6417	6.71	22.40	4.31	0	33.42	46	-12.58
825.0501	160	V	1.2782	6.23	22.40	4.31	0	32.94	46	-13.06

**Table 25. Radiated Spurious Emissions, 2 wire dimmer, Test Results**




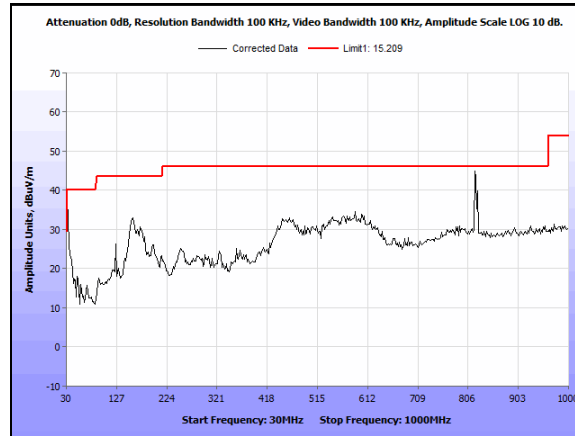

**Plot 28. Radiated Emissions, high channel, 2480M, 0.03-1GHz - 2w dimmer**

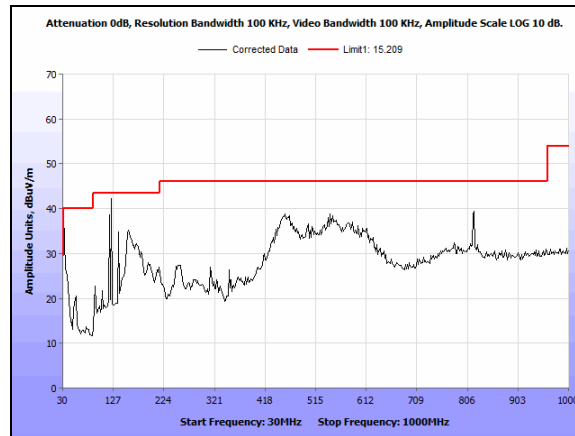


**Plot 29. Radiated Emissions, low channel, 2405M, 0.03-1GHz - 2w dimmer**

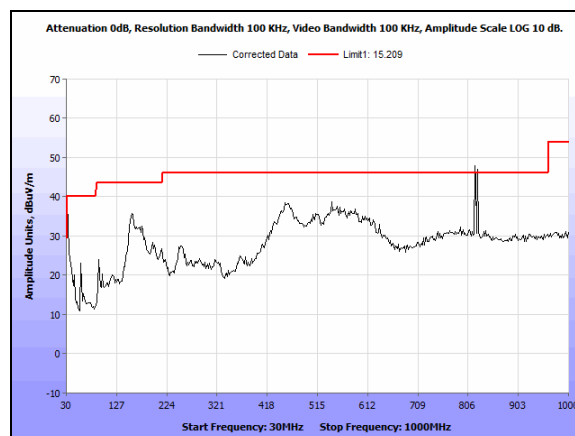


**Plot 30. Radiated Emissions, mid channel, 2440M, 0.03-1GHz - 2w dimmer**


## Radiated Spurious Emissions, 3 wire dimmer Test Results

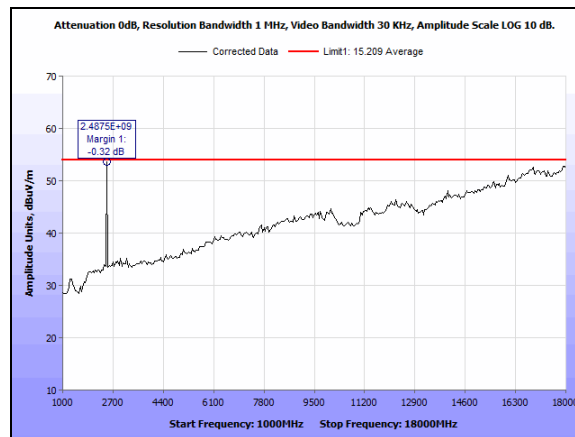


Plot 31. Radiated Emissions, Average, High Channel, CF 2480MHz, 1-18GHz, 3 wire dimmer

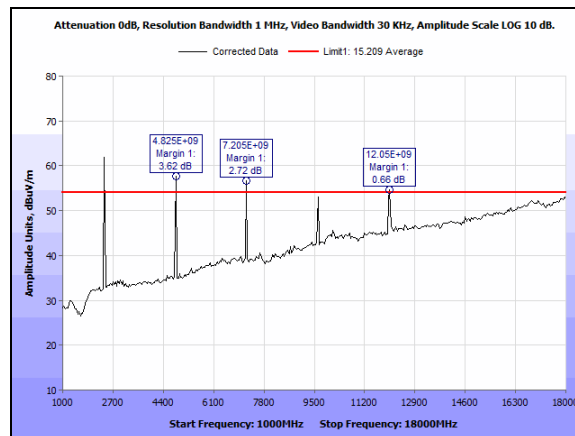


Plot 32. Radiated Emissions, Average, Low Channel, CF 2405MHz, 1-18GHz, 3 wire dimmer

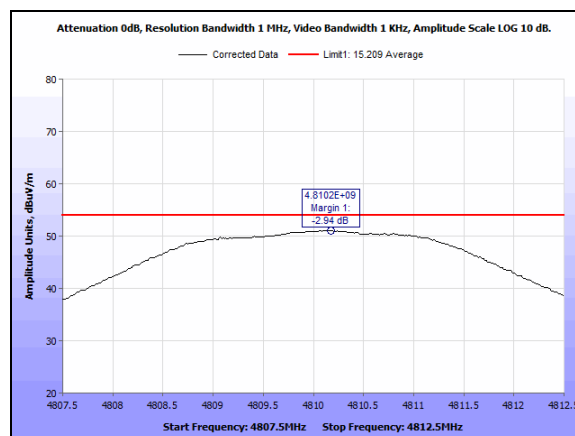


Plot 33. Radiated Emissions, Average, Low Channel, CF 2405MHz, 2nd harmonic, 3 wire dimmer

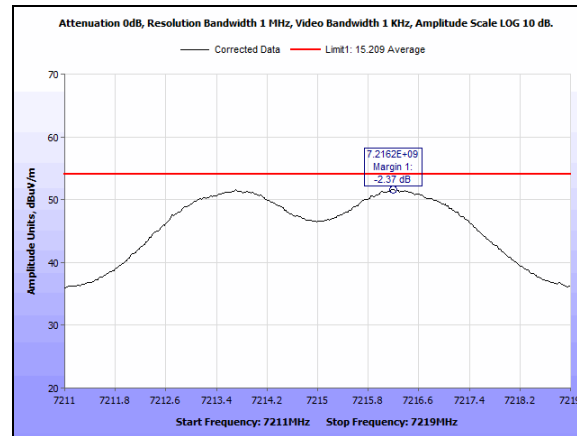


**Plot 34. Radiated Emissions, Average, Low Channel, CF 2405MHz, 3rd harmonic, 3 wire dimmer**

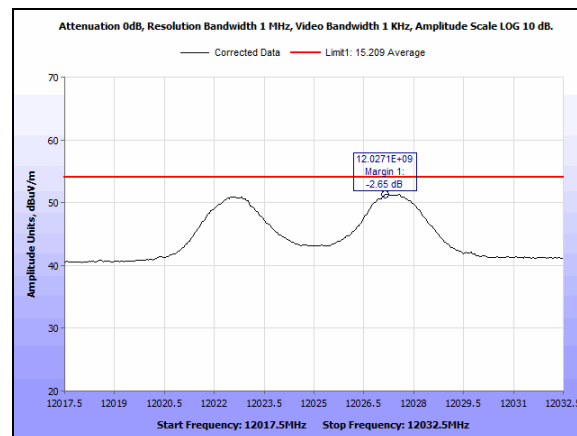


**Plot 35. Radiated Emissions, Average, Low Channel, CF 2405MHz, 5th harmonic, 3 wire dimmer**

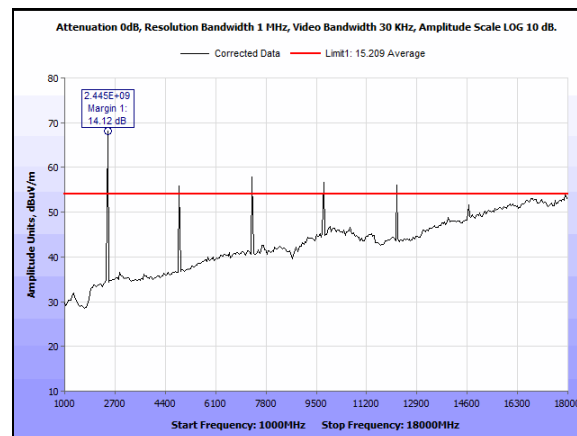


**Plot 36. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 1-18GHz, 3 wire dimmer**

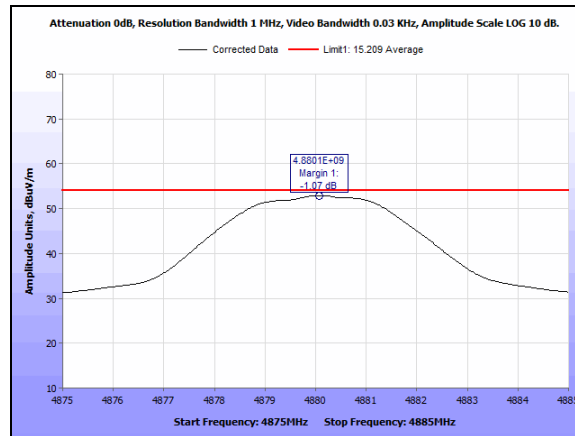


**Plot 37. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 2nd harmonic, 3 wire dimmer**

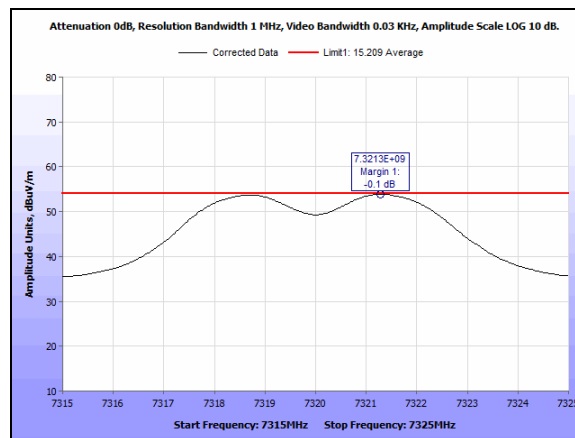


**Plot 38. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 3rd harmonic, 3 wire dimmer**

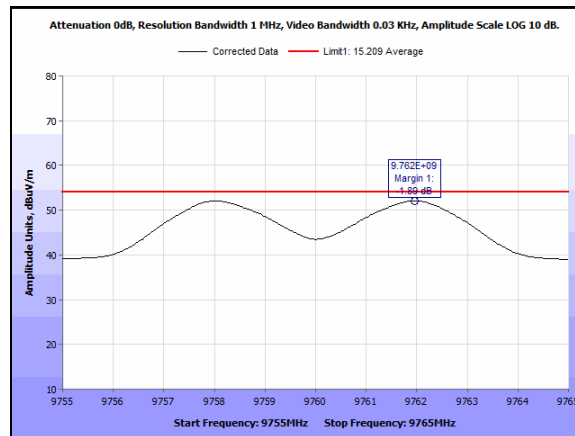


**Plot 39. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 4th harmonic, 3 wire dimmer**

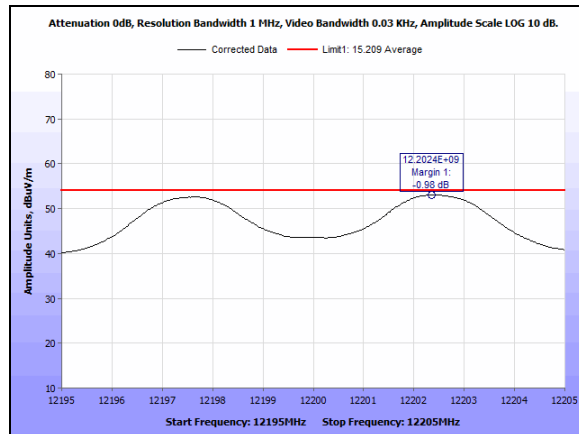


**Plot 40. Radiated Emissions, Average, Mid Channel, CF 2440MHz, 5th harmonic, 3 wire dimmer**

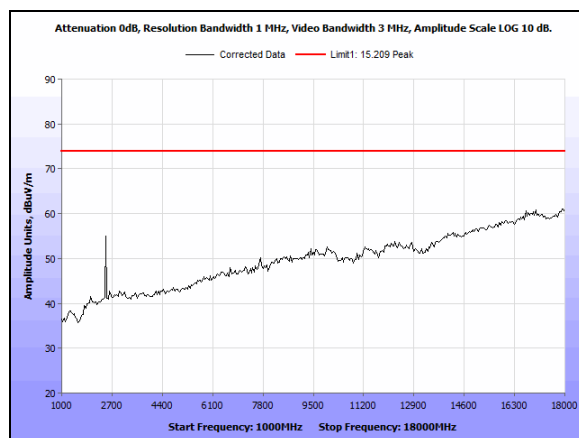

**Plot 41. Radiated Emissions, Peak, High Channel, CF 2480MHz, 1-18GHz, 3 wire dimmer**

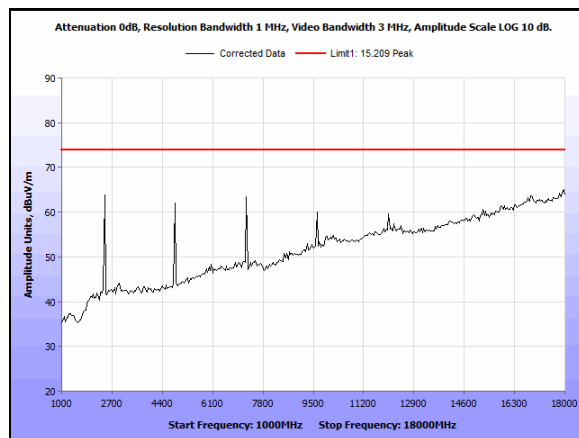


**Plot 42. Radiated Emissions, Peak, Low Channel, CF 2405MHz, 1-18GHz, 3 wire dimmer**

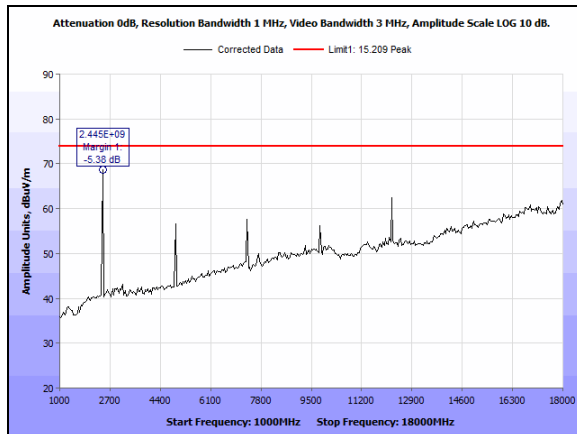


**Plot 43. Radiated Emissions, Peak, Mid Channel, CF 2440MHz, 1-18GHz, 3 wire dimmer**

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected EMI Meter Reading (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss/Pre-amp (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
825.0501	235	H	1.2782	6.23	22.40	4.31	0	32.94	46	-13.06
825.0501	6	V	1.563	6.16	22.40	4.31	0	32.87	46	-13.13
819.21844	4	H	1.7073	6.37	22.38	4.29	0	33.04	46	-12.96
819.21844	115	V	1.7073	6.37	22.38	4.29	0	33.04	46	-12.96
173.8477	4	H	2.5817	16.52	12.02	1.98	0	30.52	43.5	-12.98
173.8477	202	V	1.2786	9.68	12.02	1.98	0	23.68	43.5	-19.82
30	353	H	1.2778	5.65	22.70	1.05	0	29.40	40	-10.60
30	205	V	1.2786	6.71	22.70	1.05	0	30.46	40	-9.54
133.02605	341	H	1.2786	5.87	14.40	1.74	0	22.01	43.5	-21.49
133.02605	2	V	1.2786	5.95	14.40	1.74	0	22.09	43.5	-21.41
440.16032	282	H	1.2786	8.62	17.30	3.18	0	29.10	46	-16.90
440.16032	6	V	2.0221	5.42	17.30	3.18	0	25.90	46	-20.10


**Table 26. Radiated Emissions, 3 wire dimmer, Test Results**

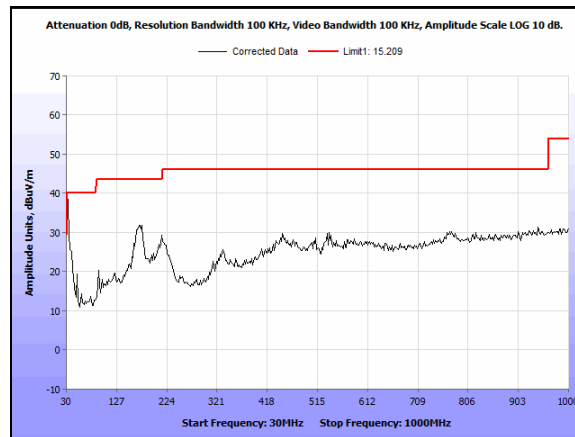

**Plot 44. Radiated Emissions, High Channel, 2480M, 0.03-1GHz - 3w dimmer**

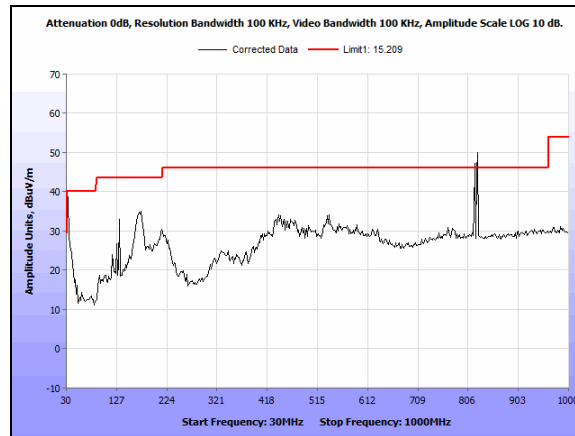


**Plot 45. Radiated Emissions, Low Channel, 2405M, 0.03-1GHz - 3w dimmer**

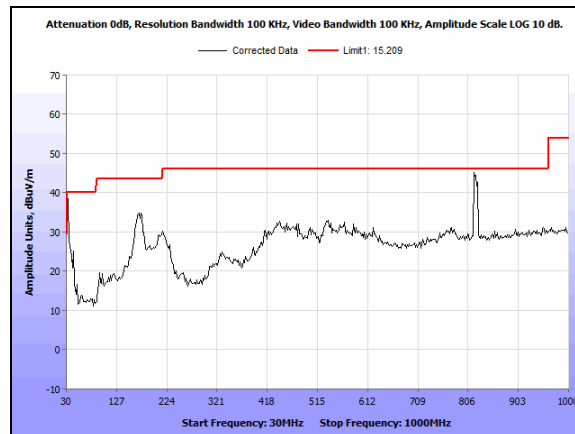


**Plot 46. Radiated Emissions, Mid Channel, 2440M, 0.03-1GHz - 3w dimmer**




## Radiated Spurious Emissions, Keypad Test Results

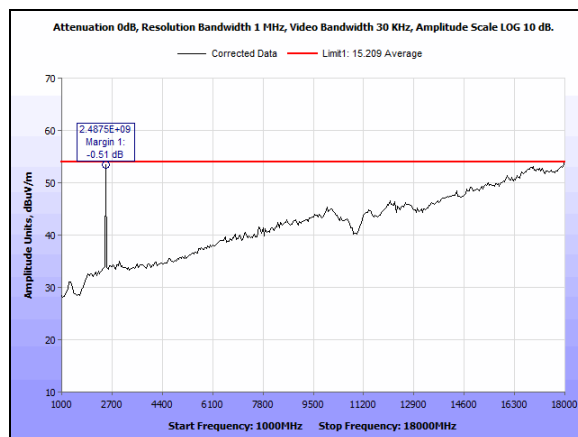


Plot 47. Radiated Emissions, Average, High Channel, 2480M, 1-18GHz - keypad

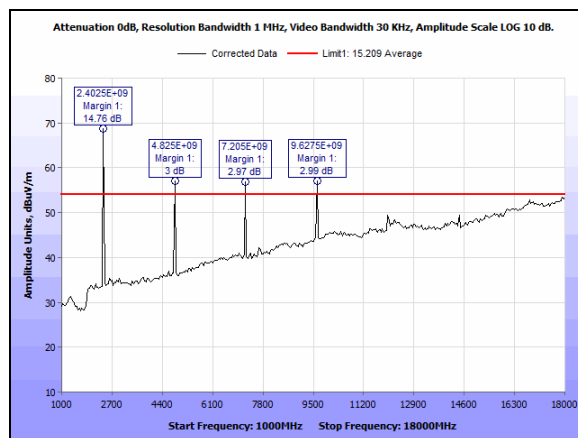


Plot 48. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz - keypad

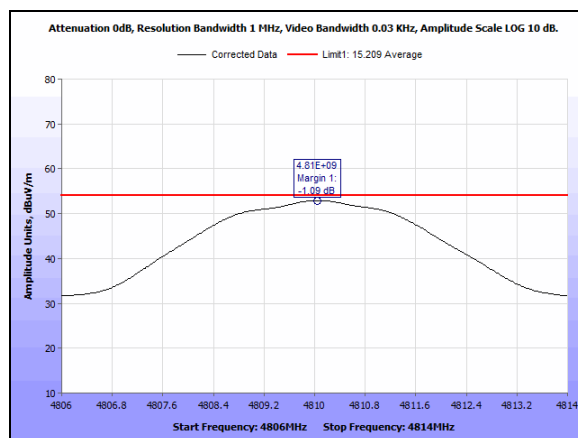


Plot 49. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 2nd Harmonic - Keypad

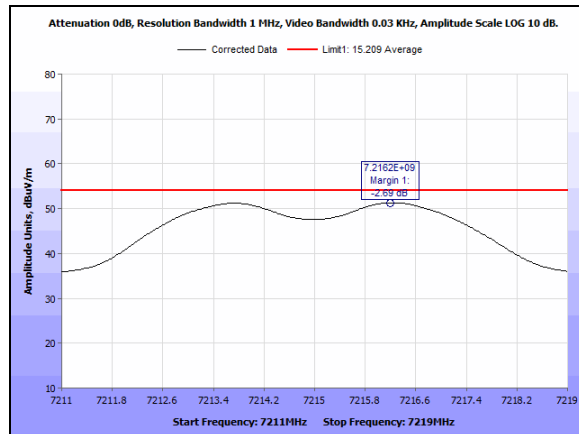


**Plot 50. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 3rd Harmonic - Keypad**

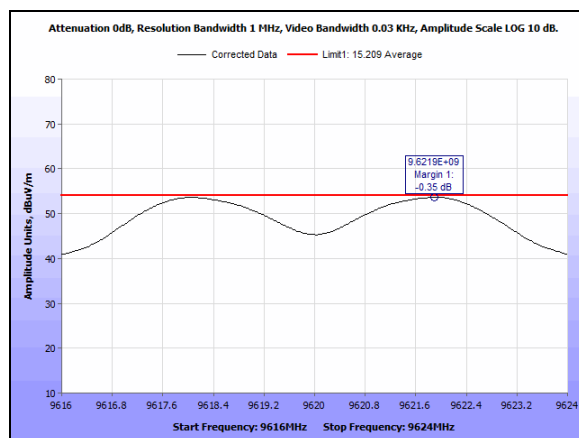


**Plot 51. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 4th Harmonic - Keypad**

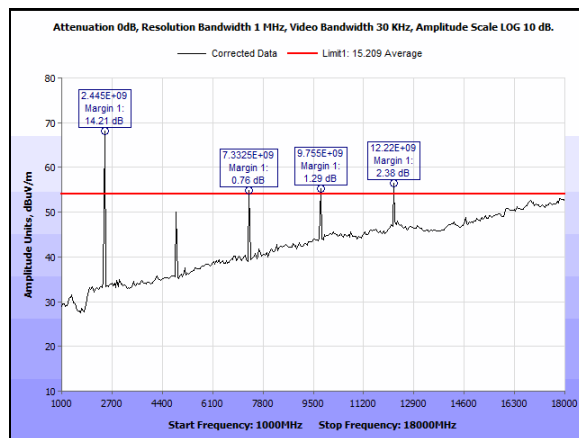


**Plot 52. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz - Keypad**

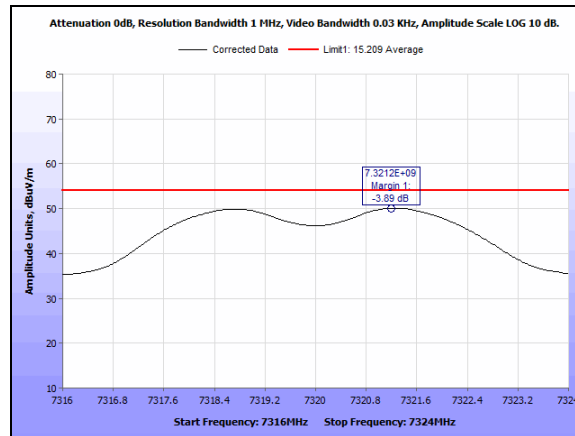


**Plot 53. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 3rd Harmonic - Keypad**

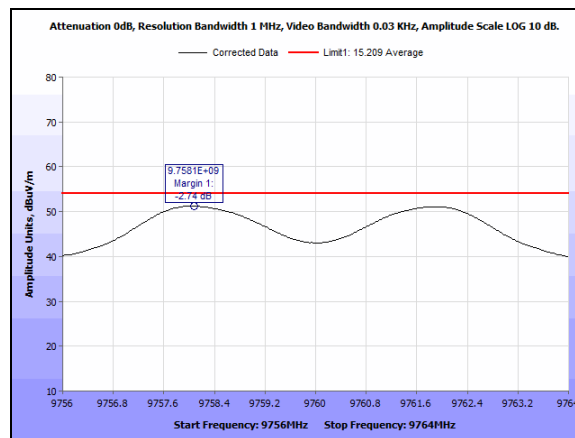


**Plot 54. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 4th Harmonic - Keypad**

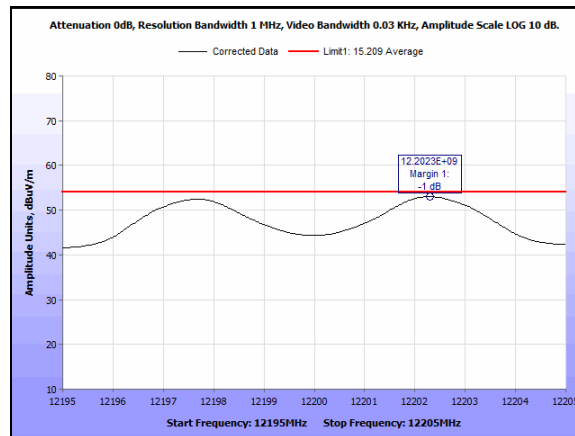


**Plot 55. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 5th Harmonic - Keypad**

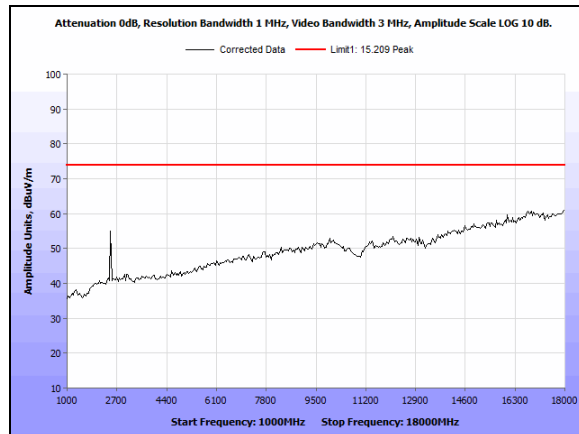


**Plot 56. Radiated Emissions, Peak, High Channel, 2480M, 1-18GHz - Keypad**

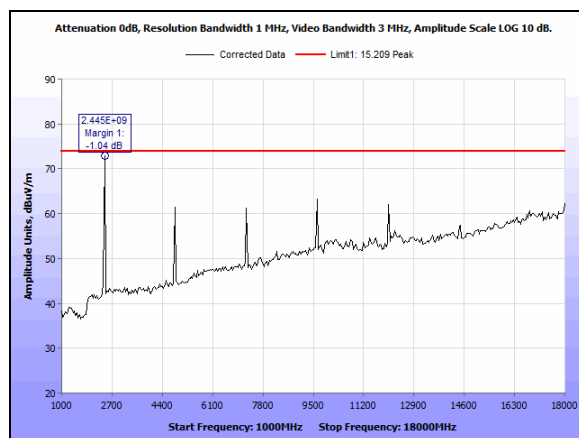


**Plot 57. Radiated Emissions, Peak, Low Channel, 2405M, 1-18GHz - Keypad**

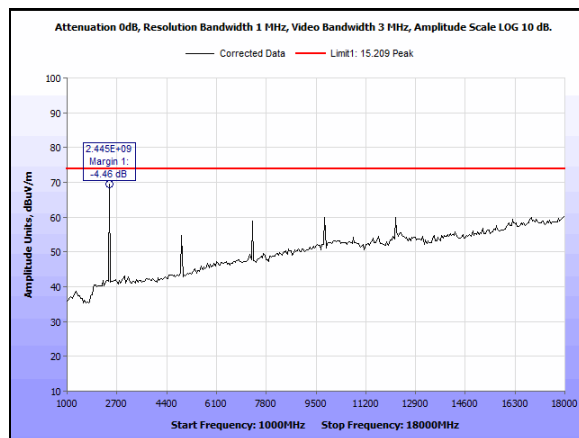


**Plot 58. Radiated Emissions, Peak, Mid Channel, 2440M, 1-18GHz - Keypad**

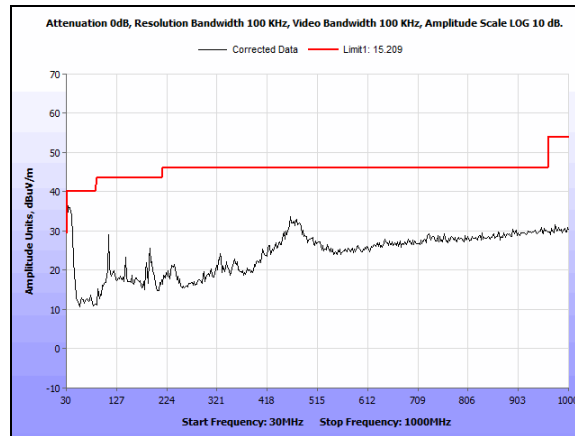

**Plot 59. Radiated Emissions, High Channel, 2480M, 0.03-1GHz - Keypad**

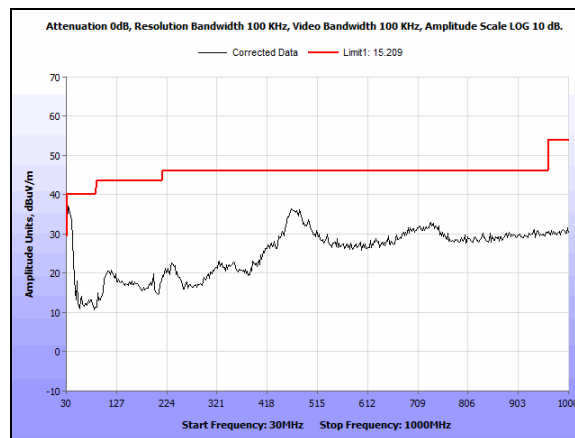


**Plot 60. Radiated Emissions, Low Channel, 2405M, 0.03-1GHz - Keypad**

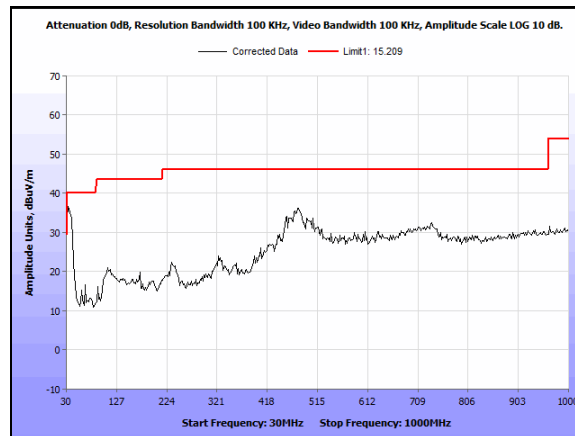


**Plot 61. Radiated Emissions, Mid Channel, 2440M, 0.03-1GHz - Keypad**


## Radiated Spurious Emissions, Switch Test Results

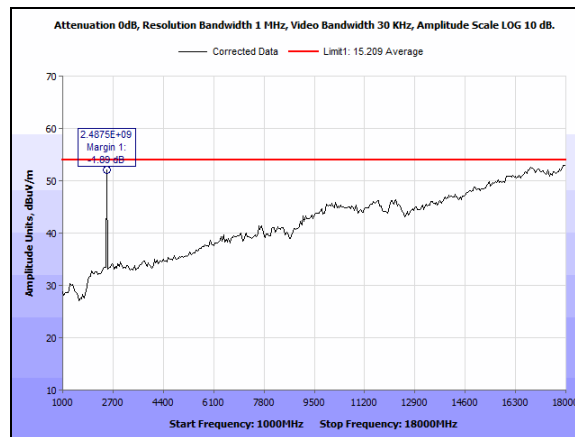


Plot 62. Radiated Emissions, Average, High Channel, 2480M, 1-18GHz, Lowest Setting, Switch

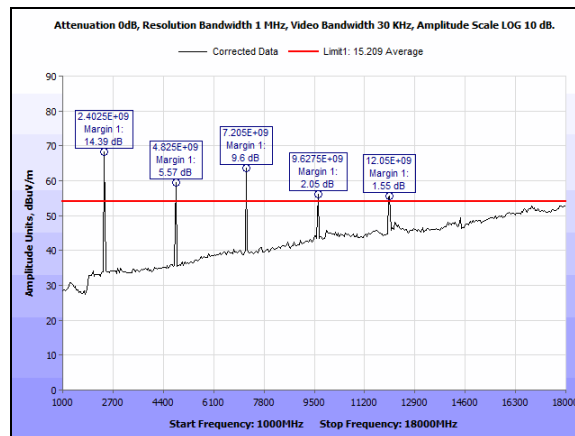


Plot 63. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, Switch

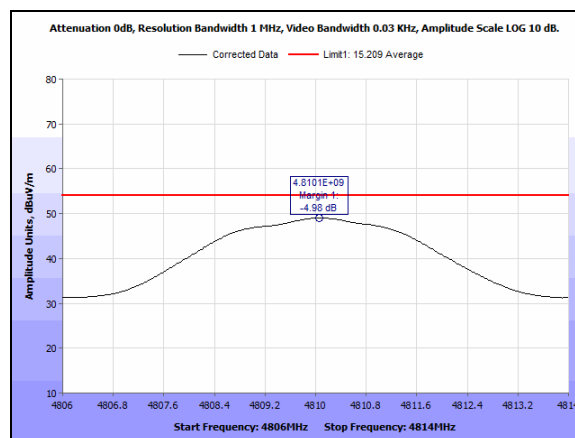


Plot 64. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 2nd Harmonic, Switch

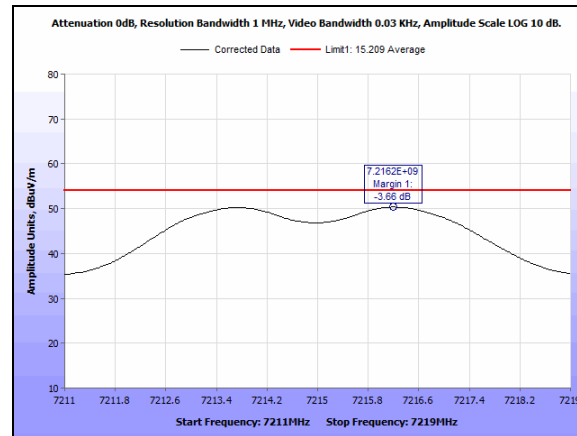


**Plot 65. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 3rd Harmonic, Switch**

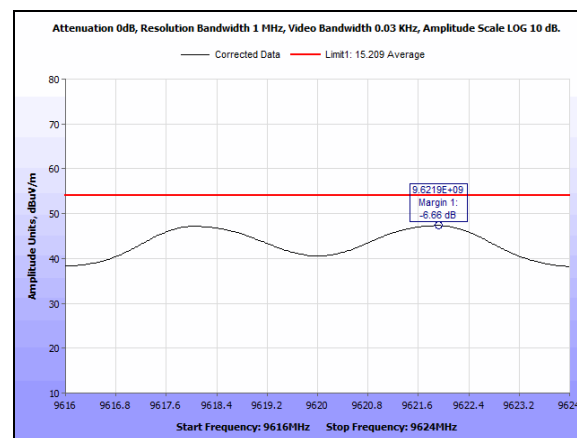


**Plot 66. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 4th Harmonic, Switch**

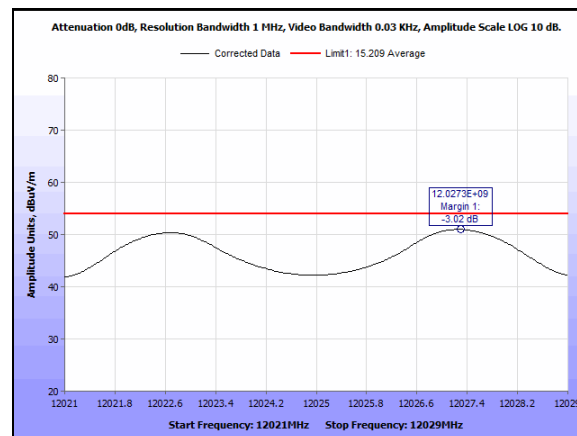


**Plot 67. Radiated Emissions, Average, Low Channel, 2405M, 1-18GHz, 5th Harmonic, Switch**

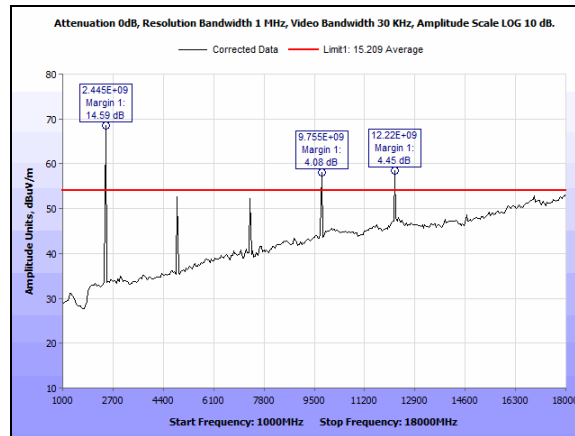

**Plot 68. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, Switch**

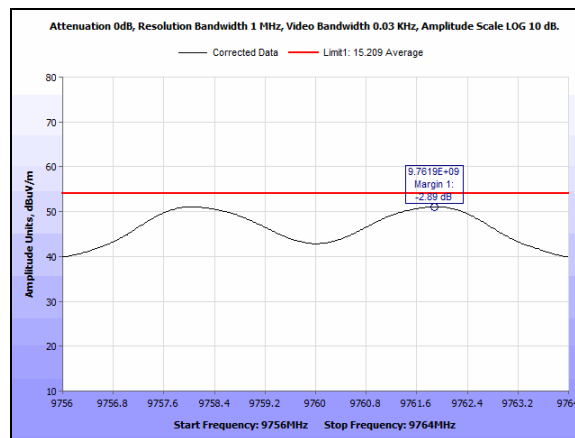


**Plot 69. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 4th Harmonic, Switch**

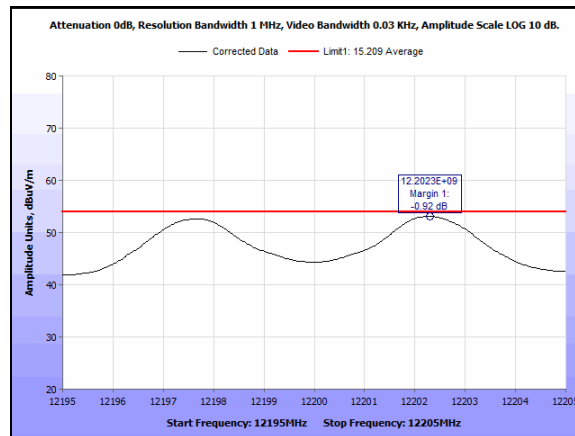


**Plot 70. Radiated Emissions, Average, Mid Channel, 2440M, 1-18GHz, 5th Harmonic, Switch**




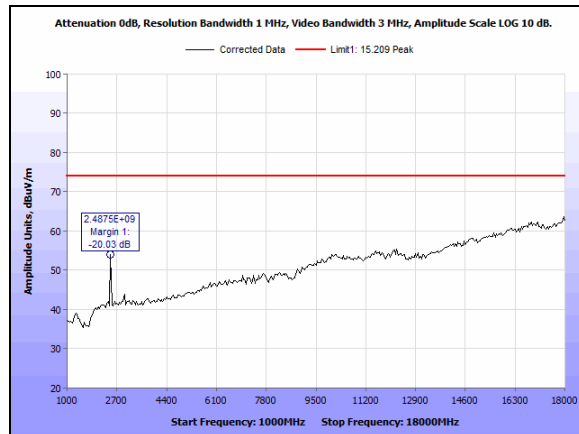


**Plot 71. Radiated Emissions, Peak, High Channel, 2480M, 1-18GHz, Lowest Setting, Switch**

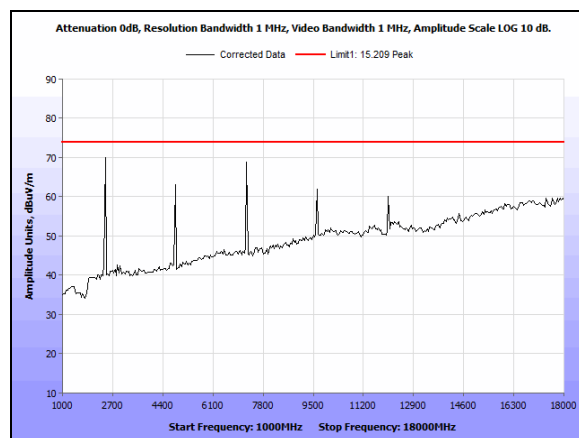


**Plot 72. Radiated Emissions, Peak, Low Channel, 2405M, 1-18GHz, Switch**

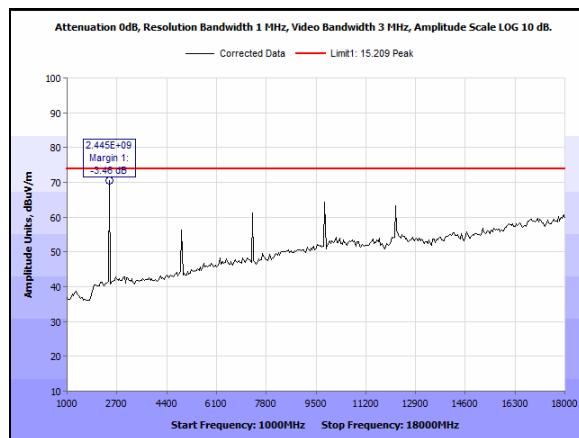


**Plot 73. Radiated Emissions, Peak, Mid Channel, 2440M, 1-18GHz, Switch**

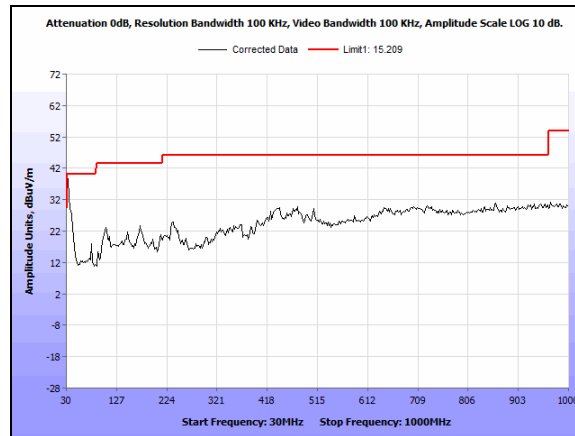

**Plot 74. Radiated Emissions, High Channel, 2480M, 0.03-1GHz - Switch**

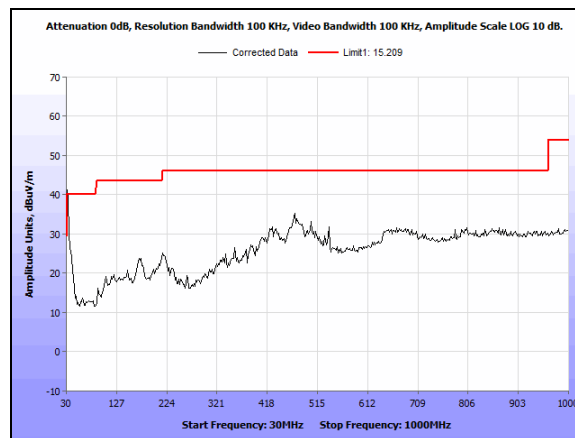

**Plot 75. Radiated Emissions, Low Channel, 2405M, 0.03-1GHz - Switch**

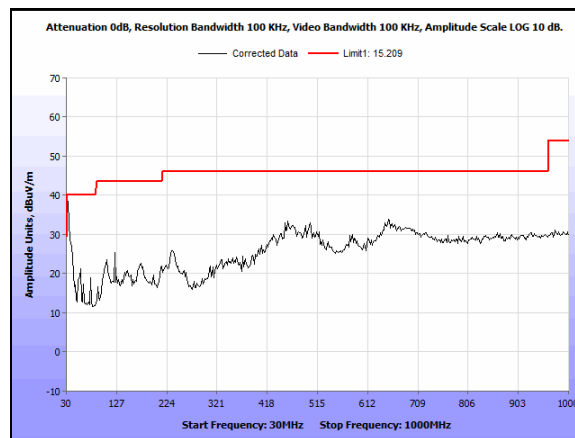


**Plot 76. Radiated Emissions, Mid Channel, 2440M, 0.03-1GHz - Switch**

## Radiated Spurious Emissions, Fan Controller Test Results

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected EMI Meter Reading (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss/Pre-amp (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
37.007682	299	H	1.1304	6.09	17.29	0.67	0	24.05	40	-15.95
37.007682	9	V	0.9882	16.8	17.29	0.67	0	34.76	40	-5.24
57.918024	122	H	1.1452	6.37	8.00	0.86	0	15.23	40	-24.77
57.918024	342	V	1.1008	11.8	8.00	0.86	0	20.66	40	-19.34
89.075338	171	H	1.0343	6.16	8.21	1.07	0	15.44	43.5	-28.06
89.075338	327	V	1.0652	6.23	8.21	1.07	0	15.51	43.5	-27.99
102.66212	234	H	1.1617	6.65	11.50	1.11	0	19.26	43.5	-24.24
102.66212	335	V	1.1065	6.71	11.50	1.11	0	19.32	43.5	-24.18
193.16784	147	H	1.0256	7.11	12.33	1.49	0	20.93	43.5	-22.57
193.16784	187	V	1.0556	6.78	12.33	1.49	0	20.60	43.5	-22.90
299.4489	91	H	1.0495	6.16	14.38	1.76	0	22.30	46	-23.70
299.4489	273	V	1.2634	5.26	14.38	1.76	0	21.40	46	-24.60

Table 27. Radiated Emissions, Fan Controller, Test Results

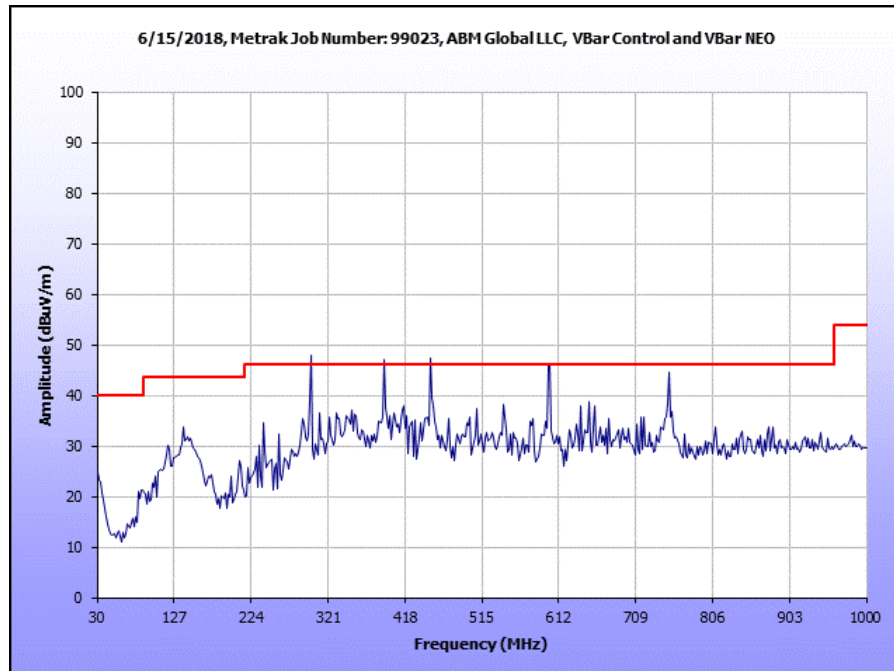


Plot 77. Radiated Emissions, Fan Controller, 30 MHz – 1 GHz


## Radiated Band Edge Measurements

### Test Procedures:


The transmitter was turned on. Measurements were performed of the low and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

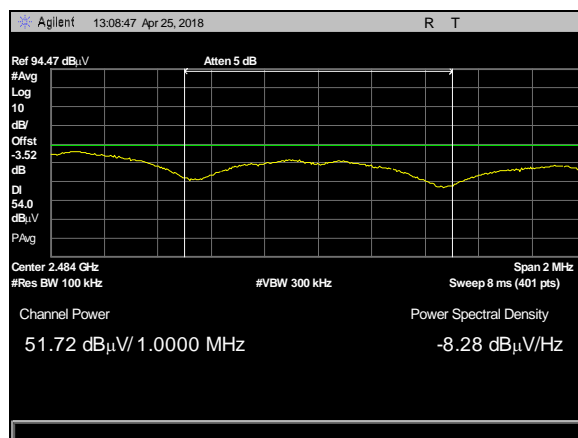


Plot 78. Radiated Restricted Bandedge, high channel, Average, CF 2480M, 2-wire dimmer

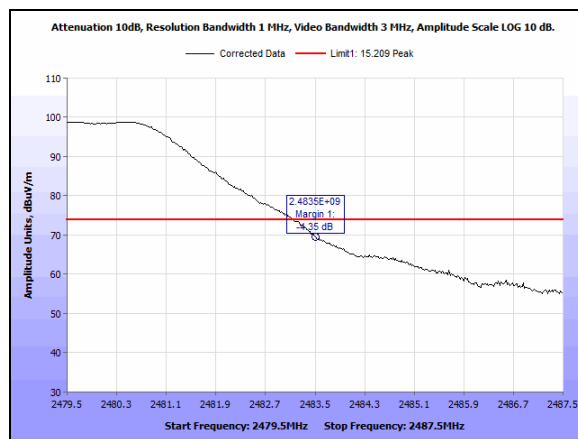


Plot 79. Radiated Restricted Bandedge, high channel, Peak, CF 2480M, 2-wire dimmer

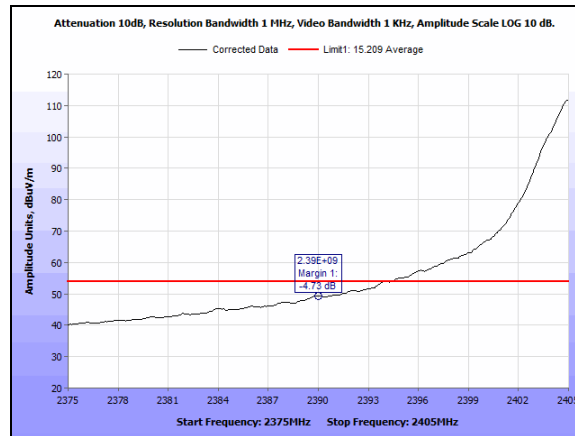


**Plot 80. Radiated Restricted Bandedge, low channel, Average, CF 2405M, 2-wire dimmer**

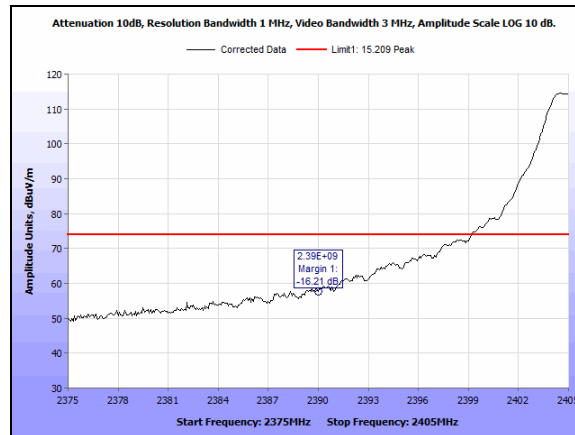


**Plot 81. Radiated Restricted Bandedge, low channel, PK, CF 2405M, 2-wire dimmer**

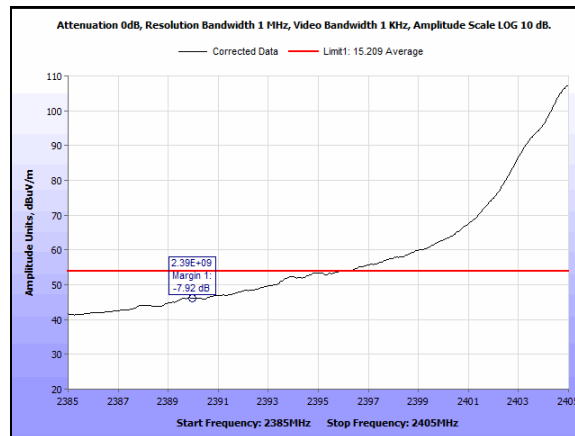


**Plot 82. Radiated Emissions, Average, Low Channel, CF 2405MHz, low bandedge, 3 wire dimmer**

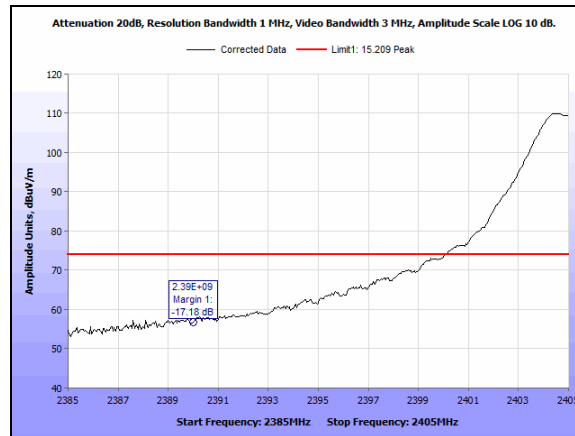


Plot 83. Radiated Emissions, Peak, Low Channel, CF 2405MHz, low bandedge, 3 wire dimmer

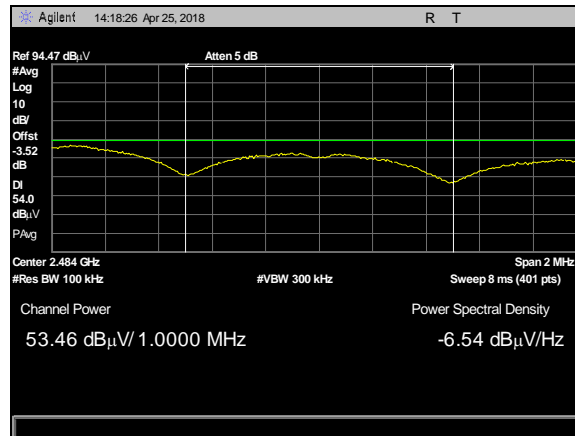


Plot 84. Radiated Restricted Band Edge, high channel, Average, CF 2480M, 3 wire dimmer

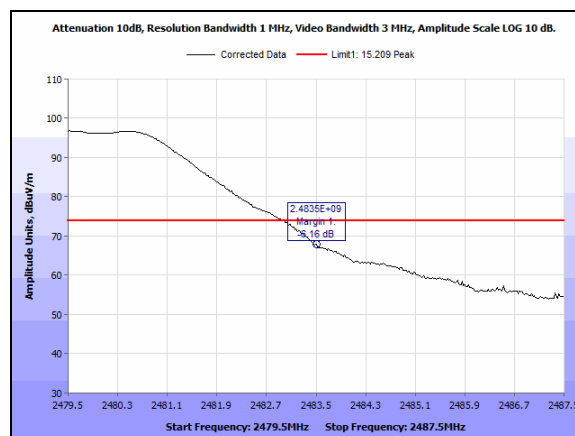


Plot 85. Radiated Restricted Band Edge, high channel, Peak, CF 2480M, 3 wire dimmer

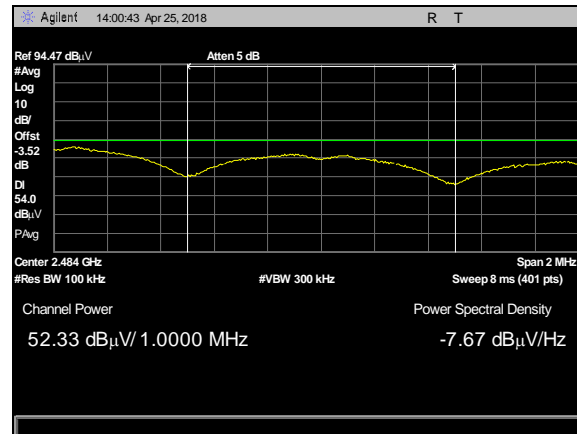


**Plot 86. Radiated Restricted Band Edge, High Channel, Average, CF 2480M, KEYPAD**

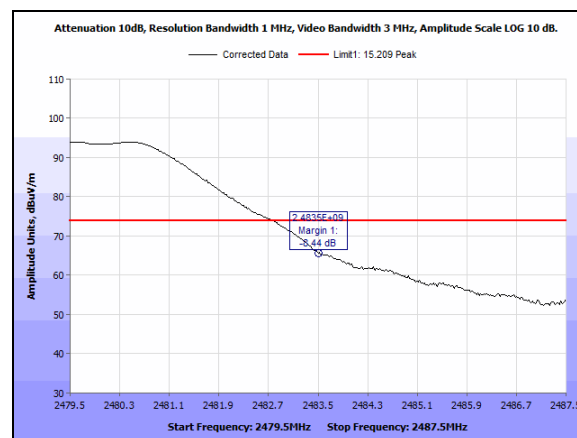


**Plot 87. Radiated Restricted Band Edge, High Channel, Peak, CF 2480M, KEYPAD**

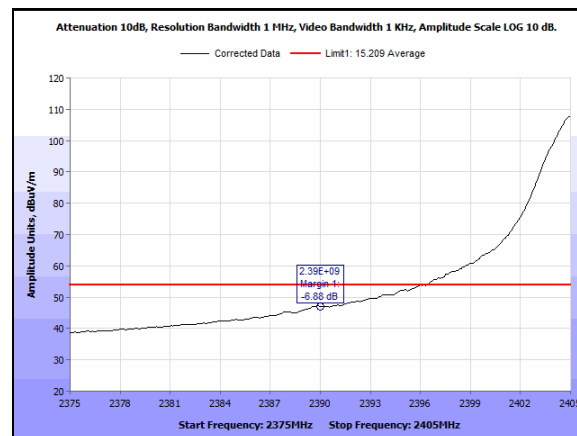


**Plot 88. Radiated Restricted Band Edge, Low Channel, Average, CF 2405M, KEYPAD**

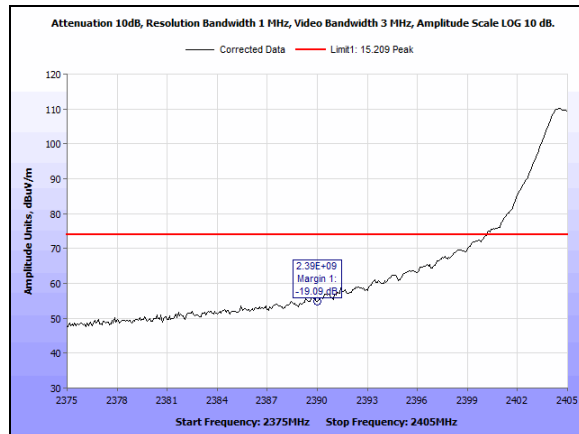

**Plot 89. Radiated Restricted Band Edge, Low Channel, Peak, CF 2405M, KEYPAD**

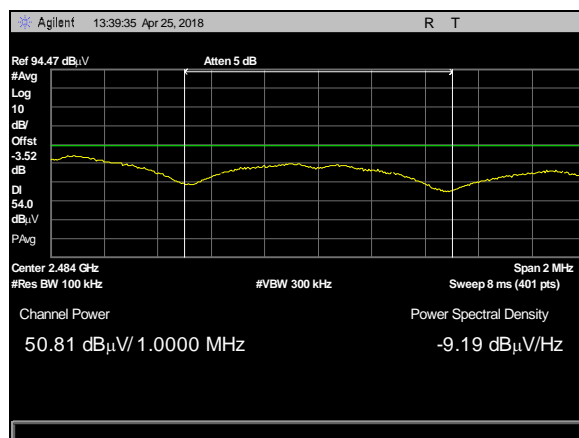


**Plot 90. Radiated Restricted Band Edge, High Channel, Average, CF 2480M, Switch**

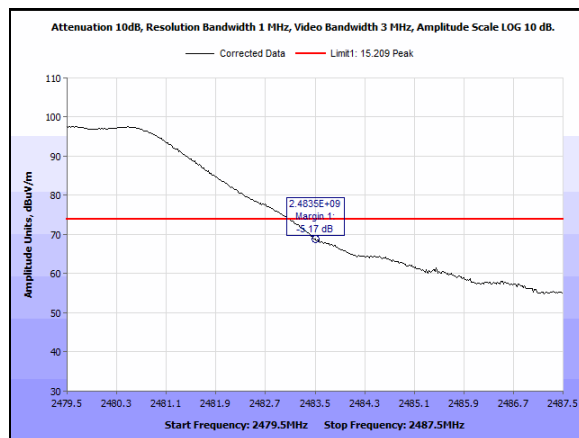


**Plot 91. Radiated Restricted Band Edge, High Channel, Peak, CF 2480M, Switch**



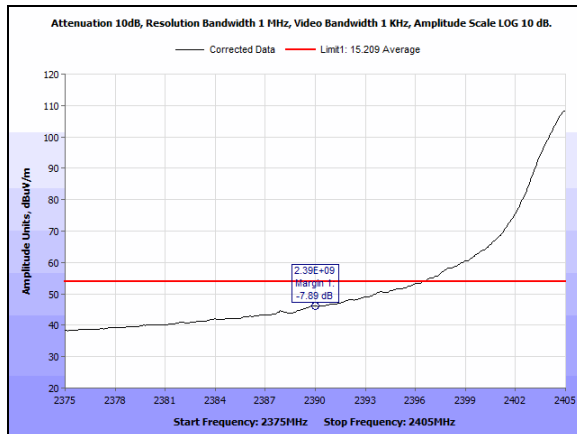


**Plot 92. Radiated Restricted Band Edge, Low Channel, Average, CF 2405M, Switch**

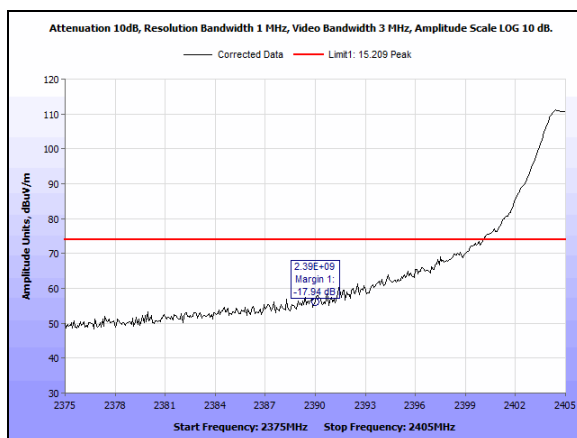


**Plot 93. Radiated Restricted Band Edge, Low Channel, Peak, CF 2405M, Switch**

## Radiated Spurious Emissions Test Setup

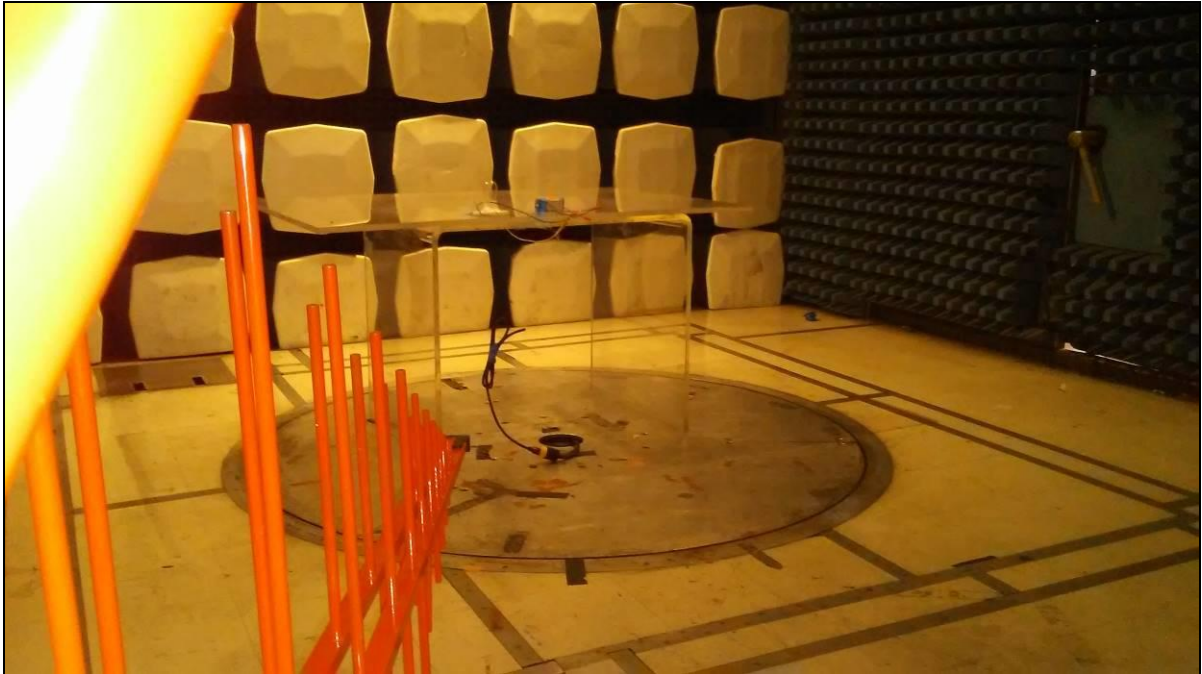


**Photograph 5. Radiated Emissions, Setup Below 1GHz - 2w Dimmer**

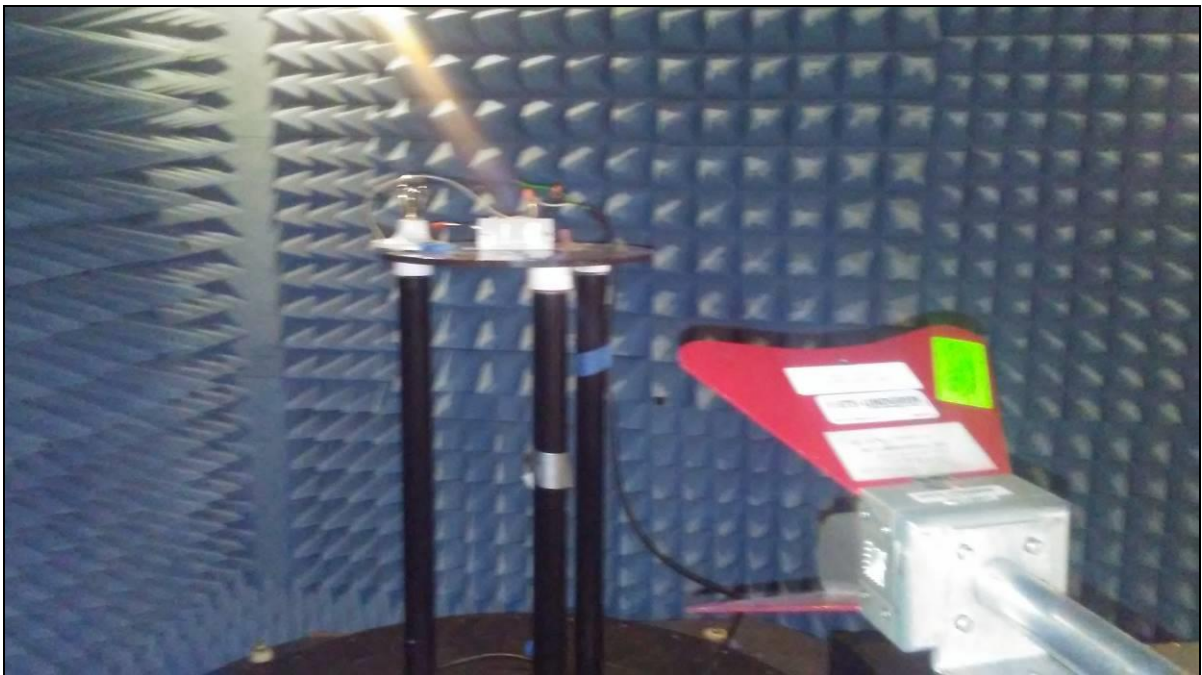

**Photograph 6. Radiated Emissions, Setup Above 1GHz - 2w Dimmer**



**Photograph 7. Radiated Emissions, Setup Below 1GHz - 3w Dimmer**

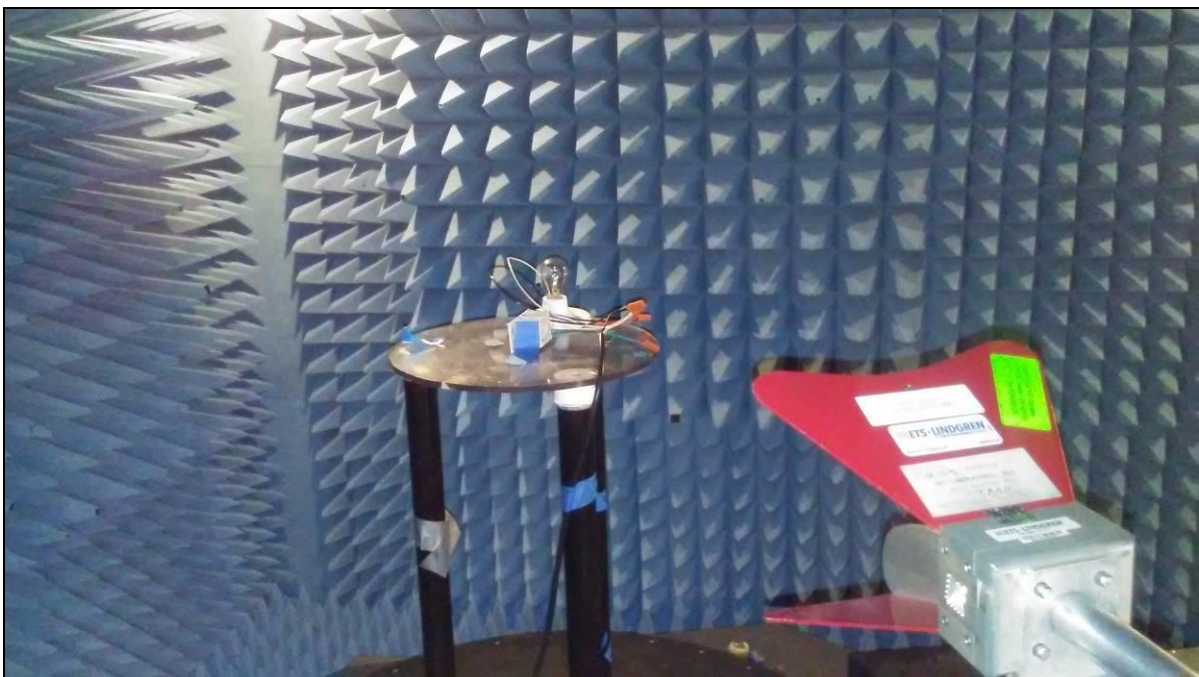


**Photograph 8. Radiated Emissions, Setup Above 1GHz - 3w Dimmer**






**Photograph 9. Radiated Emissions, Setup Below 1GHz - Switch**

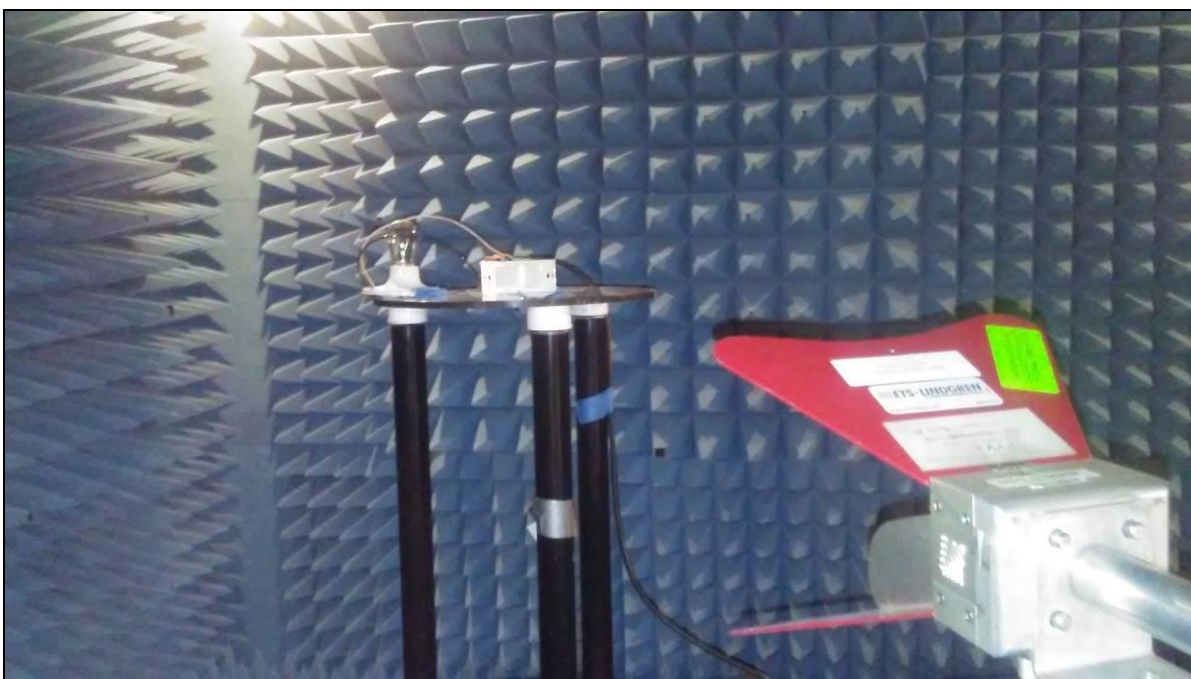

**Photograph 10. Radiated Emissions, Setup Above 1GHz - Switch**



**Photograph 11. Radiated Emissions, Setup Below 1GHz - Keypad**

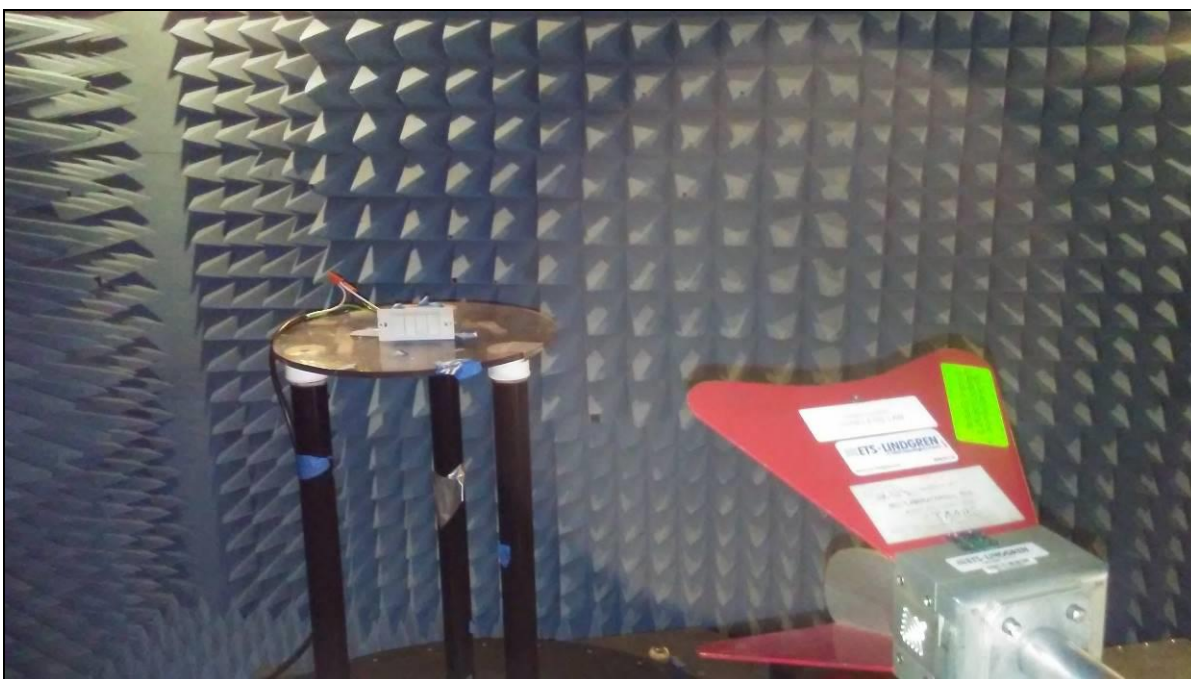

**Photograph 12. Radiated Emissions, Spurs Above 1GHz - Keypad**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Spurious Emissions in Non-restricted Bands

**Test Requirement:** **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.


Since the EUT had an integral antenna, conducted measurements could not be performed. Measurements needed to be taken radiated. An antenna was located 1 m away from the EUT and plots were taken. The EUT was rotated through all three orthogonal axes. The plots were corrected for both antenna correction factor and cable loss.

**Test Results:** The EUT was compliant with the Spurious Emission limits of §15.247(d).


**Test Engineer(s):** Donald Salguero

**Test Date(s):** April 26, 2018


## Spurious Emissions in Non-restricted Bands, Test Results

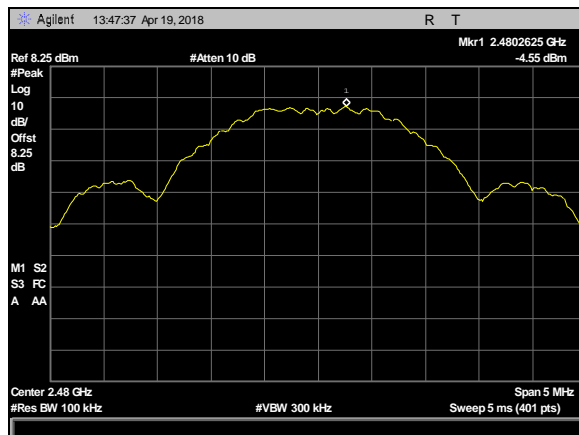

Plot 94. 100 kHz Spurious Emissions, high channel, CF 2480M, reference level

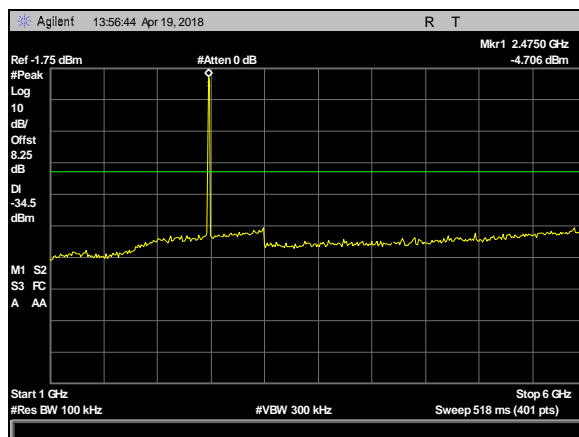


Plot 95. 100 kHz Spurious Emissions, high channel, CF 2480M, 1-6GHz

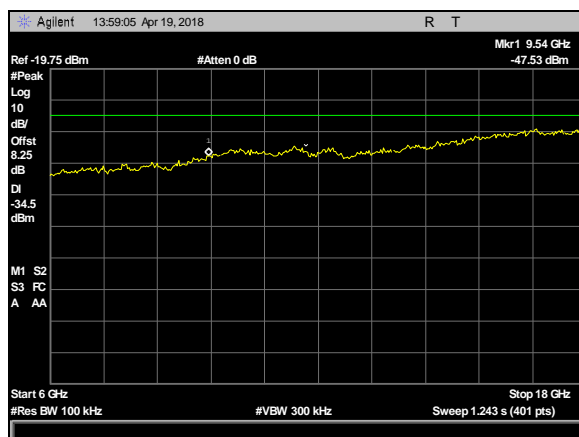


Plot 96. 100 kHz Spurious Emissions, high channel, CF 2480M, 6-18GHz




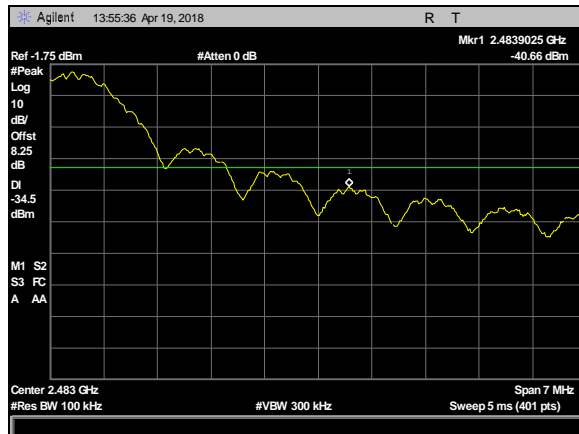

Plot 97. 100 kHz Spurious Emissions, high channel, CF 2480M, bandedge 2483.5MHz

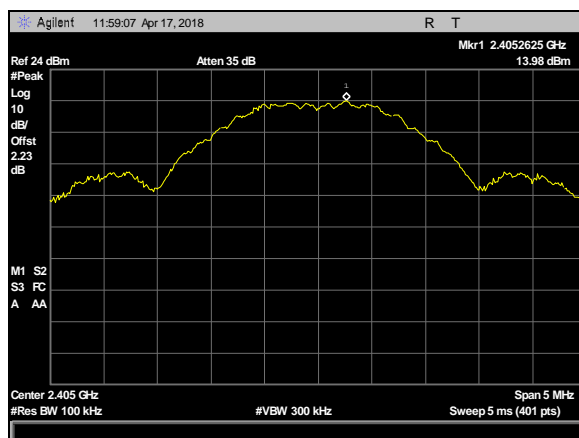


Plot 98. 100 kHz Spurious Emissions, low channel, CF 2405M, reference level

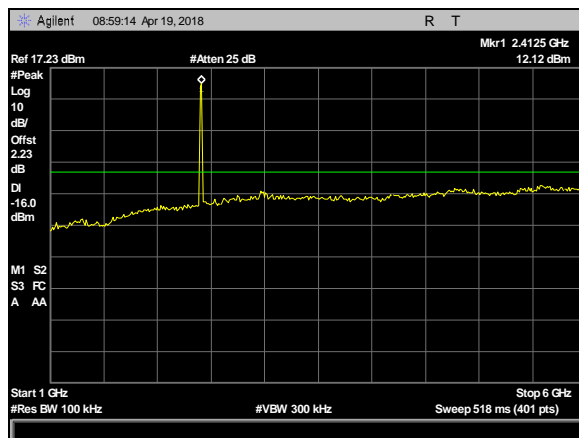


Plot 99. 100 kHz Spurious Emissions, low channel, CF 2405M, 1-6GHz




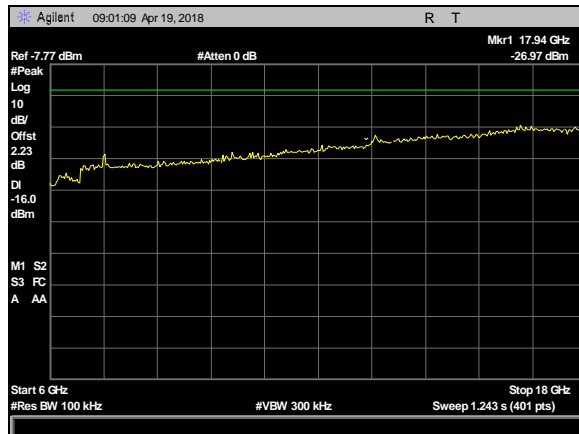


Plot 100. 100 kHz Spurious Emissions, low channel, CF 2405M, 6-18GHz

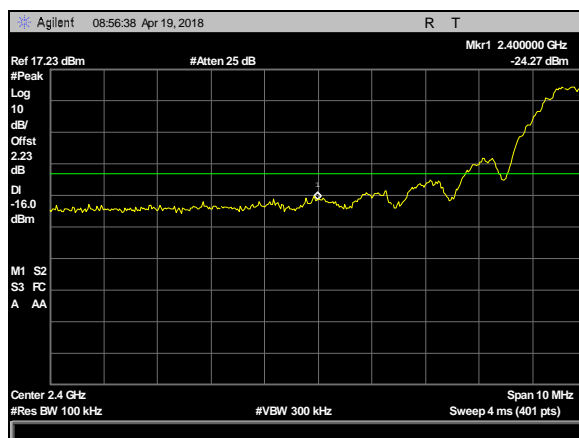


Plot 101. 100 kHz Spurious Emissions, low channel, CF 2405M, bandedge 2400MHz

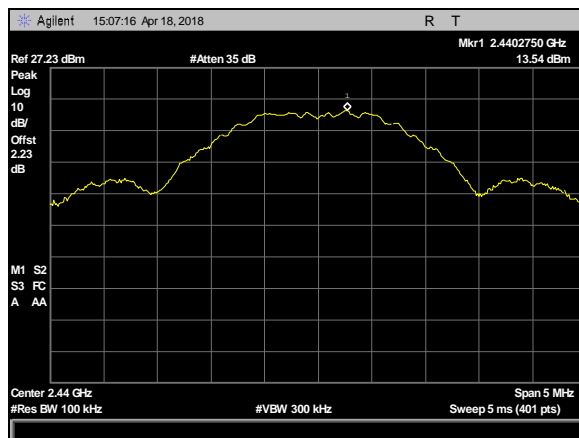

Plot 102. 100 kHz Spurious Emissions, mid channel, CF 2440M, reference level

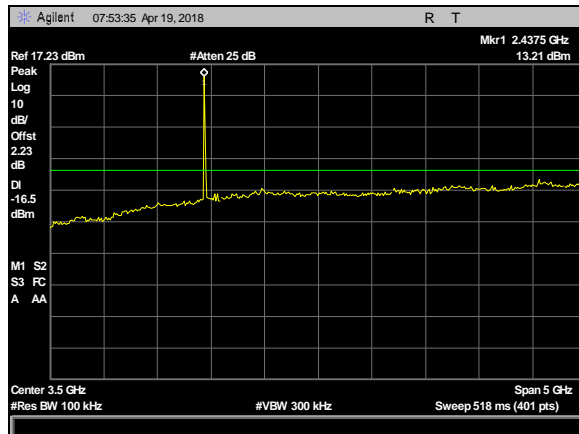

Plot 103. 100 kHz Spurious Emissions, mid channel, CF 2440M, 1-6GHz

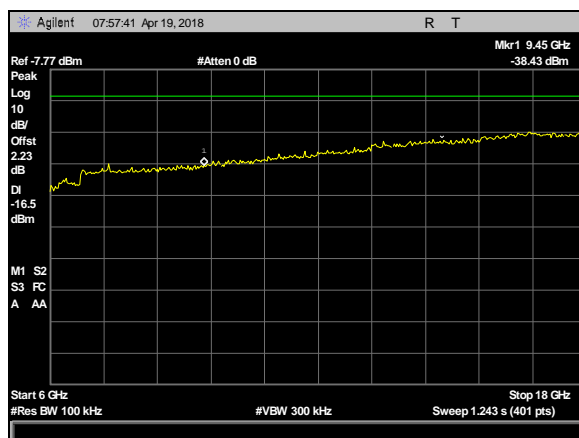

Plot 104. 100 kHz Spurious Emissions, mid channel, CF 2440M, 6-18GHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density

**Test Requirements:** §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:** The power level was set to the maximum level throughout each of the 100 sweeps of power averaging. The RBW was set to 3 kHz and a VBW set to 9 kHz or greater. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels. Measurements were performed on a radiated setup, with the receive antenna placed 1m away from the EUT.

**Test Results:** The EUT was compliant with the peak power spectral density limits of § 15.247 (e). No anomalies detected.

The peak power spectral density was determined from plots on the following page(s).

**Test Engineer:** Donald Salguero


**Test Date:** April 26, 2018

### Peak Power Spectral Density Test Results


Power Spectral Density				
Carrier Channel	Frequency (MHz)	Measured EIRP PSD (dBm)	Antenna Gain (dBi)	Average Conducted PSD (dBm)
Low	2405	-6.442	0.51	-6.952
Mid	2440	-6.976	0.82	-7.796
High	2480	-22.07	-0.13	-21.94

Table 28. Peak Power Spectral Density, Test Results


## Peak Power Spectral Density

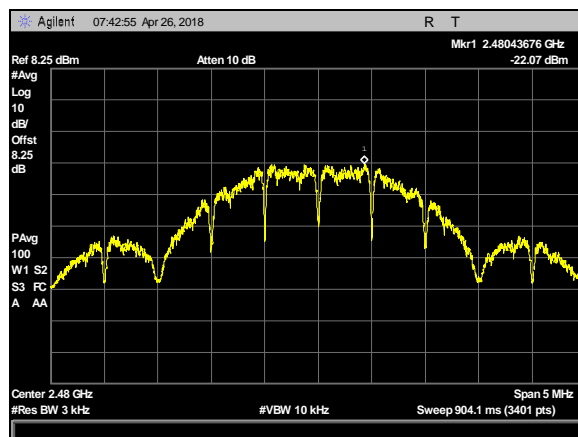

Plot 105. Power Density, high channel, CF 2480MHz, lowest setting

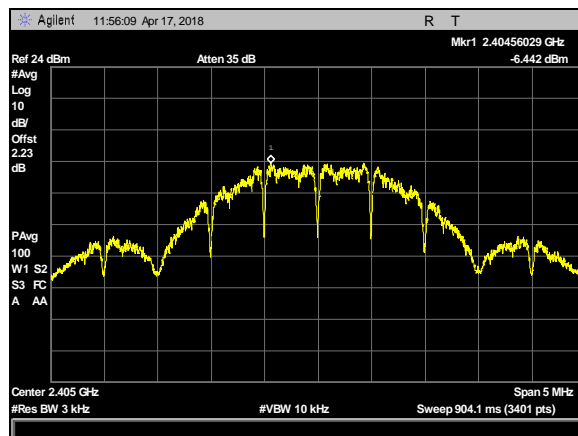

Plot 106. Power Density, low channel, CF 2405MHz

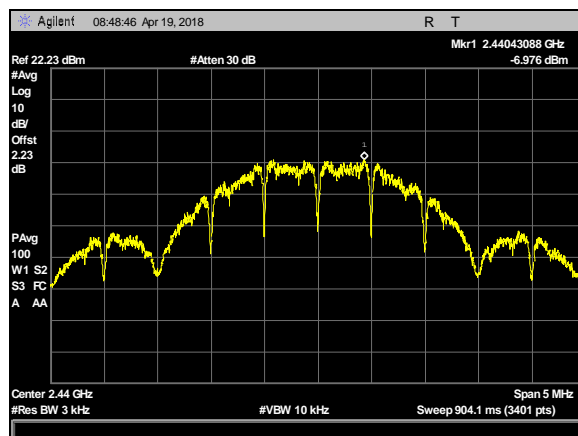

Plot 107. Power Density, mid channel, CF 2440MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(i) Maximum Permissible Exposure

**RF Exposure Requirements:** §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT's operating frequencies @ 2400-2483.5 MHz; **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{(PG / 4\pi S)}$$

where, S = Power Density (mW/cm<sup>2</sup>)  
P = Power Input to antenna (mW)  
G = Antenna Gain (numeric value)  
R = Distance (cm)

#### Test Results:

FCC									
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Ant. Gain (dBi)	Ant. Gain numeric	Pwr. Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin	Distance (cm)	Result
2405	16.53	44.978	0.51	1.125	0.01006	1	0.98994	20	Pass

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T8798	LISN	Solar Electronics Company	8610-50-TS-100-N	1/31/2018	1/31/2019
1T8799	LISN	Solar Electronics Company	8610-50-TS-100-N	1/31/2018	1/31/2019
1T4612	Spectrum Analyzer	Agilent Technologies	E4407B	3/30/2017	9/30/2018
1T4483	Antenna; Horn	ETS-Lindgren	3117	4/19/2017	10/19/2018
1T2665	Antenna; Horn	EMCO	3115	6/22/2017	12/22/2018
1T4753	Antenna - Bilog	Sunol Sciences	JB6	10/24/2016	5/24/2018
1T4409	EMI Receiver	Rohde & Schwarz	ESIB7	12/7/2016	12/7/2018
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	1/31/2016	1/31/2019
1T8266	Spectrum Analyzer	Keysight technologies, Inc	E4407B	1/29/2018	1/29/2019
1T4563	LISN (10 AMP)	Solar Electronics Company	9322-50-R-10-BNC	3/13/2017	9/13/2018
1T4442	Pre-amplifier, Microwave	Miteq	AFS42-01001800-30-10P	FUNC VERIFY	

**Table 29. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## **V. Certification & User's Manual Information**



## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report