

RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : Shenzhen Jiatong Technology Co., Ltd.
Address : Floor 5, building B, no.1 workshop, anle industrial park, hezhou neighborhood committee, xixiang street, baoan district, shenzhen
Manufacturer : Shenzhen Jiatong Technology Co., Ltd.
Address : Floor 5, building B, no.1 workshop, anle industrial park, hezhou neighborhood committee, xixiang street, baoan district, shenzhen
E.U.T. : Bluetooth Microphone for Children
Brand Name : NA
Model No. : D12
FCC ID : 2A07H-J20
Measurement Standard : FCC PART 15.247
Date of Receiver : April 12, 2019
Date of Test : April 12, 2019 to May 5, 2019
Date of Report : May 6, 2019

This Test Report is Issued Under the Authority of :

Prepared by



Wendy / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	8
1.3 TEST METHODOLOGY	8
1.4 EQUIPMENT MODIFICATIONS	8
1.5 SUPPORT DEVICE	8
1.6 TEST FACILITY AND LOCATION	9
1.7 SUMMARY OF TEST RESULTS	10
2. SYSTEM TEST CONFIGURATION	11
2.1 EUT CONFIGURATION	11
2.2 SPECIAL ACCESSORIES	11
2.3 DESCRIPTION OF TEST MODES	11
2.4 EUT EXERCISE	11
3. CONDUCTED EMISSIONS TEST	12
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
3.2 TEST CONDITION	12
3.3 MEASUREMENT RESULTS	12
4. MAX. CONDUCTED OUTPUT POWER	15
4.1 MEASUREMENT PROCEDURE	15
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
4.3 MEASUREMENT RESULTS	15
5. 6DB BANDWIDTH	16
5.1 MEASUREMENT PROCEDURE	16
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
5.3 MEASUREMENT RESULTS	16
6. POWER SPECTRAL DENSITY	19
6.1 MEASUREMENT PROCEDURE	19
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
6.3 MEASUREMENT RESULTS	19
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	22
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	22
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	22
7.3 MEASUREMENT RESULTS	22
8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS	27
8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27



8.2 MEASUREMENT PROCEDURE	28
8.3 LIMIT.....	29
8.4 MEASUREMENT RESULTS	29
BAND EDGE:	40
9. ANTENNA APPLICATION.....	44
9.1 ANTENNA REQUIREMENT	44
9.2 MEASUREMENT RESULTS.....	44
10. TEST EQUIPMENT LIST	45



Revision History of This Test Report

Report Number	Description	Issued Date
NTC1904092FV00	Initial Issue	2019-05-06

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

E.U.T.	:	Bluetooth Microphone for Children
Main model number	:	D12
Additional Model number	:	NA
Description of model difference	:	Those of models have the same circuit schematic, construction, PCB Layout and critical components. The difference is model name and appearance of the color only due to trading purpose.
Brand Name	:	NA
E.U.T. Type	:	Class B
Rating	:	DC 5V (From Micro USB Port) DC 3.7V(From built-in battery)
Test Voltage	:	DC 3.7V
Cable	:	N/A
Note	:	1. According to the model difference, all tests performed on models Capture 2. 2. Micro USB Port only for charging.
Remark	:	N/A

Technical parameters

Bluetooth Version	: V5.0
Frequency Range	: 2402-2480MHz
Modulation	: GFSK
Number of Channel	: 40
Channel space	: 2MHz
Date Rate	: 1Mbps
Antenna Type	: PCB antenna
Antenna Gain	: -0.68 dBi
Bluetooth Power	: Class: 3

BLE (V4.0) Channel List

Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, Middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

Channel	Frequency MHz
1	2402
20	2440
40	2480

Test SW version	FCCAssist V1.6
------------------------	-----------------------

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2APVH-C02** filing to comply with Section 15.247 of the FCC Part 15(2017), Subpart C Rule.

1.3 Test Methodology

The Radiated emission measurement was performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Notebook	:	Manufacturer: Lenovo Model: TP00067A P/N: SL10G10768 S/N: PF-0DS3YC 15/12 CE, FCC: DOC
Adapter	:	Manufacturer: Lenovo Model: ADLX65NLC3A I/P: AC 100-240V 50-60Hz, 1.8A O/P: DC 20V 3.25A

1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 14, 2015
The certificate is valid until August 13, 2018
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
The certificate is valid until December 31, 2019
The Laboratory has been assessed and proved to be in compliance with ISO17025
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
The Designation Number is CN1214
Test Firm Registration Number: 907417

Listed by Industry Canada, June 08, 2017
The Certificate Registration Number. Is 46405-9743

Name of Firm : Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan
City, Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Conducted Emission	±1.06dB	Not applicable
§15.247(b)(3)	Max. Conducted Output Power	±1.06dB	Compliant
§15.247(a)(2)	6dB Bandwidth	±1.42 x10 ⁻⁴ %	Compliant
§15.247(e)	Power Spectral Density	±1.06dB	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	±1.70dB	Compliance
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	±3.70dB	Compliance
§15.203	Antenna Requirement	N/A	Compliance

Note: The manufacturer declared that the product couldn't be used during charging, Therefore, AC Power Conducted Emission Test was not applicable.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition (The duty cycle >98%). Test program used to control the EUT staying in continuous transmitting mode. The Lowest, Middle and highest channel were chosen for testing, and modulation type GFSK was tested, but only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

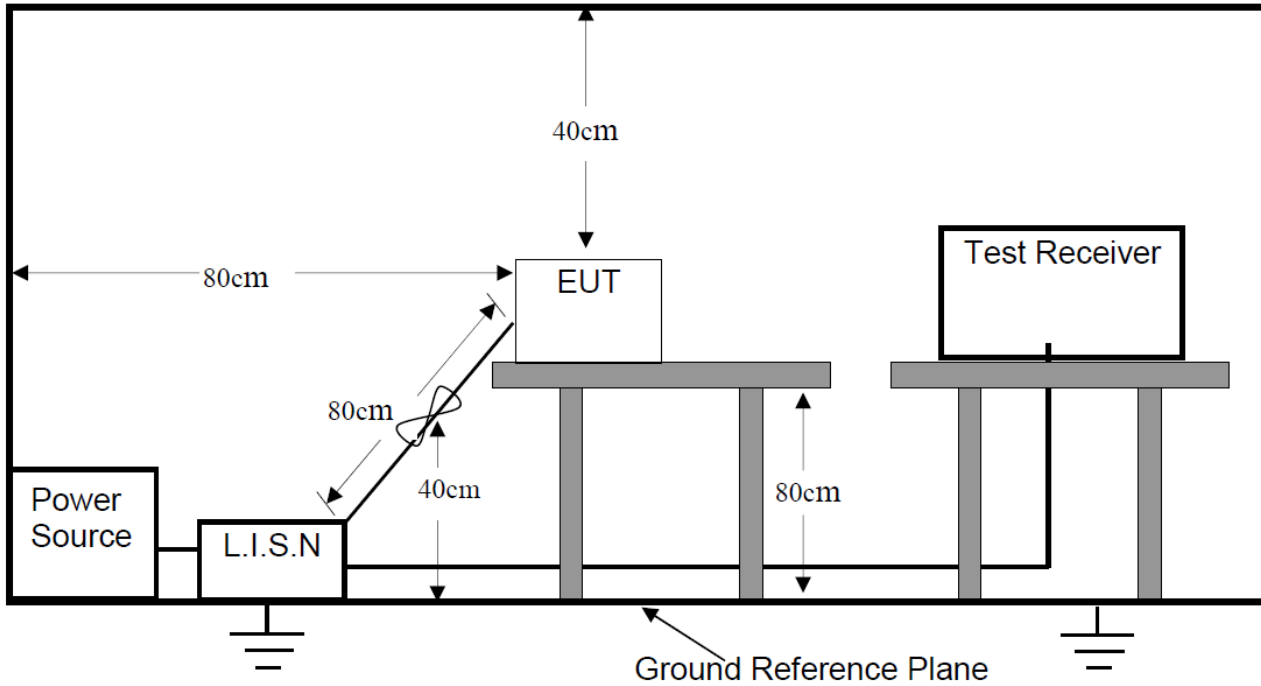

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz


Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX Mode

3.3 Measurement Results


Modulation: L1
 Temperature : 24 °C
 Test By: Sance
 Test Result: PASS

Humidity : 50 %
 Test Date : May 5, 2019

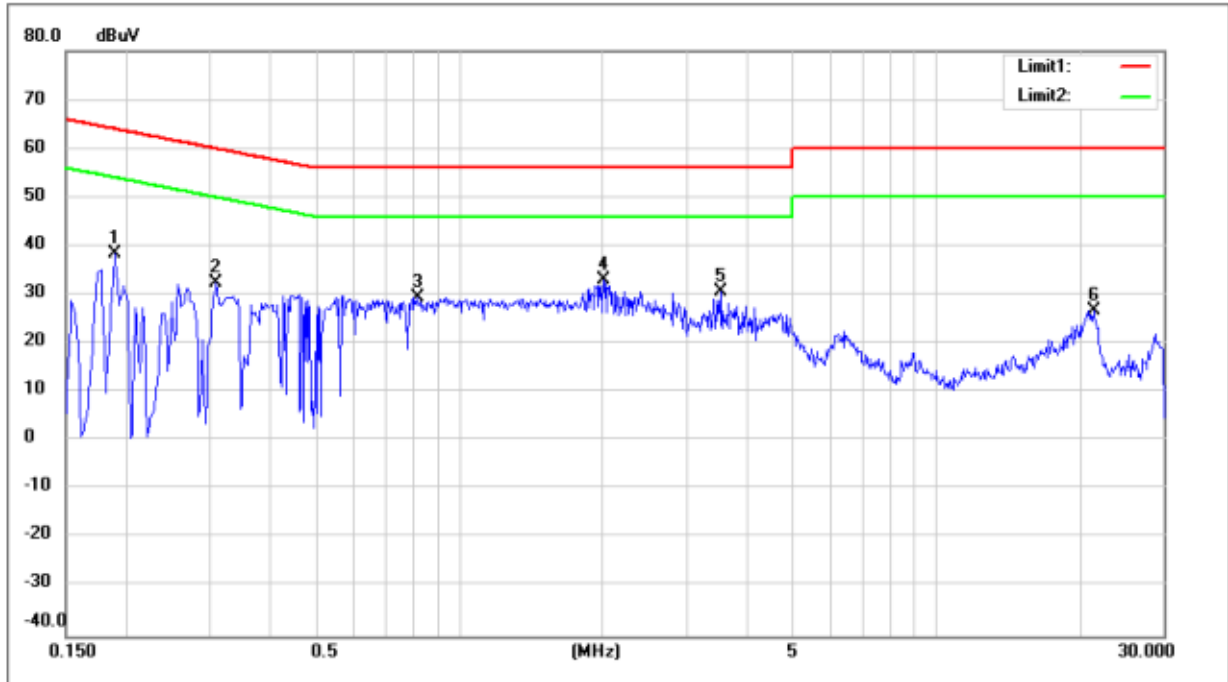

No.	Frequency (MHz)	QP Reading (dBuV)	AVG Reading (dBuV)	Correction Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)	Remark
1	0.1900	38.41	38.41	0.00	38.41	38.41	64.04	54.04	-25.63	-15.63	Pass
2	0.3100	32.44	32.44	0.00	32.44	32.44	59.97	49.97	-27.53	-17.53	Pass
3	0.8180	29.47	29.47	0.00	29.47	29.47	56.00	46.00	-26.53	-16.53	Pass
4	2.0180	33.10	33.10	0.00	33.10	33.10	56.00	46.00	-22.90	-12.90	Pass
5	3.5500	30.62	30.62	0.00	30.62	30.62	56.00	46.00	-25.38	-15.38	Pass
6	21.4500	26.77	26.77	0.00	26.77	26.77	60.00	50.00	-33.23	-23.23	Pass

Mode: N
 Temperature : 24 °C
 Test By: Sance
 Test Result: PASS
 Humidity : 50 %
 Test Date : May 5, 2019

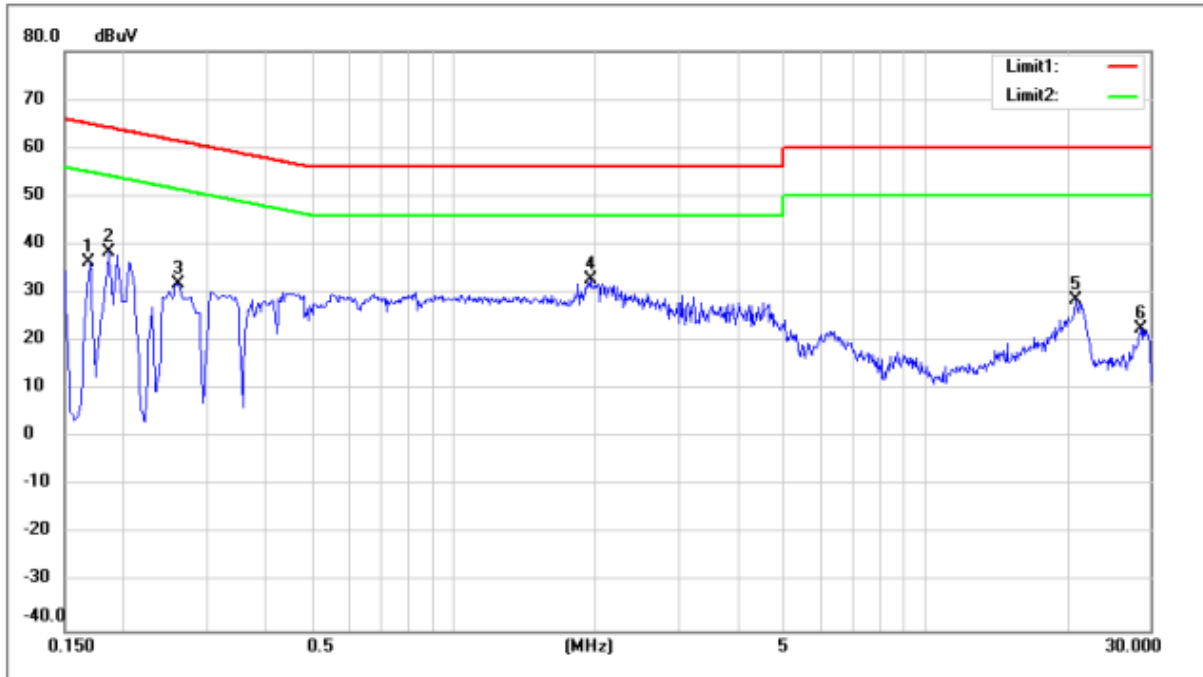

No.	Frequency (MHz)	QP Reading (dBuV)	AVG Reading (dBuV)	Correction Factor (dB)	QP Result (dBuV)	AVG Result (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)	Remark
1	0.1700	36.35	36.35	0.00	36.35	36.35	64.96	54.96	-28.61	-18.61	Pass
2	0.1860	38.34	38.34	0.00	38.34	38.34	64.21	54.21	-25.87	-15.87	Pass
3	0.2620	31.93	31.93	0.00	31.93	31.93	61.37	51.37	-29.44	-19.44	Pass
4	1.9540	32.72	32.72	0.00	32.72	32.72	56.00	46.00	-23.28	-13.28	Pass
5	20.8660	28.61	28.61	0.00	28.61	28.61	60.00	50.00	-31.39	-21.39	Pass
6	28.6780	22.68	22.68	0.00	22.68	22.68	60.00	50.00	-37.32	-27.32	Pass

4. Max. Conducted Output Power


4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results

Please refer to following table.

Modulation:	GFSK	Humidity :	50 %
Temperature :	24 °C	Test Date :	May 5, 2019
Test By:	Sance		
Test Result:	PASS		

Frequency MHz	Data Rate Mbps	Peak Output Power dBm	Limit dBm
Low Channel: 2402	1	1.21	30
Middle Channel: 2440	1	1.31	30
High Channel: 2480	1	1.07	30

5. 6dB Bandwidth


5.1 Measurement Procedure

The power spectral density, FCC Rule 15.247(e):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v04):

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Please refer to following table and plots.


Modulation:	GFSK	Humidity :	53 %
Temperature :	22 °C	Test Date :	May 5, 2019
Test By:	Sance		
Test Result:	PASS		

Frequency MHz	Data Rate Mbps	6dB Bandwidth KHz	Limit
Low Channel: 2402	1	679.2	>500KHz
Middle Channel: 2440	1	647.8	>500KHz
High Channel: 2480	1	699.1	>500KHz

6dB bandwidth Low Channel

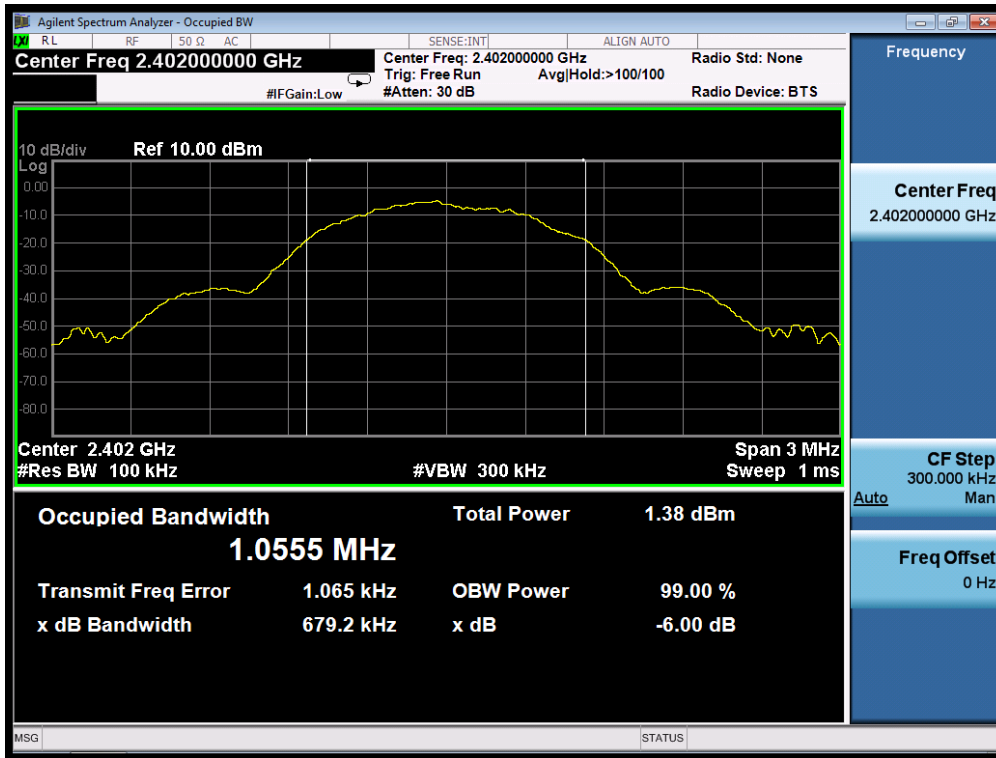

6dB bandwidth Middle Channel

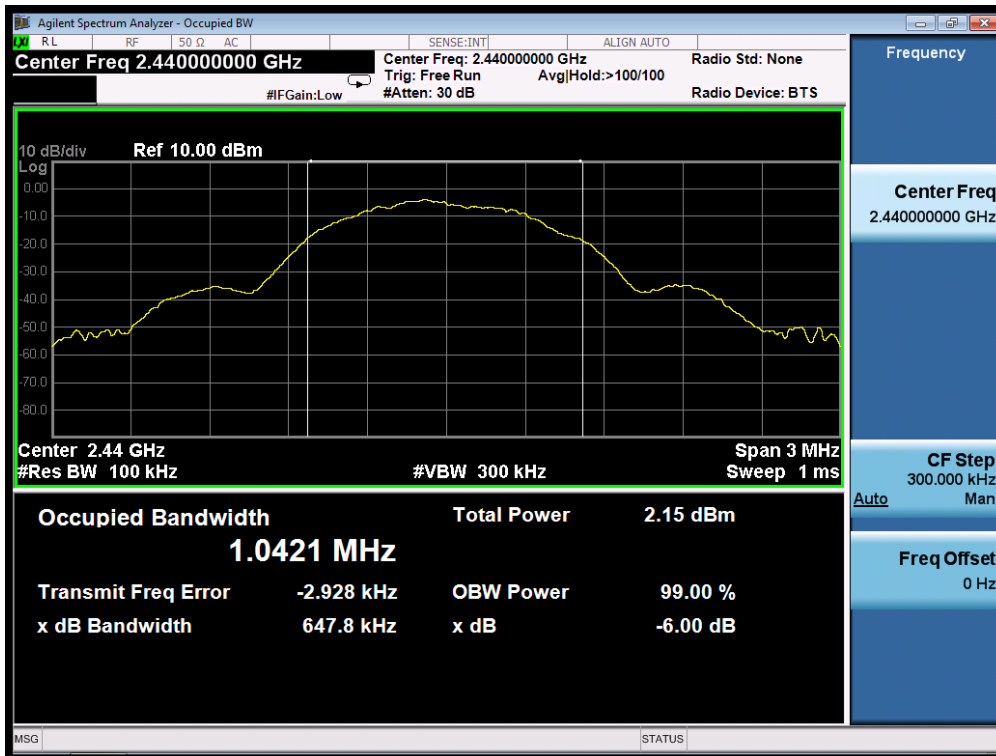

6dB bandwidth High Channel



6. Power Spectral Density


6.1 Measurement Procedure

The power spectral density, FCC Rule 15.247(e):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v03r03):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Please refer to following table and plots.


Modulation:	GFSK		
Temperature :	22 °C	Humidity :	53 %
Test By:	Sance	Test Date :	May 5, 2019
Test Result:	PASS		

Frequency MHz	Data Rate Mbps	PSD dBm/3kHz	Limit dBm/3kHz
Low Channel: 2402	1	-11.806	8
Middle Channel: 2440	1	-11.213	8
High Channel: 2480	1	-10.450	8


Low Channel

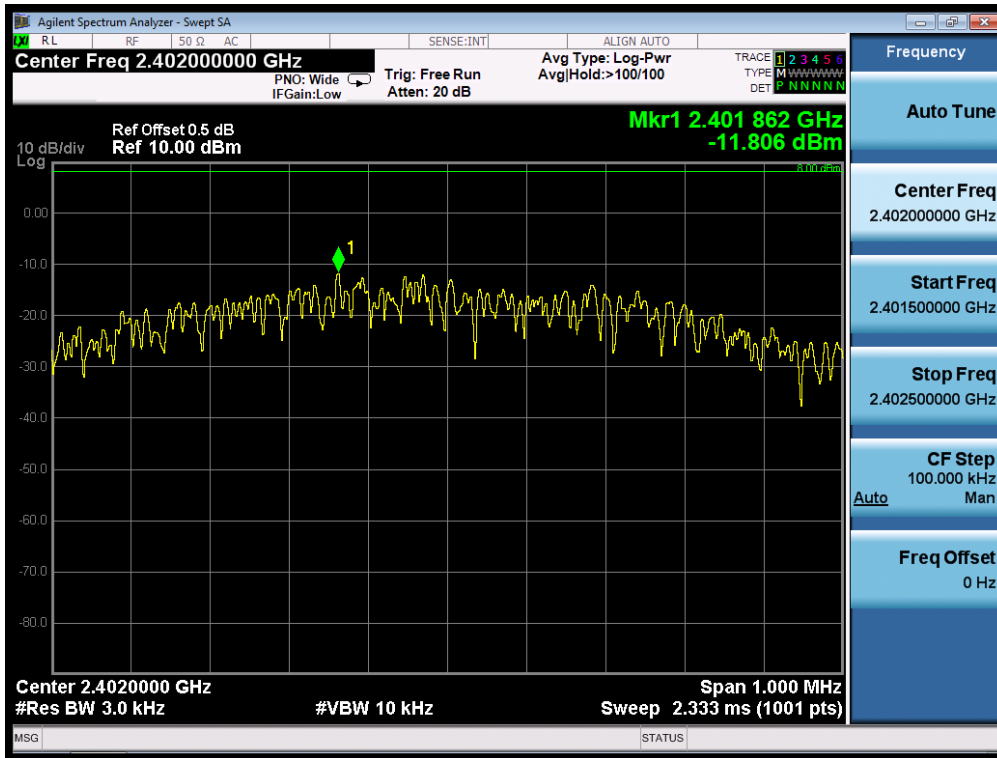

Middle Channel

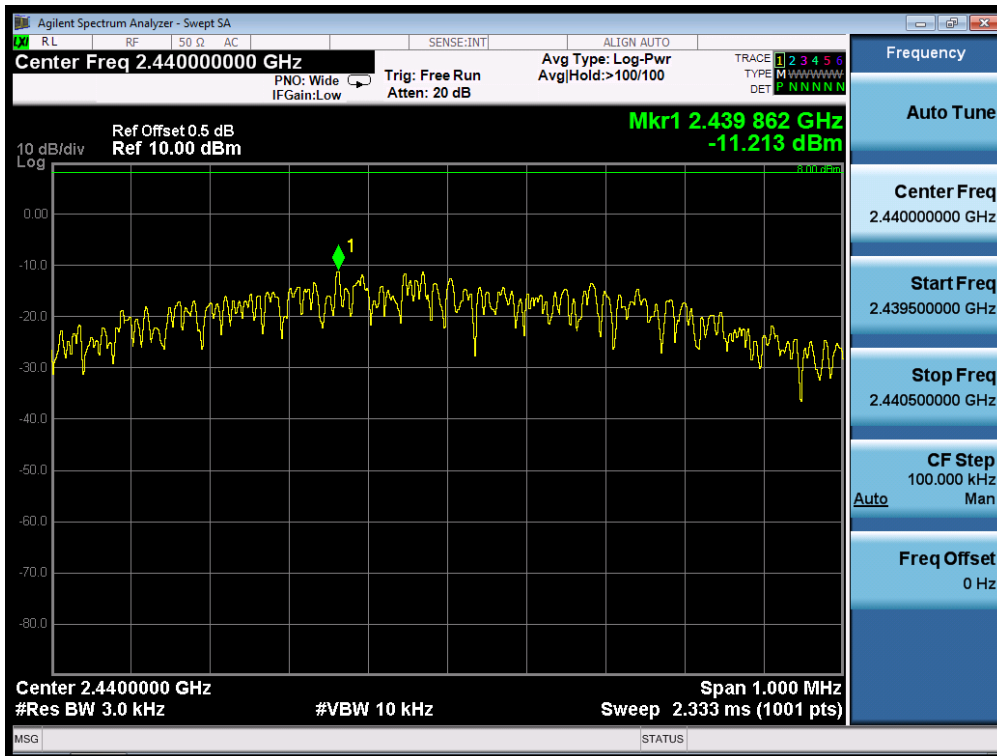

High Channel

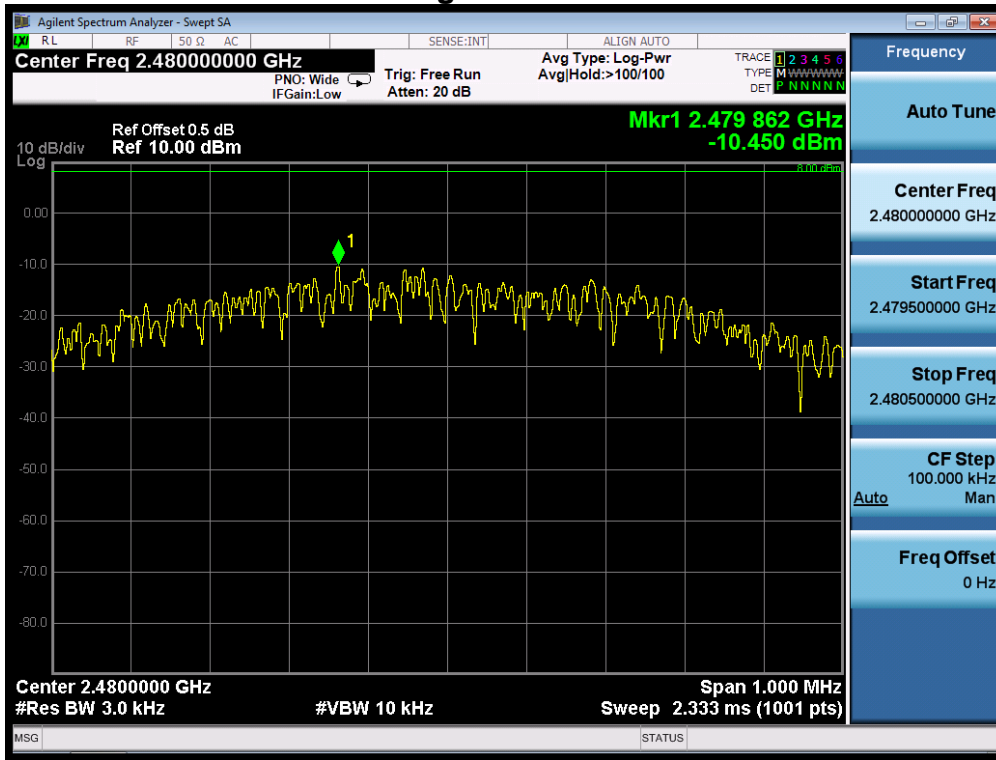

7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results

The test plots and table showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.



Band Edge Low Channel

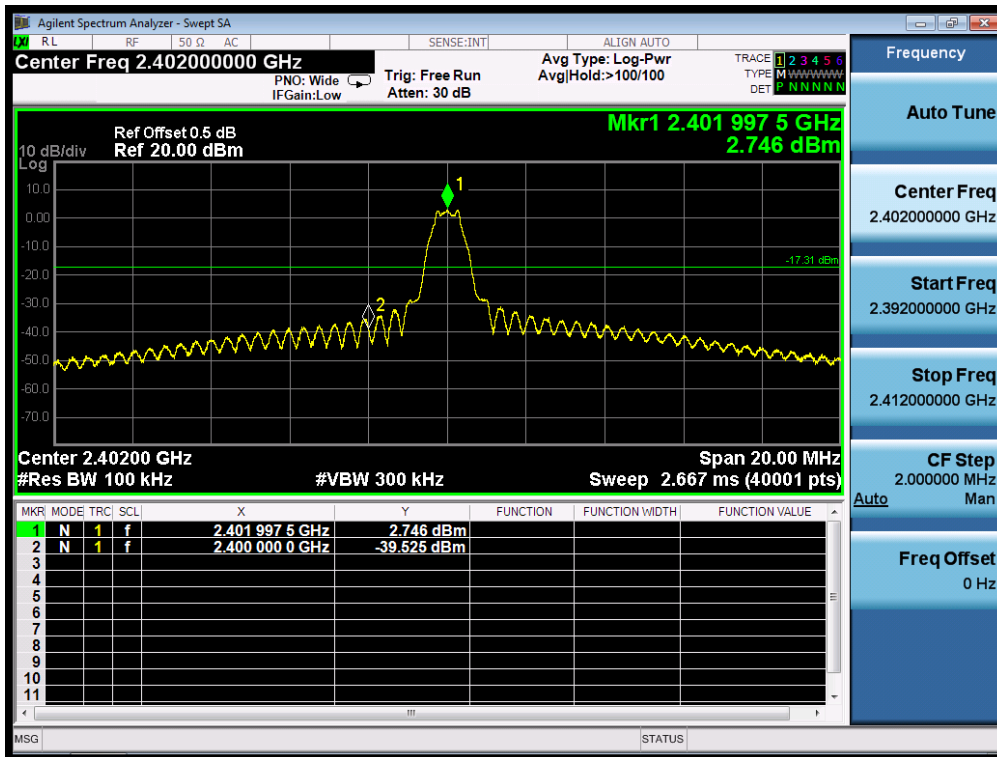



High Channel

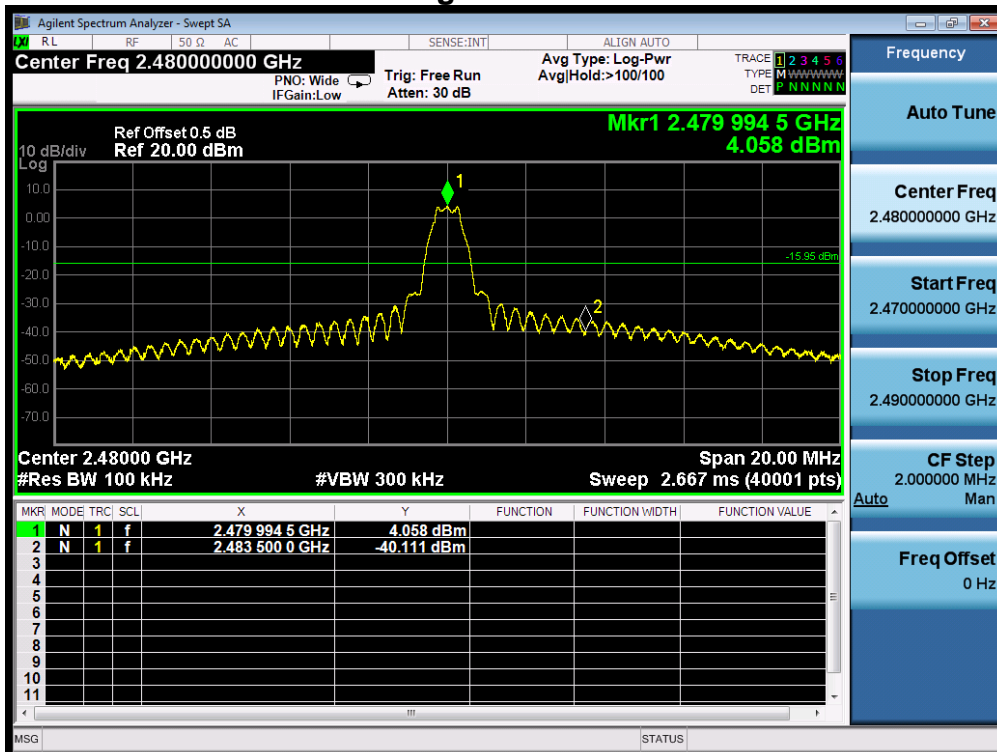



Conducted Spurious Emissions Low Channel

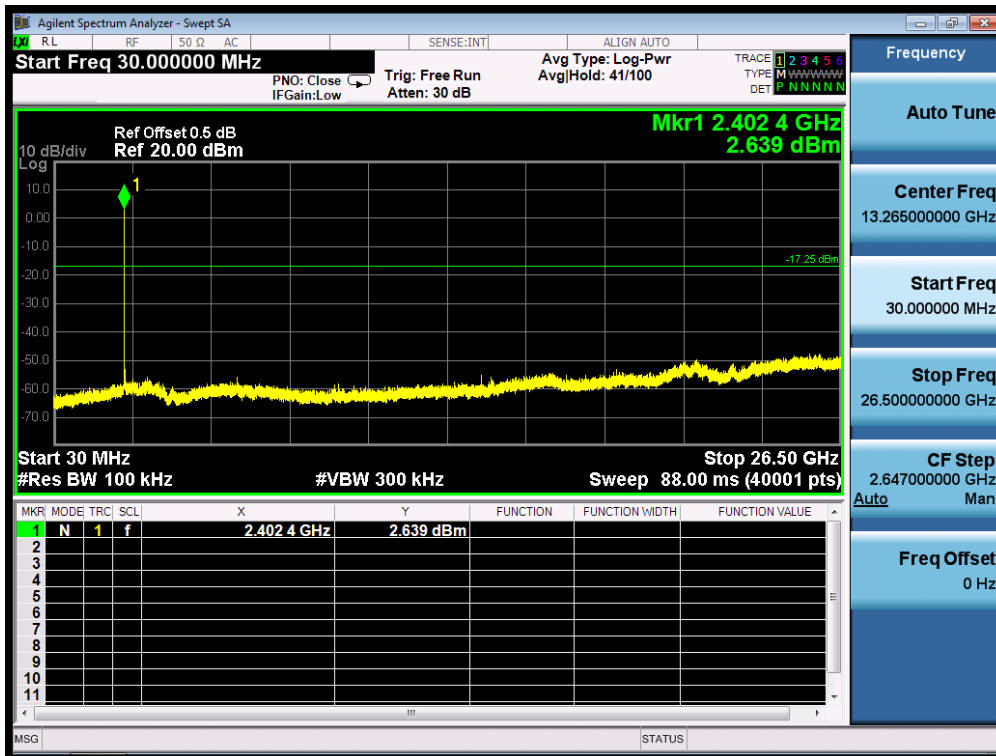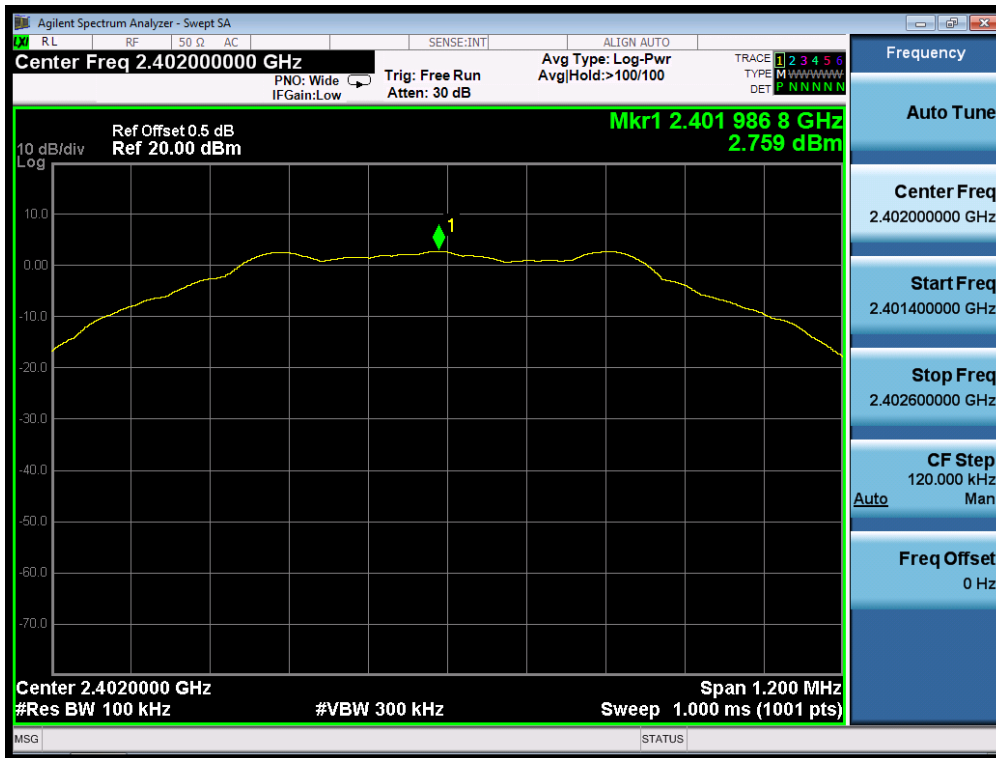

Middle Channel

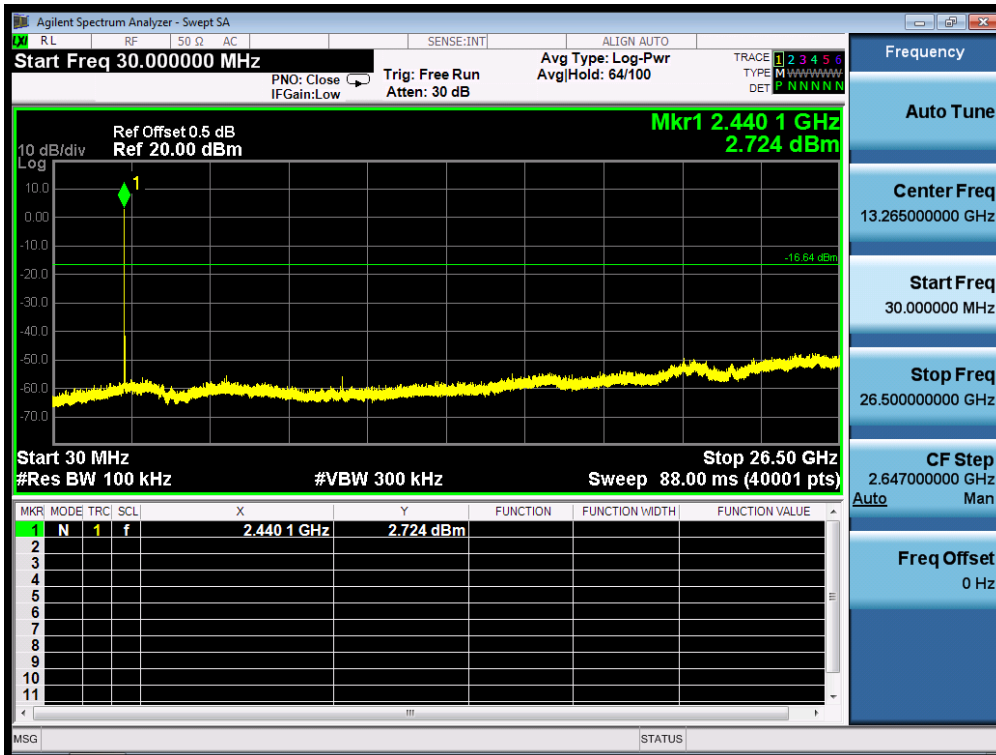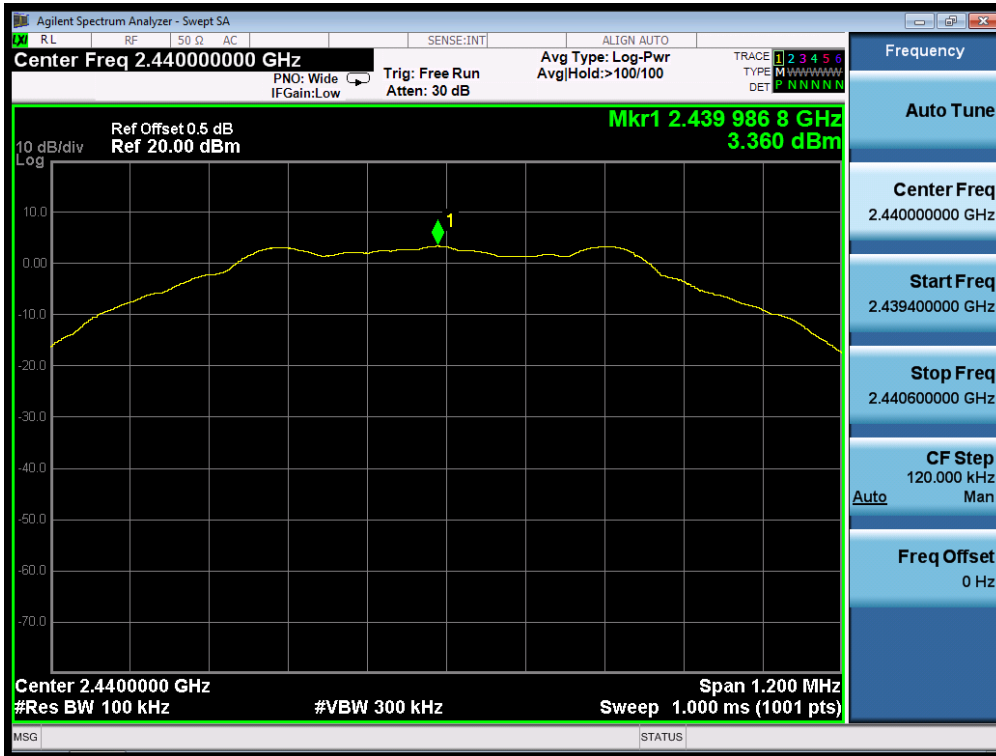

High Channel

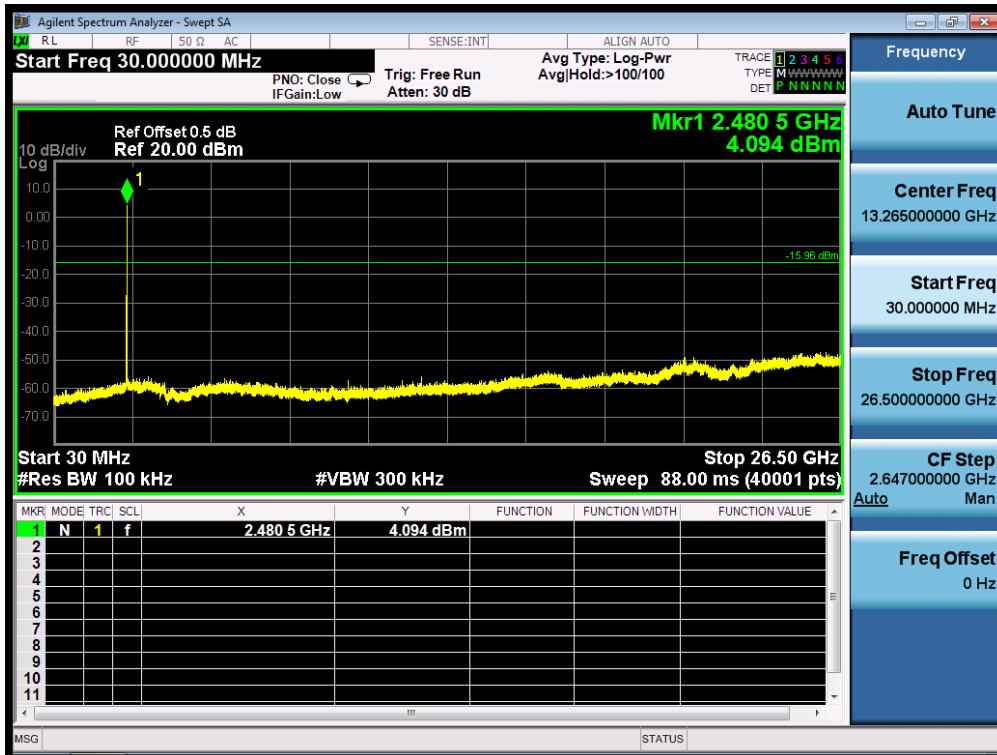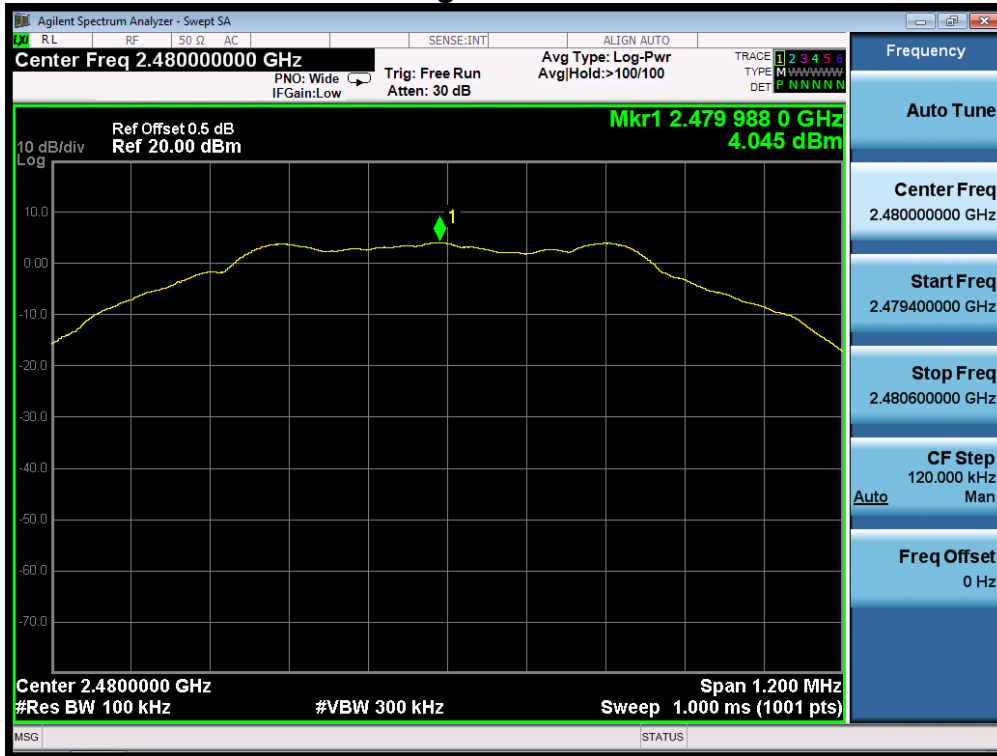


Note: Sweep points=40001pts


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

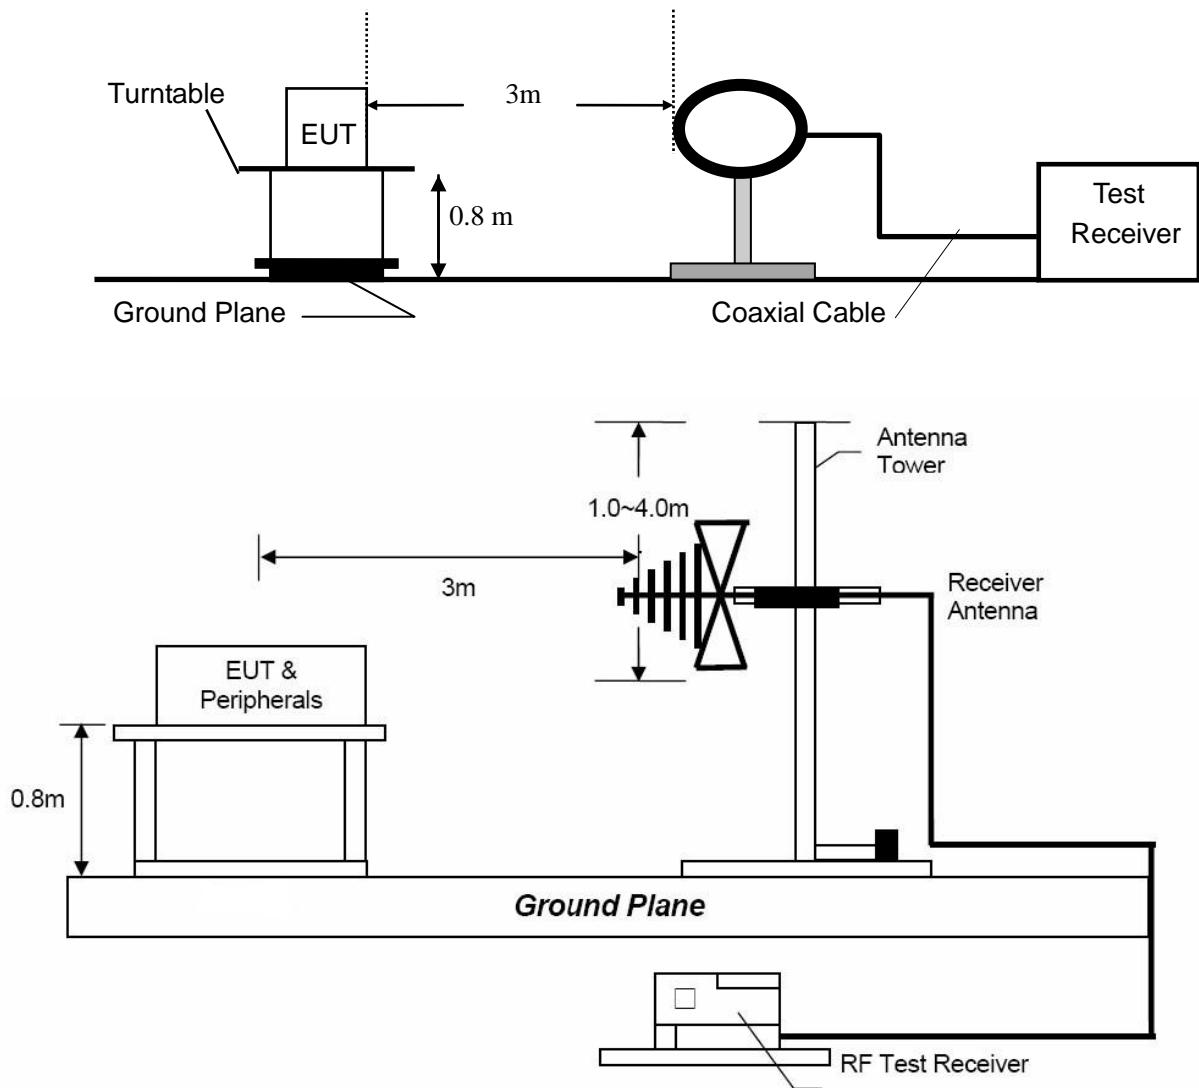

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

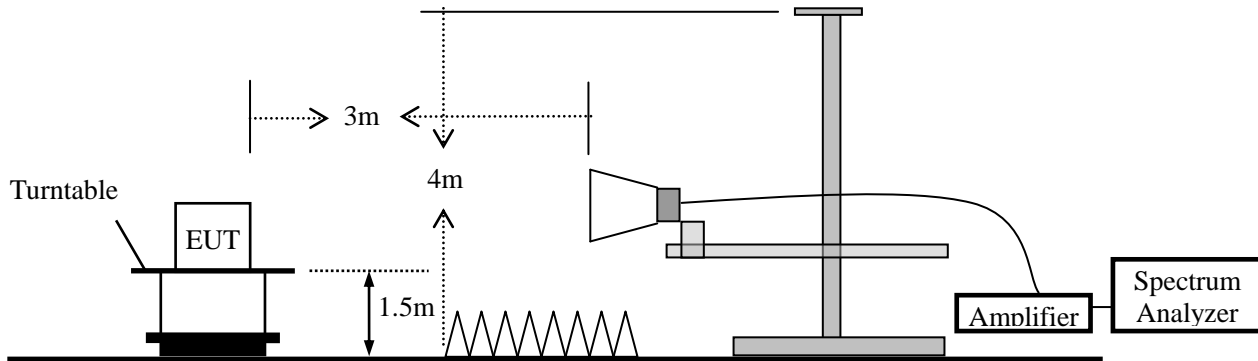

8.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit


Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V}/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark:
- (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4 Measurement Results

Below 1GHz:

Mode:	Normal operation	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m		
Test By:	Sance		

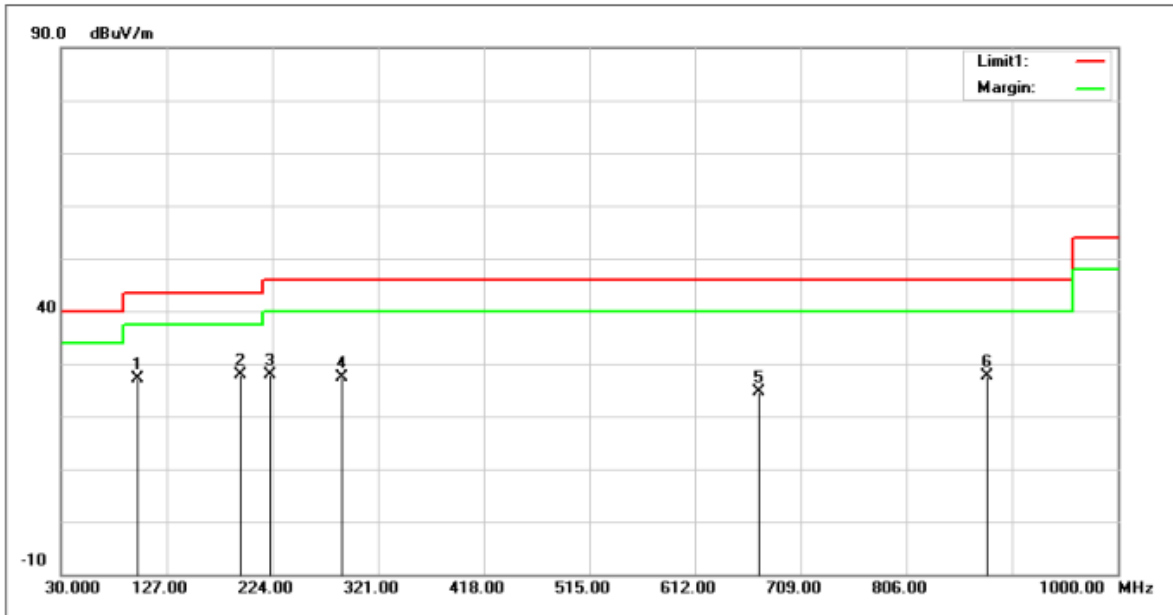


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	99.8400	43.28	-16.13	27.15	43.50	-16.35	100	0	QP
2	194.9000	42.17	-14.25	27.92	43.50	-15.58	100	0	QP
3	222.0600	42.05	-14.18	27.87	46.00	-18.13	100	0	QP
4	288.0200	37.98	-10.71	27.27	46.00	-18.73	100	0	QP
5	670.2000	27.11	-2.56	24.55	46.00	-21.45	100	0	QP
6	879.7200	27.22	0.40	27.62	46.00	-18.38	100	0	QP

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Mode: Normal operation
 Ant.Polar.: Vertical
 Test Result: PASS
 Measured Distance: 3m
 Test By: Sance

Test Date : May 4, 2019
 Temperature : 24 °C
 Humidity : 47 %

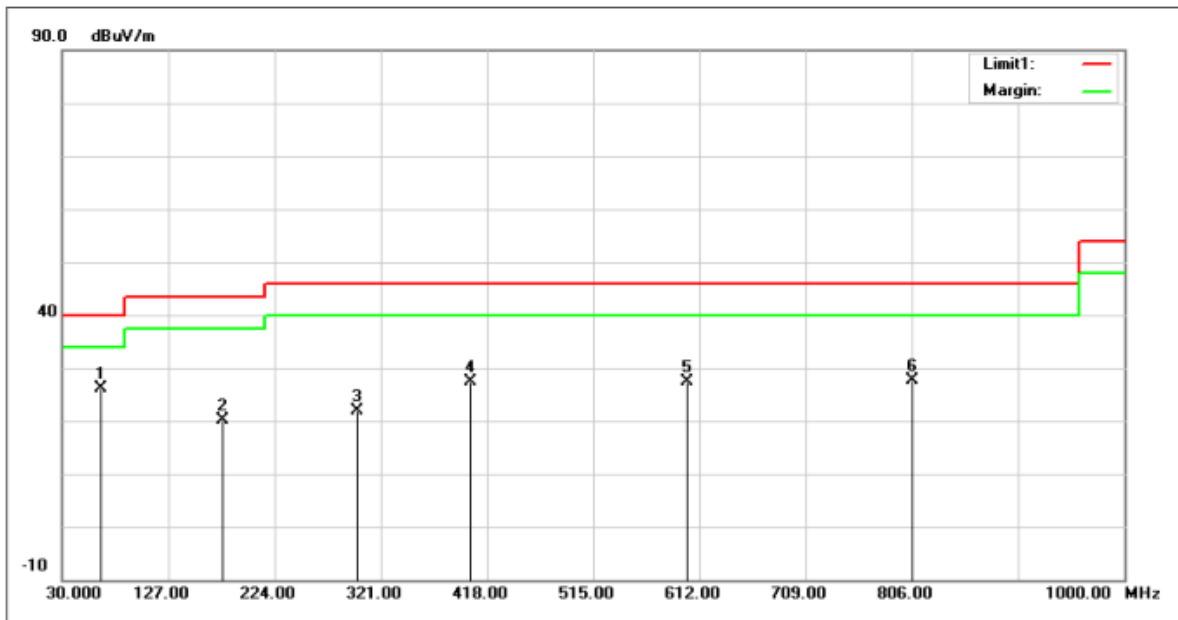


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	65.8900	38.98	-12.86	26.12	40.00	-13.88	100	0	QP
2	176.4700	32.18	-12.07	20.11	43.50	-23.39	100	0	QP
3	299.6600	32.37	-10.41	21.96	46.00	-24.04	100	0	QP
4	403.4500	35.07	-7.80	27.27	46.00	-18.73	100	0	QP
5	600.3600	30.38	-3.11	27.27	46.00	-18.73	100	0	QP
6	806.9700	27.97	-0.33	27.64	46.00	-18.36	100	0	QP

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Above 1GHz

Mode:	2402MHz	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m		
Test By:	Sance		

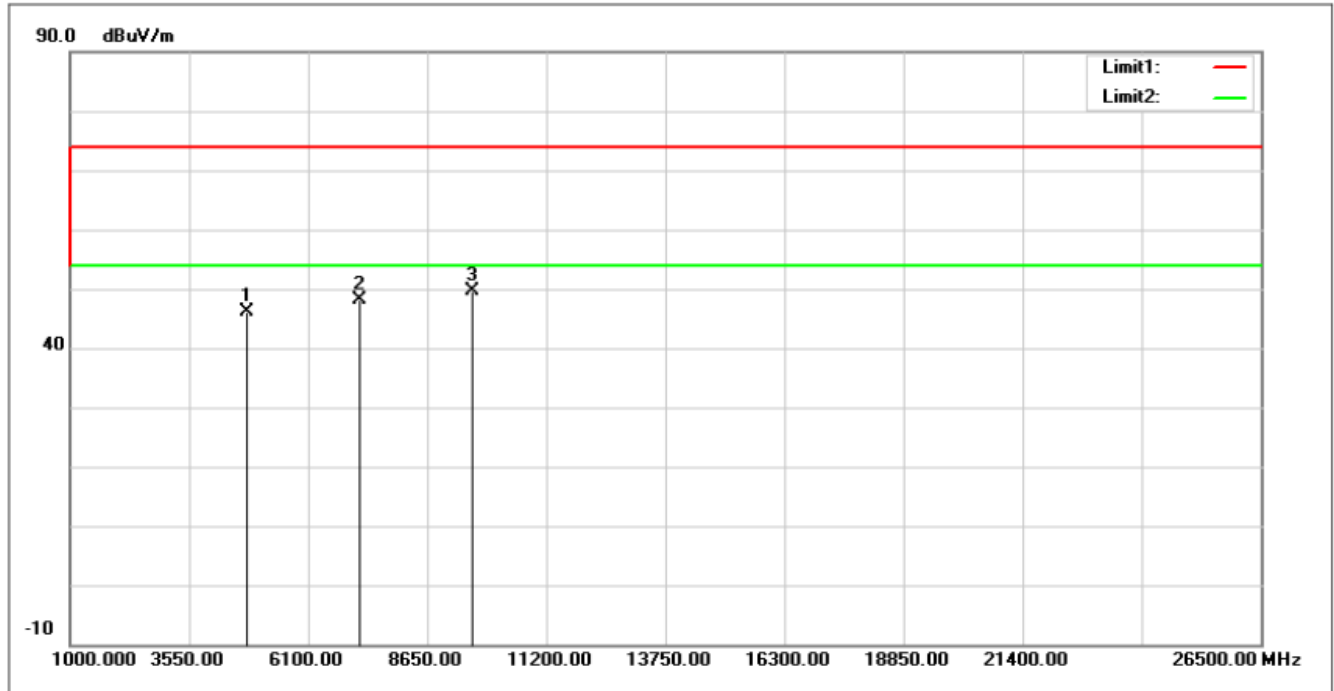

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4804.000	50.54	-4.45	46.09	74.00	-27.91	100	8	peak
2	7206.000	48.79	-0.63	48.16	74.00	-25.84	100	241	peak
3	9608.000	45.25	4.49	49.74	74.00	-24.26	100	195	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2402MHz	Test Date :	May 4, 2019
Ant.Polar.:	Vertical	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

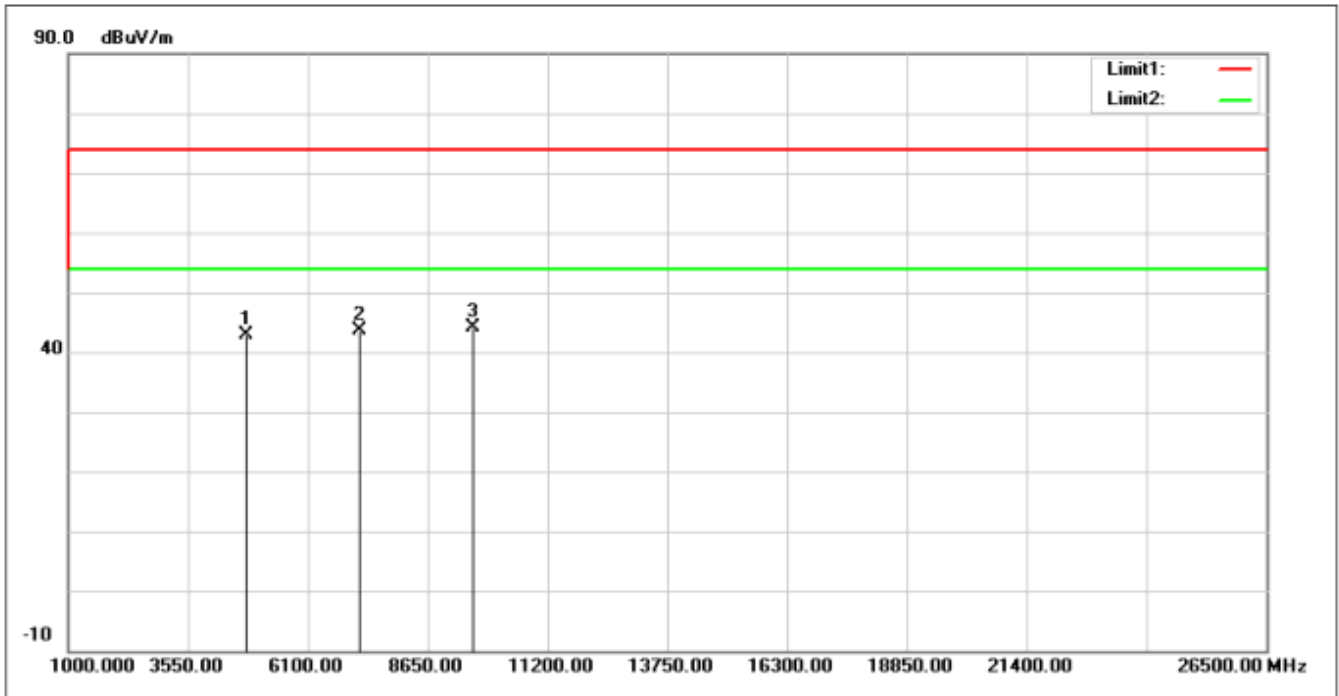

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4804.000	47.33	-4.45	42.88	74.00	-31.12	100	8	peak
2	7206.000	44.33	-0.63	43.70	74.00	-30.30	100	241	peak
3	9608.000	39.55	4.49	44.04	74.00	-29.96	100	195	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2440MHz	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

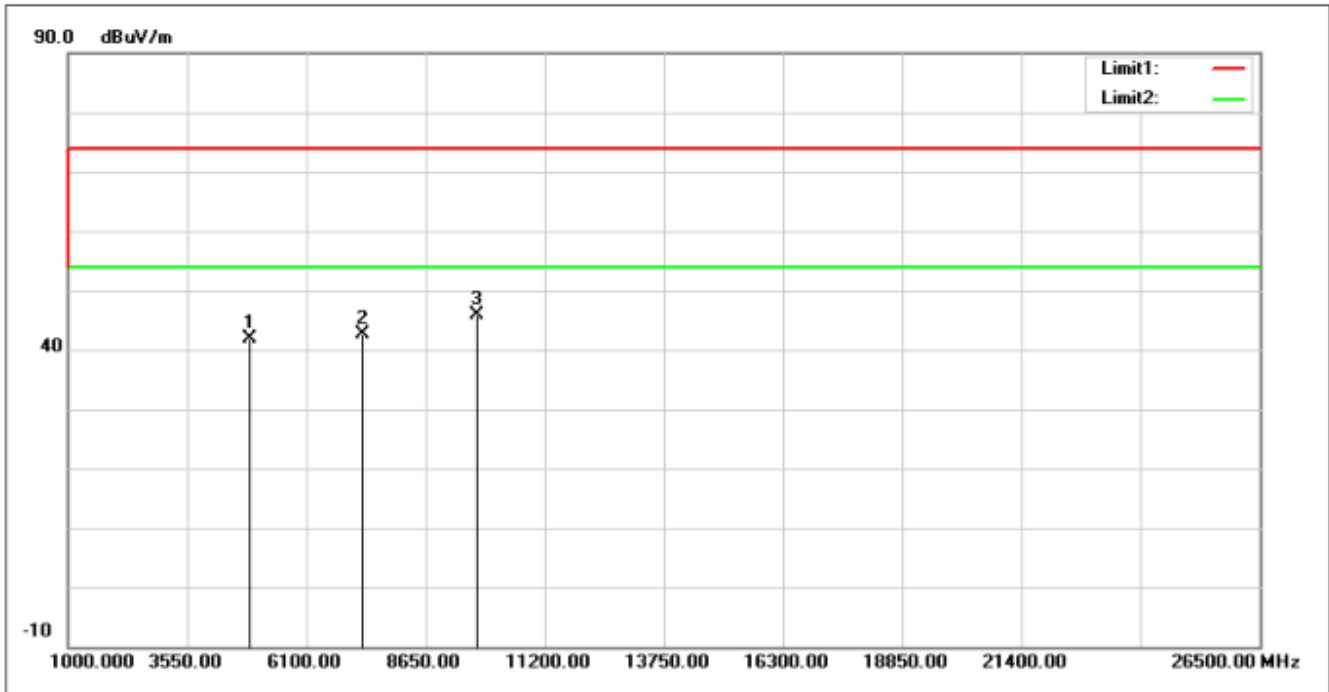

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4880.000	46.53	-4.55	41.98	74.00	-32.02	117	360	peak
2	7320.000	43.07	-0.34	42.73	74.00	-31.27	200	264	peak
3	9760.000	41.16	4.77	45.93	74.00	-28.07	173	360	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2440MHz	Test Date :	May 4, 2019
Ant.Polar.:	Vertical	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

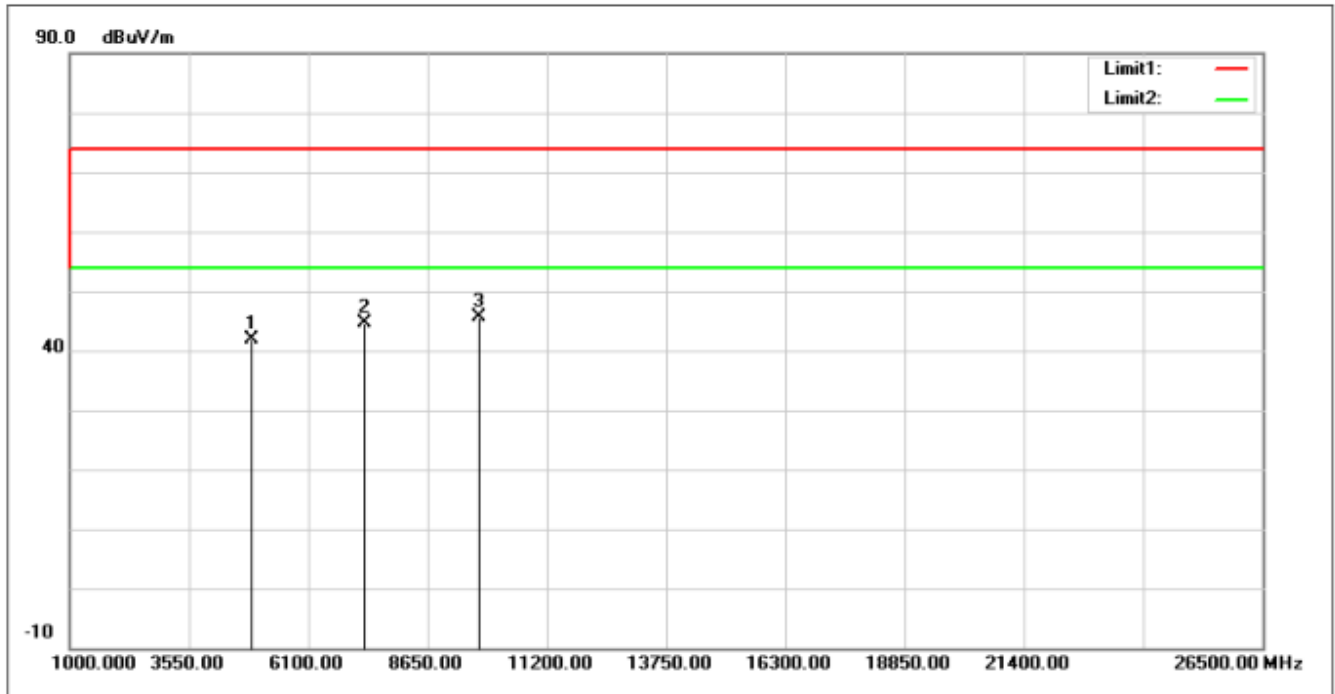

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4880.000	46.50	-4.55	41.95	74.00	-32.05	117	360	peak
2	7320.000	44.99	-0.34	44.65	74.00	-29.35	200	264	peak
3	9760.000	40.80	4.77	45.57	74.00	-28.43	173	360	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2480MHz	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

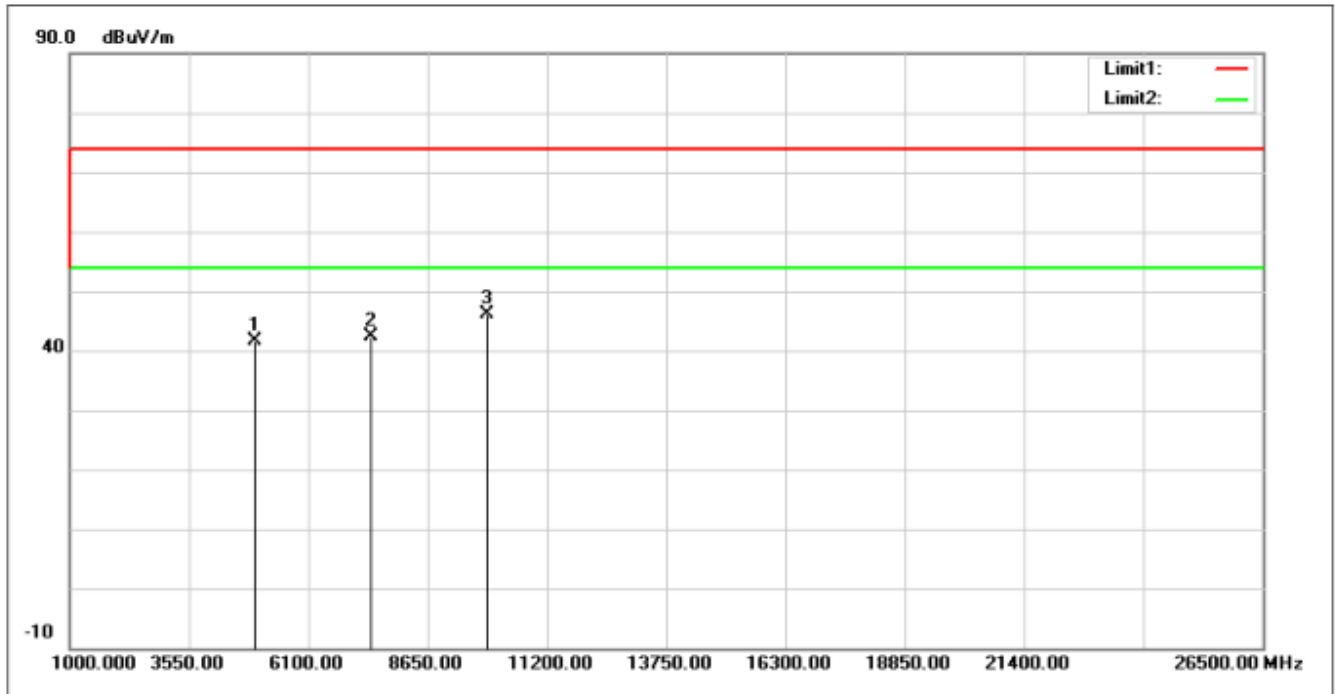

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4960.000	46.31	-4.65	41.66	74.00	-32.34	100	141	peak
2	7440.000	42.50	-0.05	42.45	74.00	-31.55	200	248	peak
3	9920.000	41.16	5.09	46.25	74.00	-27.75	100	8	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2480MHz	Test Date :	May 4, 2019
Ant.Polar.:	Vertical	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

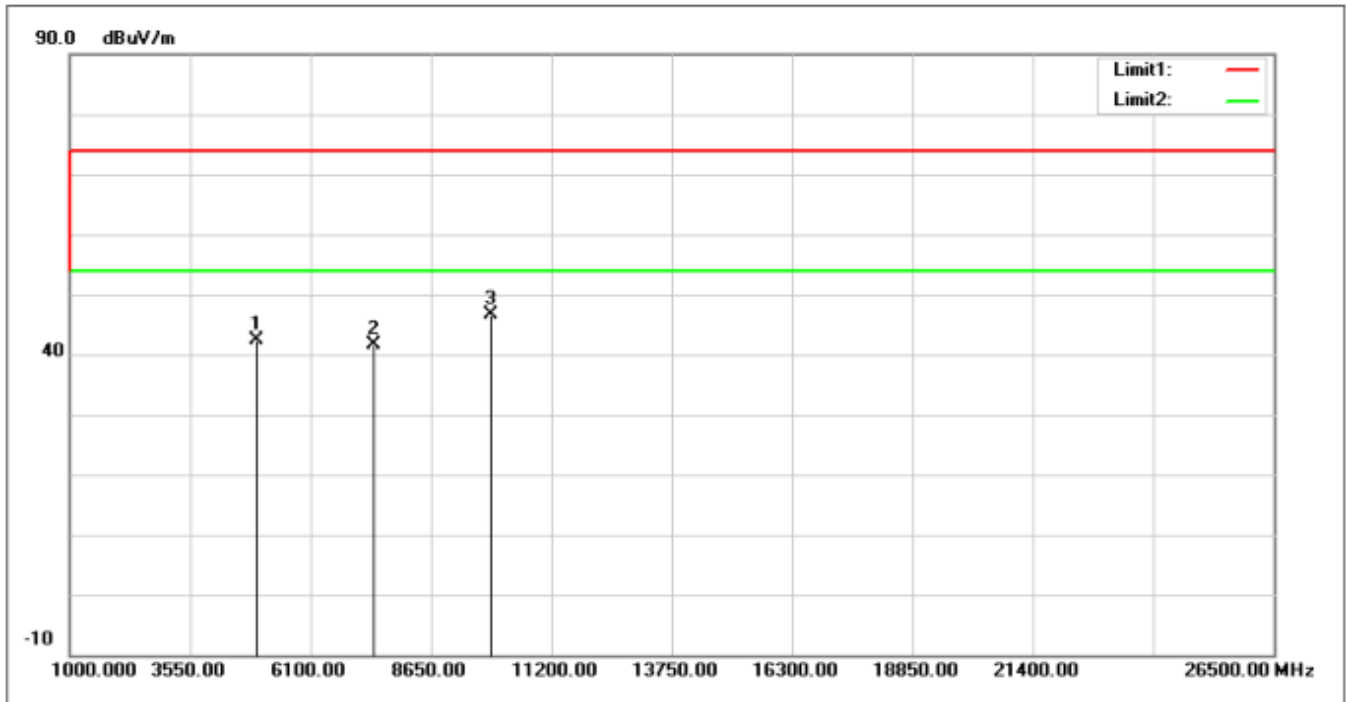

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4960.000	47.05	-4.65	42.40	74.00	-31.60	100	141	peak
2	7440.000	41.75	-0.05	41.70	74.00	-32.30	200	248	peak
3	9920.000	41.50	5.09	46.59	74.00	-27.41	100	8	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	RX	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

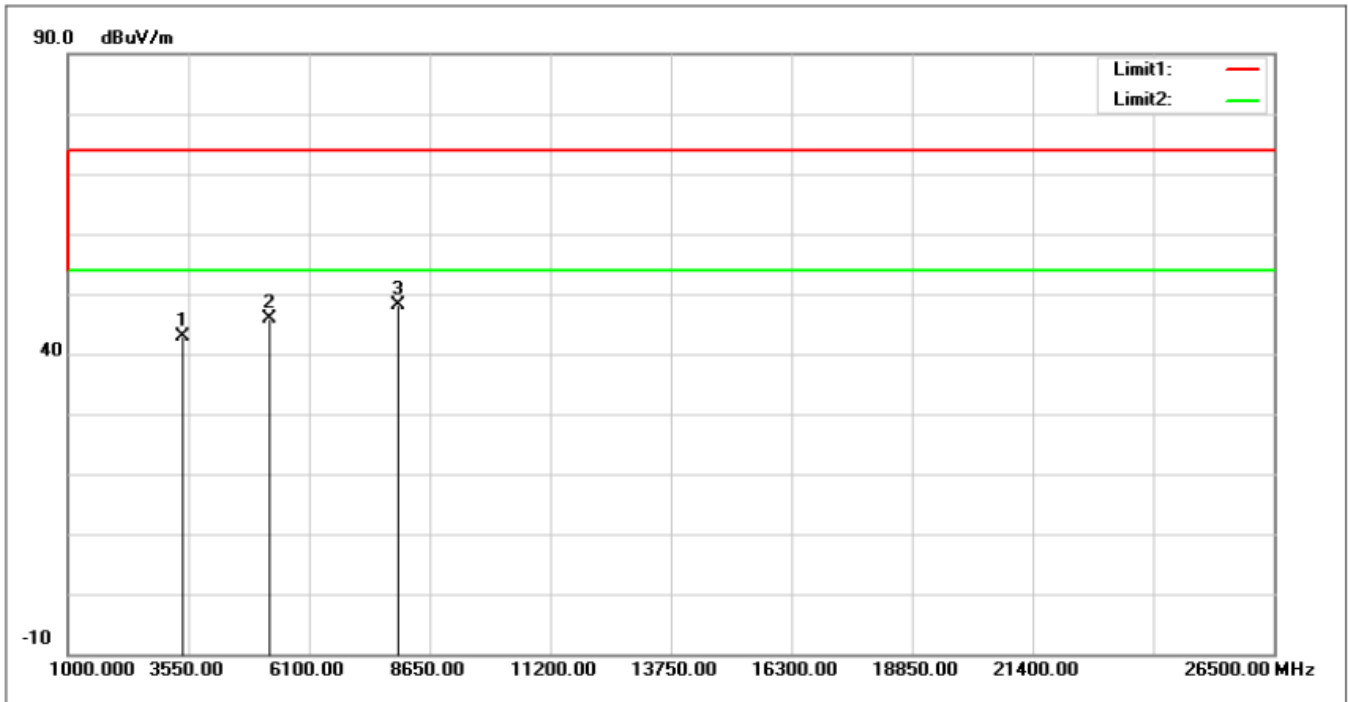

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	3422.500	50.18	-7.30	42.88	74.00	-31.12	100	0	peak
2	5258.500	49.64	-3.87	45.77	74.00	-28.23	100	0	peak
3	7987.000	47.10	1.06	48.16	74.00	-25.84	100	0	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	RX	Test Date :	May 4, 2019
Ant.Polar.:	Vertical	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

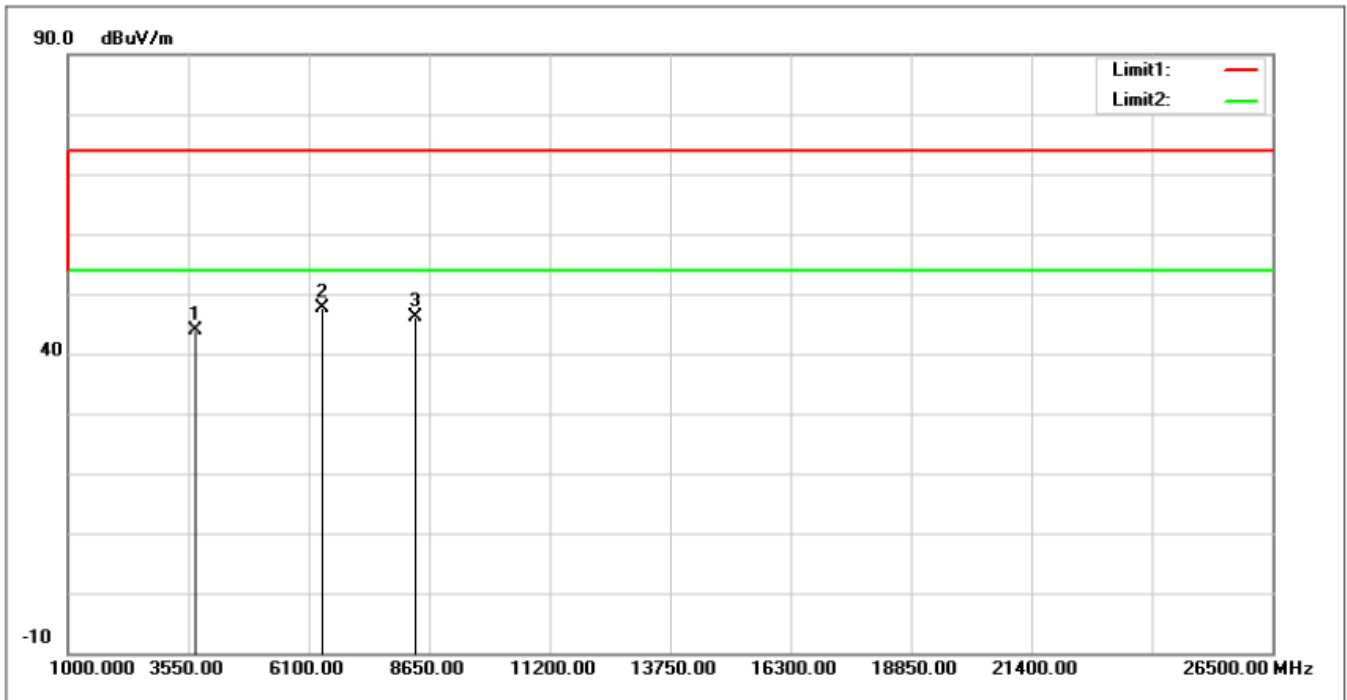

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	3703.000	50.14	-6.31	43.83	74.00	-30.17	150	0	peak
2	6380.500	49.47	-1.79	47.68	74.00	-26.32	150	0	peak
3	8369.500	44.31	1.81	46.12	74.00	-27.88	150	0	peak

Other harmonics emissions are lower than 10dB below the allowable limit.


Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Band Edge:

Mode:	2402MHz	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m		
Test By:	Sance		

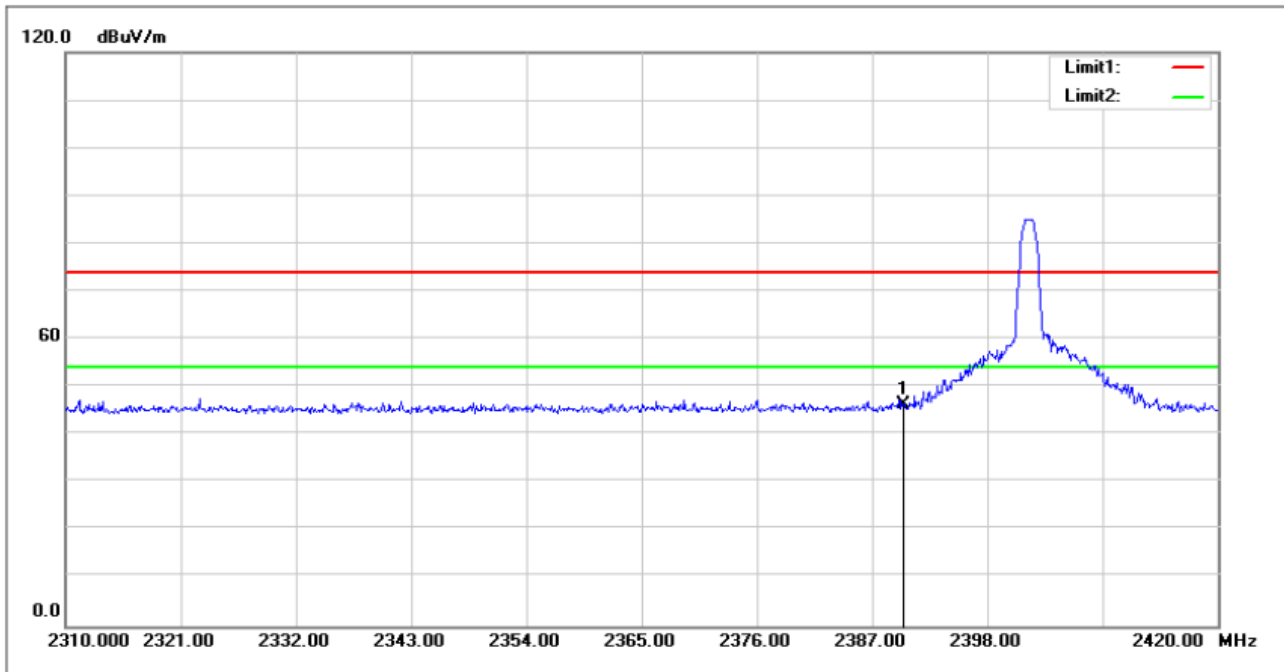

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	56.12	-9.87	46.25	74.00	-27.75	100	0	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2402MHz	Test Date :	May 4, 2019
Ant.Polar.:	Vertical	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

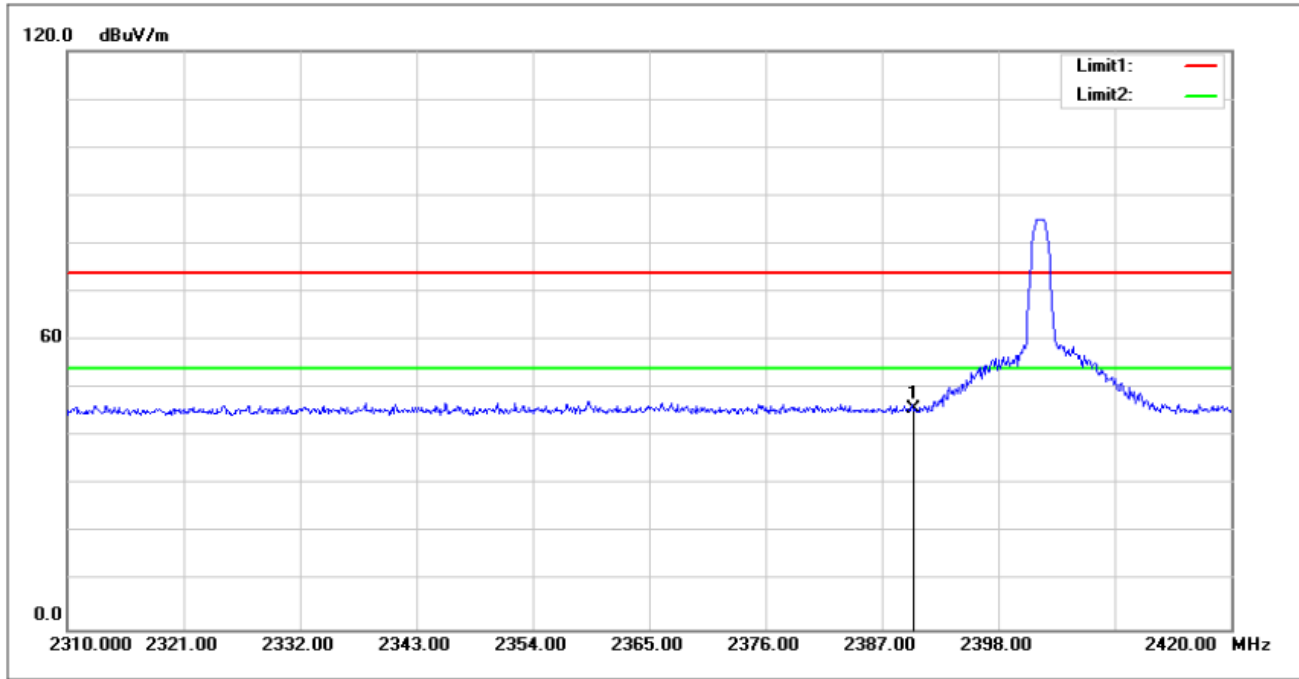

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	55.51	-9.87	45.64	74.00	-28.36	100	203	peak


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2480 MHz	Test Date :	May 4, 2019
Ant.Polar.:	Horizontal	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

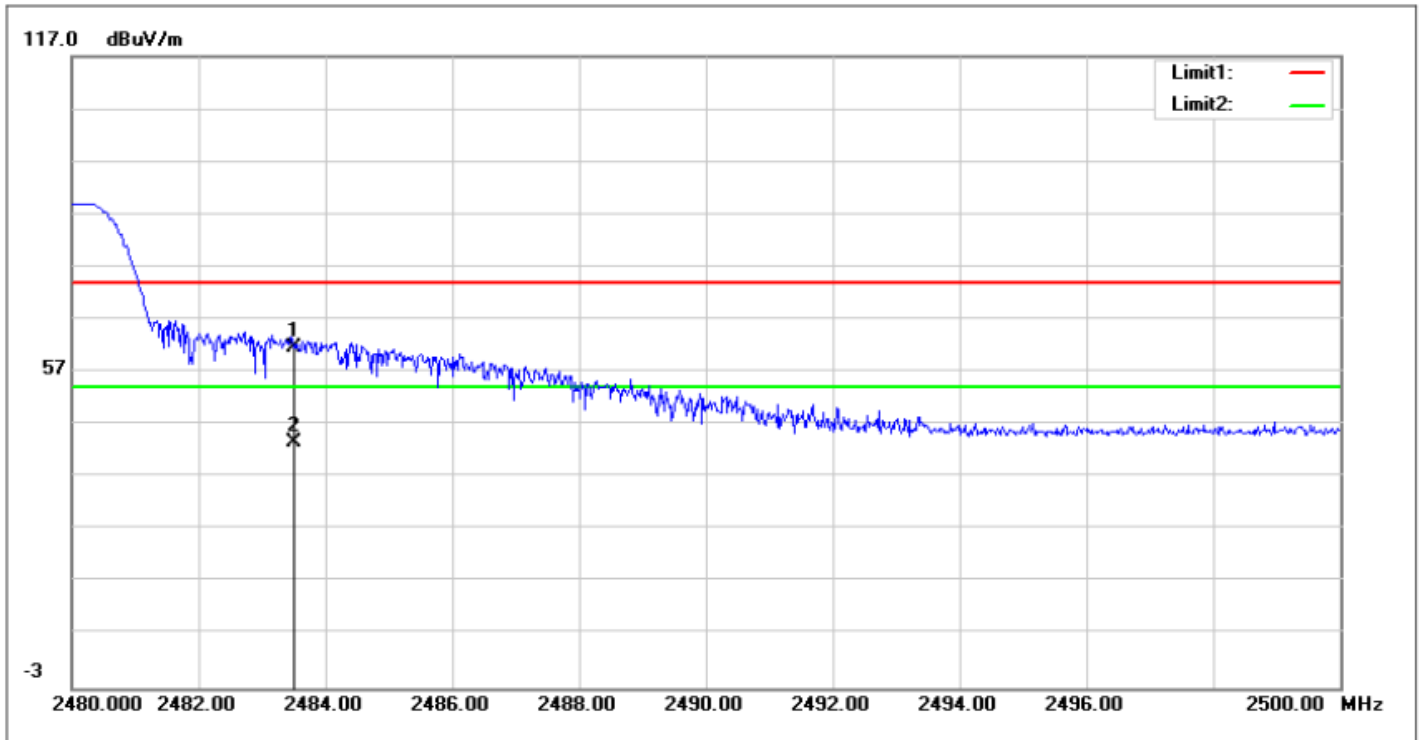

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	71.12	-9.58	61.54	74.00	-12.46	100	189	peak
2	2483.500	53.27	-9.58	43.69	54.00	-10.31	100	189	AVG


Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

Mode:	2480 MHz	Test Date :	May 4, 2019
Ant.Polar.:	Vertical	Temperature :	24 °C
Test Result:	PASS	Humidity :	47 %
Measured Distance:	3m	Test By:	Sance

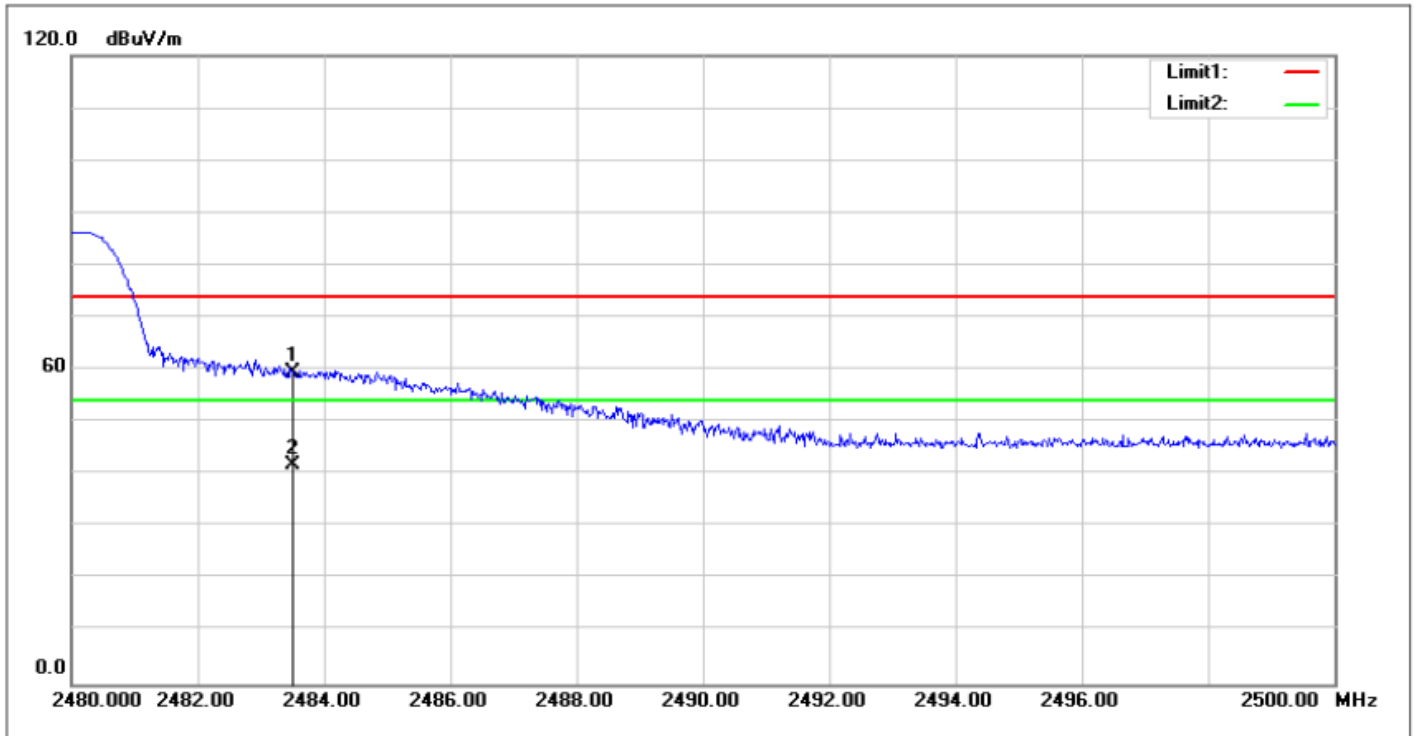

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	69.15	-9.58	59.57	74.00	-14.43	100	149	peak
2	2483.500	51.54	-9.58	41.96	54.00	-12.04	100	149	AVG

Other harmonics emissions are lower than 10dB below the allowable limit.

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3 Measurement uncertainty : ±3.7dB

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is chip antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 0.5dBi, So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2019	1 year
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 14, 2019	1 year
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2019	1 year
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2019	1 year
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2019	1 year
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2019	1 year
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2019	1 year
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2019	1 year
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2019	1 year
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Apr. 25, 2019	1 year
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2019	1 year
Spectrum Analyzer	Keysight	N9020A	MY54200831	20Hz~26.5GHz	Apr. 24, 2019	1 year
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Mar. 14, 2019	1 year
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2019	1 year
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2019	1 year
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Mar. 14, 2019	1 year
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Mar. 14, 2019	1 year

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---