

# Test Report



## INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 95 I

Equipment Under Test: Mobile Patient Monitor

Model: Portrait HUB01

Manufacturer: GE Healthcare Finland Oy  
Kuortaneenkatu 2  
FI-00510, Helsinki  
Finland

Customer: GE Healthcare Finland Oy  
Kuortaneenkatu 2  
FI-00510, Helsinki  
Finland

FCC Rule Part: 95: 2019  
KDB: 550599 D01 Medical Body Area Network v01r01  
Medical Body Area Network (MBAN) Measurement  
Procedures  
(December 8, 2017)

Date: 29 March 2021

Issued by:

A handwritten signature in blue ink, appearing to read 'Henri Mäki'.

Henri Mäki  
Testing Engineer

Date: 29 March 2021

Checked by:

A handwritten signature in blue ink, appearing to read 'Mikko Halonen'.

Mikko Halonen  
Development Engineer

**Table of Contents**

---

GENERAL REMARKS.....	3
Disclaimer.....	3
RELEASE HISTORY .....	4
PRODUCT DESCRIPTION .....	5
Equipment Under Test .....	5
General Description.....	5
Ratings and declarations.....	5
Power Supply .....	6
Mechanical Size of the EUT .....	6
SUMMARY OF TESTING.....	7
EUT Test Conditions during Testing .....	7
TEST RESULTS.....	8
Frequency Stability.....	8
Radiated Power .....	10
Emission Bandwidth .....	13
Unwanted Emissions.....	16
Band-Edge Measurement .....	21
TEST EQUIPMENT .....	26

**GENERAL REMARKS****Disclaimer**

*This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>*

*Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.*

*Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.*

**RELEASE HISTORY**

<b>Version</b>	<b>Changes</b>	<b>Issued</b>
1.0	Initial release	29 March 2021

## PRODUCT DESCRIPTION

### Equipment Under Test

Trade mark: GE  
 Model: Portrait HUB01  
 Type: Mobile Patient Monitor  
 Serial no: Sample 1: SRW20440005SP (RF\_HUB\_RFV\_1)  
 Sample 2: SRW20440013SP (RF\_HUB\_RFV\_C1)  
 FCC ID: 2AO8L-HUB01  
 IC: 25821-HUB01

### General Description

The Portrait HUB01 (later Hub) is a part of GE Healthcare's Portrait Mobile Monitoring Solution system. The Hub enables continuous monitoring of patients by acquiring signals from body-worn sensors through the GE proprietary Medical Body Area Network (MBAN) radio as well as displaying trends and events. The Hub further delivers the patient data to a hospital network through the WLAN (802.11a/b/g/n) radio. Pairing between a Hub and a sensor is made by using an NFC (ISO/IEC 14443) reader in the Hub. In addition to the active MBAN, WLAN and NFC radios, the Hub has a passive RFID tag (EPCglobal Gen-2) that is used for asset management. All Hub antennas are integrated in the mechanics. Besides the wireless interfaces the hub incorporates a 5-pin GE proprietary USB connector in the back of the Hub. The USB connector is used for charging the Hub battery and it enables the SW updates and device configuration.

This test report contains the results for MBAN operating in 2390-2400 MHz frequency band.

### Classification

Fixed device   
 Mobile Device (Human body distance > 20cm)   
 Portable Device (Human body distance < 20cm)

### Samples and Modifications

No.	Name	Description
1	RF_HUB_RFV_1	Radiated sample
2	RF_HUB_RFV_C1	Conducted sample

In both samples the PWB RF is reworked to be mass production equivalent.

In conducted sample the RF test cables were plugged into existing production test connectors. The production test connectors locate on the PWB next to antenna inputs.

### Ratings and declarations

Operating Frequency Range (OFR): 2392.8 – 2398.0 MHz  
 Channels: 3  
 Channel separation: 2.6 MHz  
 Transmission technique: Digital modulation  
 Modulation: GFSK  
 Antenna type: Integrated custom monopole antennas  
 Integral Antenna gain: bottom antenna: 2.2 dBi (highest gain in the frequency range)  
 top antenna: 4.3 dBi (highest gain in the frequency range)

**Power Supply**

Operating voltage range: 3.6 V<sub>DC</sub> (nominal battery voltage)

**Mechanical Size of the EUT**

Height: 21 mm

Width: 63 mm

Length: 141 mm

## SUMMARY OF TESTING

Test Specification	Description of Test	Result
§95.2565(b)	Frequency Stability	PASS
§95.2567(f)	Radiated Power	PASS
§95.2573(e)	Emission Bandwidth	PASS
§95.2579(a)(5), (b)	Unwanted Emissions	PASS
§95.2579(f)	Band-Edge Measurement	PASS

The decision rule applied for the tests results stated in this test report is according to the requirements of section 1.3 of ANSI C63.26-2015.

## EUT Test Conditions during Testing

The EUT was in continuous transmit mode during all the tests. The EUT was configured into the wanted channel using software provided by the manufacturer (MBAN test mode 1.0.0.4.0.13-1116.1.20b2780).

Radiated measurements were performed with the transmit power set to the maximum level the equipment hardware is capable of. During all other tests the transmit power was set to the maximum level at which the final product is able to operate, limited by the software. The test conditions related to the transmit power levels were provided by the customer.

**Table 1:** Test frequencies

Channel	Frequency (MHz)
12 Low	2392.8
14 High	2398.0

## Test Facility

Testing Laboratory / address: FCC designation number: <b>FI0002</b> ISED CAB identifier: <b>T004</b>	SGS Fimko Ltd Takomotie 8 FI-00380, HELSINKI FINLAND
Test Site:	<input type="checkbox"/> K10LAB, ISED Canada registration number: <b>8708A-1</b> <input checked="" type="checkbox"/> K5LAB, ISED Canada registration number: <b>8708A-2</b> <input type="checkbox"/> T10LAB

**TEST RESULTS****Frequency Stability**

<b>Standard:</b>	ANSI C63.26-2015
<b>Tested by:</b>	HEM
<b>Date:</b>	13 January 2021
<b>Temperature:</b>	22.1 °C
<b>Humidity:</b>	21.1 %RH
<b>Barometric pressure:</b>	1005.5 mbar
<b>Measurement Uncertainty:</b>	±5.380 ppm, level of confidence 95 % (k = 2)

**FCC Rule: 95.2565(b)**

All MBAN devices must maintain a frequency stability of ±100 ppm over the applicable temperature range.

The equipment is placed inside a temperature chamber, and the chamber temperature is allowed to stabilize. The equipment is turned on, and the frequency is recorded at startup, and at 2 minutes, 5 minutes, and 10 minutes after the equipment is turned on. Four measurements in total are made at one temperature, and the highest deviation from the nominal frequency is reported.



**Results**

**Table 2:** Frequency Stability results, LOW channel (bottom antenna)

Temperature [°C]	Measured [MHz]	Deviation [ppm]	Result
+0	2392.8002400	+0.100	PASS
+10	2392.8013800	+0.577	PASS
+20	2392.8007050	+0.295	PASS
+30	2392.7992650	-0.307	PASS
+40	2392.7985900	-0.589	PASS

**Table 3:** Frequency Stability results, HIGH channel (bottom antenna)

Temperature [°C]	Measured [MHz]	Deviation [ppm]	Result
+0	2398.0003300	+0.138	PASS
+10	2398.0013950	+0.582	PASS
+20	2398.0006450	+0.269	PASS
+30	2397.9993100	-0.288	PASS
+40	2397.9986200	-0.575	PASS

**Table 4:** Frequency Stability results, LOW channel (top antenna)

Temperature [°C]	Measured [MHz]	Deviation [ppm]	Result
+0	2392.8002550	+0.107	PASS
+10	2392.8013800	+0.577	PASS
+20	2392.8007050	+0.295	PASS
+30	2392.7992800	-0.301	PASS
+40	2392.7986200	-0.577	PASS

**Table 5:** Frequency Stability results, HIGH channel (top antenna)

Temperature [°C]	Measured [MHz]	Deviation [ppm]	Result
+0	2398.0003300	+0.138	PASS
+10	2398.0014100	+0.588	PASS
+20	2398.0006450	+0.269	PASS
+30	2397.9992800	-0.300	PASS
+40	2397.9986200	-0.575	PASS

## Radiated Power

**Standard:** ANSI C63.26-2015  
**Tested by:** HEM  
**Date:** 13 January 2021  
**Temperature:** 22.1 °C  
**Humidity:** 21.1 %RH  
**Barometric pressure:** 1005.5 mbar  
**Measurement Uncertainty:** ±0.349 dB, level of confidence 95 % (k = 2)


### FCC Rule: 95.2567(f)

MBAN transmissions in the 2390-2400 MHz frequency band are limited to a maximum EIRP that shall not exceed the lesser of 13 dBm or  $16 + 10 \log(\text{EBW})$  dBm, where EBW is the emission bandwidth expressed in MHz.


## Results

**Table 6:** Radiated Power results

Antenna	Channel	EIRP [dBm]	Limit [dBm]	Result
bottom	LOW	10.65	13.00	PASS
	HIGH	10.62	13.00	PASS
top	LOW	10.81	13.00	PASS
	HIGH	10.79	13.00	PASS

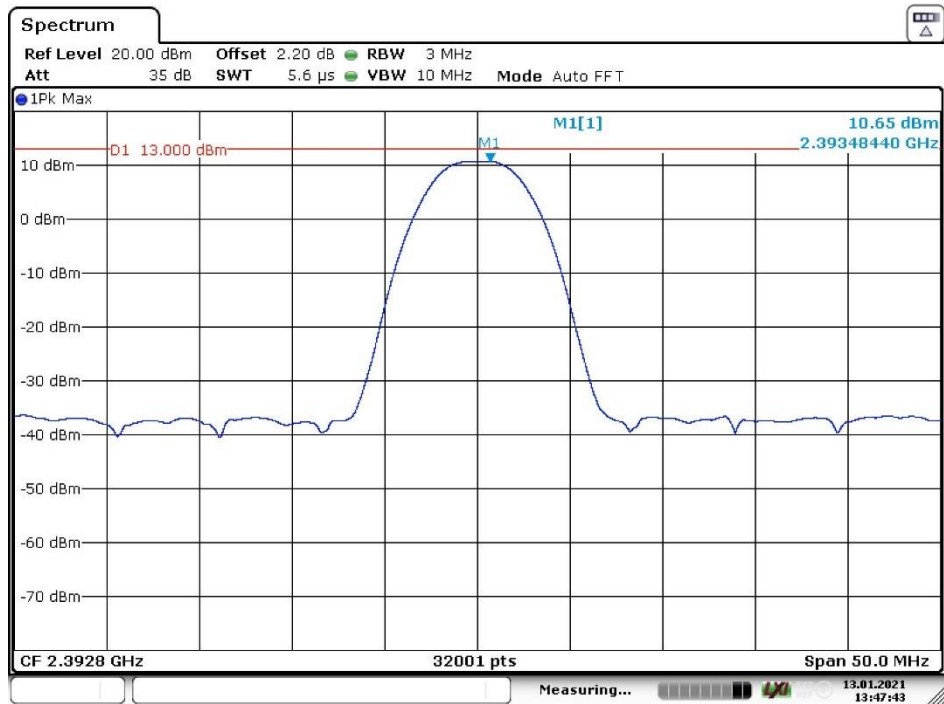


**Figure 1: Radiated Power, LOW channel (bottom antenna)**

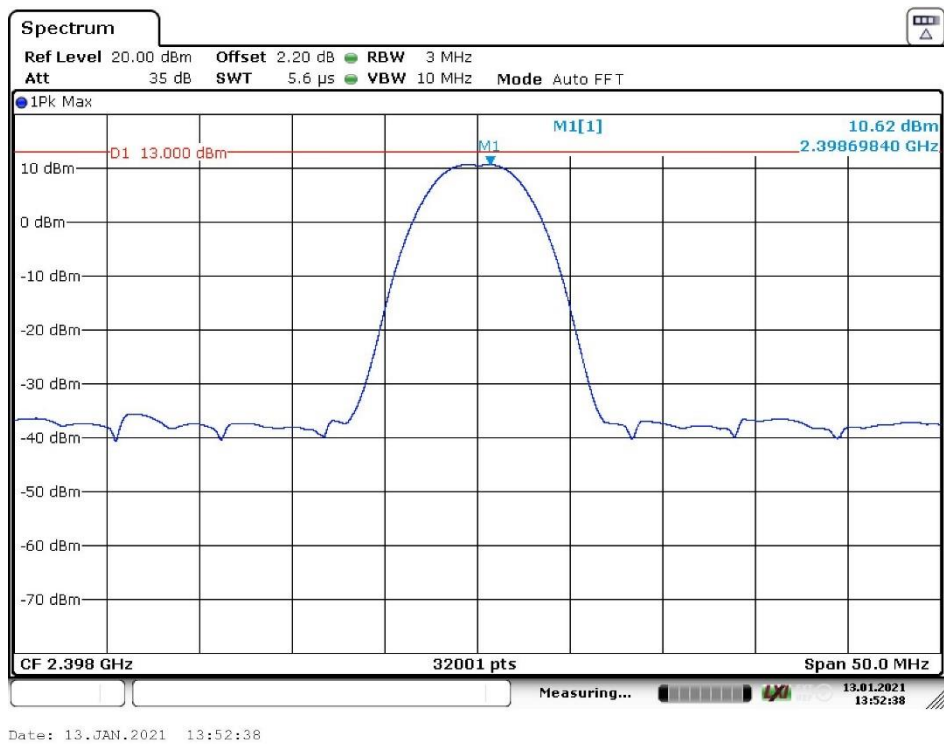


**Figure 2: Radiated Power, HIGH channel (bottom antenna)**

Note: The Offset in figures equals the antenna gain 2.2 dBi

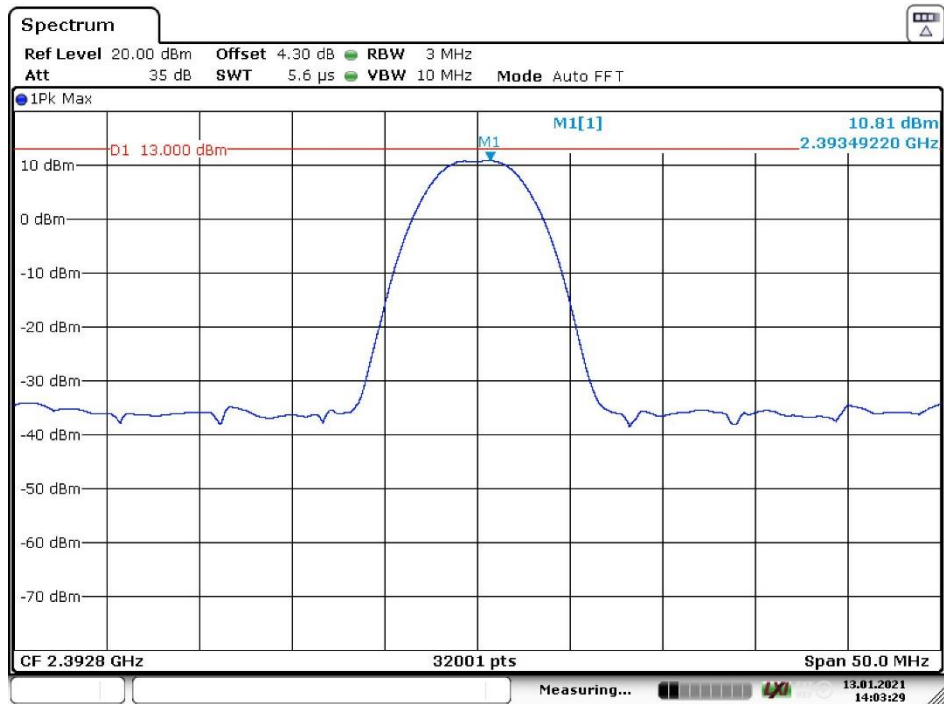

Date: 13.JAN.2021 14:03:29

**Figure 3:** Radiated Power, LOW channel (top antenna)

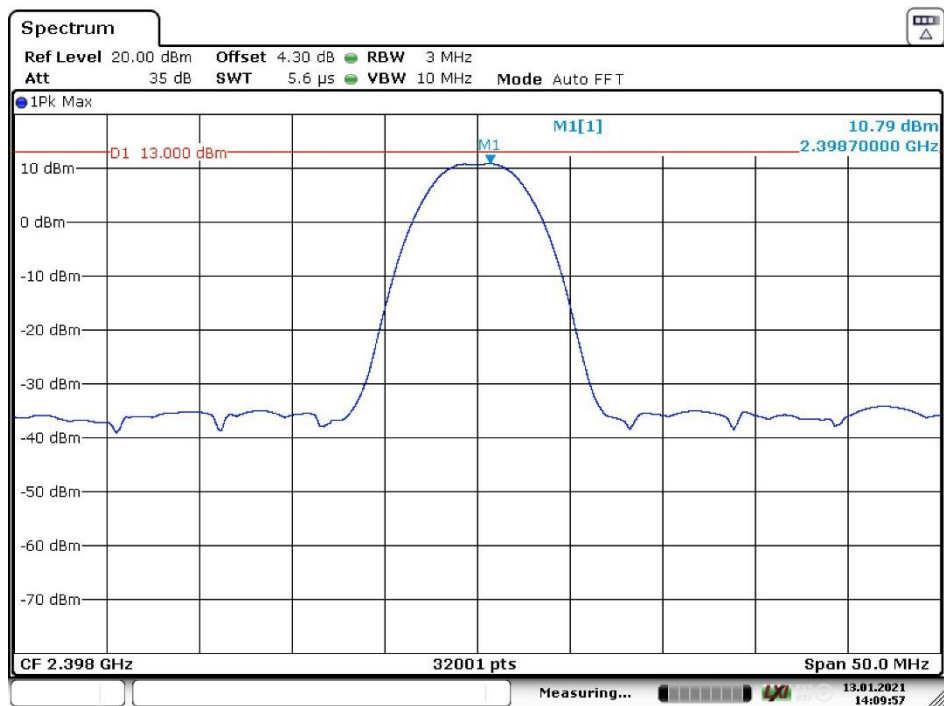

Date: 13.JAN.2021 14:09:56

**Figure 4:** Radiated Power, HIGH channel (top antenna)

Note: The Offset in figures equals the antenna gain 4.3 dBi

## Emission Bandwidth

**Standard:** ANSI C63.26-2015  
**Tested by:** HEM  
**Date:** 13 January 2021  
**Temperature:** 22.1 °C  
**Humidity:** 21.1 %RH  
**Barometric pressure:** 1005.5 mbar  
**Measurement uncertainty** 0.0005 %, level of confidence 95 % (k = 2)


### FCC Rule: §95.2573(e)

All transmissions associated with an MBAN are limited to an emission bandwidth (EBW) of less than or equal to 5 MHz, where the EBW is determined by measuring the width of the signal between points, one below the carrier center frequency and one above the carrier center frequency, that are 20 dB down relative to the maximum level of the modulated carrier.

## Results


**Table 7:** Emission Bandwidth results

Antenna	Channel	EBW [MHz]	Limit [MHz]	Result
bottom	LOW	2.40305	5.0	PASS
	HIGH	2.40274	5.0	PASS
top	LOW	2.40024	5.0	PASS
	HIGH	2.40024	5.0	PASS

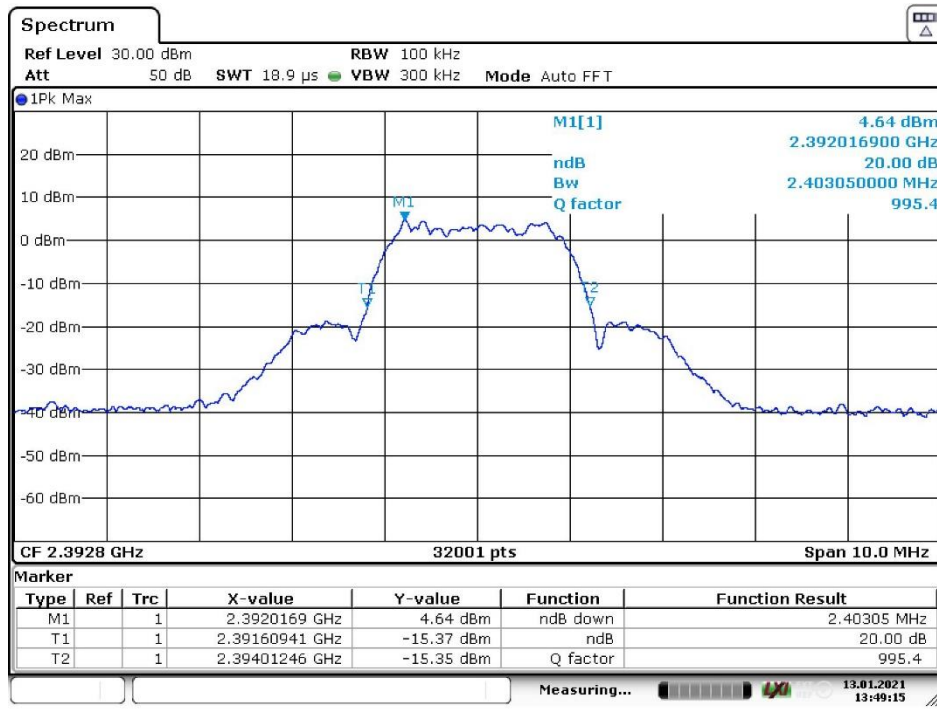


Date: 13.JAN.2021 13:49:15

Figure 5: Emission Bandwidth, LOW channel (bottom antenna)

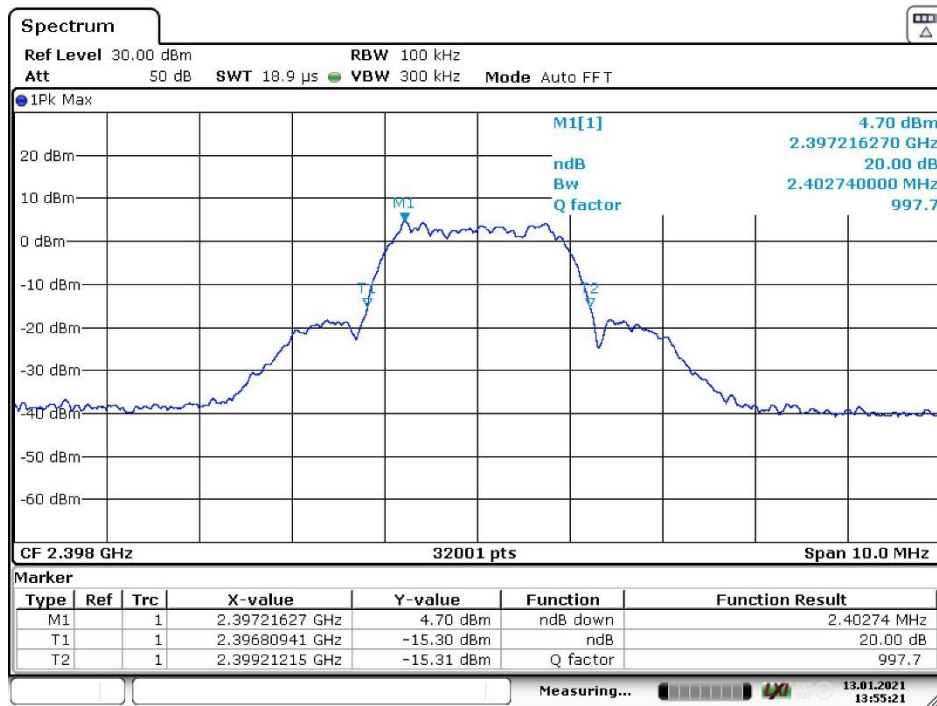


Date: 13.JAN.2021 13:55:21

Figure 6: Emission Bandwidth, HIGH channel (bottom antenna)

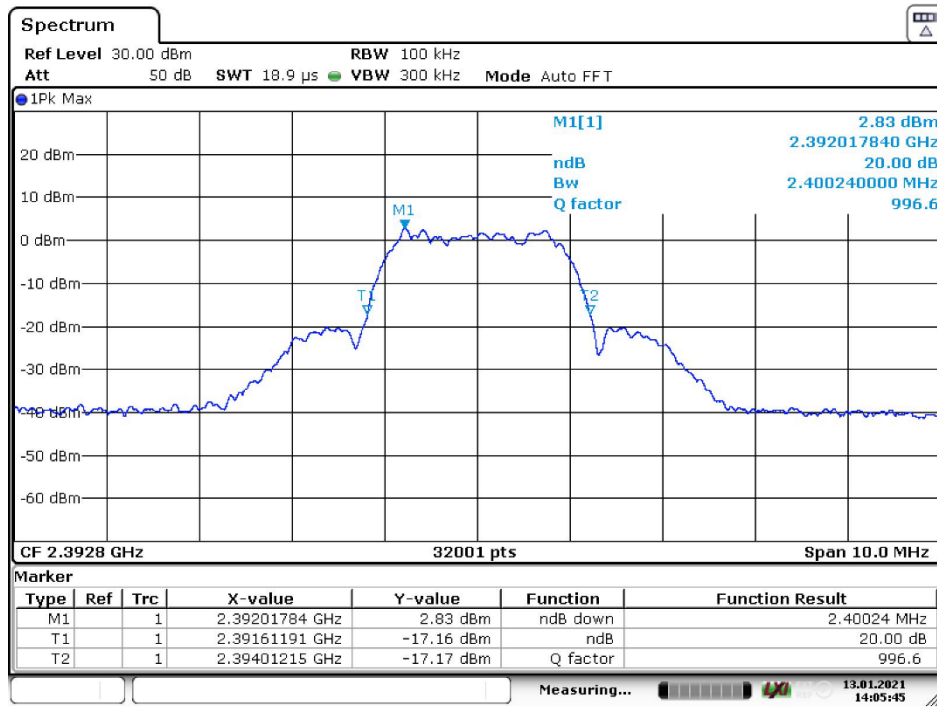

Date: 13.JAN.2021 14:05:45

Figure 7: Emission Bandwidth, LOW channel (top antenna)

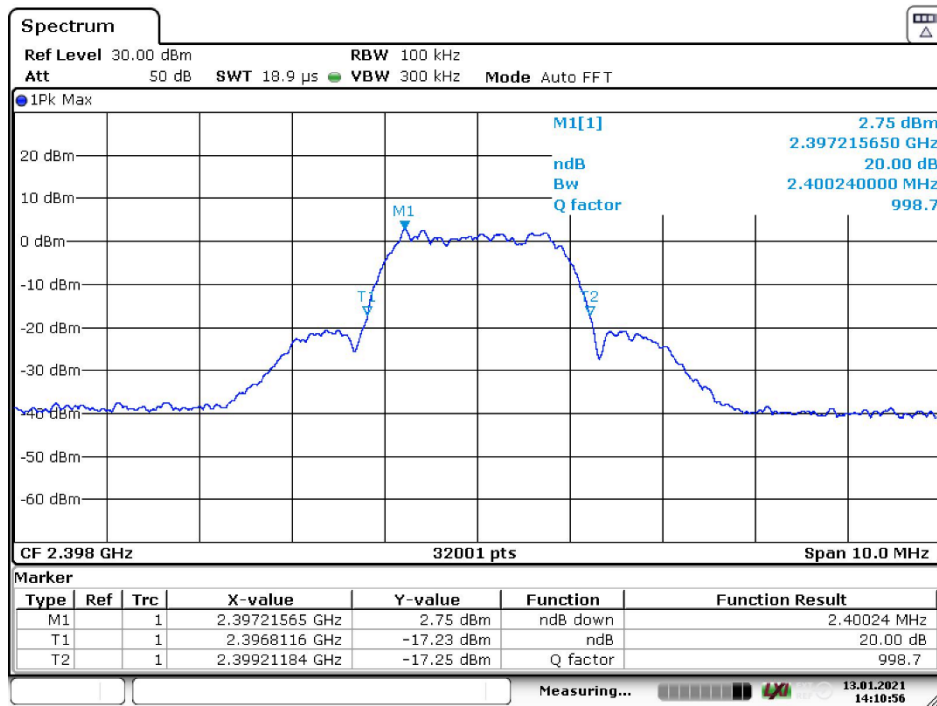

Date: 13.JAN.2021 14:10:56

Figure 8: Emission Bandwidth, HIGH channel (top antenna)

## Unwanted Emissions

<b>Standard:</b>	ANSI C63.26-2015	
<b>Tested by:</b>	HEM, PKA	HEM
<b>Date:</b>	26 January 2021	27 January 2021
<b>Temperature:</b>	23.4 °C	23.5 °C
<b>Humidity:</b>	24.2 %RH	24.6 %RH
<b>Barometric pressure:</b>	994.1 mbar	992.9 mbar
<b>Measurement uncertainty:</b>	±4.51 dB, level of confidence 95 % (k = 2)	

### FCC Rule: §95.2579(a)(5), (b)

The field strength levels associated with all MBAN emissions on frequencies beyond the first 2.5 MHz relative the edges of the 2360-2400 MHz frequency band must be less than or equal to the relevant limits when measured at a distance of 3 meters.

The measurement was performed within a semi anechoic chamber. Additional floor absorbers were placed on the floor between the EUT and receiving antenna in radiated emission test above 1 GHz. The worst interferences were determined during measurements by rotating the turntable and adjusting the antenna height. The measurements were performed with horizontal and vertical antenna polarizations.


Investigative measurements were made to determine the worst EUT orientation. The presented final results are the results in the worst orientation.

Frequency [MHz]	Limit [ $\mu\text{V/m}$ ]	Limit [dB $\mu\text{V/m}$ ]	Detector	RBW
30 - 88	100	40.0	Quasi-peak	100 kHz
88 - 216	150	43.5	Quasi-peak	100 kHz
216 - 960	200	46.0	Quasi-peak	100 kHz
960 - 1000	500	54.0	Quasi-peak	1 MHz
Above 1000	500	54.0	Average	1 MHz


The Peak values are measured for Band-Edge compliance and informative purposes. No final measurements were made below 1000 MHz with Quasi-Peak detector due to high margin to the relevant Quasi-Peak limit.




### Results LOW channel (bottom antenna)

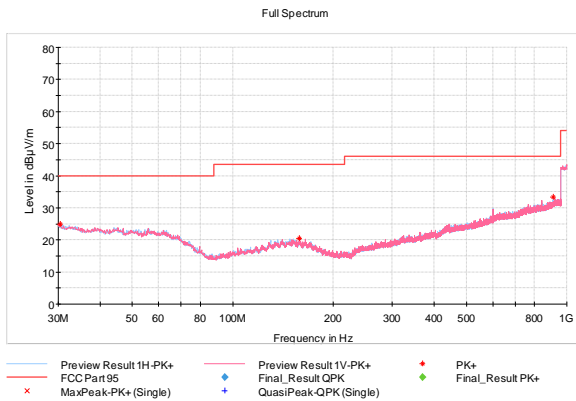


**Figure 9:** LOW channel (30 – 1000 MHz)

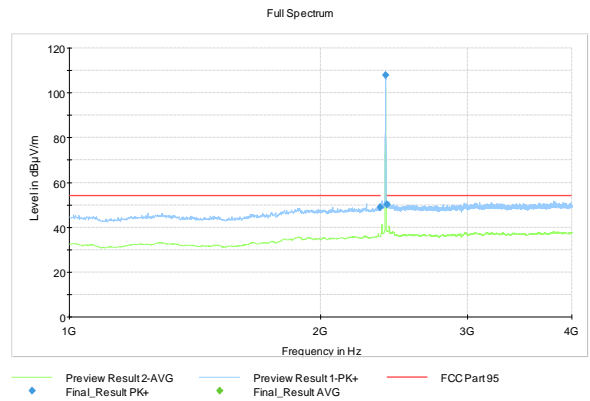

**Figure 10:** LOW channel (1 – 4 GHz)

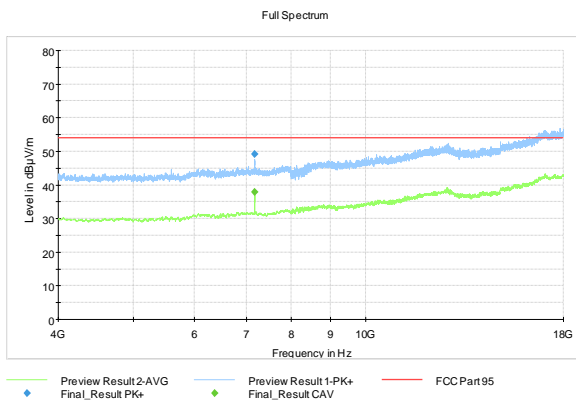

**Figure 11:** LOW channel (4 – 18 GHz)

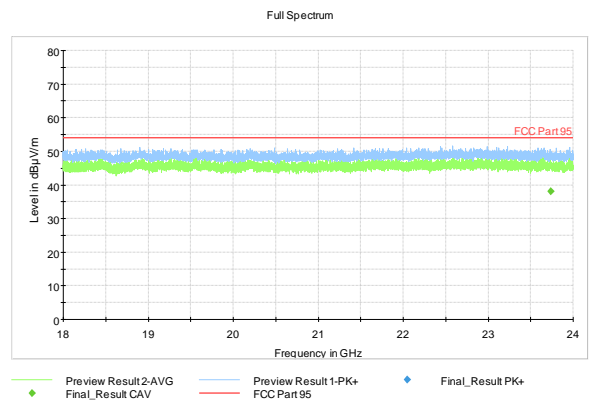

**Figure 12:** LOW channel (18 – 24 GHz)

**Table 8:** Peak results LOW channel (bottom antenna)


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.437500	24.95 *)	40.00	15.05	1000.0	100.000	100.0	V	135.0	16.8
157.937500	20.43 *)	43.50	23.07	1000.0	100.000	250.0	V	195.0	18.5
909.562500	33.34 *)	46.00	12.66	1000.0	100.000	100.0	H	45.0	31.4
2358.500000	48.98	-20 dBc	39.00	1000.0	1000.000	339.0	H	112.0	13.2
2393.450000	107.98	---	---	1000.0	1000.000	188.0	H	265.0	13.6
2400.800000	50.06	-20 dBc	37.92	1000.0	1000.000	212.0	H	331.0	13.8
7180.425000	49.08	---	---	1000.0	1000.000	137.0	H	158.0	10.5

\*) Pre-measurement result


**Table 9:** Average results LOW channel (bottom antenna)

Frequency (MHz)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7180.375000	37.93	54.00	16.07	1000.0	1000.000	126.0	H	153.0	10.5
23733.600000	38.10	54.00	15.90	1000.0	1000.000	139.0	H	140.0	5.0


### Results HIGH channel (bottom antenna)

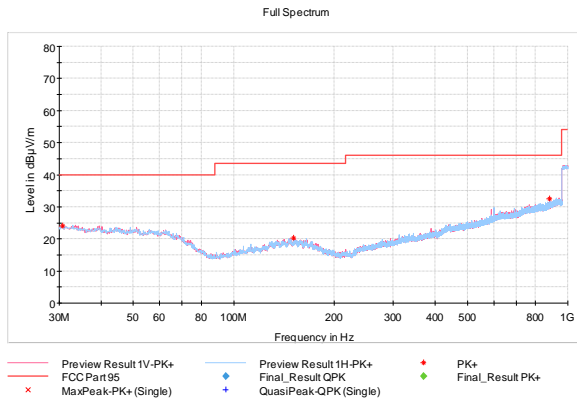


**Figure 13:** HIGH channel (30 – 1000 MHz)

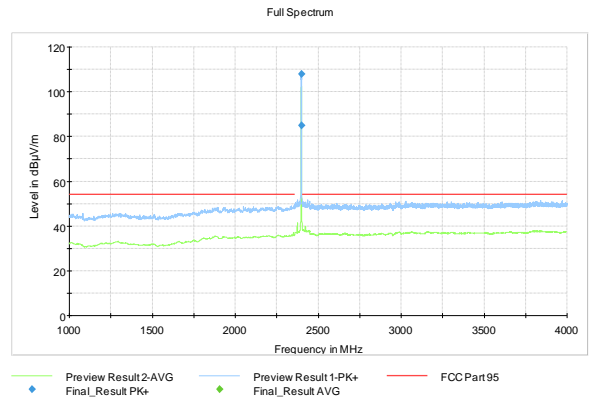

**Figure 14:** HIGH channel (1 – 4 GHz)

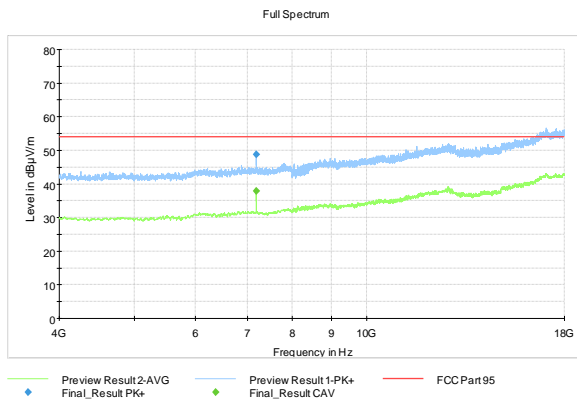

**Figure 15:** HIGH channel (4 – 18 GHz)

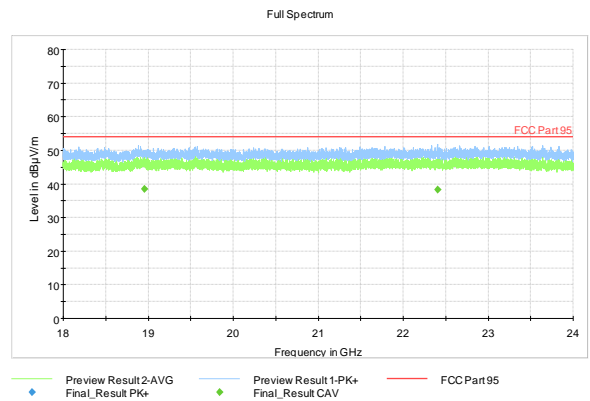

**Figure 16:** HIGH channel (18 – 24 GHz)

**Table 10:** Peak results HIGH channel (bottom antenna)


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.687500	24.11	40.00 *)	15.89	1000.0	100.000	250.0	V	315.0	16.8
151.187500	20.24	43.50 *)	23.26	1000.0	100.000	100.0	V	75.0	18.6
881.562500	32.44	46.00 *)	13.56	1000.0	100.000	100.0	H	165.0	31.0
2398.700000	107.78	---	---	1000.0	1000.000	148.0	H	257.0	13.8
2400.000000	85.03	-20 dBc	2.75	1000.0	1000.000	191.0	H	262.0	13.8
7191.825000	48.80	---	---	1000.0	1000.000	126.0	V	31.0	10.6

\*) Pre-measurement result


**Table 11:** Average results HIGH channel (bottom antenna)

Frequency (MHz)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7195.975000	37.80	54.00	16.20	1000.0	1000.000	127.0	H	151.0	10.7
18955.200000	38.47	54.00	15.53	1000.0	1000.000	176.0	H	285.0	7.5
22404.600000	38.28	54.00	15.72	1000.0	1000.000	162.0	H	0.0	8.7


### Results LOW channel (top antenna)

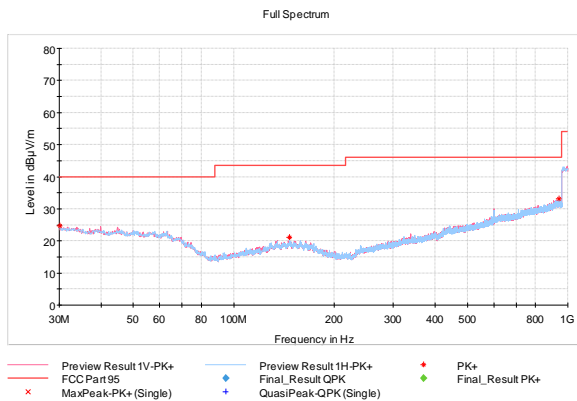


**Figure 17: LOW channel (30 – 1000 MHz)**

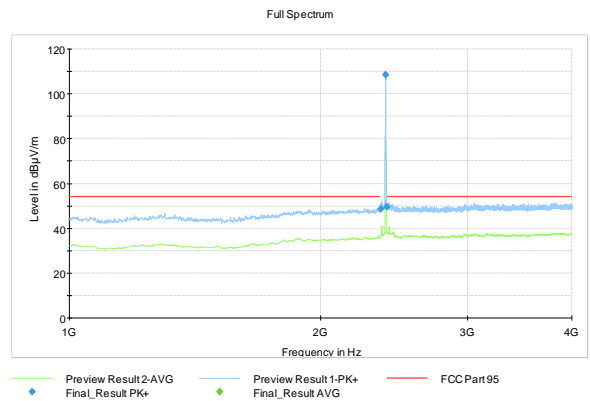

**Figure 18: LOW channel (1 – 4 GHz)**

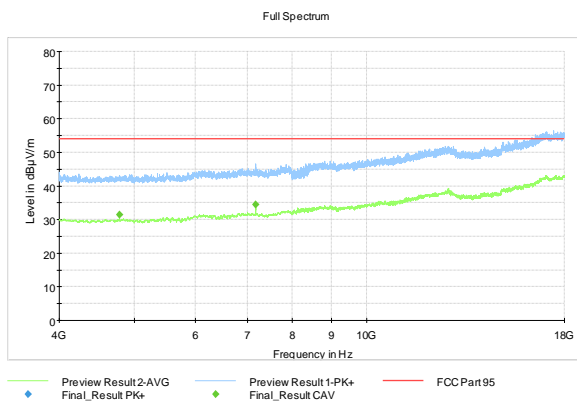

**Figure 19: LOW channel (4 – 18 GHz)**

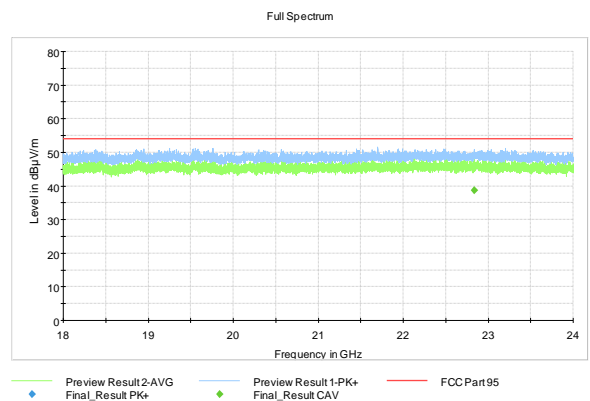

**Figure 20: LOW channel (18 – 24 GHz)**

**Table 12: Peak results LOW channel (top antenna)**


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.187500	24.69	40.00 *)	15.31	1000.0	100.000	100.0	H	255.0	16.8
146.812500	21.12	43.50 *)	22.38	1000.0	100.000	100.0	H	165.0	18.4
941.312500	33.05	46.00 *)	12.95	1000.0	100.000	100.0	V	345.0	31.9
2360.000000	48.57	-20 dBc	39.93	1000.0	1000.000	112.0	V	27.0	13.2
2393.450000	108.50	---	---	1000.0	1000.000	188.0	H	75.0	13.6
2402.000000	49.58	-20 dBc	38.92	1000.0	1000.000	287.0	H	235.0	13.8

\*) Pre-measurement result


**Table 13: Average results LOW channel (top antenna)**

Frequency (MHz)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4784.425000	31.53	54.00	22.47	1000.0	1000.000	105.0	H	0.0	7.4
7180.425000	34.41	54.00	19.59	1000.0	1000.000	142.0	H	0.0	10.5
22840.000000	38.65	54.00	15.35	1000.0	1000.000	171.0	H	40.0	7.9


### Results HIGH channel (top antenna)

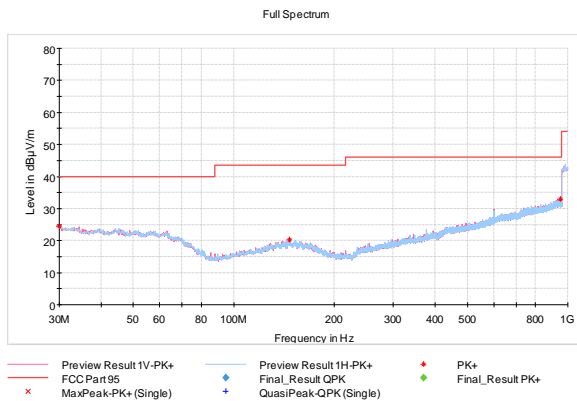


**Figure 21:** HIGH channel (30 – 1000 MHz)

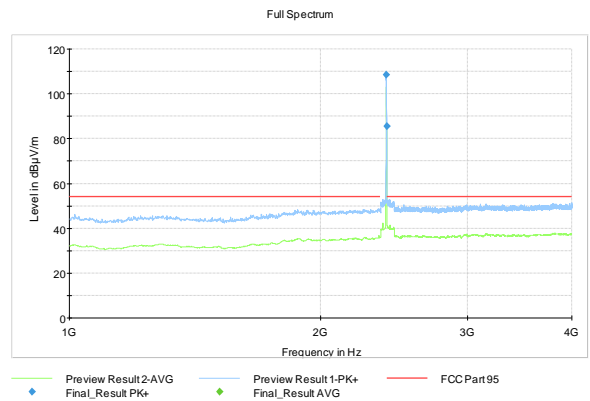

**Figure 22:** HIGH channel (1 – 4 GHz)

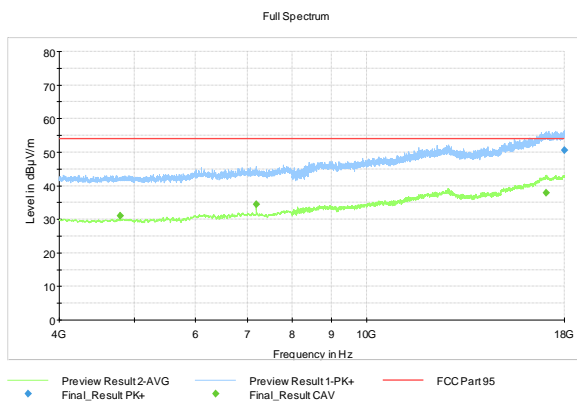

**Figure 23:** HIGH channel (4 – 18 GHz)

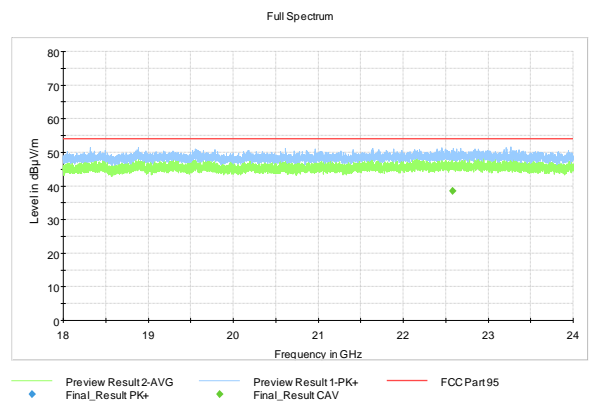

**Figure 24:** HIGH channel (18 – 24 GHz)

**Table 14:** Peak results HIGH channel (top antenna)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.000000	24.48	40.00 *)	15.52	1000.0	100.000	250.0	V	315.0	16.9
147.062500	20.20	43.50 *)	23.30	1000.0	100.000	250.0	H	285.0	18.5
950.687500	32.90	46.00 *)	13.10	1000.0	100.000	250.0	V	75.0	31.9
2398.700000	108.43	---	---	1000.0	1000.000	148.0	H	71.0	13.8
2400.000000	85.46	-20 dBc	2.97	1000.0	1000.000	191.0	H	73.0	13.8
17991.275000	50.60	---	---	1000.0	1000.000	199.0	V	45.0	24.6

\*) Pre-measurement result

**Table 15:** Average results HIGH channel (top antenna)

Frequency (MHz)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4797.225000	31.09	54.00	22.91	1000.0	1000.000	105.0	H	0.0	7.6
7191.975000	34.43	54.00	19.57	1000.0	1000.000	126.0	H	329.0	10.6
17057.675000	37.79	54.00	16.21	1000.0	1000.000	131.0	H	218.0	24.2
22579.400000	38.53	54.00	15.47	1000.0	1000.000	211.0	V	218.0	8.6

**Band-Edge Measurement**

<b>Standard:</b>	ANSI C63.26-2015		
<b>Tested by:</b>	HEM	HEM, PKA	HEM
<b>Date:</b>	13 January 2021	26 January 2021	27 January 2021
<b>Temperature:</b>	22.1 °C	23.5 °C	23.4 °C
<b>Humidity:</b>	21.1 %RH	24.6 %RH	20.4 %RH
<b>Barometric pressure:</b>	1005.5 mbar	994.1 mbar	992.9 mbar
<b>Measurement uncertainty:</b>	conducted:	±2.90 dB, level of confidence 95 % (k = 2)	
	radiated:	±4.51 dB, level of confidence 95 % (k = 2)	

**FCC Rule: §95.2579 (f)**

The EIRP levels (expressed within a 1 MHz bandwidth) associated with all MBAN emissions on frequencies within the first 2.5 MHz relative to the edges of the 2360-2400 MHz frequency band must be attenuated by at least 20 dB relative to the maximum EIRP level (within any 1 MHz) of the fundamental-frequency emission (i.e., 20 dBc).

Both conducted and radiated measurements were performed. During conducted measurements the upper band-edge was measured using a resolution bandwidth narrower than the specified 1 MHz, and the integration was performed over the 1 MHz bandwidth.

### Conducted results (bottom antenna)

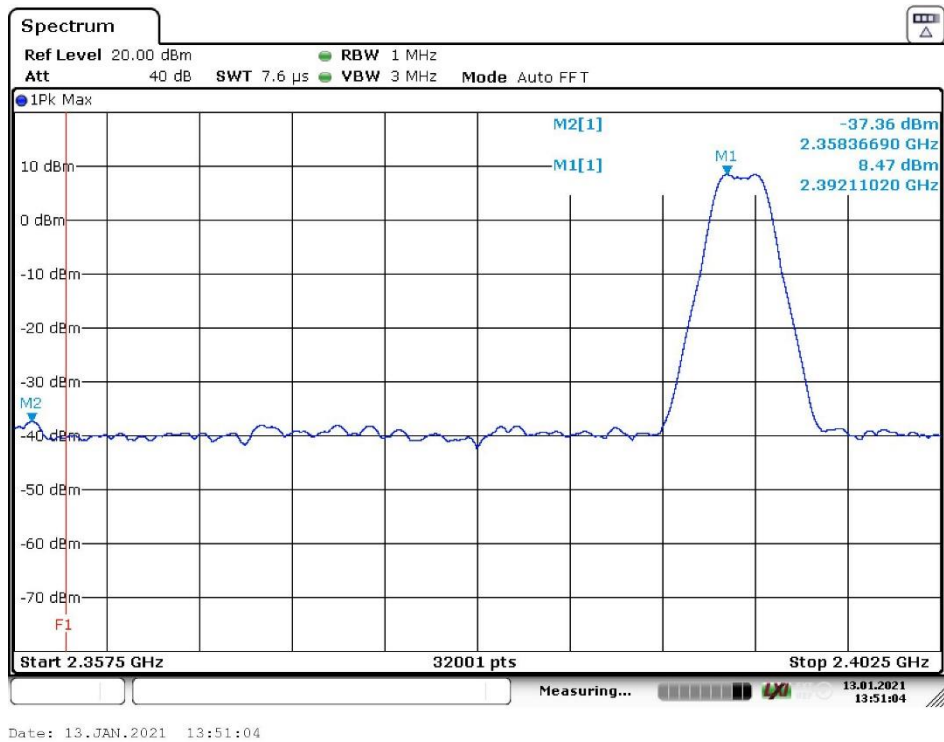


Figure 25: Lower band-edge (bottom antenna)

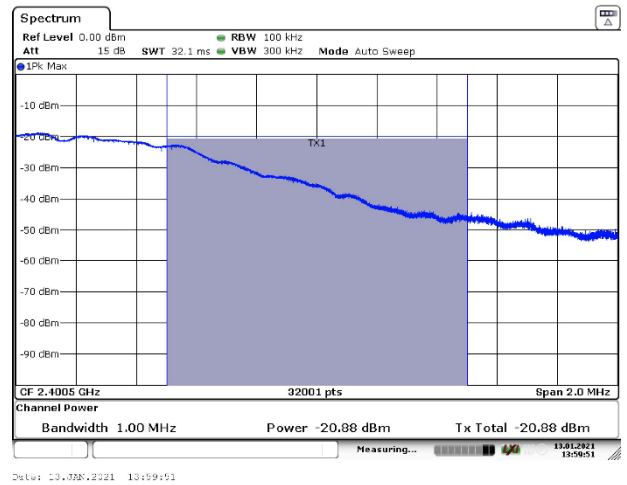
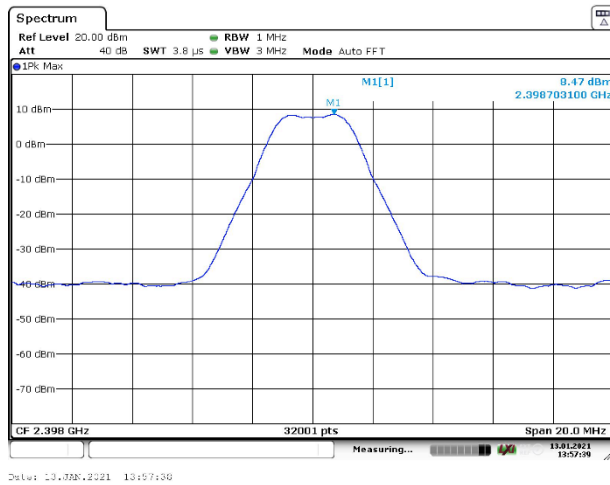


Figure 26: Upper band-edge (bottom antenna)

Table 16: Conducted lower and upper band-edge results (bottom antenna)

Frequency [MHz]	Measured [dBm]	EIRP *) [dBm]	Limit	Margin [dB]
2358.36690	-37.36	---	-9.33	28.03
2392.11020	8.47	10.67	---	---
2398.70310	8.47	10.67	---	---
2400.50000	-20.88	-18.68	-9.33	9.35

\*) Antenna gain 2.2 dBi

### Conducted results (top antenna)

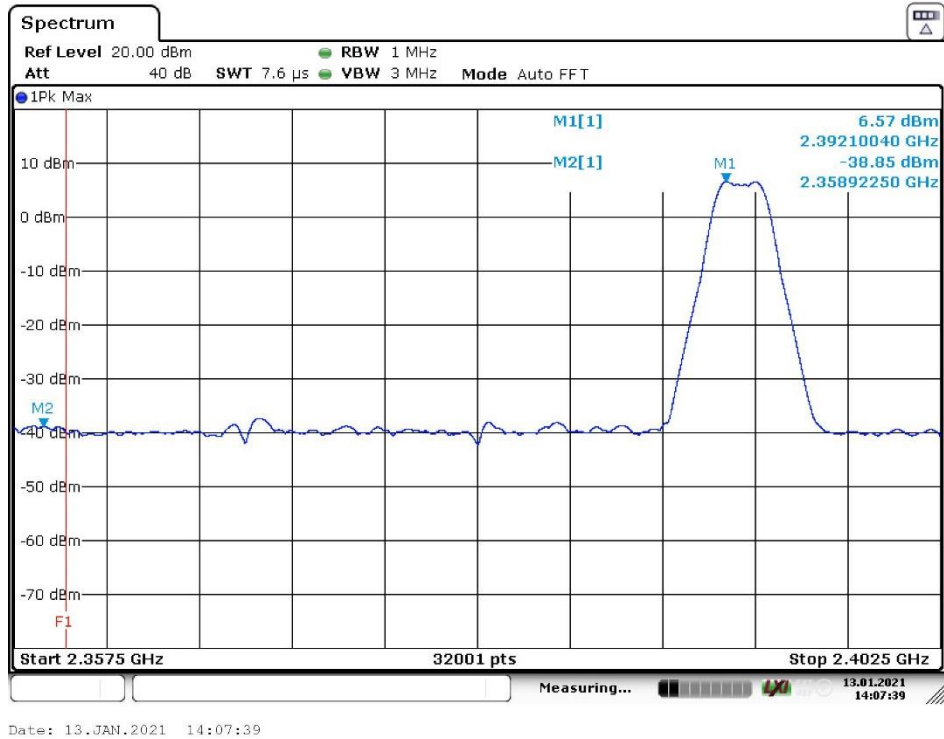


Figure 27: Lower band-edge (top antenna)




Figure 28: Upper band-edge (top antenna)

Table 17: Conducted lower and upper band-edge results (top antenna)


Frequency [MHz]	Measured [dBm]	EIRP *) [dBm]	Limit	Margin [dB]
2358.92250	-38.85	---	-9.13	29.72
2392.10040	6.57	10.87	---	---
2398.70560	6.58	10.88	---	---
2400.50000	-23.03	-18.73	-9.12	9.61

\*) Antenna gain 4.3 dBi

### Radiated results (bottom antenna)

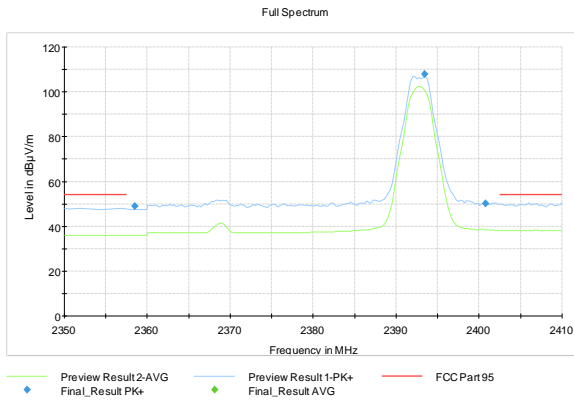

**Figure 29:** Lower band-edge (bottom antenna)

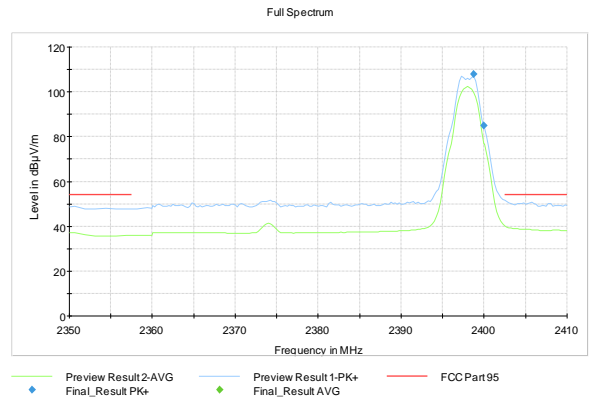

**Figure 30:** Upper band-edge (bottom antenna)

**Table 18:** Radiated lower and upper band-edge results (bottom antenna)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.500000	48.98	87.98 *)	39.00	1000.0	1000.000	339.0	H	112.0	13.2
2393.450000	107.98	---	---	1000.0	1000.000	188.0	H	265.0	13.6
2400.800000	50.06	87.98 *)	37.92	1000.0	1000.000	212.0	H	331.0	13.8
2398.700000	107.78	---	---	1000.0	1000.000	148.0	H	257.0	13.8
2400.000000	85.03	87.78 *)	2.75	1000.0	1000.000	191.0	H	262.0	13.8

\*) -20 dBc



### Radiated results (top antenna)

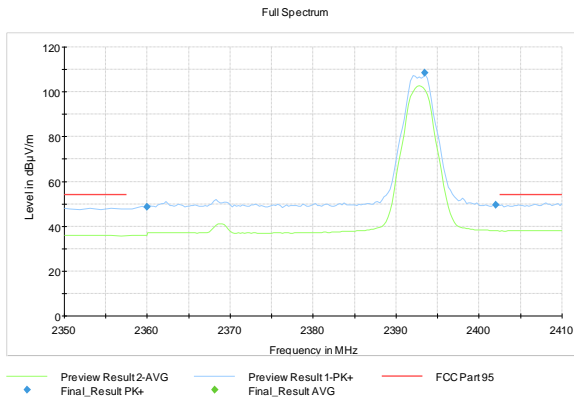


Figure 31: Lower band-edge (top antenna)



Figure 32: Upper band-edge (top antenna)

Table 19: Radiated lower and upper band-edge results (top antenna)

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2360.00000	48.57	88.50 *)	39.93	1000.0	1000.000	112.0	V	27.0	13.2
2393.45000	108.50	---	---	1000.0	1000.000	188.0	H	75.0	13.6
2402.00000	49.58	88.50 *)	38.92	1000.0	1000.000	287.0	H	235.0	13.8
2398.70000	108.43	---	---	1000.0	1000.000	148.0	H	71.0	13.8
2400.00000	85.46	88.43 *)	2.97	1000.0	1000.000	191.0	H	73.0	13.8

\*) -20 dBc

**TEST EQUIPMENT**

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
ANTENNA	EMCO	3160-09, emi 18-26.5GHz	inv. 7294	2020-02-20	2021-02-20
ANTENNA	EMCO	3117, emi 1-18GHz	inv. 7293	2020-03-11	2022-03-11
ANTENNA	SCHWARZBECK	VULB 9168	inv. 8911	2020-11-04	2022-11-04
ANTENNA MAST	MATURO	TAM 4.0E	inv. 10181	NCR	NCR
ATTENUATOR	PASTERNAK	10 dB, DC-40 GHz	sn:A1	2019-04-01	2021-04-01
ATTENUATOR	PASTERNAK	PE 7004-4 (4dB)	inv. 10126	2019-04-01	2021-04-01
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW26	inv. 10679	2020-07-20	2021-07-20
FILTER	WAINWRIGHT	HP, WHKX4.0/18G-10SS	inv:10403	2019-04-01	2021-04-01
MAST & TURNTABLE CONTROLLER	MATURO	NCD	inv. 10183	NCR	NCR
RF PREAMPLIFIER	CIAO	CA118-3123	inv. 10278	2020-10-09	2021-10-09
RF PREAMPLIFIER	CIAO	CA1840-5019	inv. 10593	2020-10-09	2021-10-09
SPECTRUM ANALYZER	ROHDE & SCHWARZ	FSV40	inv:10881	2020-06-10	2021-09-06
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
TURNTABLE	MATURO	DS430 UPGRADED	inv. 10182	NCR	NCR

NCR = No calibration required

**END OF REPORT**