

30MHz - 1GHz

H6-PNCA-P:


Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz



No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		48.5354	26.90	-15.76	11.14	40.00	-28.86	QP
2		104.8662	28.26	-18.01	10.25	43.50	-33.25	QP
3		209.6802	29.21	-17.58	11.63	43.50	-31.87	QP
4		265.5824	29.55	-15.45	14.10	46.00	-31.90	QP
5		405.6610	32.32	-10.84	21.48	46.00	-24.52	QP
6	*	677.3422	32.61	-7.25	25.36	46.00	-20.64	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

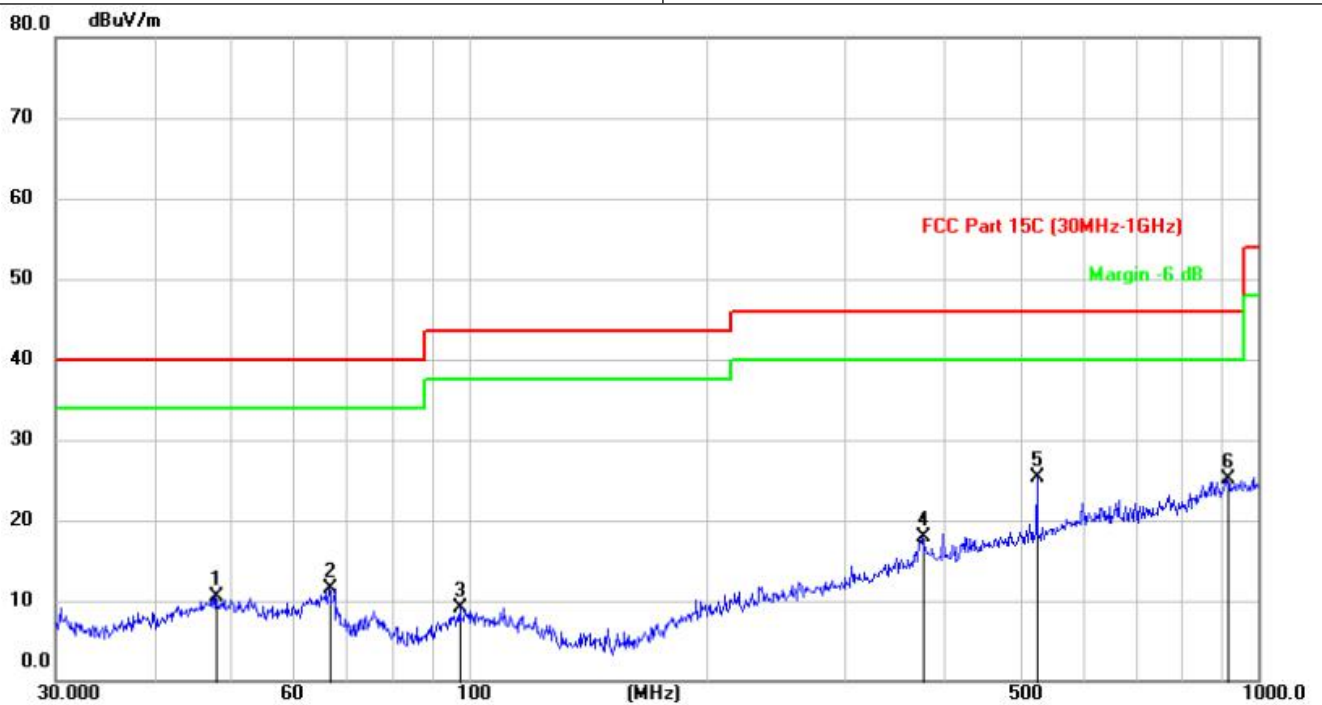


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		47.9771	26.26	-15.80	10.46	40.00	-29.54	QP
2		66.5687	30.53	-18.99	11.54	40.00	-28.46	QP
3		97.6954	27.08	-18.02	9.06	43.50	-34.44	QP
4		376.3342	29.50	-11.67	17.83	46.00	-28.17	QP
5	*	525.8432	34.71	-9.40	25.31	46.00	-20.69	QP
6		914.4637	29.16	-4.07	25.09	46.00	-20.91	QP

Emission Level= Read Level+ Correct Factor

H6-PNCNX-P:


Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

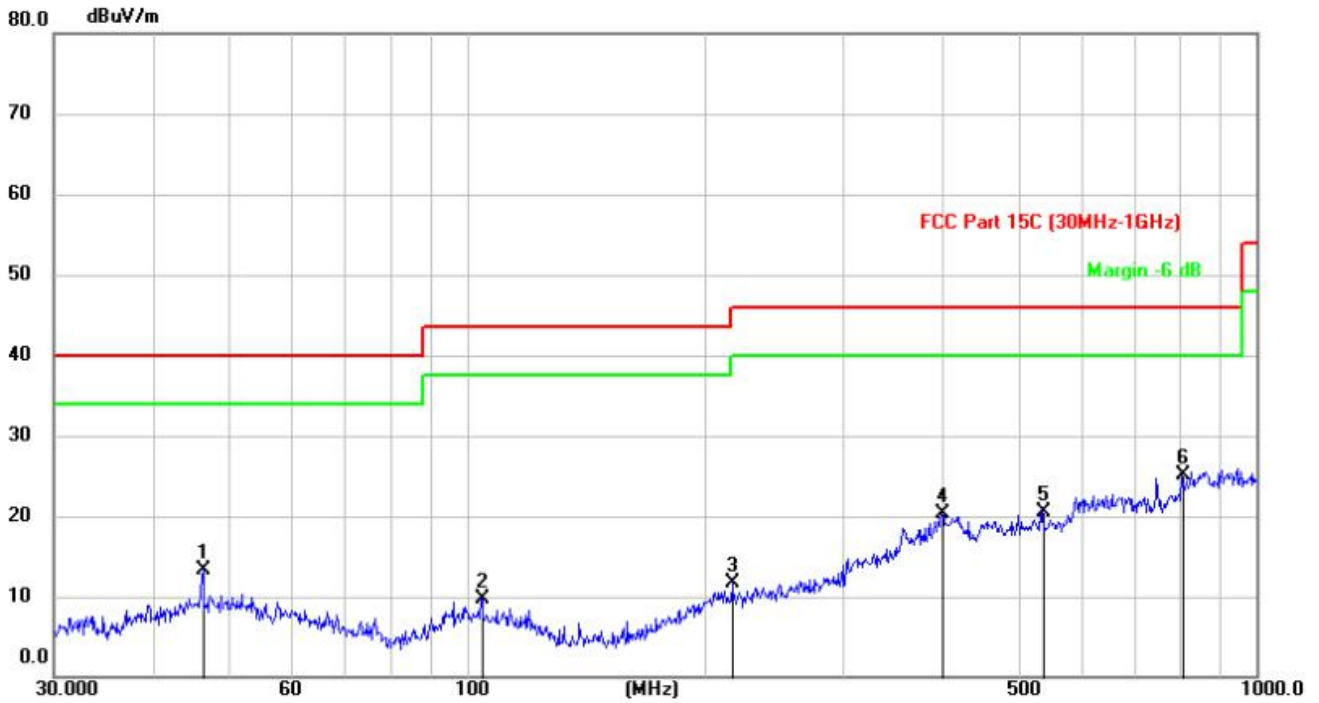

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		46.3889	29.30	-15.95	13.35	40.00	-26.65	QP
2		104.3893	27.75	-17.97	9.78	43.50	-33.72	QP
3		216.9346	29.04	-17.24	11.80	46.00	-34.20	QP
4		400.0108	31.27	-10.91	20.36	46.00	-25.64	QP
5		537.0238	29.73	-9.16	20.57	46.00	-25.43	QP
6	*	806.8630	31.22	-6.10	25.12	46.00	-20.88	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

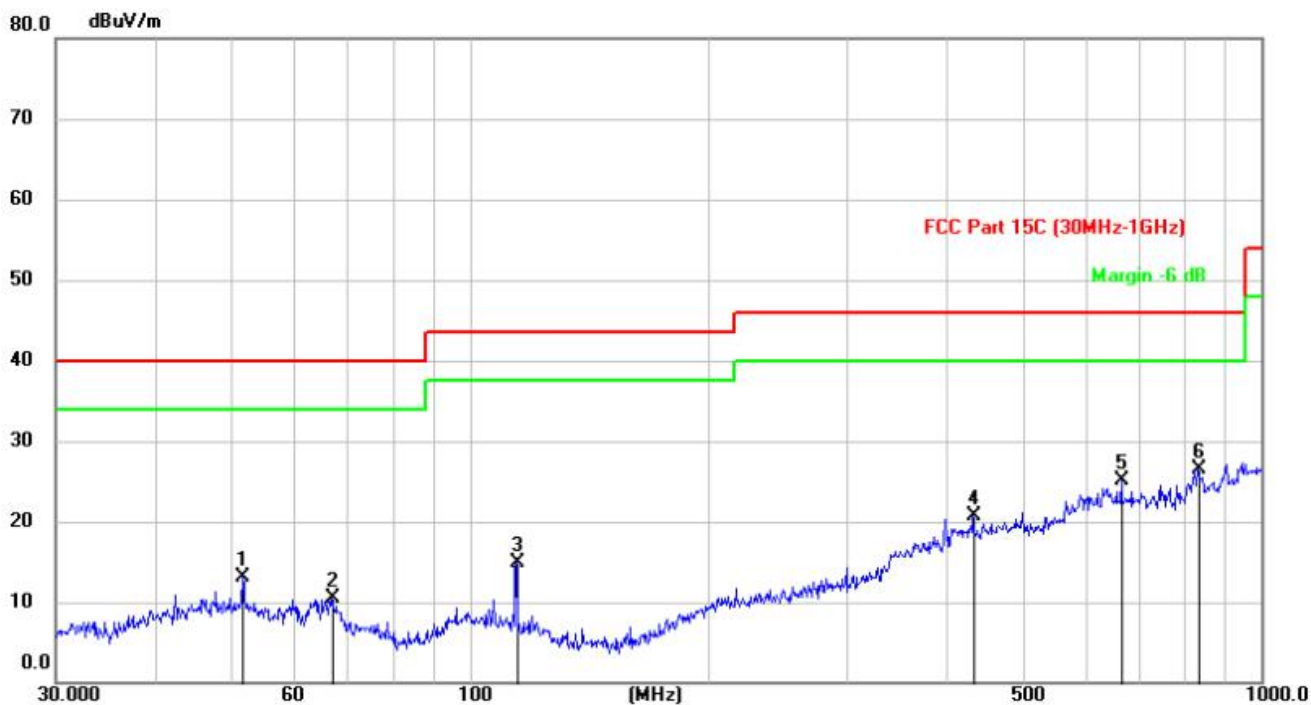


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		51.6613	29.02	-15.99	13.03	40.00	-26.97	QP
2		67.1786	29.52	-19.11	10.41	40.00	-29.59	QP
3		114.5948	33.84	-18.91	14.93	43.50	-28.57	QP
4		433.3047	31.30	-10.51	20.79	46.00	-25.21	QP
5		666.7380	32.39	-7.29	25.10	46.00	-20.90	QP
6	*	832.4409	32.07	-5.58	26.49	46.00	-19.51	QP

Emission Level= Read Level+ Correct Factor

H6-PNCN-P: .


Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

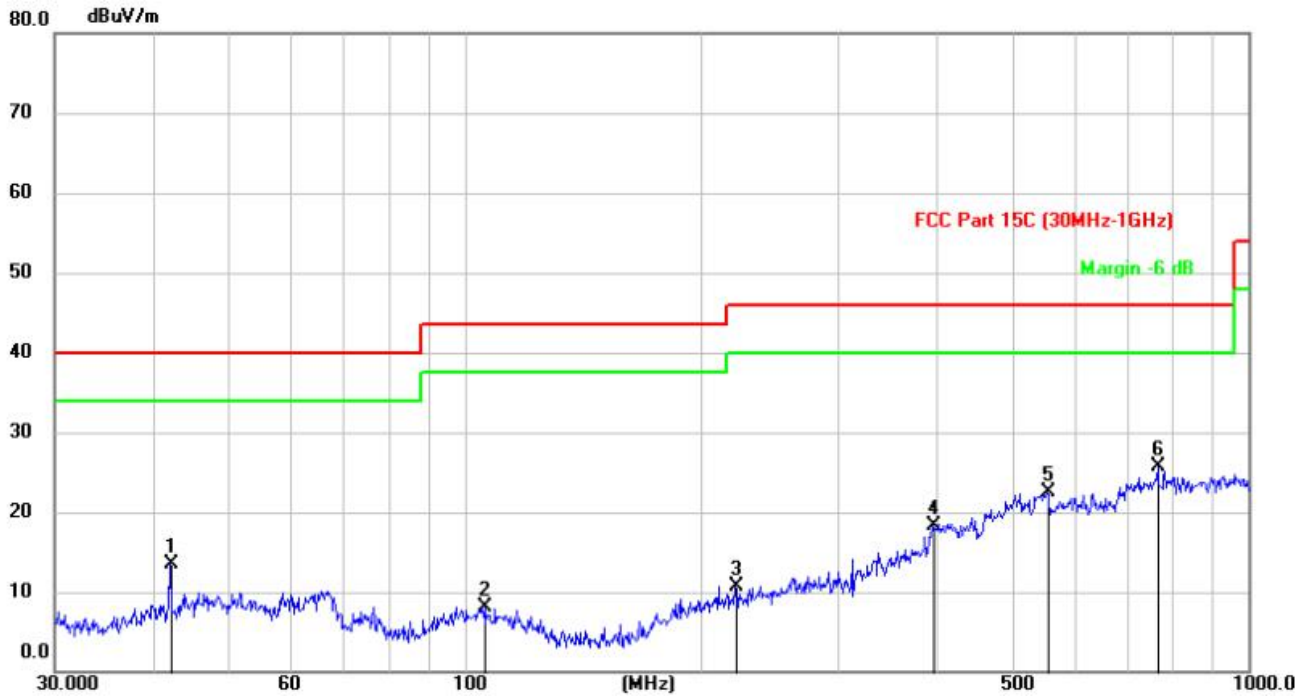

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		42.2132	30.08	-16.66	13.42	40.00	-26.58	QP
2		106.0870	26.21	-18.10	8.11	43.50	-35.39	QP
3		221.6251	27.82	-17.03	10.79	46.00	-35.21	QP
4		395.2701	29.28	-11.06	18.22	46.00	-27.78	QP
5		554.6308	31.36	-8.79	22.57	46.00	-23.43	QP
6	*	766.8635	32.08	-6.44	25.64	46.00	-20.36	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

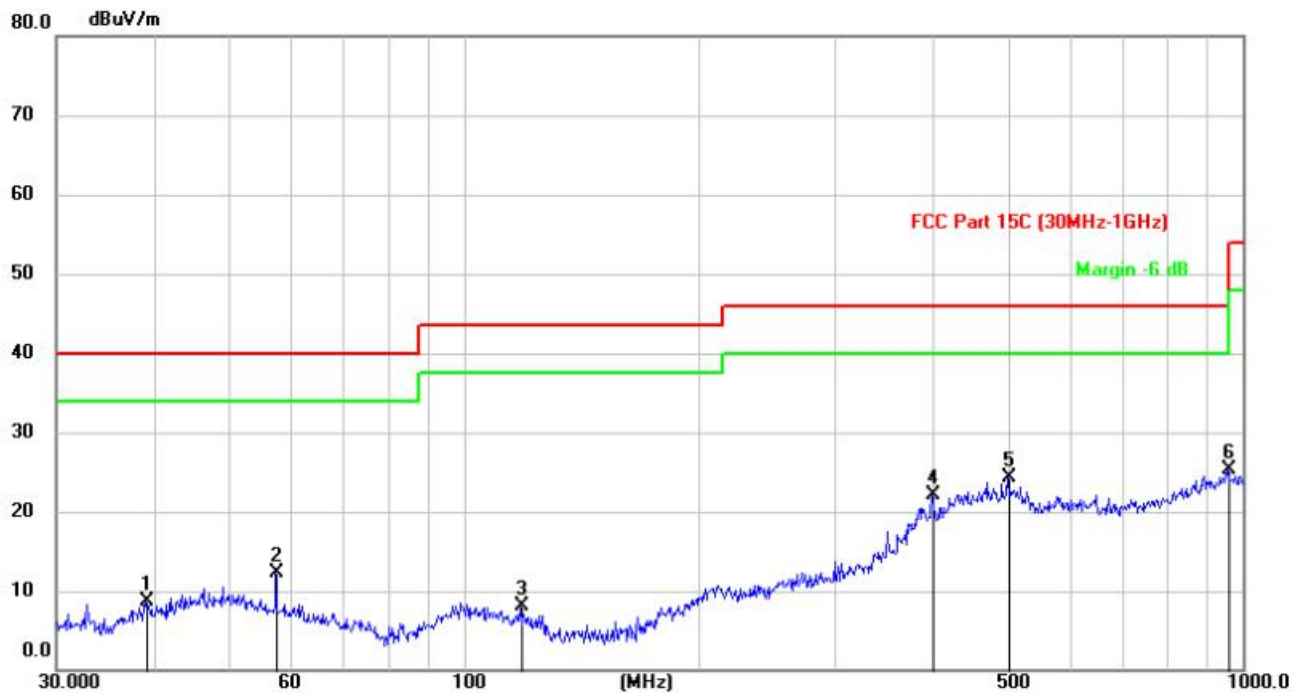


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		39.1066	26.21	-17.42	8.79	40.00	-31.21	QP
2		57.4324	29.48	-17.11	12.37	40.00	-27.63	QP
3		118.4351	27.31	-19.21	8.10	43.50	-35.40	QP
4		400.0108	32.99	-10.91	22.08	46.00	-23.92	QP
5		499.9503	34.20	-9.93	24.27	46.00	-21.73	QP
6	*	958.1221	29.01	-3.73	25.28	46.00	-20.72	QP

Emission Level= Read Level+ Correct Factor

H6-PNCAX:


Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

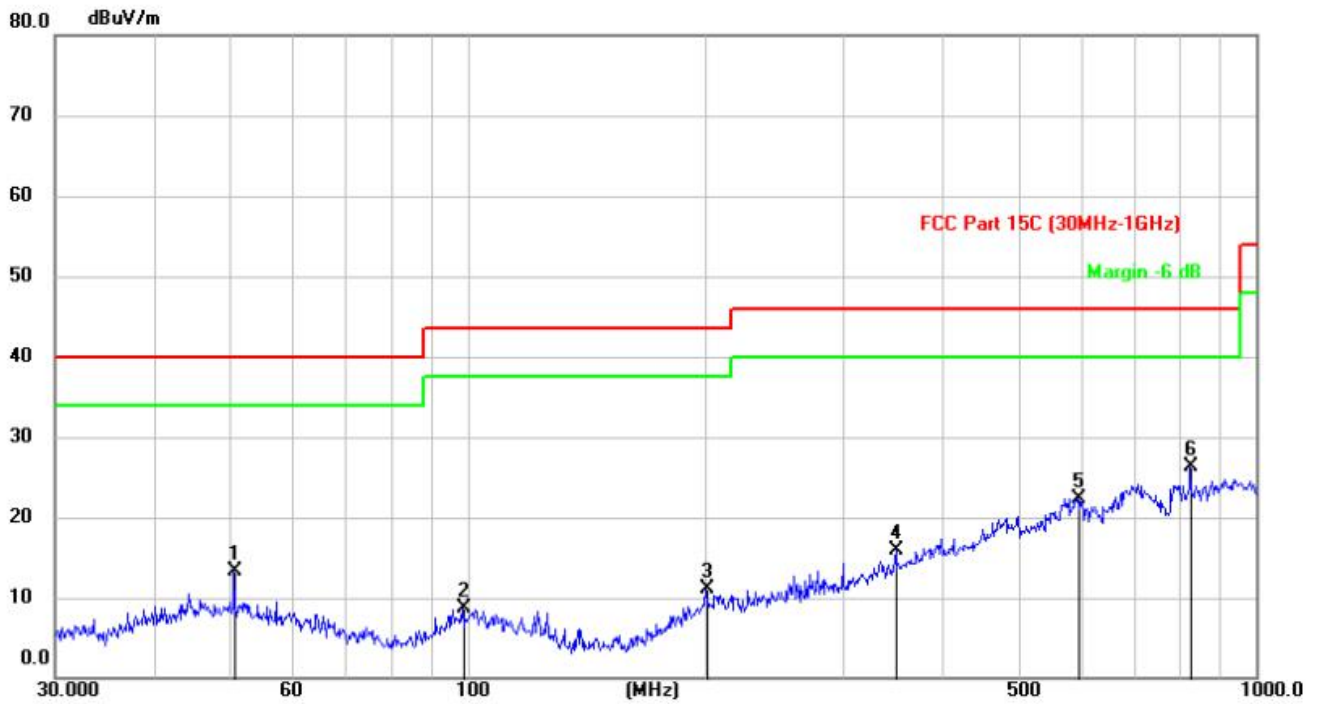

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		50.6747	29.15	-15.77	13.38	40.00	-26.62	QP
2		98.5554	26.62	-17.88	8.74	43.50	-34.76	QP
3		201.1809	29.08	-17.95	11.13	43.50	-32.37	QP
4		349.9854	28.49	-12.54	15.95	46.00	-30.05	QP
5		594.9242	30.17	-7.79	22.38	46.00	-23.62	QP
6	*	826.0438	31.99	-5.70	26.29	46.00	-19.71	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

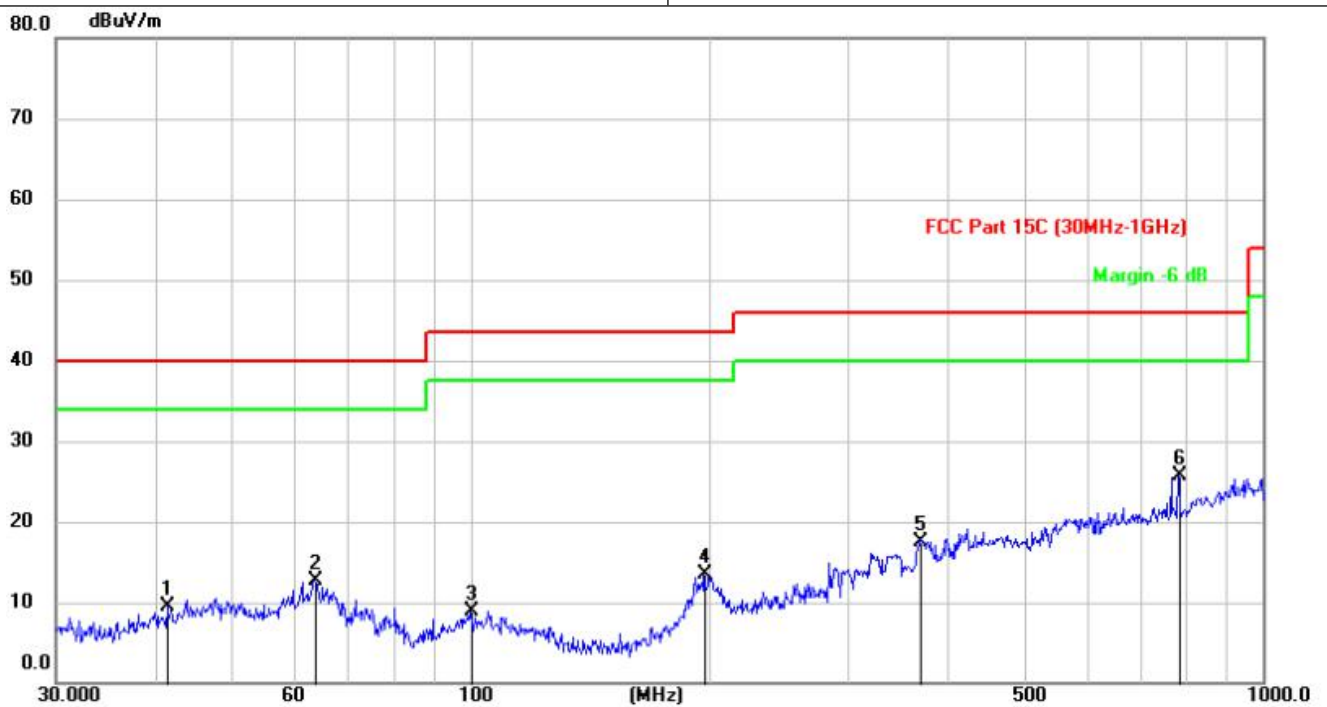


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		41.4650	26.24	-16.81	9.43	40.00	-30.57	QP
2		63.6471	31.06	-18.35	12.71	40.00	-27.29	QP
3		100.0177	26.61	-17.64	8.97	43.50	-34.53	QP
4		197.3384	31.62	-18.12	13.50	43.50	-30.00	QP
5		368.6283	29.35	-11.94	17.41	46.00	-28.59	QP
6	*	783.4433	31.97	-6.34	25.63	46.00	-20.37	QP

Emission Level= Read Level+ Correct Factor

H6-PNCA:

Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

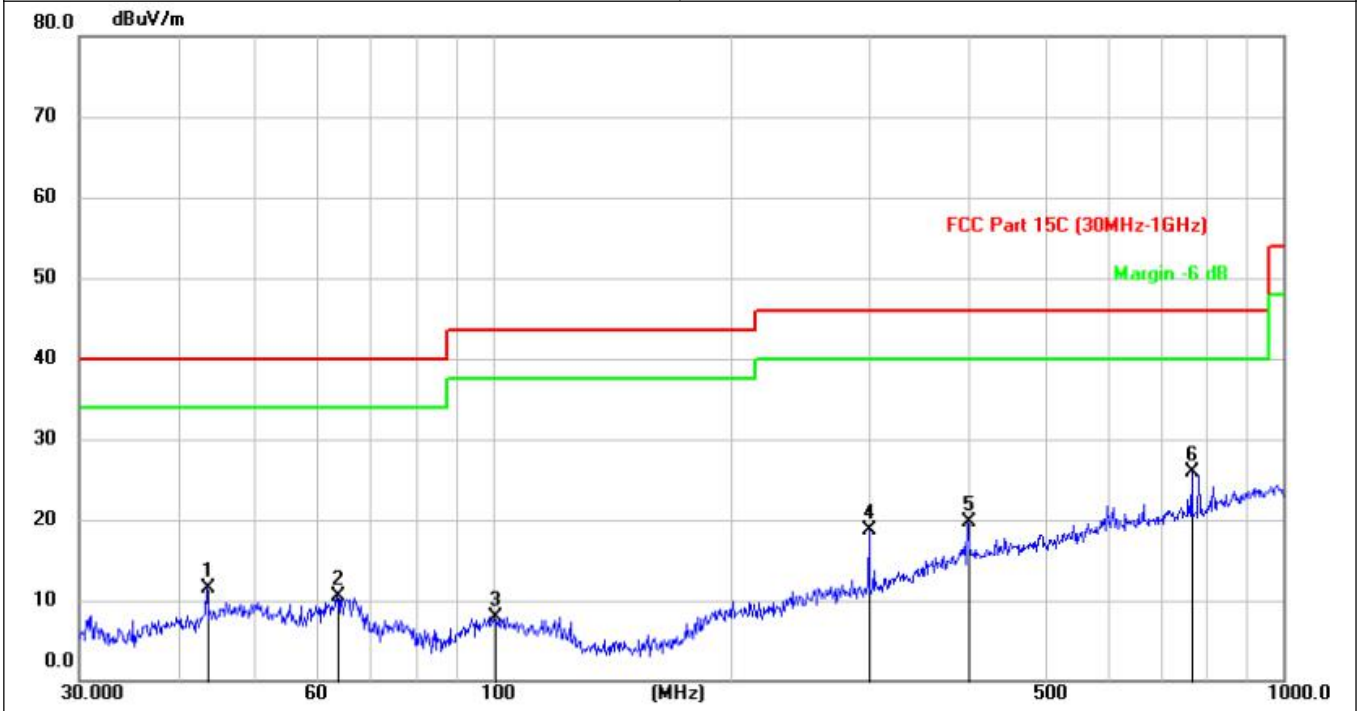

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		43.6126	27.79	-16.37	11.42	40.00	-28.58	QP
2		63.6471	28.82	-18.35	10.47	40.00	-29.53	QP
3		100.8276	25.71	-17.71	8.00	43.50	-35.50	QP
4		300.0514	33.43	-14.66	18.77	46.00	-27.23	QP
5		400.0108	30.53	-10.91	19.62	46.00	-26.38	QP
6	*	766.8635	32.30	-6.44	25.86	46.00	-20.14	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz




No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		47.5750	25.92	-15.84	10.08	40.00	-29.92	QP
2		107.8876	26.59	-18.23	8.36	43.50	-35.14	QP
3		210.5644	27.94	-17.53	10.41	43.50	-33.09	QP
4		344.0232	28.91	-12.79	16.12	46.00	-29.88	QP
5		506.6567	33.06	-9.79	23.27	46.00	-22.73	QP
6	*	804.8849	30.34	-6.14	24.20	46.00	-21.80	QP

Emission Level= Read Level+ Correct Factor

H6-PNCNX:


Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

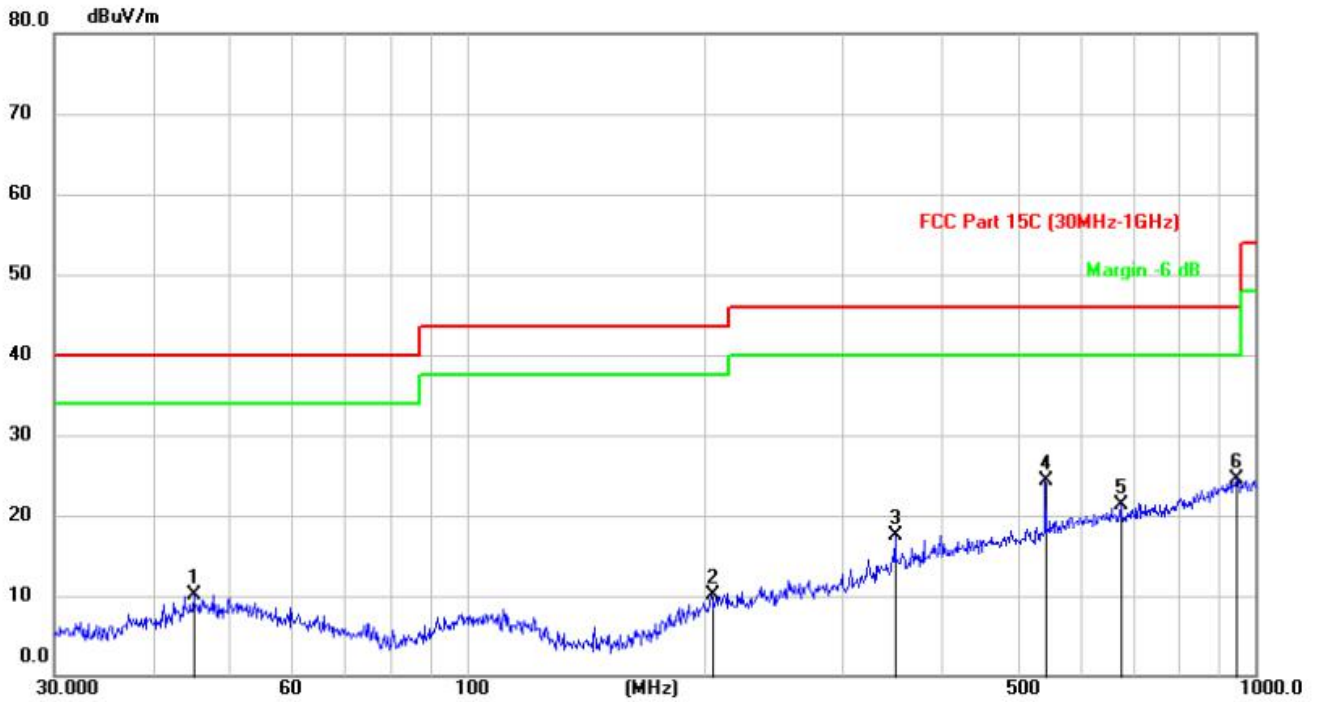

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		45.1214	26.23	-16.06	10.17	40.00	-29.83	QP
2		204.8112	27.84	-17.80	10.04	43.50	-33.46	QP
3		349.9854	30.08	-12.54	17.54	46.00	-28.46	QP
4		542.7028	33.30	-9.05	24.25	46.00	-21.75	QP
5		675.9184	28.54	-7.25	21.29	46.00	-24.71	QP
6	*	948.4283	28.37	-3.81	24.56	46.00	-21.44	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

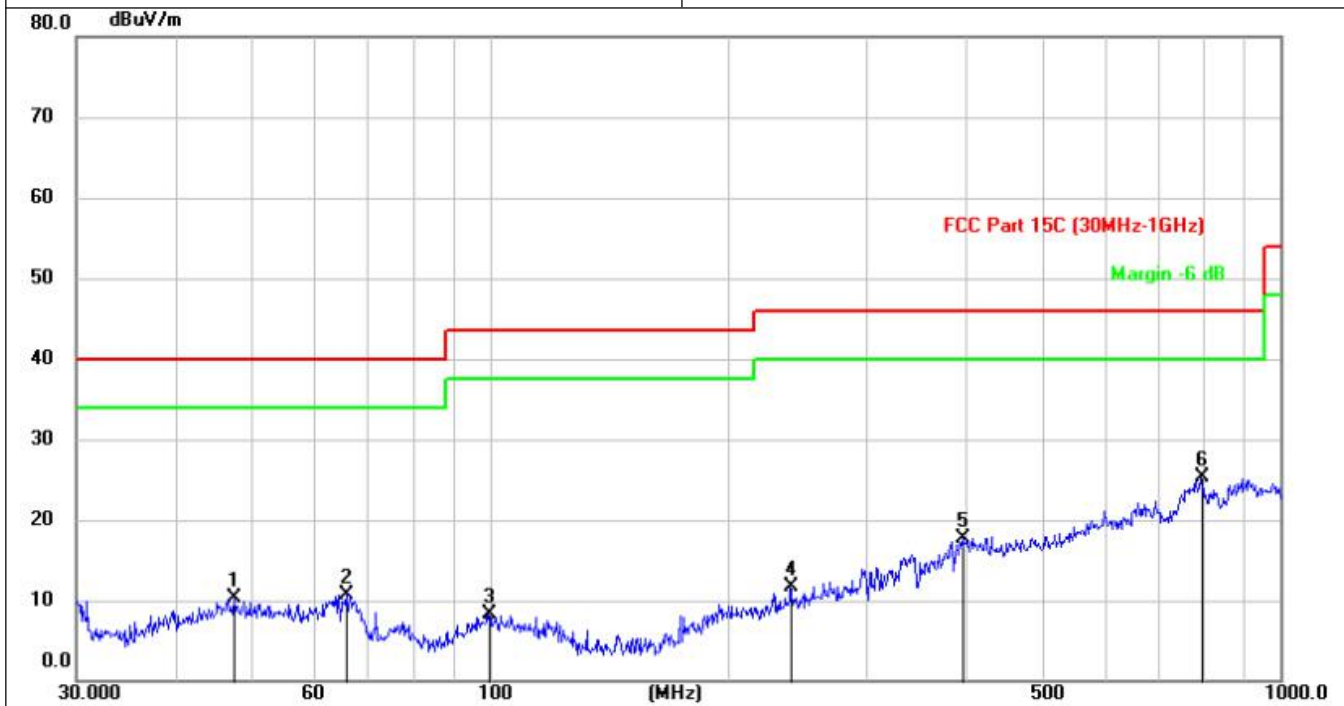


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		47.4917	26.09	-15.86	10.23	40.00	-29.77	QP
2		65.8953	29.55	-18.84	10.71	40.00	-29.29	QP
3		99.6675	25.90	-17.69	8.21	43.50	-35.29	QP
4		240.4927	27.72	-16.11	11.61	46.00	-34.39	QP
5		396.5194	28.73	-11.02	17.71	46.00	-28.29	QP
6	*	795.6245	31.57	-6.27	25.30	46.00	-20.70	QP

Emission Level= Read Level+ Correct Factor

H6-PNCN:


Test voltage:	DC 3.0V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

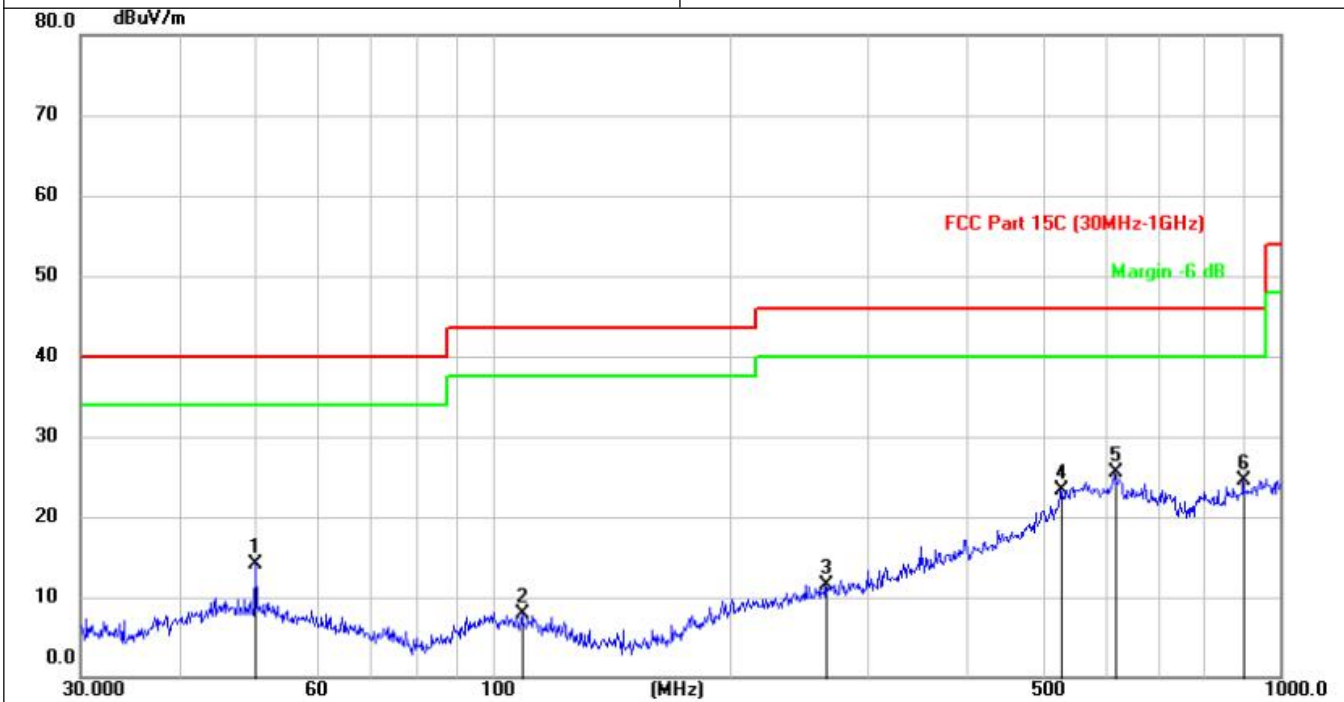

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		50.0566	29.74	-15.64	14.10	40.00	-25.90	QP
2		109.2964	26.14	-18.33	7.81	43.50	-35.69	QP
3		265.4893	26.95	-15.45	11.50	46.00	-34.50	QP
4		527.8754	32.71	-9.36	23.35	46.00	-22.65	QP
5	*	618.1032	33.01	-7.56	25.45	46.00	-20.55	QP
6		899.2009	28.69	-4.20	24.49	46.00	-21.51	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.0V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

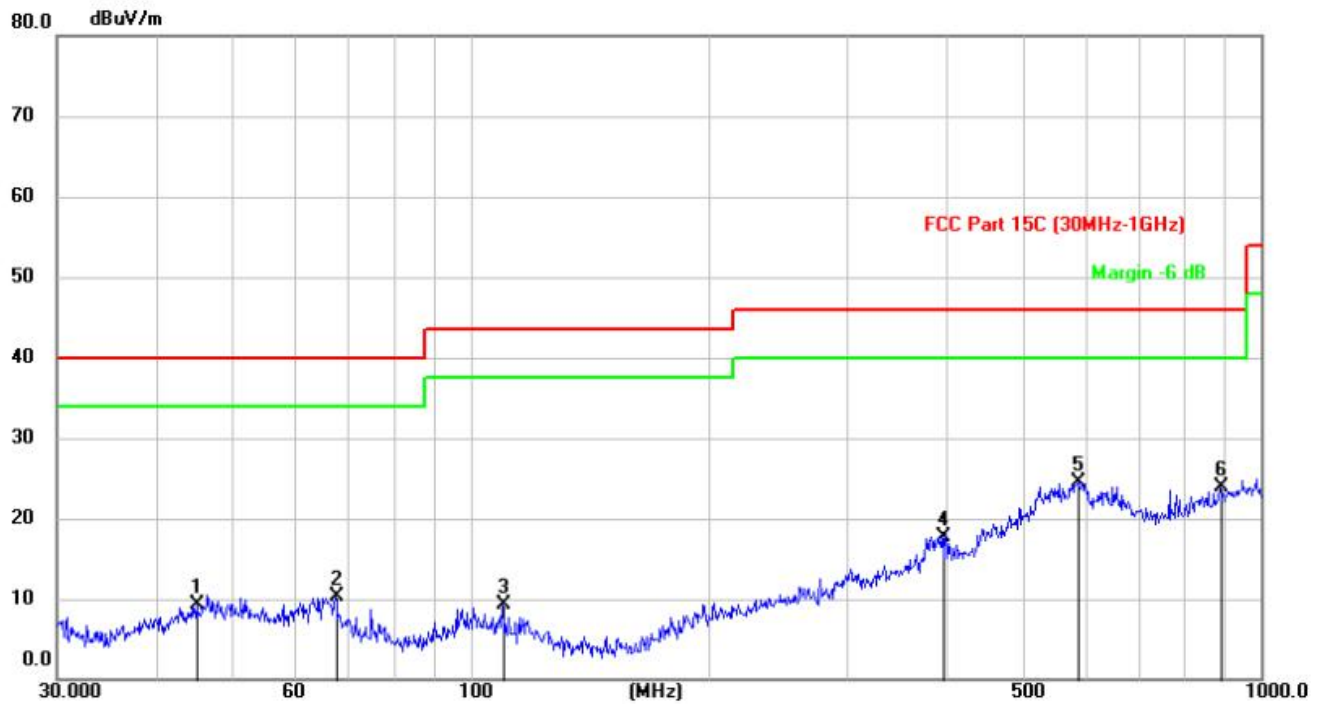

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		45.0741	25.31	-16.06	9.25	40.00	-30.75	QP
2		67.5092	29.42	-19.18	10.24	40.00	-29.76	QP
3		110.1042	27.64	-18.39	9.25	43.50	-34.25	QP
4		395.1315	28.83	-11.07	17.76	46.00	-28.24	QP
5	*	588.2857	32.53	-7.96	24.57	46.00	-21.43	QP
6		889.7912	28.38	-4.40	23.98	46.00	-22.02	QP

Emission Level= Read Level+ Correct Factor