

TEST REPORT

Report No. : KS2302S0539E01
FCC ID : 2A094-LW007-PIR
Applicant : MOKO TECHNOLOGY LIMITED
Address : Factory 201, 107 Pinshun Rd Guixiang community, Guanlan Street,
Longhua, Shenzhen, China 518110
Manufacturer : MOKO TECHNOLOGY Ltd
Address : Factory 201, 107 Pinshun Rd Guixiang community, Guanlan Street,
Longhua, Shenzhen, China 518110
Product Name : LoRaWAN PIR Motion Sensor
Model/Type reference : LW007-PIR
Standard : 47 CFR Part 15.249
Date of Receipt : February 9, 2023
Date of Test Date : February 9, 2023 to February 28, 2023
Date of issue : February 28, 2023
Test result : Pass

Prepared by:
(Printed name + Signature) Pai Zheng



Approved by:
(Printed name + Signature) Sky Dong



Testing Laboratory Name . : KSIGN(Guangdong) Testing Co., Ltd.

Address : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial
Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong,
China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to TSTLMS within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample. The report is invalid if it is not stamped with the "Testing Special Stamp" and the "Riding Seam Stamp".

TABLE OF CONTENTS**Page**

1. TEST SUMMARY	3
1.1. Test Standards	3
1.2. Report Version	3
1.3. Test Description.....	4
1.4. Test Facility	5
1.5. Measurement Uncertainty	6
2. GENERAL INFORMATION	7
2.1. General Description Of EUT	7
2.2. Accessory Equipment Information	7
2.3. Description of Test Modes.....	7
2.4. Measurement Instruments List.....	8
3. EVALUATION RESULTS (EVALUATION)	10
3.1. Antenna requirement.....	10
4. RADIO SPECTRUM MATTER TEST RESULTS (RF)	10
4.1. 20dB Occupied Bandwidth.....	10
4.2. Field strength of fundamental	14
4.3. Emissions in restricted frequency bands (below 1GHz)	16
4.4. Emissions in restricted frequency bands (above 1GHz).....	24
5. EUT TEST PHOTOS.....	34
6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....	35

1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

47 CFR Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz

1.2. Report Version

Revised No.	Date of issue	Description
01	February 28, 2023	Original

1.3. Test Description

Test Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.249	Part 15.203	Pass
Occupied Bandwidth	47 CFR Part 15.249	47 CFR 15.215(c)	Pass
Field strength of fundamental	47 CFR Part 15.249	47 CFR 15.249(a)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.249	47 CFR 15.249(d)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.249	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass
Emissions in restricted frequency bands (above 1GHz)	47 CFR Part 15.249	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)	Pass

1.4. Test Facility

KSIGN(Guangdong) Testing Co., Ltd.

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L13261

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5457.01

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing

ISED#: 25693 CAB identifier.: CN0096

KSIGN(Guangdong) Testing Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

FCC-Registration No.: 294912 Designation Number: CN1328

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

1.5. Measurement Uncertainty

Test Items	Measurement Uncertainty
RSE (30-1000MHz)	± 5.7dB
RSE (1-18GHz)	± 4.68dB
RSE (18-40GHz)	± 5.18dB

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. GENERAL INFORMATION

2.1. General Description Of EUT

Test Sample Number:	1-1(Normal Sample), 1-2(Engineering Sample)
Product Name:	LoRaWAN PIR Motion Sensor
Model / Type reference:	LW007-PIR
Power Supply:	DC 3.6V from battery
Operation Frequency:	902.3MHz~914.9MHz
Number of Channels:	64
Modulation Type:	Lora
Antenna Type:	FPC
Antenna Gain:	-1.57dBmi
Max Power:	103.77 dBuV/m

2.2. Accessory Equipment Information

The EUT was tested as an independent device.

2.3. Description of Test Modes

No.	Title	Description of Mode
Test Mode1	TX	Keep EUT is transmitting TX mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting mode for testing .There are 64 channels provided to the EUT and Low(Channel 01)/Mid(Channel 32)/High (Channel 64) were selected to test.

Channel	Frequency (MHz)
1	902.3
2	902.5
3	902.7
...	...
...	...
32	908.5
...	...
...	...
62	914.5
63	914.7
64	914.9

2.4. Measurement Instruments List

Occupied Bandwidth				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Wideband Radio Communication Tester	R&S	CMU200	115297	2023-03-04
Audio Analyzer	R&S	UPL16	100001	2023-03-04
Shielding box	Gxiong	GX-5915A	2201113	2023-04-23
High Pass Filter	COM-MW Technology Co., Ltd	ZHPF-M1.2-9G-187	09203403	2023-03-04
Band Stop Filter	COM-MW Technology Co., Ltd	ZBSF6-C820-920-188	09203401	2023-03-04
Splitter	COM-MW Technology Co., Ltd	ZPD-M1-8-2103	09203407	2023-03-04
Coaxial Cable	BEBES	A40-2.92M2.92F-4.5M	1907021	2023-03-04
Hygrothermograph	Anymetre	JB913	/	2023-03-07
Climate Chamber	Angul	AGNH80L	1903042120	2023-03-04
Spectrum Analyzer	HP	8593E	3831U02087	2023-03-04
Dual Output DC Power Supply	Agilent	E3646A	MY40009992	2023-03-04
RF Control Unit	Tonscend	JS0806-2	/	2023-03-04
Analog Signal Generator	HP	83752A	3344A00337	2023-03-04
Vector Signal Generator	Agilent	N5182A	MY50142520	2023-03-04
Wideband Radio Communication Tester	R&S	CMW500	157282	2023-03-04
Spectrum Analyzer	R&S	FSV40-N	101798	2023-03-04

Field strength of fundamental				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Color Signal Generator	Philips	PM5418	672926	2023-03-04
Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	1230	2023-04-12
Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	2023-03-04
Broadcast Television Signal Generator	R&S	SFE100	141038	2023-03-04
Analog Signal Generator	Agilent	8648A	3847M00445	2023-03-04
EMI Test Receiver	R&S	ESR	102525	2023-03-04
Loop Antenna	Beijin ZHINAN	ZN30900C	18050	2023-03-05
Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	2023-03-29
Pre-Amplifier	EMCI	EMC051835SE	980662	2023-03-04
Spectrum Analyzer	Keysight	N9020A	MY46471971	2023-03-04

Band edge emissions (Radiated)				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Color Signal Generator	Philips	PM5418	672926	2023-03-04
Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	1230	2023-04-12

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	2023-03-04
Broadcast Television Signal Generator	R&S	SFE100	141038	2023-03-04
Analog Signal Generator	Agilent	8648A	3847M00445	2023-03-04
EMI Test Receiver	R&S	ESR	102525	2023-03-04
Loop Antenna	Beijin ZHINAN	ZN30900C	18050	2023-03-05
Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	2023-03-29
Pre-Amplifier	EMCI	EMC051835SE	980662	2023-03-04
Spectrum Analyzer	Keysight	N9020A	MY46471971	2023-03-04

Emissions in restricted frequency bands (below 1GHz)				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Color Signal Generator	Philips	PM5418	672926	2023-03-04
Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	1230	2023-04-12
Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	2023-03-04
Broadcast Television Signal Generator	R&S	SFE100	141038	2023-03-04
Analog Signal Generator	Agilent	8648A	3847M00445	2023-03-04
EMI Test Receiver	R&S	ESR	102525	2023-03-04
Loop Antenna	Beijin ZHINAN	ZN30900C	18050	2023-03-05
Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	2023-03-29
Pre-Amplifier	EMCI	EMC051835SE	980662	2023-03-04
Spectrum Analyzer	Keysight	N9020A	MY46471971	2023-03-04

Emissions in restricted frequency bands (above 1GHz)				
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Color Signal Generator	Philips	PM5418	672926	2023-03-04
Ultra-Broadband logarithmic period Antenna	Schwarzbeck	VULB 9163	1230	2023-04-12
Pre-Amplifier	Schwarzbeck	BBV 9745	9745#129	2023-03-04
Broadcast Television Signal Generator	R&S	SFE100	141038	2023-03-04
Analog Signal Generator	Agilent	8648A	3847M00445	2023-03-04
EMI Test Receiver	R&S	ESR	102525	2023-03-04
Loop Antenna	Beijin ZHINAN	ZN30900C	18050	2023-03-05
Horn Antenna	Schwarzbeck	BBHA 9120 D	2023	2023-03-29
Pre-Amplifier	EMCI	EMC051835SE	980662	2023-03-04
Spectrum Analyzer	Keysight	N9020A	MY46471971	2023-03-04

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

3. Evaluation Results (Evaluation)

3.1. Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Conclusion:	The antenna gain is -1.57dB, the directional gain of the antenna less than 6dBi. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used. Antenna structure please refer to the EUT internal photographs antenna photo.

4. Radio Spectrum Matter Test Results (RF)

4.1. 20dB Occupied Bandwidth

Test Requirement:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Limit:	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	Occupied bandwidth—relative measurement procedure
Procedure:	<p>a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.</p> <p>b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.</p> <p>c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.</p> <p>d) Steps a) through c) might require iteration to adjust within the specified tolerances.</p> <p>e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.</p> <p>f) Set detection mode to peak and trace mode to max hold.</p> <p>g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).</p> <p>h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function</p>

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

of the instrument.

i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).


j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.1.1. E.U.T. Operation:

Operating Environment:	
Temperature:	24.4 °C
Humidity:	52.6 %
Atmospheric Pressure:	102 kPa
Final test mode:	Test Mode1

4.1.2. Test Setup Diagram:

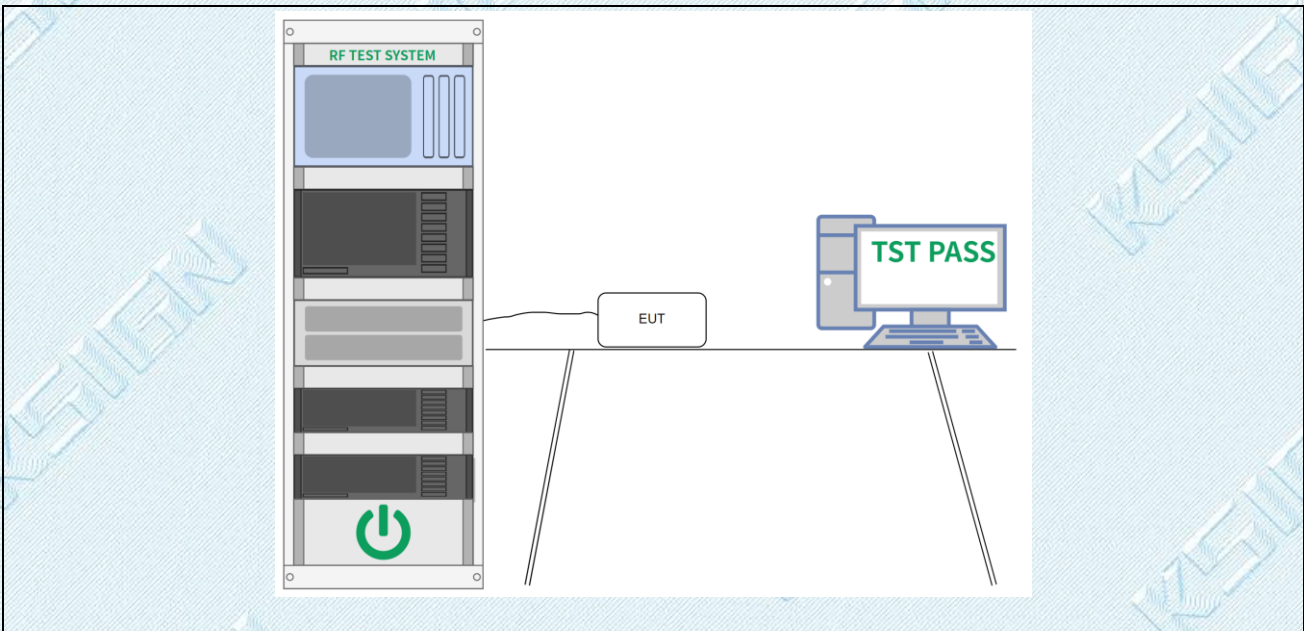


4.1.3. Test Data:


TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

TestMode	Antenna	Freq(MHz)	20dB OCB [kHz]	Verdict
Lora	Ant1	902.3	139.80	Pass
		908.5	138.06	Pass
		914.9	138.06	Pass

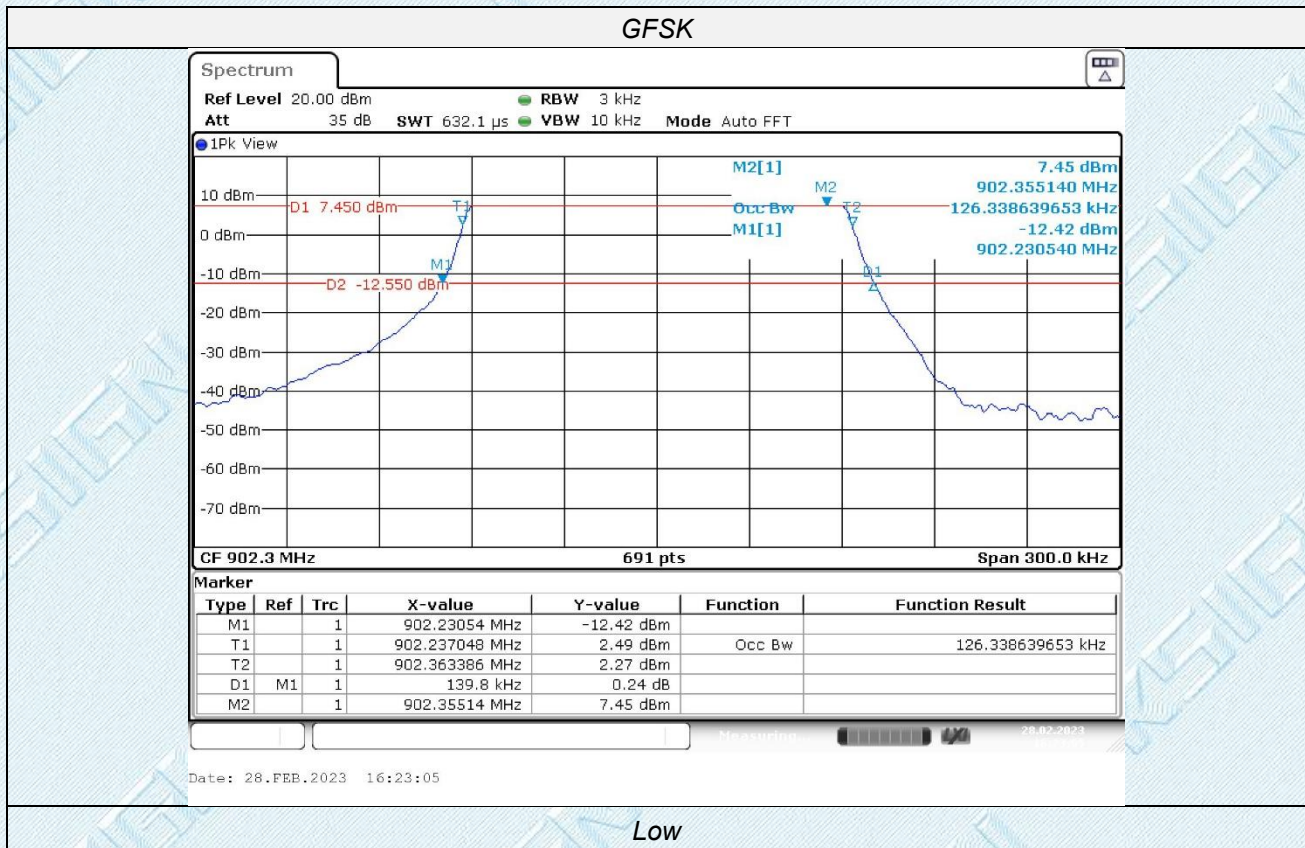

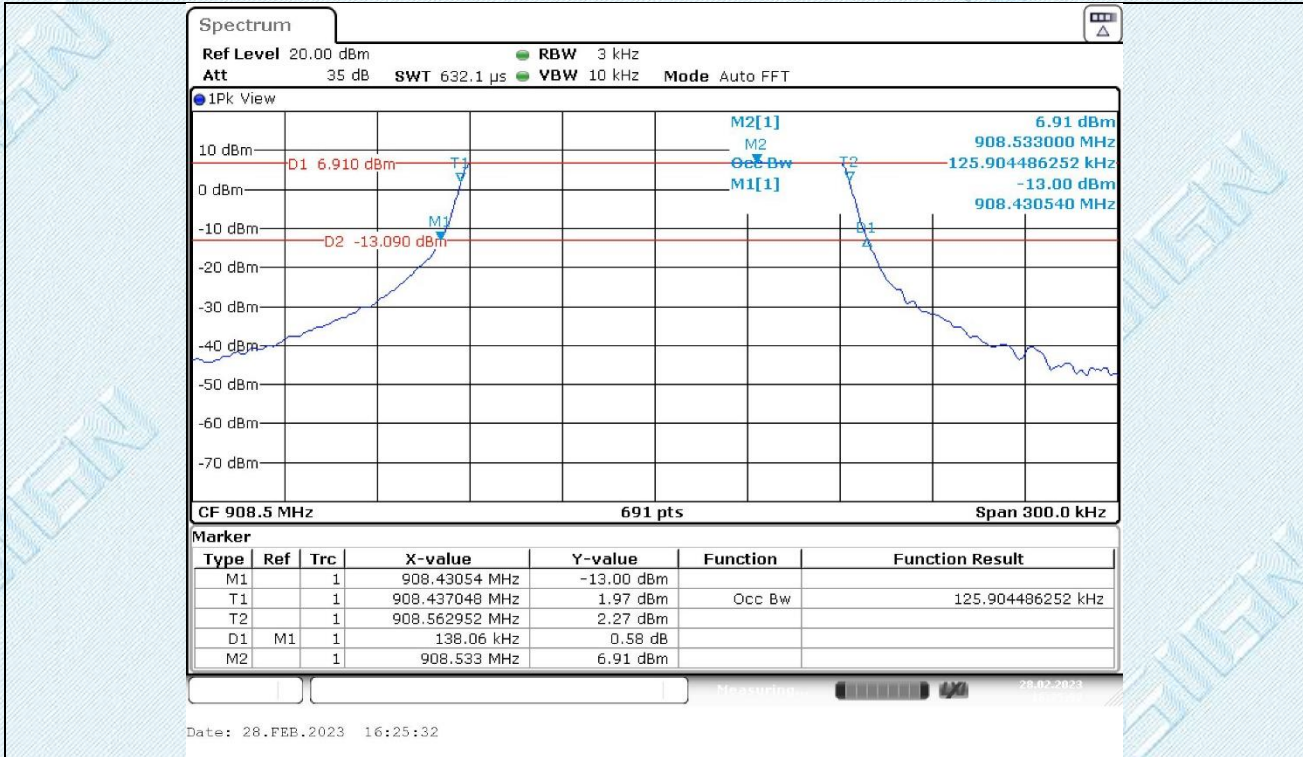

Mid

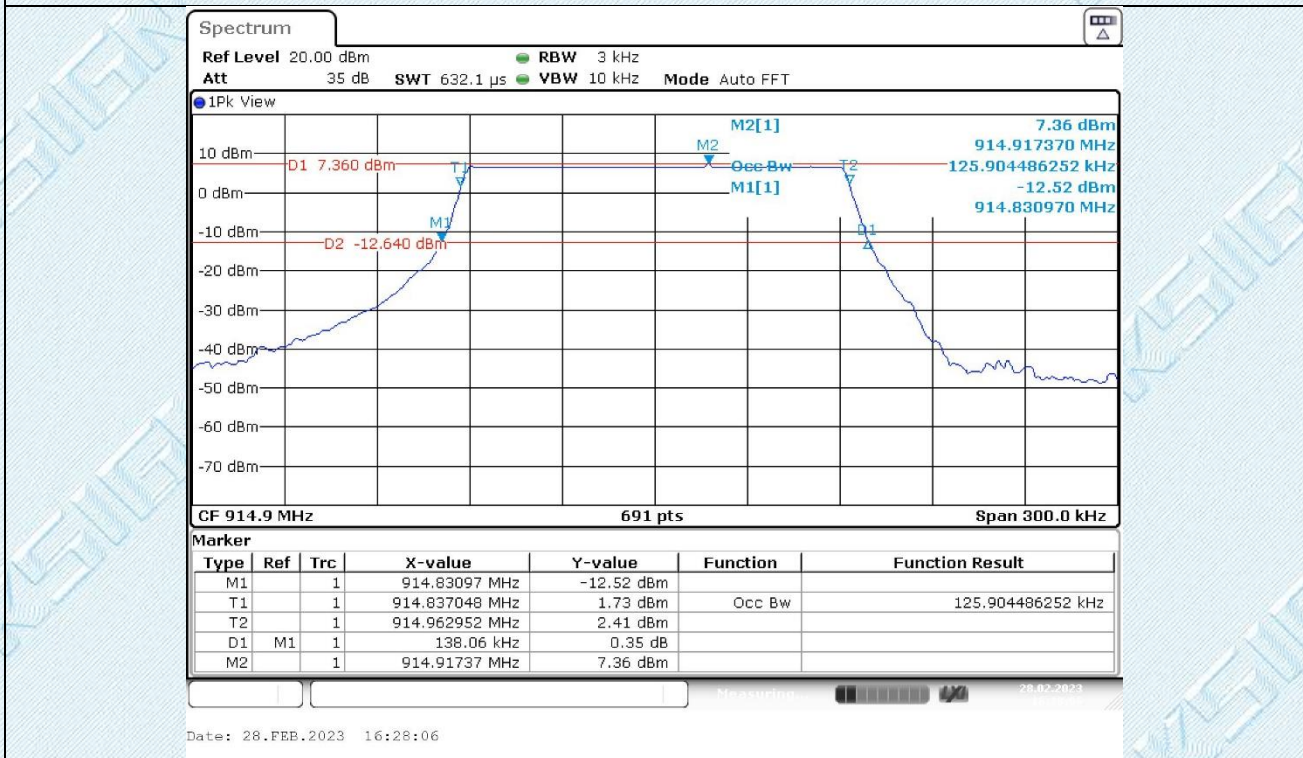

High

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

4.2. Field strength of fundamental

Test Requirement:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
	5725-5875 MHz	50	500
	24.0-24.25 GHz	250	2500
Test Method:	ANSI C63.10-2013 section 6.5		
Procedure:	ANSI C63.10-2013 section 6.5		

4.2.1. E.U.T. Operation:

Operating Environment:	
Temperature:	24.4 °C
Humidity:	52.6 %
Atmospheric Pressure:	102 kPa
Final test mode:	Test Mode1

4.2.2. Test Data:

Frequency (MHz)	Read Level (dBuV)	Correct Factor (dB/m)	Level (dBuV/m)	Peak Limit (dBuV/m)	Over Limit (dBuV/m)	Polarization	Test value
902.3	107.90	-4.18	103.72	114	-10.28	Horizontal	Peak
908.5	107.83	-4.12	103.71	114	-10.29	Horizontal	Peak
914.9	107.76	-4.07	103.69	114	-10.31	Horizontal	Peak
902.3	107.86	-4.18	103.68	114	-10.32	Vertical	Peak
908.5	107.89	-4.12	103.77	114	-10.23	Vertical	Peak
914.9	107.77	-4.07	103.70	114	-10.30	Vertical	Peak

Frequency (MHz)	Read Level (dBuV)	Correct Factor (dB/m)	Level (dBuV/m)	AVG Limit (dBuV/m)	Over Limit (dBuV/m)	Polarization	Test value
902.3	94.18	-4.18	90.00	94	-4.00	Horizontal	AVG
908.5	94.35	-4.12	90.23	94	-3.77	Horizontal	AVG
914.9	95.77	-4.07	91.70	94	-2.30	Horizontal	AVG
902.3	95.08	-4.18	90.09	94	-3.91	Vertical	AVG
908.5	95.14	-4.12	91.02	94	-2.98	Vertical	AVG
914.9	95.81	-4.07	91.74	94	-2.26	Vertical	AVG

4.3. Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)		
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
5725-5875 MHz	50	500	
24.0-24.25 GHz	250	2500	
Test Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
Above 960	500	3	
Test Method:	ANSI C63.10-2013 section 6.5		
Procedure:	ANSI C63.10-2013 section 6.5		

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


4.3.1. E.U.T. Operation:

Operating Environment:	
Temperature:	24.4 °C
Humidity:	52.6 %
Atmospheric Pressure:	102 kPa
Final test mode:	Test Mode1

Note:


Both modes of were tested at Low, Middle, and High channel.

4.3.2. Test Data:

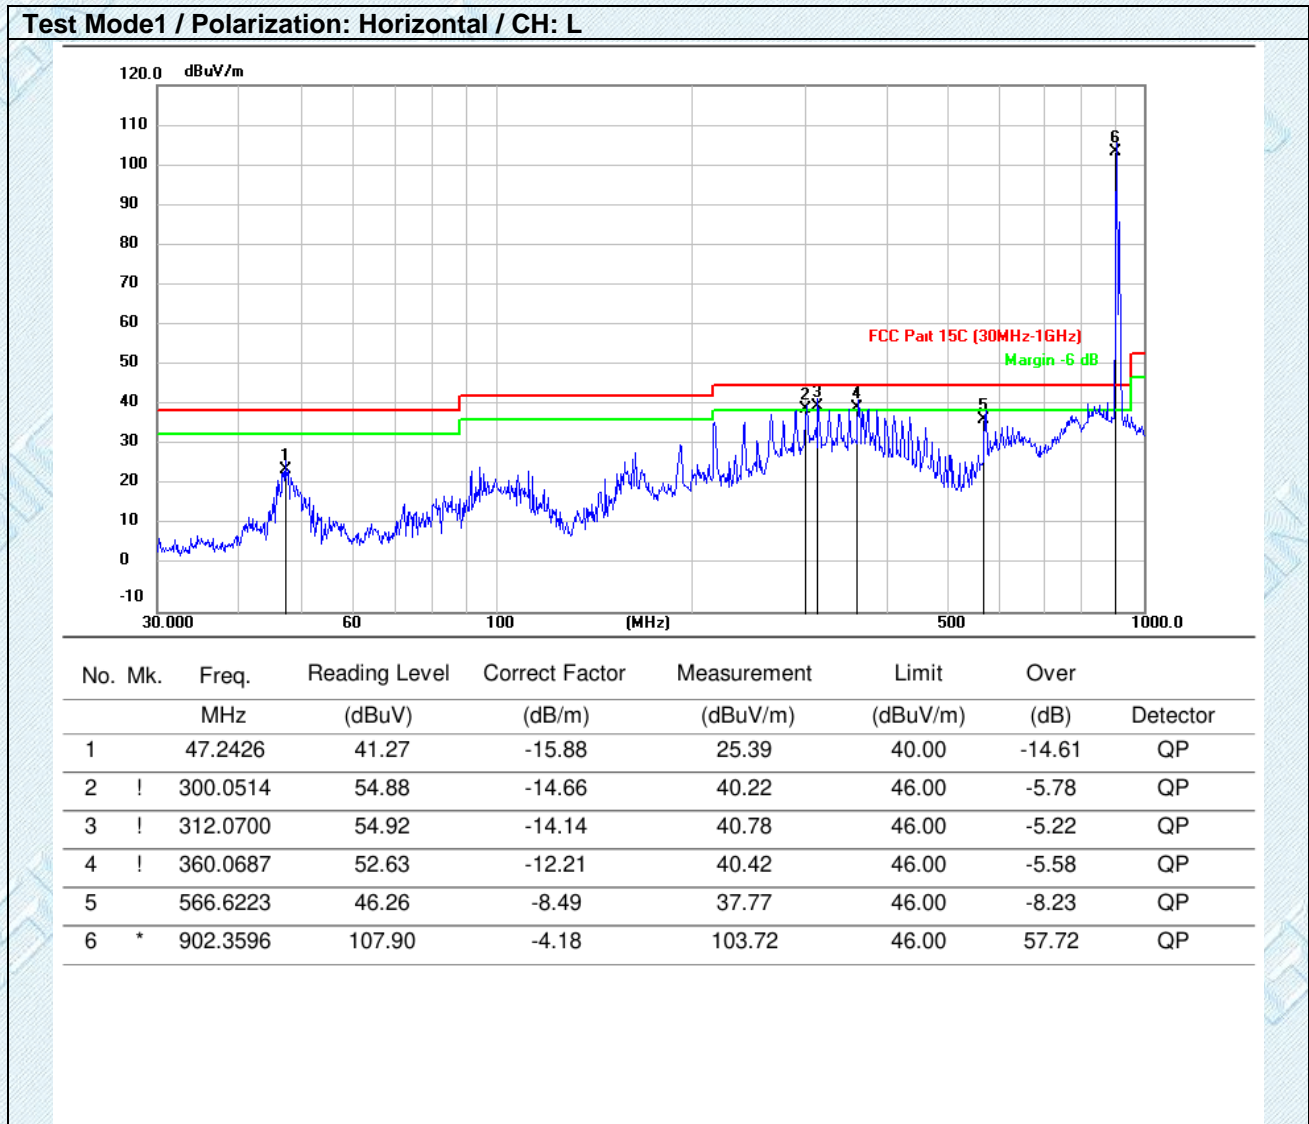

Note:
NO.6 is the fundamental frequency.


Test Mode1 / Polarization: Vertical CH: L

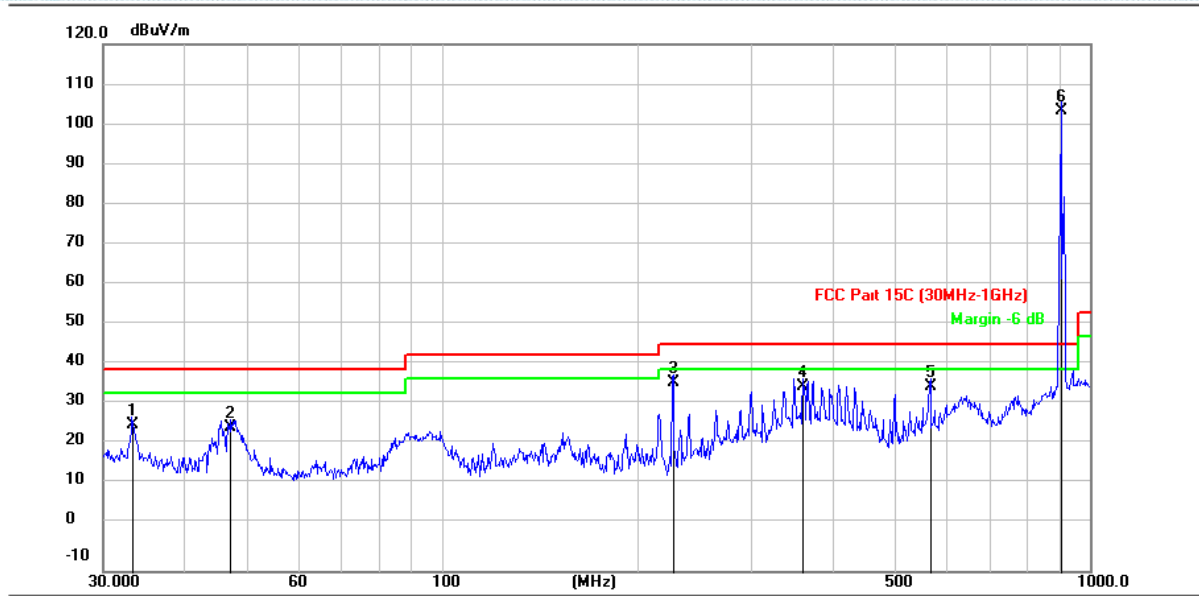

No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	33.2462	44.98	-18.85	26.13	40.00	-13.87	QP
2	47.1764	41.45	-15.89	25.56	40.00	-14.44	QP
3	226.9732	53.29	-16.77	36.52	46.00	-9.48	QP
4	360.0687	47.82	-12.21	35.61	46.00	-10.39	QP
5	566.6223	44.02	-8.49	35.53	46.00	-10.47	QP
6 *	902.3596	107.90	-4.18	103.72	46.00	57.72	QP


Note:
NO.6 is the fundamental frequency.

Test Mode1 / Polarization: Horizontal CH: M

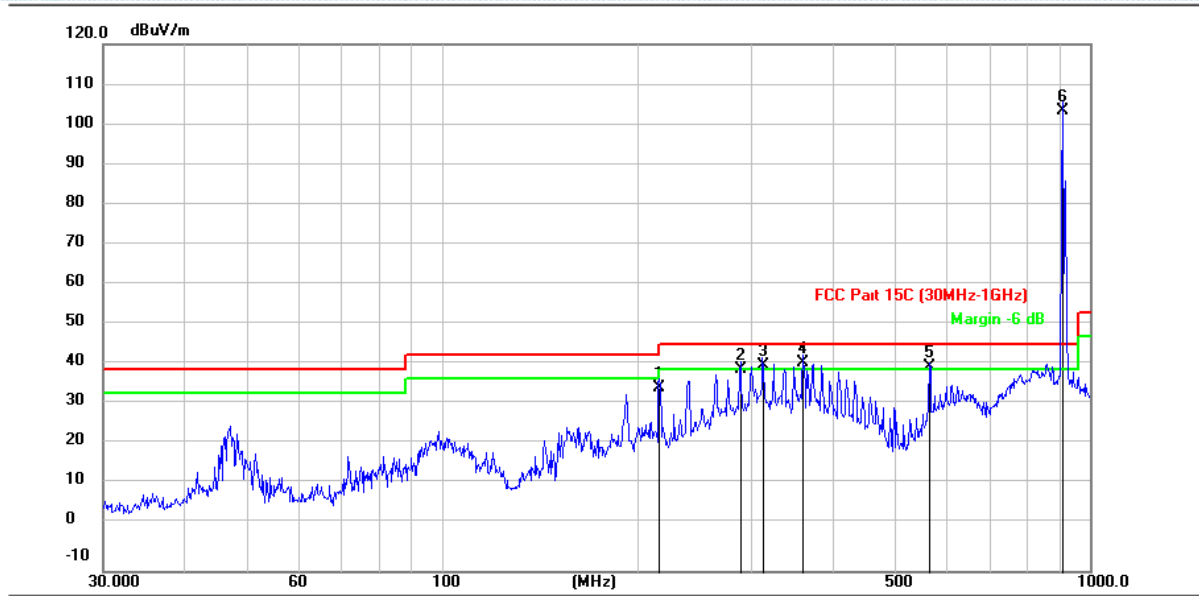


No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	216.0240	52.75	-17.29	35.46	46.00	-10.54	QP
2	288.0914	54.78	-14.95	39.83	46.00	-6.17	QP
3	! 311.9606	55.08	-14.15	40.93	46.00	-5.07	QP
4	! 360.0687	53.77	-12.21	41.56	46.00	-4.44	QP
5	! 564.8369	49.08	-8.53	40.55	46.00	-5.45	QP
6	* 908.7102	107.83	-4.12	103.71	46.00	57.71	QP

Test Mode1 / Polarization: Vertical CH: M

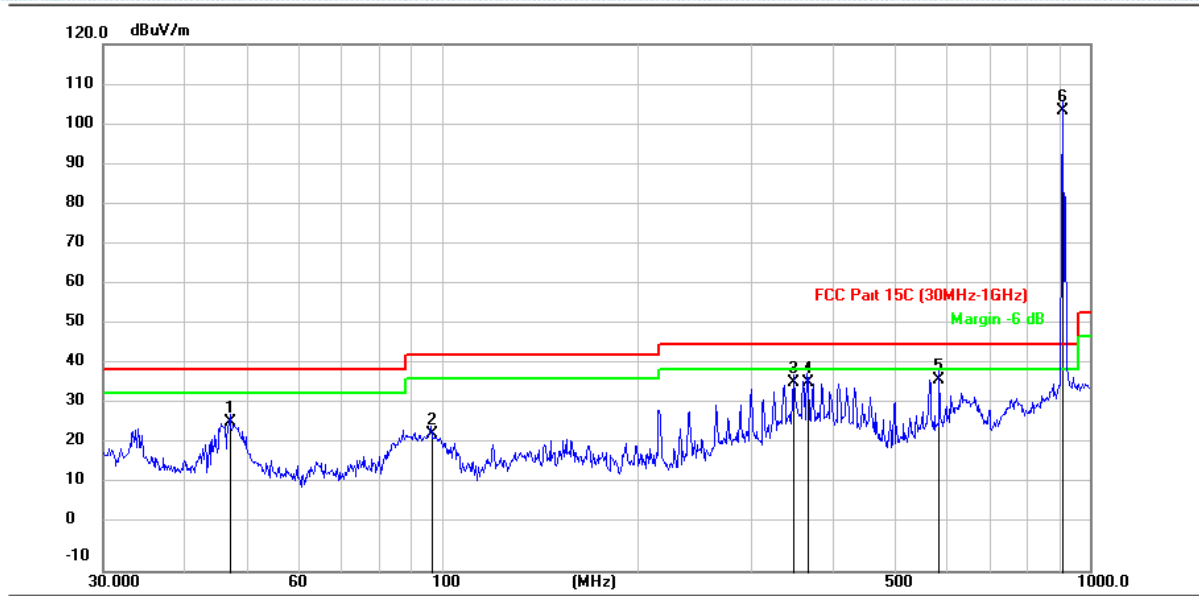


No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	47.0938	42.64	-15.89	26.75	40.00	-13.25	QP
2	96.3009	42.28	-18.24	24.04	43.50	-19.46	QP
3	348.0274	49.15	-12.62	36.53	46.00	-9.47	QP
4	365.4108	48.83	-12.04	36.79	46.00	-9.21	QP
5	584.9946	45.47	-8.04	37.43	46.00	-8.57	QP
6 *	908.7102	107.83	-4.12	103.71	46.00	57.71	QP

Test Mode1 / Polarization: Horizontal / CH: H

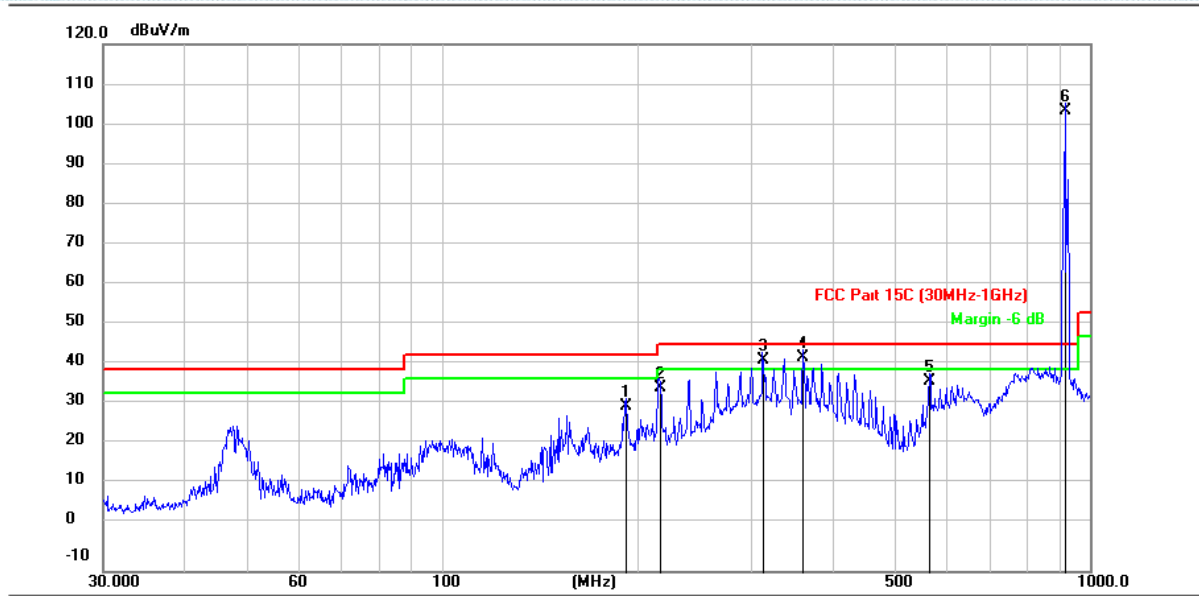

No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	192.3511	49.14	-18.33	30.81	43.50	-12.69	QP
2	216.7068	52.74	-17.25	35.49	46.00	-10.51	QP
3	! 312.0700	56.24	-14.14	42.10	46.00	-3.90	QP
4	! 360.0687	55.12	-12.21	42.91	46.00	-3.09	QP
5	564.8369	45.45	-8.53	36.92	46.00	-9.08	QP
6	* 915.1055	107.76	-4.07	103.69	46.00	57.69	QP

Test Mode1 / Polarization: Vertical CH: H

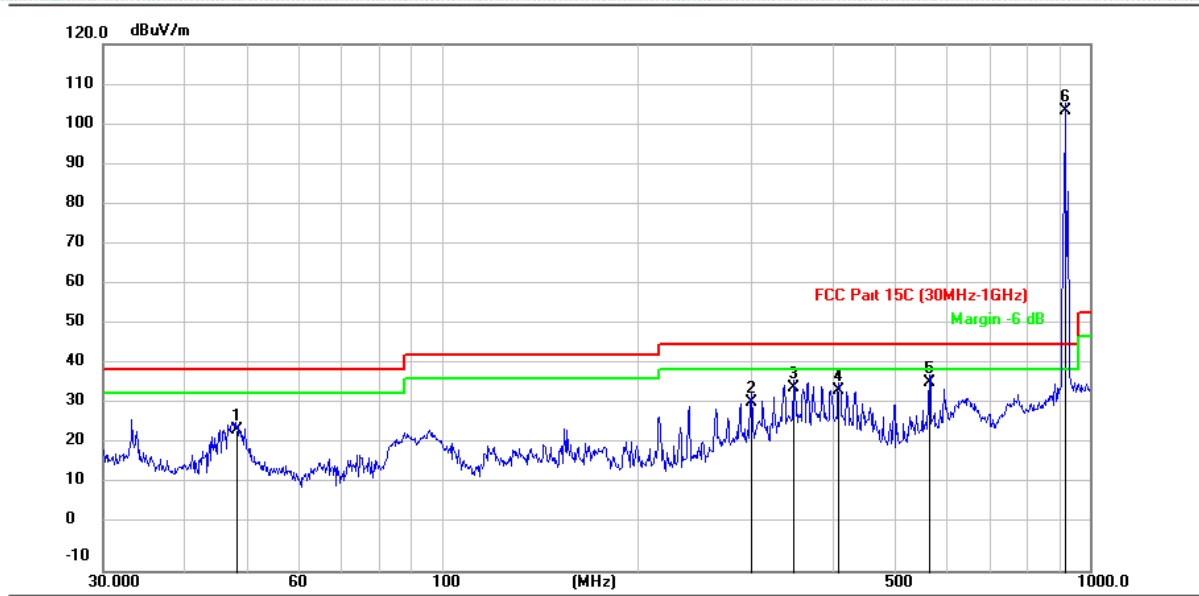

No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	48.0614	40.68	-15.80	24.88	40.00	-15.12	QP
2	299.9463	46.57	-14.66	31.91	46.00	-14.09	QP
3	348.1495	48.03	-12.62	35.41	46.00	-10.59	QP
4	408.0865	45.60	-10.82	34.78	46.00	-11.22	QP
5	564.8369	45.24	-8.53	36.71	46.00	-9.29	QP
6 *	915.1055	107.76	-4.07	103.69	46.00	57.69	QP

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

4.4. Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	47 CFR 15.249(a) 47 CFR 15.249(d) 47 CFR 15.249(e)		
Test Limit:	Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:		
	Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
	902-928 MHz	50	500
	2400-2483.5 MHz	50	500
5725-5875 MHz	50	500	
24.0-24.25 GHz	250	2500	
Test Method:	ANSI C63.10-2013 section 6.6		
Procedure:	ANSI C63.10-2013 section 6.6		

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.


4.4.1. E.U.T. Operation:

Operating Environment:	
Temperature:	24.4 °C
Humidity:	52.6 %
Atmospheric Pressure:	102 kPa
Final test mode:	Test Mode1


Note:

- 1.From 10GHz to 26.5GHz,the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2.Since the peak value is less than the limit of the AVG value, there is no AVG data.

4.4.2. Test Data:

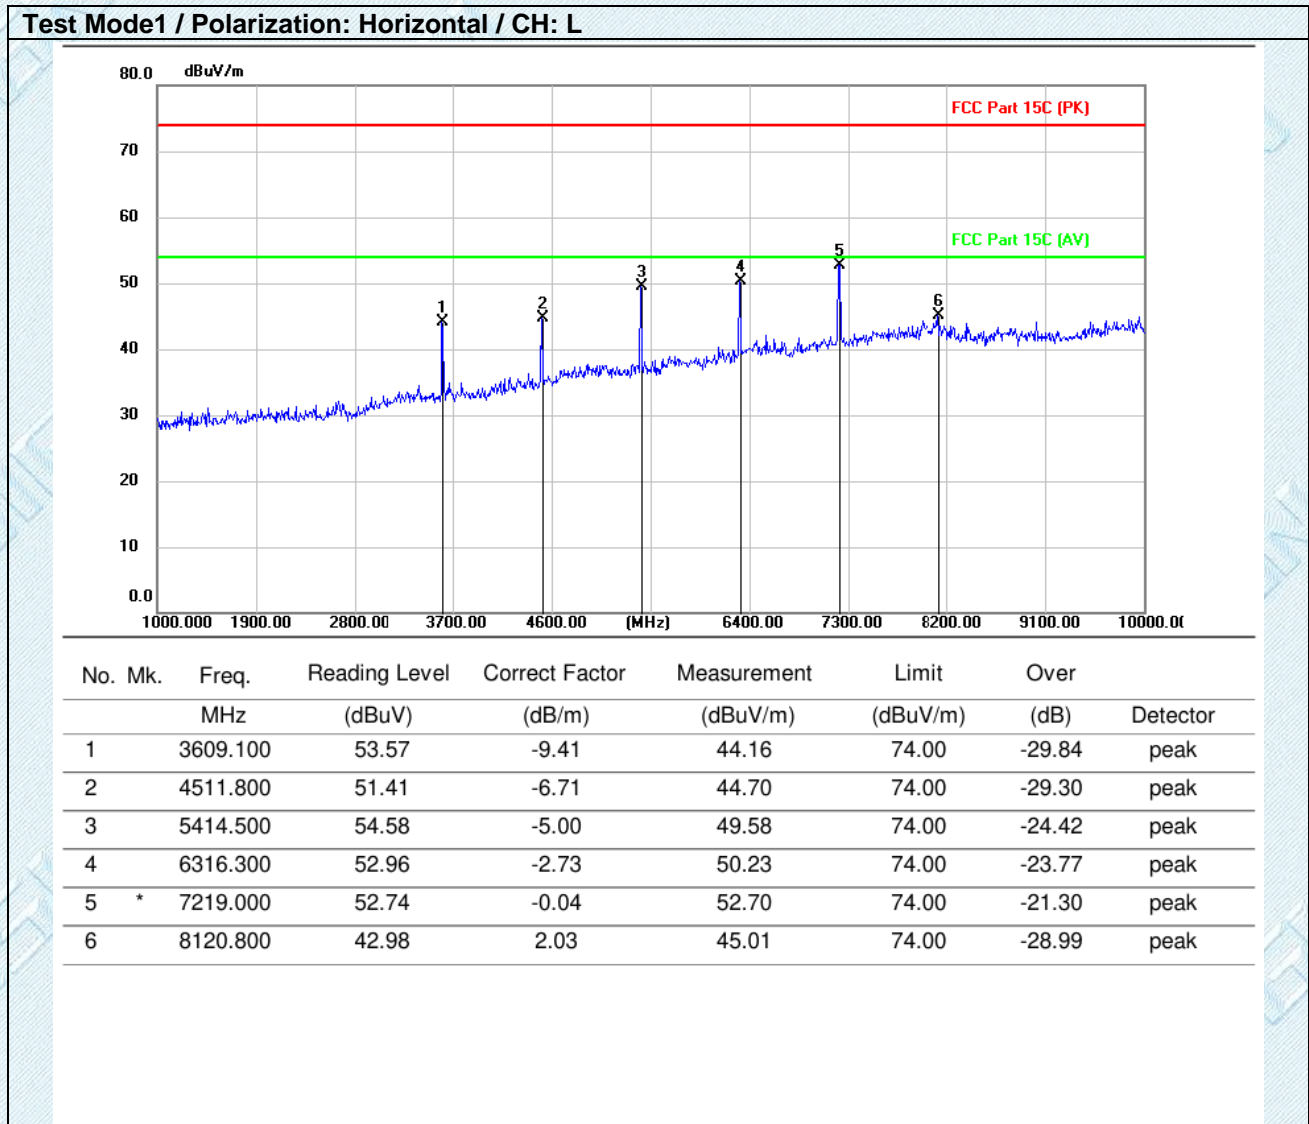


Test Mode1 / Polarization: Vertical / CH: L

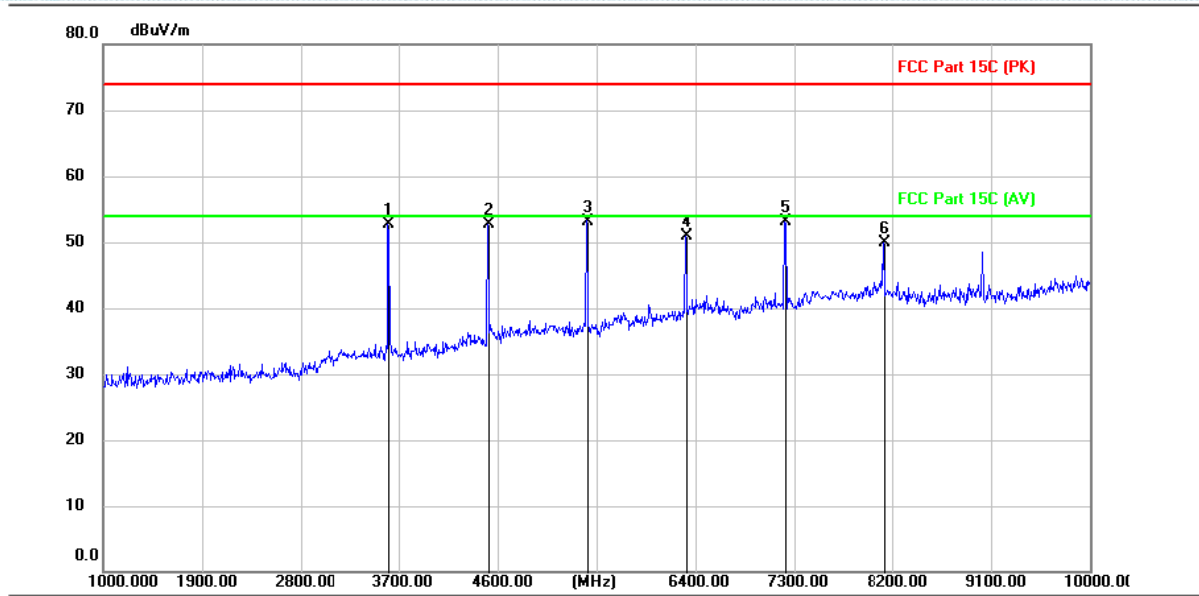

No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	3609.100	62.12	-9.41	52.71	74.00	-21.29	peak
2	4510.900	59.49	-6.72	52.77	74.00	-21.23	peak
3	* 5414.500	58.20	-5.00	53.20	74.00	-20.80	peak
4	6316.300	53.56	-2.73	50.83	74.00	-23.17	peak
5	7218.100	53.07	-0.05	53.02	74.00	-20.98	peak
6	8121.700	47.88	2.03	49.91	74.00	-24.09	peak

Test Mode1 / Polarization: Horizontal / CH: M

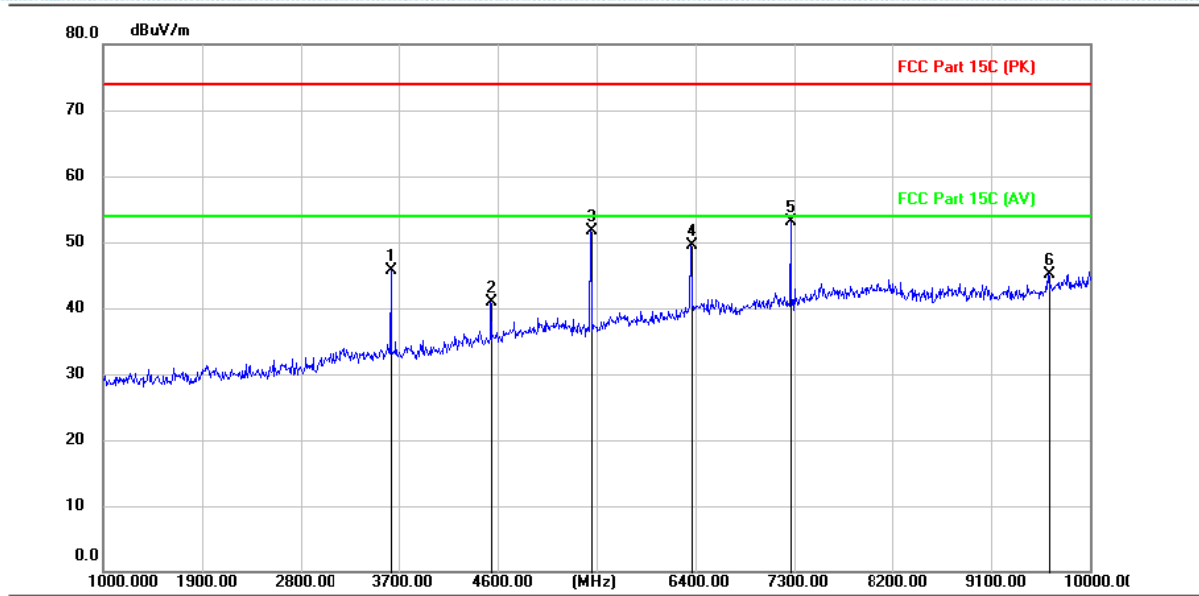


No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	3634.300	55.09	-9.34	45.75	74.00	-28.25	peak
2	4542.400	47.46	-6.63	40.83	74.00	-33.17	peak
3	5451.400	56.73	-4.98	51.75	74.00	-22.25	peak
4	6359.500	52.17	-2.59	49.58	74.00	-24.42	peak
5 *	7268.500	52.92	0.11	53.03	74.00	-20.97	peak
6	9625.600	41.81	3.25	45.06	74.00	-28.94	peak

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

Test Mode1 / Polarization: Vertical / CH: M

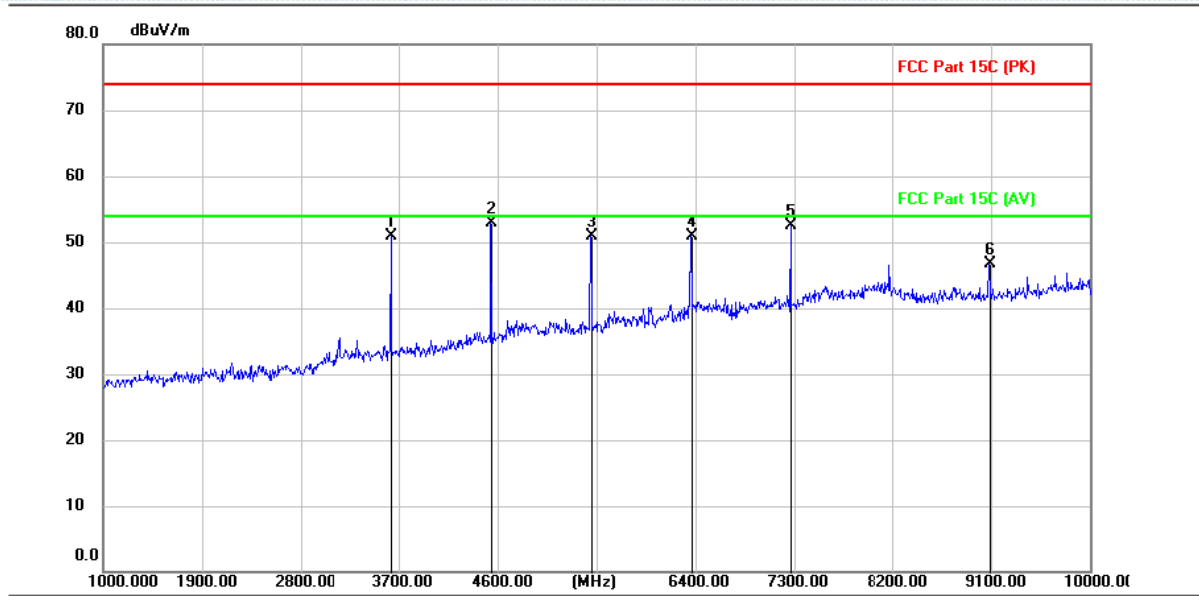


No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	3634.300	60.21	-9.34	50.87	74.00	-23.13	peak
2 *	4542.400	59.59	-6.63	52.96	74.00	-21.04	peak
3	5451.400	55.89	-4.98	50.91	74.00	-23.09	peak
4	6359.500	53.55	-2.59	50.96	74.00	-23.04	peak
5	7267.600	52.36	0.11	52.47	74.00	-21.53	peak
6	9085.600	44.74	2.02	46.76	74.00	-27.24	peak

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdkesign.cn Web: www.gdkesign.com

Test Mode1 / Polarization: Horizontal / CH: H

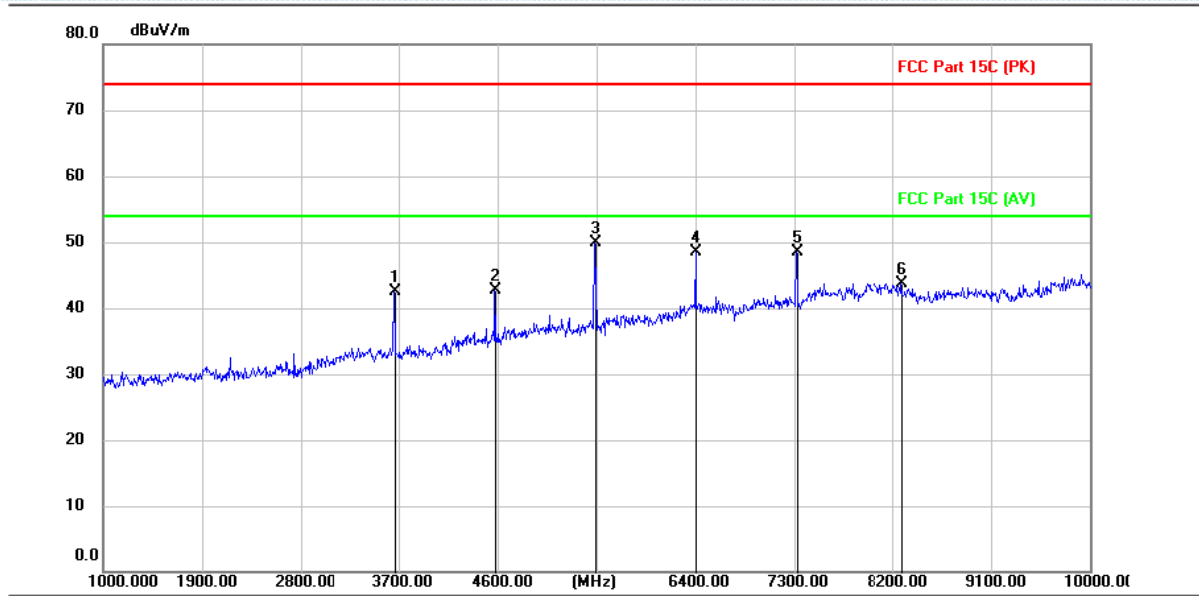


No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	3659.500	51.75	-9.28	42.47	74.00	-31.53	peak
2	4574.800	49.29	-6.55	42.74	74.00	-31.26	peak
3 *	5489.200	54.81	-4.94	49.87	74.00	-24.13	peak
4	6404.500	50.92	-2.44	48.48	74.00	-25.52	peak
5	7318.900	48.21	0.27	48.48	74.00	-25.52	peak
6	8283.700	41.78	1.99	43.77	74.00	-30.23	peak

TRF EMC_R1

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: info@gdksign.cn Web: www.gdksign.com

Test Mode1 / Polarization: Vertical / CH: H

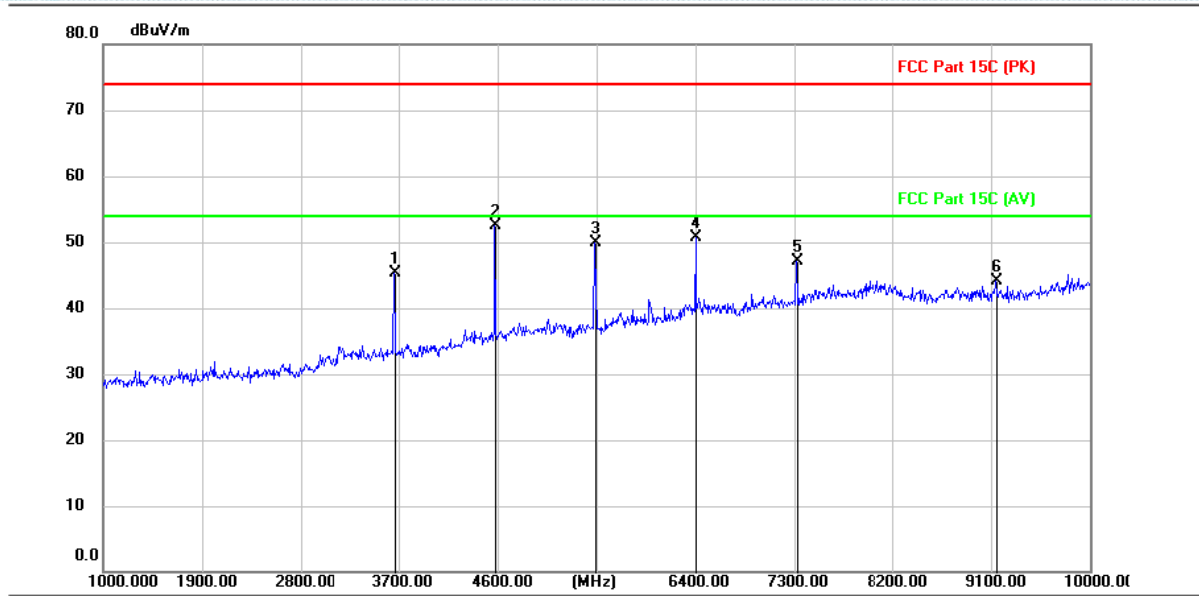

No. Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1	3659.500	54.50	-9.28	45.22	74.00	-28.78	peak
2 *	4574.800	59.11	-6.55	52.56	74.00	-21.44	peak
3	5490.100	54.89	-4.94	49.95	74.00	-24.05	peak
4	6403.600	53.11	-2.44	50.67	74.00	-23.33	peak
5	7319.800	46.85	0.27	47.12	74.00	-26.88	peak
6	9149.500	41.90	2.16	44.06	74.00	-29.94	peak

4.5. Bandedge

Test Requirement:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
Test Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	ANSI C63.10-2013 section 6.6.4		
Procedure:	ANSI C63.10-2013 section 6.6.4		

4.5.1. E.U.T. Operation:

Operating Environment:	
Temperature:	25.1 °C
Humidity:	49.5 %
Atmospheric Pressure:	101 kPa
Final test mode:	Test Mode1

4.5.2. Test Data:

Frequency(MHz):		902.3		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
902.00	49.67	-4.18	45.49	46	-0.51	QP

Frequency(MHz):		902.3		Polarity:		Vertical
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
902.00	47.68	-4.18	43.50	46	-2.5	QP

Frequency(MHz):		914.9		Polarity:		HORIZONTAL
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
928.00	39.30	-3.95	35.35	46	-10.65	QP

Frequency(MHz):		914.9		Polarity:		Vertical
Frequency (MHz)	Reading Level (dBuV/m)	Correc Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
928.00	37.82	-3.95	33.87	46	-12.13	QP

5. EUT TEST PHOTOS

Emissions in restricted frequency bands (below 1GHz)



Emissions in restricted frequency bands (above 1GHz)



6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Refer to Appendix - Photographs of EUT Constructional Details for KS2302S0539E.

--THE END--