


30MHz - 1GHz

M3-PNDA-HA:


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

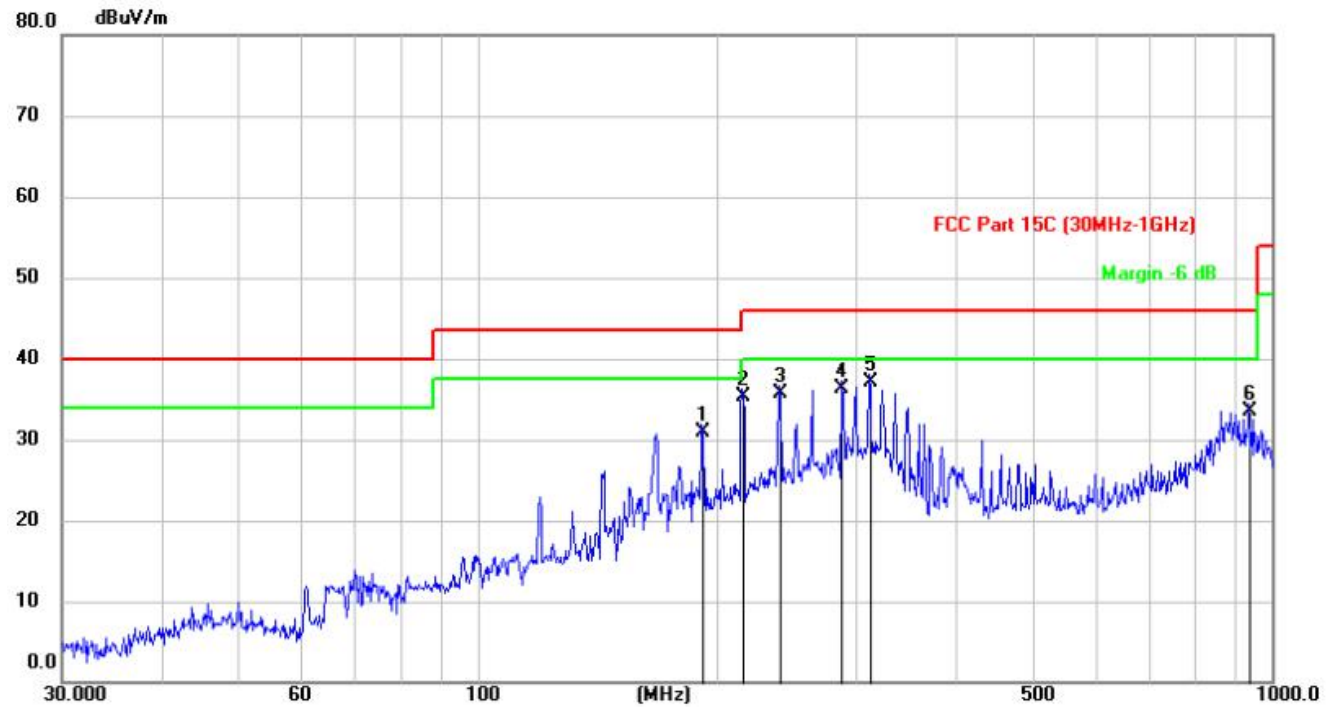

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		192.0141	49.25	-18.34	30.91	43.50	-12.59	QP
2	*	215.9482	52.65	-17.29	35.36	43.50	-8.14	QP
3		240.0714	51.83	-16.13	35.70	46.00	-10.30	QP
4		287.9904	51.17	-14.96	36.21	46.00	-9.79	QP
5		312.0700	51.29	-14.14	37.15	46.00	-8.85	QP
6		936.2024	37.48	-3.90	33.58	46.00	-12.42	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

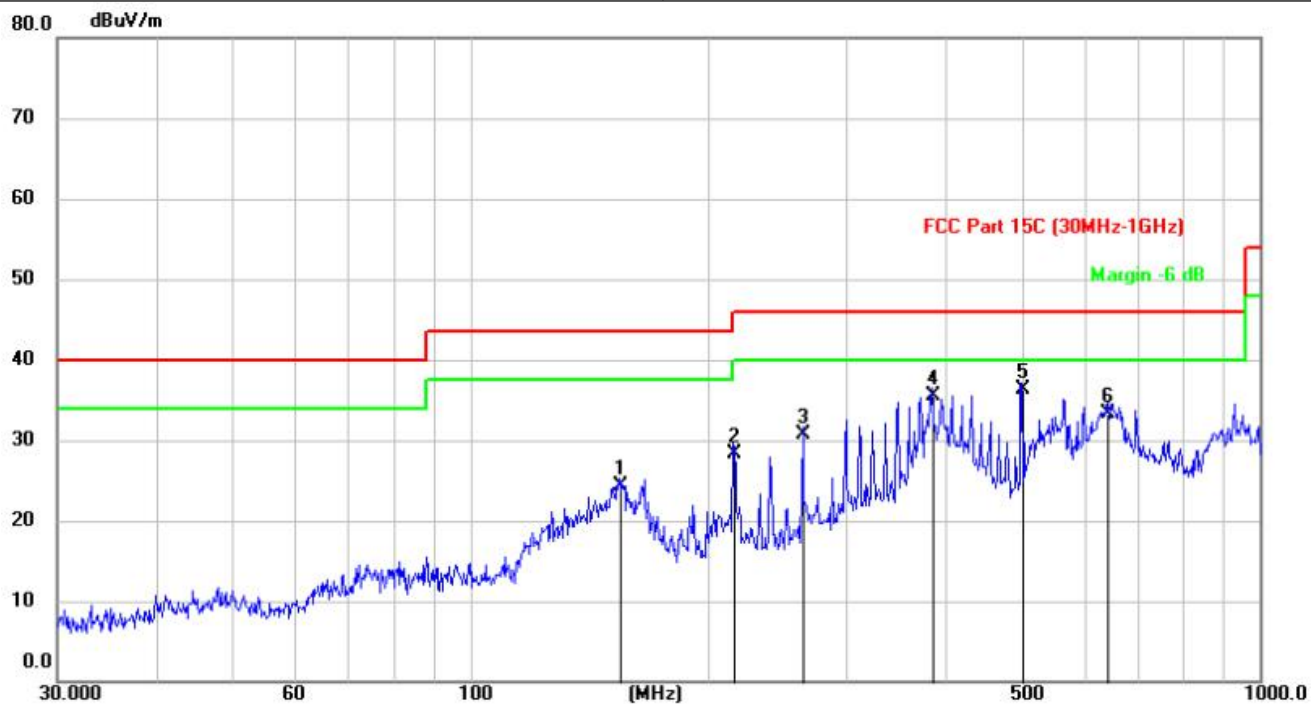


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		154.6577	45.67	-21.28	24.39	43.50	-19.11	QP
2		215.9482	45.67	-17.29	28.38	43.50	-15.12	QP
3		264.0040	46.13	-15.48	30.65	46.00	-15.35	QP
4		384.0663	46.96	-11.43	35.53	46.00	-10.47	QP
5	*	499.9503	46.21	-9.93	36.28	46.00	-9.72	QP
6		642.8612	40.65	-7.41	33.24	46.00	-12.76	QP

Emission Level= Read Level+ Correct Factor

M3-PNDNX-HA:


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

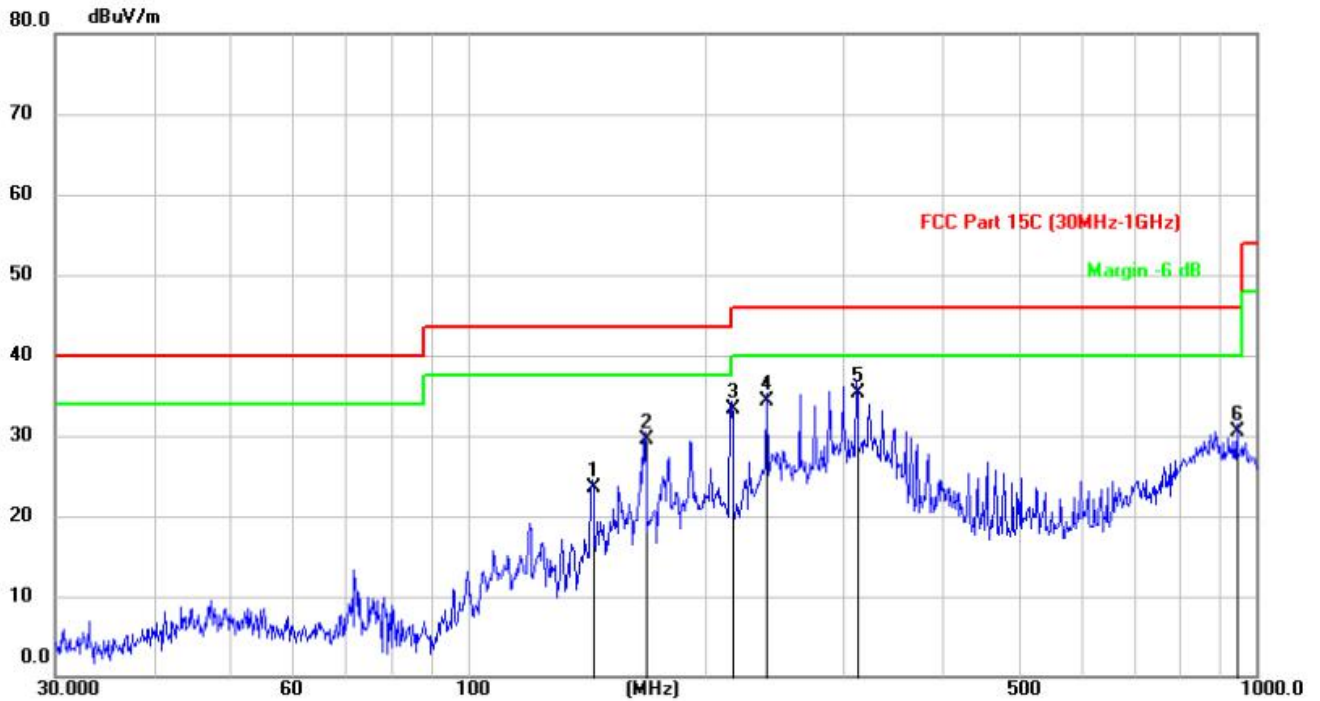

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		143.8800	44.81	-21.33	23.48	43.50	-20.02	QP
2		168.0004	50.28	-20.71	29.57	43.50	-13.93	QP
3		216.0997	50.51	-17.29	33.22	46.00	-12.78	QP
4		239.8189	50.51	-16.14	34.37	46.00	-11.63	QP
5	*	311.9605	49.43	-14.15	35.28	46.00	-10.72	QP
6		948.0958	34.22	-3.81	30.41	46.00	-15.59	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

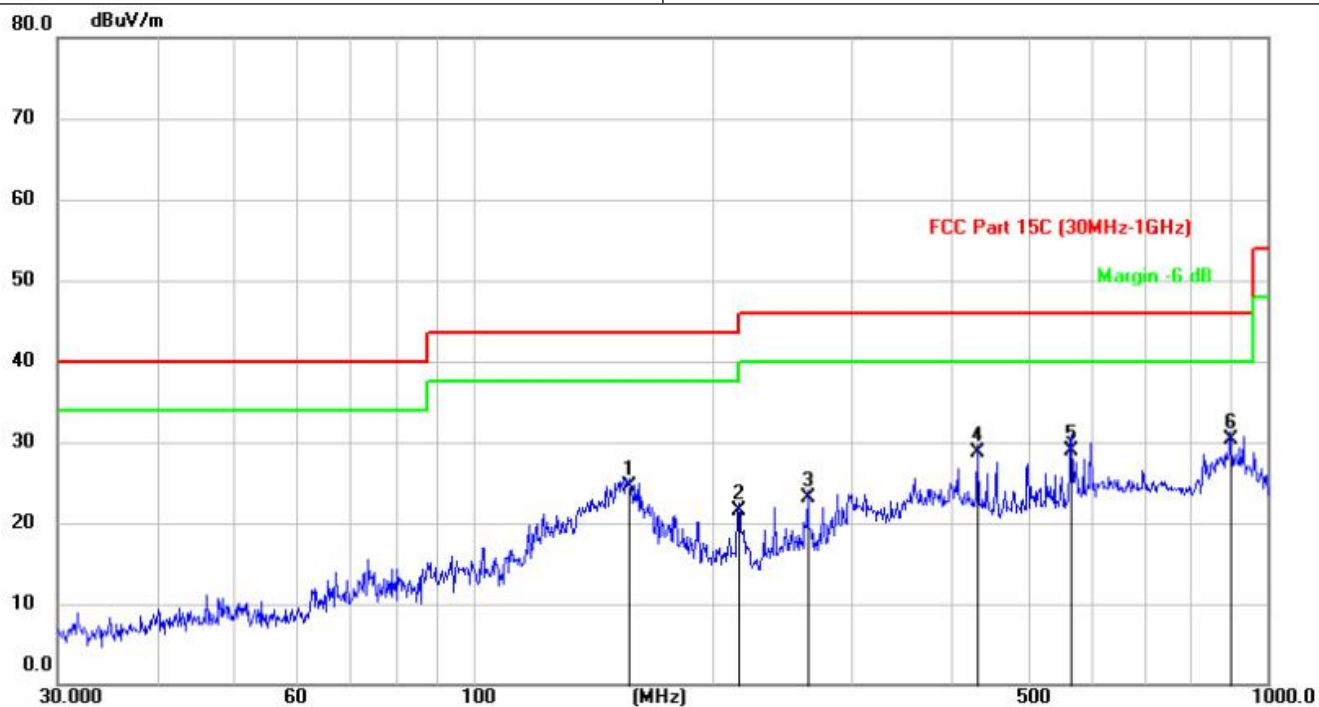


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		157.1725	45.81	-21.22	24.59	43.50	-18.91	QP
2		216.0235	38.86	-17.29	21.57	46.00	-24.43	QP
3		264.0040	38.62	-15.48	23.14	46.00	-22.86	QP
4		432.0908	39.16	-10.53	28.63	46.00	-17.37	QP
5		566.6221	37.31	-8.49	28.82	46.00	-17.18	QP
6	*	899.8318	34.43	-4.19	30.24	46.00	-15.76	QP

Emission Level= Read Level+ Correct Factor

M3-PNDN-HA: .


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

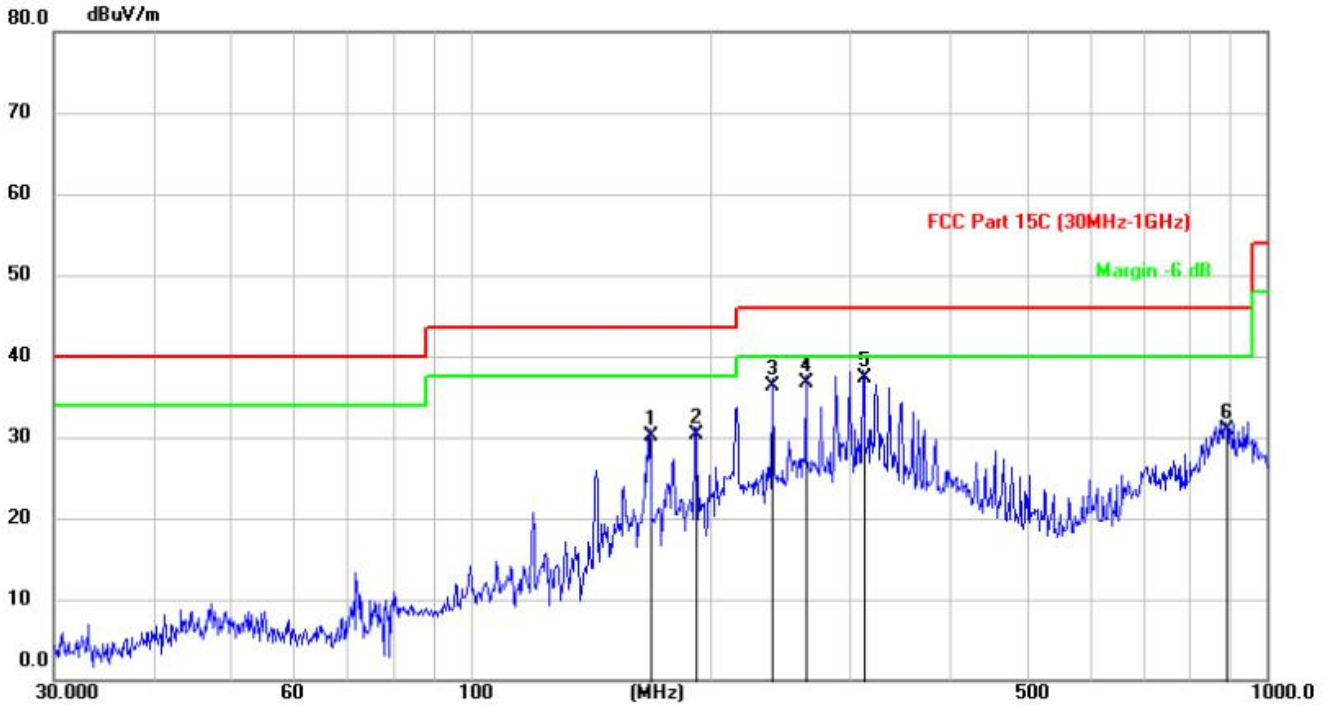

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		168.0004	50.80	-20.71	30.09	43.50	-13.41	QP
2		192.2836	48.69	-18.33	30.36	43.50	-13.14	QP
3		239.8189	52.51	-16.14	36.37	46.00	-9.63	QP
4		264.0040	52.14	-15.48	36.66	46.00	-9.34	QP
5	*	311.9605	51.49	-14.15	37.34	46.00	-8.66	QP
6		888.2323	35.42	-4.43	30.99	46.00	-15.01	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

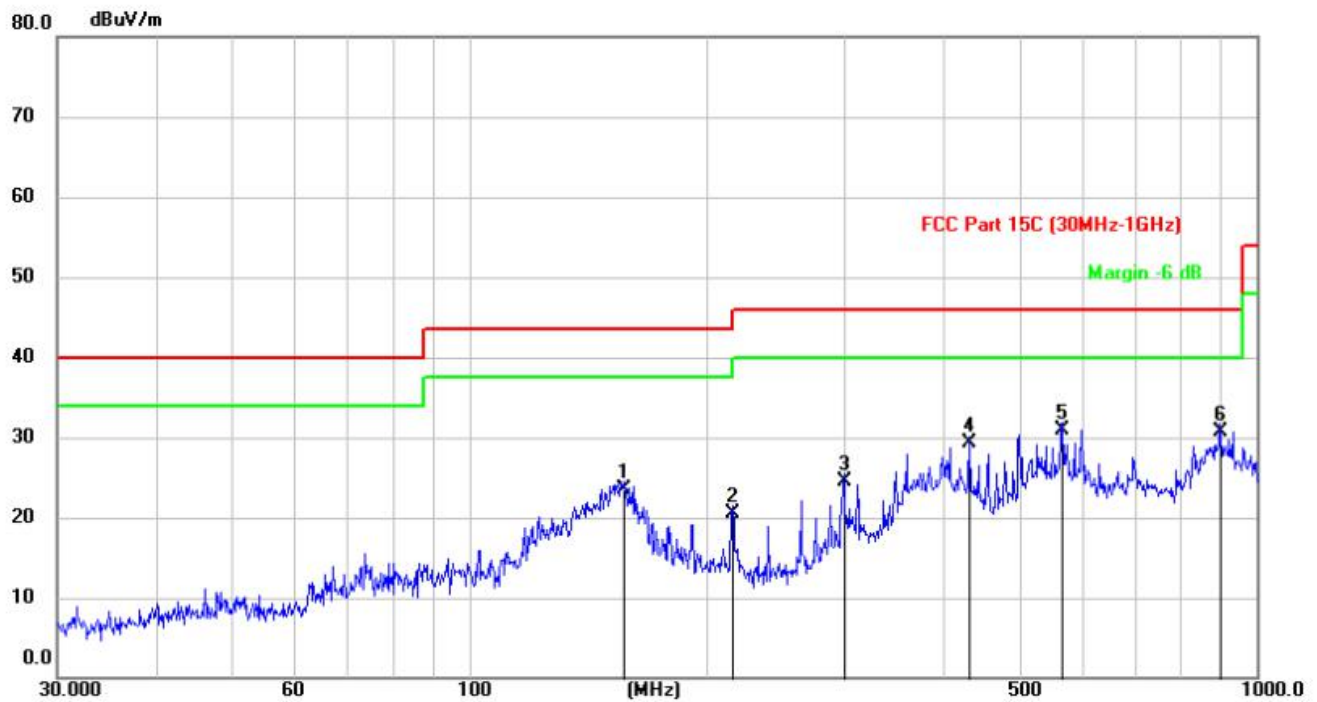


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		157.1725	44.81	-21.22	23.59	43.50	-19.91	QP
2		216.0235	37.86	-17.29	20.57	46.00	-25.43	QP
3		299.8410	39.17	-14.66	24.51	46.00	-21.49	QP
4		432.0908	39.83	-10.53	29.30	46.00	-16.70	QP
5	*	566.6221	39.31	-8.49	30.82	46.00	-15.18	QP
6		899.8318	34.93	-4.19	30.74	46.00	-15.26	QP

Emission Level= Read Level+ Correct Factor

M3-PNDAX:


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

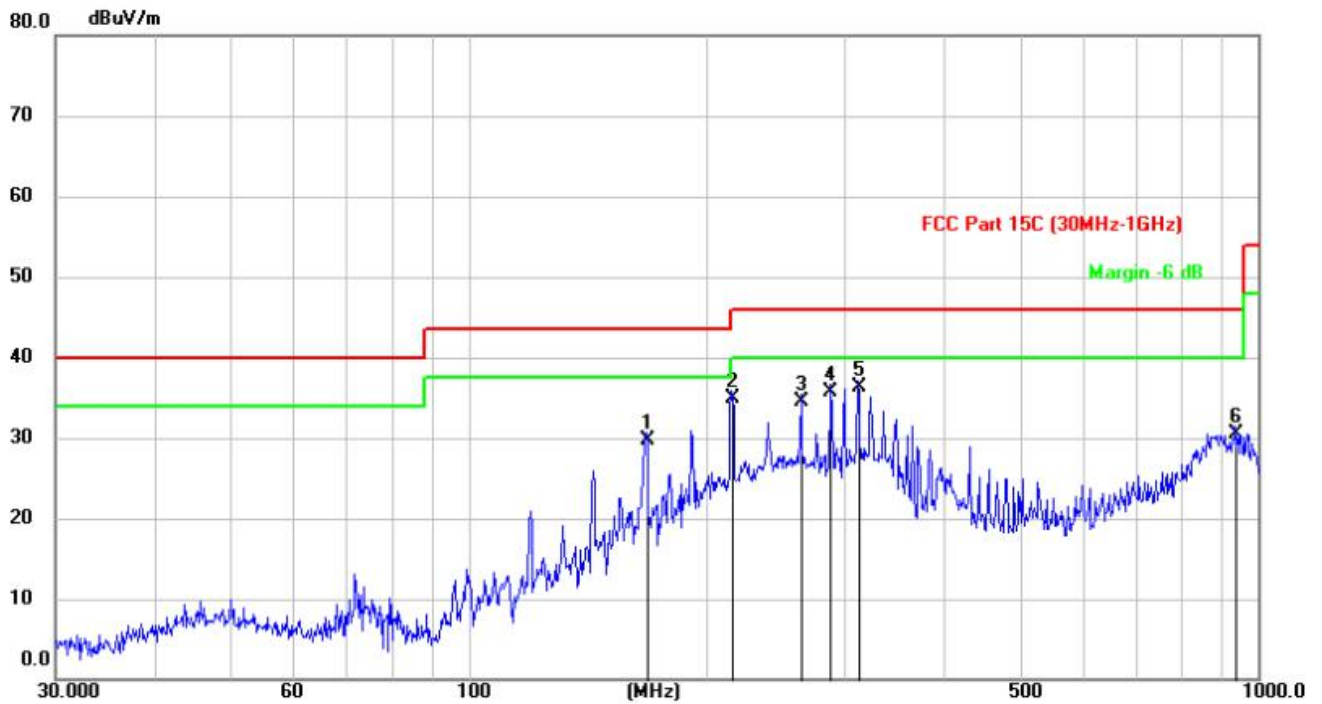

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		167.9419	50.45	-20.72	29.73	43.50	-13.77	QP
2	*	215.9482	52.15	-17.29	34.86	43.50	-8.64	QP
3		264.0040	50.00	-15.48	34.52	46.00	-11.48	QP
4		287.9904	50.67	-14.96	35.71	46.00	-10.29	QP
5		312.0700	50.39	-14.14	36.25	46.00	-9.75	QP
6		936.2024	34.48	-3.90	30.58	46.00	-15.42	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

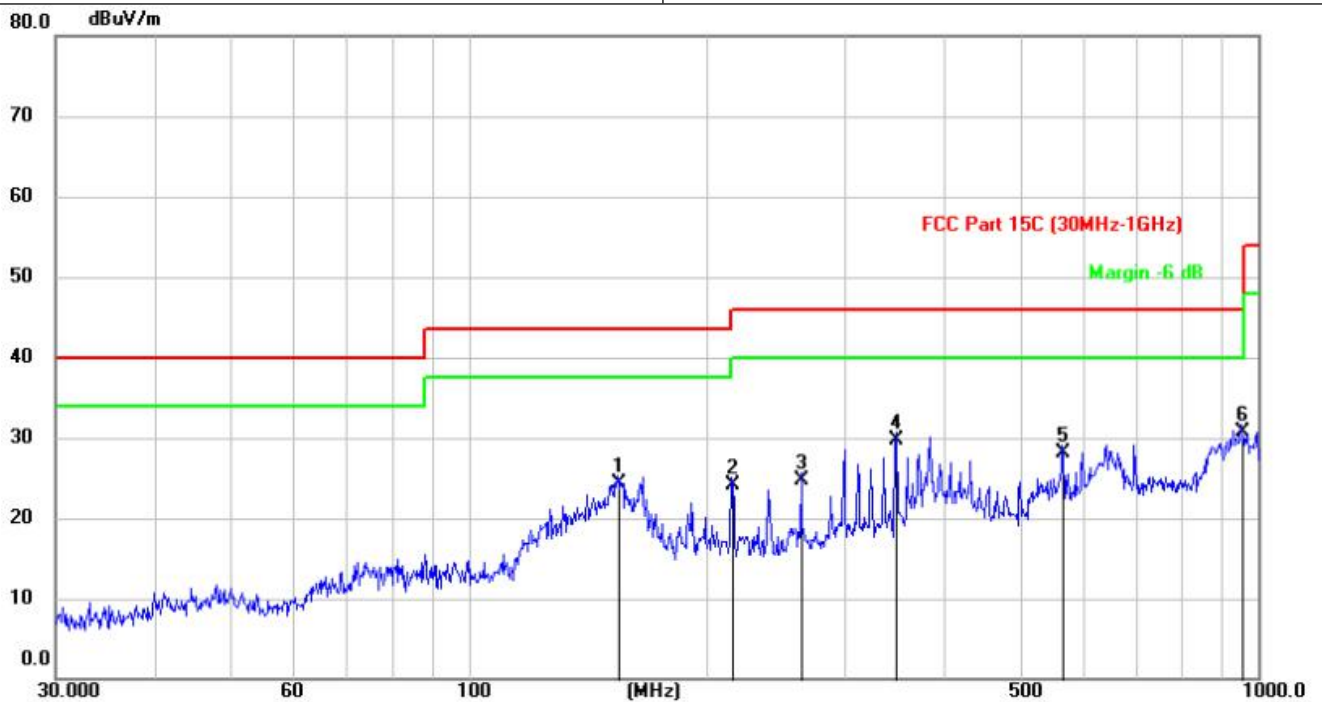


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		154.6577	45.67	-21.28	24.39	43.50	-19.11	QP
2		215.9482	41.47	-17.29	24.18	43.50	-19.32	QP
3		264.0040	40.13	-15.48	24.65	46.00	-21.35	QP
4		348.0274	42.23	-12.62	29.61	46.00	-16.39	QP
5		564.8368	36.71	-8.53	28.18	46.00	-17.82	QP
6	*	954.7681	34.38	-3.76	30.62	46.00	-15.38	QP

Emission Level= Read Level+ Correct Factor

M3-PNDA:


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

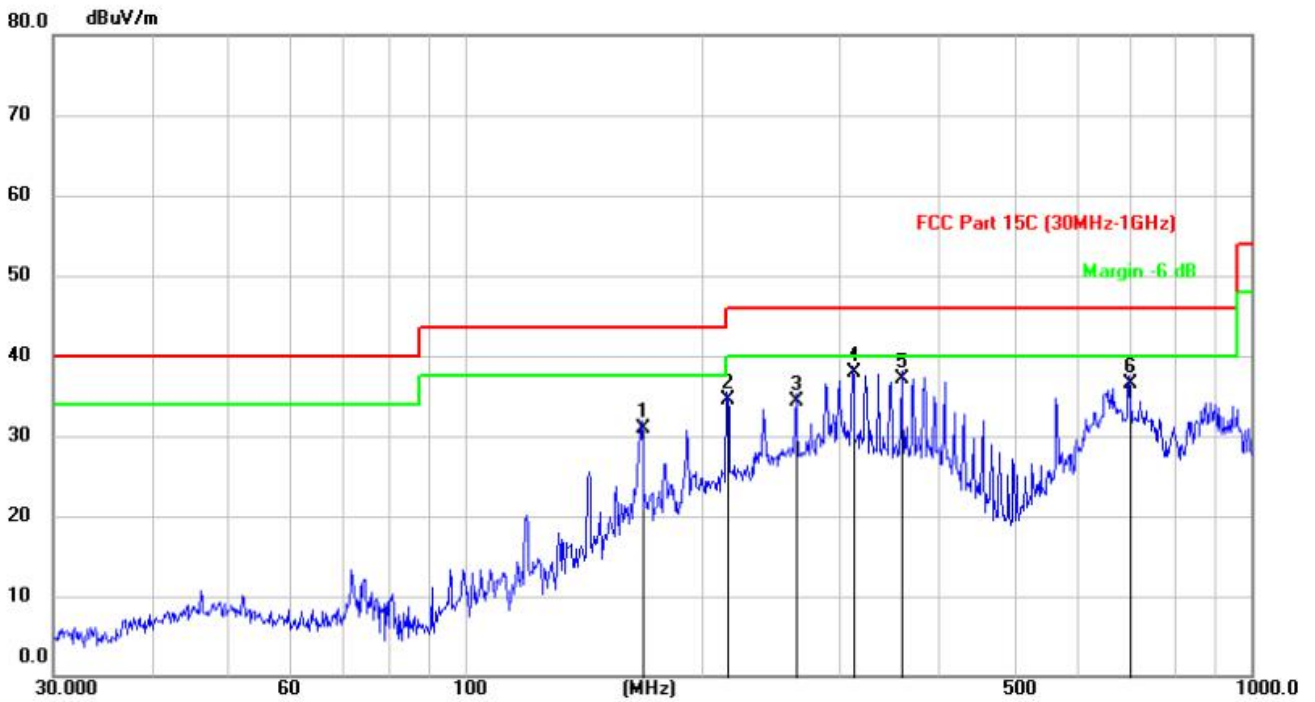

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		168.0595	51.66	-20.70	30.96	43.50	-12.54	QP
2		215.9482	51.80	-17.29	34.51	43.50	-8.99	QP
3		264.0040	49.85	-15.48	34.37	46.00	-11.63	QP
4	*	312.0700	52.03	-14.14	37.89	46.00	-8.11	QP
5		360.0686	49.32	-12.21	37.11	46.00	-8.89	QP
6		699.7950	43.59	-7.15	36.44	46.00	-9.56	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

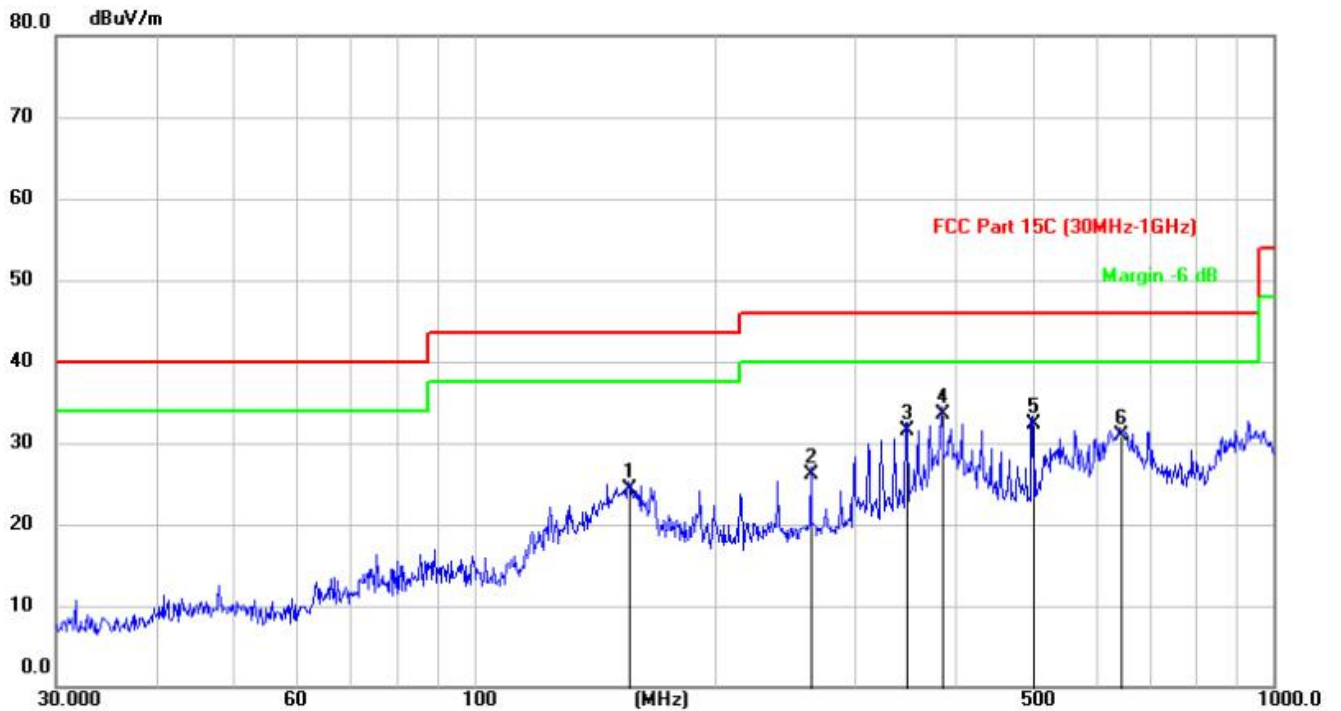


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		156.0192	45.63	-21.24	24.39	43.50	-19.11	QP
2		264.0040	41.55	-15.48	26.07	46.00	-19.93	QP
3		347.9053	44.12	-12.63	31.49	46.00	-14.51	QP
4	*	384.0663	44.88	-11.43	33.45	46.00	-12.55	QP
5		499.9503	42.25	-9.93	32.32	46.00	-13.68	QP
6		643.5379	38.31	-7.40	30.91	46.00	-15.09	QP

Emission Level= Read Level+ Correct Factor

M3-PNDNX:


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

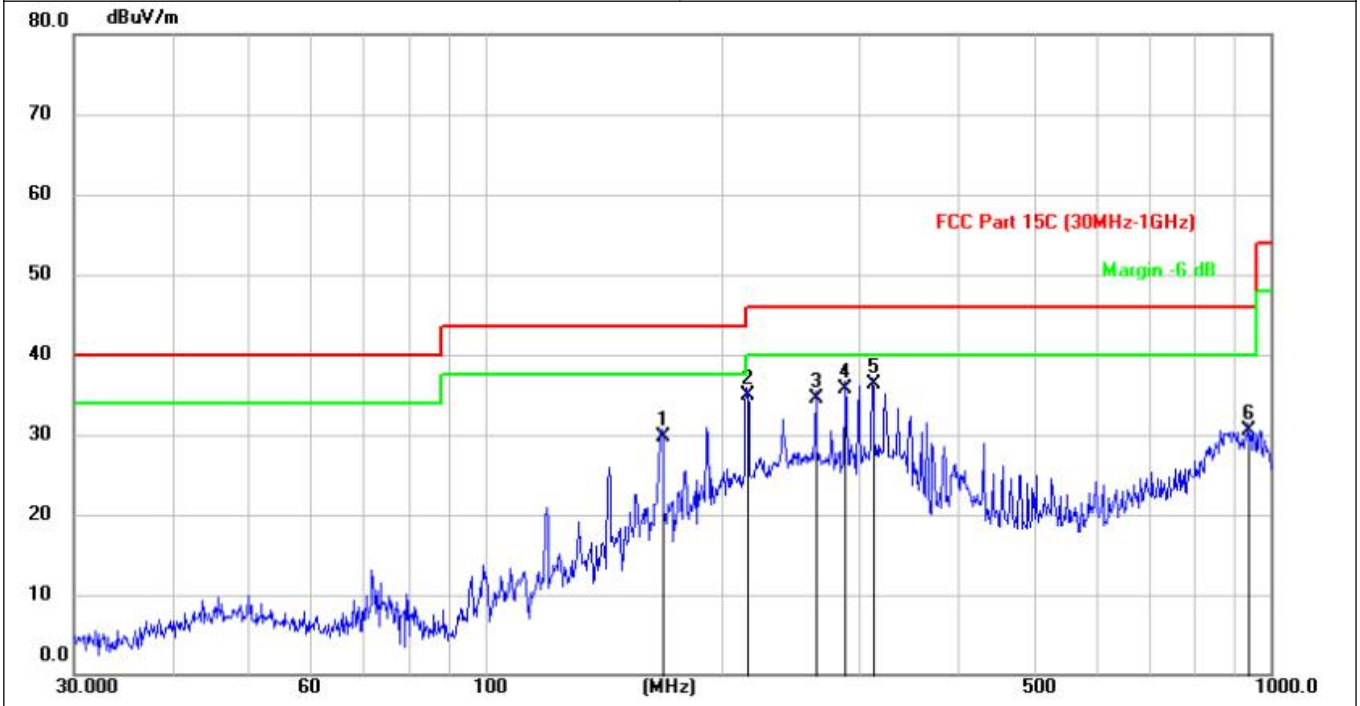

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		167.9419	50.45	-20.72	29.73	43.50	-13.77	QP
2	*	215.9482	52.15	-17.29	34.86	43.50	-8.64	QP
3		264.0040	50.00	-15.48	34.52	46.00	-11.48	QP
4		287.9904	50.67	-14.96	35.71	46.00	-10.29	QP
5		312.0700	50.39	-14.14	36.25	46.00	-9.75	QP
6		936.2024	34.48	-3.90	30.58	46.00	-15.42	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

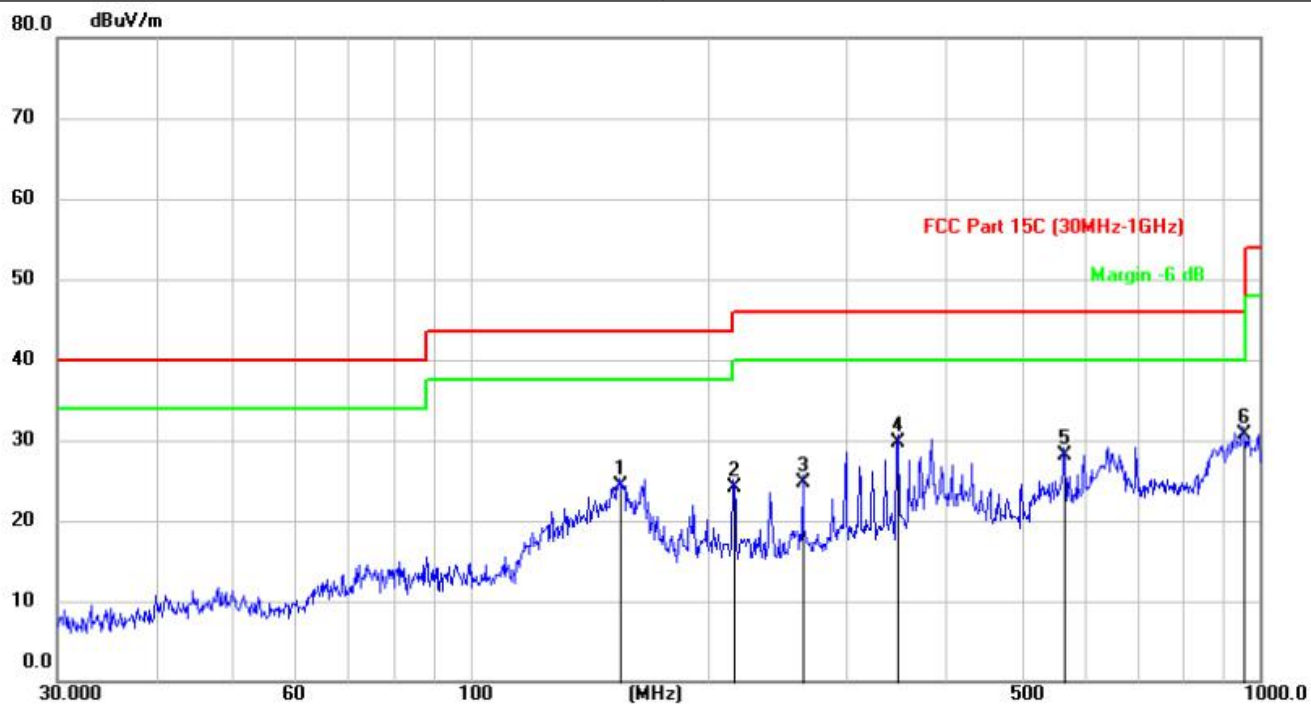


No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		154.6577	45.67	-21.28	24.39	43.50	-19.11	QP
2		215.9482	41.47	-17.29	24.18	43.50	-19.32	QP
3		264.0040	40.13	-15.48	24.65	46.00	-21.35	QP
4		348.0274	42.23	-12.62	29.61	46.00	-16.39	QP
5		564.8368	36.71	-8.53	28.18	46.00	-17.82	QP
6	*	954.7681	34.38	-3.76	30.62	46.00	-15.38	QP

Emission Level= Read Level+ Correct Factor

M3-PNDN:


Test voltage:	DC 3.6V
Ant. Pol.:	Horizontal
Test Mode:	TX BLE Mode 2402MHz

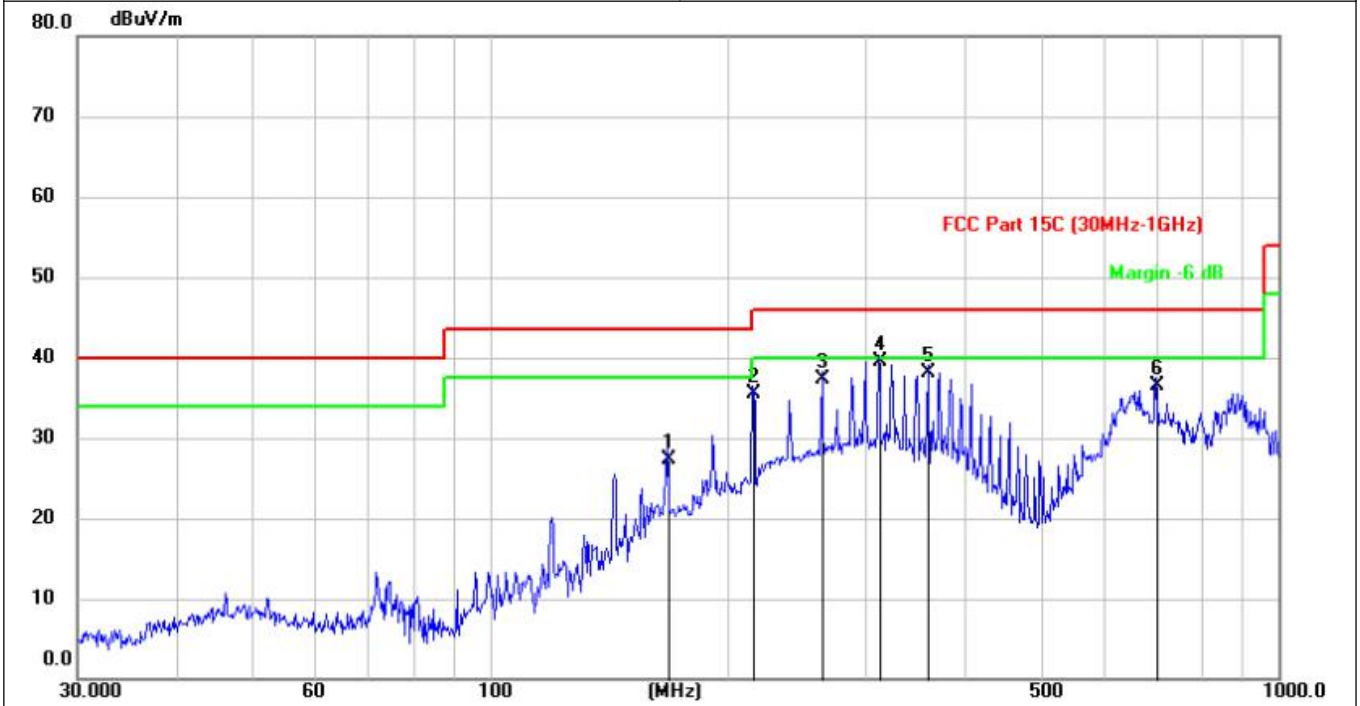

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		168.0595	47.95	-20.70	27.25	43.50	-16.25	QP
2		215.9482	52.80	-17.29	35.51	43.50	-7.99	QP
3		264.0040	52.85	-15.48	37.37	46.00	-8.63	QP
4	*	312.0700	53.74	-14.14	39.60	46.00	-6.40	QP
5		360.0686	50.32	-12.21	38.11	46.00	-7.89	QP
6		699.7950	43.59	-7.15	36.44	46.00	-9.56	QP

Emission Level= Read Level+ Correct Factor

Test voltage:	DC 3.6V
Ant. Pol.:	Vertical
Test Mode:	TX BLE Mode 2402MHz

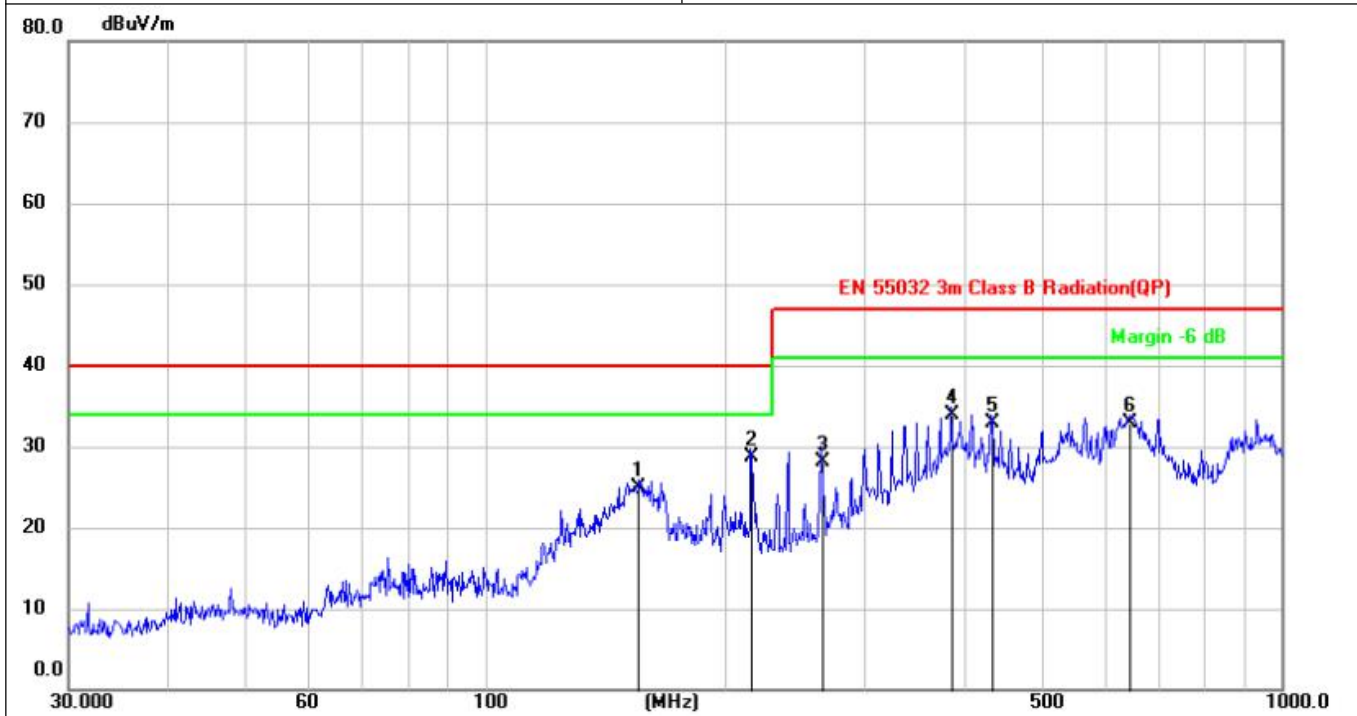

No.	Mk.	Freq. MHz	Reading Level (dBuV)	Correct Factor (dB/m)	Measure- ment (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
1		156.1675	46.13	-21.24	24.89	40.00	-15.11	QP
2	*	215.6929	45.92	-17.30	28.62	40.00	-11.38	QP
3		264.3938	43.55	-15.47	28.08	47.00	-18.92	QP
4		384.9128	45.38	-11.40	33.98	47.00	-13.02	QP
5		432.1830	43.51	-10.52	32.99	47.00	-14.01	QP
6		644.8365	40.21	-7.39	32.82	47.00	-14.18	QP

Emission Level= Read Level+ Correct Factor