



BNetzA-CAB-21/21-21

Test Report

Test report no.: 20114772-18739-0

Date of issue: 2021-07-29

Test result: The test item - **passed** - and complies with the listed standards.

Applicant

Divigraph (Pty) LTD

Manufacturer

Divigraph (Pty) LTD

Test Item

VP2000-01

RF-Spectrum Testing according to:

FCC 47 CFR Part 15

Radio Frequency Devices (Subpart C)

RSS-247

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen

General Requirements for Compliance of Radio Apparatus

Tested by
(name, function, signature)

Karsten Gerald
Head of Laboratory RF
(p.O. Andreas Bender
Head of Laboratory)

signature

Approved by
(name, function, signature)

Dr.-Ing. Harald Ansorge
Managing Director

signature

| Applicant and Test item details | |
|--|---|
| Applicant | Divigraph (Pty) LTD 28 Prosperity Park, Computer Road, Milnerton 7441 Cape Town, South Africa Fon: +27 21 065 0344 Fax: +27 86 689 5732 |
| Manufacturer | Divigraph (Pty) LTD 28 Prosperity Park, Computer Road, Milnerton 7441 Cape Town, South Africa |
| Test item description | Wireless Condition Monitoring |
| Model/Type reference | VP2000-01 |
| Standard specific information | |
| FCC ID | 2A0ADEM51 |
| IC | 23417-EM51 |
| PMN | VP2000-01 |
| HVIN | VP2000-01 |
| FVIN | v1 |
| HMN | N/A |
| Frequency | 2.4 GHz ISM band (2400 – 2483.5 MHz) |
| Technology | Bluetooth Low Energy (BLE) |
| Antenna | Integrated PCB antenna |
| Power supply | 3.6 V DC via Lithium primary cell (Lithium-Thionyl Chloride) |
| Temperature range | -40 °C to +85 °C |

Disclaimer and Notes

The content of this report relates to the mentioned test sample(s) only.
Without a written permit of IBL-Lab GmbH, this test report shall not be reproduced, except in full.

The last valid version is available at TAMSys®.

Copyright ©: All rights reserved by IBL-Lab GmbH

Within this test report, a point / comma is used as a decimal separator.
If otherwise, a detailed note is added adjoined to its use.

IBL-Lab GmbH does not take test samples. The sample used for testing is provided by the applicant.

Decision rule: Binary Statement for Simple Acceptance Rule according ILAC-G8:09/2019

1 TABLE OF CONTENTS

| | | |
|---------|---|----|
| 1 | TABLE OF CONTENTS..... | 3 |
| 2 | GENERAL INFORMATION | 4 |
| 2.1 | Administrative details..... | 4 |
| 2.2 | Possible test case verdicts | 4 |
| 2.3 | Observations | 5 |
| 2.4 | Opinions and Interpretations | 5 |
| 2.5 | Revision History..... | 5 |
| 2.6 | Further documents | 5 |
| 3 | ENVIRONMENTAL & TEST CONDITIONS | 6 |
| 3.1 | Environmental conditions | 6 |
| 3.2 | Normal and extreme test conditions..... | 6 |
| 4 | TEST STANDARDS AND REFERENCES..... | 6 |
| 5 | EQUIPMENT UNDER TEST (EUT)..... | 7 |
| 5.1 | Product Description | 7 |
| 5.2 | Test Item Description..... | 7 |
| 5.3 | Technical Data of Equipment | 7 |
| 5.4 | Additional Information..... | 8 |
| 5.5 | Test modes | 8 |
| 6 | SUMMARY OF TEST RESULTS | 9 |
| 7 | TEST RESULTS | 10 |
| 7.1 | DTS Bandwidth (6 dB)..... | 10 |
| 7.2 | Occupied Bandwidth (99% OBW) | 14 |
| 7.3 | RF Output Power (Conducted Peak Power) | 21 |
| 7.4 | Antenna Gain (calculated)..... | 28 |
| 7.5 | Peak Power Spectral Density (PSD)..... | 31 |
| 7.6 | Band Edge Compliance (BEC), conducted | 38 |
| 7.7 | Band Edge Compliance (BEC), radiated..... | 42 |
| 7.8 | Conducted Spurious Emissions (CSE) | 44 |
| 7.9 | Radiated Spurious Emissions (RSE)..... | 49 |
| 8 | TEST SETUP DESCRIPTION | 72 |
| 8.1 | Semi Anechoic Chamber with Ground Plane | 72 |
| 8.2 | Fully Anechoic Chamber | 74 |
| 8.3 | Radiated measurements > 18 GHz..... | 76 |
| 8.4 | Conducted measurements WLAN test system R&S TS 8997 | 77 |
| 9 | MEASUREMENT UNCERTAINTIES..... | 78 |
| Annex A | EUT Photographs, external | 79 |
| Annex B | EUT Photographs, internal | 85 |
| Annex C | Test Setup Photographs | 87 |

2 GENERAL INFORMATION

2.1 Administrative details

| | |
|---------------------------------|---|
| Testing laboratory | IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 Sankt Ingbert / Germany Fon: +49 6894 38938-0 Fax: +49 6894 38938-99 URL: www.ib-lenhardt.de E-Mail: info@ib-lenhardt.de |
| Accreditation | The testing laboratory is accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025:2018. Scope of testing and registration number: <ul style="list-style-type: none"> • Electronics D-PL-21375-01-01 • Electromagnetic Compatibility D-PL-21375-01-02 • Electromagnetic Compatibility and Telecommunication (FCC requirements) D-PL-21375-01-03 • Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards D-PL-21375-01-04 • ISED Company Number 27156 • Testing Laboratory CAB Identifier DE0020 • Telekommunikation (TK) D-PL-21375-01-05 Website DAkKS: https://www.dakks.de/ The Deutsche Akkreditierungsstelle GmbH (DAkKS) is also a signatory to ILAC Mutual Recognition Arrangement |
| Testing location | IBL-Lab GmbH Heinrich-Hertz-Allee 7 66386 St. Ingbert / Germany |
| Date of receipt of test samples | 2021-03-03 |
| Start – End of tests | 2021-03-08 – 2021-06-25 |

2.2 Possible test case verdicts

| | |
|---|----------------------|
| Test sample meets the requirements | P (PASS) |
| Test sample does not meet the requirements | F (FAIL) |
| Test case does not apply to the test sample | N/A (Not applicable) |
| Test case not performed | N/P (Not performed) |

2.3 Observations

No additional observations other than the reported observations within this test report have been made.

2.4 Opinions and Interpretations

No appropriate opinions or interpretations according ISO/IEC 17025:2017 clause 7.8.7 are within this test report.

2.5 Revision History

-0 Initial Version

2.6 Further documents

List of further applicable documents belonging to the present test report:
- no additional documents -

3 ENVIRONMENTAL & TEST CONDITIONS

3.1 Environmental conditions

| | |
|---------------------|---------------|
| Temperature | 20°C ± 5°C |
| Relative humidity | 25-75 % r.H. |
| Barometric Pressure | 860-1060 mbar |
| Power supply | 230 V / 50 Hz |

3.2 Normal and extreme test conditions

| | minimum | nominal | maximum |
|-------------------|---------|-----------|---------|
| Temperature | -/- | +22 °C | +50 °C |
| Relative humidity | -/- | 45 % r.h. | -/- |
| Power supply | -/- | 3.6 V DC | -/- |

4 TEST STANDARDS AND REFERENCES

| Test standard (accredited) | Description |
|----------------------------|--|
| FCC 47 CFR Part 15 | Radio Frequency Devices (Subpart C) |
| RSS-247 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
| RSS-Gen | General Requirements for Compliance of Radio Apparatus |

| Test standard (not accredited) | Description |
|--------------------------------|-------------|
| none | --- |

| Reference | Description |
|-------------------------------------|---|
| ANSI C63.4-2014 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ANSI C63.10-2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |
| 558074 D01 15.247 Meas Guide v05r02 | Guidance for compliance measurements on digital transmission systems, frequency hopping spread spectrum systems and hybrid system devices operating under section 15.247 of the FCC rules |

5 EQUIPMENT UNDER TEST (EUT)

5.1 Product Description

Wireless Condition Monitoring

*: as declared by applicant

5.2 Test Item Description

| | |
|-------------------------|---|
| Model name* | VP2000-01 |
| Serial number* | radiated EUT: 8192 conducted EUT: 8194 |
| PCB identifier* | VP2000-01 |
| Hardware status* | v5.5 |
| Software status* | FVIN v1 |

*: as declared by applicant; please see Annex A for EUT photographs.


5.3 Technical Data of Equipment

| | |
|------------------------------------|--|
| Operational frequency band* | 2.4 GHz ISM band (2400 – 2483.5 MHz) |
| Technology | Bluetooth Low Energy (BLE) |
| Modulation type* | GFSK |
| Data rate* | LE 2M PHY: 2 Mb/s LE 1M PHY: 1 Mb/s LE Coded PHY (S=2): 500 Kb/s LE Coded PHY (S=8): 125 Kb/s |
| Number of channels* | 40 (3 advertising channels, 37 data channels) |
| Channel bandwidth* | 2 MHz |
| Channel spacing* | 2 MHz |
| Antenna* | Integrated PCB antenna |
| Rated RF Output Power* | < 100 mW (20 dBm) |
| Power supply* | 3.6 V DC via Lithium primary cell (Lithium-Thionyl Chloride) |
| Temperature range* | -40 °C to +85 °C |

*: as declared by applicant; further details in clause 5.4.1 of test specification

| 5.4 Additional Information | |
|---------------------------------------|-----------------------------|
| Model differences | none |
| Ancillaries tested with | none |
| Additional equipment used for testing | Notebook with test software |

| 5.5 Test modes | |
|----------------|---------------------------------------|
| Mode 1 | GFSK, 125 kbit/s, power=10 dBm (max.) |
| Mode 2 | GFSK, 500 kbit/s, power=10 dBm (max.) |
| Mode 3 | GFSK, 1 Mbit/s, power=10 dBm (max.) |
| Mode 4 | GFSK, 2 Mbit/s, power=10 dBm (max.) |
| Low Channel | CH37 = 2402 MHz |
| Mid Channel | CH17 = 2440 MHz |
| High Channel | CH39 = 2480 MHz |

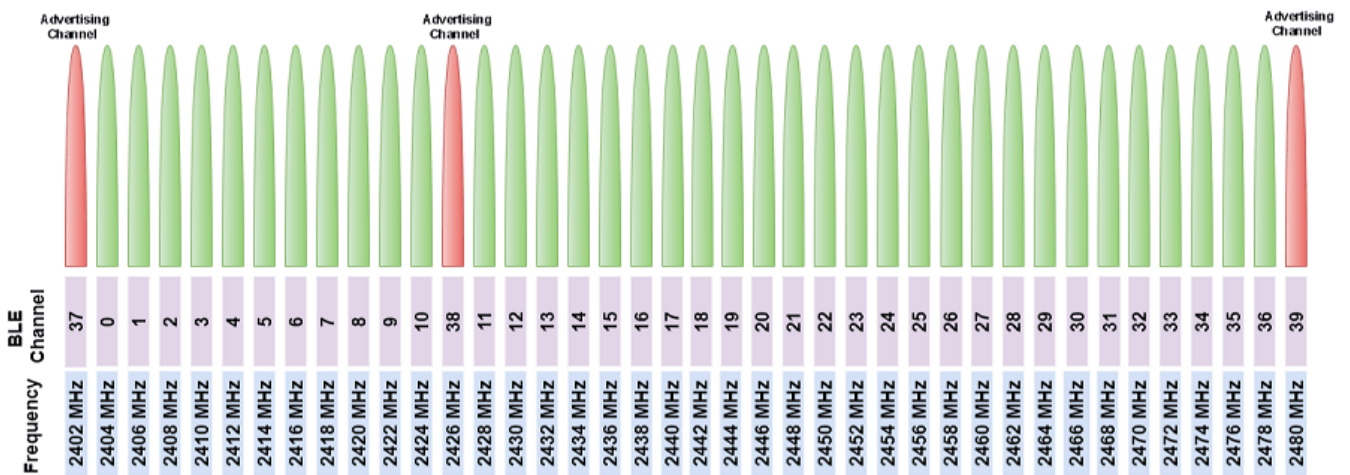

© <https://de.mathworks.com>

6 SUMMARY OF TEST RESULTS

Test specification

FCC 47 CFR Part 15
RSS-247 / RSS-Gen

| Clause | Requirement / Test Case | Result - Remark | Verdict |
|---|--|-------------------------------|----------|
| §15.247(a)(2) RSS-247, 5.2 (a) | DTS bandwidth (6 dB) | KDB 558074, clause: 8.2 | - PASS - |
| RSS Gen, 6.7 | Occupied bandwidth (99%) | -/- | - PASS - |
| §15.247(b)(3) RSS-247, 5.4 (d) | RF output power (conducted peak power) | KDB 558074, clause: 8.3.1 | - PASS - |
| §15.247(b)(4) RSS-247, 5.4 (d) | Antenna gain (calculated) | -/- | - PASS - |
| §15.247(e) RSS-247, 5.2 (b) | Peak power spectral density (PSD) | KDB 558074, clause: 8.4 | - PASS - |
| §15.247(d) RSS-247, 5.5 | Band edge compliance (BEC), conducted | KDB 558074, clause: 8.5 | - PASS - |
| §15.247(d) RSS-247, 5.5 | Band edge compliance (BEC), radiated | KDB 558074, clause: 8.7 | - PASS - |
| §15.247(d) RSS-247, 5.5 | Conducted spurious emissions (CSE) | KDB 558074 DTS clause: 8.5 | - PASS - |
| 15.247(d) / §15.209 RSS-247, 5.5 / RSS-Gen, 8.9 | Radiated spurious emissions (RSE) | -/- | - PASS - |
| §15.207 RSS-Gen, 8.8 | AC conducted emissions | EUT is battery powered | - N/A - |

Comments and observations

Following pages show requirements and references of FCC Part 15.247, ANSI C63.10 and KDB 558074 only. Same tests are also applicable and valid for RSS-247, with clauses given in table above.

7 TEST RESULTS

7.1 DTS Bandwidth (6 dB)

Applicability

This requirement applies to all types of DTS equipment.

Description

The DTS Bandwidth is defined as the 6 dB bandwidth.

Limit

§15.247

(a)(2) The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

ANSI C63.10, 11.8

The steps are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The automatic bandwidth measurement capability of an instrument may be employed using the 6 dB bandwidth mode.

Test setup: 8.4

Test Results

| EUT Mode | DTS Bandwidth (6 dB) | | | Limit [kHz] |
|----------|----------------------|-------------------|--------------------|-------------|
| | low channel [kHz] | mid channel [kHz] | high channel [kHz] | |
| Mode 1 | 732.7 | 732.7 | 732.7 | ≥ 500 |
| Mode 2 | -/- | -/- | -/- | ≥ 500 |
| Mode 3 | -/- | -/- | -/- | ≥ 500 |
| Mode 4 | 1406 | 1406 | 1406 | ≥ 500 |


Comment:

Verdict


- PASS -

see next plots


Plot 1: Mode 1, DTS Bandwidth, low channel

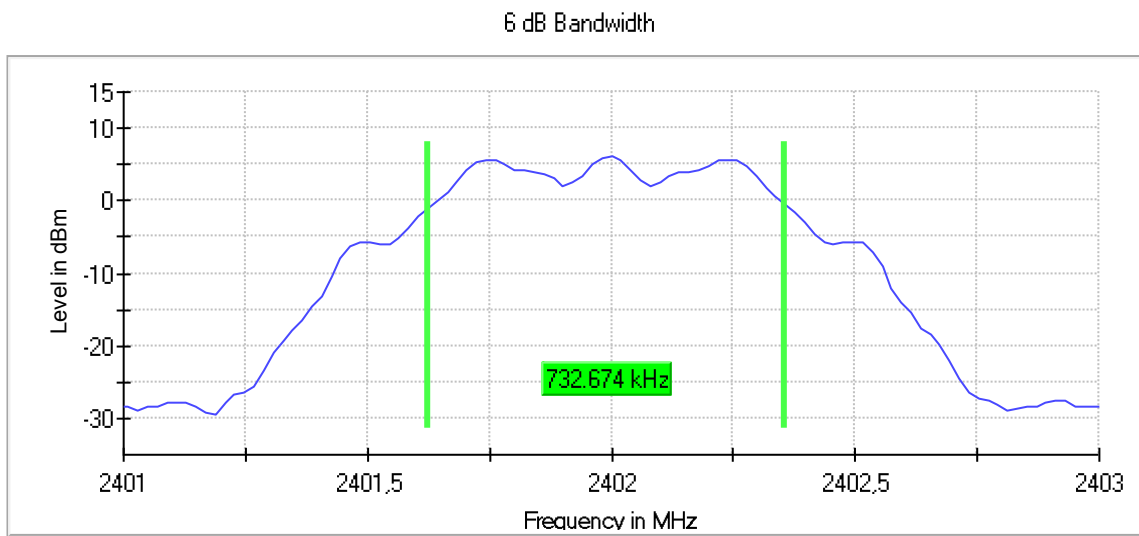


Plot 2: Mode 1, DTS Bandwidth, mid channel

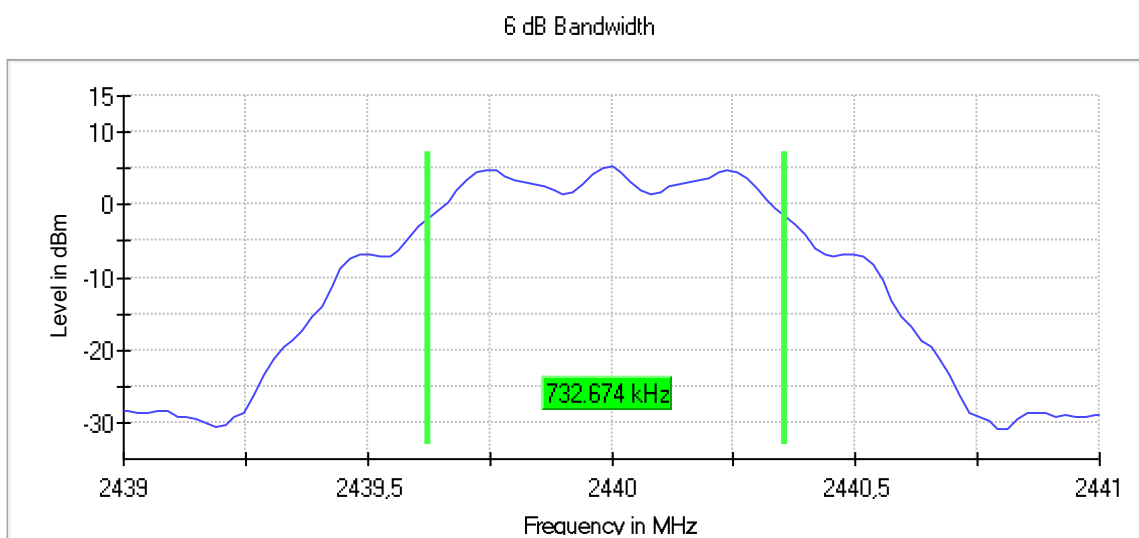

Plot 3: Mode 1, DTS Bandwidth, high channel

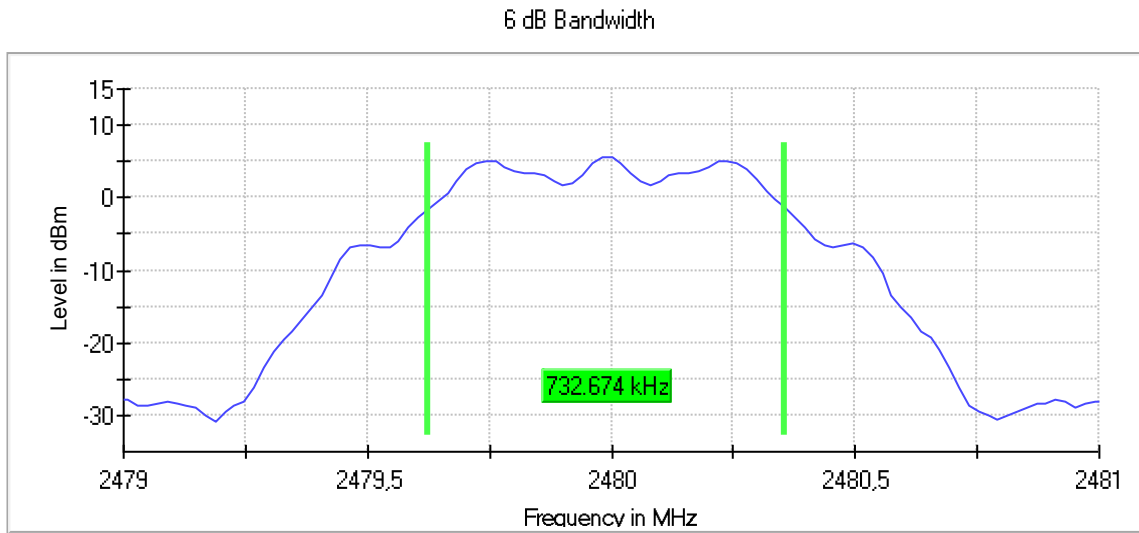


Plot 4: Mode 4, DTS Bandwidth, low channel

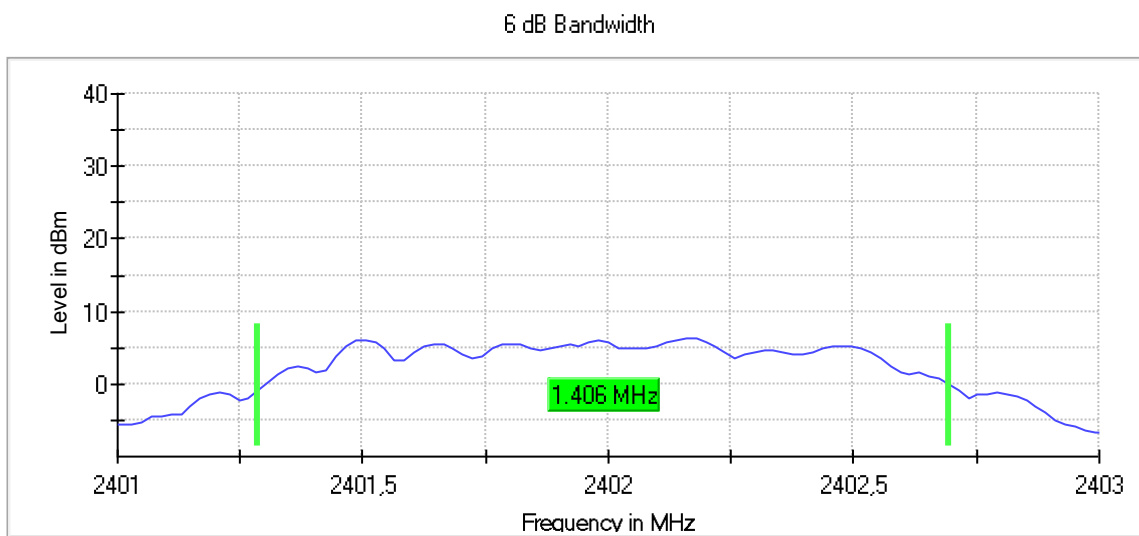


Plot 5: Mode 4, DTS Bandwidth, mid channel

6 dB Bandwidth

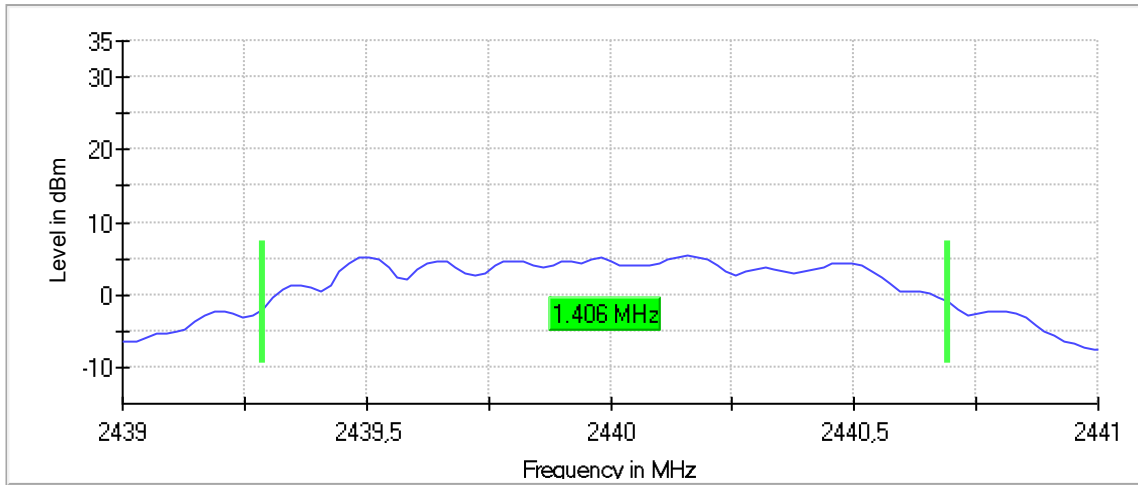

Plot 6: Mode 4, DTS Bandwidth, high channel

6 dB Bandwidth

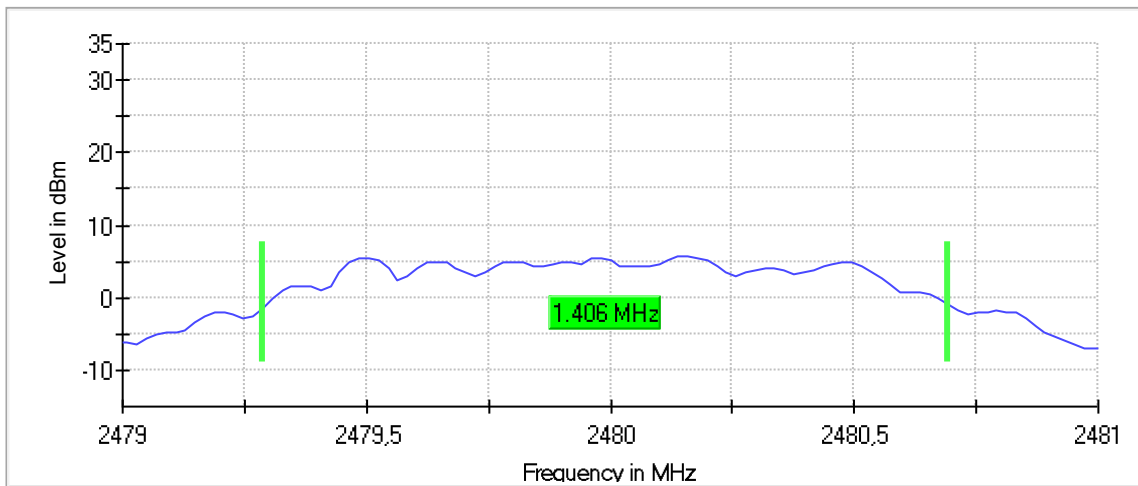

7.2 Occupied Bandwidth (99% OBW)

Applicability

This requirement applies to all types of DTS equipment.

Description

The Occupied Channel Bandwidth is the bandwidth that contains 99 % of the power of the signal (RSS-Gen).

Limit

No limit defined.

Test procedure

ANSI C63.10, 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test setup: 8.4

Test Results

| EUT Mode | Occupied Bandwidth (99%) | | |
|----------|--------------------------|-------------------|--------------------|
| | low channel [kHz] | mid channel [kHz] | high channel [kHz] |
| Mode 1 | 1060 | 1055 | 1055 |
| Mode 2 | 1030 | 1035 | 1035 |
| Mode 3 | 1035 | 1035 | 1030 |
| Mode 4 | 1860 | 1865 | 1860 |


Comment:

Verdict


- PASS -

see next plots

Plot 7: Mode 1, 99% Occupied Bandwidth, low channel

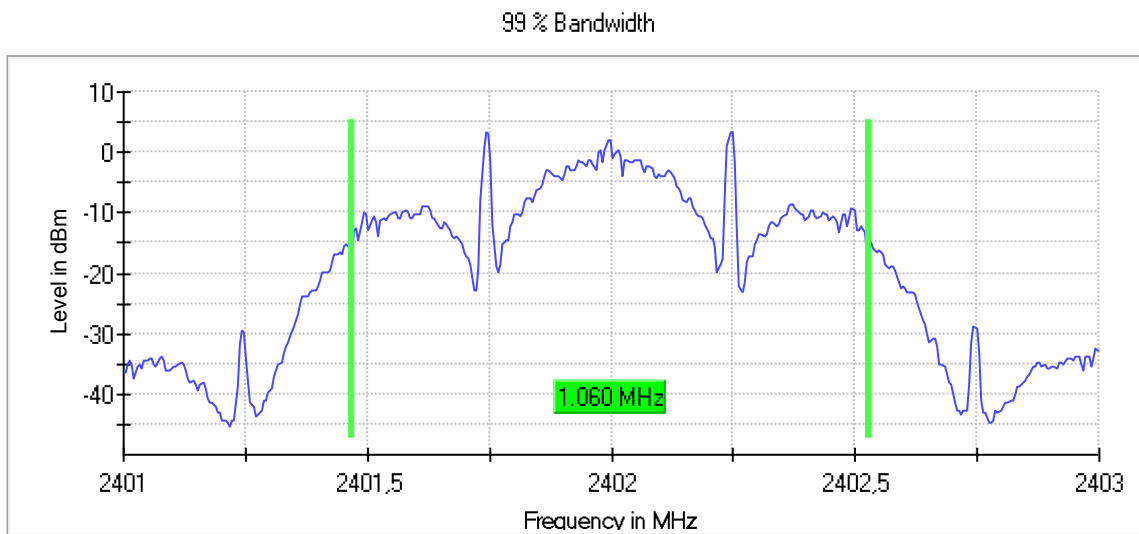


Plot 8: Mode 1, 99% Occupied Bandwidth, mid channel

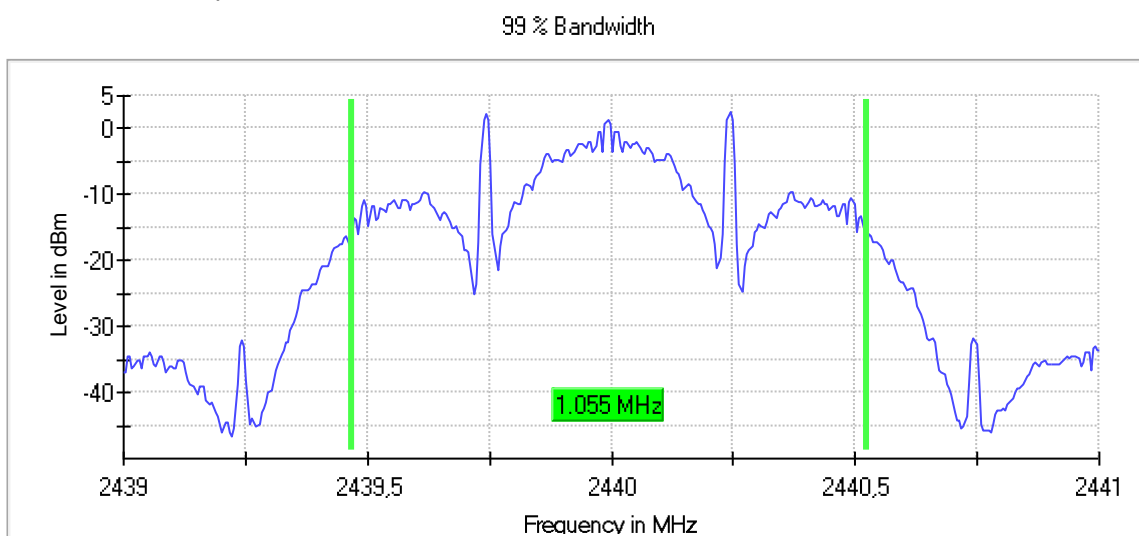


Plot 9: Mode 1, 99% Occupied Bandwidth, high channel

99 % Bandwidth

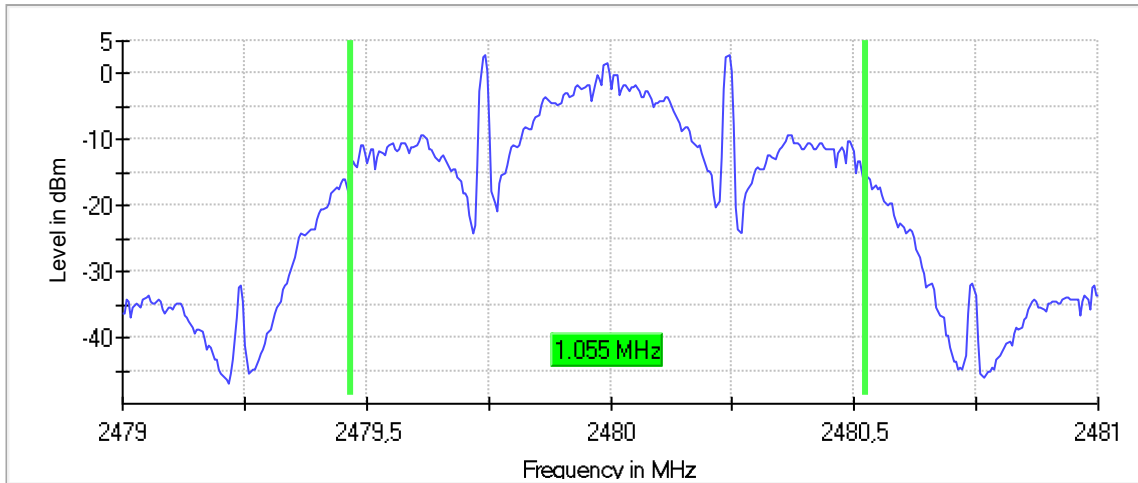


Plot 10: Mode 2, 99% Occupied Bandwidth, low channel

99 % Bandwidth

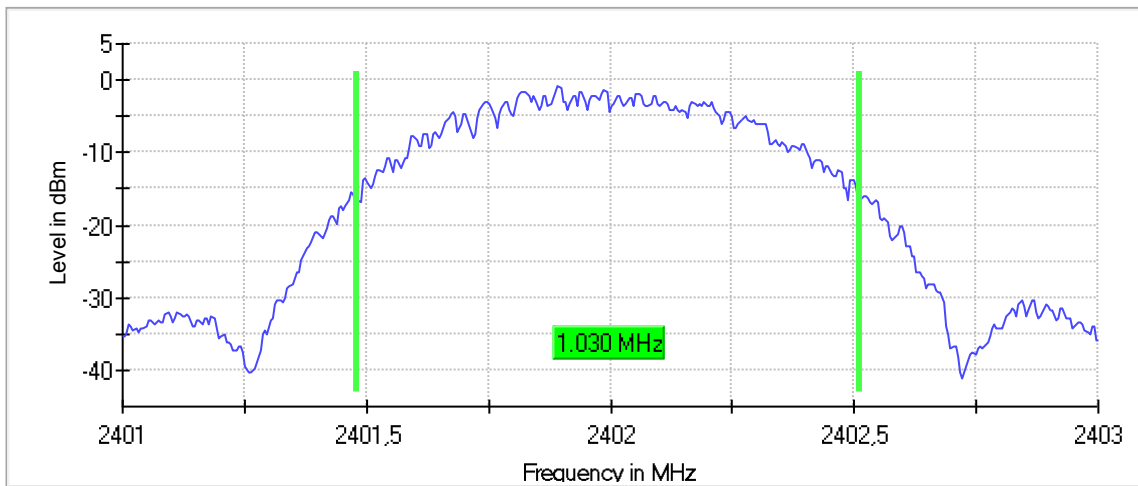


Plot 11: Mode 2, 99% Occupied Bandwidth, mid channel

99 % Bandwidth

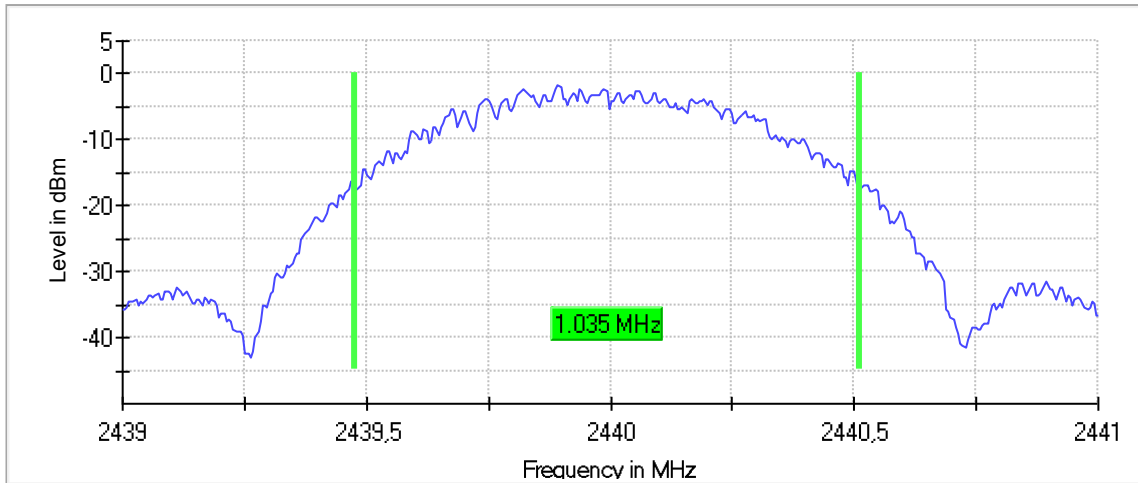


Plot 12: Mode 2, 99% Occupied Bandwidth, high channel

99 % Bandwidth

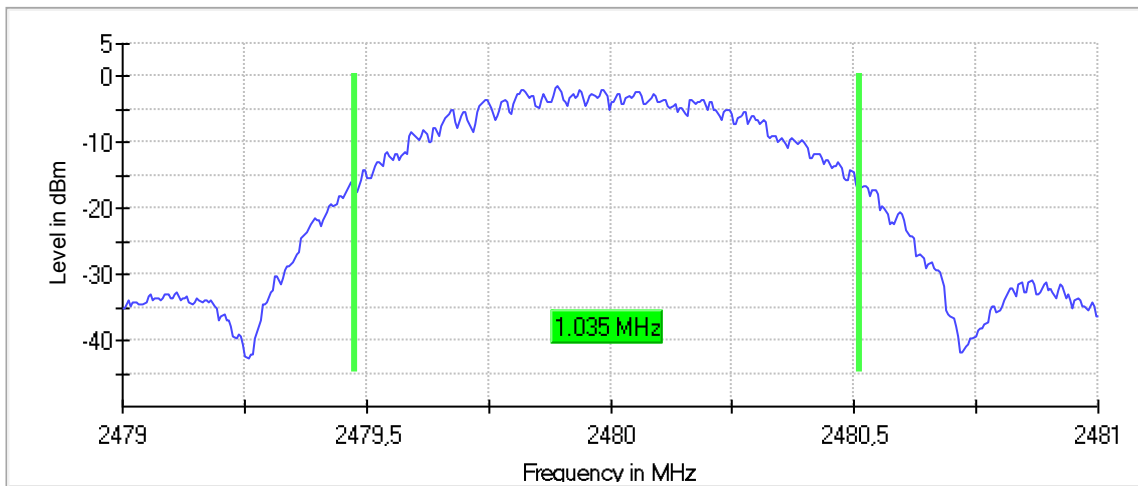


Plot 13: Mode 3, 99% Occupied Bandwidth, low channel

99 % Bandwidth

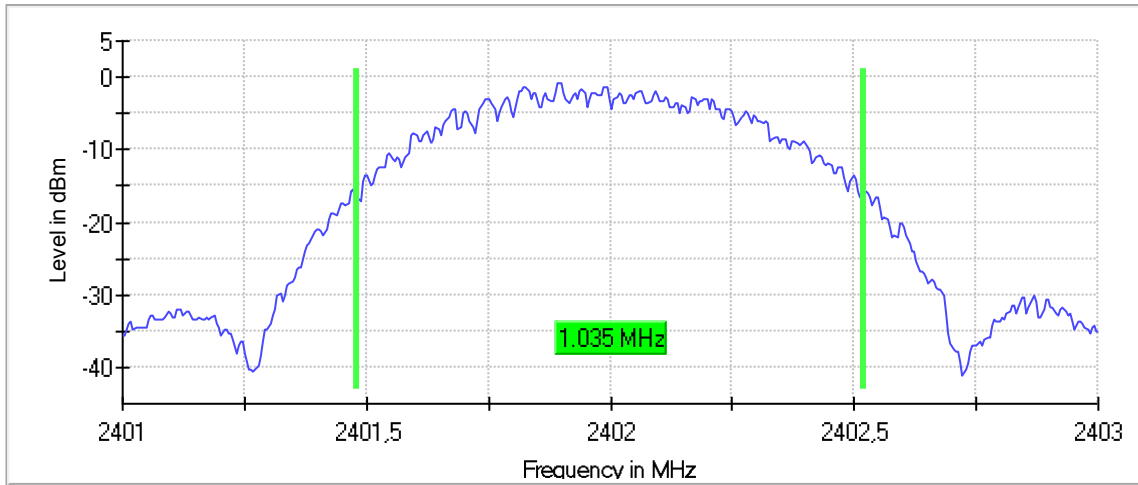


Plot 14: Mode 3, 99% Occupied Bandwidth, mid channel

99 % Bandwidth

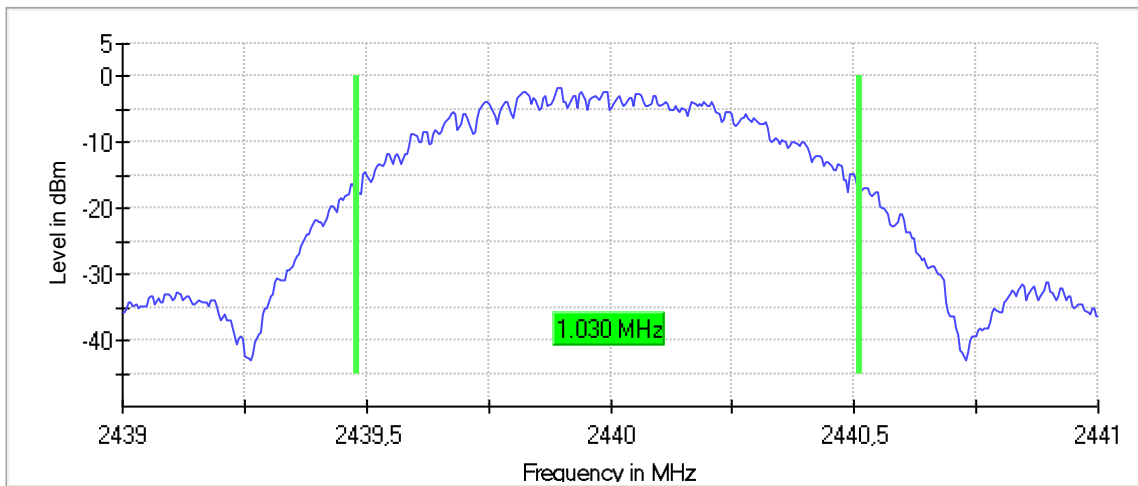


Plot 15: Mode 3, 99% Occupied Bandwidth, high channel

99 % Bandwidth

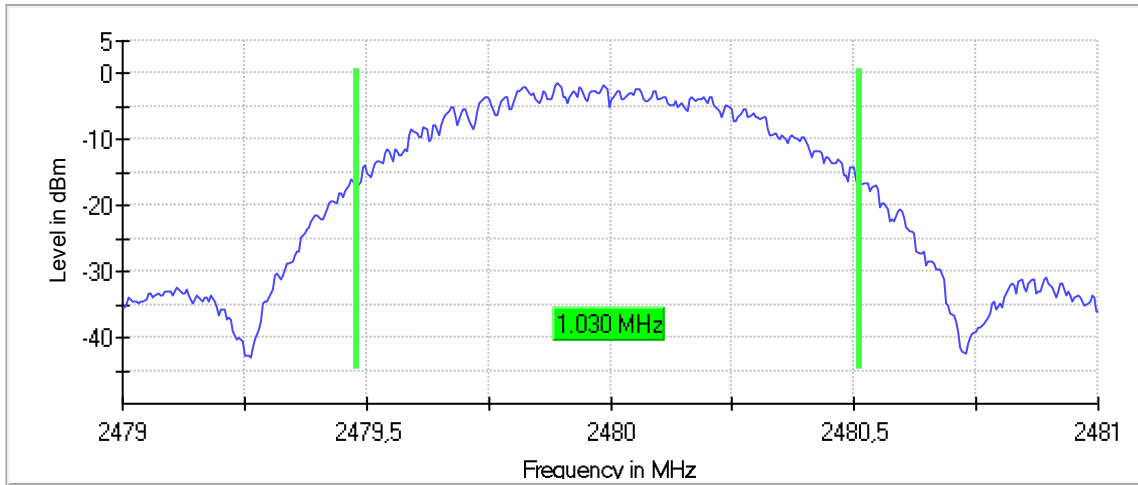


Plot 16: Mode 4, 99% Occupied Bandwidth, low channel

99 % Bandwidth

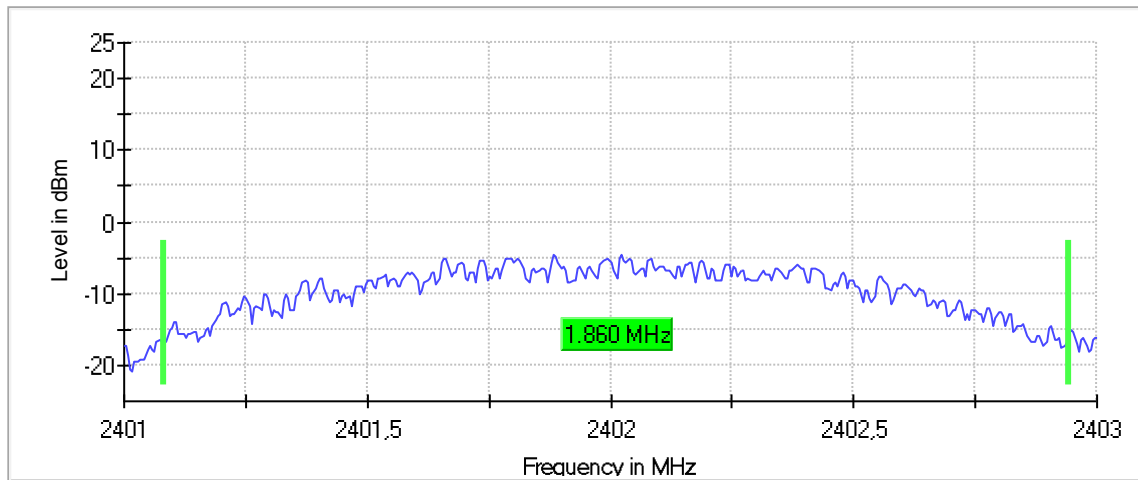


Plot 17: Mode 4, 99% Occupied Bandwidth, mid channel

99 % Bandwidth

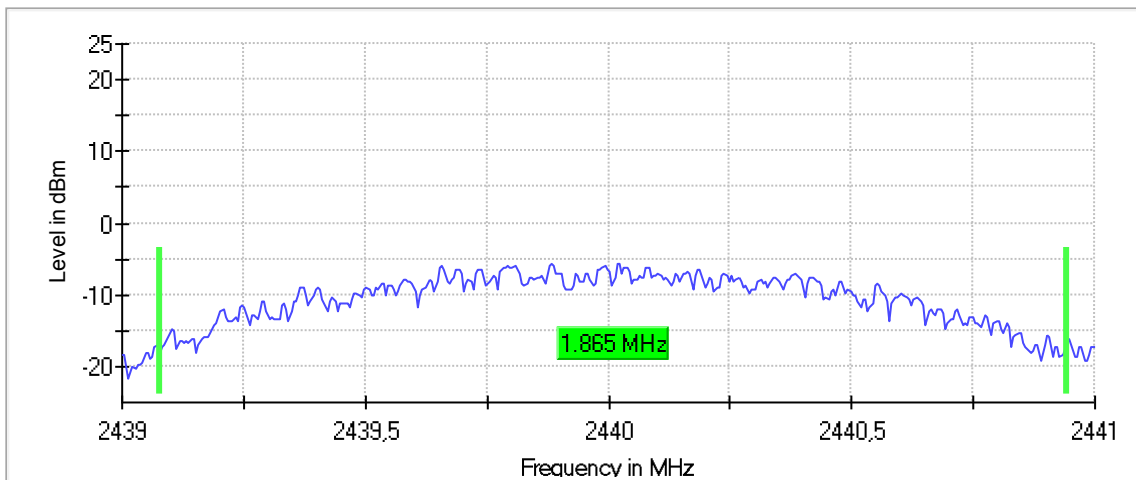

Plot 18: Mode 4, 99% Occupied Bandwidth, high channel

99 % Bandwidth

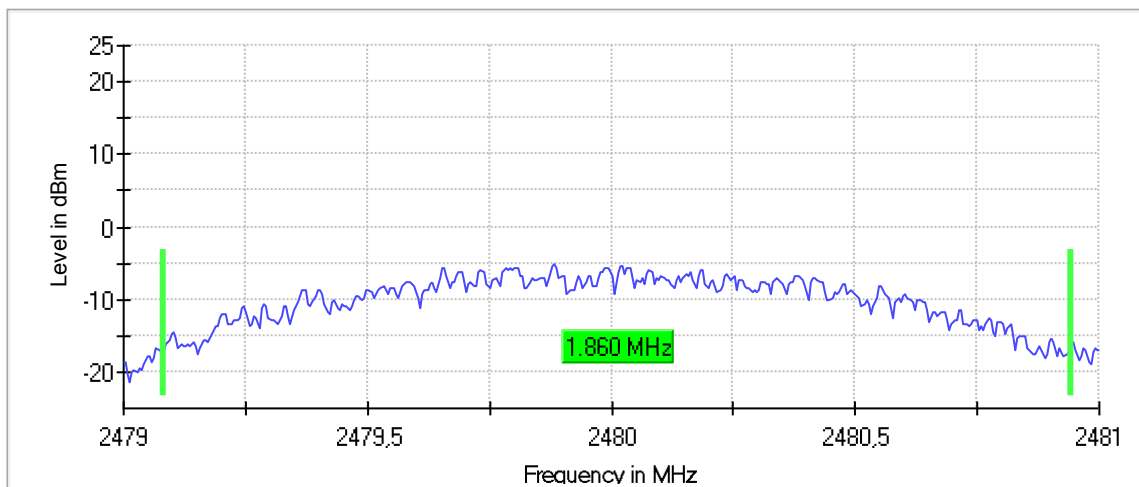

7.3 RF Output Power (Conducted Peak Power)

Applicability

This requirement applies to all types of DTS equipment.

Description

The RF Output Power is defined as the conducted peak output power.

Limit

§15.247

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test procedure

ANSI C63.10, 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq [3 \times RBW].
- c) Set span \geq [3 \times RBW].
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Test setup: 8.4

Test Results

| EUT Mode | RF Output Power (Conducted Peak Power) | | | Limit [dBm] |
|----------|--|-------------------|--------------------|-------------|
| | low channel [dBm] | mid channel [dBm] | high channel [dBm] | |
| Mode 1 | 9.4 | 8.6 | 8.9 | 30 |
| Mode 2 | 9.3 | 8.4 | 8.8 | 30 |
| Mode 3 | 9.3 | 8.5 | 8.8 | 30 |
| Mode 4 | 9.4 | 8.5 | 8.8 | 30 |


Comment:

Verdict

- PASS -


see next plots

Plot 19: Mode 1, Peak Power, low channel

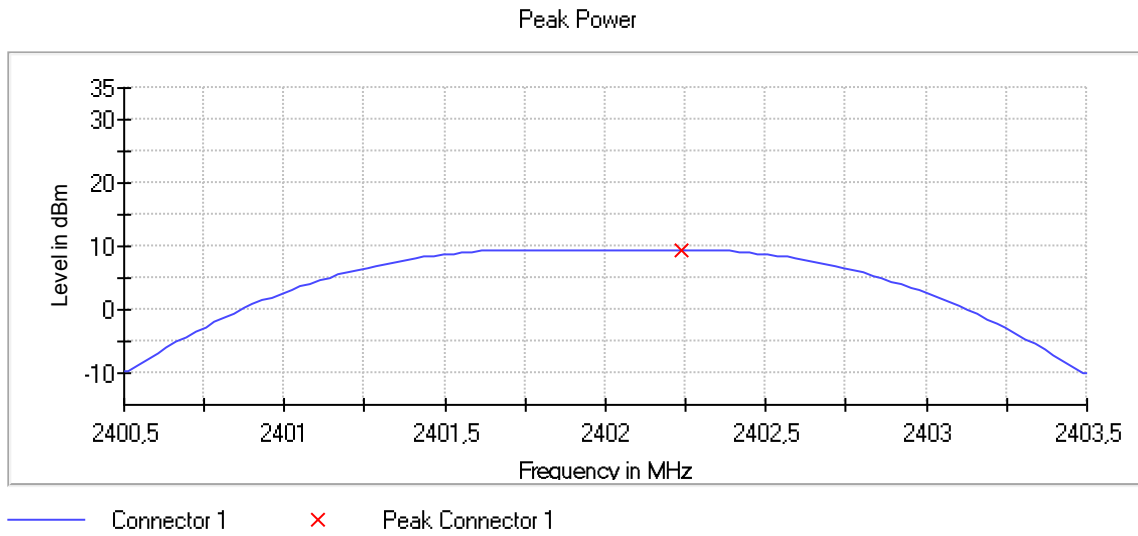


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2402.000000 | 9.4 | 30.0 | PASS |

Plot 20: Mode 1, Peak Power, mid channel

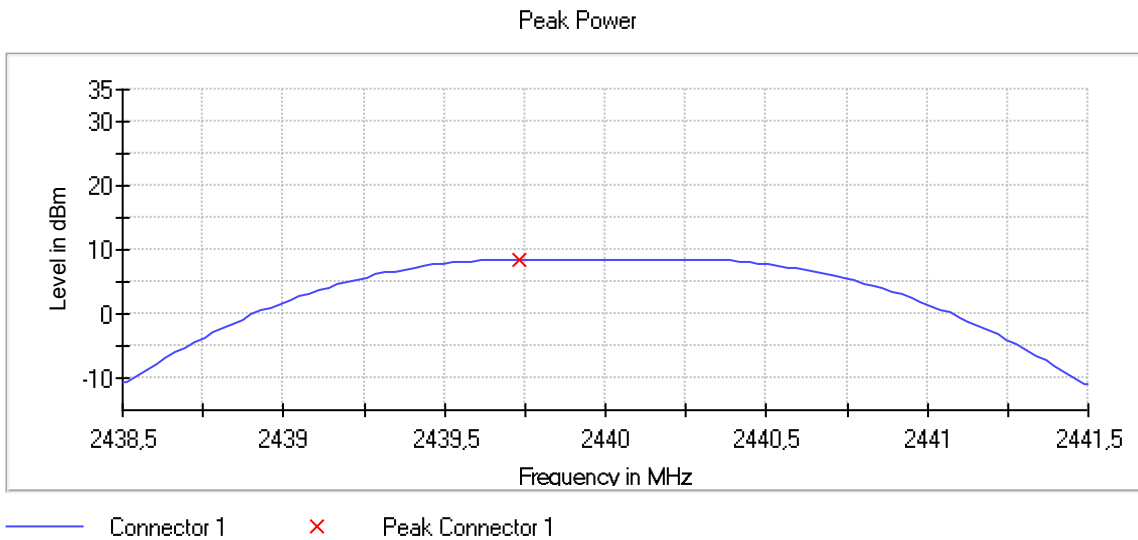


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2440.000000 | 8.6 | 30.0 | PASS |

Plot 21: Mode 1, Peak Power, high channel

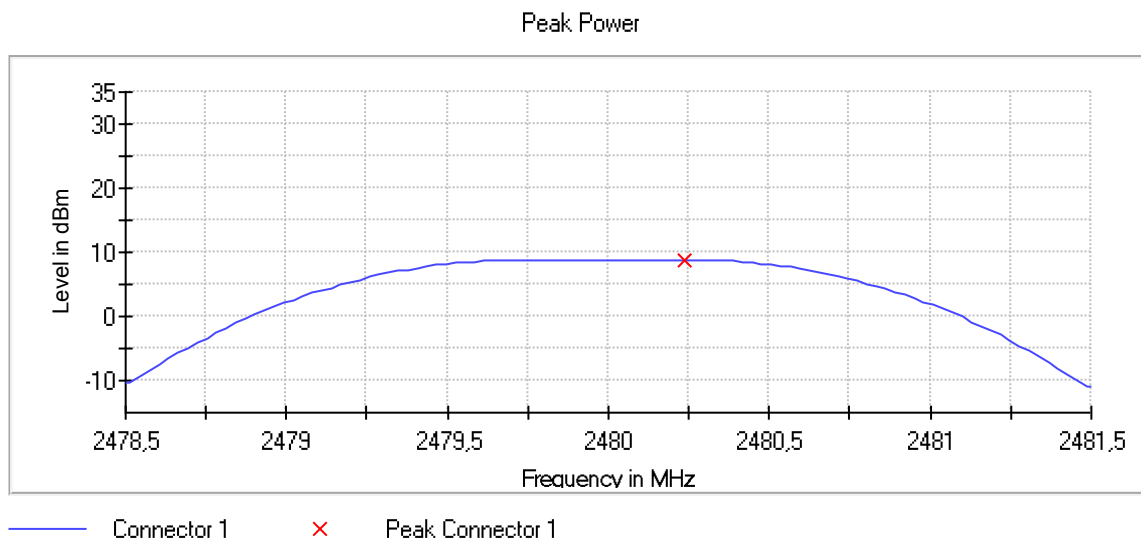


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2480.000000 | 8.9 | 30.0 | PASS |

Plot 22: Mode 2, Peak Power, low channel

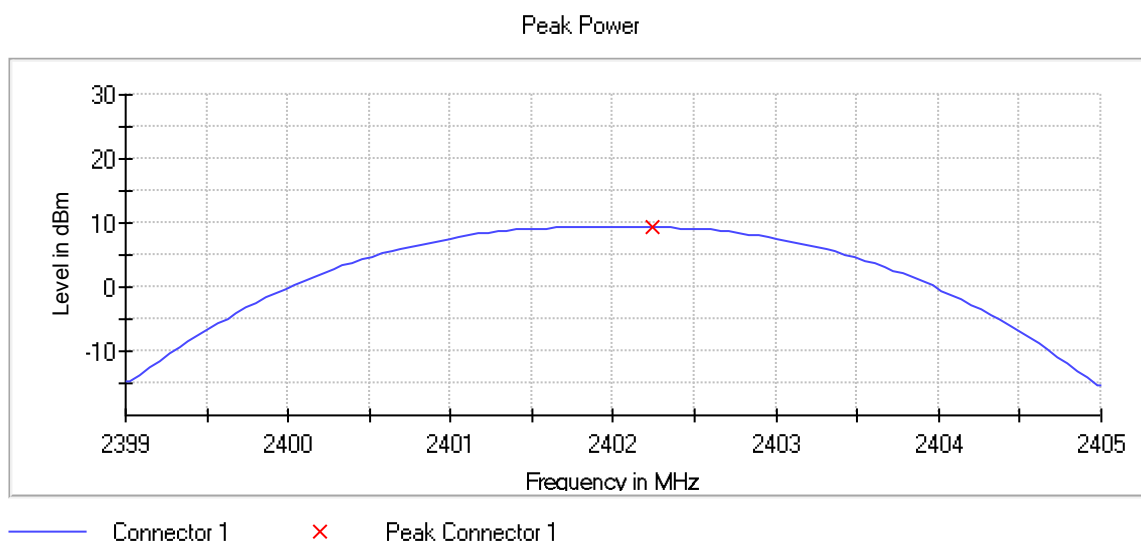


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2402.000000 | 9.3 | 30.0 | PASS |

Plot 23: Mode 2, Peak Power, mid channel

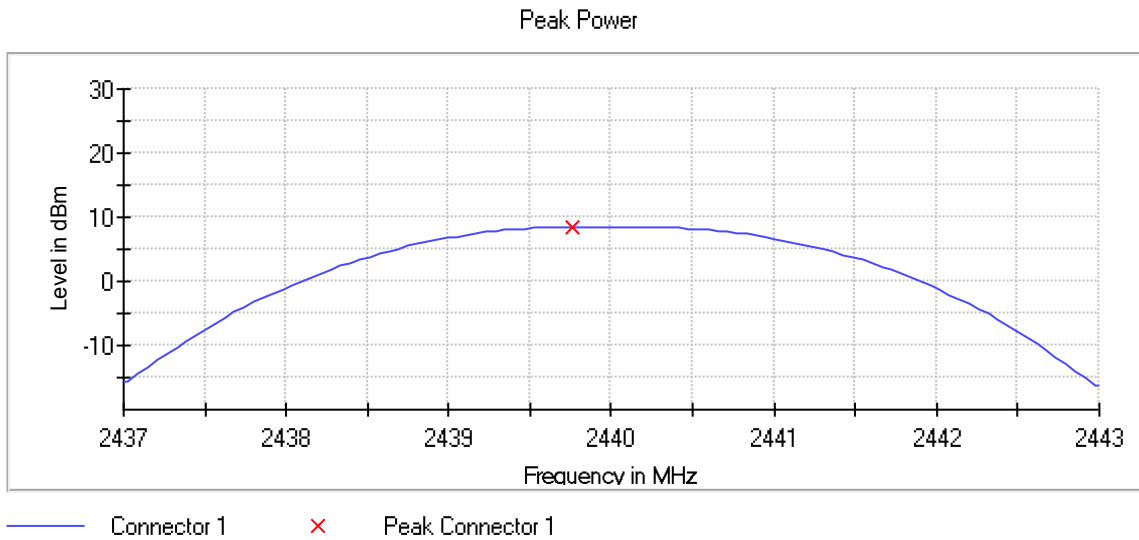


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2440.000000 | 8.4 | 30.0 | PASS |

Plot 24: Mode 2, Peak Power, high channel

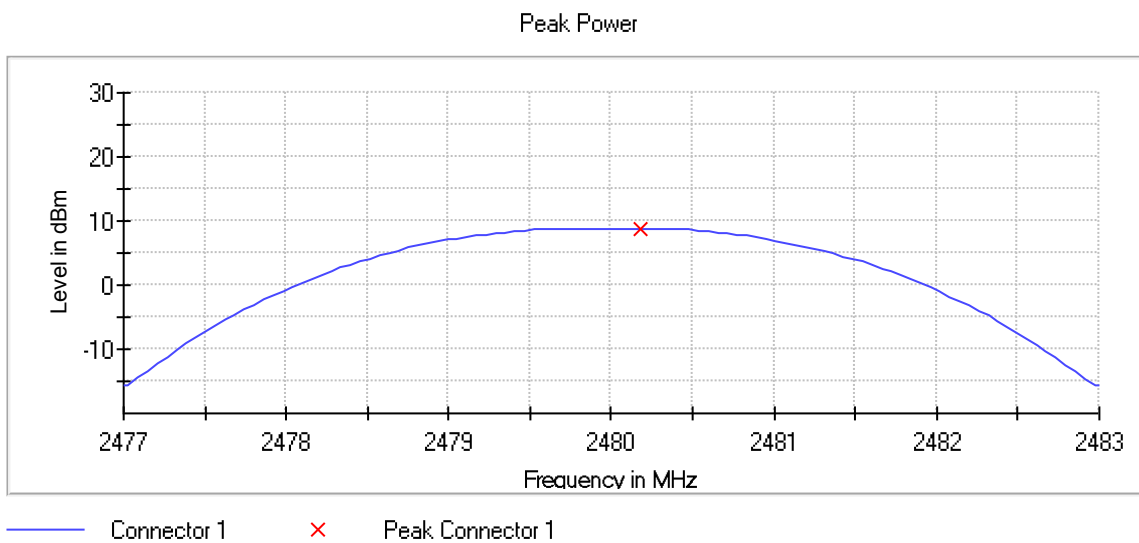


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2480.000000 | 8.8 | 30.0 | PASS |

Plot 25: Mode 3, Peak Power, low channel

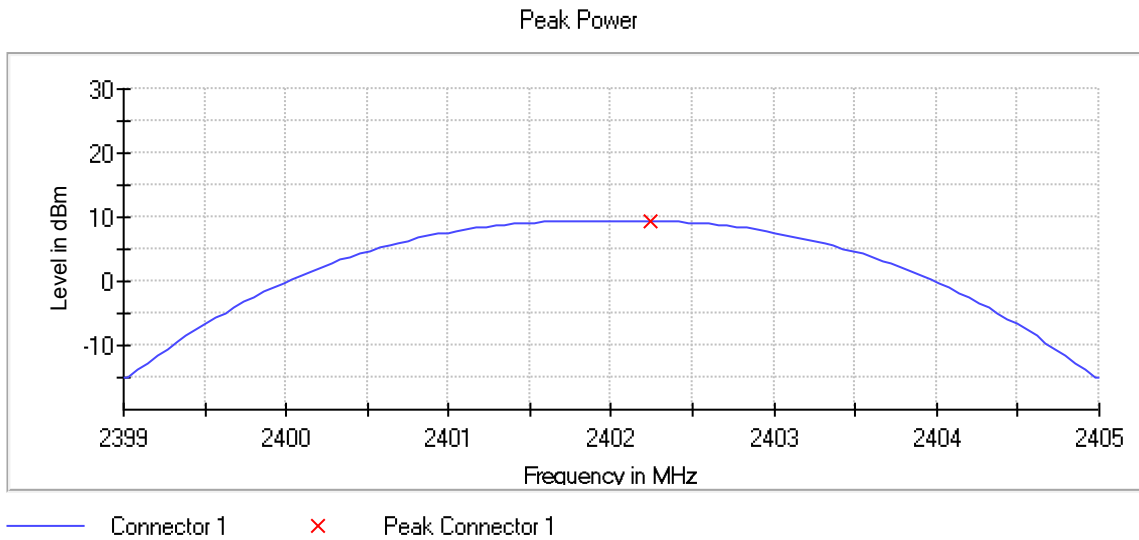


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2402.000000 | 9.3 | 30.0 | PASS |

Plot 26: Mode 3, Peak Power, mid channel

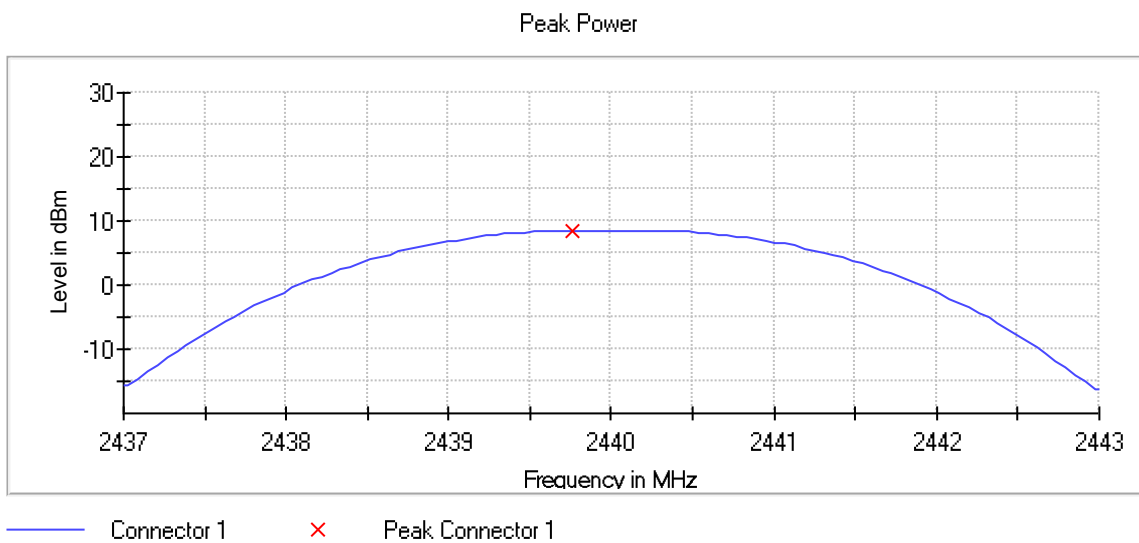


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2440.000000 | 8.5 | 30.0 | PASS |

Plot 27: Mode 3, Peak Power, high channel

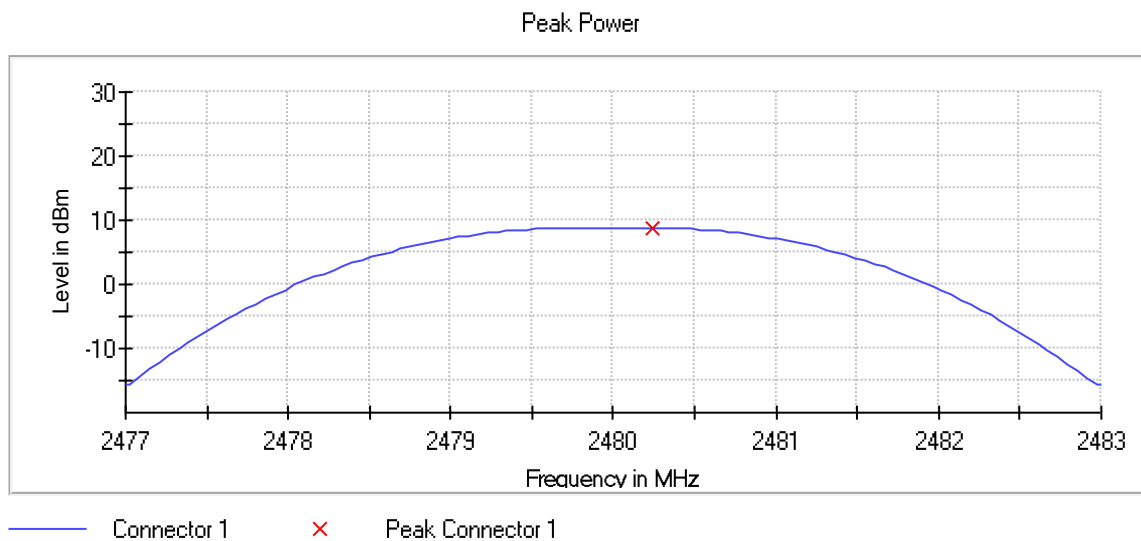


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2480.000000 | 8.8 | 30.0 | PASS |

Plot 28: Mode 4, Peak Power, low channel

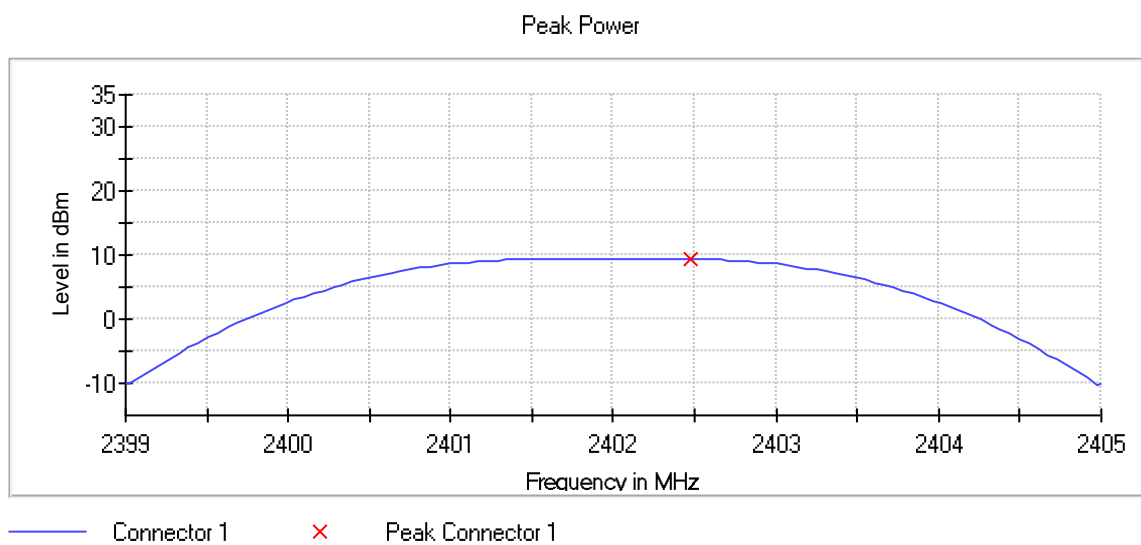


| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2402.000000 | 9.4 | 30.0 | PASS |

Plot 29: Mode 4, Peak Power, mid channel

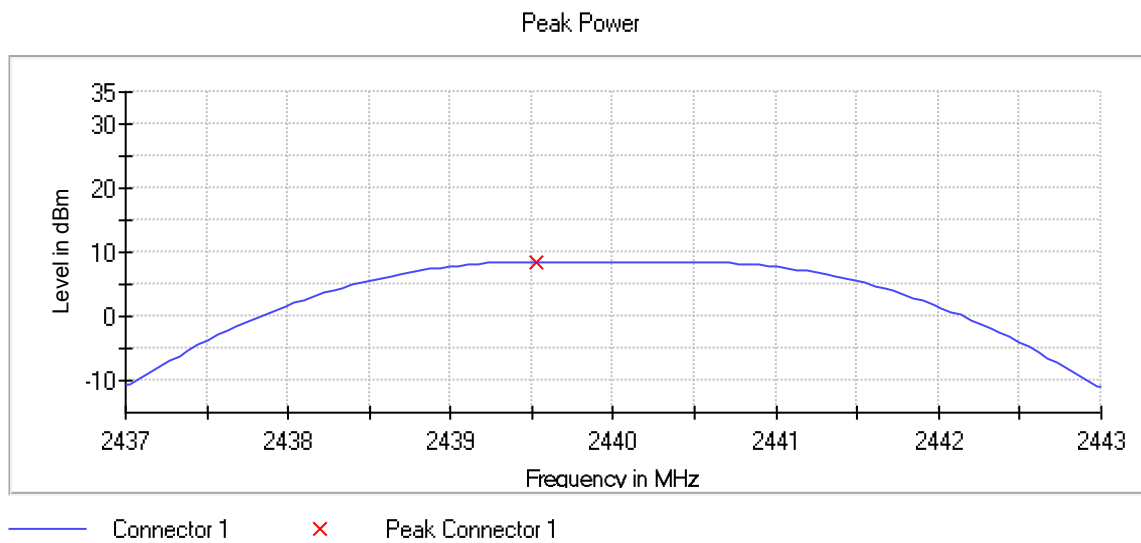

| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2440.000000 | 8.5 | 30.0 | PASS |

Plot 30: Mode 4, Peak Power, high channel

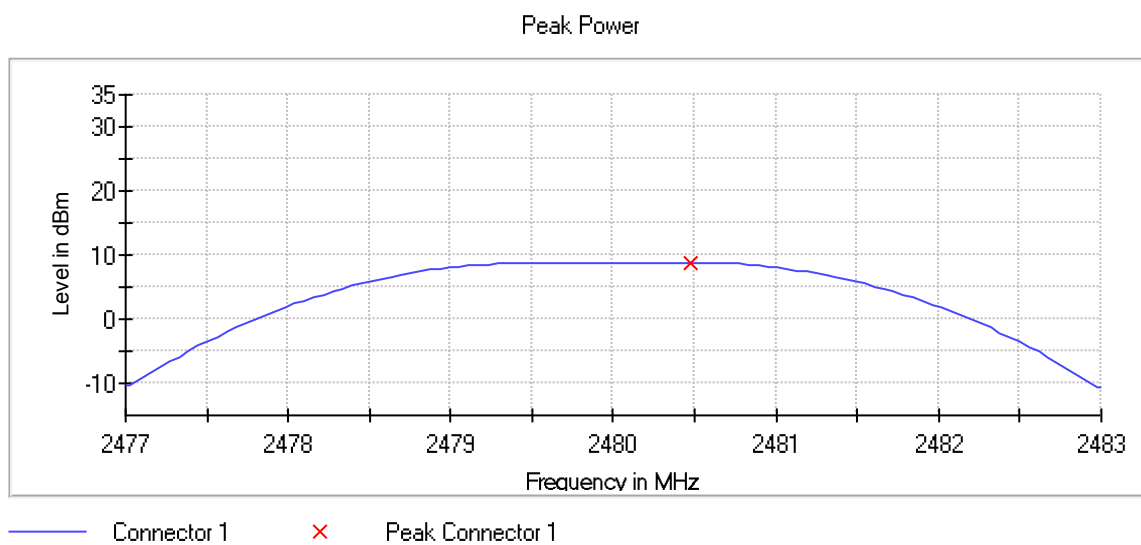

| DUT Frequency (MHz) | Peak Power (dBm) | Limit Max (dBm) | Result |
|---------------------|------------------|-----------------|--------|
| 2480.000000 | 8.8 | 30.0 | PASS |

7.4 Antenna Gain (calculated)

Applicability

This requirement applies to all types of DTS equipment.

Description

The antenna gain is defined as the difference between radiated peak power (Peak EIRP) subtracted by the conducted peak power of the module, given in dBi.

Limit

§15.247

(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test setup: 8.2, 8.4


Test Results

| Mode 1 | low channel | mid channel | high channel | Limit |
|-------------------------------|-------------|-------------|--------------|-------|
| Radiated peak power [dBm] | 9.3 | 8.6 | 9.0 | 36 |
| Conducted peak power [dBm] | 9.4 | 8.6 | 8.9 | 30 |
| Calculated antenna gain [dBi] | -0.1 | 0 | 0.1 | 6 |


| | |
|-----------------|-----|
| Comment: | --- |
|-----------------|-----|

| | |
|----------------|-----------------|
| Verdict | - PASS - |
|----------------|-----------------|


Plot 31: Mode 1, Peak EIRP, low channel

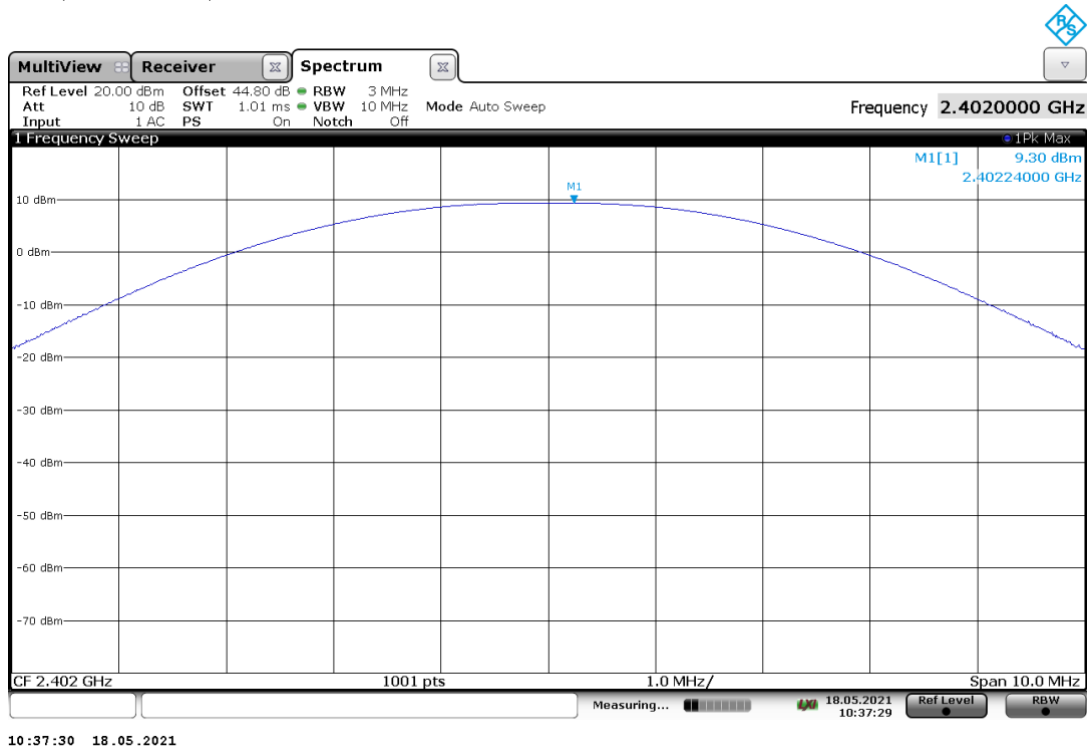

Plot 32: Mode 1, Peak EIRP, mid channel

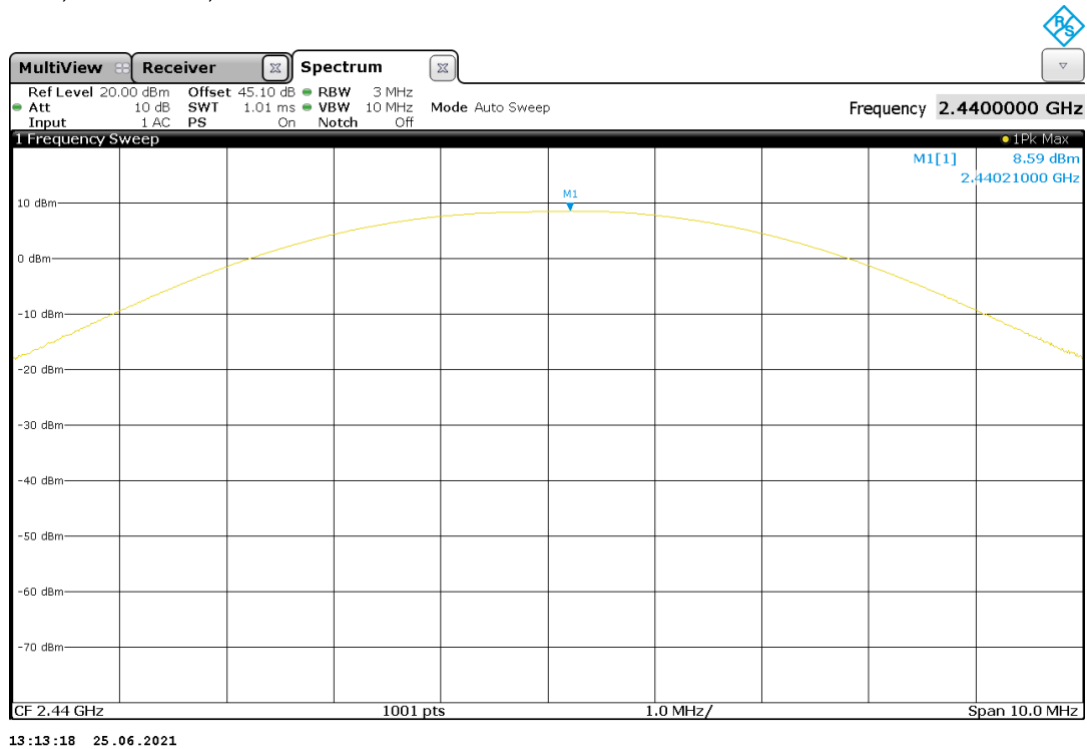

Plot 33: Mode 1, Peak EIRP, high channel

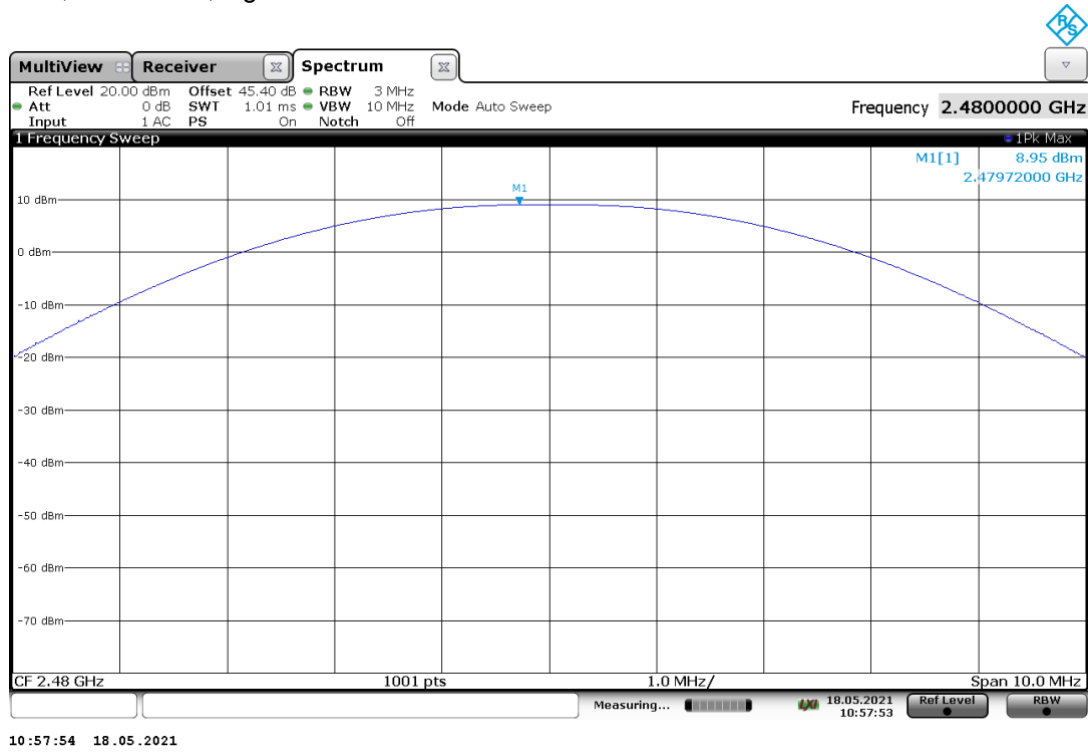

7.5 Peak Power Spectral Density (PSD)

Applicability

This requirement applies to all types of DTS equipment.

Description

The Power Spectral Density (PSD) is defined as the conducted peak power spectral density in a 3 kHz bandwidth during any time of continuous transmission.

Limits

§15.247

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test procedure

ANSI C63.10, 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test setup: 8.4

Test Results

| EUT Mode | Peak Power Spectral Density [dBm / 3 kHz] | | | Limit [dBm / 3 kHz] |
|----------|--|-------------|--------------|------------------------|
| | low channel | mid channel | high channel | |
| Mode 1 | 3.8 | 2.7 | 3.1 | 8 |
| Mode 2 | -0.8 | -1.5 | -1.3 | 8 |
| Mode 3 | -0.7 | -1.5 | -1.2 | 8 |
| Mode 4 | -4.5 | -5.4 | -5.0 | 8 |

Comment:


Verdict

- PASS -

see next plots

Plot 34: Mode 1, Peak PSD, low channel

Peak Power Spectral Density

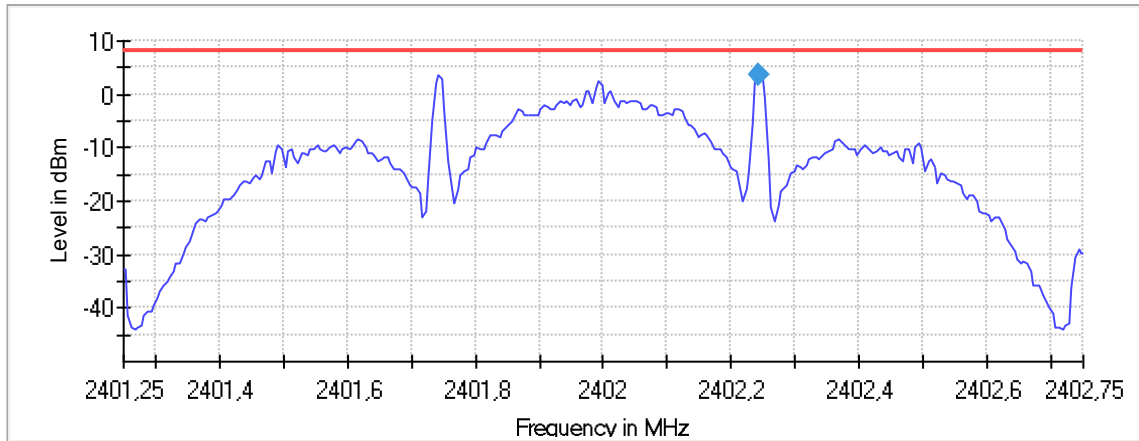


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2402.000000 | 2402.242500 | 3.757 | 8.0 | PASS |

Plot 35: Mode 1, Peak PSD, mid channel

Peak Power Spectral Density

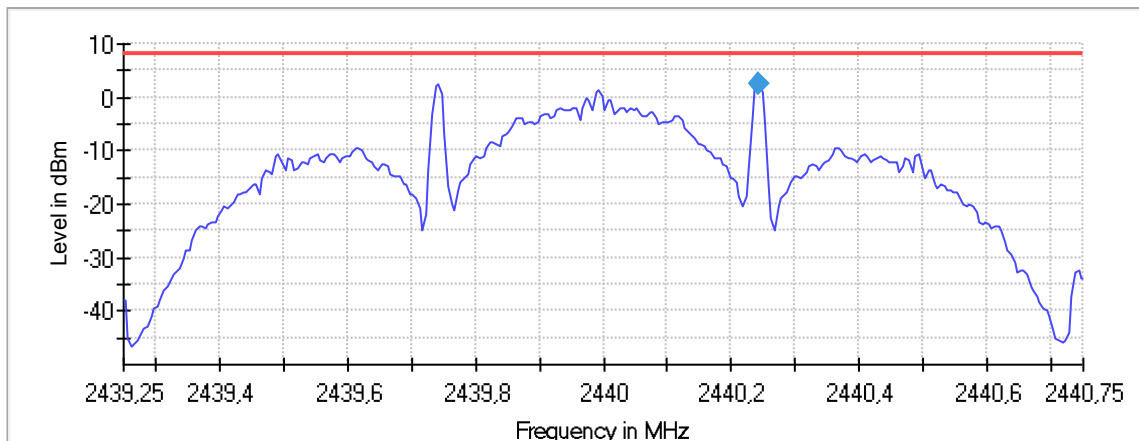


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2440.000000 | 2440.242500 | 2.683 | 8.0 | PASS |

Plot 36: Mode 1, Peak PSD, high channel

Peak Power Spectral Density

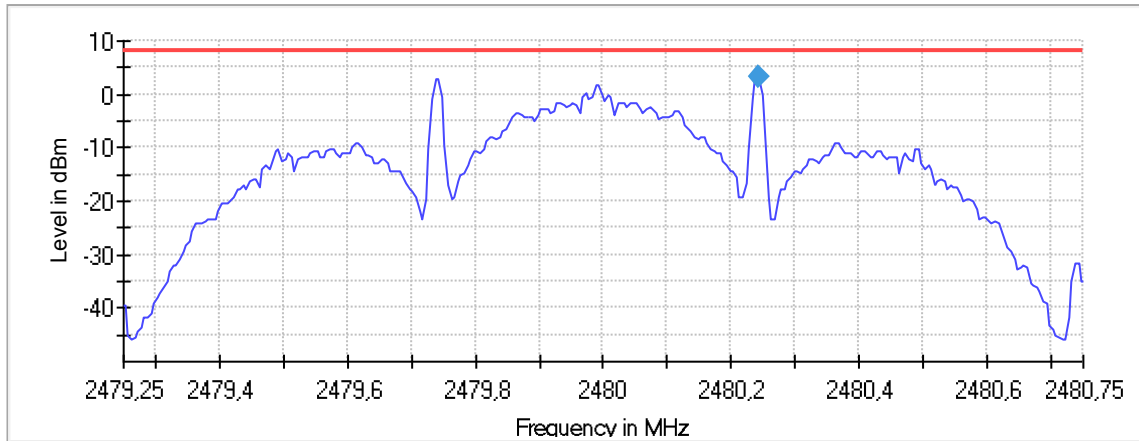


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2480.000000 | 2480.242500 | 3.079 | 8.0 | PASS |

Plot 37: Mode 2, Peak PSD, low channel

Peak Power Spectral Density

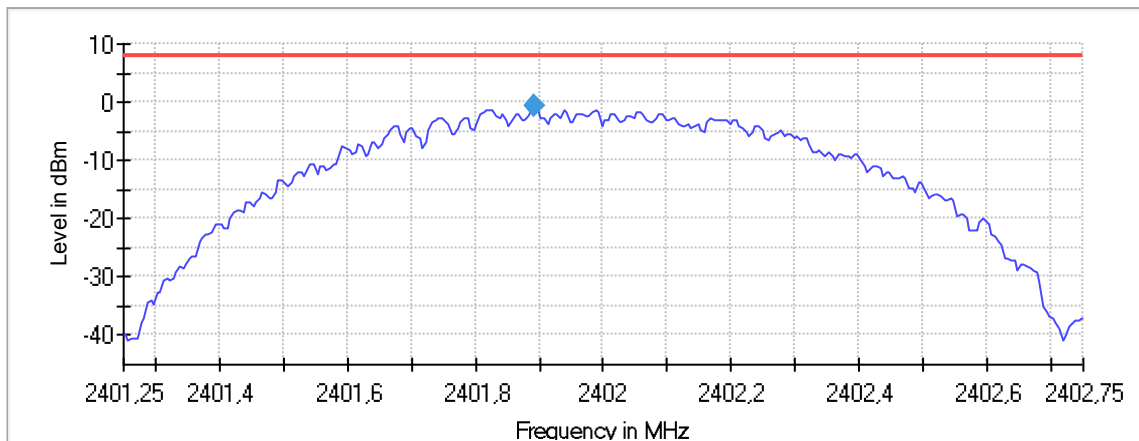


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2402.000000 | 2401.892500 | -0.790 | 8.0 | PASS |

Plot 38: Mode 2, Peak PSD, mid channel

Peak Power Spectral Density

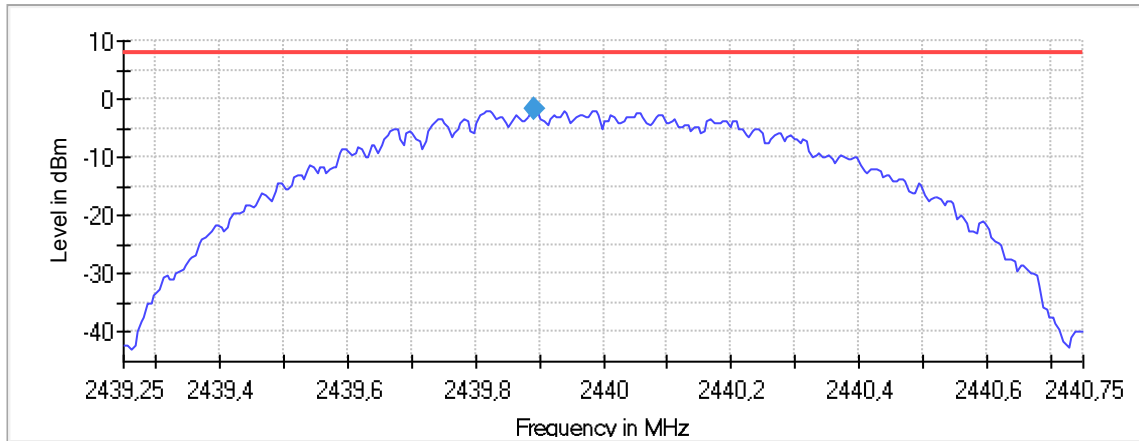


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2440.000000 | 2439.892500 | -1.538 | 8.0 | PASS |

Plot 39: Mode 2, Peak PSD, high channel

Peak Power Spectral Density

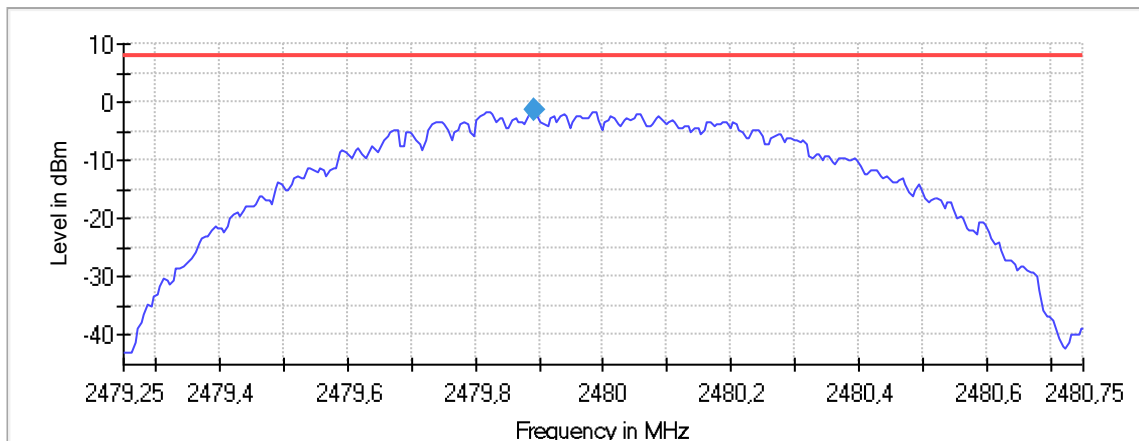


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2480.000000 | 2479.892500 | -1.312 | 8.0 | PASS |

Plot 40: Mode 3, Peak PSD, low channel

Peak Power Spectral Density

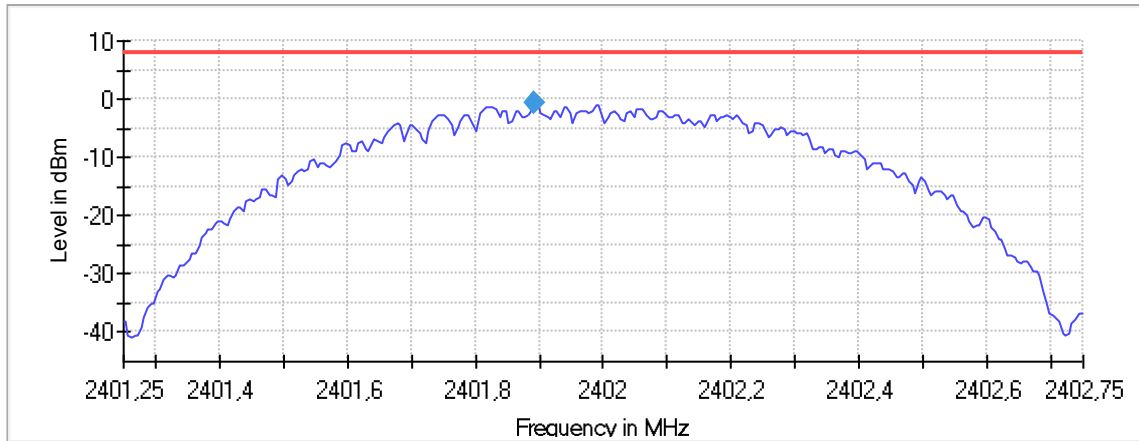


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2402.000000 | 2401.892500 | -0.702 | 8.0 | PASS |

Plot 41: Mode 3, Peak PSD, mid channel

Peak Power Spectral Density

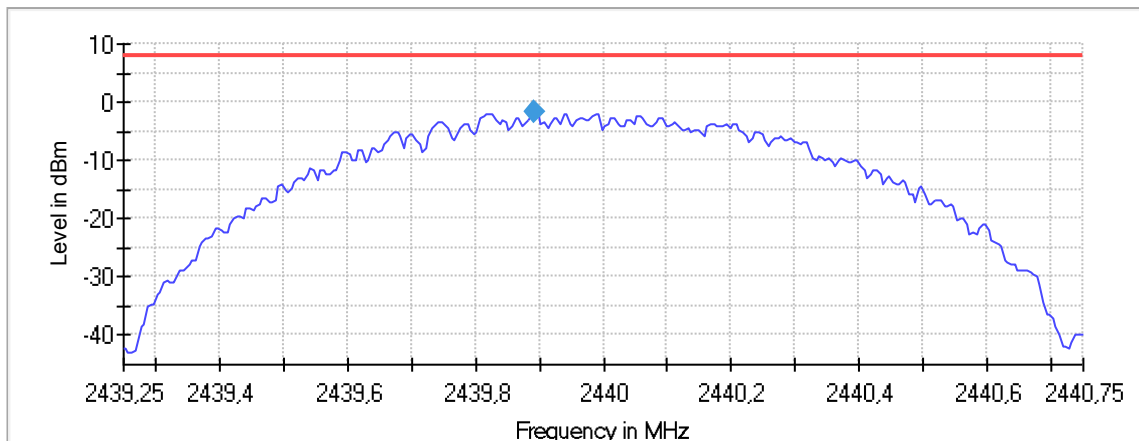


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2440.000000 | 2439.892500 | -1.534 | 8.0 | PASS |

Plot 42: Mode 3, Peak PSD, high channel

Peak Power Spectral Density

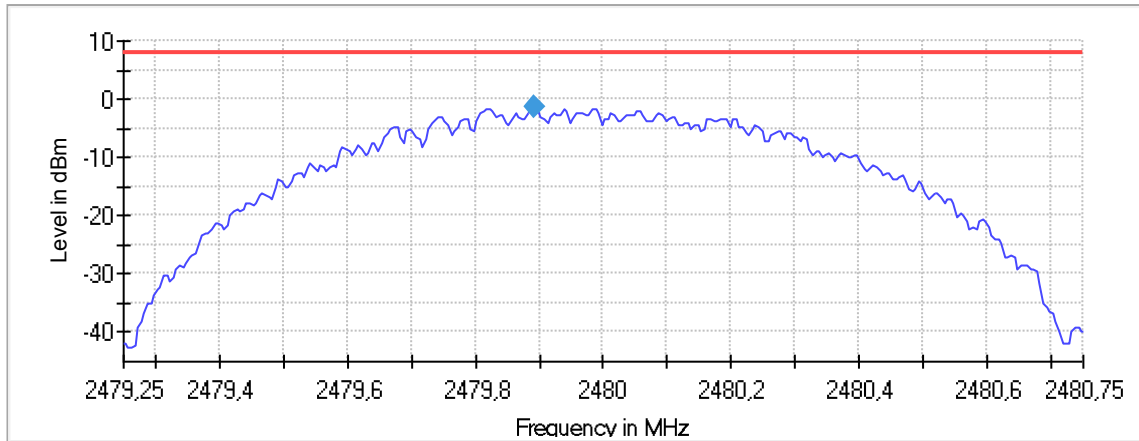


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2480.000000 | 2479.892500 | -1.224 | 8.0 | PASS |

Plot 43: Mode 4, Peak PSD, low channel

Peak Power Spectral Density

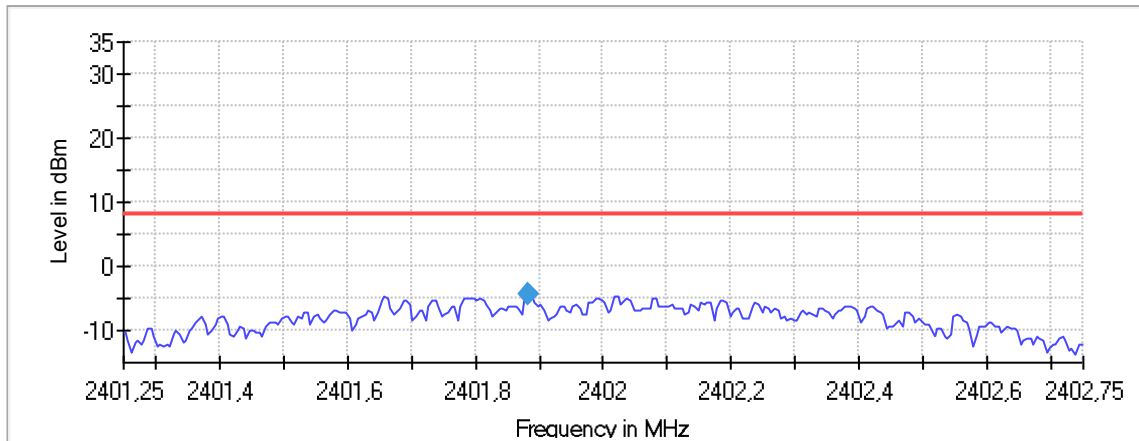


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2402.000000 | 2401.882500 | -4.520 | 8.0 | PASS |

Plot 44: Mode 4, Peak PSD, mid channel

Peak Power Spectral Density

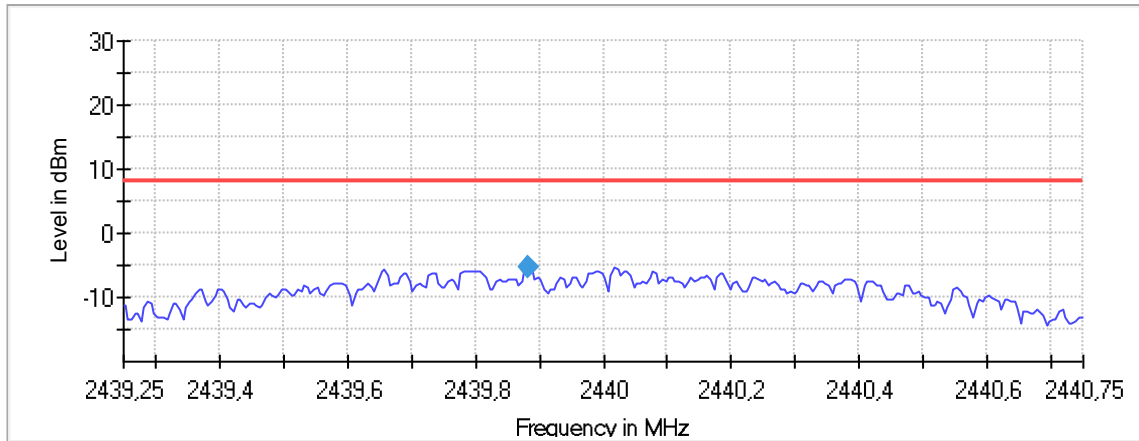


— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2440.000000 | 2439.882500 | -5.379 | 8.0 | PASS |

Plot 45: Mode 4, Peak PSD, high channel

Peak Power Spectral Density

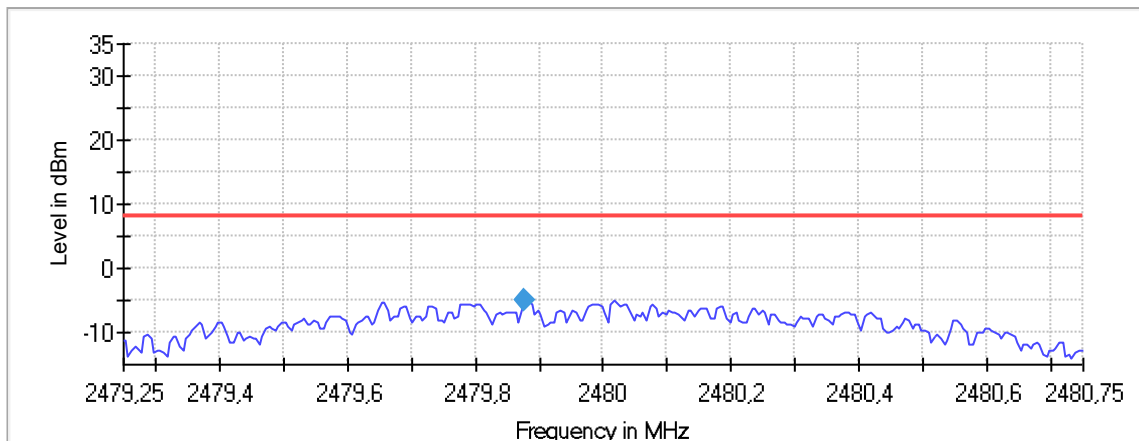

— Limit — Sum Level ◆ PSD

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 2480.000000 | 2479.877500 | -4.989 | 8.0 | PASS |

7.6 Band Edge Compliance (BEC), conducted

Applicability

This requirement applies to all types of DTS equipment.

Description

Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.

Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required.

Test procedure

ANSI C63.10, 11.11

Reference level measurement:

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≥ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement:

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements as specified (≥ 20 dBc).

The marker-delta method, as described in ANSI C63.10, 6.10.6 can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.

Test setup: 8.4


Test results

| BEC | low channel [dBc] | high channel [dBc] | Limit [dBc] |
|--------|-------------------|--------------------|-------------|
| Mode 1 | > 50 | > 55 | ≥ 20 |
| Mode 2 | -/- | -/- | ≥ 20 |
| Mode 3 | -/- | -/- | ≥ 20 |
| Mode 4 | > 30 | > 45 | ≥ 20 |


Comment: ---

| | | |
|----------------|-----------------|-----------------------|
| Verdict | - PASS - | <i>see next plots</i> |
|----------------|-----------------|-----------------------|


Plot 46: Mode 1, BEC, low channel

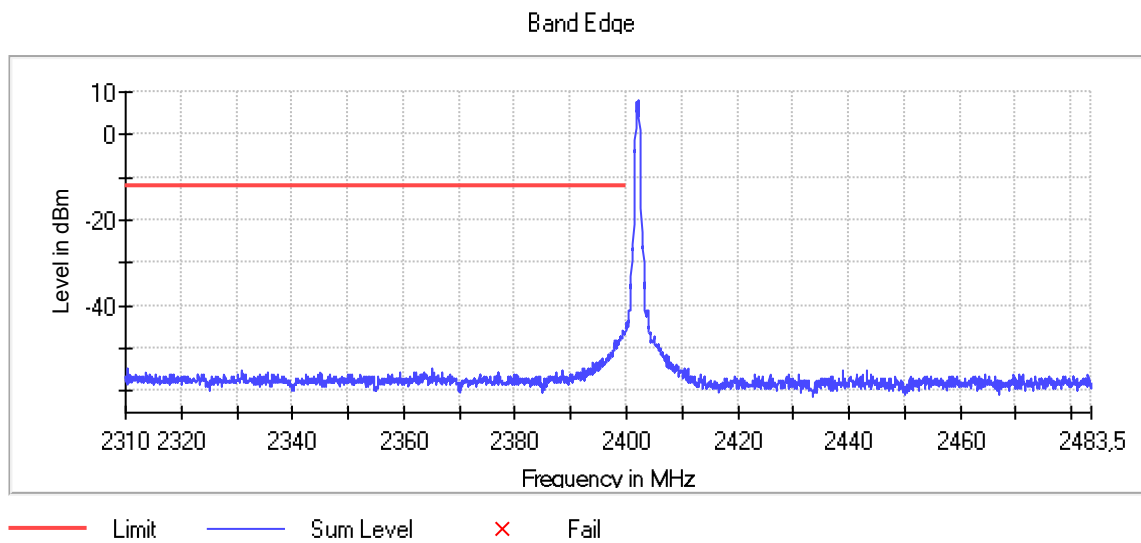


Plot 47: Mode 1, BEC, high channel

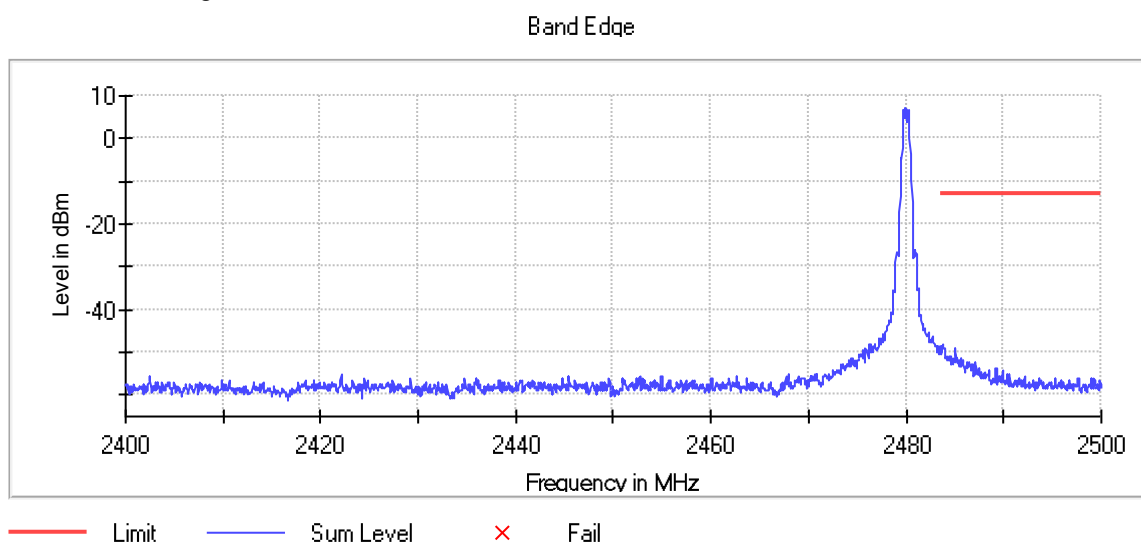

Plot 48: Mode 4, BEC, low channel

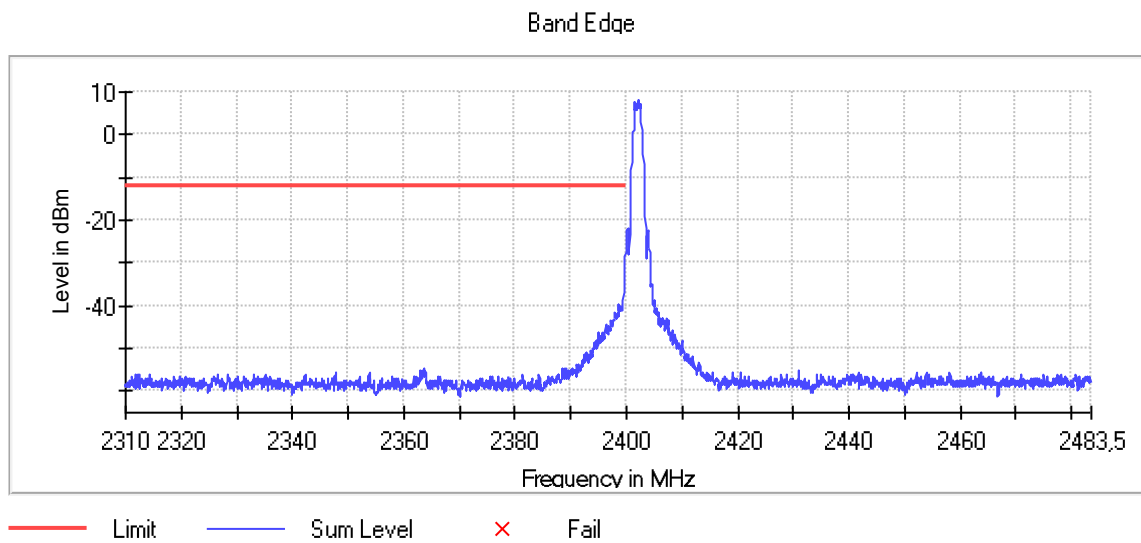

Plot 49: Mode 4, BEC, high channel

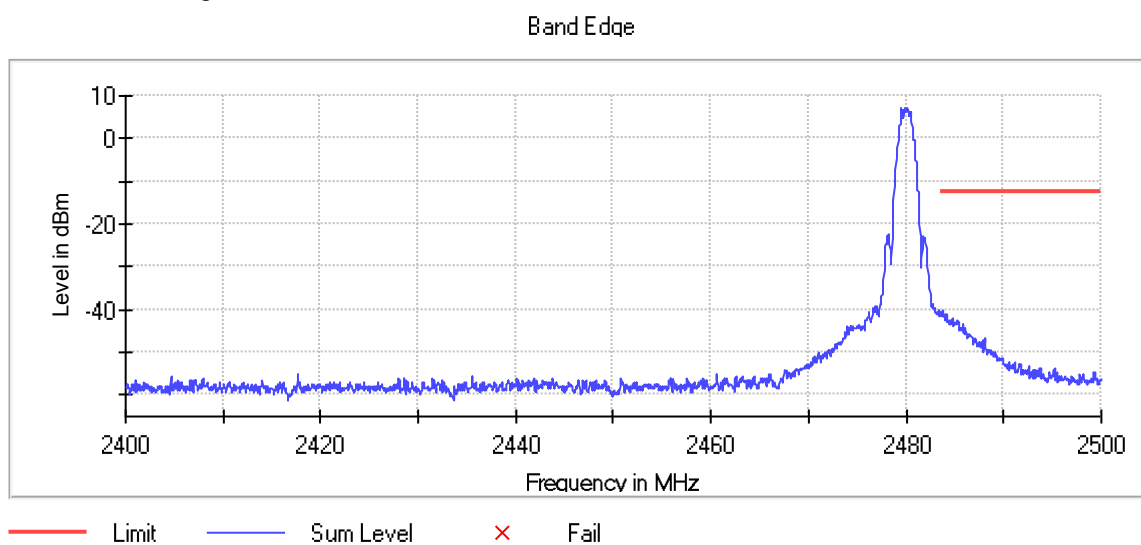

7.7 Band Edge Compliance (BEC), radiated

Applicability

This requirement applies to all types of DTS equipment.

Description

Emissions within a restricted band and within 2 MHz of an authorized band edge may be measured using either the marker-delta method (ANSI C63.10, 6.10.6) or the integration method (ANSI C63.20, 11.13.3), provided that the DTS bandwidth (or EBW) edge falls within 2 MHz of the band edge. Otherwise, all unwanted emissions measurements shall be performed using the standard methods.

Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test procedure

The marker-delta method as described in ANSI C63.10, 6.10.6 or the integration method as described in ANSI C63.10, 11.13.3 can be used to perform measurements of the unwanted emissions level at the band edges.

Test setup: 8.2

Test results

| BEC | low channel AVG / Peak [dµV/m @3m] | high channel AVG / Peak [dµV/m @3m] | Limit AVG / Peak [dµV/m @3m] |
|------------------------|--|---|------------------------------------|
| Mode 4 (worst case) | 33.4 / 47.8 | 47.7 / 63.9 | ≤ 54 AVG / ≤ 74 PK |


Comment:

Verdict


- PASS -

see next plots

Plot 50: Mode 4 (worst case), BEC, low channel

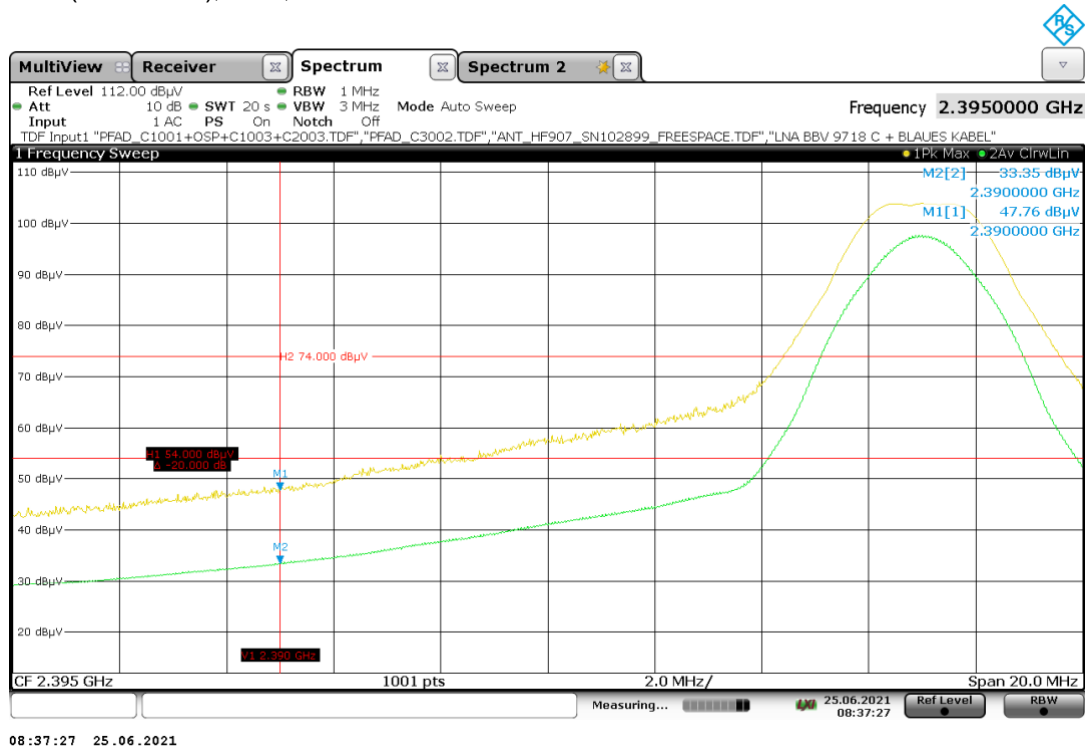

Plot 51: Mode 4 (worst case), BEC, high channel

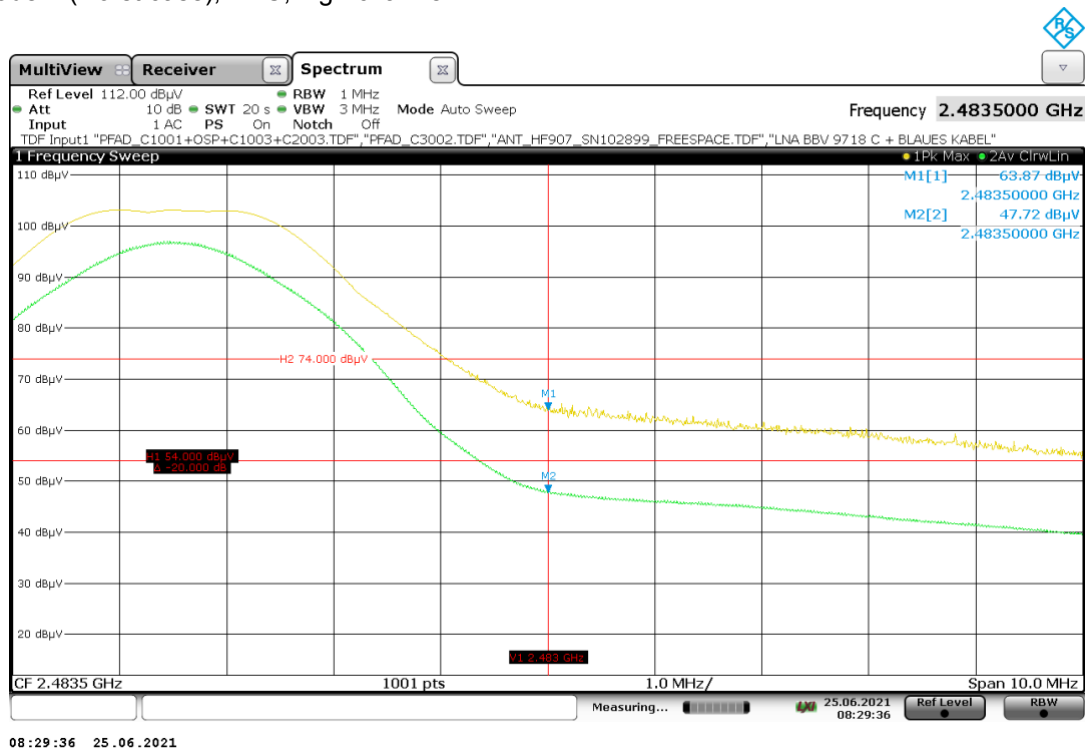

7.8 Conducted Spurious Emissions (CSE)

Applicability

This requirement applies to all types of DTS equipment.

Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products.

Limits

§15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in §15.209(a) is not required.

Test procedure

ANSI C63.10, 11.11

Reference level measurement:

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≥ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.
- Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement:

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements as specified (≥ 20 dBc).

The marker-delta method, as described in ANSI C63.10, 6.10.6 can be used to perform measurements of the radiated unwanted emissions level at the band-edges provided that the 99 % OBW of the fundamental emission is within 2 MHz of the authorized band edge.


| Test setup: 8.4 | | | | | |
|------------------------|--------------------|--------------------|--------------------|--------------------|------------|
| Test results | | | | | |
| EUT Mode / Channel | Frequency [MHz] | Peak/RMS Detector | Level [dBm] | Limit [dBm] | Verdict |
| <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | - passed - |
| <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | - passed - |
| <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | <i>(see plots)</i> | - passed - |

* all detected peaks are more than 6 dB below the limit


| | |
|-----------------|-----|
| Comment: | --- |
|-----------------|-----|

| | | |
|----------------|-----------------|-----------------------|
| Verdict | - PASS - | <i>see next plots</i> |
|----------------|-----------------|-----------------------|


Plot 52: Mode 1, CSE, low channel

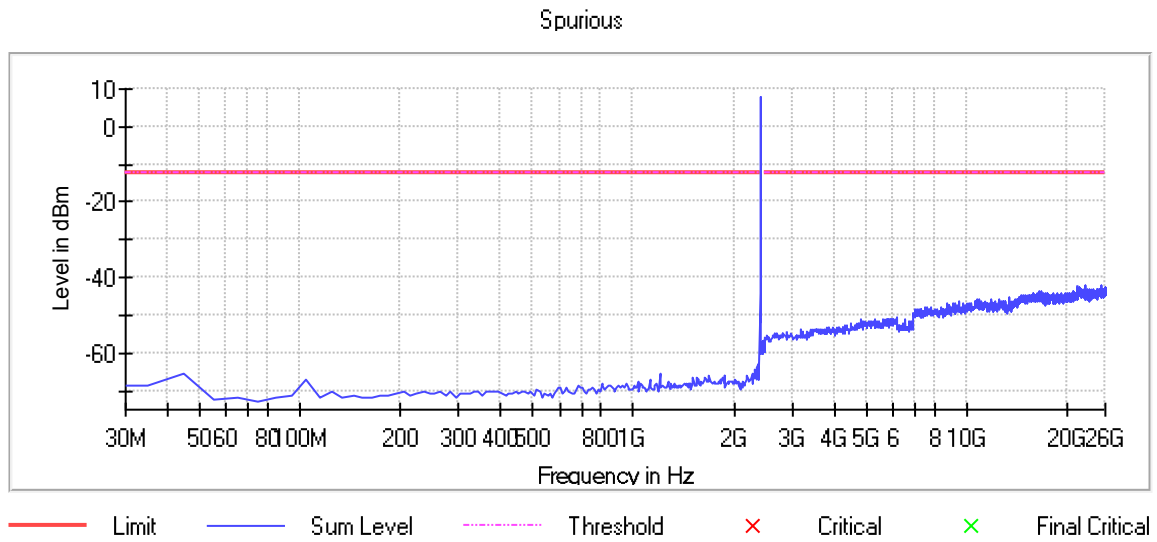


Plot 53: Mode 1, CSE, mid channel

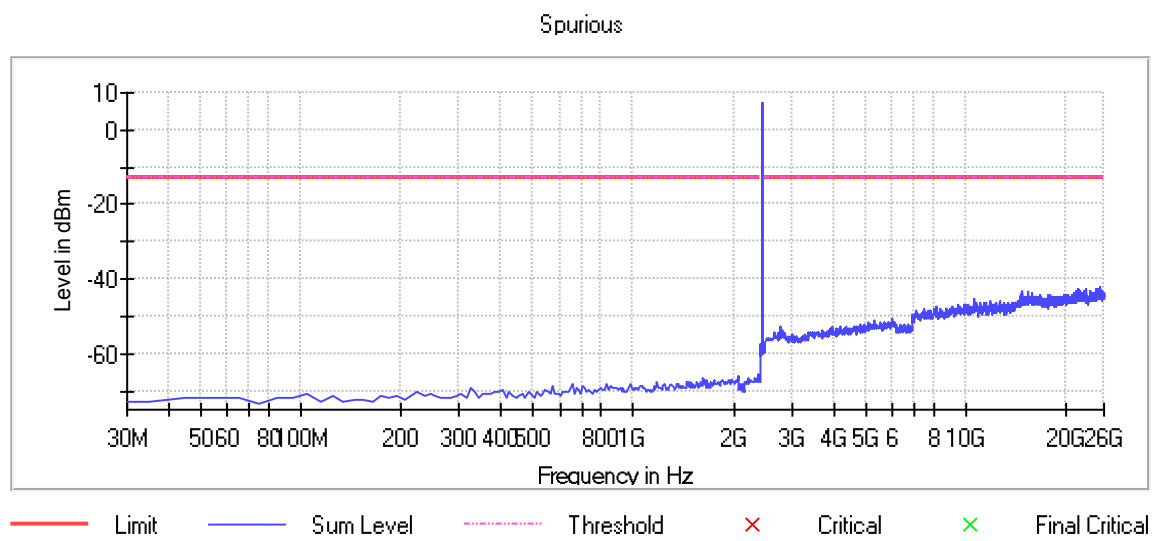


Plot 54: Mode 1, CSE, high channel

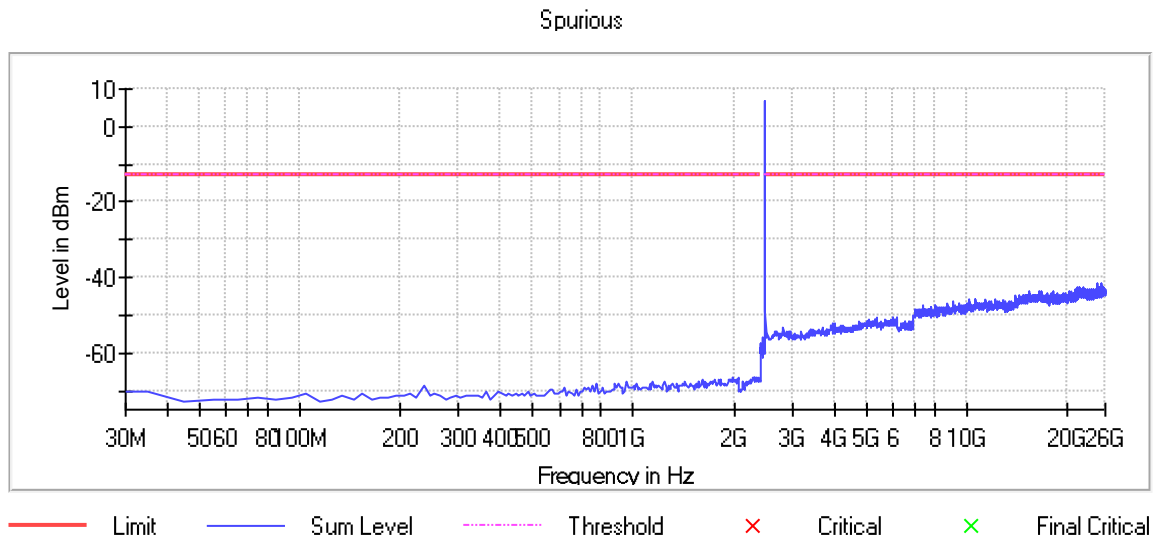


Plot 55: Mode 4, CSE, low channel

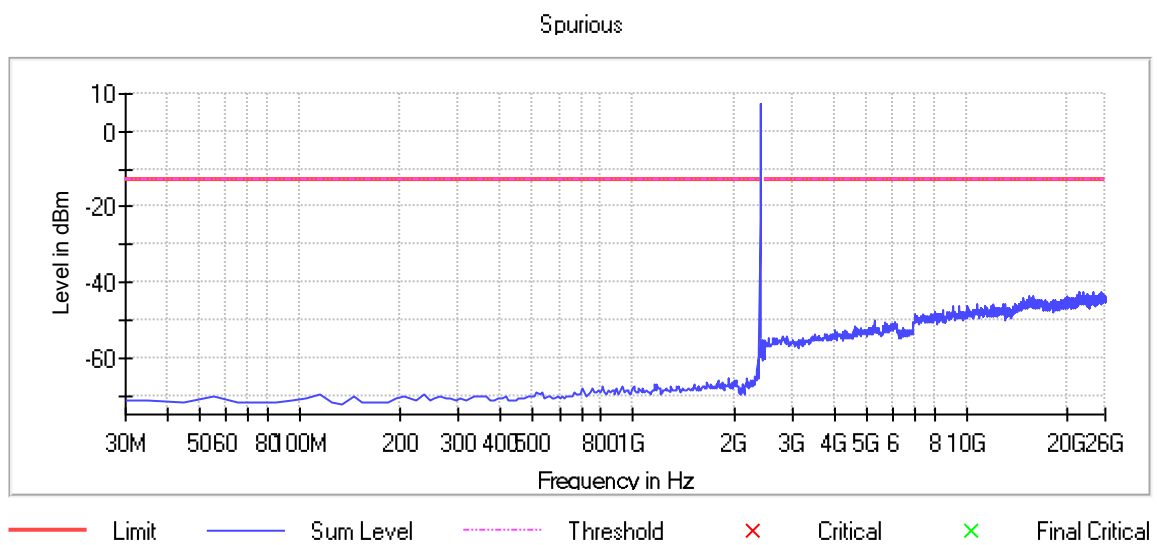

Plot 56: Mode 4, CSE, mid channel

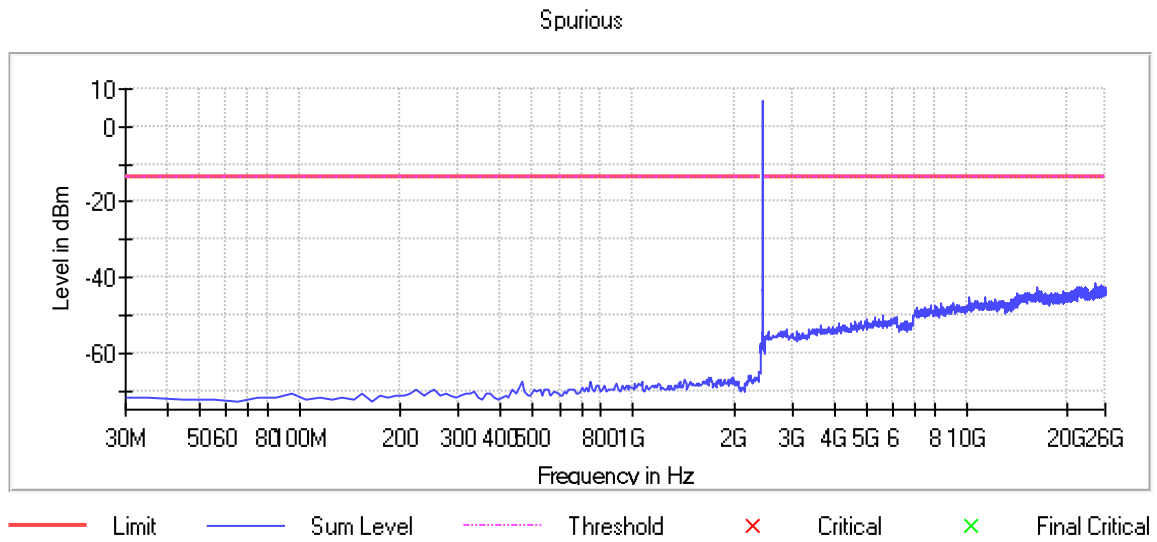

Plot 57: Mode 4, CSE, high channel

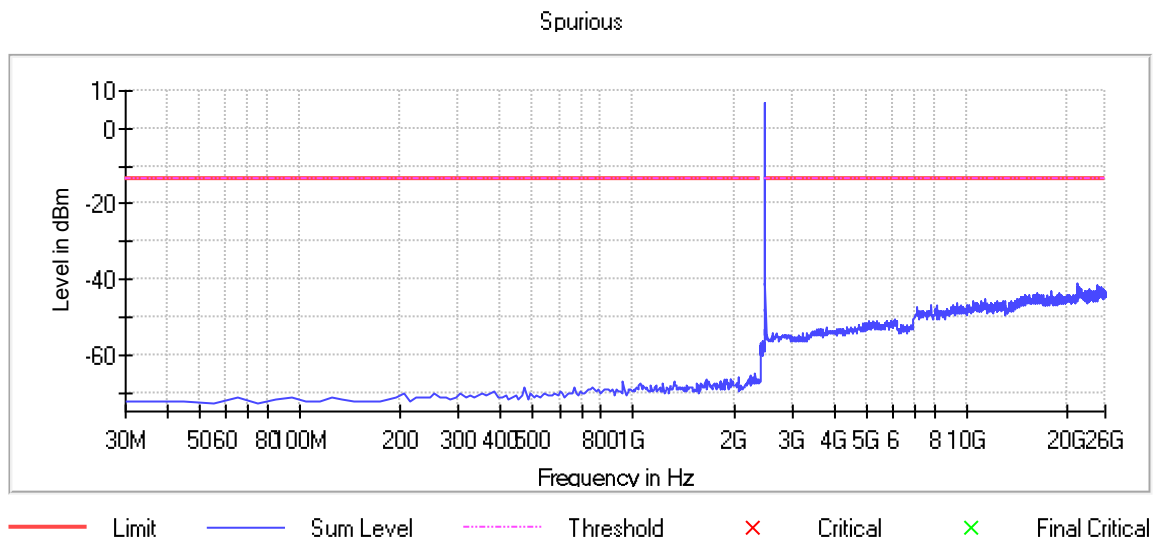

7.9 Radiated Spurious Emissions (RSE)

Applicability

This requirement applies to all types of DTS equipment.

Description

Spurious emission / unwanted emissions are emission on a frequency or frequencies which are outside the authorized band and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products. Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

| Frequency [MHz] | Field Strength [$\mu\text{V}/\text{m}$] / [dB $\mu\text{V}/\text{m}$] | Measurement distance [m] |
|-----------------|--|--------------------------|
| 0.009 – 0.490 | 2400/F[kHz] | 300 |
| 0.490 – 1.705 | 24000/F[kHz] | 30 |
| 1.705 – 30.0 | 30.0 / 29.5 | 30 |
| 30 – 88 | 100 / 40.0 | 3 |
| 88 – 216 | 150 / 43.5 | 3 |
| 216 – 960 | 200 / 46.0 | 3 |
| 960 – 40 000 | 500 / 54.0 | 3 |

Note

Radiated Spurious Emissions (RSE) are performed for low / mid / high channel and modulation with the highest output power (worst case). In case of spurious other modulations are spot-checked.

Test setup: 8.1, 8.2, 8.3

Test results

| EUT Mode / Channel | Frequency [MHz] | Peak/RMS Detector | Level [dBm] | Limit [dBm] | Verdict |
|--------------------|-----------------|-------------------|-------------|-------------|------------|
| (see plots) | (see plots) | (see plots) | (see plots) | (see plots) | - passed - |
| (see plots) | (see plots) | (see plots) | (see plots) | (see plots) | - passed - |


* all detected peaks are more than 6 dB below the limit

| | |
|-----------------|-----|
| Comment: | --- |
|-----------------|-----|

| | | |
|----------------|-----------------|----------------|
| Verdict | - PASS - | see next plots |
|----------------|-----------------|----------------|

Plot 58: Mode 1, RSE 9 kHz – 30 MHz, low channel, loop antenna

Full Spectrum

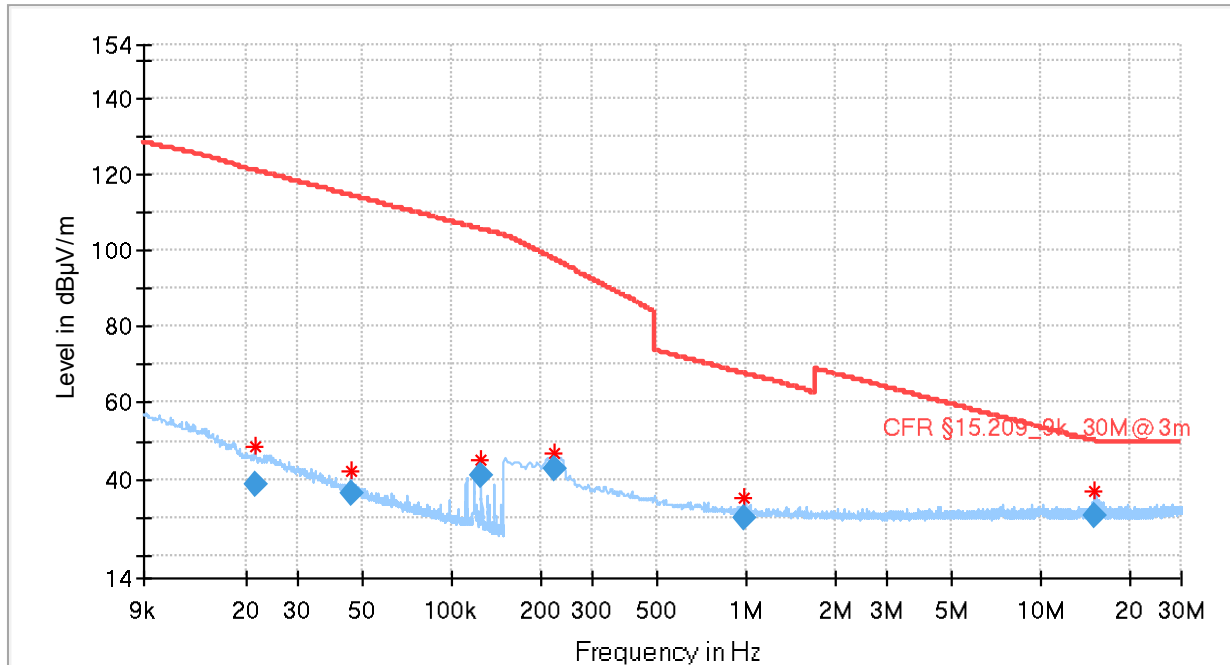


Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|---------------|--------------|
| 0.021400 | 38.35 | 121.09 | 82.74 | 15000.0 | 0.200 | 120.0 | 19.6 |
| 0.045700 | 36.46 | 114.45 | 77.99 | 15000.0 | 0.200 | 180.0 | 20.5 |
| 0.126000 | 41.10 | 105.61 | 64.50 | 15000.0 | 0.200 | 240.0 | 20.5 |
| 0.224250 | 42.62 | 97.61 | 54.99 | 15000.0 | 9.000 | 60.0 | 20.4 |
| 0.989250 | 29.73 | 67.70 | 37.97 | 15000.0 | 9.000 | 60.0 | 20.3 |
| 15.326250 | 30.26 | 50.04 | 19.78 | 15000.0 | 9.000 | 300.0 | 20.5 |

Plot 59: Mode 1, RSE 9 kHz – 30 MHz, mid channel, loop antenna

Full Spectrum

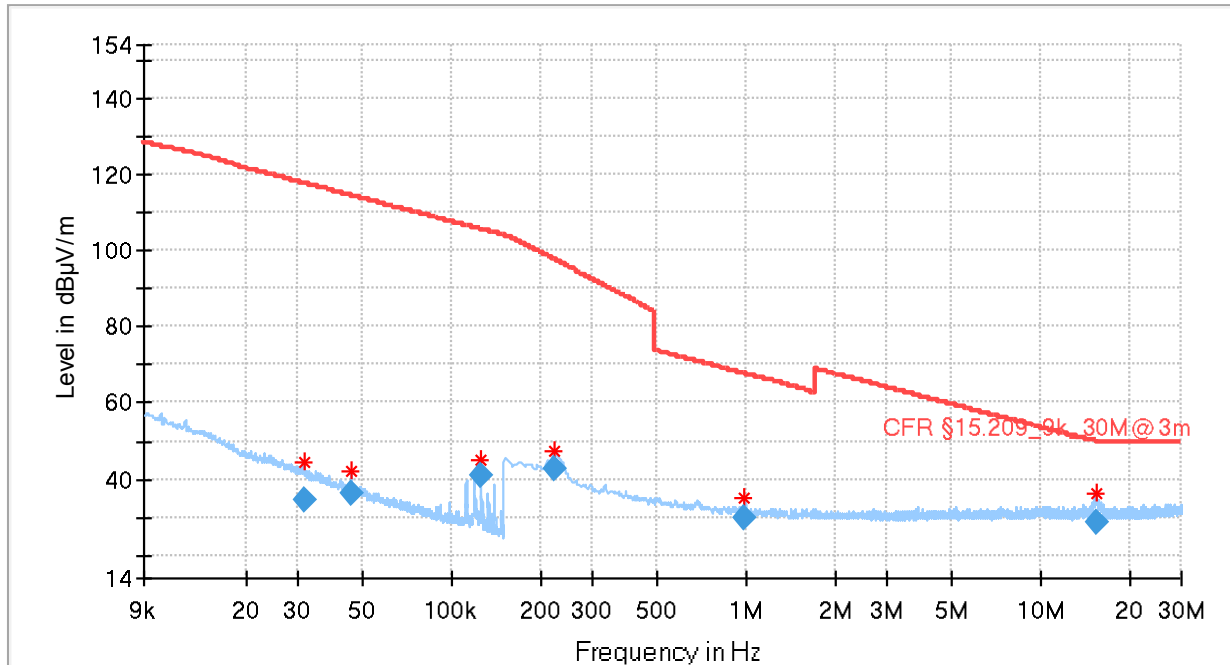


Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|---------------|--------------|
| 0.031350 | 34.62 | 117.72 | 83.10 | 15000.0 | 0.200 | 300.0 | 20.7 |
| 0.045700 | 36.29 | 114.45 | 78.16 | 15000.0 | 0.200 | 60.0 | 20.5 |
| 0.126000 | 41.08 | 105.61 | 64.52 | 15000.0 | 0.200 | 300.0 | 20.5 |
| 0.224250 | 42.53 | 97.61 | 55.08 | 15000.0 | 9.000 | 0.0 | 20.4 |
| 0.989250 | 29.73 | 67.70 | 37.97 | 15000.0 | 9.000 | 300.0 | 20.3 |
| 15.396000 | 28.78 | 50.04 | 21.26 | 15000.0 | 9.000 | 120.0 | 20.5 |

Plot 60: Mode 1, RSE 9 kHz – 30 MHz, high channel, loop antenna

Full Spectrum

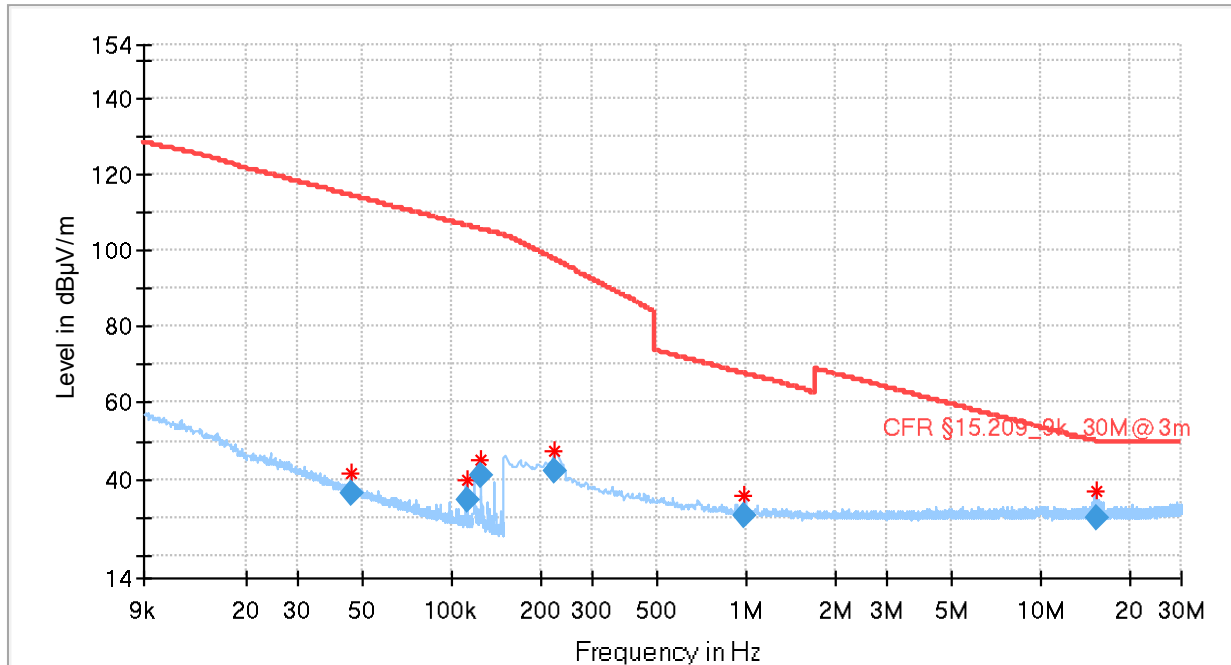


Final_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|---------------|--------------|
| 0.045750 | 36.00 | 114.44 | 78.44 | 15000.0 | 0.200 | 0.0 | 20.5 |
| 0.111950 | 34.75 | 106.63 | 71.88 | 15000.0 | 0.200 | 60.0 | 20.5 |
| 0.126000 | 41.09 | 105.61 | 64.51 | 15000.0 | 0.200 | 180.0 | 20.5 |
| 0.224250 | 42.40 | 97.61 | 55.22 | 15000.0 | 9.000 | 180.0 | 20.4 |
| 0.987000 | 30.26 | 67.72 | 37.46 | 15000.0 | 9.000 | 300.0 | 20.3 |
| 15.400500 | 30.02 | 50.04 | 20.02 | 15000.0 | 9.000 | 300.0 | 20.5 |

Plot 61: Mode 1, RSE 30 MHz – 1 GHz, low channel, horizontal / vertical polarisation

Full Spectrum

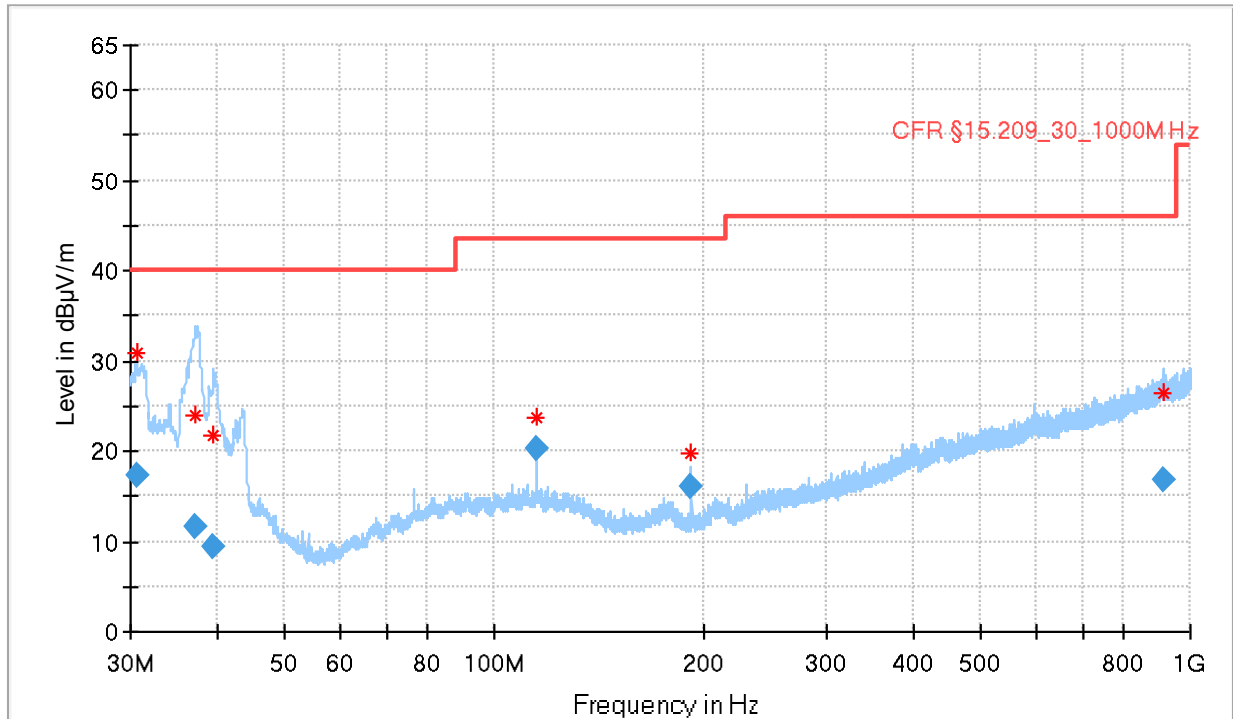


Final_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 30.600000 | 17.40 | 40.00 | 22.60 | 15000.0 | 120.000 | 374.0 | V | 17.0 | 20.3 |
| 37.230000 | 11.64 | 40.00 | 28.36 | 15000.0 | 120.000 | 107.0 | V | 68.0 | 16.6 |
| 39.390000 | 9.38 | 40.00 | 30.62 | 15000.0 | 120.000 | 104.0 | V | 17.0 | 15.4 |
| 115.200000 | 20.37 | 43.50 | 23.13 | 15000.0 | 120.000 | 130.0 | V | 31.0 | 13.1 |
| 192.000000 | 16.10 | 43.50 | 27.40 | 15000.0 | 120.000 | 122.0 | H | 201.0 | 10.5 |
| 912.000000 | 16.72 | 46.00 | 29.28 | 15000.0 | 120.000 | 370.0 | V | 37.0 | 24.3 |

Plot 62: Mode 1, RSE 30 MHz – 1 GHz, mid channel, horizontal / vertical polarisation

Full Spectrum

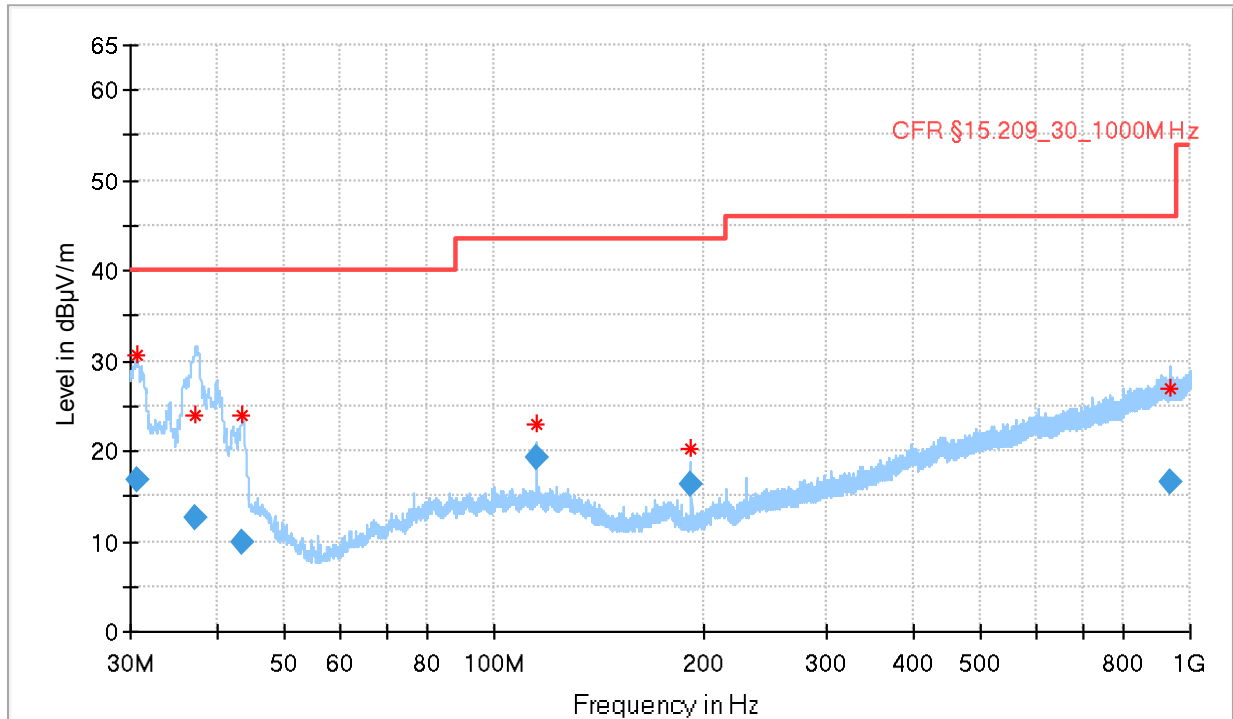


Final_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 30.570000 | 16.86 | 40.00 | 23.14 | 15000.0 | 120.000 | 374.0 | V | 212.0 | 20.3 |
| 37.230000 | 12.50 | 40.00 | 27.50 | 15000.0 | 120.000 | 100.0 | V | 217.0 | 16.6 |
| 43.320000 | 9.77 | 40.00 | 30.23 | 15000.0 | 120.000 | 122.0 | H | 267.0 | 12.8 |
| 115.200000 | 19.25 | 43.50 | 24.25 | 15000.0 | 120.000 | 130.0 | V | 227.0 | 13.1 |
| 192.000000 | 16.35 | 43.50 | 27.15 | 15000.0 | 120.000 | 122.0 | H | 201.0 | 10.5 |
| 933.930000 | 16.50 | 46.00 | 29.50 | 15000.0 | 120.000 | 124.0 | H | 211.0 | 24.3 |

Plot 63: Mode 1, RSE 30 MHz – 1 GHz, high channel, horizontal / vertical polarisation

Full Spectrum

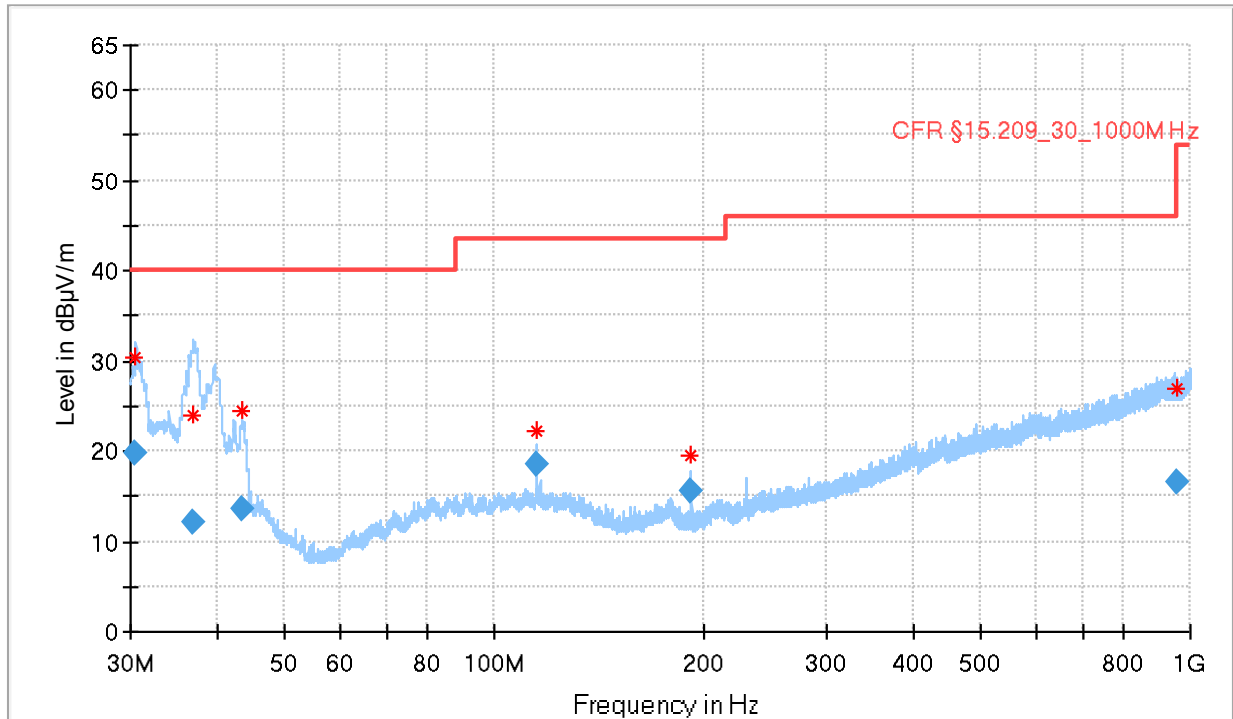


Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|
| 30.540000 | 19.85 | 40.00 | 20.16 | 15000.0 | 120.000 | 392.0 | V | 17.0 | 20.3 |
| 36.990000 | 12.15 | 40.00 | 27.85 | 15000.0 | 120.000 | 105.0 | V | 26.0 | 16.8 |
| 43.410000 | 13.51 | 40.00 | 26.49 | 15000.0 | 120.000 | 100.0 | H | 287.0 | 12.8 |
| 115.200000 | 18.54 | 43.50 | 24.96 | 15000.0 | 120.000 | 122.0 | V | 252.0 | 13.1 |
| 192.000000 | 15.66 | 43.50 | 27.84 | 15000.0 | 120.000 | 130.0 | H | 217.0 | 10.5 |
| 953.250000 | 16.51 | 46.00 | 29.49 | 15000.0 | 120.000 | 130.0 | H | 117.0 | 24.4 |

Plot 64: Mode 1, RSE 1 GHz – 18 GHz, low channel, horizontal / vertical polarisation

Full Spectrum

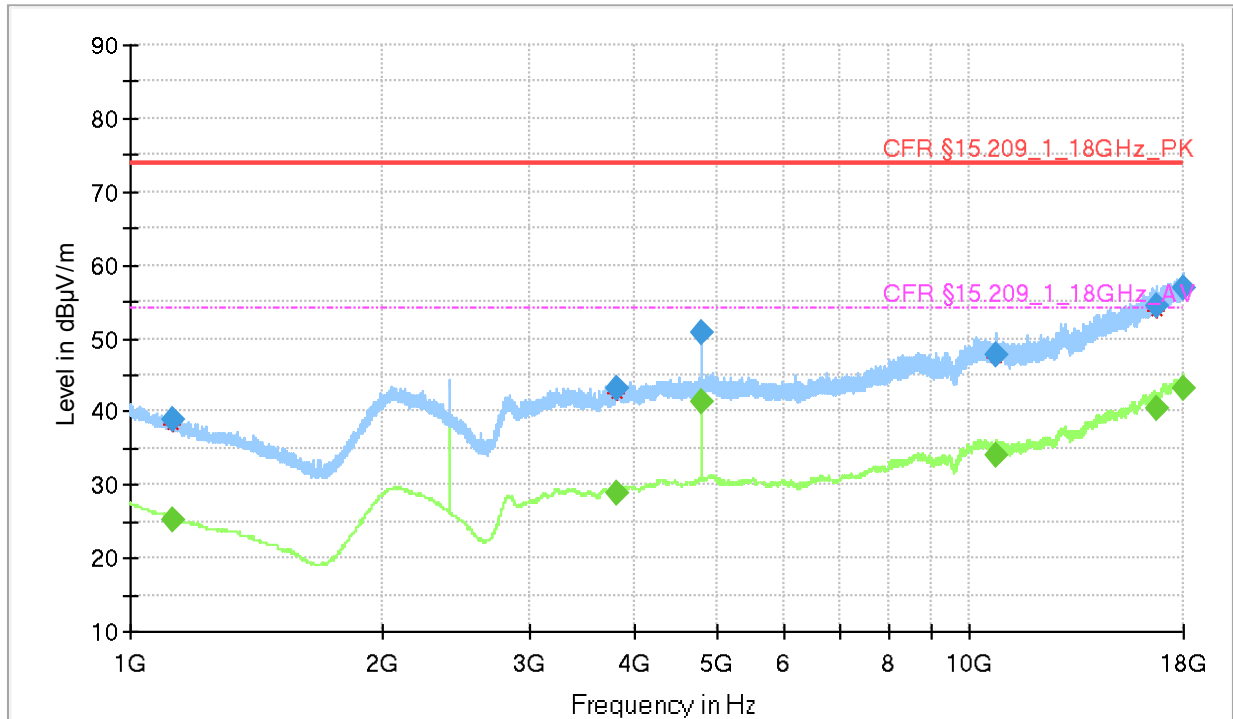


Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-----|---------------|--------------|
| 1123.500000 | 39.04 | --- | 74.00 | 34.96 | 15000.0 | 1000.000 | H | 111.0 | -2.9 |
| 1123.500000 | --- | 25.08 | 54.00 | 28.92 | 15000.0 | 1000.000 | H | 111.0 | -2.9 |
| 3795.250000 | 43.03 | --- | 74.00 | 30.97 | 15000.0 | 1000.000 | H | 72.0 | 8.3 |
| 3795.250000 | --- | 28.91 | 54.00 | 25.09 | 15000.0 | 1000.000 | H | 72.0 | 8.3 |
| 4804.000000 | --- | 41.28 | 54.00 | 12.72 | 15000.0 | 1000.000 | H | 230.0 | 10.4 |
| 4804.000000 | 50.75 | --- | 74.00 | 23.25 | 15000.0 | 1000.000 | H | 230.0 | 10.4 |
| 10775.000000 | --- | 34.01 | 54.00 | 19.99 | 15000.0 | 1000.000 | V | 95.0 | 17.1 |
| 10775.000000 | 47.74 | --- | 74.00 | 26.26 | 15000.0 | 1000.000 | V | 95.0 | 17.1 |
| 16706.750000 | --- | 40.51 | 54.00 | 13.49 | 15000.0 | 1000.000 | V | 116.0 | 25.0 |
| 16706.750000 | 54.38 | --- | 74.00 | 19.62 | 15000.0 | 1000.000 | V | 116.0 | 25.0 |
| 17978.250000 | --- | 43.23 | 54.00 | 10.77 | 15000.0 | 1000.000 | V | 192.0 | 27.5 |
| 17978.250000 | 56.87 | --- | 74.00 | 17.13 | 15000.0 | 1000.000 | V | 192.0 | 27.5 |

Note: Carrier suppressed!

Plot 65: Mode 1, RSE 1 GHz – 18 GHz, mid channel, horizontal / vertical polarisation

Full Spectrum

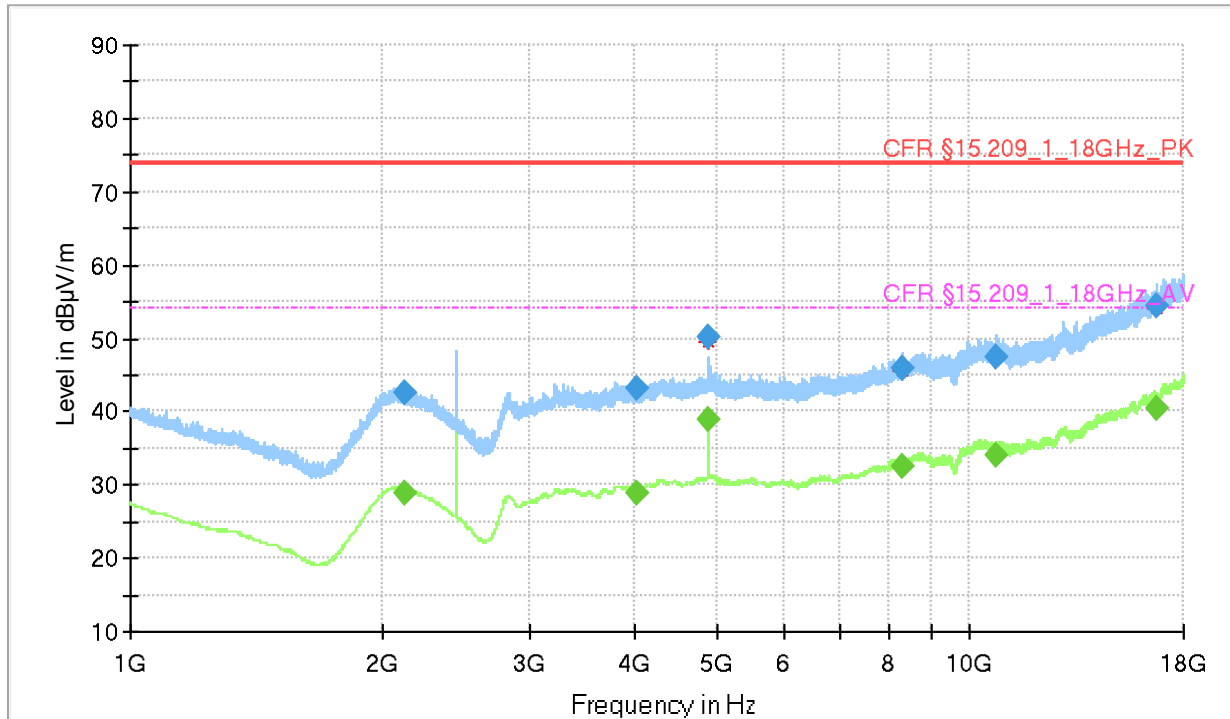


Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-----|---------------|--------------|
| 2120.500000 | --- | 28.94 | 54.00 | 25.06 | 15000.0 | 1000.000 | H | 54.0 | 2.1 |
| 2120.500000 | 42.58 | --- | 74.00 | 31.42 | 15000.0 | 1000.000 | H | 54.0 | 2.1 |
| 4017.500000 | 43.12 | --- | 74.00 | 30.88 | 15000.0 | 1000.000 | V | 335.0 | 8.6 |
| 4017.500000 | --- | 28.77 | 54.00 | 25.23 | 15000.0 | 1000.000 | V | 335.0 | 8.6 |
| 4879.500000 | --- | 39.00 | 54.00 | 15.00 | 15000.0 | 1000.000 | H | 233.0 | 10.6 |
| 4879.500000 | 50.12 | --- | 74.00 | 23.88 | 15000.0 | 1000.000 | H | 233.0 | 10.6 |
| 8342.000000 | 46.00 | --- | 74.00 | 28.00 | 15000.0 | 1000.000 | V | 183.0 | 14.6 |
| 8342.000000 | --- | 32.41 | 54.00 | 21.59 | 15000.0 | 1000.000 | V | 183.0 | 14.6 |
| 10759.250000 | 47.47 | --- | 74.00 | 26.53 | 15000.0 | 1000.000 | V | 136.0 | 17.1 |
| 10759.250000 | --- | 33.91 | 54.00 | 20.09 | 15000.0 | 1000.000 | V | 136.0 | 17.1 |
| 16704.500000 | 54.38 | --- | 74.00 | 19.62 | 15000.0 | 1000.000 | H | 115.0 | 25.0 |
| 16704.500000 | --- | 40.53 | 54.00 | 13.47 | 15000.0 | 1000.000 | H | 115.0 | 25.0 |

Note: Carrier suppressed!

Plot 66: Mode 1, RSE 1 GHz – 18 GHz, high channel, horizontal / vertical polarisation

Full Spectrum

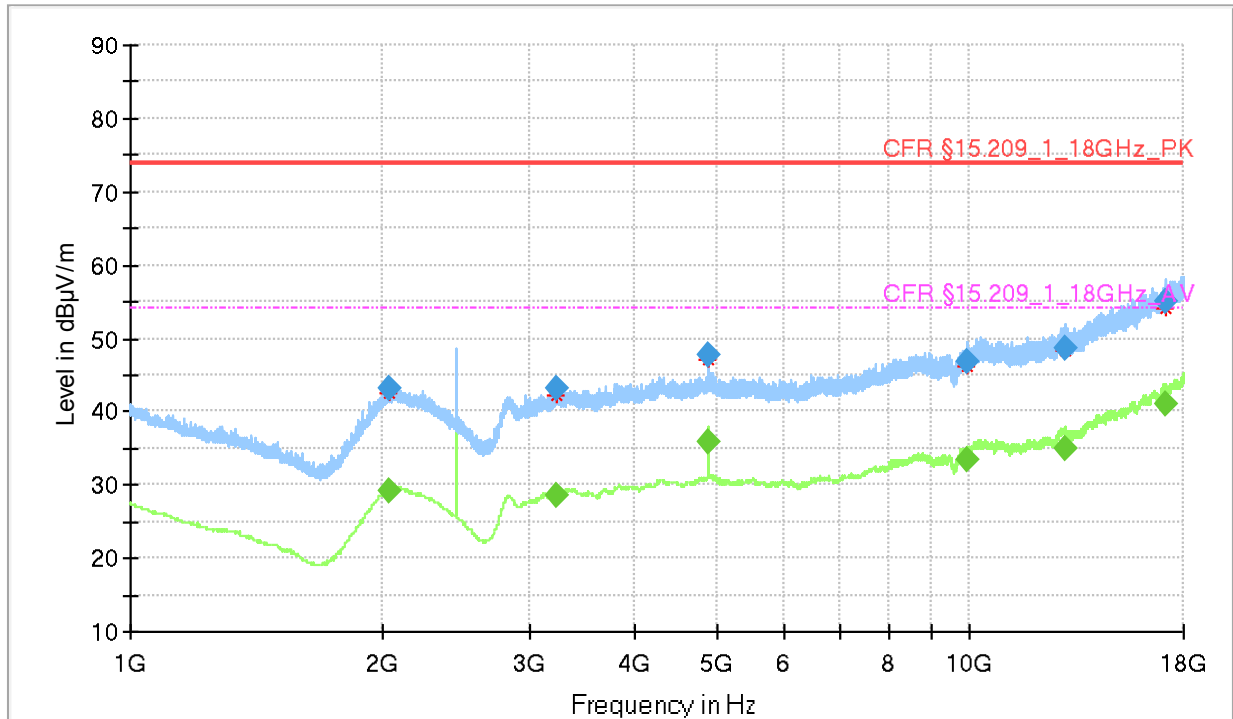


Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-----|---------------|--------------|
| 2036.000000 | 43.03 | --- | 74.00 | 30.97 | 15000.0 | 1000.000 | H | 52.0 | 2.5 |
| 2036.000000 | --- | 29.08 | 54.00 | 24.92 | 15000.0 | 1000.000 | H | 52.0 | 2.5 |
| 3221.500000 | 43.07 | --- | 74.00 | 30.93 | 15000.0 | 1000.000 | V | 220.0 | 6.7 |
| 3221.500000 | --- | 28.55 | 54.00 | 25.46 | 15000.0 | 1000.000 | V | 220.0 | 6.7 |
| 4879.750000 | 47.85 | --- | 74.00 | 26.15 | 15000.0 | 1000.000 | H | 280.0 | 10.6 |
| 4879.750000 | --- | 35.72 | 54.00 | 18.28 | 15000.0 | 1000.000 | H | 280.0 | 10.6 |
| 9957.250000 | --- | 33.29 | 54.00 | 20.71 | 15000.0 | 1000.000 | H | 27.0 | 16.7 |
| 9957.250000 | 46.75 | --- | 74.00 | 27.25 | 15000.0 | 1000.000 | H | 27.0 | 16.7 |
| 13035.750000 | --- | 34.79 | 54.00 | 19.21 | 15000.0 | 1000.000 | V | 197.0 | 19.4 |
| 13035.750000 | 48.57 | --- | 74.00 | 25.43 | 15000.0 | 1000.000 | V | 197.0 | 19.4 |
| 17121.500000 | 54.88 | --- | 74.00 | 19.12 | 15000.0 | 1000.000 | H | 57.0 | 25.4 |
| 17121.500000 | --- | 41.08 | 54.00 | 12.92 | 15000.0 | 1000.000 | H | 57.0 | 25.4 |

Note: Carrier suppressed!

Plot 67: Mode 1, RSE 18 GHz – 25 GHz, low channel, horizontal / vertical polarisation

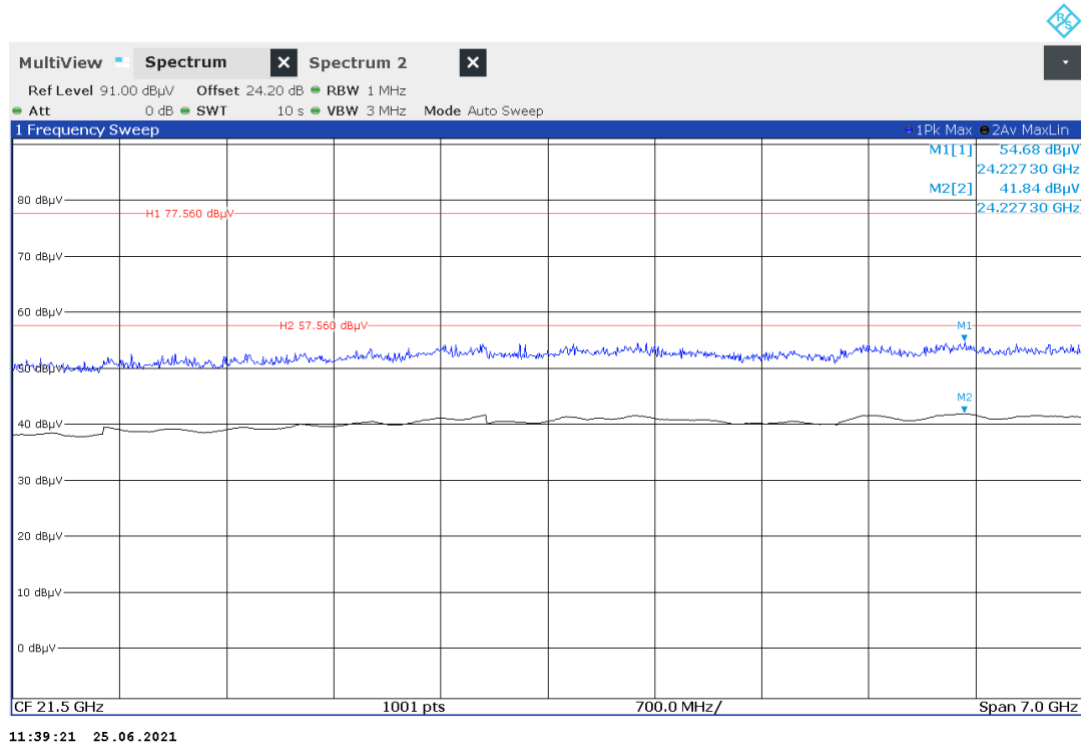

Plot 68: Mode 1, RSE 18 GHz – 25 GHz, mid channel, horizontal / vertical polarisation

