

RF EXPOSURE Test Report

Product: Hydration Bottle+Power Bank+Wireless
Charger

Trade Mark: TYLT

Model Number: PWRBTL24BK-T

FCC ID: 2AOAF-7302

Prepared for

TYLT, Inc.

685 Cochran St. Suite 200 Simi Valley California 93065, United States

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd

Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	5
1.3	TEST SETUP.....	5
1.4	ANCILLARY EQUIPMENT	5
2	TEST FACILITIES AND ACCREDITATIONS	6
2.1	TEST LABORATORY	6
2.2	ENVIRONMENTAL CONDITIONS.....	6
2.3	MEASUREMENT UNCERTAINTY	6
2.4	TEST SOFTWARE.....	6
3	LIST OF TEST EQUIPMENT	7
4	RF EXPOSURE.....	8
4.1	MAXIMUM PERMISSIBLE EXPOSURE	8
4.1.1.	<i>Limit</i>	8
4.1.2.	<i>Test Procedures</i>	8
4.1.3.	<i>Equipment Approval Considerations item 5 b) of KDB 680106 D01 Wireless</i>	8
4.1.4.	<i>Test Setup.....</i>	9
4.1.5.	<i>Test Result</i>	9
5	PHOTOGRAPHS OF THE TEST SETUP.....	11

1 General Description

1.1 Description of EUT

Product name:	Hydration Bottle+Power Bank+Wireless Charger
Model name:	PWRBTL24BK-T
Series Model:	PWRBTL24W-T, PWRBTL24BL-T, PWRBTL24BR-T, PWRBTL24GR-T, PWRBTL24RD-T, PWRBTL24OR-T, PWRBTL24PK-T
Different of series model:	Except for the model and appearance color, all models have the same circuits and modules.
Operation frequency:	115kHz-205kHz
Operational mode:	Wireless charging
Modulation type:	FSK
Antenna type:	Coil Antenna
Hardware version:	V1.0
Software version:	V1.0
Battery:	DC 3.7V, 5700mAh, 21.09Wh
Power supply:	Input (Type-C): DC 5V/2A Output (Type-C/USB): DC 5V/2.1A Wireless Output: 5W Total Max: 10.5W
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	Wireless Output: 5W

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Phone	iPhone 12 Pro	DNPF9UL20 D9L	Apple Inc.

2 Test Facilities and Accreditations

2.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

2.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
E-field	± 2.5 dB	
H-field	± 4.2 dB	
Temperature	± 1 degree	
Humidity	± 5 %	

2.4 Test Software

Software name	Manufacturer	Model	Version
MAGPy V2.0	Schmid & Partner Engineering AG	MAGPy V2.0	V2.0

3 List of Test Equipment

Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	/	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy V2.0	3061	2023-04-13	2024-04-12

MAGPy probe information:

Magnetic Amplitude and Gradient Probe System of probe MAGPy-8H3D+E3D consists of eight isotropic H-field subprobes and one isotropic E-field subprobe that are all integrated inside the probe head with a flat tip. Each isotropic H-field subprobe comprises three concentric orthogonal loop coil sensors. The isotropic E-field subprobe is composed of three orthogonal sensors (x and y sensors are dipoles and the sensor measuring the z component is a monopole). In total, the MAGPy-8H3D+E3D V2 probe is thus composed of nine subprobes and 27 single sensors that measure in the time-domain. The flat-tip probe design brings the sensors closer to the tip (e.g., the closest H-field sensors are now 7.5mm from the tip).

The probe specifications are provided in Table 2.1.

Parameter	Specs
PROBE DESIGN	
Diameter	60 mm
8 isotropic <i>H</i> -field sensors	concentric loops of 1 cm ² arranged at the corner of a cube of 22 mm side length
1 isotropic <i>E</i> -field sensor	orthogonal dipole/monopole (arm length: 50 mm)
Measurement center	18.5 mm from the probe tip
Temperature range	0–40 °C
Dimensions	110 × 635 × 35 mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
<i>H</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.1–3200 A/m, 0.12 μT–4 mT
Gradient range	0–80 T/m/T
<i>E</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.08–2000 V/m

Table 2.1: MAGPy-8H3D+E3D V2 probe specifications

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4 RF Exposure

4.1 Maximum Permissible Exposure

4.1.1. Limit

Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm ²)	Averaging time(minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0 6	6
300-1500	/	/	f/300	6
1500-100000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100000	/	/	1	30

f = frequency in MHz * = Plane-wave equivalent power density

4.1.2. Test Procedures


- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of TCB Workshop "41-Part-18-&-Wireless-Power-Transfer - April 27, 2022"

4.1.3. Equipment Approval Considerations item 5 b) of KDB 680106 D01 Wireless Power Transfer v04

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies are: 115kHz~205kHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The maximum output power is: Wireless Output: 5W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. EUT has a source primary coil.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.

5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No, EUT includes portable conditions.
6. The aggregate H-field strengths anywhere at or beyond 20 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes. See the test result in item 4.1.5

4.1.4. Test Setup

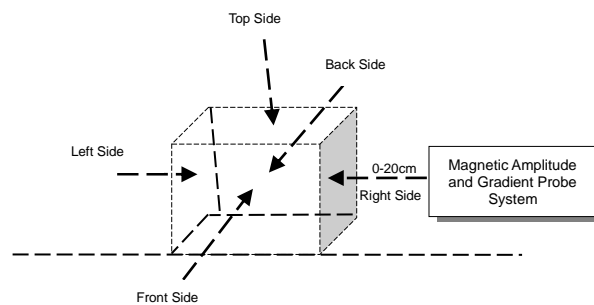

4.1.5. Test Result

For portable exposure condition:

Note: operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

H-field measurements taken every 2 cm (starting as close to 20 cm as possible) on each edge/top surface of the host/client pair were also evaluated for portable use conditions. The report reflects data for the worst 0 cm test distance mode only.

Test condition 1: Mode 1 operating mode with client device (1 % battery status of client device)
-test distance: 0cm

Measurement results directly tested using MAGPy.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E -field(V/m)	H-field(A/m)
<1%	Top	0	8.5328	0.1011
<1%	Left	0	8.0522	0.1026
<1%	Right	0	15.315	0.1084
<1%	Front	0	9.4962	0.1746
<1%	Back	0	12.261	0.1587
<1%	Bottom	0	14.264	0.2087
Limit			614	1.63
Margin Limit (%)			2.49%	12.80%

When setting MAGPy to select compliance location as probe tip, the measured value is extrapolated to 0mm as the result.

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E-field(V/m)	H-field(A/m)
<1%	Top	0	10.260	0.2514
<1%	Left	0	12.214	0.2621
<1%	Right	0	15.264	0.2547
<1%	Front	0	10.207	0.2087
<1%	Back	0	14.411	0.1611
<1%	Bottom	0	16.325	0.2513
Limit			614	1.63
Margin Limit (%)			2.66%	16.08%

5 Photographs of the Test Setup

MPE



***** END OF REPORT *****