

FCC TEST REPORT

For
TYLT Inc.
Pebble

Model No.: QIPEBPP

Prepared For : TYLT Inc.

Address : 685 Cochran St. Suite 200 Simi Valley CA United States 93065

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited

Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102

Tel: (86) 755-26066365 Fax: (86) 755-26014772

Report Number : SZAWW180330017-01

Date of Test : Mar. 30~Apr. 09, 2018

Date of Report : Apr. 09, 2018

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	21
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	23
APPENDIX III -- INTERNAL PHOTOGRAPH.....	26

TEST REPORT

Applicant : TYLT Inc.
Manufacturer : Shenzhen Pilot Technology Co., Ltd
Product Name : Pebble
Model No. : QIPEBPP
Trade Mark : TYLT
Rating(s) : Input: DC 5V, 1A
Output: DC 5V, 2.1A
Wireless charging output 5V 1A
With Battery 3.7V 4000mAh inside



Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Mar. 30~Apr. 09, 2018

Prepared by :  
(Tested Engineer / Winkey Wang)

Reviewer : 
(Project Manager / Tangcy. T)

Approved & Authorized Signer : 
(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	TYLT Inc.
Address	:	685 Cochran St. Suite 200 Simi Valley CA United States 93065
Manufacturer	:	Shenzhen Pilot Technology Co., Ltd
Address	:	A1 Building, No.7 Shankeng Road, Shankeng Industrial Park, Shanxia Community, Pinghu Street, Longgang District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	Pebble	
Model No.	:	QIPEBPP	
Trade Mark	:	TYLT	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter DC 3.7V Battery inside	
Product Description	:	Operation Frequency:	110-205KHz
	:	Number of Channel:	20 Channels
	:	Modulation Type:	MSK
	:	Antenna Type:	Loop Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Mobile Phone	:	Manufacturer: NOKIA
	:	M/N: N920 S/N: 356355051634804 CE , FCC, DOC
Adapter	:	Manufacturer: SAMSUNG M/N: ETA-U90CBC S/N: RT6FB17ZS/B-E Input: 100-240V~50/60Hz 0.35A Output: DC 5V, 2000mA

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH20
Mode 4	Keeping TX+Charging mode



For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX+Charging mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH20
Mode 4	Keeping TX+Charging mode

1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	0.110	6	0.135	11	0.160	16	0.185
2	0.115	7	0.140	12	0.165	17	0.190
3	0.120	8	0.145	13	0.170	18	0.195
4	0.125	9	0.150	14	0.175	19	0.200
5	0.130	10	0.155	15	0.180	20	0.205

1.6. Description Of Test Setup

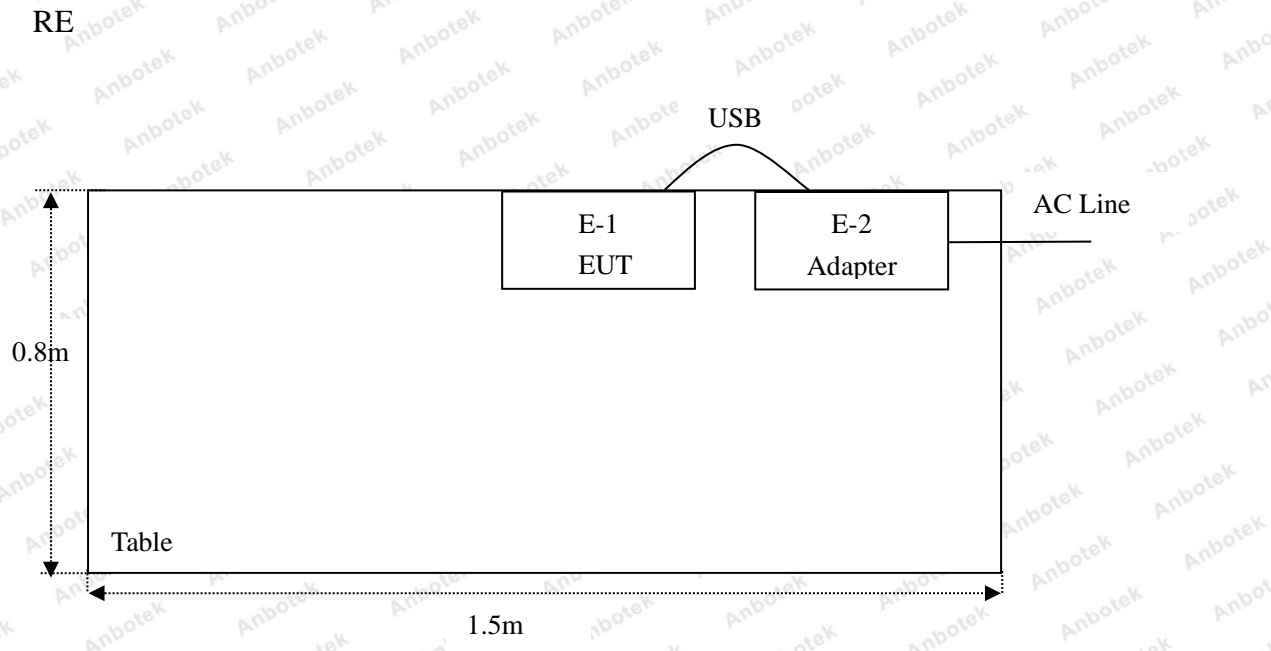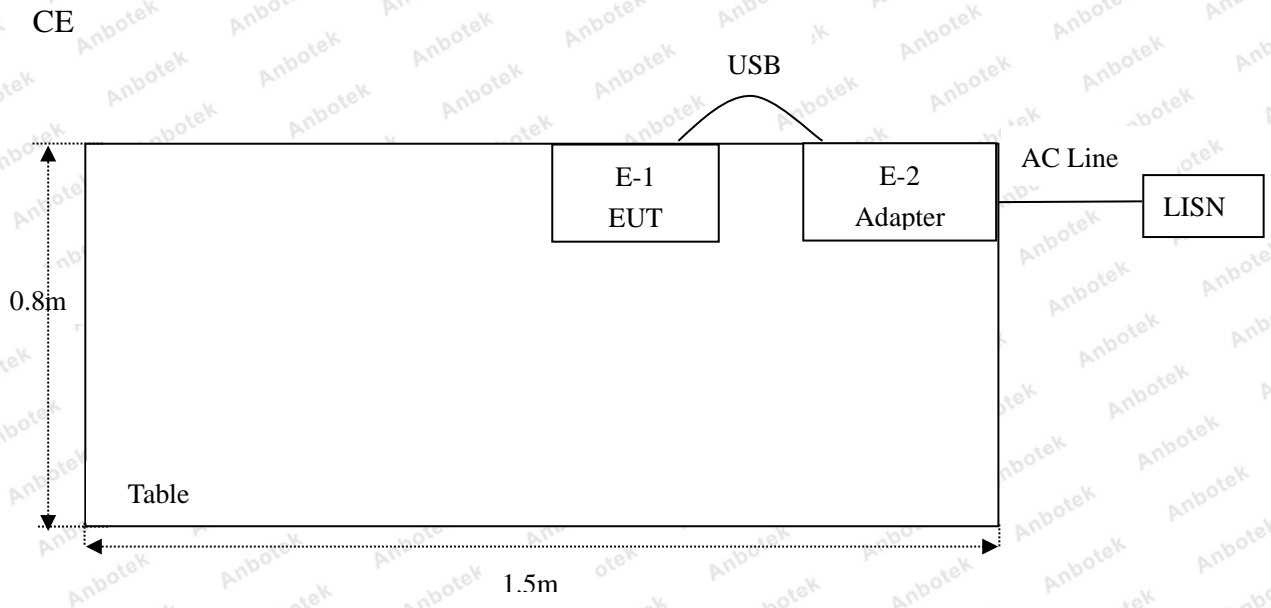

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80 B	ZJ-17042804	Nov. 01, 2017	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at Shenzhen Anbotek Compliance Laboratory Limited. at 1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

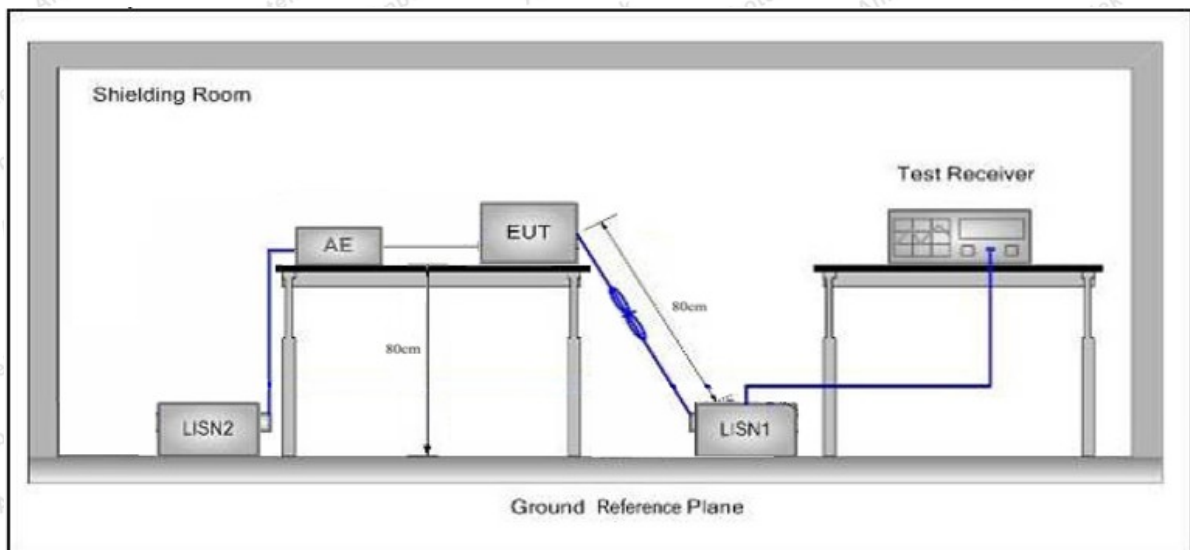

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.:22.3°C Hum.:57%

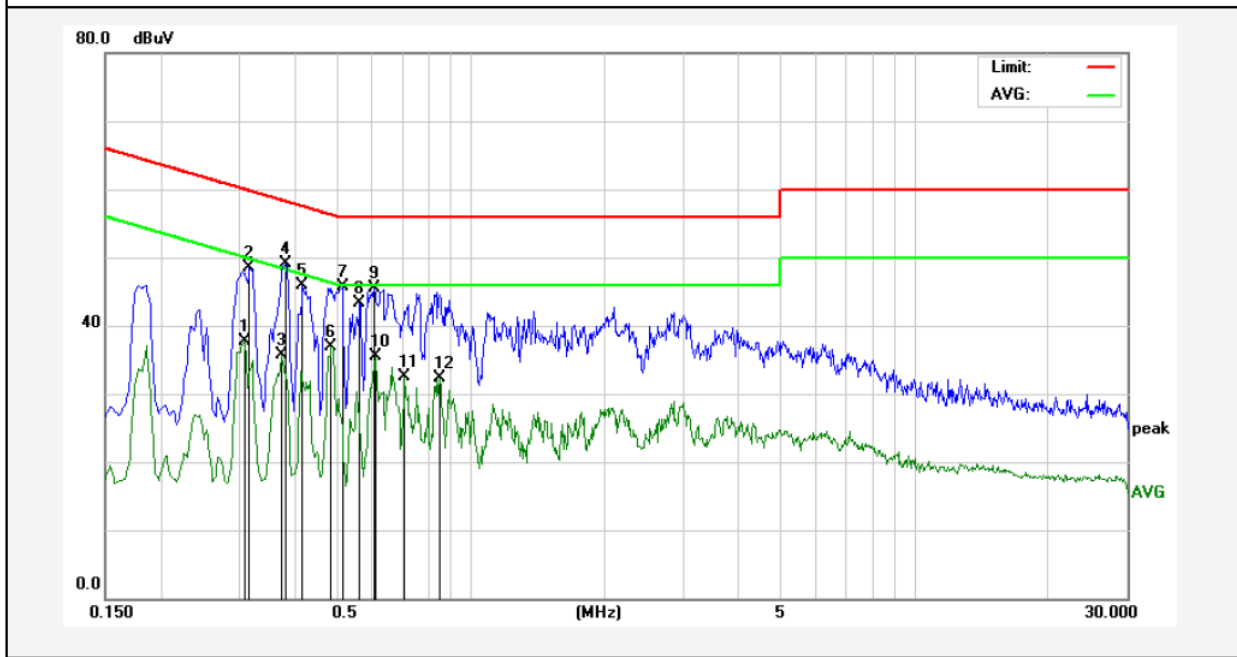

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3100	17.91	19.89	37.80	49.97	-12.17	AVG	
2	0.3180	28.57	19.90	48.47	59.76	-11.29	QP	
3	0.3740	15.72	19.92	35.64	48.41	-12.77	AVG	
4	0.3820	29.14	19.93	49.07	58.23	-9.16	QP	
5	0.4180	25.99	19.94	45.93	57.49	-11.56	QP	
6	0.4860	17.00	19.97	36.97	46.24	-9.27	AVG	
7	0.5140	25.77	19.98	45.75	56.00	-10.25	QP	
8	0.5620	23.34	20.00	43.34	56.00	-12.66	QP	
9	0.6060	25.40	20.01	45.41	56.00	-10.59	QP	
10	0.6100	15.41	20.01	35.42	46.00	-10.58	AVG	
11	0.7100	12.50	20.04	32.54	46.00	-13.46	AVG	
12	0.8500	12.15	20.08	32.23	46.00	-13.77	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:22.3°C Hum.:57%

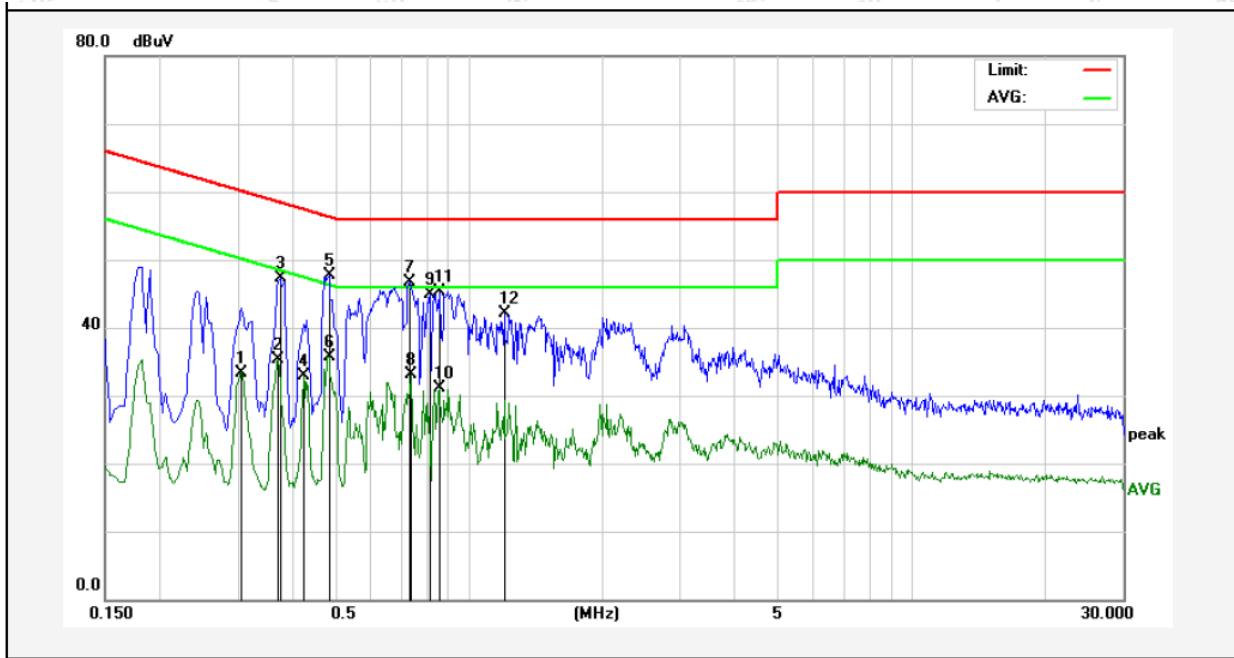

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3060	13.51	19.89	33.40	50.08	-16.68	AVG	
2	0.3700	15.35	19.92	35.27	48.50	-13.23	AVG	
3	0.3740	27.46	19.92	47.38	58.41	-11.03	QP	
4	0.4220	12.88	19.94	32.82	47.41	-14.59	AVG	
5	0.4820	27.69	19.97	47.66	56.30	-8.64	QP	
6	0.4820	15.80	19.97	35.77	46.30	-10.53	AVG	
7	0.7340	26.64	20.05	46.69	56.00	-9.31	QP	
8	0.7380	13.01	20.05	33.06	46.00	-12.94	AVG	
9	0.8139	24.93	20.07	45.00	56.00	-11.00	QP	
10	0.8540	11.10	20.08	31.18	46.00	-14.82	AVG	
11	0.8580	25.27	20.08	45.35	56.00	-10.65	QP	
12	1.2020	21.94	20.12	42.06	56.00	-13.94	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.:22.3℃ Hum.:57%

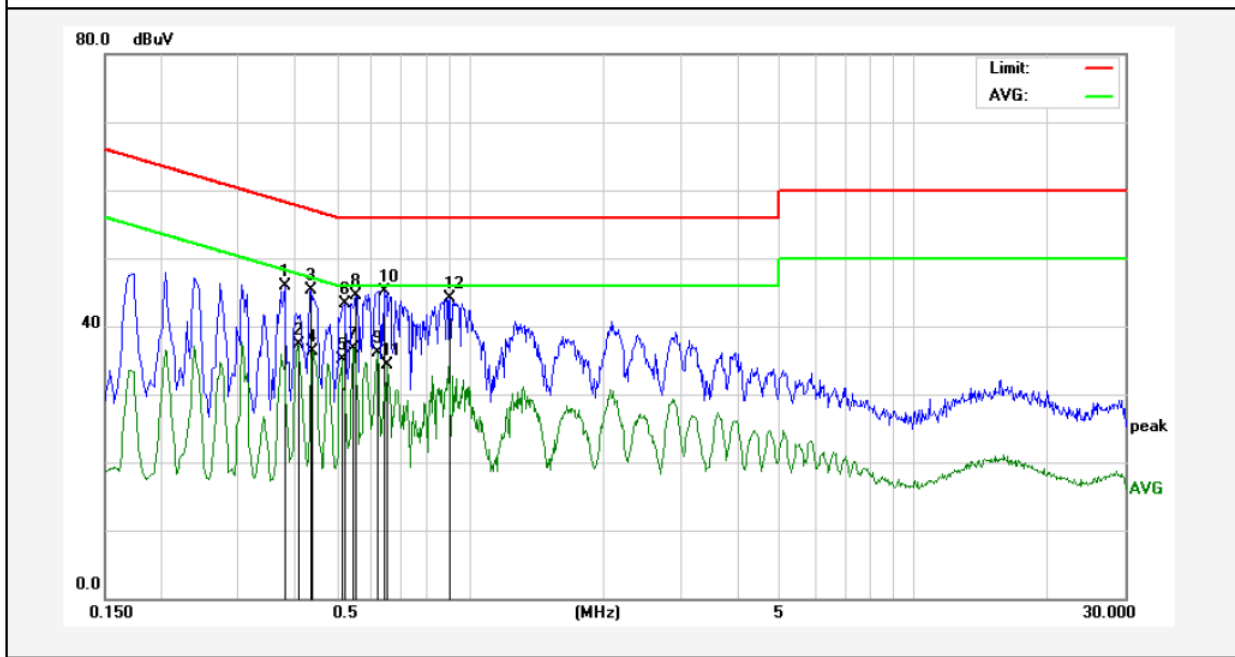

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3820	25.91	19.93	45.84	58.23	-12.39	QP	
2	0.4100	17.35	19.94	37.29	47.65	-10.36	AVG	
3	0.4380	25.27	19.95	45.22	57.10	-11.88	QP	
4	0.4420	16.30	19.95	36.25	47.02	-10.77	AVG	
5	0.5140	15.19	19.98	35.17	46.00	-10.83	AVG	
6	0.5220	23.24	19.99	43.23	56.00	-12.77	QP	
7	0.5460	16.78	19.99	36.77	46.00	-9.23	AVG	
8	0.5540	24.46	20.00	44.46	56.00	-11.54	QP	
9	0.6180	16.03	20.02	36.05	46.00	-9.95	AVG	
10	0.6419	25.09	20.02	45.11	56.00	-10.89	QP	
11	0.6500	14.27	20.02	34.29	46.00	-11.71	AVG	
12	0.9020	24.10	20.09	44.19	56.00	-11.81	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.:22.3°C Hum.:57%

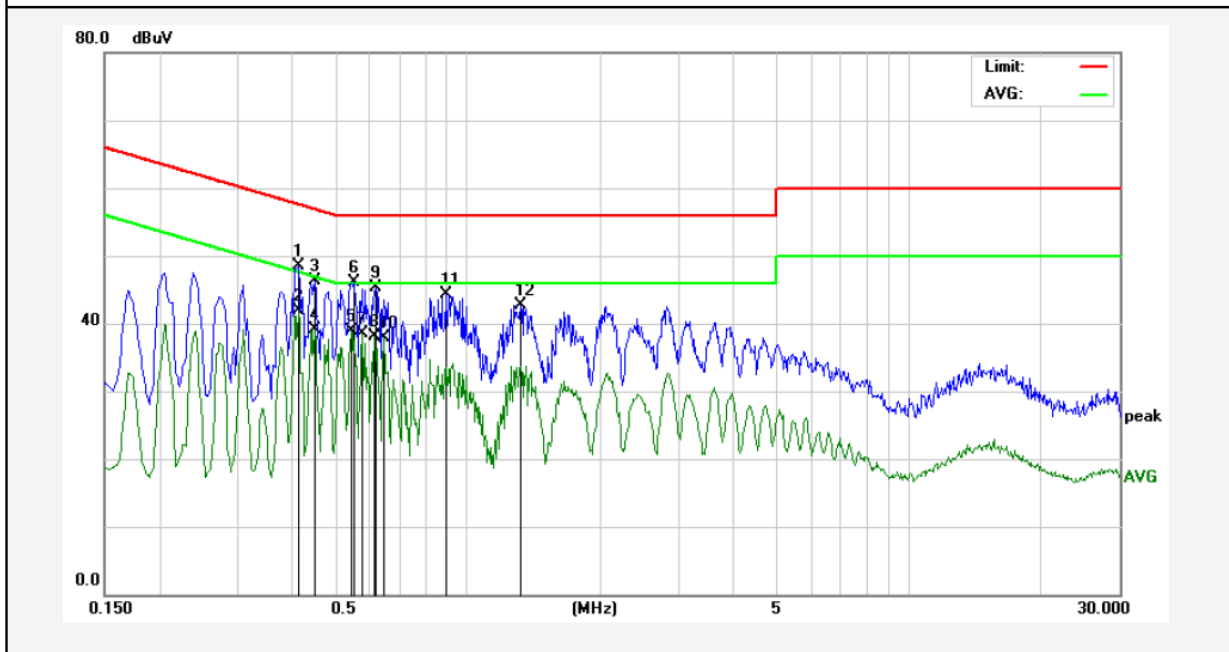

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit dBUV	Over Limit (dB)	Detector	Remark
1	0.4140	28.59	19.94	48.53	57.57	-9.04	QP	
2	0.4140	21.87	19.94	41.81	47.57	-5.76	AVG	
3	0.4500	26.34	19.96	46.30	56.87	-10.57	QP	
4	0.4500	19.19	19.96	39.15	46.87	-7.72	AVG	
5	0.5460	18.92	19.99	38.91	46.00	-7.09	AVG	
6	0.5540	26.02	20.00	46.02	56.00	-9.98	QP	
7	0.5780	18.43	20.00	38.43	46.00	-7.57	AVG	
8	0.6140	18.12	20.01	38.13	46.00	-7.87	AVG	
9	0.6180	25.24	20.02	45.26	56.00	-10.74	QP	
10	0.6460	17.87	20.02	37.89	46.00	-8.11	AVG	
11	0.8940	24.28	20.09	44.37	56.00	-11.63	QP	
12	1.3220	22.57	20.13	42.70	56.00	-13.30	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

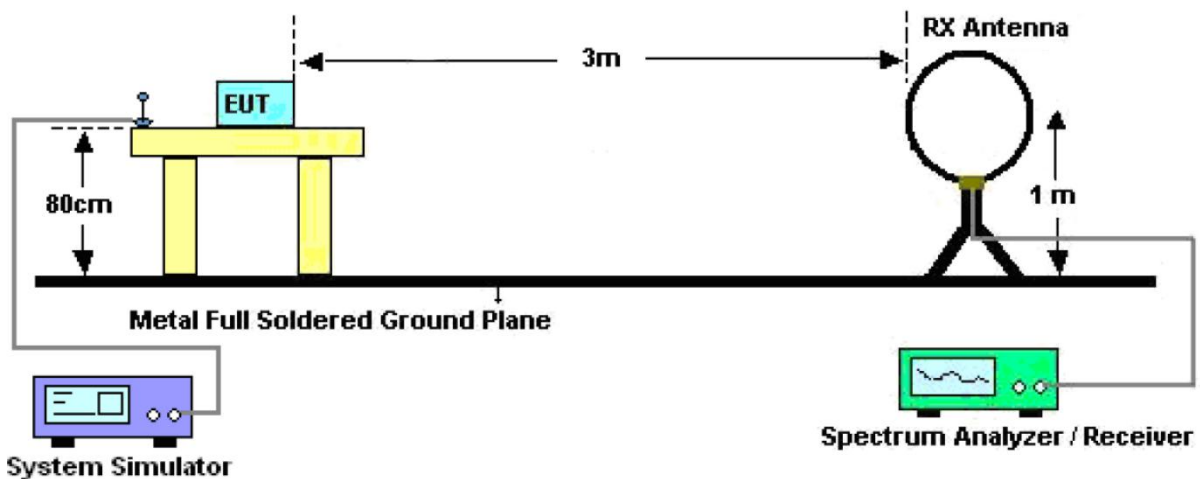


Figure 1. Below 30MHz

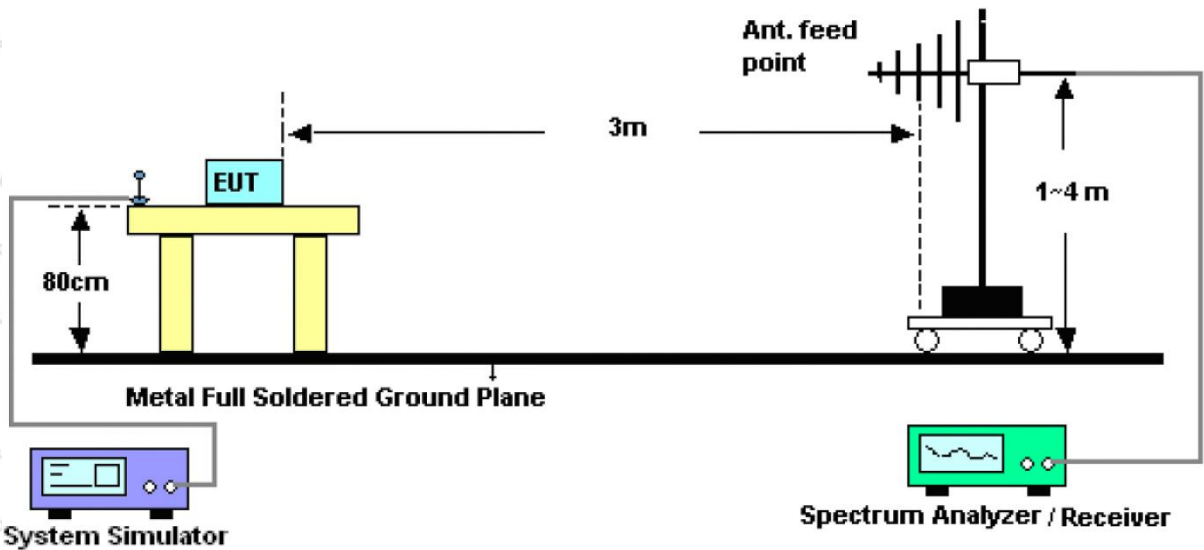


Figure 2. 30MHz to 1GHz

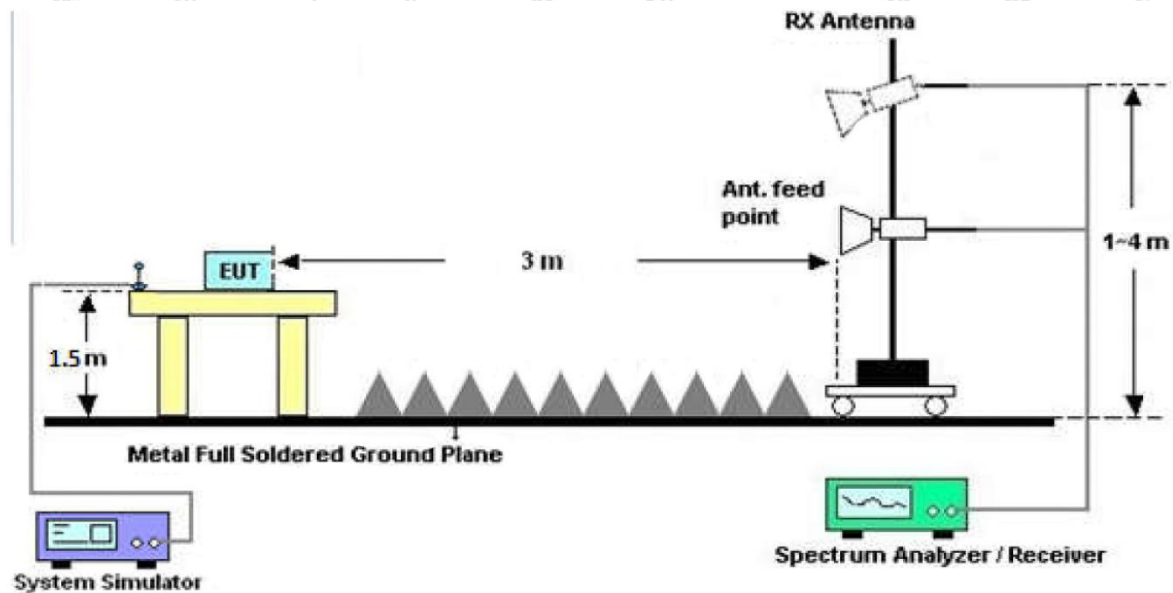


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

Test Results

(Between 9KHz – 30MHz)

Job No.:	SZAWW180330017-01		
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.4(C)/50%RH
Test Mode:	Mode 4	Distance:	3m

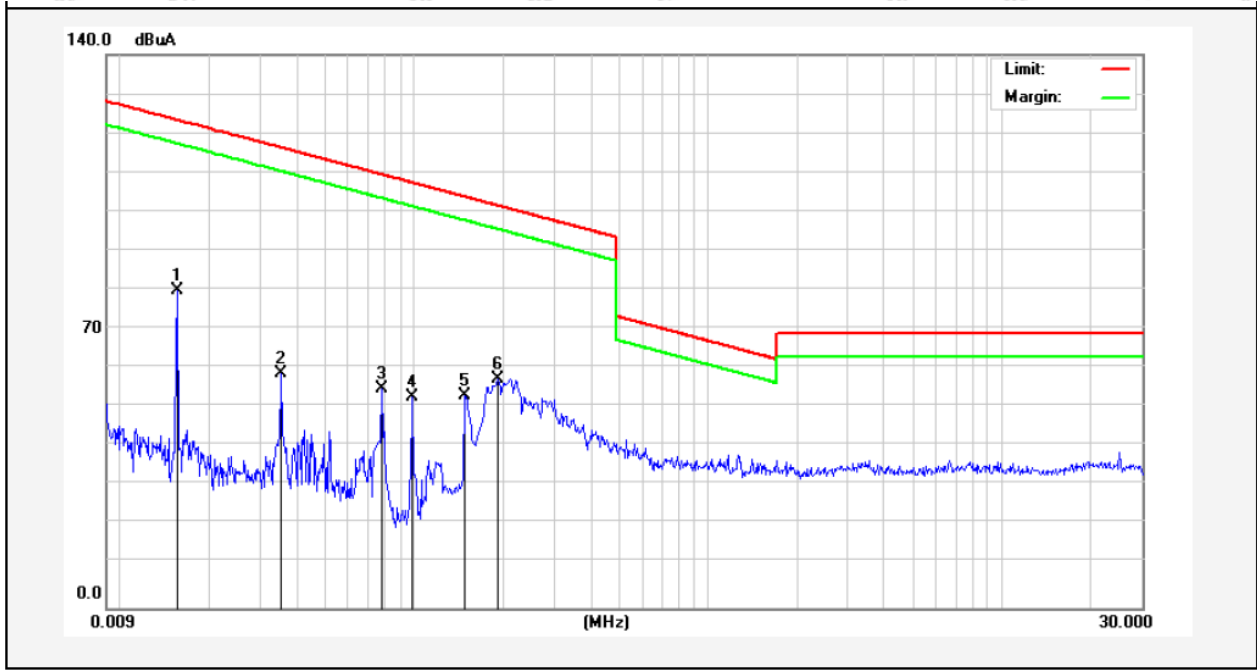


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree (dgc)
0.0158	61.84	19.27	2.53	0	83.64	143.46	-59.82	Peak	320
0.0158	58.41	19.27	2.53	0	80.21	123.46	-43.25	AV	320
0.0354	48.05	19.30	2.53	0	69.88	136.50	-66.62	Peak	141
0.0354	37.34	19.30	2.53	0	59.17	116.50	-57.33	AV	141
0.0782	43.57	19.35	2.55	0	65.47	129.65	-64.18	Peak	39
0.0782	33.71	19.35	2.55	0	55.61	109.65	-54.04	AV	39
0.0990	40.89	19.35	2.55	0	62.79	127.61	-64.82	Peak	124
0.0990	31.44	19.35	2.55	0	53.34	107.61	-54.27	AV	124
0.1499	41.33	19.62	2.59	0	63.54	124.03	-60.49	Peak	245
0.1499	31.42	19.62	2.59	0	53.63	104.03	-50.40	AV	245
0.1940	43.78	20.73	2.60	0	67.11	121.80	-54.69	Peak	100
0.1940	34.68	20.73	2.60	0	58.01	101.80	-43.79	AV	100

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


(Between 30MHz -1000 MHz)

Job No.:	SZAWW180330017-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.4(C)/50%RH
Test Mode:	Mode 4	Distance:	3m

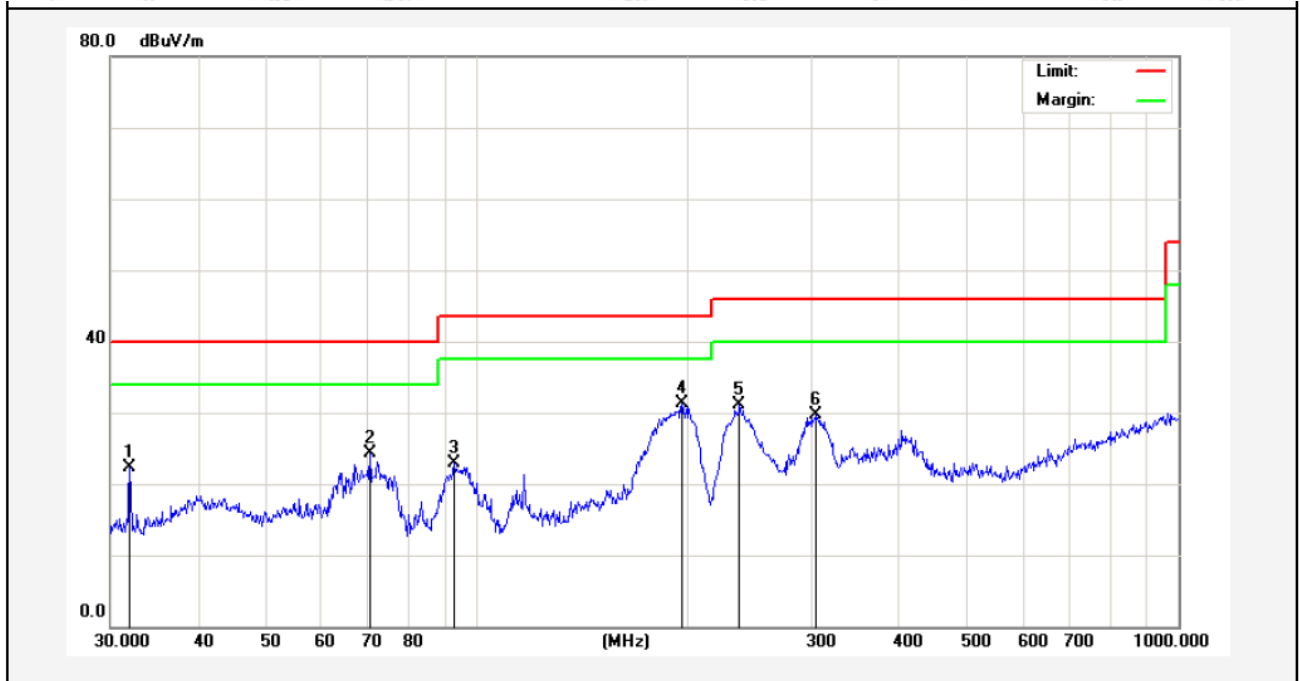

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.9546	40.22	-17.97	22.25	40.00	-17.75	QP	300	32	
2	70.3365	45.25	-20.88	24.37	40.00	-15.63	QP	300	110	
3	92.7871	45.11	-22.13	22.98	43.50	-20.52	QP	300	167	
4	195.8220	50.54	-19.31	31.23	43.50	-12.27	QP	300	243	
5	236.6447	48.96	-17.80	31.16	46.00	-14.84	QP	300	295	
6	303.5437	46.87	-17.26	29.61	46.00	-16.39	QP	300	336	

Job No.:	SZAWW180330017-01	Plarization:	Vertical
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.4(C)/50%RH
Test Mode:	Mode 4	Distance:	3m

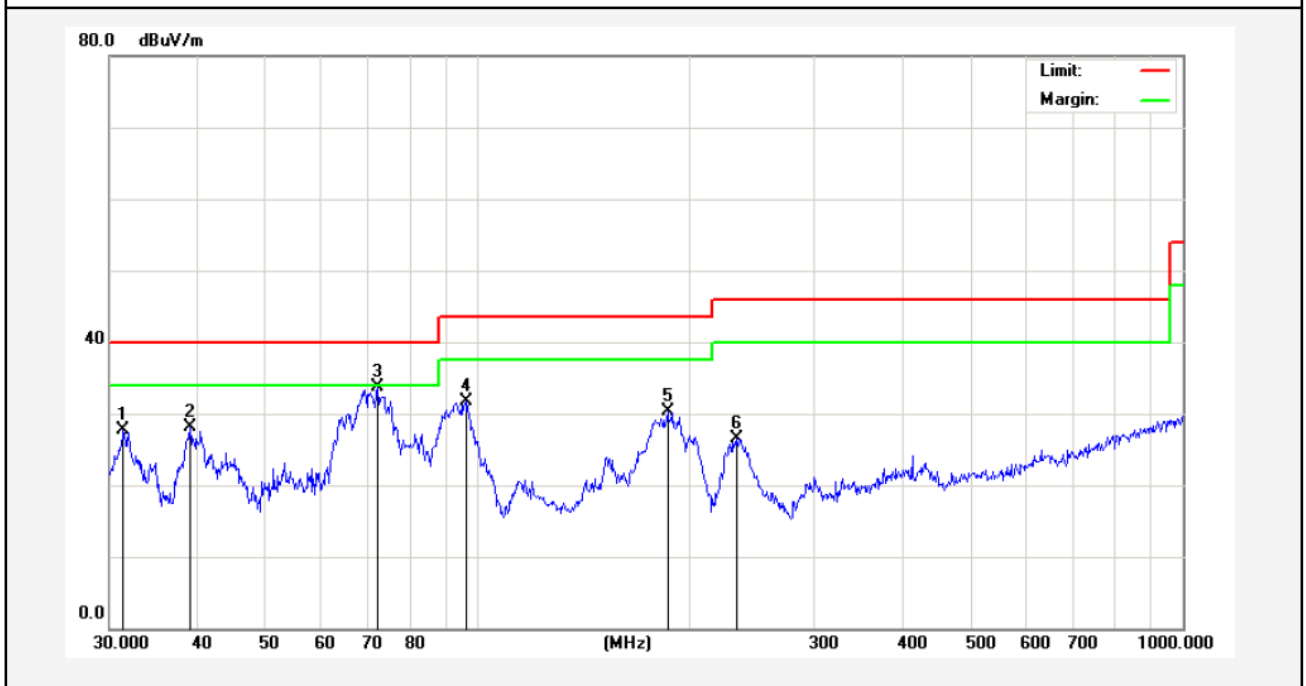

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.3992	44.93	-17.14	27.79	40.00	-12.21	QP	300	14	
2	39.0245	41.97	-13.90	28.07	40.00	-11.93	QP	300	67	
3	72.0843	53.90	-20.14	33.76	40.00	-6.24	QP	300	159	
4	96.0986	46.81	-15.12	31.69	43.50	-11.81	QP	300	264	
5	185.7882	45.67	-15.31	30.36	43.50	-13.14	QP	300	310	
6	232.5318	40.32	-13.80	26.52	46.00	-19.48	QP	300	357	


APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement







Photo of Radiation Emission Test





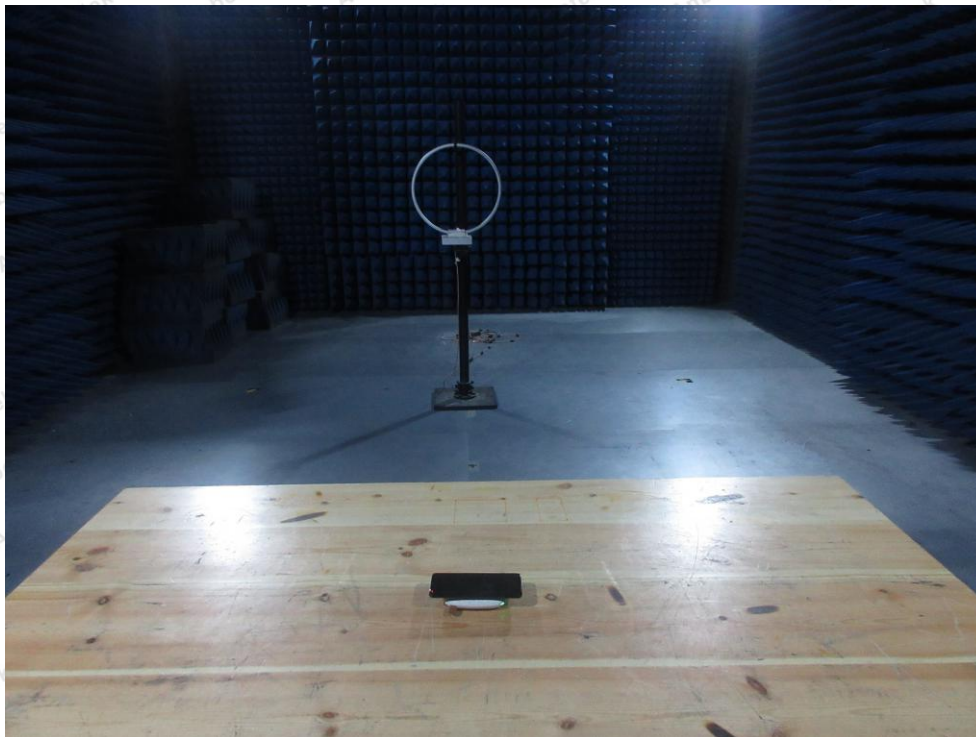

APPENDIX II -- EXTERNAL PHOTOGRAPH

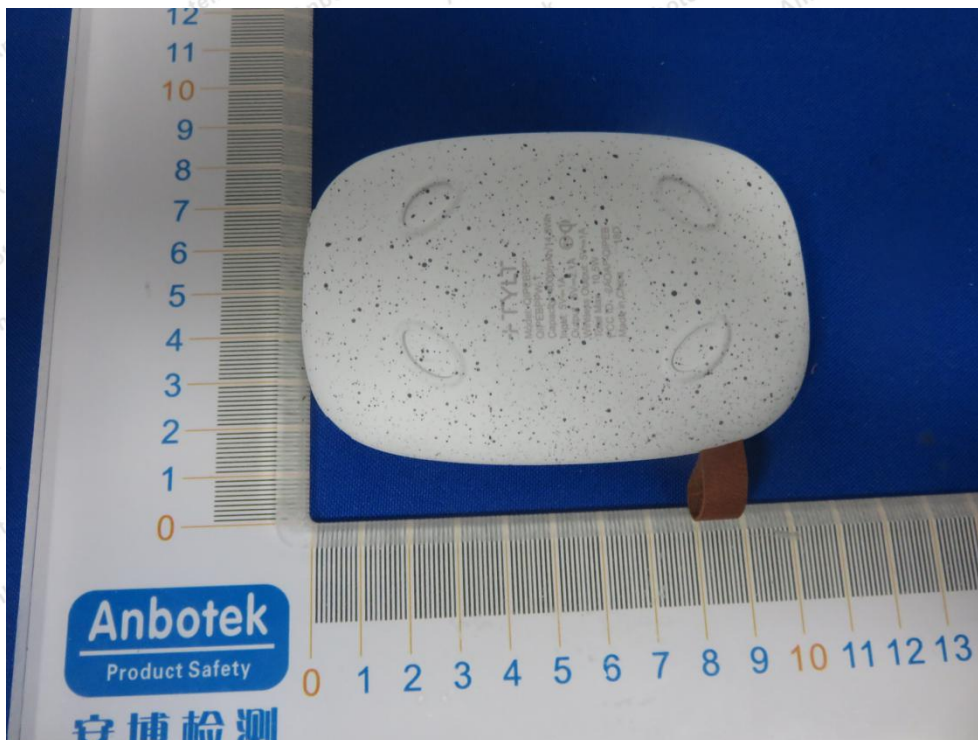
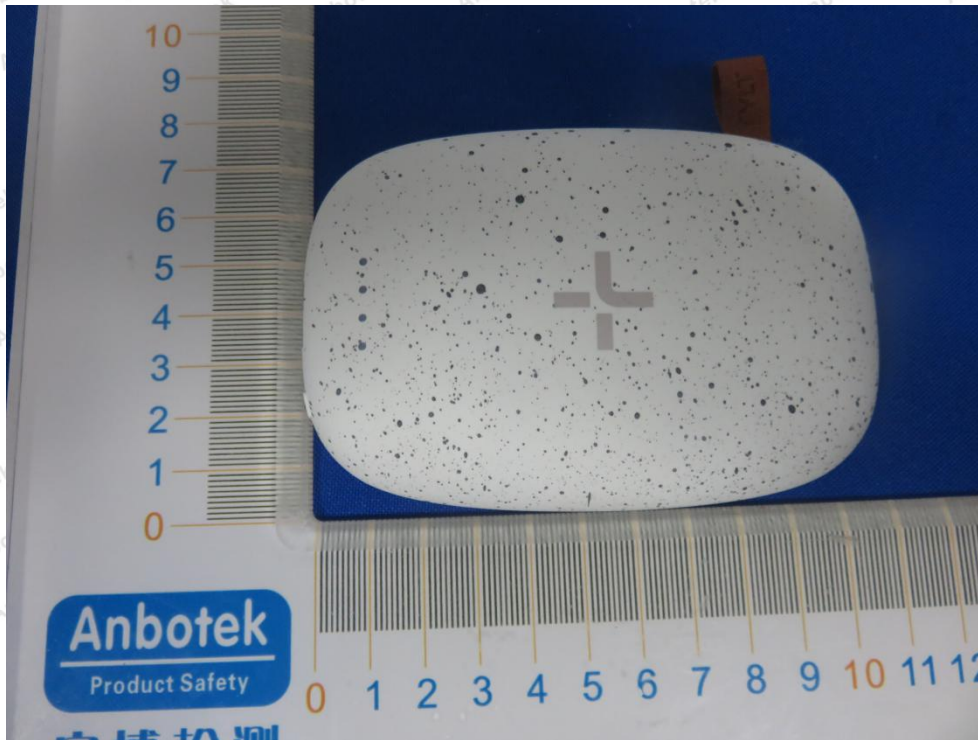


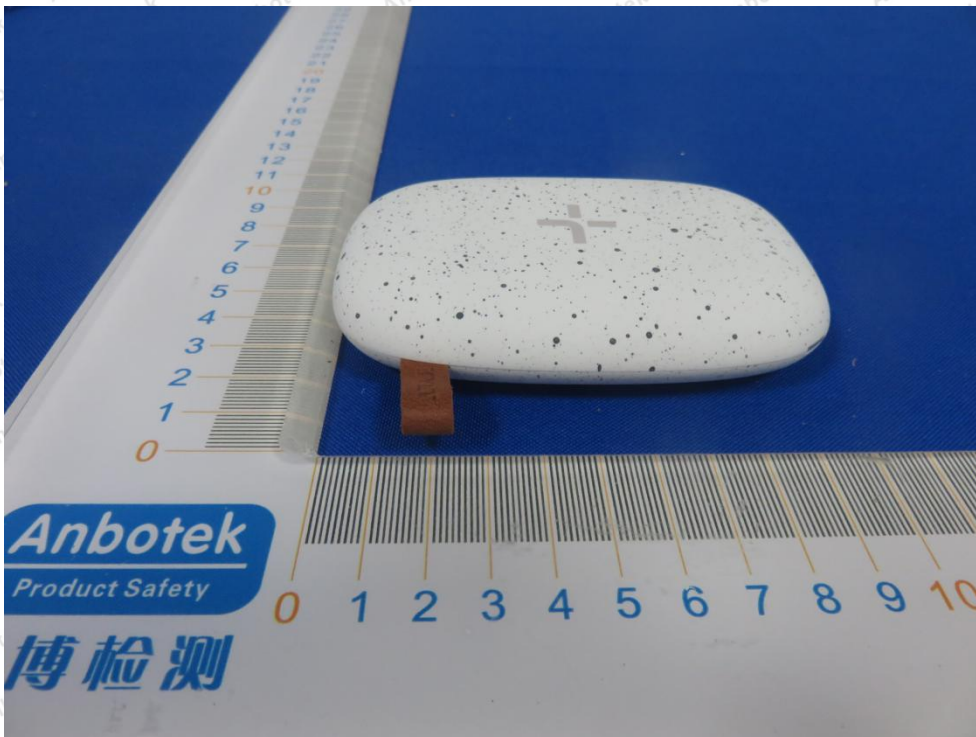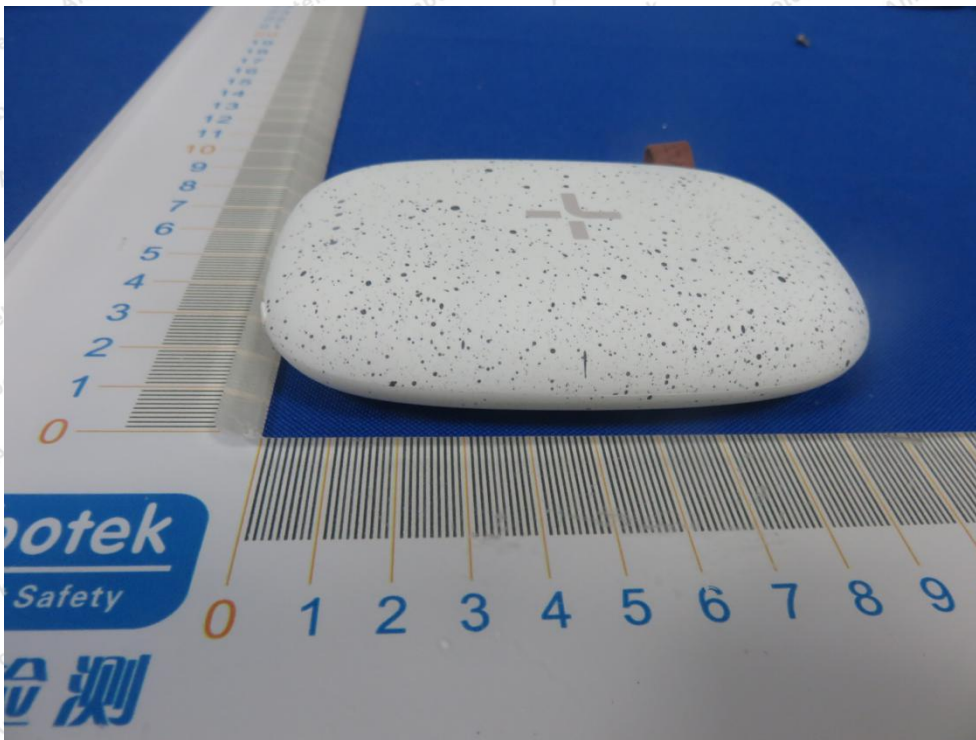


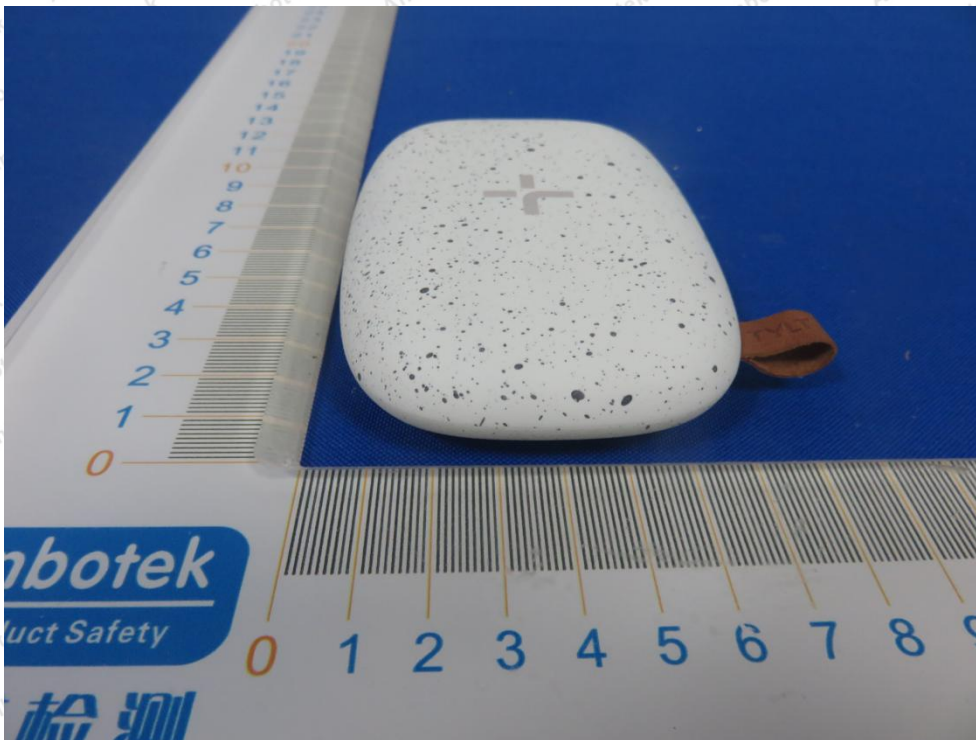
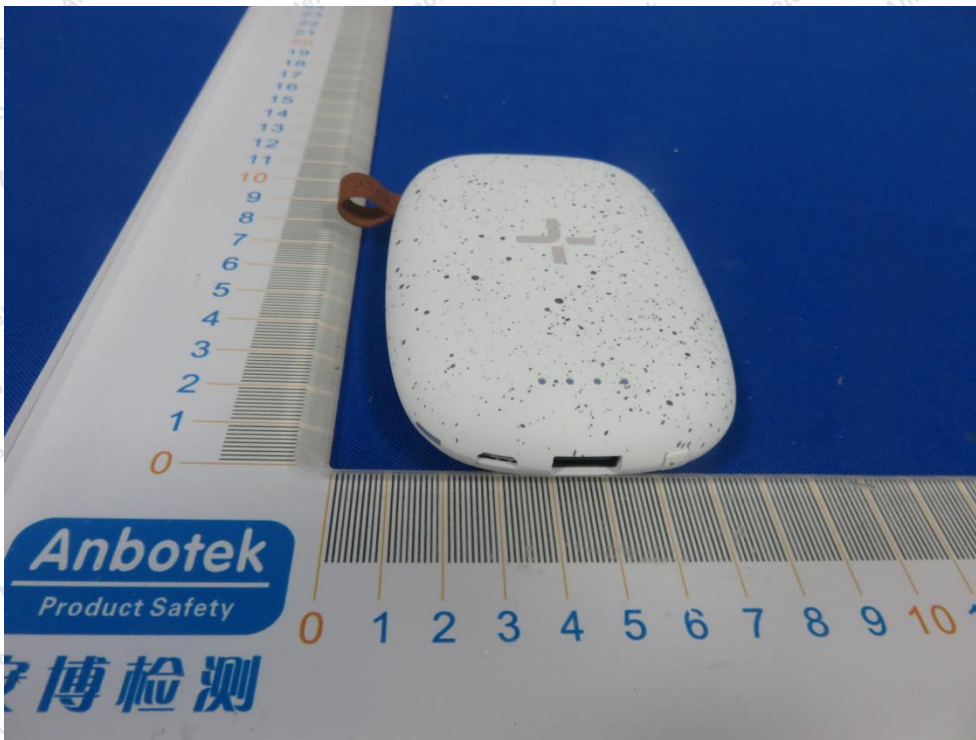




APPENDIX III -- INTERNAL PHOTOGRAPH




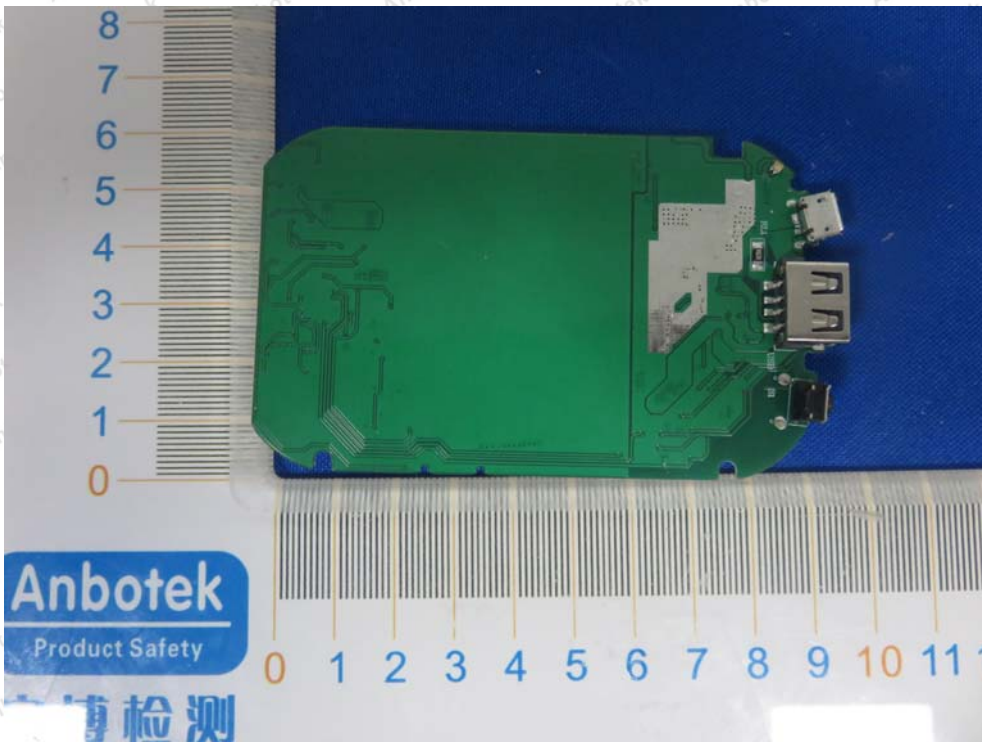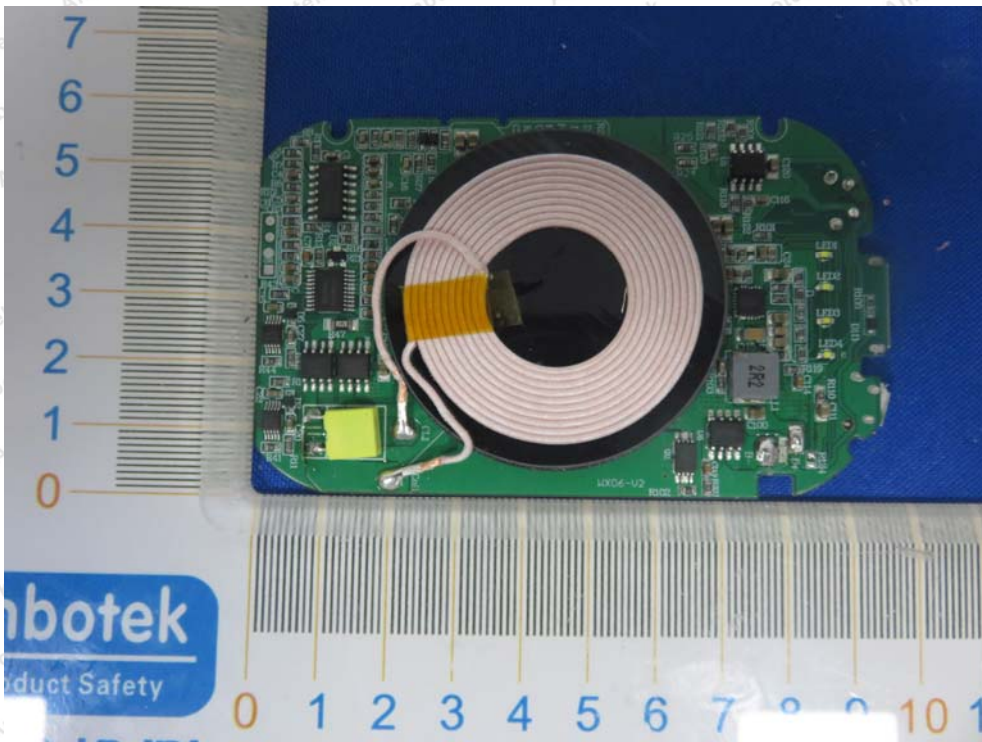

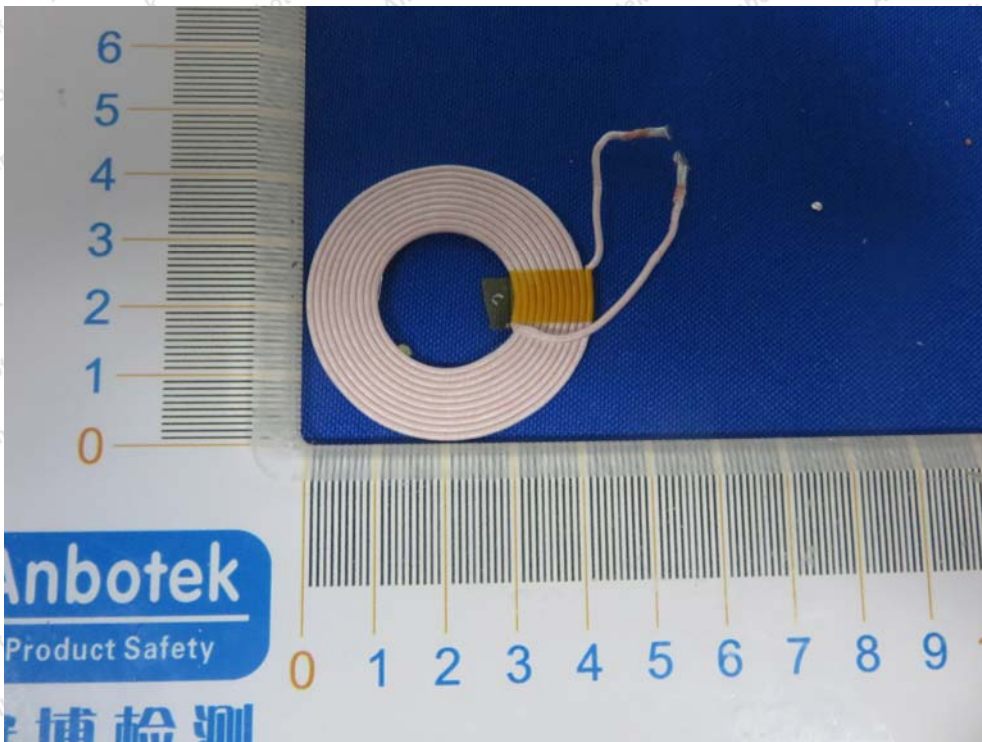

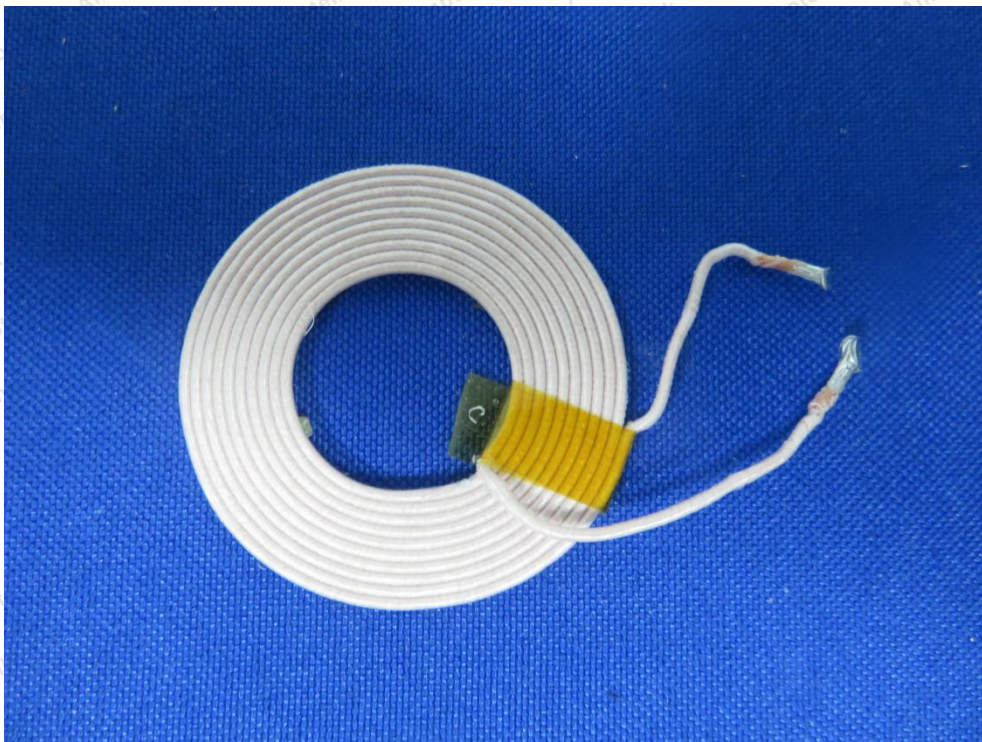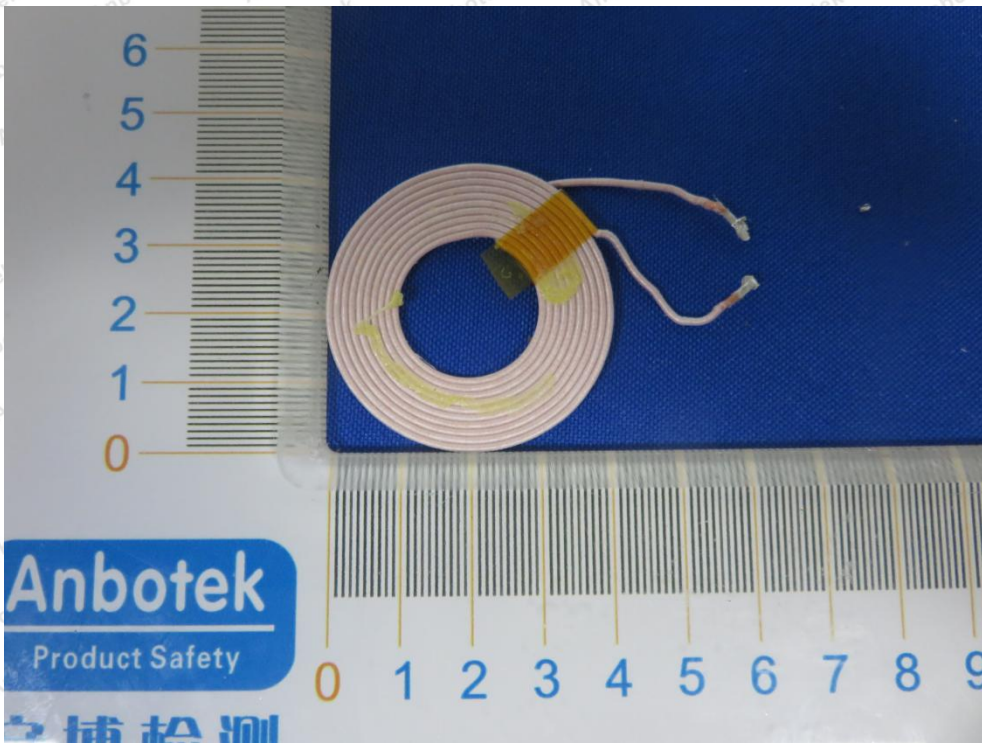

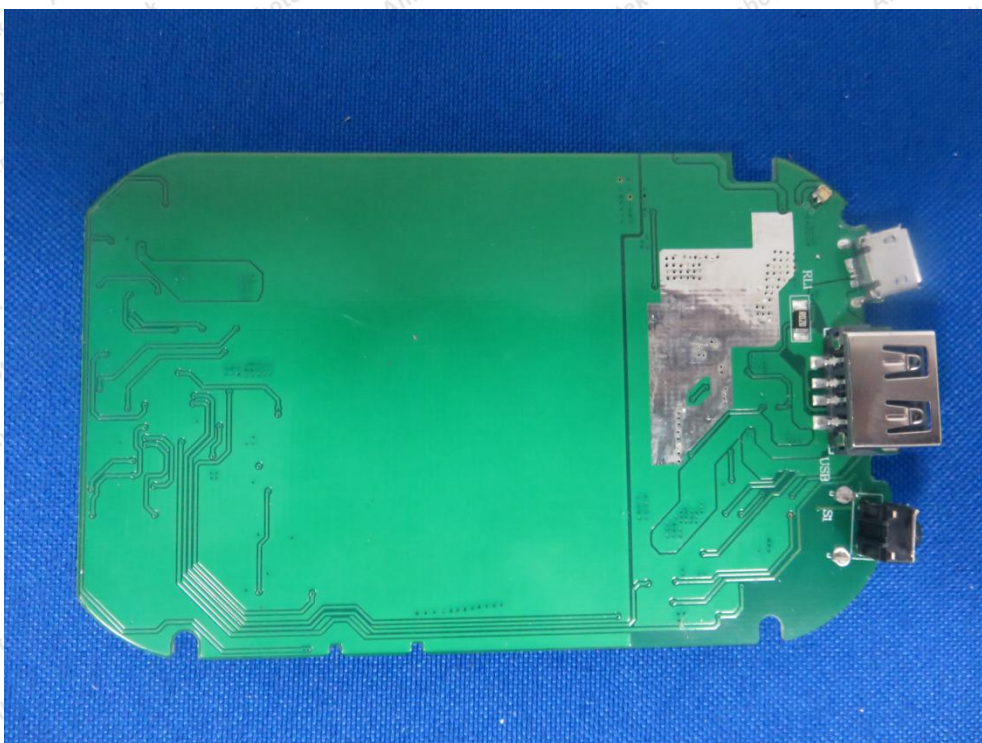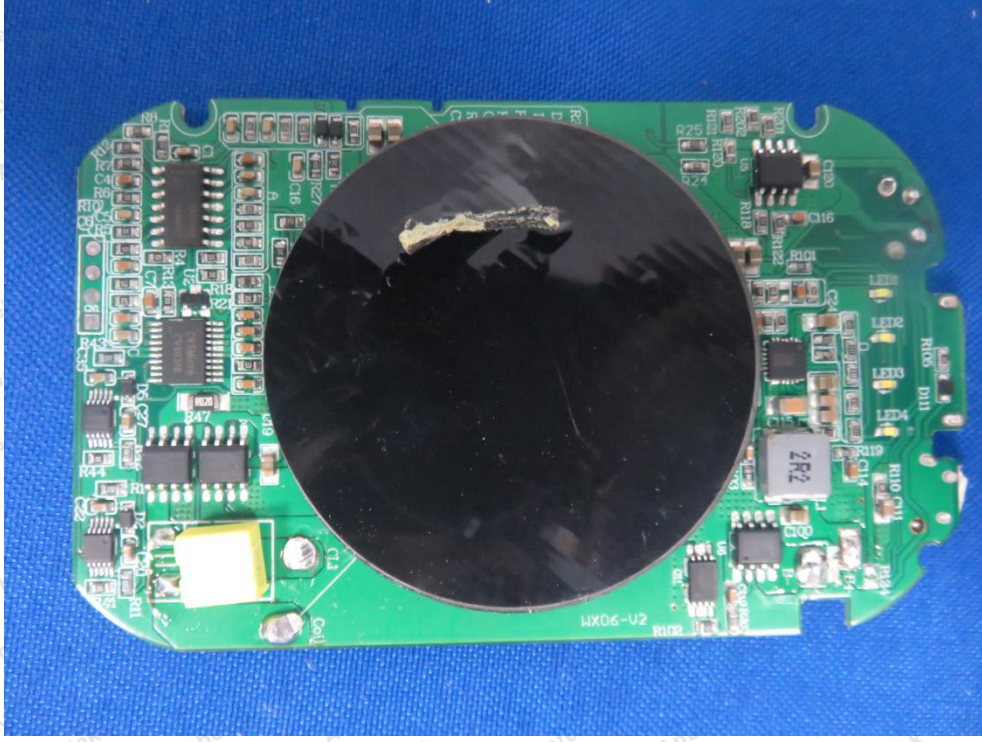

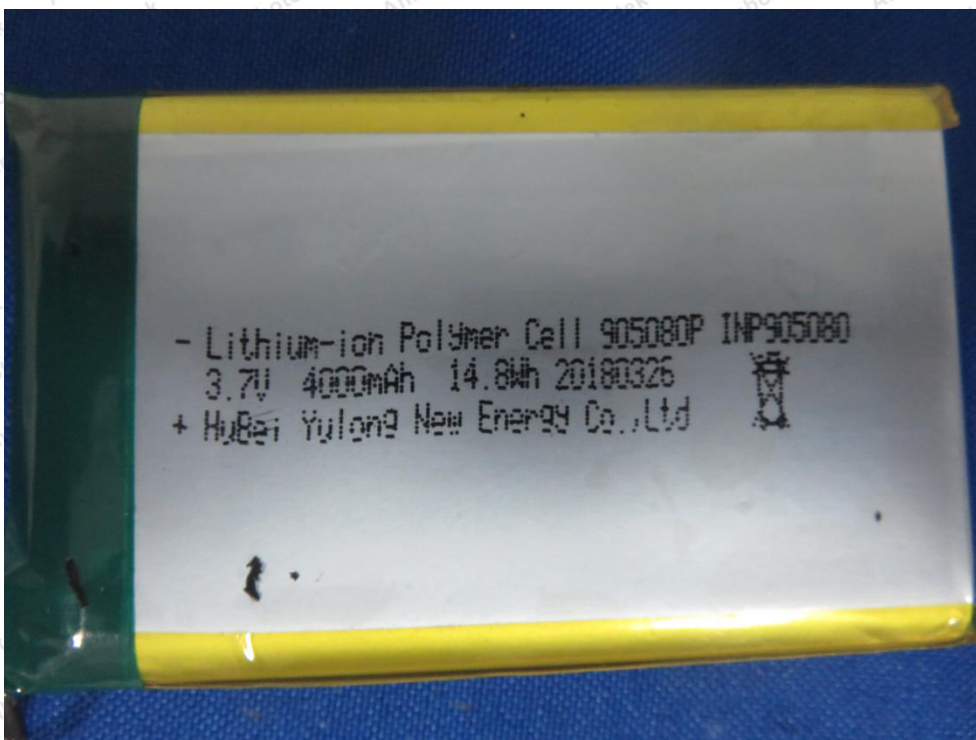

End of Report