

## Appendix D

### RF Test Data for 5.2G WLAN (Conducted Measurement)

Product Name: Tablet pc

Trade Mark: DayMark

Test Model: MATT85


#### Environmental Conditions

Temperature:	24.3 ° C
Relative Humidity:	52.7%
ATM Pressure:	100.0 kPa
Test Engineer:	Mina Xu
Supervised by:	Jayden Zhuo


#### D.1 Duty Cycle

Test Mode	Test Frequency (MHz)	Duty Cycle (%)	10log(1/x) Factor (dB)	1/B Minimum VBW(KHz)
11A	5200	100	0.00	0.01
11N20 SISO	5200	100	0.00	0.01
11N40 SISO	5190	100	0.00	0.01


On Time and Duty Cycle

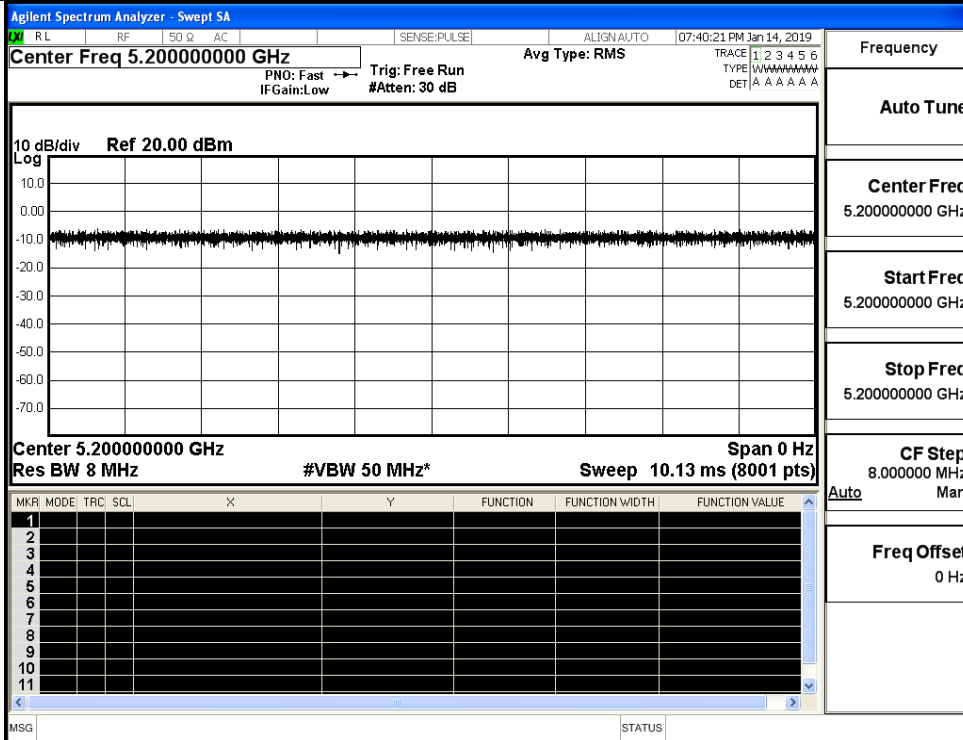

IEEE 802.11a

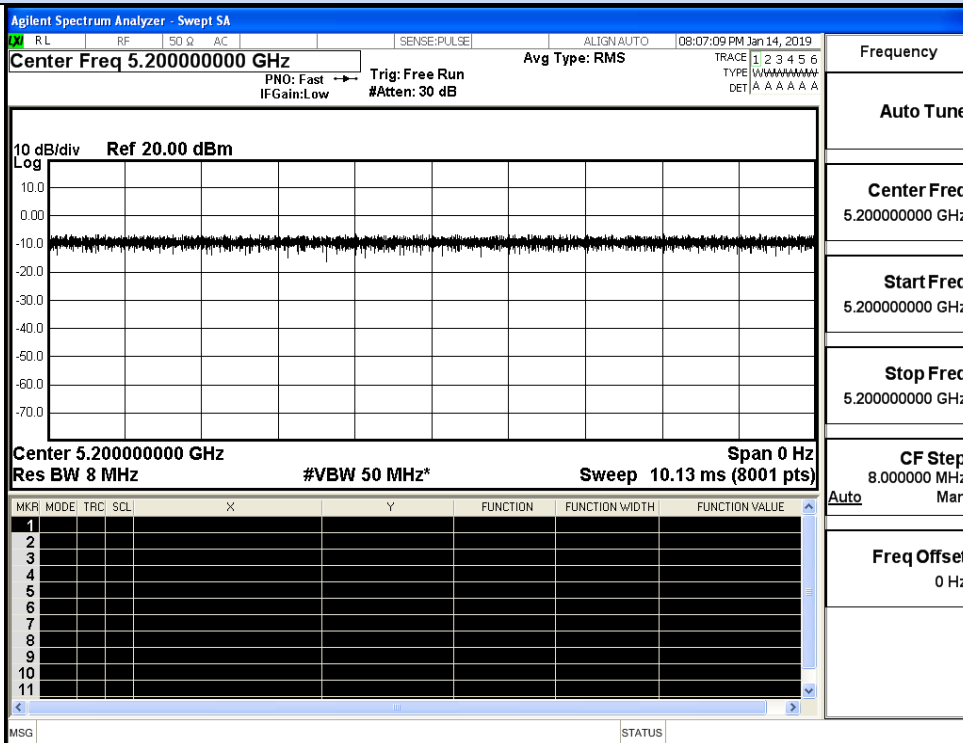

IEEE 802.11n HT20

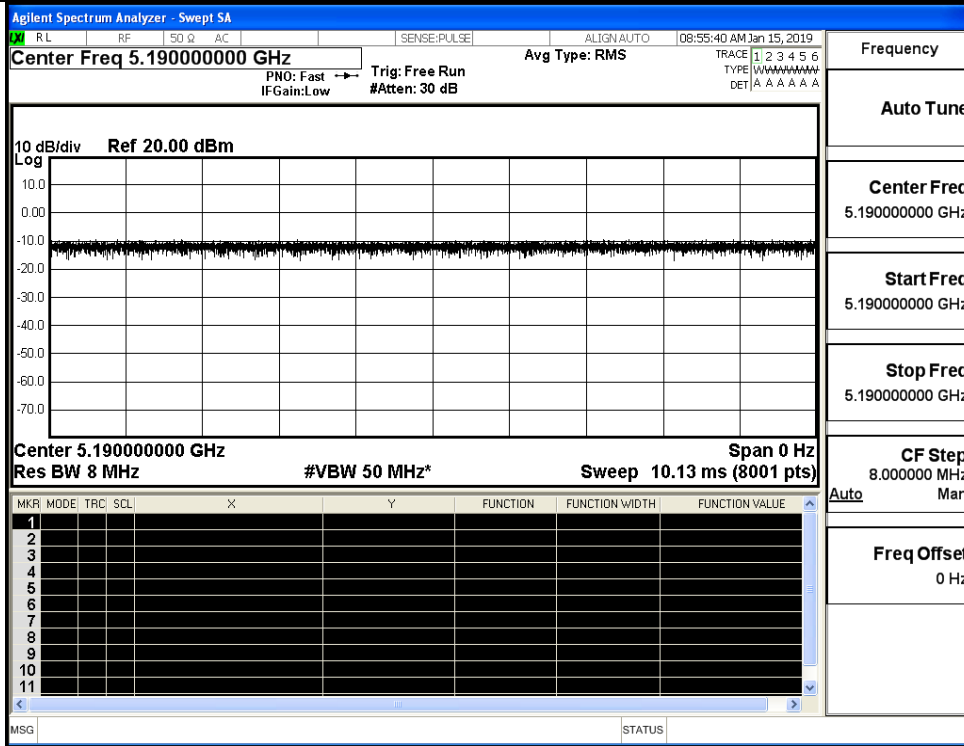


IEEE 802.11n HT40


**D.2 Maximum Conduct Output Power**

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor( dB)	Report Conducted Power(dBm)	Limit (dBm)	Verdict
11A	36	5180	7.98	0	7.98	24	Pass
	40	5200	7.58	0	7.58		Pass
	48	5240	7.39	0	7.39		Pass
11N20 SISO	36	5180	7.72	0	7.72	24	Pass
	40	5200	7.45	0	7.45		Pass
	48	5240	7.16	0	7.16		Pass
11N40 SISO	38	5190	7.58	0	7.58	24	Pass
	46	5230	7.88	0	7.88		Pass


### D.3 Power Spectral Density

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Cycle Factor (dB)	Report Power Density (dBm/MHz)	Limit (dBm/MHz)	Verdict
11A	36	5180	-3.18	0	-3.18	11	Pass
	40	5200	-3.43	0	-3.43		Pass
	48	5240	-3.34	0	-3.34		Pass
11N20 SISO	36	5180	-3.53	0	-3.53	11	Pass
	40	5200	-3.33	0	-3.33		Pass
	48	5240	-3.24	0	-3.24		Pass
11N40 SISO	38	5190	-5.91	0	-5.91	11	Pass
	46	5230	-5.13	0	-5.13		Pass

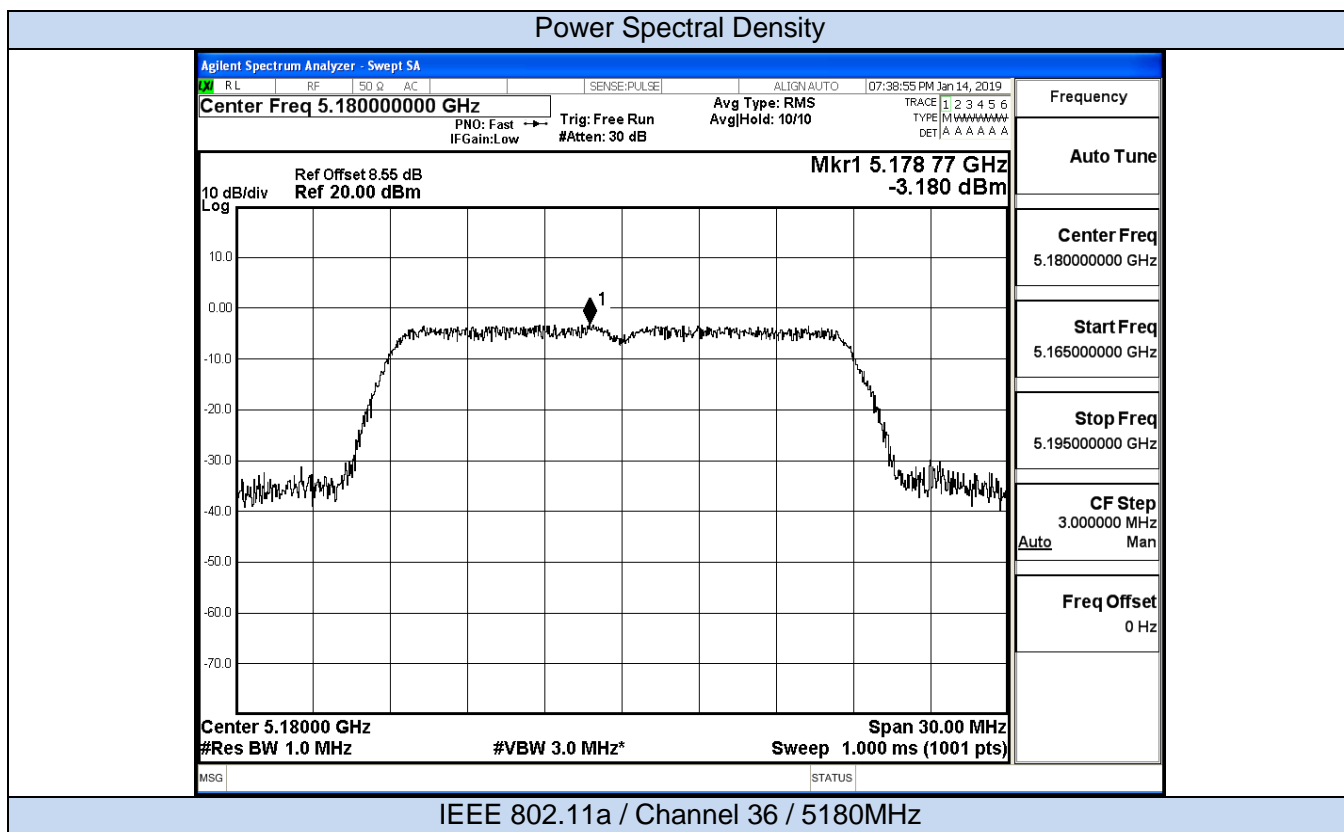

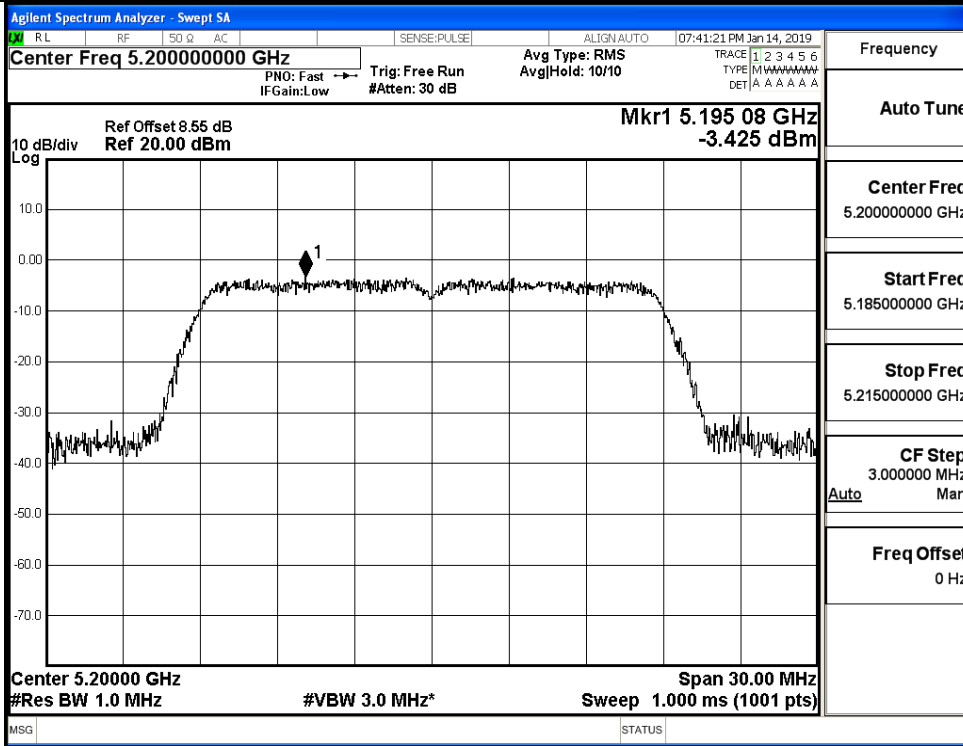


IEEE 802.11a / Channel 40 / 5200MHz

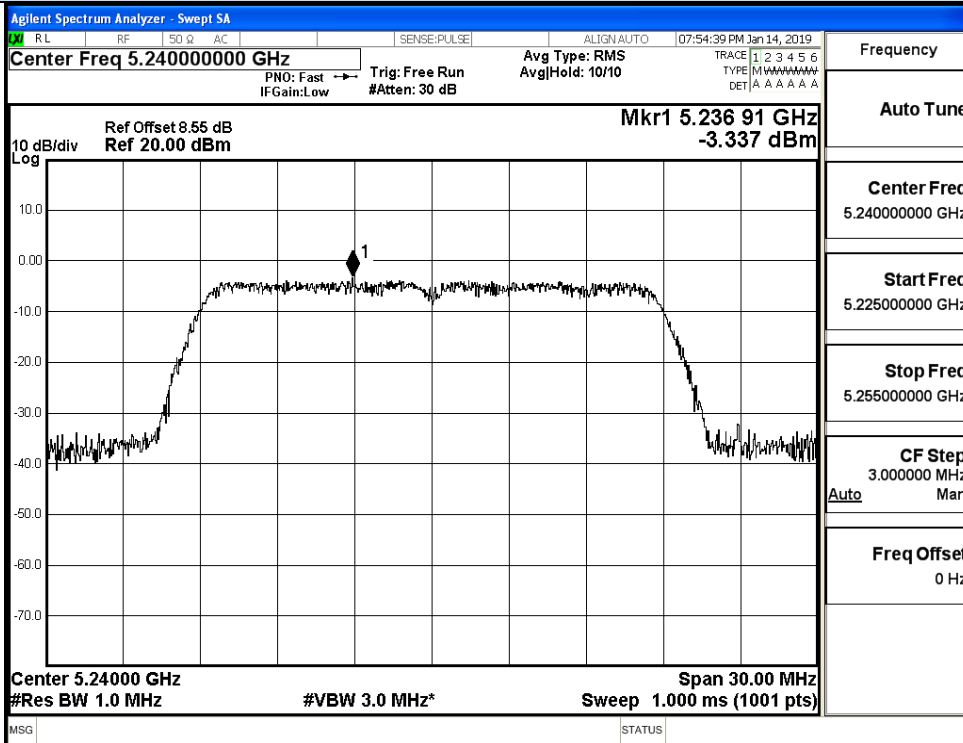


IEEE 802.11a / Channel 48 / 5240MHz


Power Spectral Density

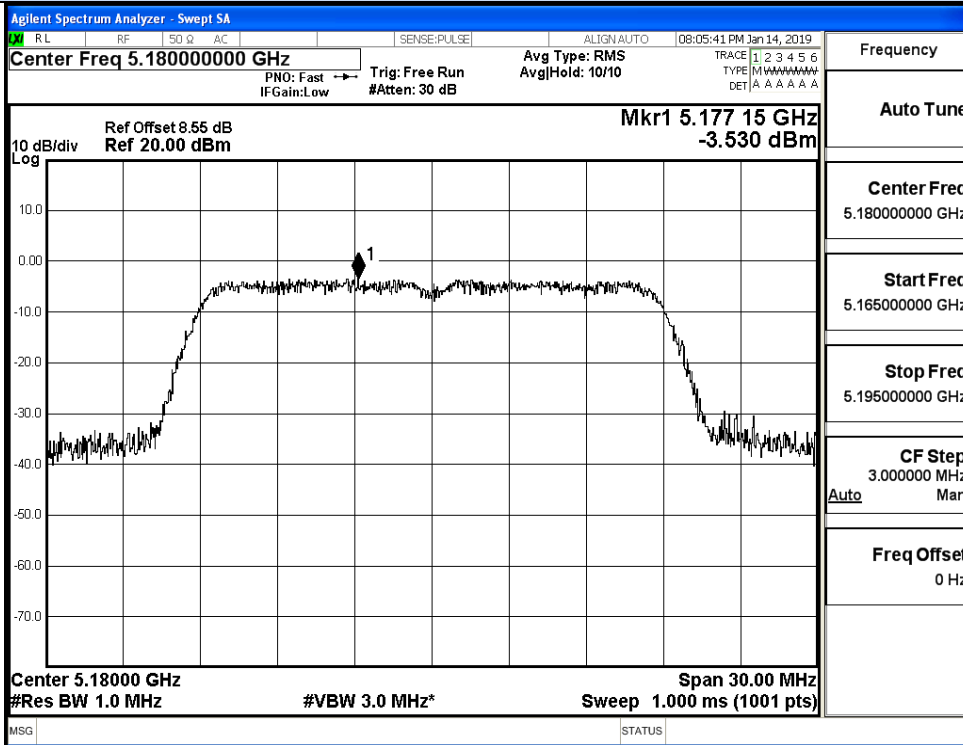

IEEE 802.11n20 / Channel 36 / 5180MHz

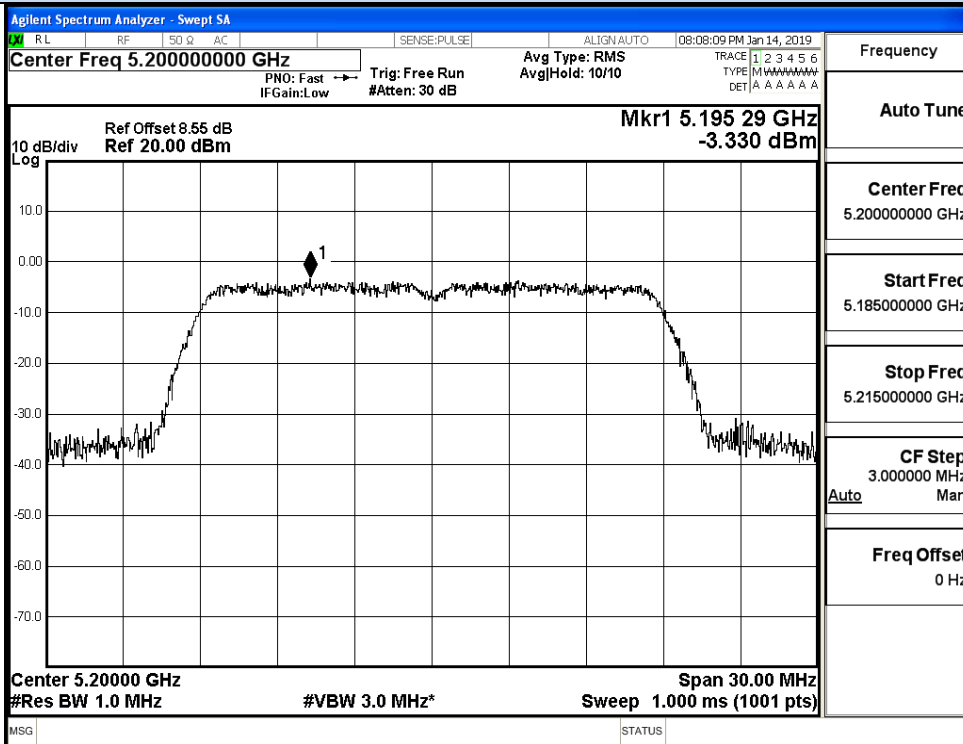


IEEE 802.11n20 / Channel 40 / 5200MHz

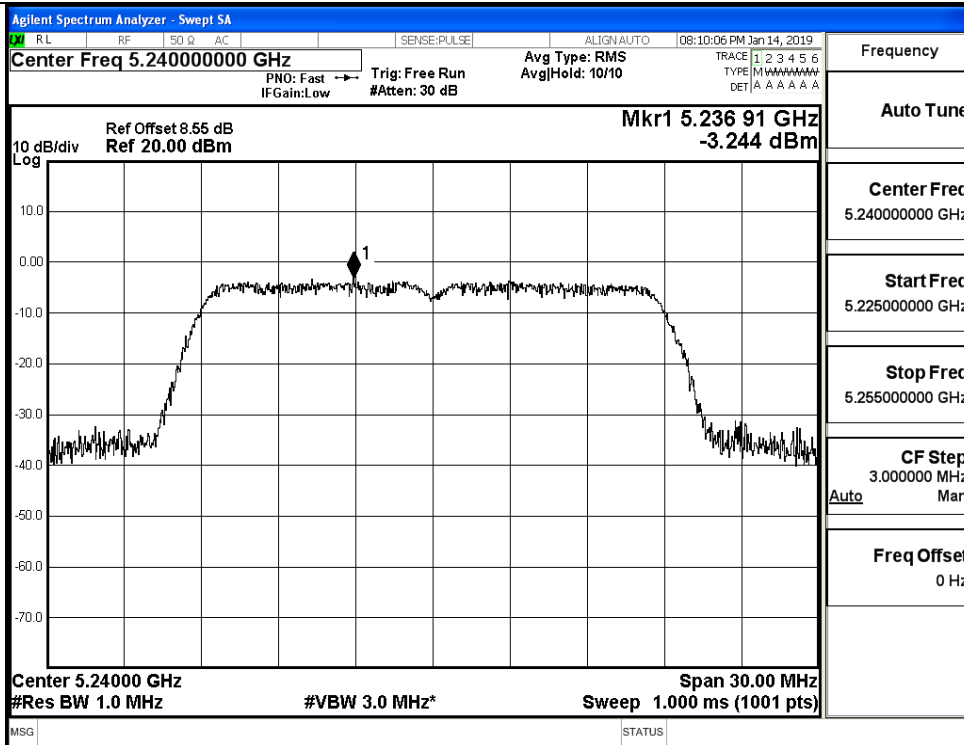


IEEE 802.11n20 / Channel 48 / 5240MHz



Power Spectral Density

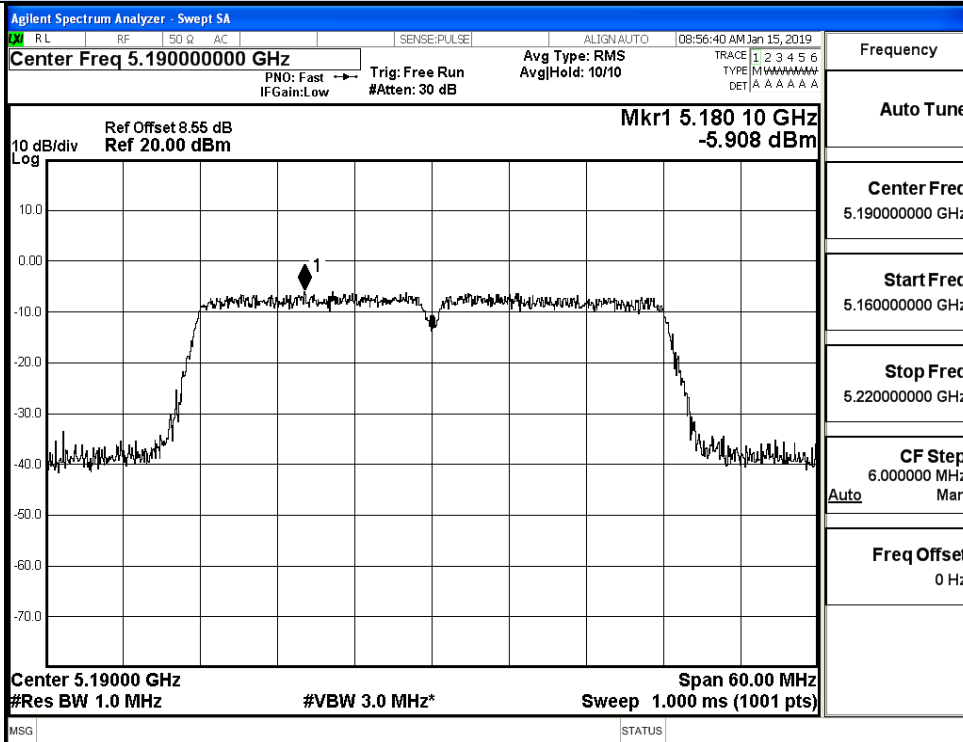


IEEE 802.11n40 / Channel 38 / 5190MHz

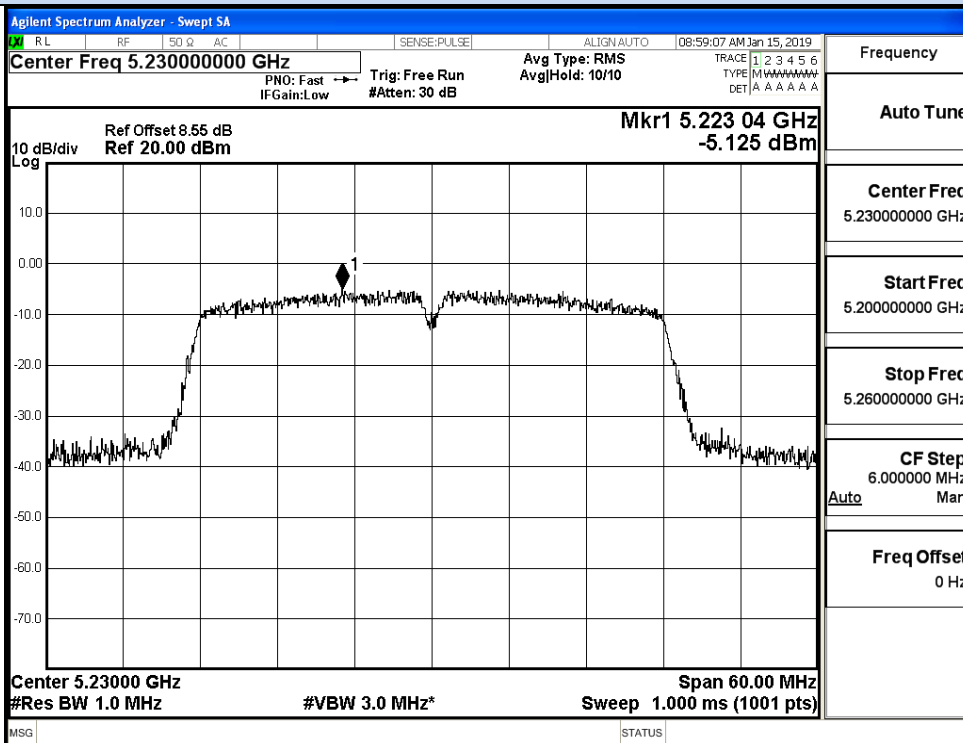


IEEE 802.11n40 / Channel 46 / 5230MHz


### D.4 Emission Bandwidth

Test Mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Verdict
11A	36	5180	19.97	17.764	No Limit	Pass
	40	5200	20.01	17.766		Pass
	48	5240	20.01	17.763		Pass
11N20 SISO	36	5180	19.99	17.765	No Limit	Pass
	40	5200	20.08	17.763		Pass
	48	5240	20.02	17.760		Pass
11N40 SISO	38	5190	40.05	36.203	No Limit	Pass
	46	5230	39.67	36.151		Pass

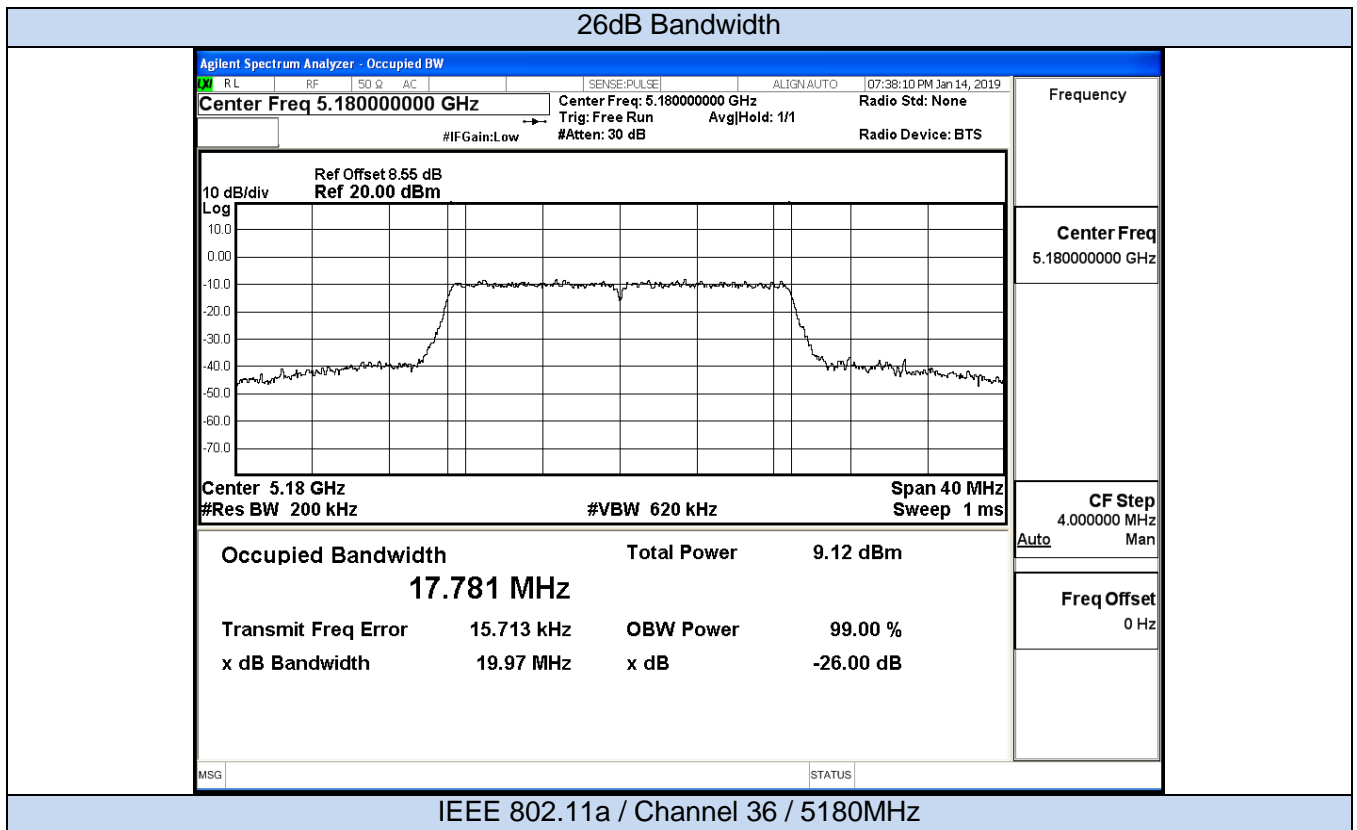

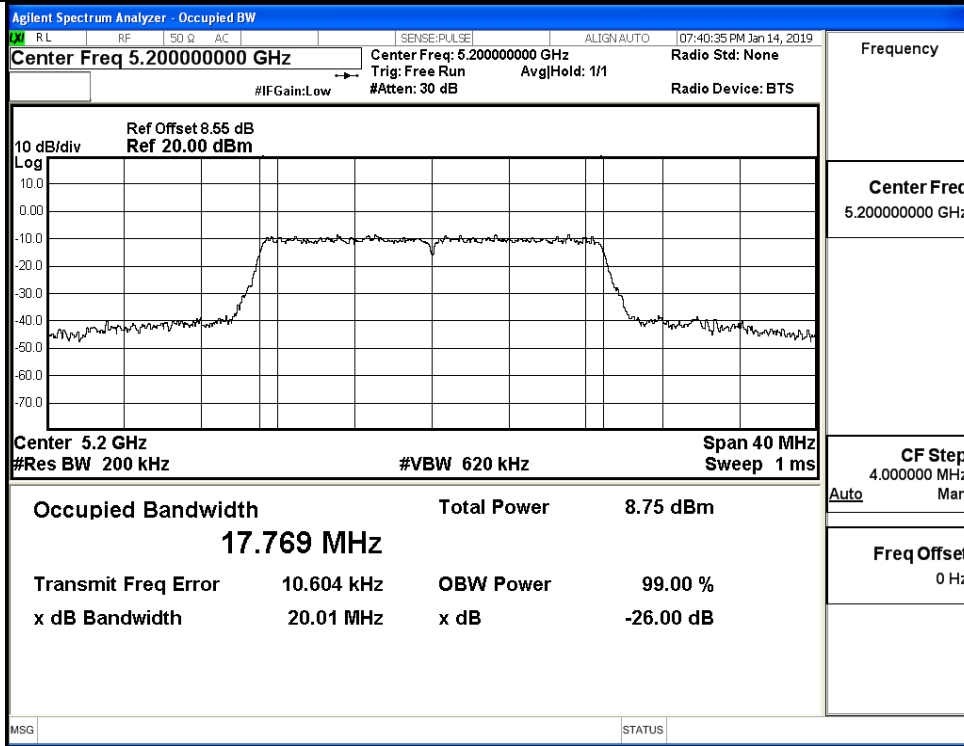


IEEE 802.11a / Channel 40 / 5200MHz

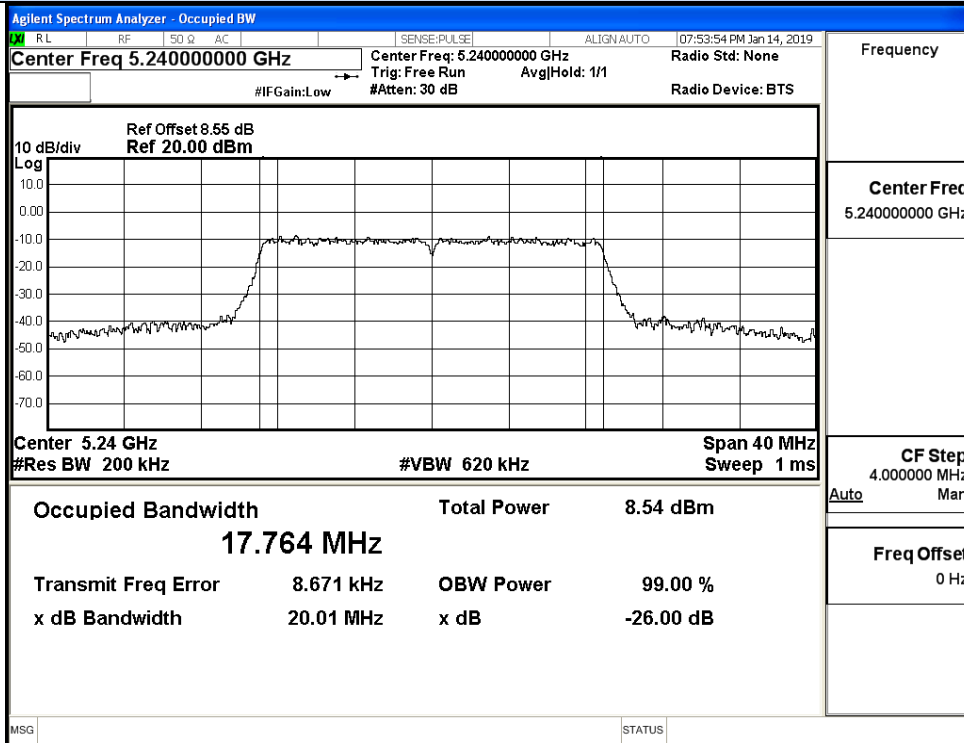


IEEE 802.11a / Channel 48 / 5240MHz


26dB Bandwidth

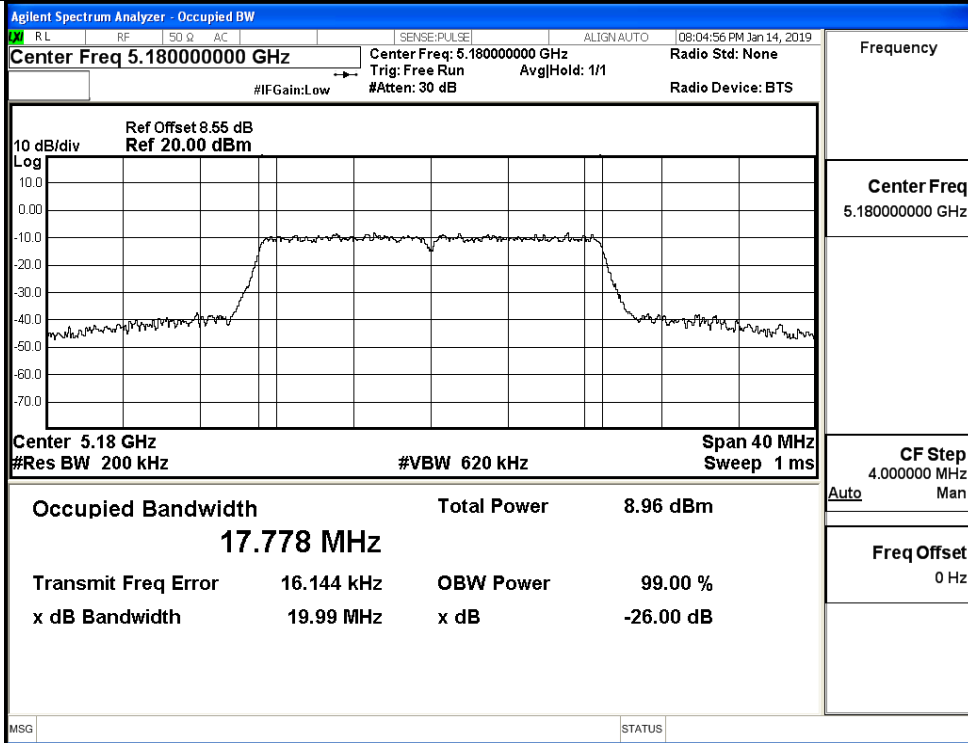

IEEE 802.11n20 / Channel 36 / 5180MHz

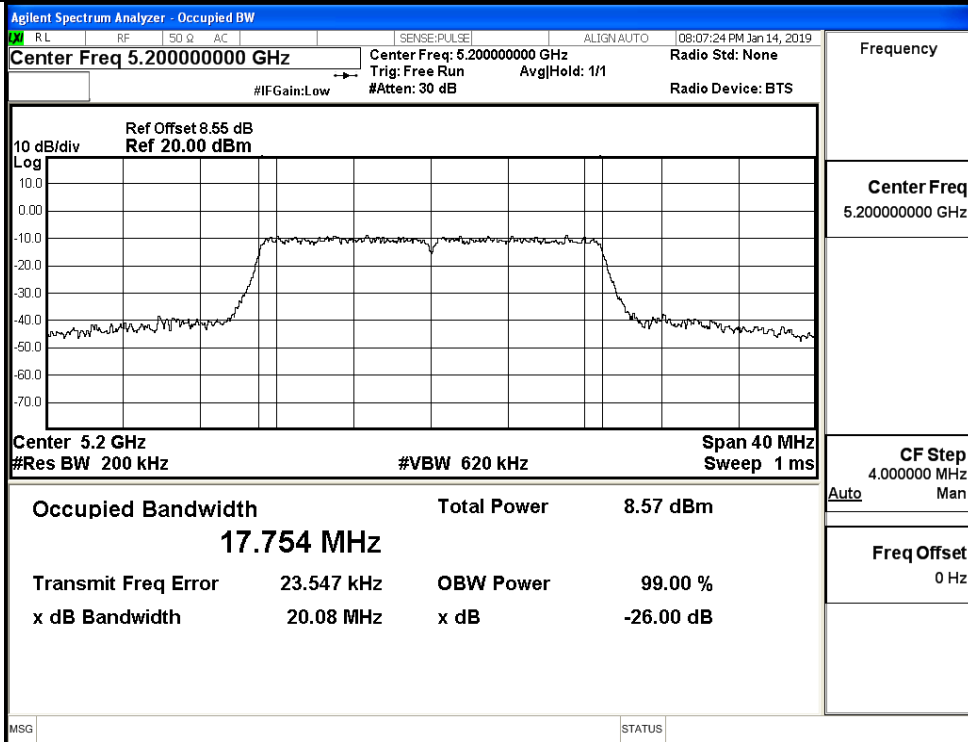


IEEE 802.11n20 / Channel 40 / 5200MHz

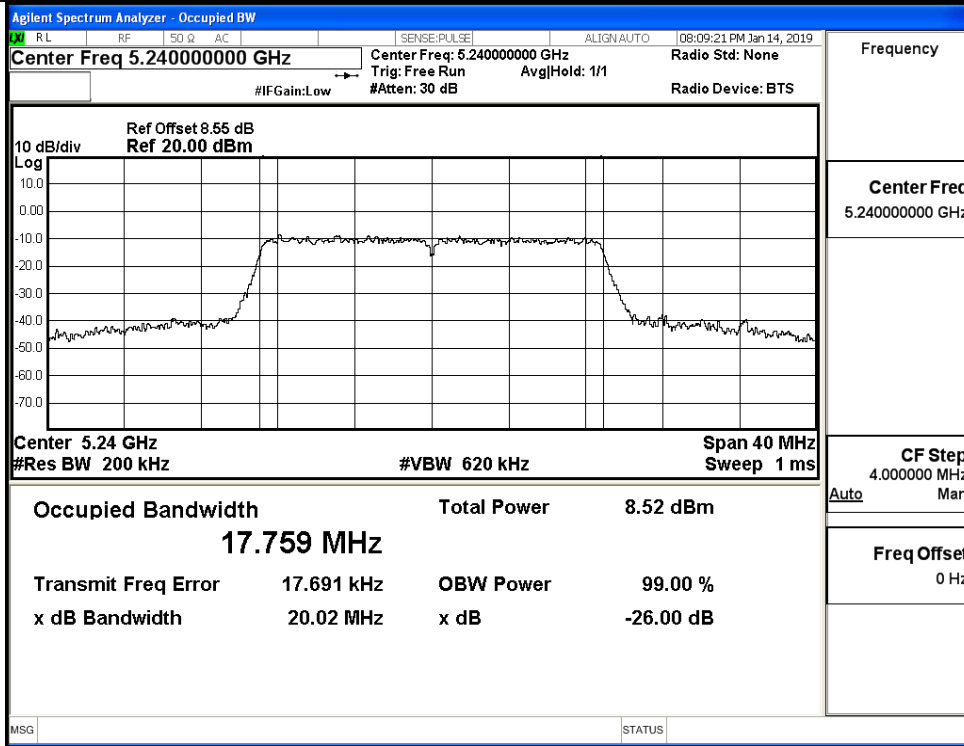


IEEE 802.11n20 / Channel 48 / 5240MHz

26dB Bandwidth

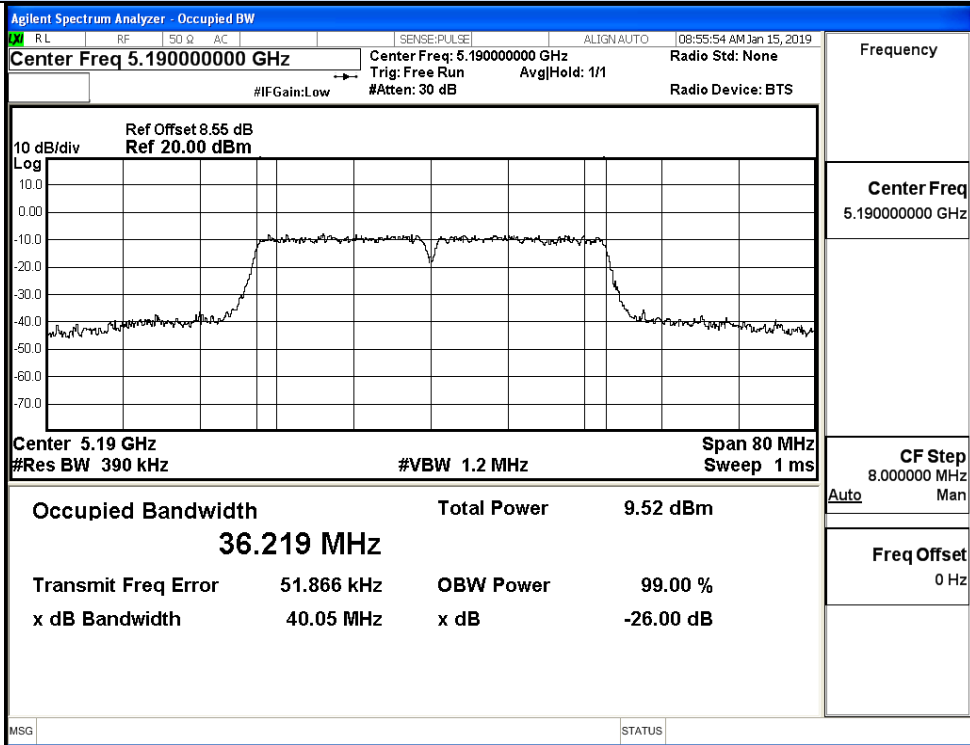


IEEE 802.11n40 / Channel 38 / 5190MHz

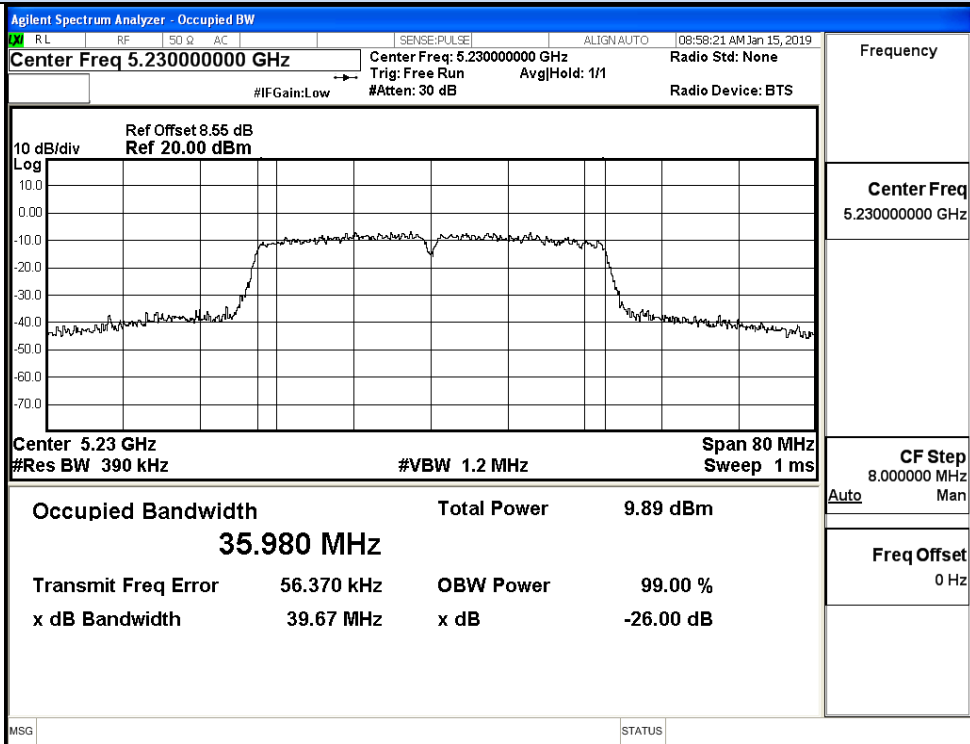


IEEE 802.11n40 / Channel 46 / 5230MHz


99% Occupied Bandwidth

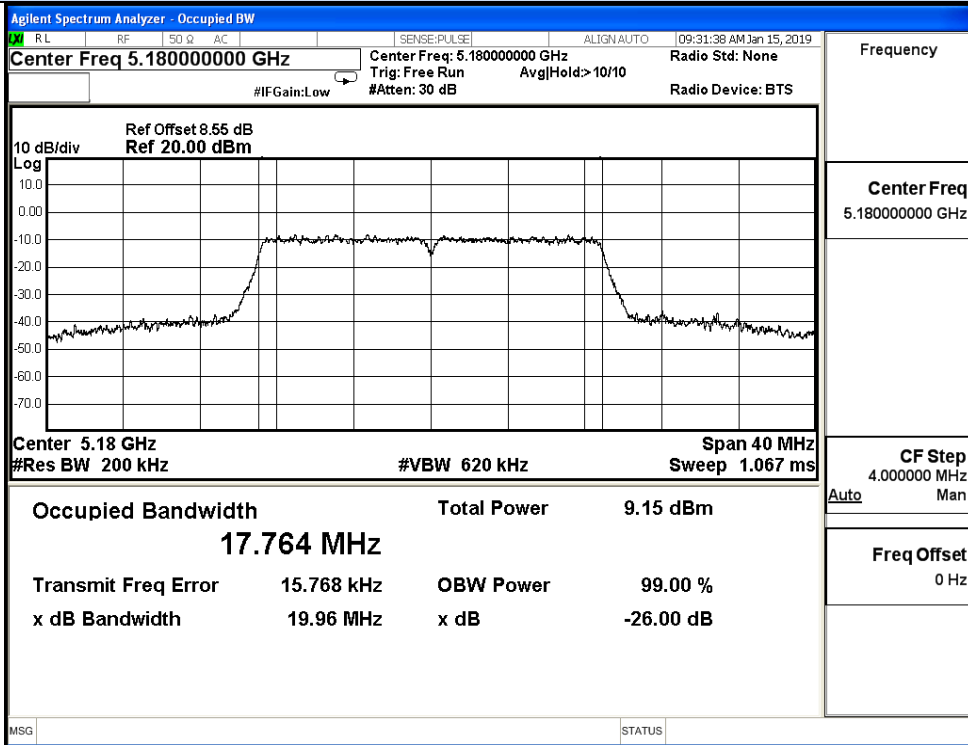

IEEE 802.11a / Channel 36 / 5180MHz

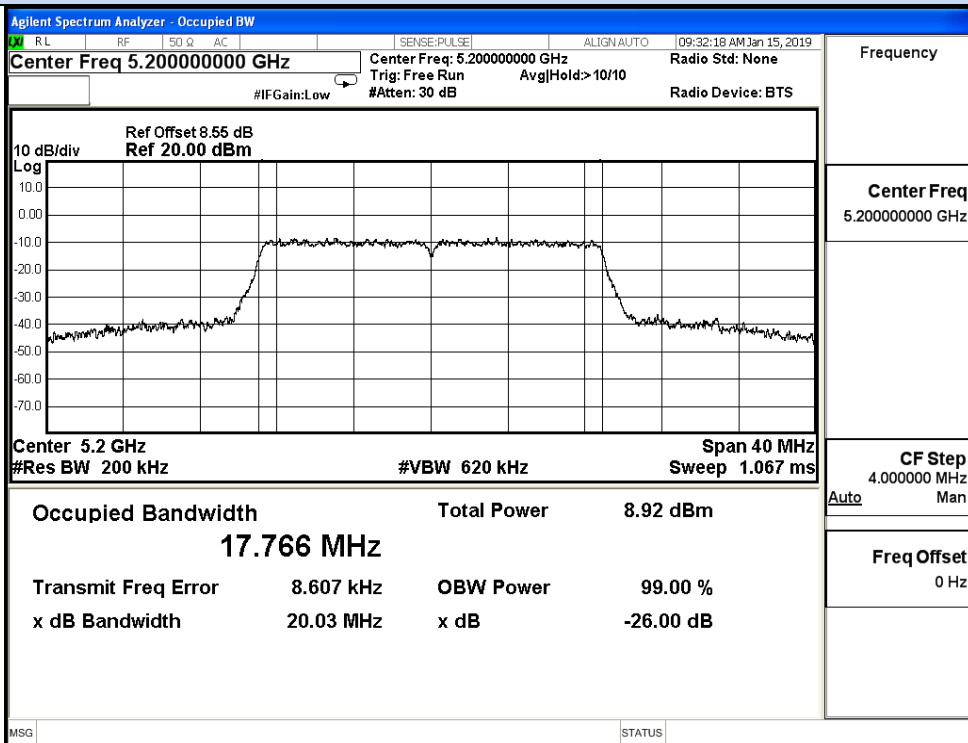

IEEE 802.11a / Channel 40 / 5200MHz

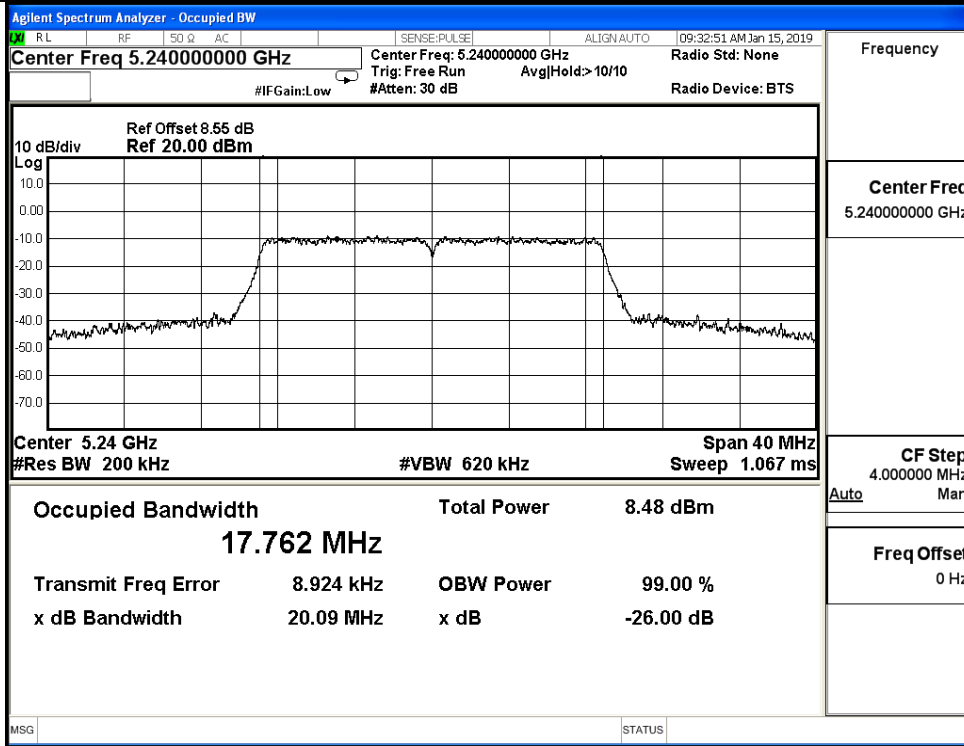

IEEE 802.11a / Channel 48 / 5240MHz



99% Occupied Bandwidth

Agilent Spectrum Analyzer - Occupied BW

Center Freq 5.18000000 GHz

Center Freq: 5.180000000 GHz  
Trig: Free Run  
#IFGain: Low #Atten: 30 dB

Radio Std: None  
AvglHold: >10/10  
Radio Device: BTS

10 dB/div  
Ref Offset 8.55 dB  
Ref 20.00 dBm

Center 5.18 GHz  
#Res BW 200 kHz #VBW 620 kHz Span 40 MHz  
Sweep 1.067 ms

Occupied Bandwidth	Total Power	9.45 dBm
<b>17.764 MHz</b>		
Transmit Freq Error	8.268 kHz	OBW Power 99.00 %
x dB Bandwidth	19.99 MHz	x dB -26.00 dB

Frequency: 5.18000000 GHz  
Center Freq: 5.18000000 GHz  
CF Step: 4.000000 MHz  
Freq Offset: 0 Hz

IEEE 802.11n20 / Channel 36 / 5180MHz

Agilent Spectrum Analyzer - Occupied BW

Center Freq 5.20000000 GHz

Center Freq: 5.200000000 GHz  
Trig: Free Run  
#IFGain: Low #Atten: 30 dB

Radio Std: None  
AvglHold: >10/10  
Radio Device: BTS


10 dB/div  
Ref Offset 8.55 dB  
Ref 20.00 dBm

Center 5.2 GHz  
#Res BW 200 kHz #VBW 620 kHz Span 40 MHz  
Sweep 1.067 ms

Occupied Bandwidth	Total Power	8.84 dBm
<b>17.761 MHz</b>		
Transmit Freq Error	7.187 kHz	OBW Power 99.00 %
x dB Bandwidth	19.93 MHz	x dB -26.00 dB


Frequency: 5.20000000 GHz  
Center Freq: 5.200000000 GHz  
CF Step: 4.000000 MHz  
Freq Offset: 0 Hz

IEEE 802.11n20 / Channel 40 / 5200MHz

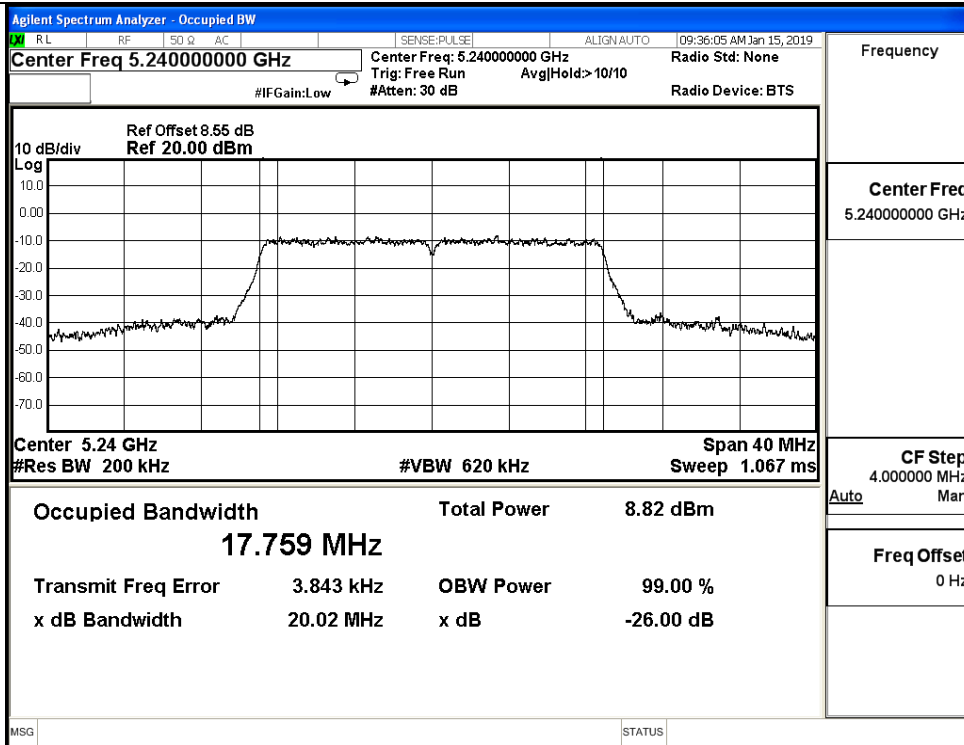


IEEE 802.11n20 / Channel 48 / 5240MHz

99% Occupied Bandwidth

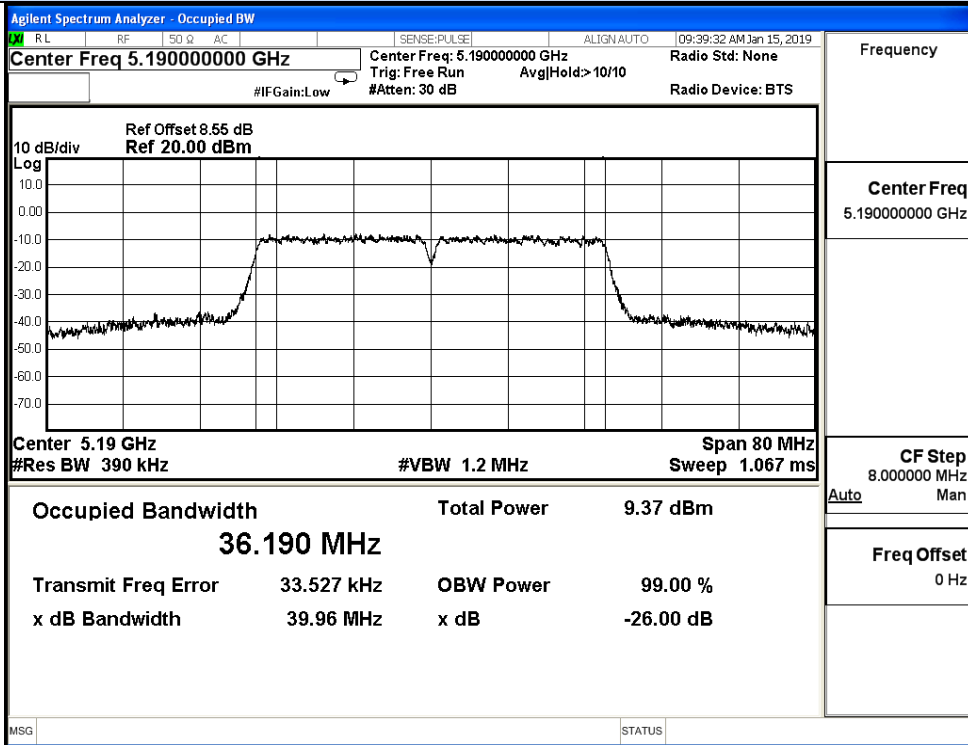

IEEE 802.11n40 / Channel 38 / 5190MHz

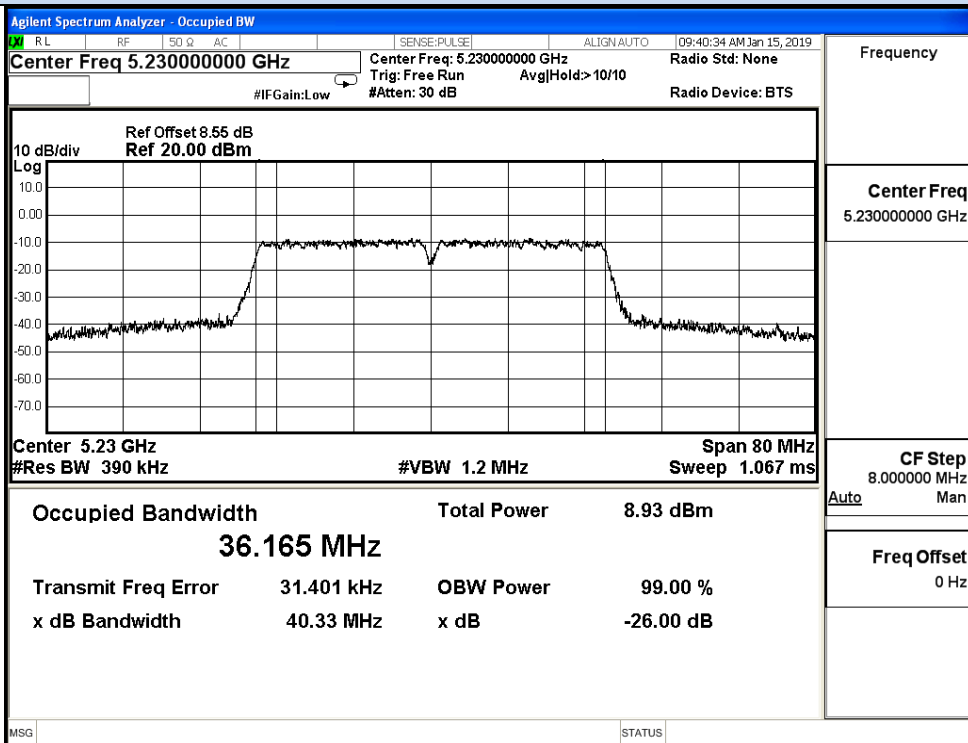


IEEE 802.11n40 / Channel 46 / 5230MHz


**D.5 Undesirable Emissions Measurement**

Test Mode	Channel	Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
11A	36	4500.0	-50.99	2.00	0	46.24	Peak	74.00	Pass
		4500.0	-60.61	2.00	0	36.61	Average	54.00	Pass
		5150.0	-47.61	2.00	0	49.61	Peak	74.00	Pass
		5150.0	-56.95	2.00	0	40.28	Average	54.00	Pass
	48	5350.0	-47.87	2.00	0	49.36	Peak	74.00	Pass
		5350.0	-60.37	2.00	0	36.86	Average	54.00	Pass
		5460.0	-50.28	2.00	0	46.95	Peak	74.00	Pass
		5460.0	-60.79	2.00	0	36.44	Average	54.00	Pass
11N20 SISO	36	4500.0	-51.03	2.00	0	46.20	Peak	74.00	Pass
		4500.0	-60.58	2.00	0	36.64	Average	54.00	Pass
		5150.0	-46.47	2.00	0	50.76	Peak	74.00	Pass
		5150.0	-57.05	2.00	0	40.18	Average	54.00	Pass
	48	5350.0	-47.35	2.00	0	49.88	Peak	74.00	Pass
		5350.0	-60.40	2.00	0	36.82	Average	54.00	Pass
		5460.0	-49.85	2.00	0	47.38	Peak	74.00	Pass
		5460.0	-60.82	2.00	0	36.41	Average	54.00	Pass
11N40 SISO	38	4500.0	-50.26	2.00	0	46.97	Peak	74.00	Pass
		4500.0	-60.68	2.00	0	36.55	Average	54.00	Pass
		5150.0	-36.97	2.00	0	60.26	Peak	74.00	Pass
		5150.0	-50.34	2.00	0	46.89	Average	54.00	Pass
	46	5350.0	-50.60	2.00	0	46.62	Peak	74.00	Pass
		5350.0	-59.98	2.00	0	37.25	Average	54.00	Pass
		5460.0	-50.55	2.00	0	46.68	Peak	74.00	Pass
		5460.0	-60.48	2.00	0	36.75	Average	54.00	Pass

Undesirable Emissions Measurement

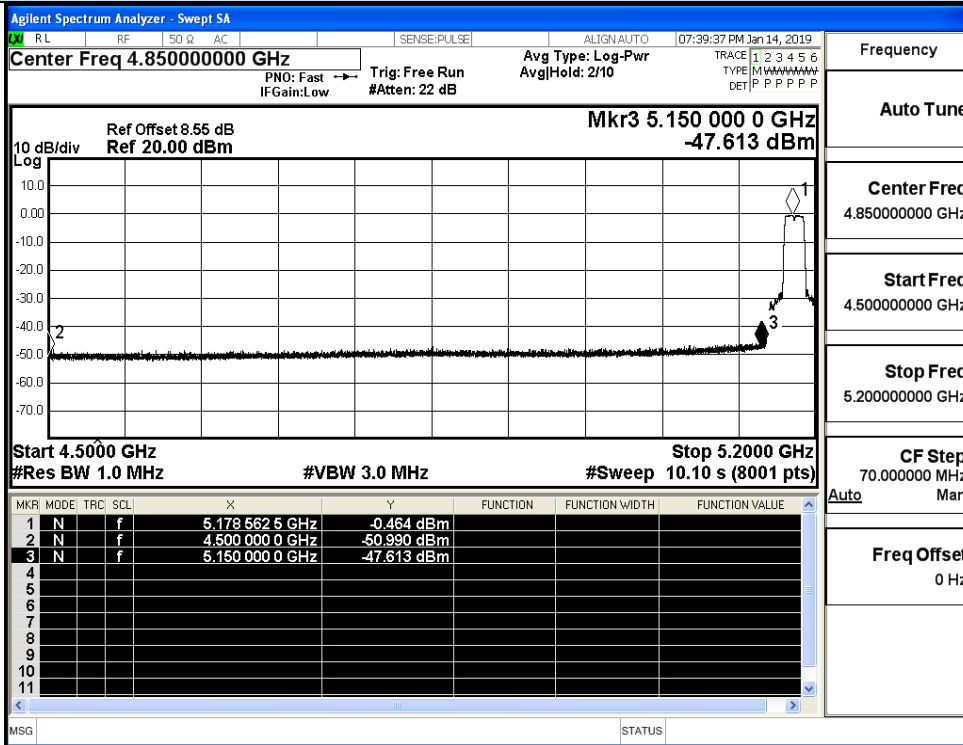


IEEE 802.11a / Channel 36 / 5180MHz / Peak

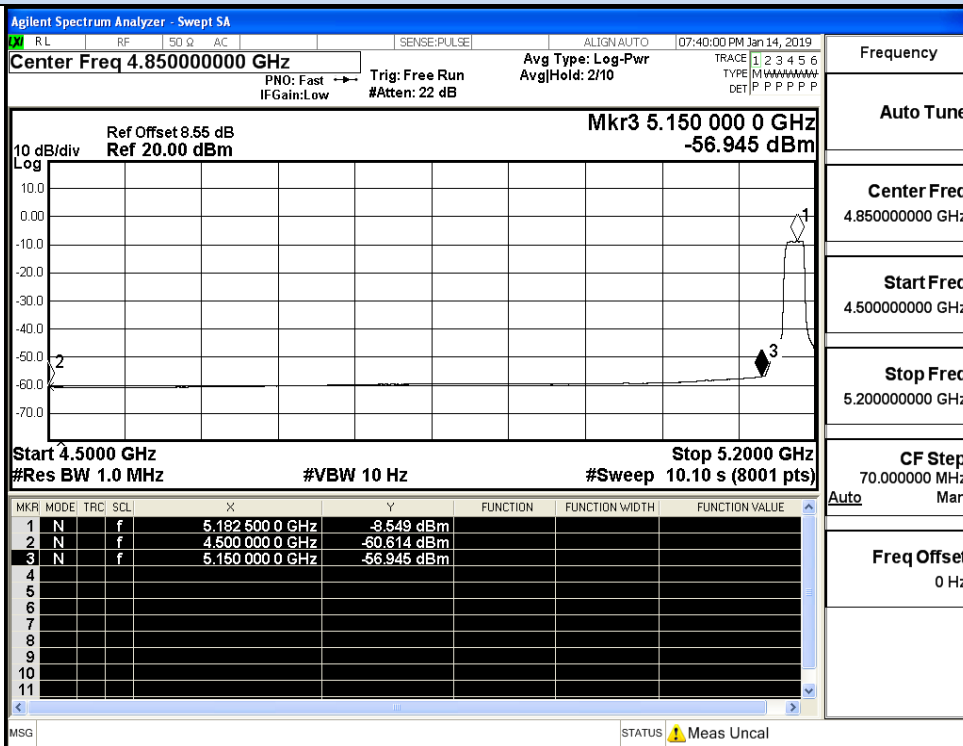


IEEE 802.11a / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

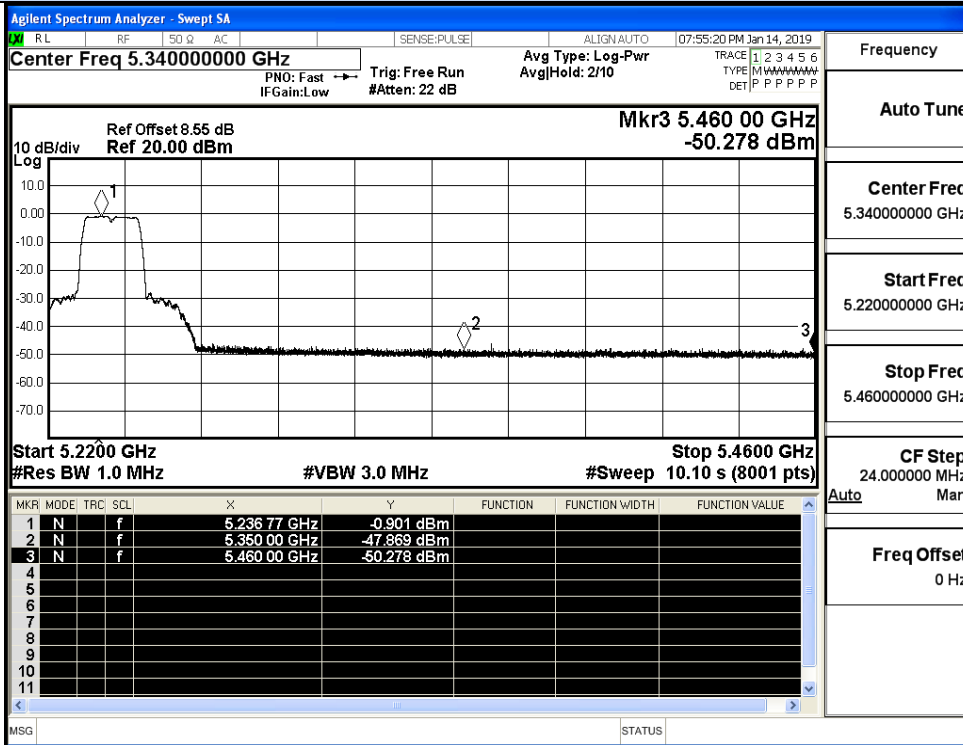


IEEE 802.11a / Channel 48 / 5240MHz / Peak

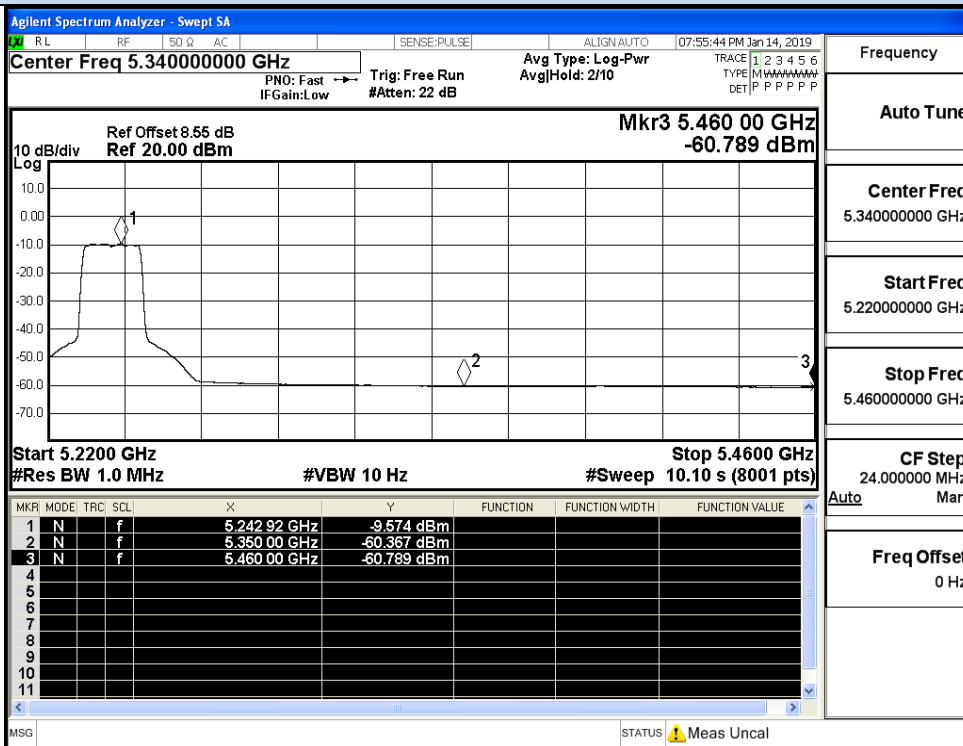


IEEE 802.11a / Channel 48 / 5240MHz / Average

Undesirable Emissions Measurement

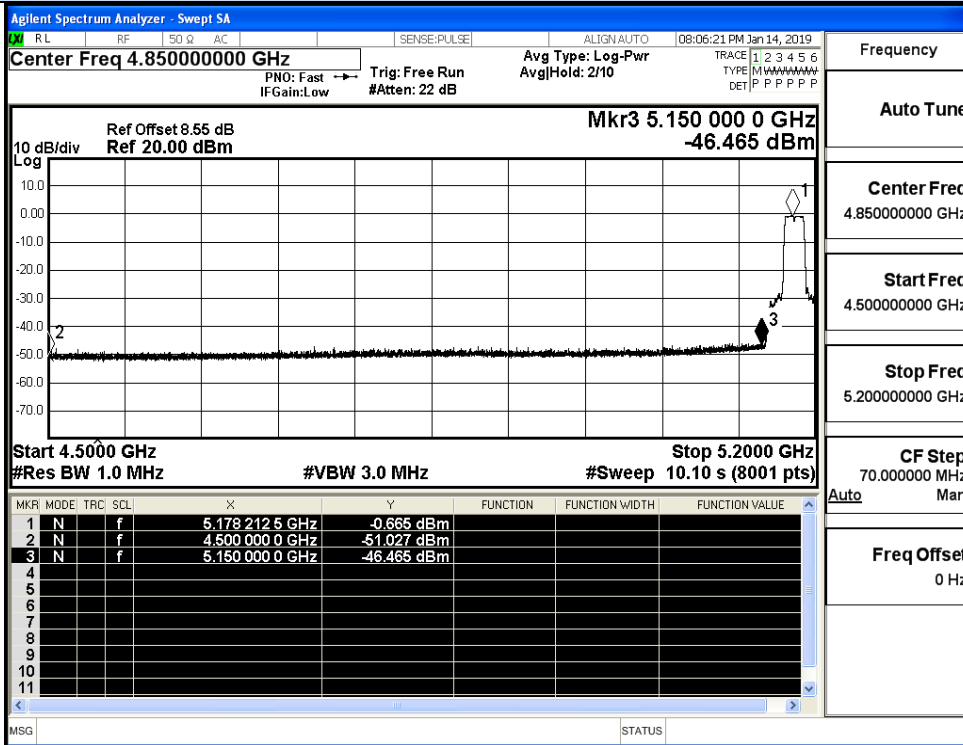


IEEE 802.11n20 / Channel 36 / 5180MHz / Peak

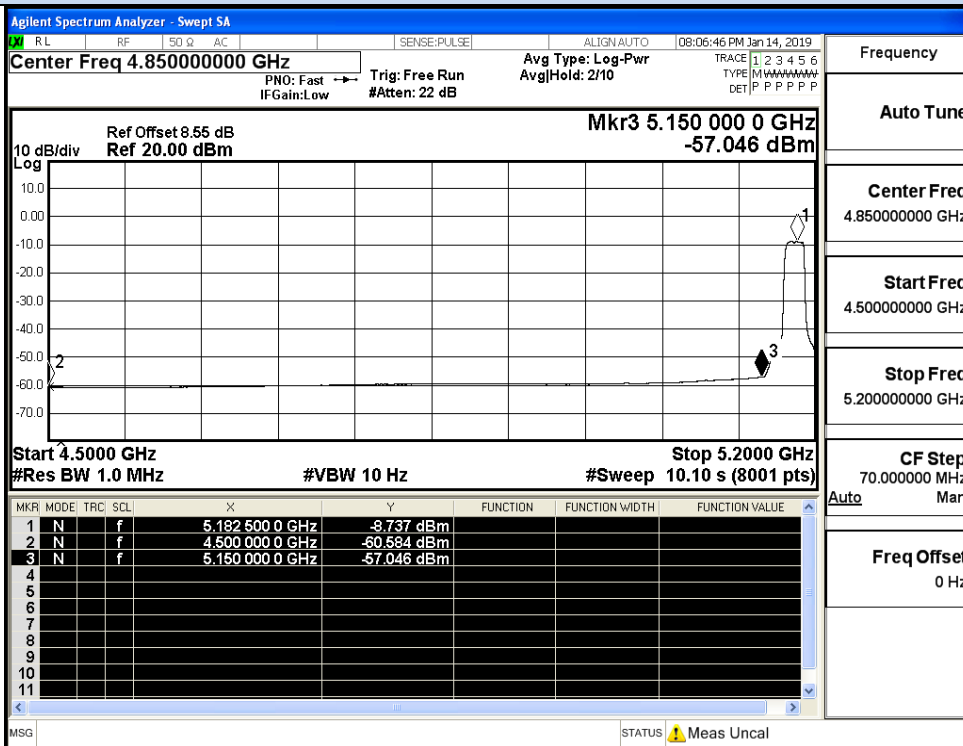


IEEE 802.11n20 / Channel 36 / 5180MHz / Average

Undesirable Emissions Measurement

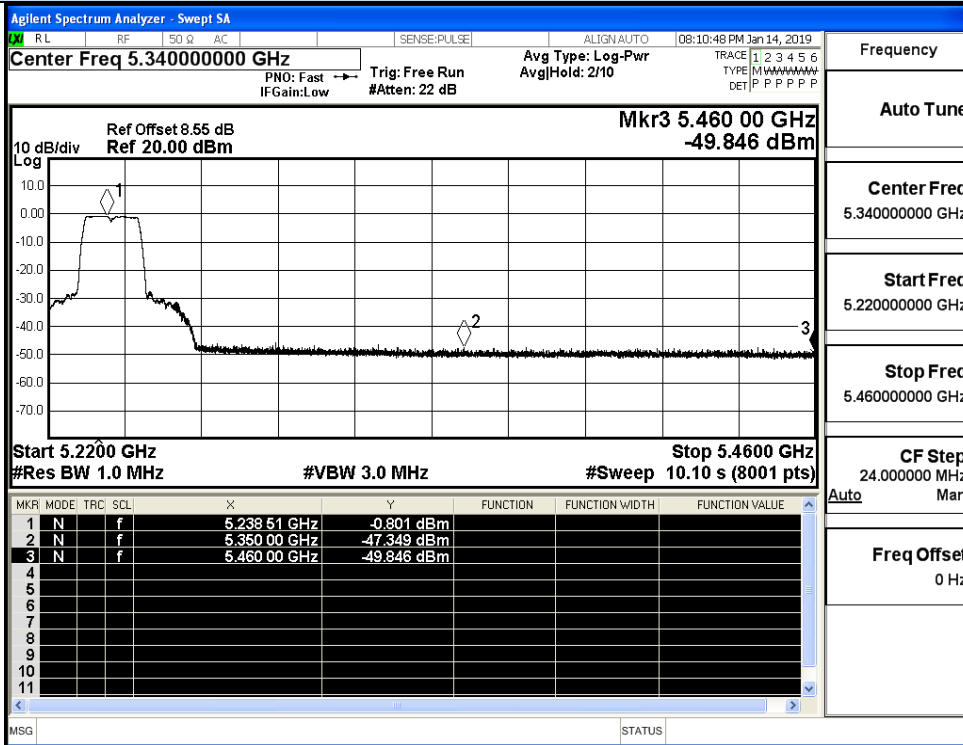


IEEE 802.11n20 / Channel 48 / 5240MHz / Peak

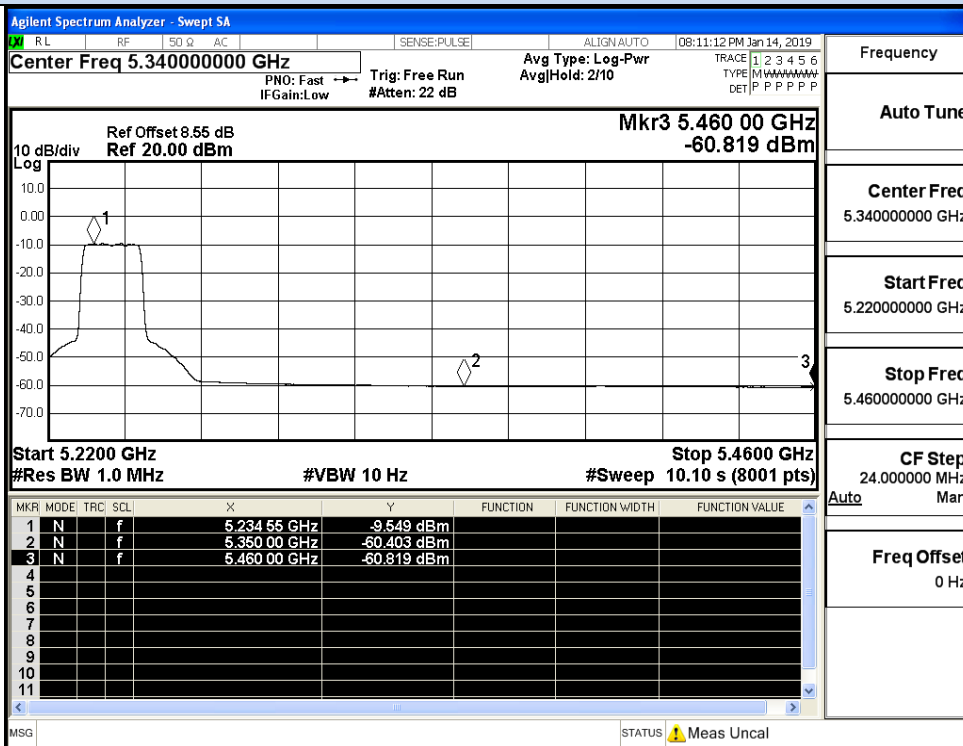


IEEE 802.11n20 / Channel 48 / 5240MHz / Average



Undesirable Emissions Measurement

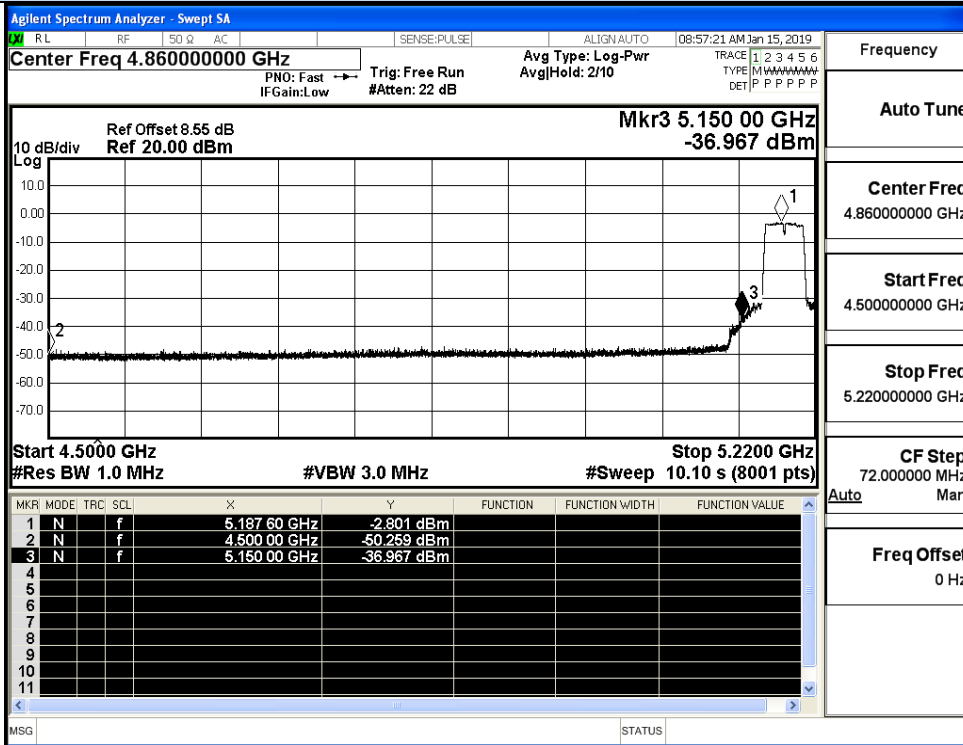


IEEE 802.11n40 / Channel 38 / 5190MHz / Peak

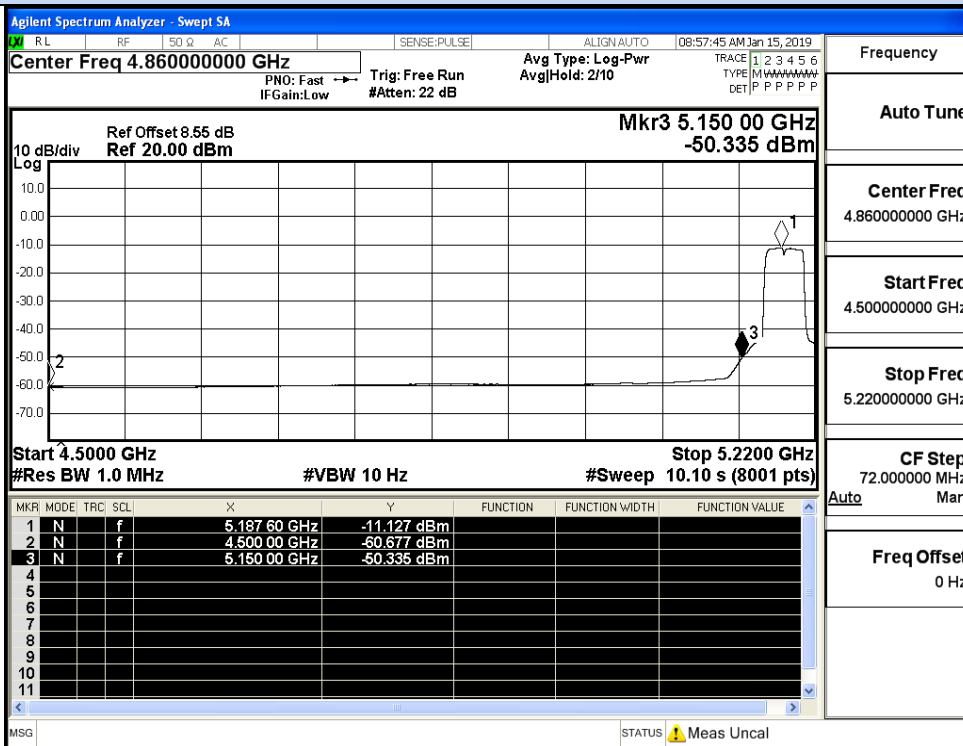


IEEE 802.11n40 / Channel 38 / 5190MHz / Average

Undesirable Emissions Measurement

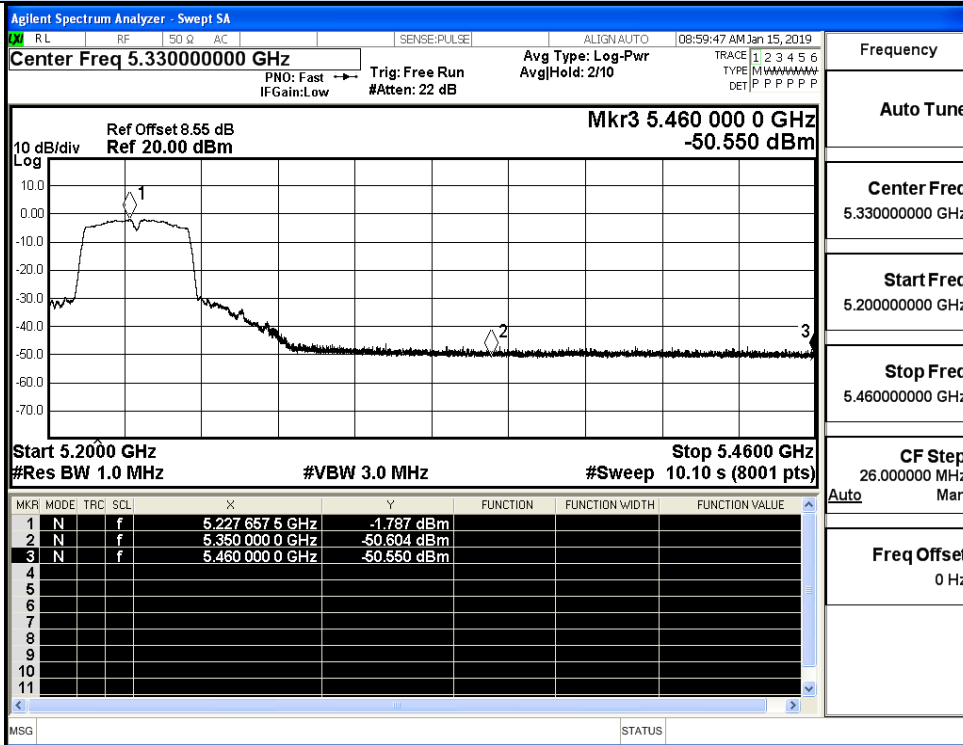

IEEE 802.11n40 / Channel 48 / 5230MHz / Peak

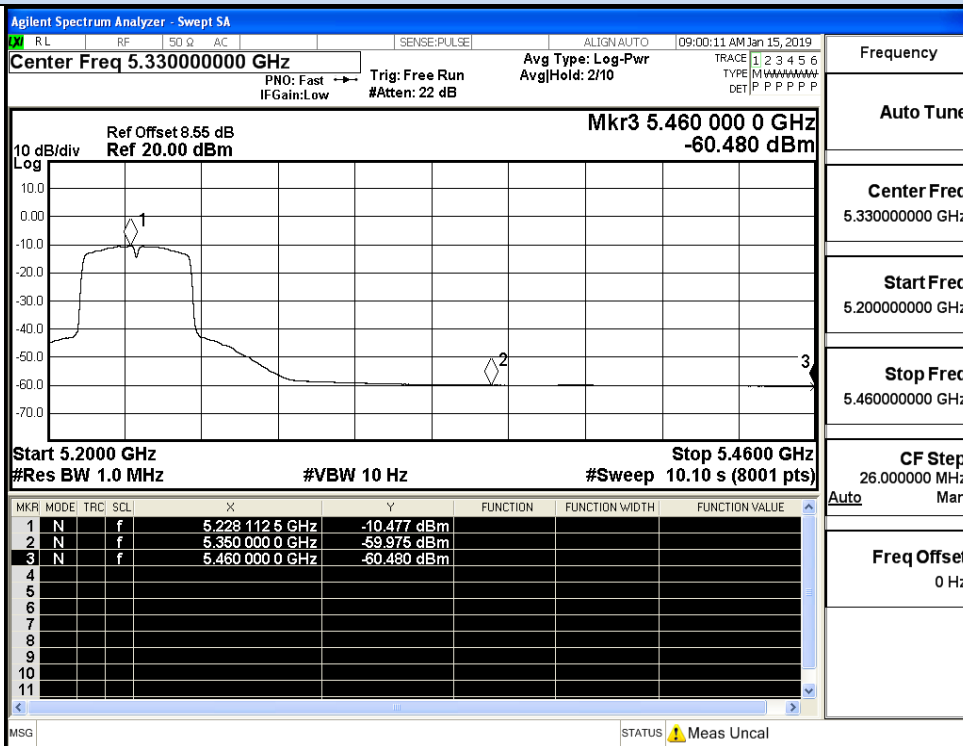

IEEE 802.11n40 / Channel 48 / 5230MHz / Average