



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

# TEST REPORT

FCC Part 24 Subpart E & RSS-133

Report Reference No. .... : CTL2106018081-WF06

Compiled by:  
( position+printed name+signature)

Happy Guo  
(File administrators)

Happy Guo

Tested by:  
( position+printed name+signature)

Gray Gao  
(Test Engineer)

Gray Gao

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)

Ivan Xie

Product Name ..... : Siyata SD7

Model/Type reference ..... : SD7

List Model(s)..... : N/A

Trade Mark..... : Siyata

FCC ID..... : 2AOCX- SD7

IC ID ..... : 23378-SD7

Applicant's name ..... : Siyata Mobile Inc.

Address of applicant ..... : 1001 Lenoir St Suite A, Montreal, Quebec H4C 2Z6 Canada

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm ..... : Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road,  
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard ..... : FCC CFR Title 47 Part 2, Part 24E  
RSS-133 issue 6  
EIA/TIA 603-D: 2010  
KDB 971168 D01

TRF Originator ..... : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF ..... : Dated 2011-01

Date of receipt of test item ..... : Jun. 25, 2021

Date of sampling..... : Jun. 25, 2021

Date of Test Date..... : Jun. 25, 2021-Jul. 09, 2021

Data of Issue..... : Jul. 12, 2021

Result..... : Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b> CTL2106018081-WF06	Jul. 12, 2021 ----- Date of issue
---	---

Equipment under Test : Siyata SD7

Sample No : CTL210601808-1-S001

Model /Type : SD7

Listed Models : N/A

**Applicant** : **Siyata Mobile Inc.**

Address : 1001 Lenoir St Suite A, Montreal, Quebec H4C 2Z6  
Canada

**Manufacturer** : **Siyata Mobile Inc.**

Address : 1001 Lenoir St Suite A, Montreal, Quebec H4C 2Z6  
Canada

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\*In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

[illegible]

## Table of Contents

## Page

<b>1. SUMMARY .....</b>	<b>5</b>
1.1. TEST STANDARDS .....	5
1.2. TEST DESCRIPTION .....	5
1.3. TEST FACILITY .....	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. ENVIRONMENTAL CONDITIONS .....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. DESCRIPTION OF TEST MODES .....	7
2.4. EQUIPMENTS USED DURING THE TEST .....	9
2.5. RELATED SUBMITTAL(S) / GRANT (S) .....	9
2.6. MODIFICATIONS .....	9
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>10</b>
3.1. OUTPUT POWER .....	10
3.2. PEAK-TO-AVERAGE RATIO (PAR) .....	14
3.3. OCCUPIED BANDWIDTH AND EMISSION BANDWIDTH .....	16
3.4. BAND EDGE COMPLIANCE .....	17
3.5. SPURIOUS EMISSION .....	18
3.6. FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS .....	28
3.7. MODULATION CHARACTERISTICS .....	30
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>31</b>
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>32</b>

## 1. SUMMARY

### 1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 24](#): PUBLIC MOBILE SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01:v03r01](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.10-2020](#) Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

### 1.2. Test Description

Test Item	Section in CFR 47	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046 §24.232 RSS-133(6.4)	Pass
Peak-to-Average Ratio	§2.1046 §24.232(d) RSS-133(6.4)	Pass
Modulation Characteristics	§2.1047 RSS-133(6.2)	Pass
Bandwidth	§2.1049 §24.238(b) RSS-GEN 6.7/RSS-133(2.3)	Pass
Band Edges Compliance	§ 2.1051 §24.238(b) RSS-133(6.5)	Pass
Conducted Spurious Emission	§2.1051 §24.238	Pass
Field Strength of Spurious Radiation	§2.1053 §24.238 RSS-133(6.5)	Pass
Frequency stability	§2.1055 §24.235 RSS-133(6.3)	Pass

### 1.3. Test Facility

#### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

#### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L7497**

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No. 4343.01**

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **IC Registration No.: 9618B**

##### **CAB identifier: CN0041**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

##### **FCC-Registration No.: 399832**

##### **Designation No.: CN1216**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

### 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Siyata SD7		
Model/Type reference:	SD7		
Power supply:	Adapter Model: HJ-0502000W2-US InputL:100-240V~50/60Hz0.3A Output:5V---2000mA DC 3.85V from battery		
Hardware version:	H128MB_V0.2		
Software version:	7RO2G27JUN1D		
Test Mode (s)			
Mode:	WCDMA Band II ; LTE Band 2;		
Modulation Type:	(WCDMA)QPSK; (LTE)QPSK 16QAM		
Operating Frequency Range(S)	Band	Tx(MHz)	Rx(MHz)
	WCDMA Band II	1850~1910	1930~1990
	LTE Band 2	1850~1910	1930~1990
	LTE Band 25	1850~1915	1930~1995
Release Version:	Release 9		
Category:	Cat 4		
Antenna type:	PIFA Antenna		
Antenna gain:	Band II : 0.37dBi Band 2: 0.37dBi Band 25: 0.38dBi		

Note: For more details, refer to the user's manual of the EUT.

### 2.3. Description of Test Modes

1. The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

#### 2. Test Frequencies

Test Mode	TX/RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA Band II	TX	Channel 8262	Channel 9400	Channel 9538
		1852.4MHz	1880MHz	1907.6MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4MHz	1960MHz	1987.6MHz

Test Mode	Bandwidth	TX/RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 2	1.4MHz	TX	Channel 18607	Channel 18900	Channel 19193
			1850.7MHz	1880MHz	1909.3MHz
		RX	Channel 607	Channel 900	Channel 1193
			1930.7MHz	1960MHz	1989.3MHz
	3MHz	TX	Channel 18615	Channel 18900	Channel 19185
			1851.5MHz	1880MHz	1908.5MHz
		RX	Channel 615	Channel 900	Channel 1185
			1931.5MHz	1960MHz	1988.5MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5MHz	1880MHz	1907.5MHz
		RX	Channel 625	Channel 900	Channel 1175
			1932.5MHz	1960MHz	1987.5MHz
	10MHz	TX	Channel 18650	Channel 18900	Channel 19150
			1855MHz	1880MHz	1905MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935MHz	1960MHz	1985MHz
	15MHz	TX	Channel 18675	Channel 18900	Channel 19125
			1857.5MHz	1880MHz	1902.5MHz
		RX	Channel 675	Channel 900	Channel 1125
			1937.5MHz	1960MHz	1982.5MHz
	20 MHz	TX	Channel 18700	Channel 18900	Channel 19100
			1860MHz	1880MHz	1900MHz
		RX	Channel 700	Channel 900	Channel 1100
			1940MHz	1960MHz	1980MHz

Test Mode	Bandwidth	TX/RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band25	1.4MHz	TX	Channel 26047	Channel 26365	Channel 26683
			1850.7MHz	1882.5MHz	1914.3MHz
		RX	Channel 8047	Channel 8365	Channel 8683
			1930.7MHz	1962.5MHz	1994.3MHz
	3MHz	TX	Channel 26055	Channel 26365	Channel 26675
			1851.5MHz	1882.5MHz	1913.5MHz
		RX	Channel 8055	Channel 8365	Channel 8675
			1931.5MHz	1962.5MHz	1993.5MHz
	5MHz	TX	Channel 26065	Channel 26365	Channel 26665
			1852.5MHz	1882.5MHz	1912.5MHz
		RX	Channel 8065	Channel 8365	Channel 8665
			1932.5MHz	1962.5MHz	1992.5MHz
	10MHz	TX	Channel 26090	Channel 26365	Channel 26640
			1855MHz	1882.5MHz	1810MHz
		RX	Channel 8090	Channel 8365	Channel 8640
			1935MHz	1962.5MHz	1990MHz
	15MHz	TX	Channel 26115	Channel 26365	Channel 26615
			1937.5MHz	19962.5MHz	1907.5MHz
		RX	Channel 8115	Channel 8365	Channel 8615
			1937.5MHz	1962.5MHz	1987.5MHz
	20MHz	TX	Channel 26140	Channel 26365	Channel 26590
			1860MHz	1882.5MHz	1905MHz
		RX	Channel 8140	Channel 8365	Channel 8590
			1940MHz	1962.5MHz	1985MHz



## 2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2021/05/22	2022/05/21
Bilog Antenna	Sunol Sciences Corp.	JB1	A061714	2021/05/22	2022/05/21
EMI Test Receiver	R&S	ESCI	103710	2021/05/22	2022/05/21
Spectrum Analyzer	Agilent	E4407B	MY41440676	2021/05/22	2022/05/21
Spectrum Analyzer	Agilent	N9020	US46220290	2021/05/22	2022/05/21
Spectrum Analyzer	Keysight	N9020A	MY53420874	2021/05/22	2022/05/21
Controller	EM Electronics	Controller EM 1000	N/A	2021/05/22	2022/05/21
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/05/22	2022/05/21
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062014	2021/05/22	2022/05/21
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2021/05/22	2022/05/21
Amplifier	Agilent	8349B	3008A02306	2021/05/22	2022/05/21
Amplifier	Agilent	8447D	2944A10176	2021/05/22	2022/05/21
Temperature/Humidity Meter	Gangxing	CTH-608	02	2021/05/22	2022/05/21
Wideband Radio Communication Tester	R&S	CMW500	101814	2021/05/22	2022/05/21
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2021/05/22	2022/05/21
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2021/05/22	2022/05/21
RF Cable	HUBER+SUHNER	RG214	N/A	2021/05/22	2022/05/21
Climate Chamber	ESPEC	EL-10KA	A20120523	2021/05/22	2022/05/21
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2021/05/22	2022/05/21
Directional Coupler	Agilent	87300B	3116A03638	2021/05/22	2022/05/21
Power Sensor	Agilent	U2021XA	MY5365004	2021/05/22	2022/05/21
Power Meter	Agilent	U2531A	TW53323507	2021/05/22	2022/05/21

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with of the Part 24 Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.



### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Output Power

##### LIMIT

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

##### TEST CONFIGURATION

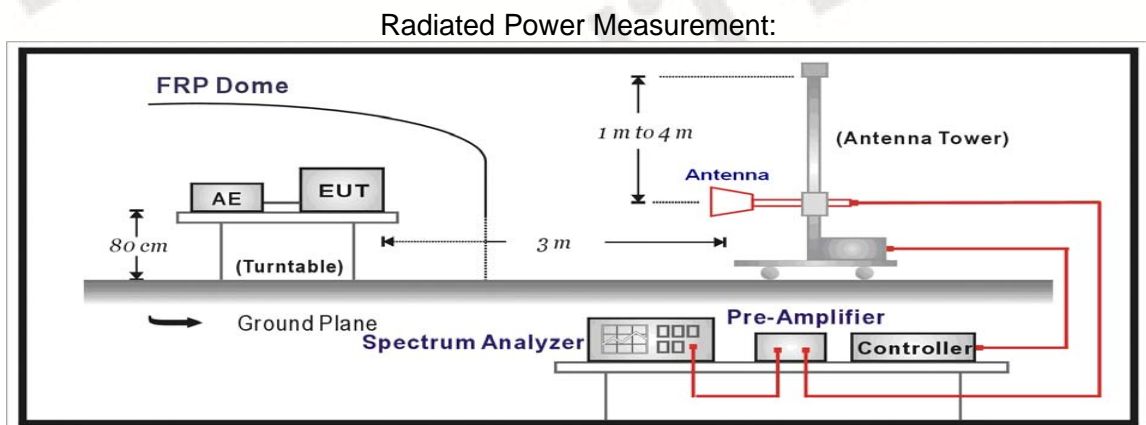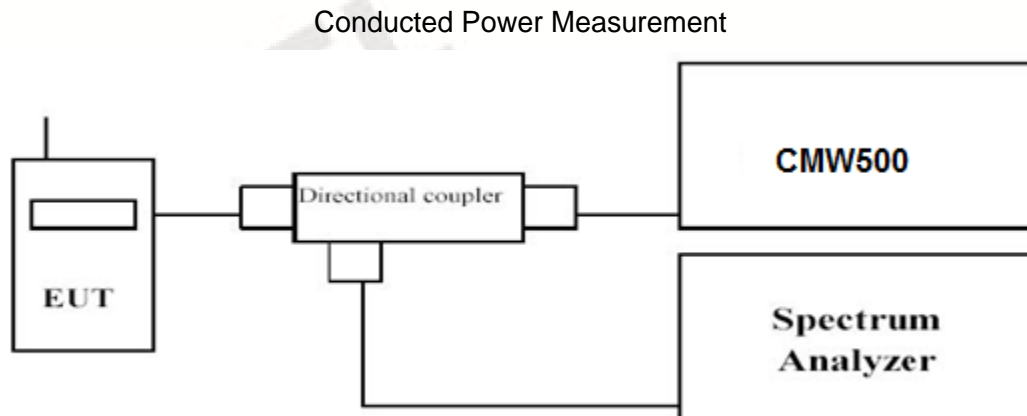

##### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

##### **Radiated Power Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.

- d) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4.

**TEST RESULTS****Conducted Measurement:**

1. Please refer to Appendix A: Section 1
2. Please refer to Appendix D: Section 1
3. Please refer to Appendix L: Section 1

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of WCDMA Band II LTE Band 2 and LTE Band 25

**WCDMA Band II**

Mode	Channel	Frquency (MHz)	EIRP (dBm)	Limit (dBm)	Polarization	Conclusion
WCDMA Band II	Low	1852.4	27.68	33.01	H	Pass
	Mid	1880	27.15	33.01	H	Pass
	High	1907.6	27.25	33.01	H	Pass

**LTE FDD Band 2**

Bandwidth	Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Polarization	Conclusion
1.4MHz QPSK	Low	1850.7	26.63	33.01	H	Pass
	Mid	1880.0	26.67	33.01	H	Pass
	High	1909.3	26.78	33.01	H	Pass
3MHz QPSK	Low	1851.5	26.52	33.01	H	Pass
	Mid	1880.0	26.67	33.01	H	Pass
	High	1908.5	25.42	33.01	H	Pass
5MHz QPSK	Low	1852.5	26.67	33.01	H	Pass
	Mid	1880.0	26.63	33.01	H	Pass
	High	1907.5	26.36	33.01	H	Pass
10MHz QPSK	Low	1855.0	25.75	33.01	H	Pass
	Mid	1880.0	26.42	33.01	H	Pass
	High	1905.0	25.67	33.01	H	Pass
15MHz QPSK	Low	1857.5	26.63	33.01	H	Pass
	Mid	1880.0	26.63	33.01	H	Pass
	High	1902.5	26.67	33.01	H	Pass
20MHz QPSK	Low	1860	26.78	33.01	H	Pass
	Mid	1882.5	26.52	33.01	H	Pass
	High	1905	26.42	33.01	H	Pass
1.4MHz 16QAM	Low	1850.7	26.67	33.01	H	Pass
	Mid	1880.0	26.63	33.01	H	Pass
	High	1909.3	26.36	33.01	H	Pass
3MHz 16QAM	Low	1851.5	25.75	33.01	H	Pass
	Mid	1880.0	25.57	33.01	H	Pass
	High	1908.5	25.63	33.01	H	Pass
5MHz 16QAM	Low	1852.5	26.67	33.01	H	Pass
	Mid	1880.0	26.78	33.01	H	Pass
	High	1907.5	26.52	33.01	H	Pass
10MHz 16QAM	Low	1855.0	26.42	33.01	H	Pass
	Mid	1880.0	25.67	33.01	H	Pass
	High	1905.0	26.63	33.01	H	Pass
15MHz 16QAM	Low	1857.5	25.36	33.01	H	Pass
	Mid	1880.0	26.75	33.01	H	Pass
	High	1902.5	25.57	33.01	H	Pass
20MHz 16QAM	Low	1860	26.63	33.01	H	Pass
	Mid	1882.5	25.67	33.01	H	Pass
	High	1905	26.78	33.01	H	Pass

## LTE FDD Band 25


Bandwidth	Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Polarization	Conclusion
1.4MHz QPSK	Low	1850.7	27.78	33.01	H	Pass
	Mid	1882.5	27.52	33.01	H	Pass
	High	1914.3	27.42	33.01	H	Pass
3MHz QPSK	Low	1851.5	27.67	33.01	H	Pass
	Mid	1882.5	26.63	33.01	H	Pass
	High	1913.5	26.36	33.01	H	Pass
5MHz QPSK	Low	1852.5	27.75	33.01	H	Pass
	Mid	1882.5	26.57	33.01	H	Pass
	High	1912.5	25.52	33.01	H	Pass
10MHz QPSK	Low	1855.0	25.42	33.01	H	Pass
	Mid	1882.5	26.67	33.01	H	Pass
	High	1910	26.63	33.01	H	Pass
15MHz QPSK	Low	1857.5	26.36	33.01	H	Pass
	Mid	1882.5	26.52	33.01	H	Pass
	High	1907.5	26.42	33.01	H	Pass
20MHz QPSK	Low	1860	27.36	33.01	H	Pass
	Mid	1882.5	27.75	33.01	H	Pass
	High	1905	26.57	33.01	H	Pass
1.4MHz 16QAM	Low	1850.7	26.63	33.01	H	Pass
	Mid	1882.5	26.63	33.01	H	Pass
	High	1914.3	26.36	33.01	H	Pass
3MHz 16QAM	Low	1851.5	25.75	33.01	H	Pass
	Mid	1882.5	26.57	33.01	H	Pass
	High	1913.5	26.63	33.01	H	Pass
5MHz 16QAM	Low	1852.5	26.67	33.01	H	Pass
	Mid	1882.5	26.78	33.01	H	Pass
	High	1912.5	25.52	33.01	H	Pass
10MHz 16QAM	Low	1855.0	26.42	33.01	H	Pass
	Mid	1882.5	26.67	33.01	H	Pass
	High	1910	25.63	33.01	H	Pass
15MHz 16QAM	Low	1857.5	26.36	33.01	H	Pass
	Mid	1882.5	25.75	33.01	H	Pass
	High	1907.5	25.57	33.01	H	Pass
20MHz 16QAM	Low	1860	27.63	33.01	H	Pass
	Mid	1882.5	27.67	33.01	H	Pass
	High	1905	27.78	30.00	H	Pass

### 3.2. Peak-to-Average Ratio (PAR)

#### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### TEST CONFIGURATION

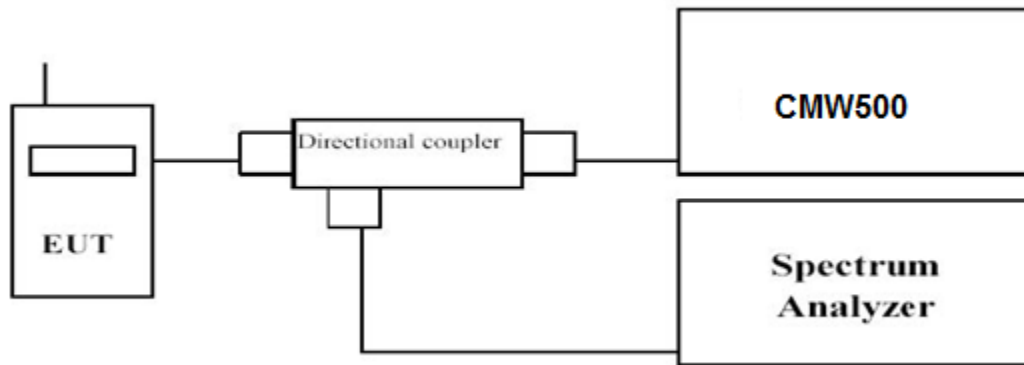

#### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

**TEST RESULTS**


1. Please refer to Appendix A: Section 5
2. Please refer to Appendix D: Section 5
3. Please refer to Appendix L: Section 5

### 3.3. Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

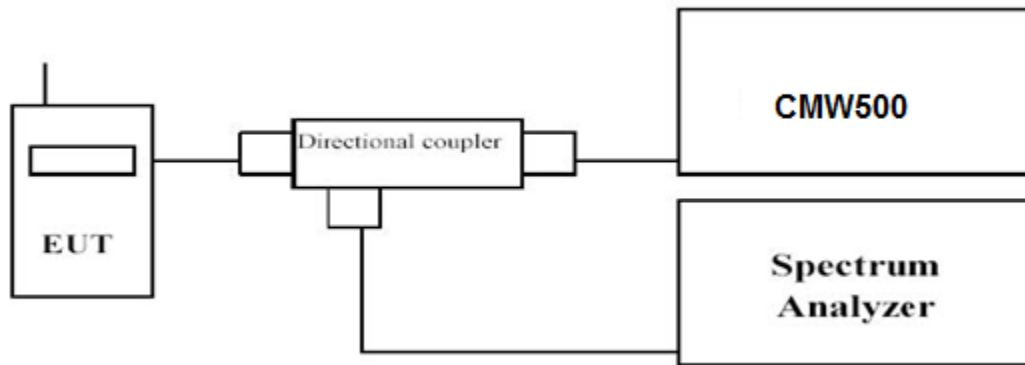

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

1. Please refer to Appendix A: Section 3
2. Please refer to Appendix D: Section 3
3. Please refer to Appendix L: Section 3




### 3.4. Band Edge compliance

#### LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

#### TEST CONFIGURATION

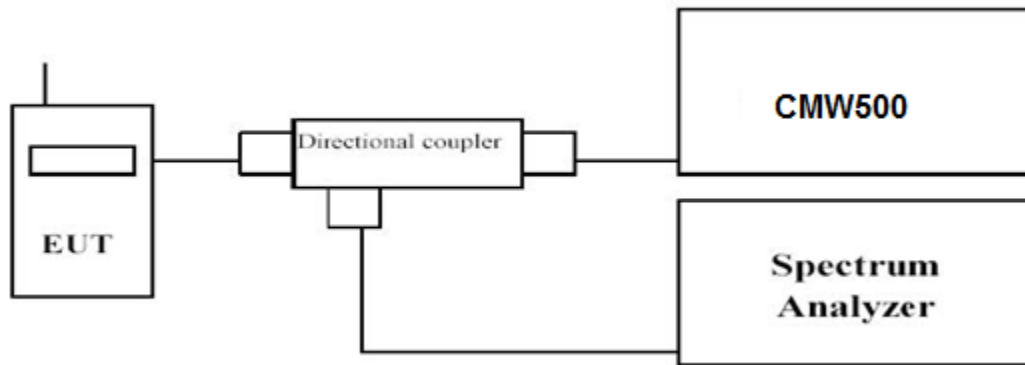

#### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

#### TEST RESULTS

1. Please refer to Appendix A: Section 6
2. Please refer to Appendix D: Section 6
3. Please refer to Appendix L: Section 6


### 3.5. Spurious Emission

#### LIMIT


Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

#### TEST CONFIGURATION

Conducted Spurious Measurement:

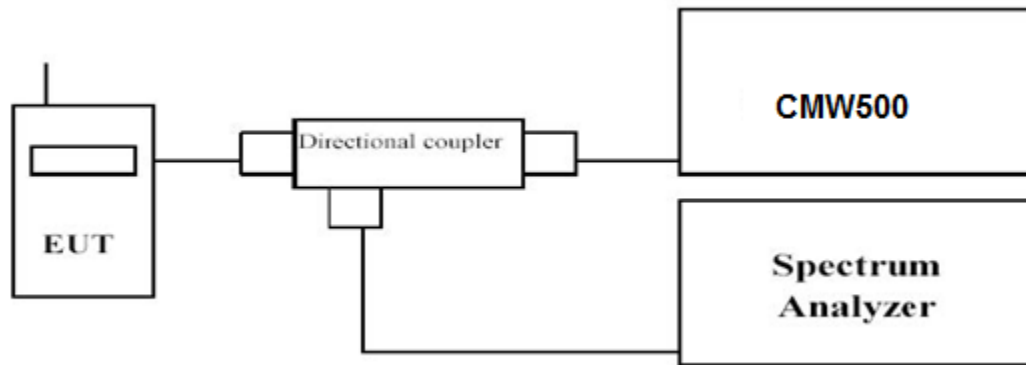

Radiated Spurious Measurement:

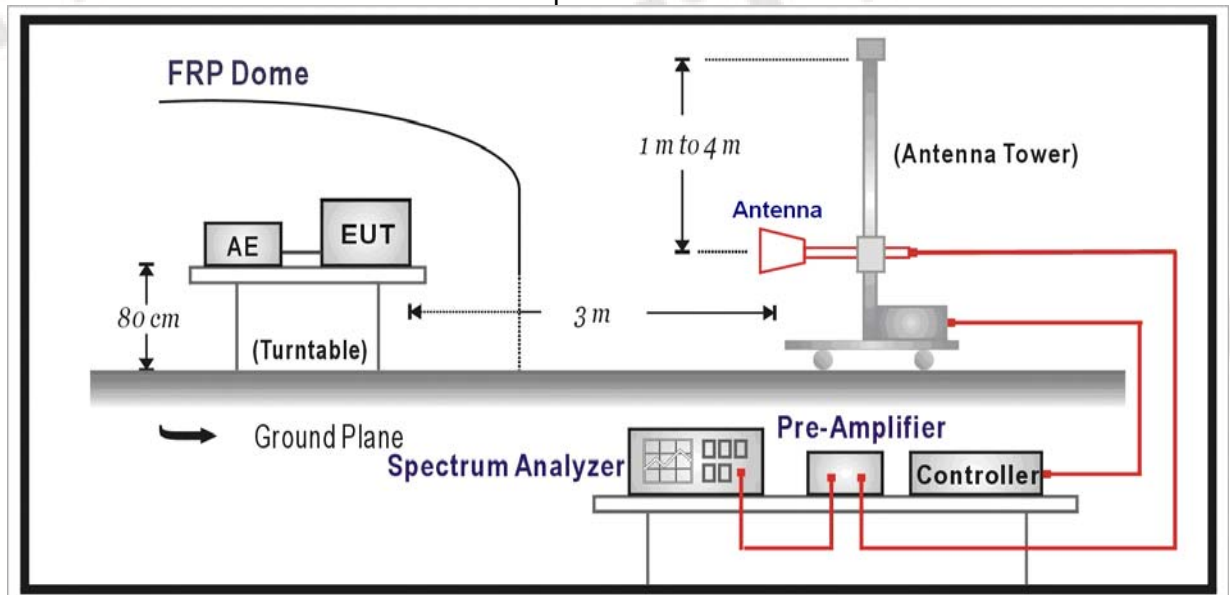

#### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Conducted Spurious Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

**Radiated Spurious Measurement:**

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.

**TEST RESULTS***Remark:*

We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of WCDMA Band II LTE Band 2 and LTE Band 25

**Conducted Measurement:**

1. Please refer to Appendix A: Section 6
2. Please refer to Appendix D: Section 6
3. Please refer to Appendix L: Section 6

**Radiated Measurement:***Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of WCDMA Band II LTE FDD Band 2 and Band II LTE FDD Band 25@ QPSK
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4.  $Margin = EIRP - Limit$

**WCDMA Band II \_ Low Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3704.8	-43.54	5.26	3.00	9.88	-38.92	-13.00	-25.92	H
5557.2	-48.09	6.11	3.00	11.36	-42.84	-13.00	-29.84	H
3704.8	-46.94	5.26	3.00	9.88	-42.32	-13.00	-29.32	V
5557.2	-50.99	6.11	3.00	11.36	-45.74	-13.00	-32.74	V

**WCDMA Band II \_ Middle Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760	-42.70	5.32	3.00	10.03	-37.99	-13.00	-24.99	H
5640	-46.00	6.19	3.00	11.41	-40.78	-13.00	-27.78	H
3760	-46.78	5.32	3.00	10.03	-42.07	-13.00	-29.07	V
5640	-51.33	6.19	3.00	11.41	-46.11	-13.00	-33.11	V

**WCDMA Band IV \_ High Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.2	-41.50	5.36	3.00	9.62	-37.24	-13.00	-24.24	H
5722.8	-44.19	6.24	3.00	11.46	-38.97	-13.00	-25.97	H
3815.2	-45.73	5.36	3.00	9.62	-41.47	-13.00	-28.47	V
5722.8	-47.07	6.24	3.00	11.46	-41.85	-13.00	-28.85	V

**LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_QPSK\_ Low Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-42.91	5.26	3.00	9.88	-38.29	-13.00	-25.29	H
5552.1	-49.08	6.11	3.00	11.36	-43.83	-13.00	-30.83	H
3701.4	-46.76	5.26	3.00	9.88	-42.14	-13.00	-29.14	V
5552.1	-51.66	6.11	3.00	11.36	-46.41	-13.00	-33.41	V

**LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_QPSK\_ Middle Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.69	5.32	3.00	10.03	-38.98	-13.00	-25.98	H
5640.0	-47.85	6.19	3.00	11.41	-42.63	-13.00	-29.63	H
3760.0	-47.02	5.32	3.00	10.03	-42.31	-13.00	-29.31	V
5640.0	-50.87	6.19	3.00	11.41	-45.65	-13.00	-32.65	V

*LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3806.6	-42.87	5.36	3.00	9.62	-38.61	-13.00	-25.61	H
5709.9	-46.18	6.24	3.00	11.46	-40.96	-13.00	-27.96	H
3806.6	-46.80	5.36	3.00	9.62	-42.54	-13.00	-29.54	V
5709.9	-51.34	6.24	3.00	11.46	-46.12	-13.00	-33.12	V

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703.0	-42.66	5.26	3.00	9.88	-38.04	-13.00	-25.04	H
5554.5	-49.03	6.11	3.00	11.36	-43.78	-13.00	-30.78	H
3703.0	-46.82	5.26	3.00	9.88	-42.20	-13.00	-29.20	V
5554.5	-51.51	6.11	3.00	11.36	-46.26	-13.00	-33.26	V

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.69	5.32	3.00	10.03	-38.98	-13.00	-25.98	H
5640.0	-47.71	6.19	3.00	11.41	-42.49	-13.00	-29.49	H
3760.0	-47.23	5.32	3.00	10.03	-42.52	-13.00	-29.52	V
5640.0	-50.99	6.19	3.00	11.41	-45.77	-13.00	-32.77	V

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3817.0	-42.98	5.36	3.00	9.62	-38.72	-13.00	-25.72	H
5725.5	-46.31	6.24	3.00	11.46	-41.09	-13.00	-28.09	H
3817.0	-46.76	5.36	3.00	9.62	-42.50	-13.00	-29.50	V
5725.5	-51.31	6.24	3.00	11.46	-46.09	-13.00	-33.09	V

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705.0	-42.86	5.26	3.00	9.88	-38.24	-13.00	-25.24	H
5557.5	-49.00	6.11	3.00	11.36	-43.75	-13.00	-30.75	H
3705.0	-46.51	5.26	3.00	9.88	-41.89	-13.00	-28.89	V
5557.5	-51.65	6.11	3.00	11.36	-46.40	-13.00	-33.40	V

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.46	5.32	3.00	10.03	-38.75	-13.00	-25.75	H
5640.0	-47.69	6.19	3.00	11.41	-42.47	-13.00	-29.47	H
3760.0	-47.15	5.32	3.00	10.03	-42.44	-13.00	-29.44	V
5640.0	-51.15	6.19	3.00	11.41	-45.93	-13.00	-32.93	V

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.0	-42.75	5.36	3.00	9.62	-38.49	-13.00	-25.49	H
5722.5	-46.22	6.24	3.00	11.46	-41.00	-13.00	-28.00	H
3815.0	-46.53	5.36	3.00	9.62	-42.27	-13.00	-29.27	V
5722.5	-51.40	6.24	3.00	11.46	-46.18	-13.00	-33.18	V

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.0	-42.98	5.26	3.00	9.88	-38.36	-13.00	-25.36	H
5565.0	-49.16	6.11	3.00	11.36	-43.91	-13.00	-30.91	H
3710.0	-46.88	5.26	3.00	9.88	-42.26	-13.00	-29.26	V
5565.0	-51.76	6.11	3.00	11.36	-46.51	-13.00	-33.51	V

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.52	5.32	3.00	10.03	-38.81	-13.00	-25.81	H
5640.0	-47.93	6.19	3.00	11.41	-42.71	-13.00	-29.71	H
3760.0	-47.23	5.32	3.00	10.03	-42.52	-13.00	-29.52	V
5640.0	-50.89	6.19	3.00	11.41	-45.67	-13.00	-32.67	V

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.0	-42.93	5.36	3.00	9.62	-38.67	-13.00	-25.67	H
5715.0	-46.24	6.24	3.00	11.46	-41.02	-13.00	-28.02	H
3810.0	-46.53	5.36	3.00	9.62	-42.27	-13.00	-29.27	V
5715.0	-51.23	6.24	3.00	11.46	-46.01	-13.00	-33.01	V

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-42.82	5.26	3.00	9.88	-38.20	-13.00	-25.20	H
5572.5	-49.16	6.11	3.00	11.36	-43.91	-13.00	-30.91	H
3715.0	-46.88	5.26	3.00	9.88	-42.26	-13.00	-29.26	V
5572.5	-51.71	6.11	3.00	11.36	-46.46	-13.00	-33.46	V

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-43.70	5.32	3.00	10.03	-38.99	-13.00	-25.99	H
5640.0	-47.85	6.19	3.00	11.41	-42.63	-13.00	-29.63	H
3760.0	-47.00	5.32	3.00	10.03	-42.29	-13.00	-29.29	V
5640.0	-50.99	6.19	3.00	11.41	-45.77	-13.00	-32.77	V



*LTE FDD Band 2\_Channel Bandwidth 15MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3805.0	-42.64	5.36	3.00	9.62	-38.38	-13.00	-25.38	H
5707.5	-46.34	6.24	3.00	11.46	-41.12	-13.00	-28.12	H
3805.0	-46.84	5.36	3.00	9.62	-42.58	-13.00	-29.58	V
5707.5	-51.40	6.24	3.00	11.46	-46.18	-13.00	-33.18	V

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-42.93	5.26	3.00	9.88	-38.31	-13.00	-25.31	H
5572.5	-49.27	6.11	3.00	11.36	-44.02	-13.00	-31.02	H
3715.0	-46.83	5.26	3.00	9.88	-42.21	-13.00	-29.21	V
5572.5	-51.60	6.11	3.00	11.36	-46.35	-13.00	-33.35	V

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.0	-43.51	5.32	3.00	10.03	-38.80	-13.00	-25.80	H
5580.0	-47.73	6.19	3.00	11.41	-42.51	-13.00	-29.51	H
3720.0	-47.30	5.32	3.00	10.03	-42.59	-13.00	-29.59	V
5580.0	-51.04	6.19	3.00	11.41	-45.82	-13.00	-32.82	V

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.0	-42.61	5.36	3.00	9.62	-38.35	-13.00	-25.35	H
5700.0	-46.41	6.24	3.00	11.46	-41.19	-13.00	-28.19	H
3800.0	-46.74	5.36	3.00	9.62	-42.48	-13.00	-29.48	V
5700.0	-51.41	6.24	3.00	11.46	-46.19	-13.00	-33.19	V

*LTE FDD Band 25\_Channel Bandwidth 1.4MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-42.62	5.26	3.00	9.88	-38.00	-13.00	-25.00	H
5552.1	-49.29	6.11	3.00	11.36	-44.04	-13.00	-31.04	H
3701.4	-46.80	5.26	3.00	9.88	-42.18	-13.00	-29.18	V
5552.1	-51.57	6.11	3.00	11.36	-46.32	-13.00	-33.32	V

*LTE FDD Band 25\_Channel Bandwidth 1.4MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-43.52	5.32	3.00	10.03	-38.81	-13.00	-25.81	H
5647.5	-47.77	6.19	3.00	11.41	-42.55	-13.00	-29.55	H
3765	-47.20	5.32	3.00	10.03	-42.49	-13.00	-29.49	V
5647.5	-50.99	6.19	3.00	11.41	-45.77	-13.00	-32.77	V

*LTE FDD Band 25\_Channel Bandwidth 1.4MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3828.6	-42.70	5.36	3.00	9.62	-38.44	-13.00	-25.44	H
5742.9	-46.33	6.24	3.00	11.46	-41.11	-13.00	-28.11	H
3828.6	-46.71	5.36	3.00	9.62	-42.45	-13.00	-29.45	V
5742.9	-51.33	6.24	3.00	11.46	-46.11	-13.00	-33.11	V

*LTE FDD Band 25\_Channel Bandwidth 3MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703	-42.80	5.26	3.00	9.88	-38.18	-13.00	-25.18	H
5554.5	-48.96	6.11	3.00	11.36	-43.71	-13.00	-30.71	H
3703	-46.56	5.26	3.00	9.88	-41.94	-13.00	-28.94	V
5554.5	-51.78	6.11	3.00	11.36	-46.53	-13.00	-33.53	V

*LTE FDD Band 25\_Channel Bandwidth 3MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-42.75	5.26	3.00	9.88	-38.13	-13.00	-25.13	H
5647.5	-49.09	6.11	3.00	11.36	-43.84	-13.00	-30.84	H
3765	-46.76	5.26	3.00	9.88	-42.14	-13.00	-29.14	V
5647.5	-51.69	6.11	3.00	11.36	-46.44	-13.00	-33.44	V



*LTE FDD Band 25\_Channel Bandwidth 3MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815	-43.54	5.32	3.00	10.03	-38.83	-13.00	-25.83	H
5722.5	-47.79	6.19	3.00	11.41	-42.57	-13.00	-29.57	H
3815	-47.13	5.32	3.00	10.03	-42.42	-13.00	-29.42	V
5722.5	-50.99	6.19	3.00	11.41	-45.77	-13.00	-32.77	V

*LTE FDD Band 25\_Channel Bandwidth 5MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705	-42.65	5.36	3.00	9.62	-38.39	-13.00	-25.39	H
5557.5	-45.87	6.24	3.00	11.46	-40.65	-13.00	-27.65	H
3705	-46.76	5.36	3.00	9.62	-42.50	-13.00	-29.50	V
5557.5	-51.61	6.24	3.00	11.46	-46.39	-13.00	-33.39	V

*LTE FDD Band 25\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-42.75	5.26	3.00	9.88	-38.13	-13.00	-25.13	H
5647.5	-49.09	6.11	3.00	11.36	-43.84	-13.00	-30.84	H
3765	-46.76	5.26	3.00	9.88	-42.14	-13.00	-29.14	V
5647.5	-51.69	6.11	3.00	11.36	-46.44	-13.00	-33.44	V

*LTE FDD Band 25\_Channel Bandwidth 5MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3825	-43.69	5.32	3.00	10.03	-38.98	-13.00	-25.98	H
5737.5	-48.09	6.19	3.00	11.41	-42.87	-13.00	-29.87	H
3825	-47.06	5.32	3.00	10.03	-42.35	-13.00	-29.35	V
5737.5	-51.22	6.19	3.00	11.41	-46.00	-13.00	-33.00	V

*LTE FDD Band 25\_Channel Bandwidth 10MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3870	-42.94	5.36	3.00	9.62	-38.68	-13.00	-25.68	H
5805	-46.05	6.24	3.00	11.46	-40.83	-13.00	-27.83	H
3870	-46.95	5.36	3.00	9.62	-42.69	-13.00	-29.69	V
5805	-51.66	6.24	3.00	11.46	-46.44	-13.00	-33.44	V

*LTE FDD Band 25\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-43.09	5.26	3.00	9.88	-38.47	-13.00	-25.47	H
5647.5	-49.02	6.11	3.00	11.36	-43.77	-13.00	-30.77	H
3765	-46.71	5.26	3.00	9.88	-42.09	-13.00	-29.09	V
5647.5	-51.78	6.11	3.00	11.36	-46.53	-13.00	-33.53	V

*LTE FDD Band 25\_Channel Bandwidth 10MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3820	-42.65	5.36	3.00	9.62	-38.39	-13.00	-25.39	H
5730	-46.04	6.24	3.00	11.46	-40.82	-13.00	-27.82	H
3820	-46.79	5.36	3.00	9.62	-42.53	-13.00	-29.53	V
5730	-51.41	6.24	3.00	11.46	-46.19	-13.00	-33.19	V

*LTE FDD Band 25\_Channel Bandwidth 15MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715	-42.86	5.26	3.00	9.88	-38.24	-13.00	-25.24	H
5572.5	-49.17	6.11	3.00	11.36	-43.92	-13.00	-30.92	H
3715	-46.83	5.26	3.00	9.88	-42.21	-13.00	-29.21	V
5572.5	-51.81	6.11	3.00	11.36	-46.56	-13.00	-33.56	V

*LTE FDD Band 25\_Channel Bandwidth 15MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-43.60	5.32	3.00	10.03	-38.89	-13.00	-25.89	H
5647.5	-47.82	6.19	3.00	11.41	-42.60	-13.00	-29.60	H
3765	-47.17	5.32	3.00	10.03	-42.46	-13.00	-29.46	V
5647.5	-51.16	6.19	3.00	11.41	-45.94	-13.00	-32.94	V

*LTE FDD Band 25\_Channel Bandwidth 15MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815	-42.62	5.36	3.00	9.62	-38.36	-13.00	-25.36	H
5722.5	-46.11	6.24	3.00	11.46	-40.89	-13.00	-27.89	H
3815	-46.95	5.36	3.00	9.62	-42.69	-13.00	-29.69	V
5722.5	-51.36	6.24	3.00	11.46	-46.14	-13.00	-33.14	V

*LTE FDD Band 25\_Channel Bandwidth 20MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720	-42.85	5.26	3.00	9.88	-38.23	-13.00	-25.23	H
5580	-49.29	6.11	3.00	11.36	-44.04	-13.00	-31.04	H
3720	-46.71	5.26	3.00	9.88	-42.09	-13.00	-29.09	V
5580	-51.79	6.11	3.00	11.36	-46.54	-13.00	-33.54	V

*LTE FDD Band 25\_Channel Bandwidth 20MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765	-43.66	5.32	3.00	10.03	-38.95	-13.00	-25.95	H
5647.5	-47.87	6.19	3.00	11.41	-42.65	-13.00	-29.65	H
3765	-47.20	5.32	3.00	10.03	-42.49	-13.00	-29.49	V
5647.5	-50.86	6.19	3.00	11.41	-45.64	-13.00	-32.64	V

*LTE FDD Band 25\_Channel Bandwidth 20MHz\_QPSK\_High Channel*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance (m)	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810	-42.96	5.36	3.00	9.62	-38.70	-13.00	-25.70	H
5715	-45.96	6.24	3.00	11.46	-40.74	-13.00	-27.74	H
3810	-46.68	5.36	3.00	9.62	-42.42	-13.00	-29.42	V
5715	-51.34	6.24	3.00	11.46	-46.12	-13.00	-33.12	V

### 3.6. Frequency Stability under Temperature & Voltage Variations

#### LIMIT

According to §24.235, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

#### TEST CONFIGURATION

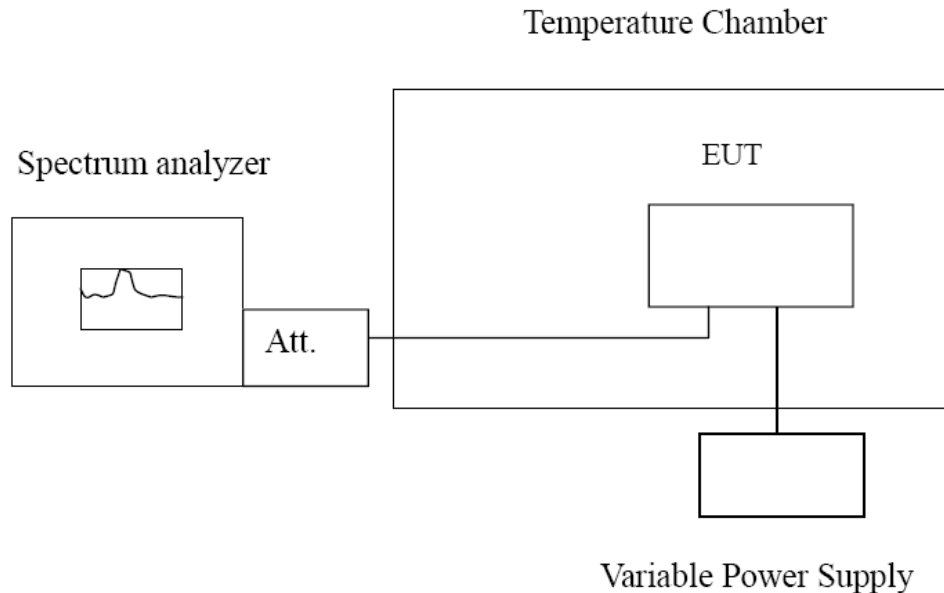

#### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Frequency Stability under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

##### **Frequency Stability under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

**TEST RESULTS**

1. Please refer to Appendix A: Section 2
2. Please refer to Appendix D: Section 2
3. Please refer to Appendix L: Section 2

### 3.7. Modulation Characteristics

#### Standard Applicable

#### **According to FCC Part 2 §2.1047:**

(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

(c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.


(d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

#### **TEST RESULTS**

1. Please refer to Appendix A: Section .3
2. Please refer to Appendix D: Section .3
3. Please refer to Appendix L: Section .3



#### 4. Test Setup Photos of the EUT

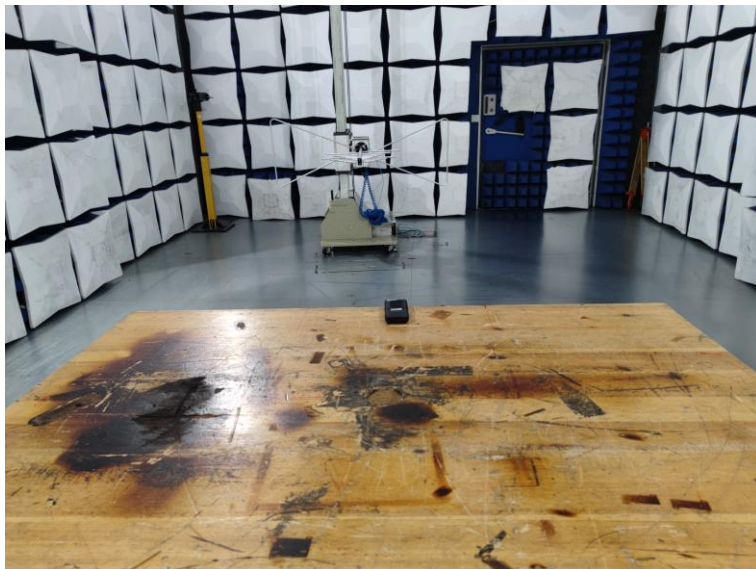

## 5. External and Internal Photos of the EUT

Reference to the test report No. CTL2106018081-WF01

\*\*\*\*\* End of Report \*\*\*\*\*