



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

# TEST REPORT

FCC Part 90S/ RSS-132

Report Reference No. ....: CTL2106018081-W08

Compiled by:  
( position+printed name+signature)

Happy Guo  
(File administrators)

Happy Guo

Tested by:  
( position+printed name+signature)

Gray Gao  
(Test Engineer)

Gray Gao

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)

Ivan Xie

Product Name.....: Siyata SD7

Model/Type reference .....: SD7

List Model(s).....: N/A

Trade Mark.....: Siyata

FCC ID.....: 2AOCX- SD7

IC ID.....: 23378-SD7

Applicant's name .....: Siyata Mobile Inc.

Address of applicant .....: 1001 Lenoir St Suite A, Montreal, Quebec H4C 2Z6 Canada

Test Firm .....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm .....: Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road,  
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC CFR Title 47 Part 2, Part 90S  
RSS-132 issue 3  
ANSI/TIA/EIA-603-E:2016  
KDB 971168 D01

TRF Originator .....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF .....: Dated 2011-01

Date of receipt of test item.....: Jun. 25, 2021

Date of sampling.....: Jun. 25, 2021

Date of Test Date.....: Jun. 25, 2021-Jul. 09, 2021

Data of Issue.....: Jul. 12, 2021

Result.....: Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b> CTL2106018081-W08	Jul. 12, 2021 Date of issue
--	--------------------------------

Equipment under Test : Siyata SD7

Sample No : CTL210601808-1-S001

Model /Type : SD7

Listed Models : N/A

**Applicant** : **Siyata Mobile Inc.**

Address : 1001 Lenoir St Suite A, Montreal, Quebec H4C 2Z6  
Canada

**Manufacturer** : **Siyata Mobile Inc.**

Address : 1001 Lenoir St Suite A, Montreal, Quebec H4C 2Z6  
Canada

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\*In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

[illegible]

## Table of Contents

## Page

<b>1. SUMMARY.....</b>	<b>5</b>
1.1. TEST STANDARDS.....	5
1.2. TEST FACILITY .....	6
1.3. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. ENVIRONMENTAL CONDITIONS .....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. DESCRIPTION OF TEST MODES .....	7
2.4. EQUIPMENTS USED DURING THE TEST .....	9
2.5. RELATED SUBMITTAL(s) / GRANT (s).....	9
2.6. MODIFICATIONS.....	9
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>10</b>
3.1. OUTPUT POWER .....	10
3.2. PEAK-TO-AVERAGE RATIO (PAR).....	14
3.3. OCCUPIED BANDWIDTH AND EMISSION BANDWIDTH.....	15
3.4. BAND EDGE COMPLIANCE .....	16
3.5. SPURIOUS EMISSION.....	18
3.6. FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS.....	24
3.7. MODULATION CHARACTERISTICS .....	26
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>27</b>
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>28</b>

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 90](#): PRIVATE LAND MOBILE RADIO SERVICES

[ANSI/TIA/EIA-603-E March 2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[RSS-Gen Issue 4](#): General Requirements for Compliance of Radio Apparatus

[RSS-132 Issue 3](#): Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz

[SRSP-503 RSS-133 Issue 7](#): Technical Requirements for Cellular Radiotelephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz

[KDB971168 D01:v03r01](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.10-2020](#) Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Test Description

Test Item	Section in CFR 47	Result
Effective (Isotropic) Radiated Power Output Data	§ 90.365 RSS-132(5.4)	Pass
Modulation Characteristics	§2.1047	Pass
Peak-to-Average Ratio (PAR)	§ 2.1046 §27.50(c) RSS-132(5.4)	Pass
Occupied Bandwidth	§ 2.1049 § 90.209 RSS-GEN 6.6	Pass
Band Edge compliance	§2.1051 § 90.543 (e) RSS-132(5.6)	Pass
Emission Mask	§90.210(n)	Pass
Spurious Emission	§2.1051 §2.1053 §90.543(c)(f) RSS-132(5.6)	Pass
Frequency Stability	§2.1055 Part 90.213 RSS-132(5.3)	Pass

## 1.2. Test Facility

### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### IC Registration No.: 9618B

#### CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

#### FCC-Registration No.: 399832

#### Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

## 1.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	Siyata SD7		
Model/Type reference:	SD7		
Power supply:	Adapter Model: HJ-0502000W2-US InputL:100-240V~50/60Hz0.3A Output:5V---2000mA DC 3.85V from battery		
Hardware version:	H128MB_PCB_V0.2		
Software version:	SC66ANAR01A06		
LTE			
Mode:	LTE Band 14;		
Modulation Type:	QPSK 16QAM		
Operating Frequency Range(S)	Band	Tx(MHz)	Rx(MHz)
	LTE Band14	788~798	758~769
	LTE Band26	814~824	/
Release Version:	Release 9		
Category:	Cat 4		
Antenna type:	PIFA Antenna		
Antenna gain:	Band 14: -0.37dBi Band 26: -0.35dBi		

Note: For more details, refer to the user's manual of the EUT.

#### Description of Test Modes

1. The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

#### 2. Test Frequencies

Test Mode	Bandwidth	TX/RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 14	5MHz	TX	Channel 23335	Channel 23330	Channel 23355
			790.5MHz	793MHz	795.5MHz
		RX	Channel 5305	Channel 5330	Channel 5355
			760.5MHz	763MHz	765.5MHz
	10MHz	TX	Channel 23330	Channel 23330	Channel 23330
			793MHz	793MHz	793MHz
		RX	Channel 5330	Channel 5330	Channel 5330
			763MHz	763MHz	763MHz

Test Mode	Bandwidth	TX/RX	RF Channel		
			Low (L)	Middle (M)	High (H)
LTE Band 26 (814~824)	1.4MHz	TX	Channel 26697	Channel 26740	Channel 26783
			814.7MHz	819MHz	823.3MHz
	3MHz	TX	Channel 26705	Channel 26740	Channel 26775
			815.5MHz	819MHz	822.5MHz
	5MHz	TX	Channel 26715	Channel 26740	Channel 26765
			816.5MHz	819MHz	821.5MHz
	10MHz	TX	/	Channel 26740	/
			/	819MHz	/



### 2.3. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2021/05/22	2022/05/21
Bilog Antenna	Sunol Sciences Corp.	JB1	A061714	2021/05/22	2022/05/21
EMI Test Receiver	R&S	ESCI	103710	2021/05/22	2022/05/21
Spectrum Analyzer	Agilent	E4407B	MY41440676	2021/05/22	2022/05/21
Spectrum Analyzer	Agilent	N9020	US46220290	2021/05/22	2022/05/21
Spectrum Analyzer	Keysight	N9020A	MY53420874	2021/05/22	2022/05/21
Controller	EM Electronics	Controller EM 1000	N/A	2021/05/22	2022/05/21
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/05/22	2022/05/21
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062014	2021/05/22	2022/05/21
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2021/05/22	2022/05/21
Amplifier	Agilent	8349B	3008A02306	2021/05/22	2022/05/21
Amplifier	Agilent	8447D	2944A10176	2021/05/22	2022/05/21
Temperature/Humidity Meter	Gangxing	CTH-608	02	2021/05/22	2022/05/21
Wideband Radio Communication Tester	R&S	CMW500	101814	2021/05/22	2022/05/21
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2021/05/22	2022/05/21
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2021/05/22	2022/05/21
RF Cable	HUBER+SUHNER	RG214	N/A	2021/05/22	2022/05/21
Climate Chamber	ESPEC	EL-10KA	A20120523	2021/05/22	2022/05/21
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2021/05/22	2022/05/21
Directional Coupler	Agilent	87300B	3116A03638	2021/05/22	2022/05/21
Power Sensor	Agilent	U2021XA	MY5365004	2021/05/22	2022/05/21
Power Meter	Agilent	U2531A	TW53323507	2021/05/22	2022/05/21

### 2.4. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with of the Part 90 Rules.

### 2.5. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Output Power

##### LIMIT

##### **FCC**


According to §90.542(a) specifies "Control stations and mobile stations transmitting in the 758-768 MHz band and the 788-798 MHz band are limited to 3 watts ERP."

##### **IC**


The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

##### TEST CONFIGURATION


Conducted Power Measurement

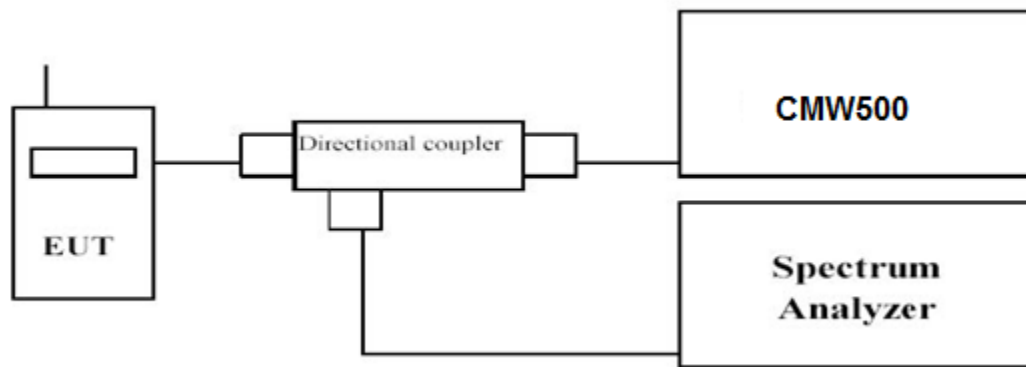


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

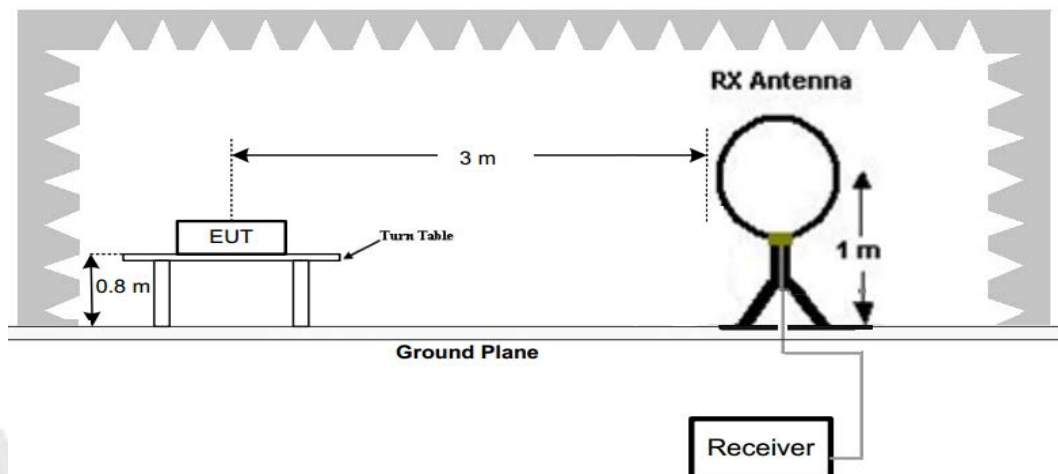

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

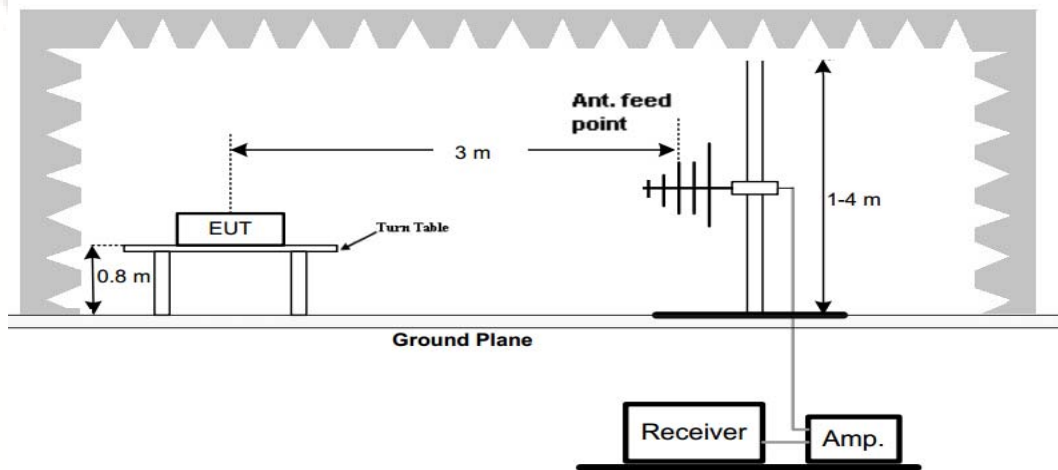

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

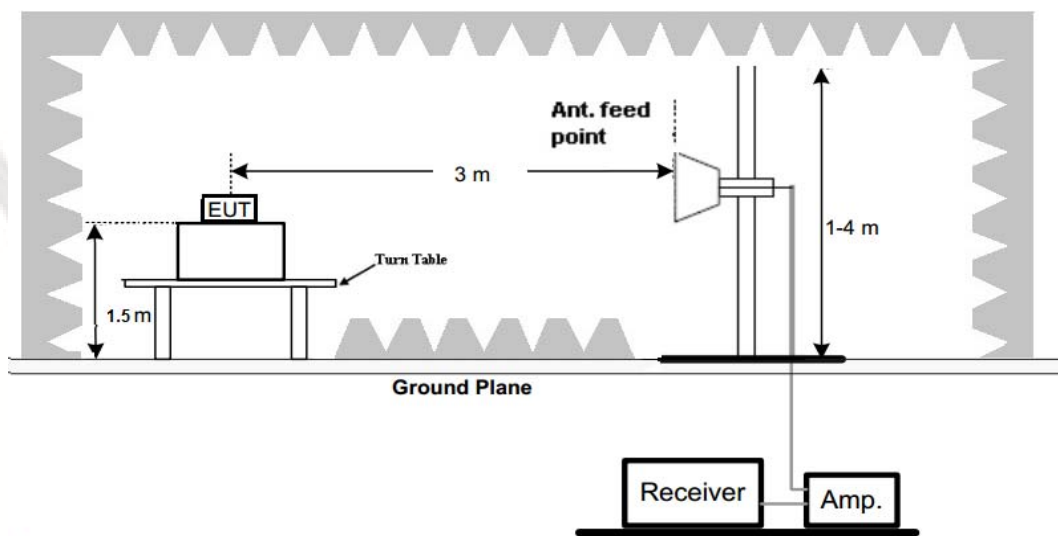

## **TEST PROCEDURE**

The EUT was setup according to ANSI/TIA/EIA-603-E

### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

### **Radiated Power Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.

- e) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4.

## **TEST RESULTS**

### **Conducted Measurement:**

1. Please refer to Appendix J: Section .1
2. Please refer to Appendix N: Section .1

**Radiated Measurement:***Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE Band 2, LTE Band 26; recorded worst case for each Channel Bandwidth of LTE Band 2 and LTE Band 26

**LTE FDD Band 14**

Bandwidth	Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Polarization	Conclusion
5MHz QPSK	Low	790.5	27.62	33.01	H	Pass
	Mid	793	27.25	33.01	H	Pass
	High	795.5	27.62	33.01	H	Pass
10MHz QPSK	/	793	27.24	33.01	H	Pass
5MHz 16QAM	Low	2507.5	27.62	33.01	H	Pass
	Mid	2535	27.62	33.01	H	Pass
	High	2562.5	27.25	33.01	H	Pass
10MHz 16QAM	/	793	27.62	33.01	H	Pass

**LTE FDD Band 26 ( 814~824 )**


Bandwidth	Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Polarization	Conclusion
1.4MHz QPSK	Low	814.7	27.16	38.45	H	Pass
	Mid	819	27.34	38.45	H	Pass
	High	823.3	27.57	38.45	H	Pass
3MHz QPSK	Low	815.5	27.62	38.45	H	Pass
	Mid	819	27.42	38.45	H	Pass
	High	822.5	27.82	38.45	H	Pass
5MHz QPSK	Low	816.5	27.92	38.45	H	Pass
	Mid	819	27.82	38.45	H	Pass
	High	821.5	27.26	38.45	H	Pass
10MHz QPSK	/	819.0	27.42	38.45	H	Pass
1.4MHz 16QAM	Low	814.7	27.92	38.45	H	Pass
	Mid	819	27.72	38.45	H	Pass
	High	823.3	27.62	38.45	H	Pass
3MHz 16QAM	Low	815.5	27.72	38.45	H	Pass
	Mid	819	27.25	38.45	H	Pass
	High	822.5	26.42	38.45	H	Pass
5MHz 16QAM	Low	816.5	27.62	38.45	H	Pass
	Mid	819	26.42	38.45	H	Pass
	High	821.5	26.51	38.45	H	Pass
10MHz 16QAM	/	819.0	26.42	38.45	H	Pass

### 3.2. Peak-to-Average Ratio (PAR)

#### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### TEST CONFIGURATION

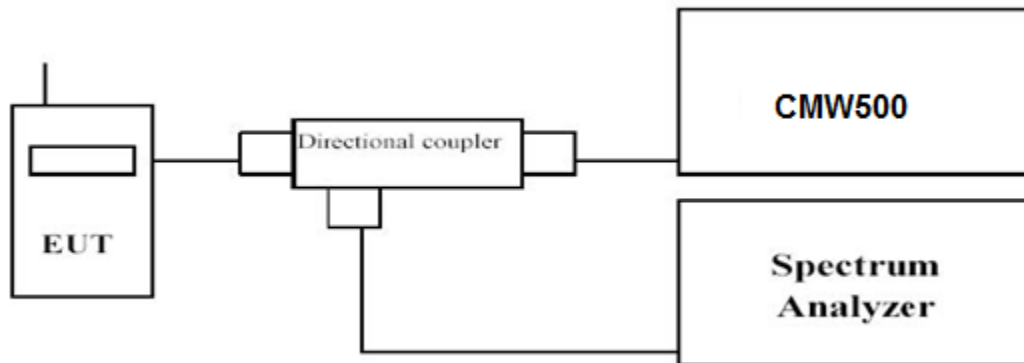

#### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

#### TEST RESULTS


1. Please refer to Appendix J: Section .5
2. Please refer to Appendix N: Section .5

### 3.3. Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

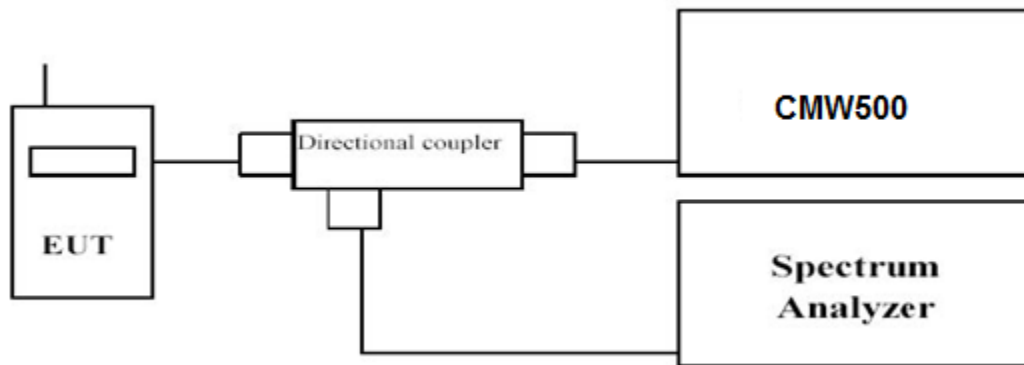

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

1. Please refer to Appendix J: Section .3
2. Please refer to Appendix N: Section .3



### 3.4. Band Edge compliance


#### Method Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v03 Section 6.0

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.  
RBW is set to 10kHz, VBW is set to 30 kHz for LTE Band 14 (769MHz~775MHz).  
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band14 (775MHz~788MHz).  
RBW is set to 10kHz, VBW is set to 30 kHz for LTE Band 14 (799MHz~805MHz).
3. Set spectrum analyzer with RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. Checked that all the results comply with the emission limit line.

#### TEST CONFIGURATION

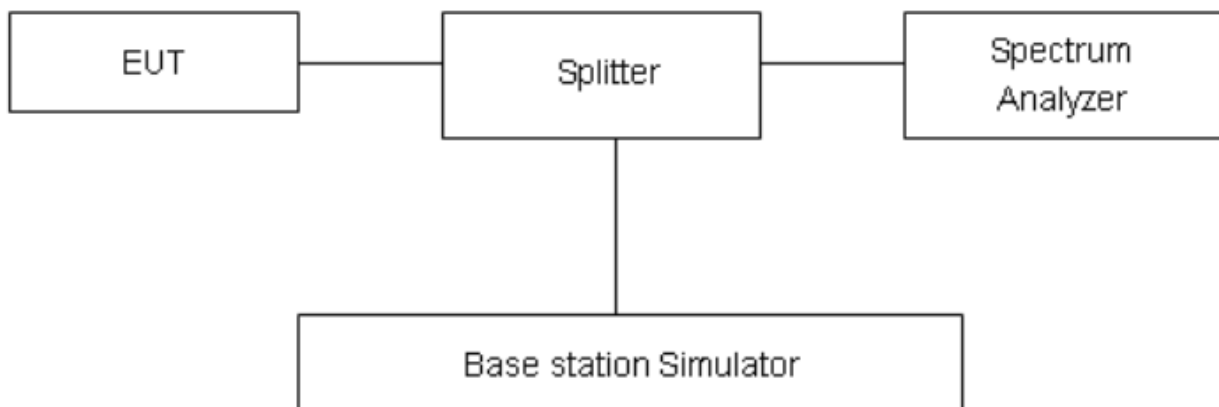

#### Limits

90.543 Emission limitations (e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.



(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

## **TEST RESULTS**

1. Please refer to Appendix J: Section .6
2. Please refer to Appendix N: Section .6

### 3.5. Spurious Emission


#### LIMIT

(1) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB. The limit of emission equal to  $-13$  dBm


(2) For operations in the 763–775 MHz and 793–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

#### TEST CONFIGURATION

Conducted Spurious Measurement:

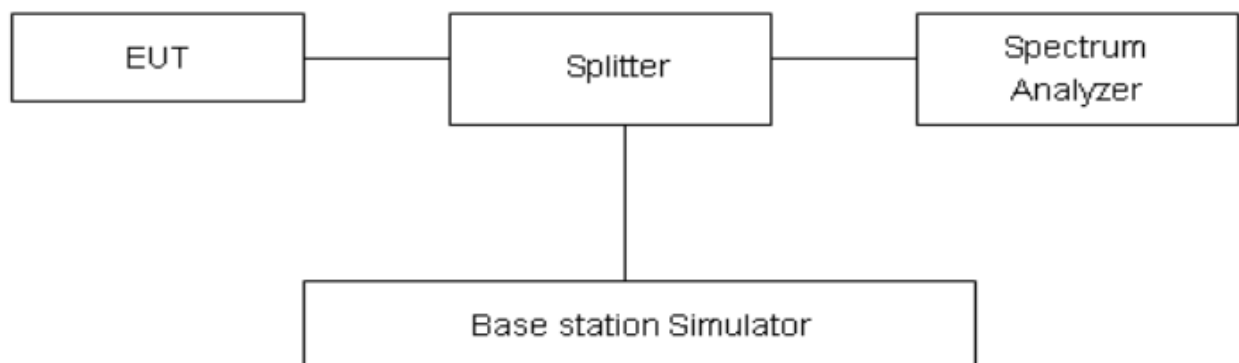

Radiated Spurious Measurement:

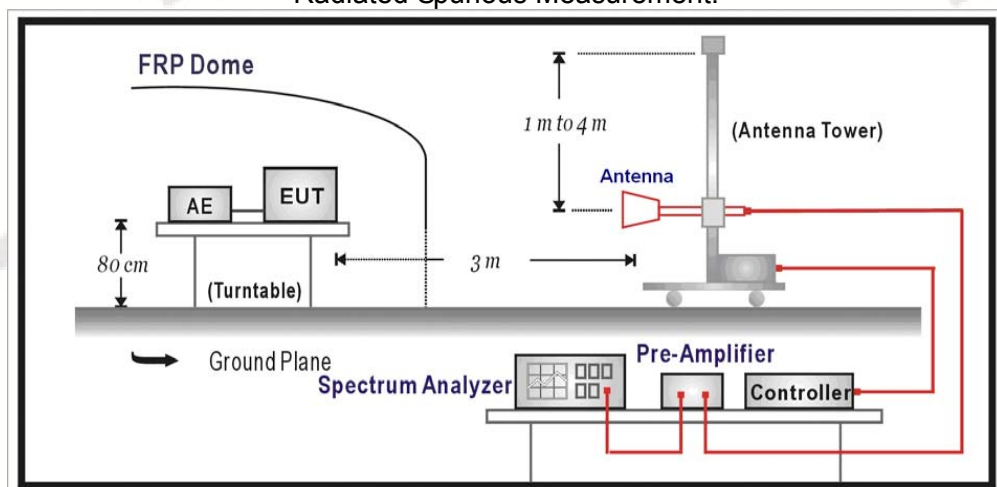

**TEST PROCEDURE**

The EUT was setup according to EIA/TIA 603D

**Conducted Spurious Measurement:**

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500 then selects a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

**Radiated Spurious Measurement:**

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.

**TEST RESULTS****Conducted Measurement:**

1. Please refer to Appendix J: Section .6
2. Please refer to Appendix N: Section .6

**Radiated Measurement:**

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 14 and FDD Band 26 @ QPSK

2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$

3. We were not recorded other points as values lower than limits.

4.  $Margin = EIRP - Limit$

**LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK\_Low Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1581.0	-41.09	4.73	3.00	10.42	-35.40	-13.00	-22.40	H
2371.5	-47.87	5.64	3.00	12.30	-41.21	-13.00	-28.21	H
1581.0	-43.85	4.73	3.00	10.42	-38.16	-13.00	-25.16	V
2371.5	-50.37	5.64	3.00	12.30	-43.71	-13.00	-30.71	V

**LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1586.0	-40.05	4.75	3.00	10.44	-34.36	-13.00	-21.36	H
2379.0	-44.39	5.66	3.00	12.33	-37.72	-13.00	-24.72	H
1586.0	-43.97	4.75	3.00	10.44	-38.28	-13.00	-25.28	V
2379.0	-47.88	5.66	3.00	12.33	-41.21	-13.00	-28.21	V

**LTE FDD Band 14\_Channel Bandwidth 5MHz\_QPSK\_High Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1591.0	-39.87	4.75	3.00	10.44	-34.18	-13.00	-21.18	H
2386.5	-44.38	5.66	3.00	12.33	-37.71	-13.00	-24.71	H
1591.0	-43.82	4.75	3.00	10.44	-38.13	-13.00	-25.13	V
2386.5	-47.90	5.66	3.00	12.33	-41.23	-13.00	-28.23	V

**LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_QPSK\_Middle Channel**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673	-41.28	5.95	3.00	9.98	-37.25	-13.00	-24.25	H
2509.5	-46.95	6.63	3.00	11.66	-41.92	-13.00	-28.92	H
1673	-43.85	5.95	3.00	9.98	-39.82	-13.00	-26.82	V
2509.5	-49.35	6.63	3.00	11.66	-44.32	-13.00	-31.32	V

*LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-40.80	4.74	3.00	10.45	-35.09	-13.00	-22.09	H
2544.9	-46.62	5.65	3.00	12.32	-39.95	-13.00	-26.95	H
1696.6	-44.42	4.74	3.00	10.45	-38.71	-13.00	-25.71	V
2544.9	-50.00	5.65	3.00	12.32	-43.33	-13.00	-30.33	V

*LTE FDD Band 26\_Channel Bandwidth 3MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651	-39.61	4.74	3.00	10.45	-33.90	-13.00	-20.90	H
2476.5	-46.79	5.65	3.00	12.32	-40.12	-13.00	-27.12	H
1651	-42.97	4.74	3.00	10.45	-37.26	-13.00	-24.26	V
2476.5	-47.52	5.65	3.00	12.32	-40.85	-13.00	-27.85	V

*LTE FDD Band 26\_Channel Bandwidth 3MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673	-40.97	4.62	3.00	9.81	-35.78	-13.00	-22.78	H
2509.5	-47.48	5.94	3.00	10.86	-42.56	-13.00	-29.56	H
1673	-43.76	4.62	3.00	9.81	-38.57	-13.00	-25.57	V
2509.5	-50.33	5.94	3.00	10.86	-45.41	-13.00	-32.41	V

*LTE FDD Band 26\_Channel Bandwidth 3MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695	-39.91	4.63	3.00	9.84	-34.70	-13.00	-21.70	H
2542.5	-47.02	5.94	3.00	10.86	-42.10	-13.00	-29.10	H
1695	-43.14	4.63	3.00	9.84	-37.93	-13.00	-24.93	V
2542.5	-47.67	5.94	3.00	10.86	-42.75	-13.00	-29.75	V

*LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653	-40.94	4.65	3.00	9.90	-35.69	-13.00	-22.69	H
2479.5	-47.17	5.95	3.00	10.91	-42.21	-13.00	-29.21	H
1653	-43.86	4.65	3.00	9.90	-38.61	-13.00	-25.61	V
2479.5	-49.40	5.95	3.00	10.91	-44.44	-13.00	-31.44	V

*LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673	-41.08	4.62	3.00	9.81	-35.89	-13.00	-22.89	H
2509.5	-47.24	5.94	3.00	10.86	-42.32	-13.00	-29.32	H
1673	-43.96	4.62	3.00	9.81	-38.77	-13.00	-25.77	V
2509.5	-50.18	5.94	3.00	10.86	-45.26	-13.00	-32.26	V



*LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693	-41.13	3.00	3.00	9.77	-34.36	-13.00	21.36	H
2539.5	-46.20	3.03	3.00	10.89	-38.34	-13.00	25.34	H
1693	-40.15	3.00	3.00	9.77	-33.38	-13.00	20.38	V
2539.5	-45.65	3.03	3.00	10.89	-37.79	-13.00	24.79	V

*LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658	-40.02	4.63	3.00	9.84	-34.81	-13.00	-21.81	H
2487	-46.92	5.94	3.00	10.86	-42.00	-13.00	-29.00	H
1658	-43.33	4.63	3.00	9.84	-38.12	-13.00	-25.12	V
2487	-47.40	5.94	3.00	10.86	-42.48	-13.00	-29.48	V

*LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673	-40.96	4.65	3.00	9.90	-35.71	-13.00	-22.71	H
2509.5	-47.07	5.95	3.00	10.91	-42.11	-13.00	-29.11	H
1673	-43.65	4.65	3.00	9.90	-38.40	-13.00	-25.40	V
2509.5	-49.38	5.95	3.00	10.91	-44.42	-13.00	-31.42	V

*LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK\_High Channel*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Distance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688	-41.21	4.62	3.00	9.81	-36.02	-13.00	-23.02	H
2532	-47.32	5.94	3.00	10.86	-42.40	-13.00	-29.40	H
1688	-43.70	4.62	3.00	9.81	-38.51	-13.00	-25.51	V
2532	-50.26	5.94	3.00	10.86	-45.34	-13.00	-32.34	V

### 3.6. Frequency Stability under Temperature & Voltage Variations

#### LIMIT

90.539 (c) The frequency stability of mobile, portable, and control transmitters operating in the narrowband segment must be 400 parts per billion or better when AFC is locked to the base station. When AFC is not locked to the base station, the frequency stability must be at least 1.0 ppm for 6.25 kHz, 1.5 ppm for 12.5 kHz (2 channel aggregate), and 2.5 ppm for 25 kHz (4 channel aggregate).

#### TEST CONFIGURATION

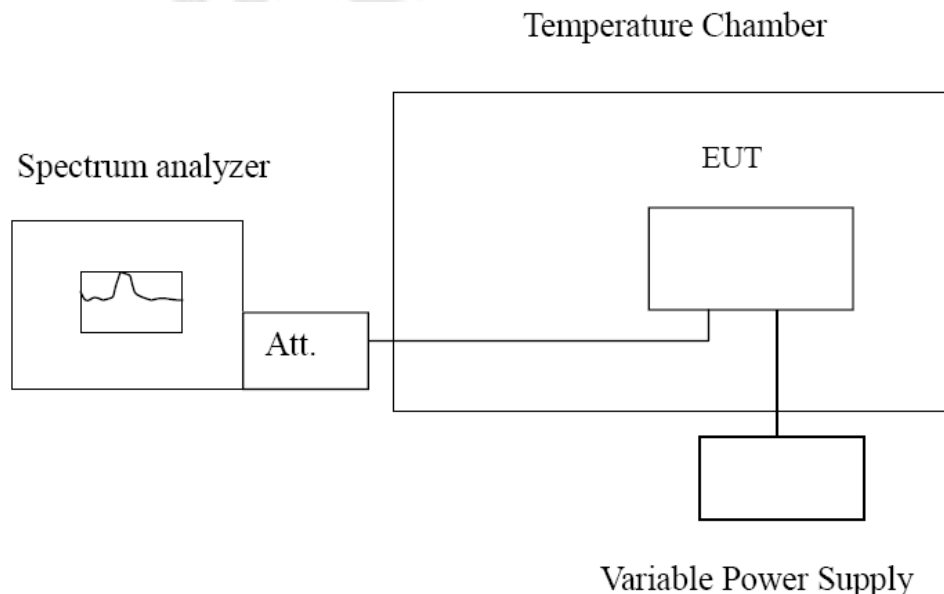

#### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Frequency Stability under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Band 5, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

##### **Frequency Stability under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the



desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

**TEST RESULTS**

1. Please refer to Appendix J: Section .2
2. Please refer to Appendix N: Section .2

### 3.7. Modulation Characteristics

#### Standard Applicable

#### **According to FCC Part 2 §2.1047:**

(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

(c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.

(d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

#### **TEST RESULTS**

1. Please refer to Appendix J: Section .3
2. Please refer to Appendix N: Section .3

#### 4. Test Setup Photos of the EUT



## 5. External and Internal Photos of the EUT

Reference to the test report No. CTL2106018081-W01

\*\*\*\*\* End of Report \*\*\*\*\*