



# FCC RF Test Report

APPLICANT : Zhejiang Rexense IoT Technology Co., Ltd.  
EQUIPMENT : 2.4G Zigbee Module  
BRAND NAME : REXENSE  
MODEL NAME : REX3PT581  
FCC ID : 2AOE2REX3PT581  
STANDARD : 47 CFR Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System  
TEST DATE(S) : Jul. 18, 2023 ~ Aug. 07, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



# TABLE OF CONTENTS

- 1 GENERAL DESCRIPTION..... 5**
  - 1.1 Applicant ..... 5
  - 1.2 Manufacturer ..... 5
  - 1.3 Product Feature of Equipment Under Test..... 5
  - 1.4 Product Specification of Equipment Under Test..... 5
  - 1.5 Modification of EUT ..... 5
  - 1.6 Testing Location ..... 6
  - 1.7 Test Software..... 6
  - 1.8 Applicable Standards..... 6
- 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**
  - 2.1 Carrier Frequency Channel ..... 7
  - 2.2 Test Mode ..... 7
  - 2.3 Connection Diagram of Test System ..... 8
  - 2.4 Support Unit used in test configuration and system ..... 9
  - 2.5 EUT Operation Test Setup ..... 9
  - 2.6 Measurement Results Explanation Example..... 9
- 3 TEST RESULT ..... 10**
  - 3.1 6dB and 99% Bandwidth Measurement ..... 10
  - 3.2 Peak Output Power Measurement ..... 17
  - 3.3 Power Spectral Density Measurement ..... 18
  - 3.4 Conducted Band Edges and Spurious Emission Measurement ..... 25
  - 3.5 Spurious Emission Measurement in the Restricted Band ..... 33
  - 3.6 AC Conducted Emission Measurement..... 36
  - 3.7 Antenna Requirements..... 38
- 4 LIST OF MEASURING EQUIPMENT..... 39**
- 5 UNCERTAINTY OF EVALUATION..... 40**
- APPENDIX A. CONDUCTED TEST RESULTS**
- APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**
- APPENDIX C. RADIATED SPURIOUS EMISSION**
- APPENDIX D. DUTY CYCLE PLOTS**
- APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.56 dB at 4960.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.08 dB at 0.187 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Zhejiang Rexense IoT Technology Co., Ltd.

6th Floor, Building 4, No.6, Longzhou Road, Yuhang District, Hangzhou, Zhejiang Province 310051 PRC

## 1.2 Manufacturer

Zhejiang Rexense IoT Technology Co., Ltd.

6th Floor, Building 4, No.6, Longzhou Road, Yuhang District, Hangzhou, Zhejiang Province 310051 PRC

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4G Zigbee Module
Brand Name	REXENSE
Model Name	REX3PT581
FCC ID	2AOE2REX3PT581
HW Version	V1
SW Version	V1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ..., 2480MHz
Maximum Output Power to Antenna	18.10 dBm (0.0646 W)
Antenna Type / Gain	PCB Antenna type with gain 1.27 dBi
Type of Modulation	O-QPSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480

### 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
<b>Conducted TCs</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH12_2410 MHz Mode 3: Zigbee Tx CH19_2445 MHz Mode 4: Zigbee Tx CH25_2475 MHz Mode 5: Zigbee Tx CH26_2480 MHz
<b>Radiated TCs</b>	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH12_2410 MHz Mode 3: Zigbee Tx CH19_2445 MHz Mode 4: Zigbee Tx CH25_2475 MHz Mode 5: Zigbee Tx CH26_2480 MHz
<b>AC Conducted Emission</b>	Mode 1: Zigbee Tx + Charging from Test Jig

## 2.3 Connection Diagram of Test System

Conducted Emission:

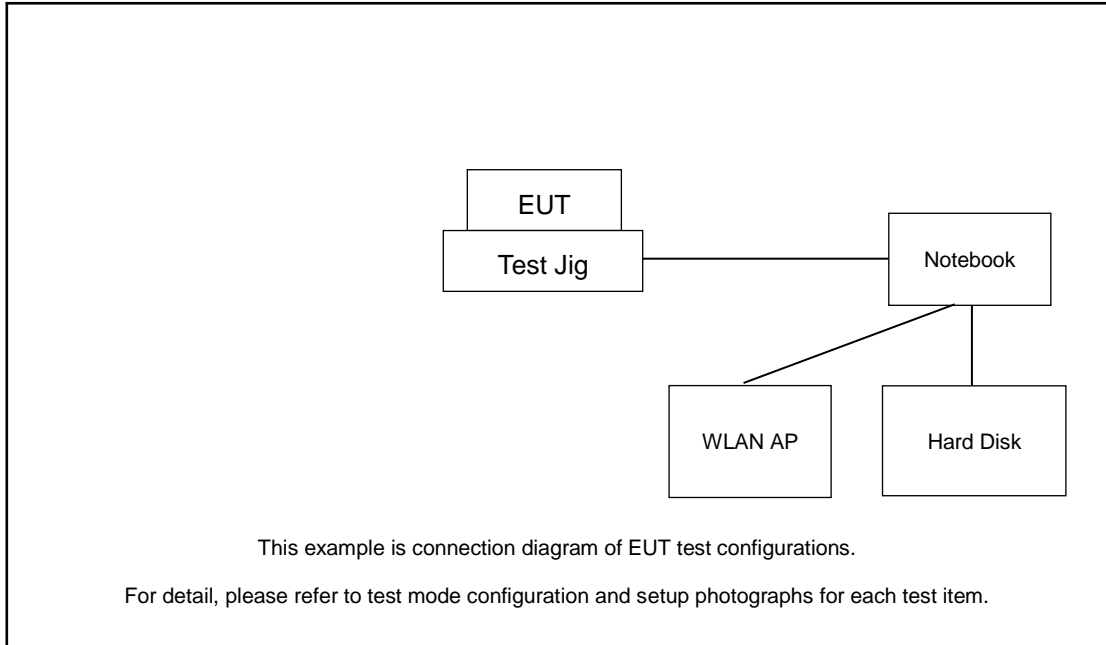

Radiated Emission:

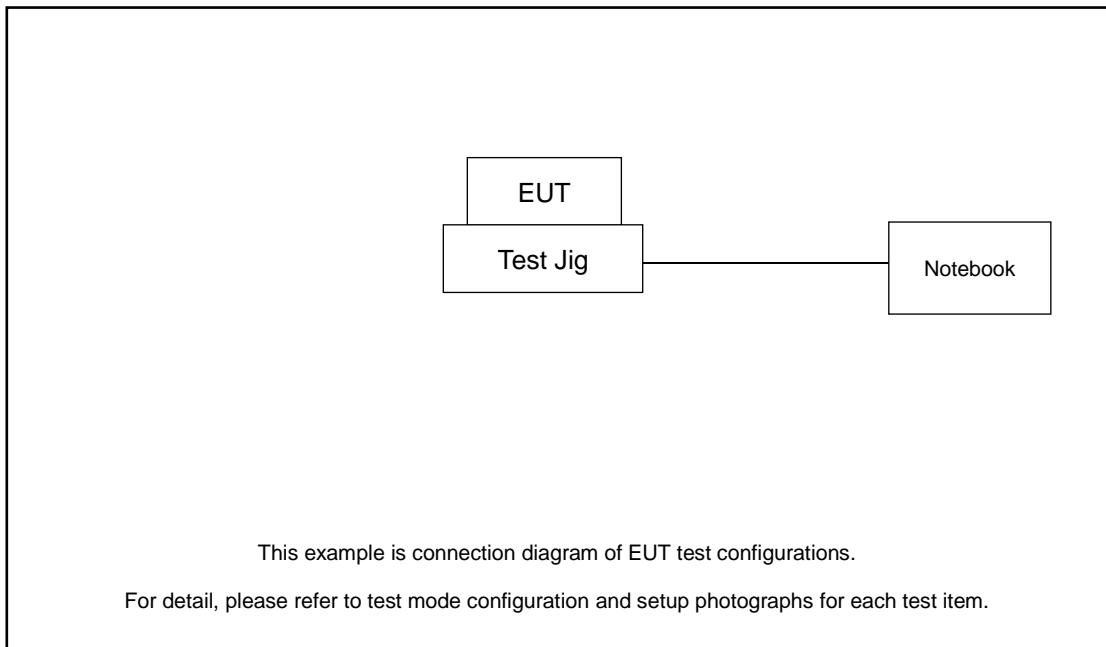



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For Zigbee function, the engineering test program was provided and enabled to make EUT continuous transmit.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB). \\ &= 5.5(dB) \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

#### 6 dB Bandwidth Plot on Channel 11

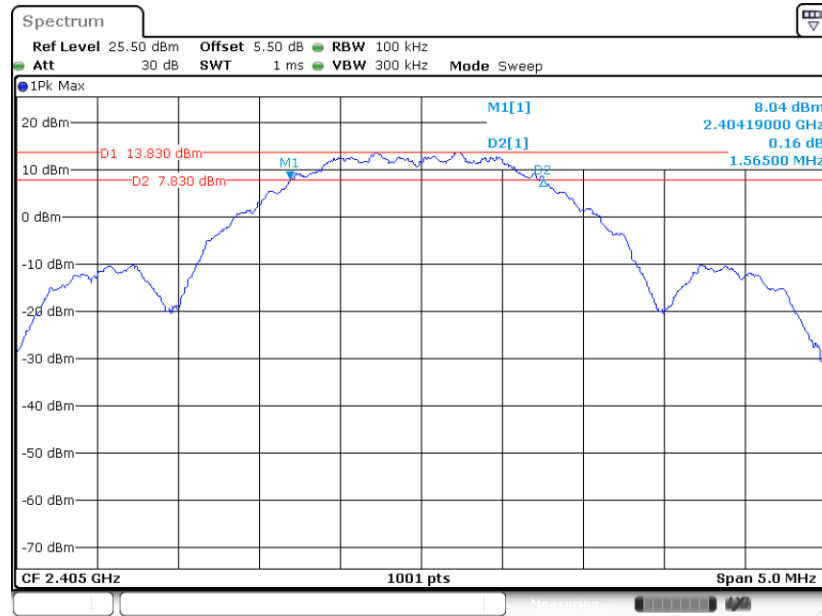

Date: 7.AUG.2023 09:27:19


#### 6 dB Bandwidth Plot on Channel 12

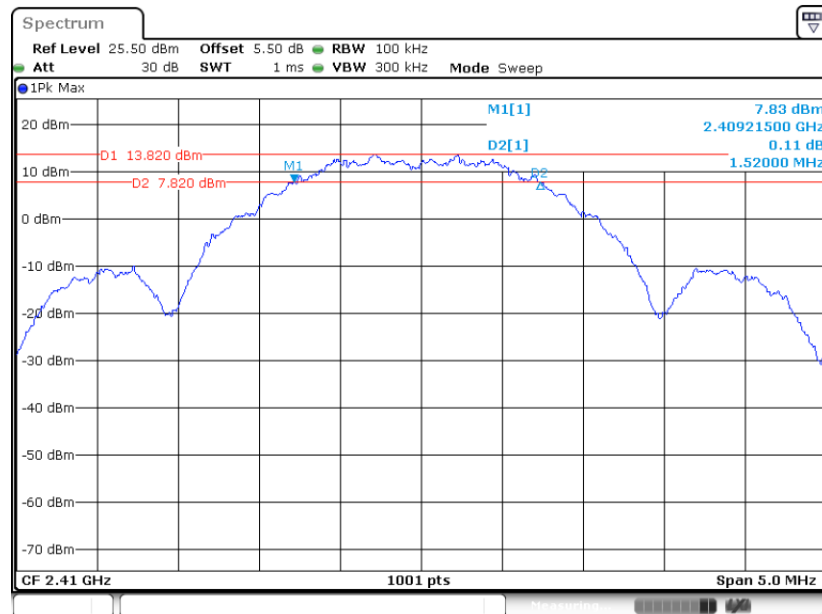

Date: 7.AUG.2023 09:33:10




### 6 dB Bandwidth Plot on Channel 19

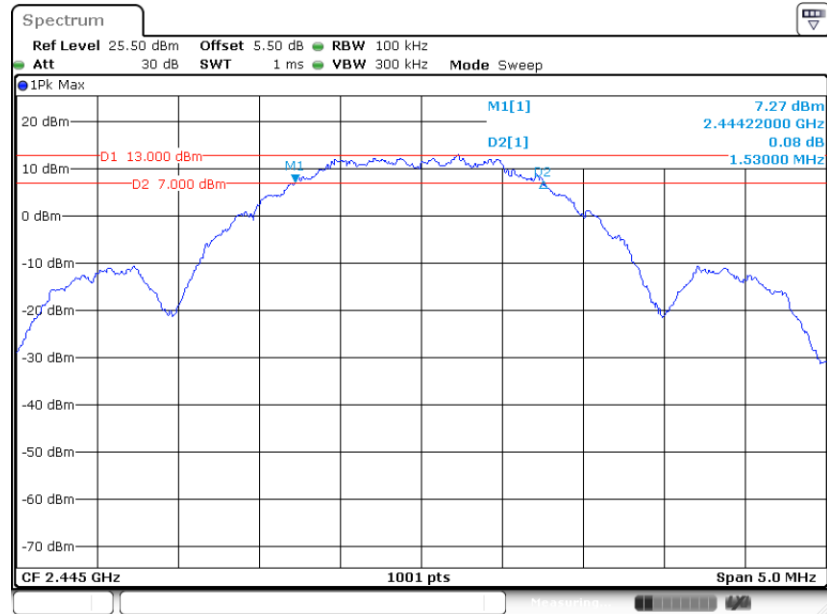

Date: 7.AUG.2023 09:40:14


### 6 dB Bandwidth Plot on Channel 25

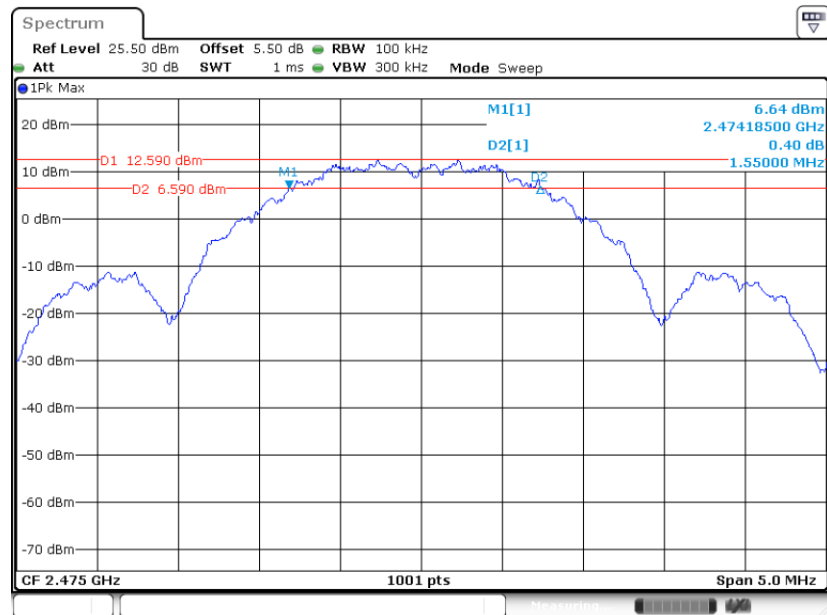

Date: 7.AUG.2023 09:42:42



6 dB Bandwidth Plot on Channel 26

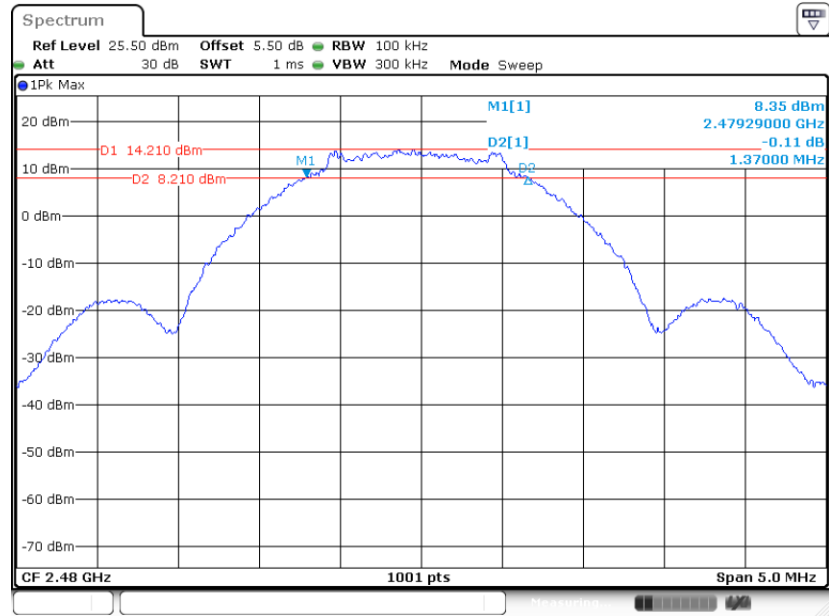


Date: 7.AUG.2023 09:48:59



### 3.1.6 Test Result of 99% Occupied Bandwidth


Test data refer to Appendix A.

#### 99% Bandwidth Plot on Channel 11

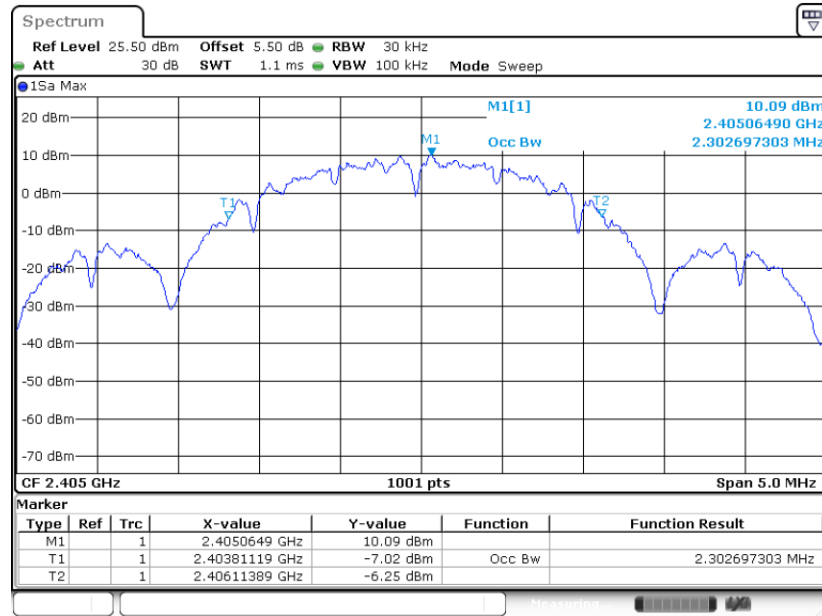

Date: 7.AUG.2023 09:29:05


#### 99% Bandwidth Plot on Channel 12

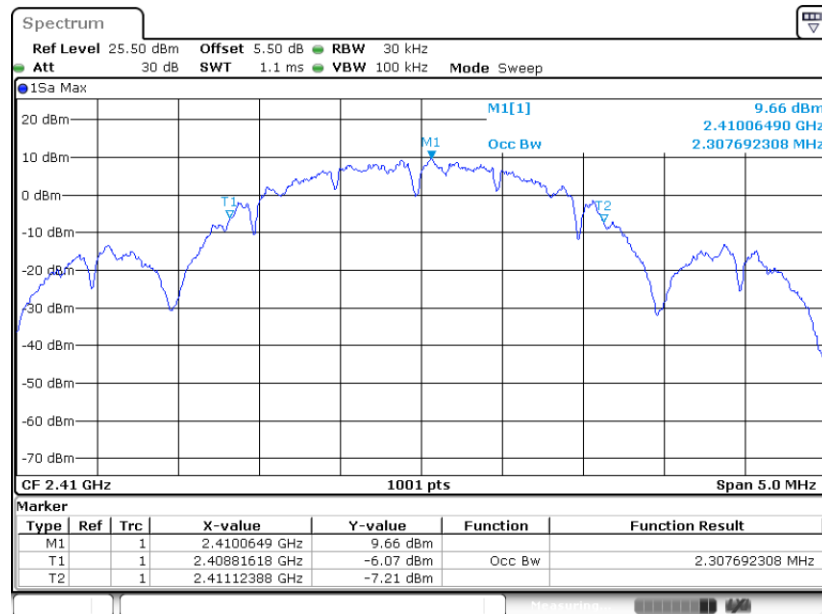

Date: 7.AUG.2023 09:34:56




99% Occupied Bandwidth Plot on Channel 19

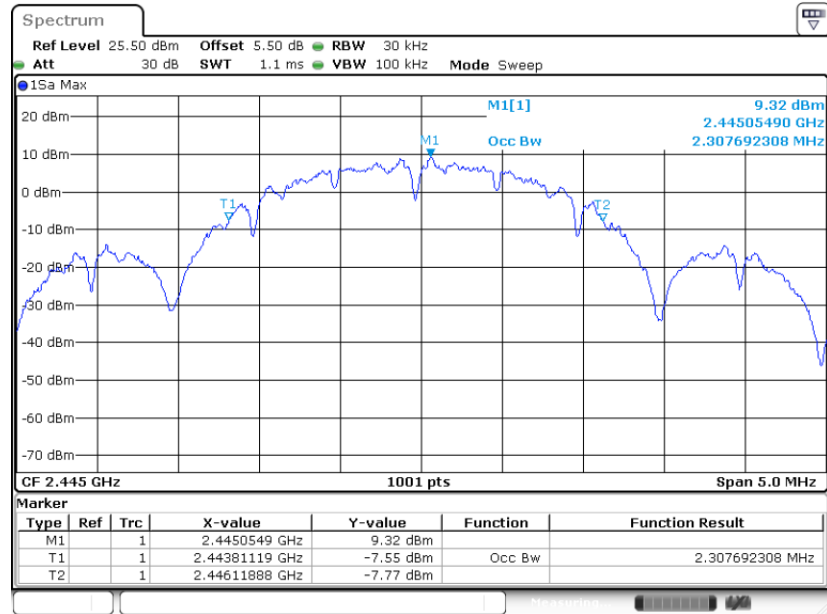

Date: 7.AUG.2023 09:41:41


99% Occupied Bandwidth Plot on Channel 25

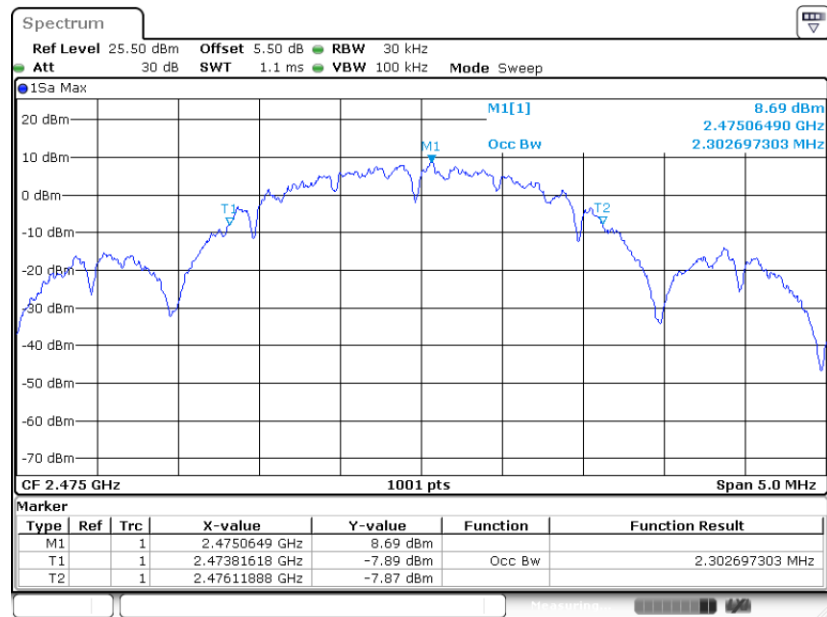

Date: 7.AUG.2023 09:44:29



99% Occupied Bandwidth Plot on Channel 26

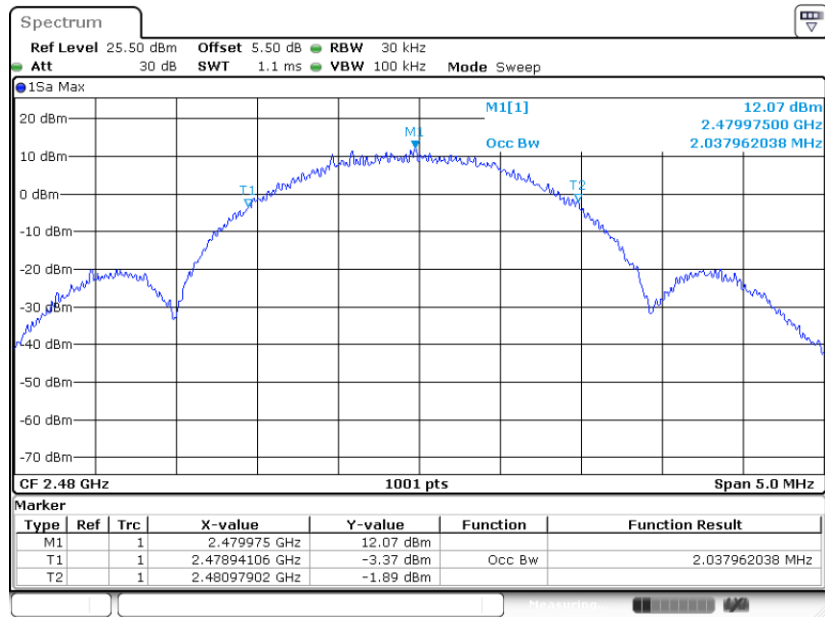

Date: 7.AUG.2023 09:50:46

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup



### 3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Test data refers to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

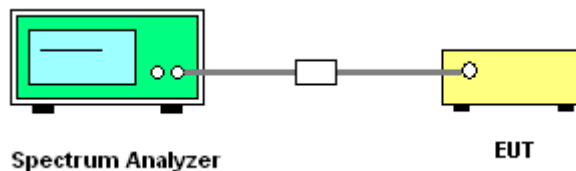


#### 3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.




### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

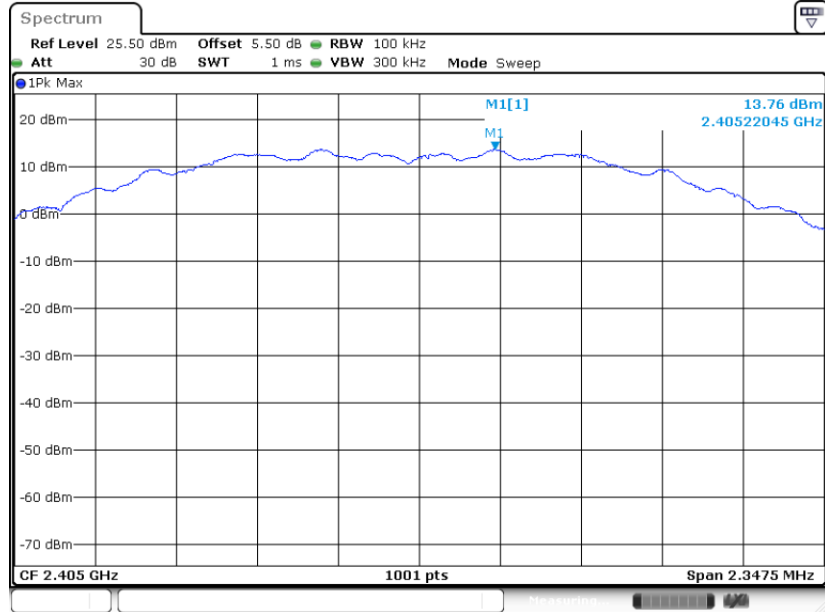

Date: 7.AUG.2023 09:27:56


PSD 100kHz Plot on Channel 12

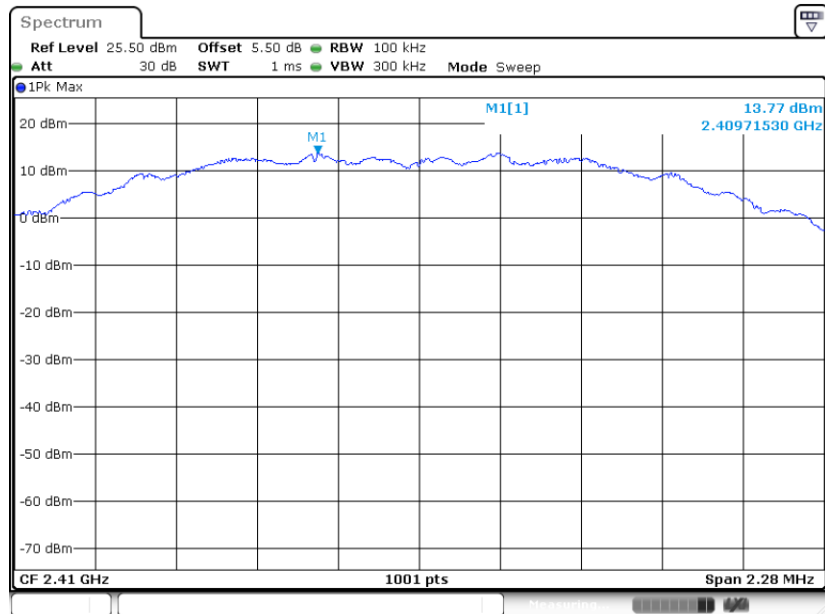

Date: 7.AUG.2023 09:33:48




PSD 100kHz Plot on Channel 19

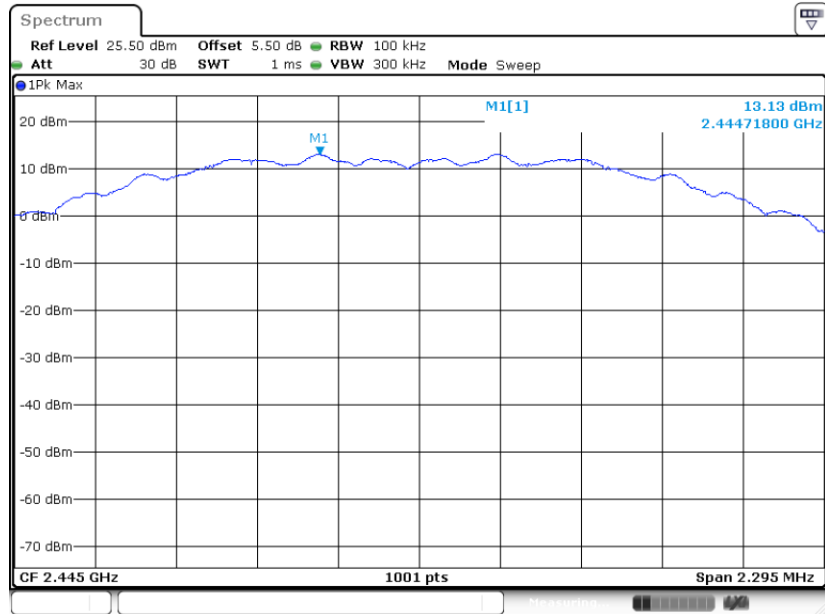

Date: 7.AUG.2023 09:40:51


PSD 100kHz Plot on Channel 25

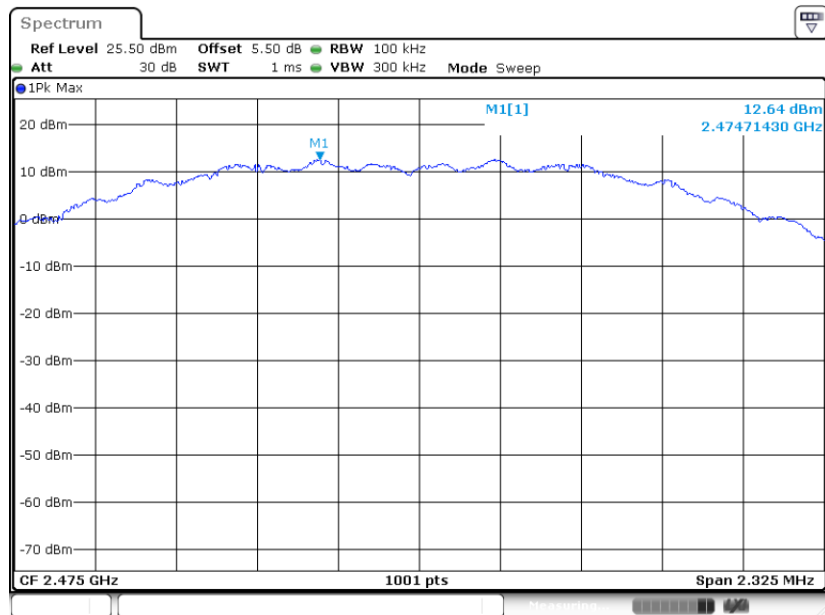

Date: 7.AUG.2023 09:43:21



PSD 100kHz Plot on Channel 26

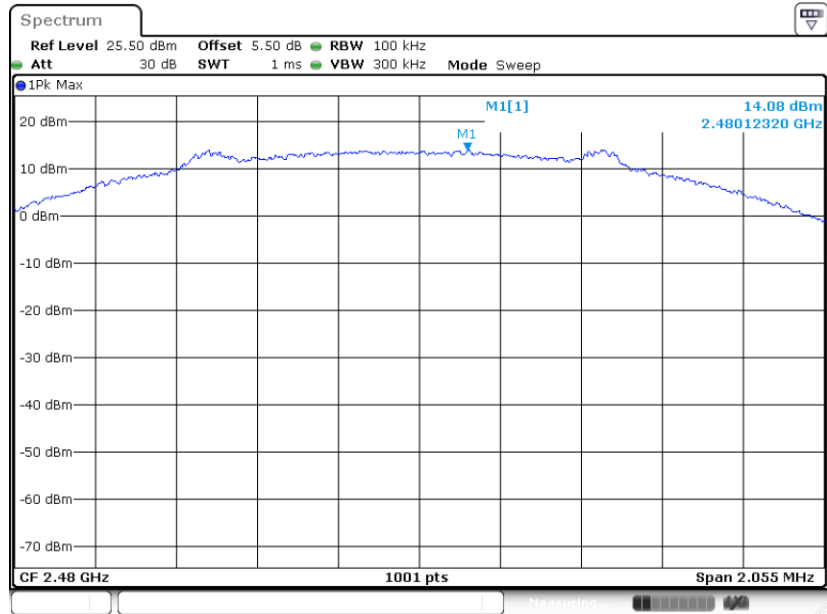


Date: 7.AUG.2023 09:49:37




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 11

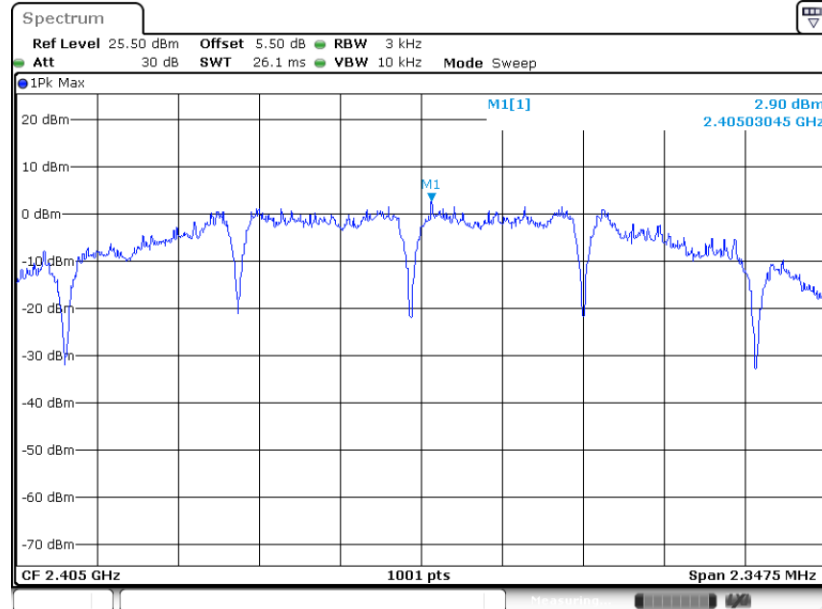

Date: 7.AUG.2023 09:27:38


PSD 3kHz Plot on Channel 12

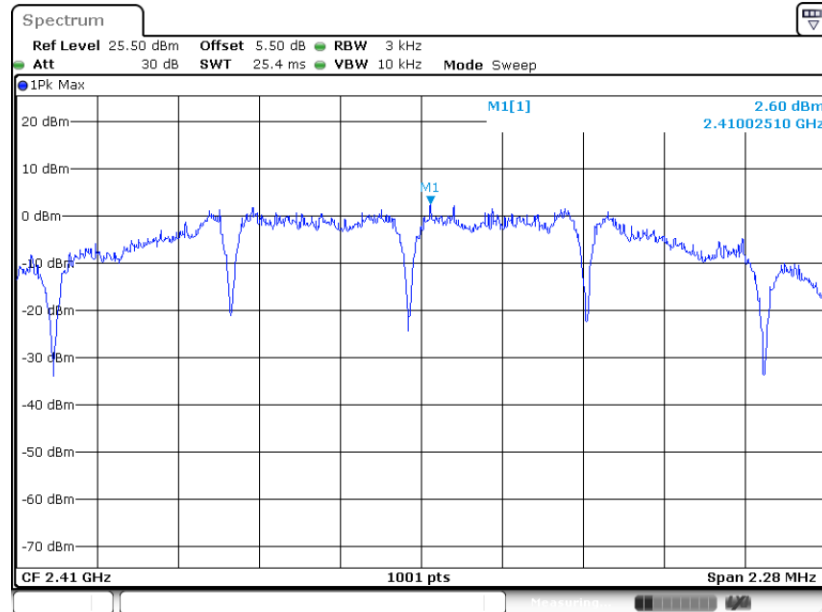

Date: 7.AUG.2023 09:33:29




PSD 3kHz Plot on Channel 19

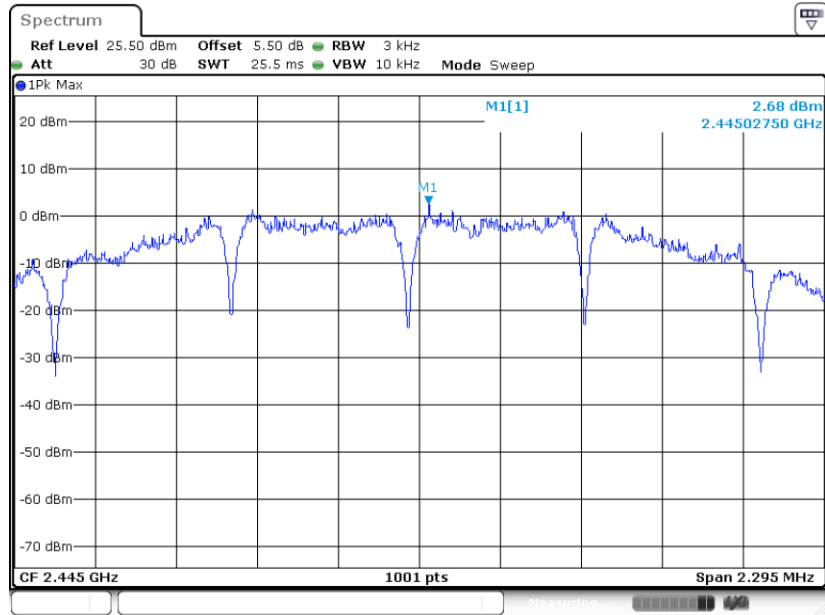

Date: 7.AUG.2023 09:40:32


PSD 3kHz Plot on Channel 25

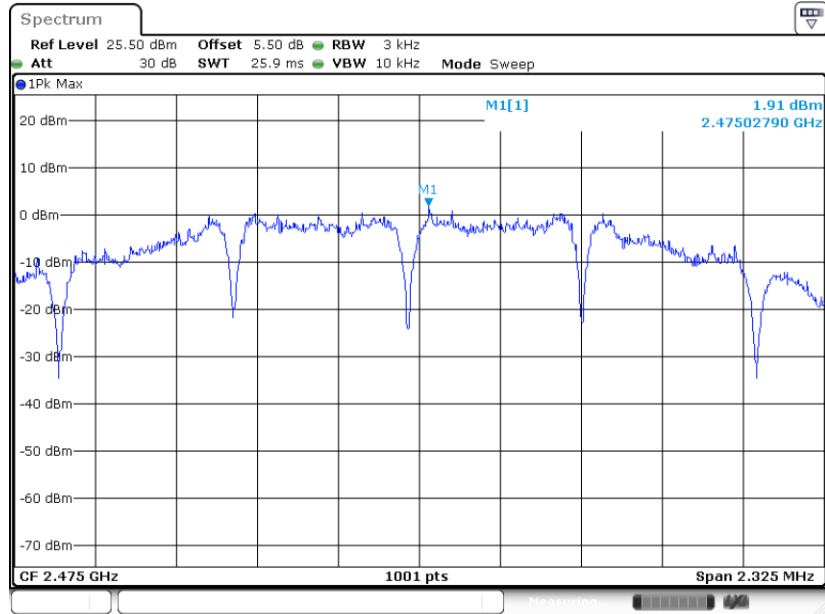

Date: 7.AUG.2023 09:43:01



PSD 3kHz Plot on Channel 26

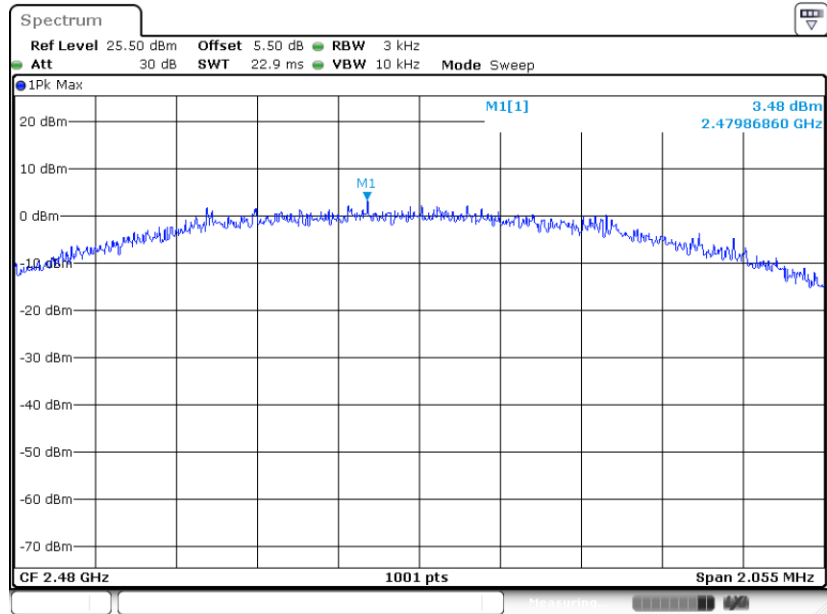

Date: 7.AUG.2023 09:49:18



### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


#### 3.4.4 Test Setup

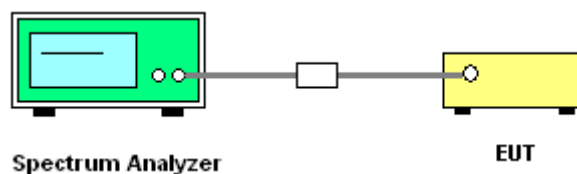




### 3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 11

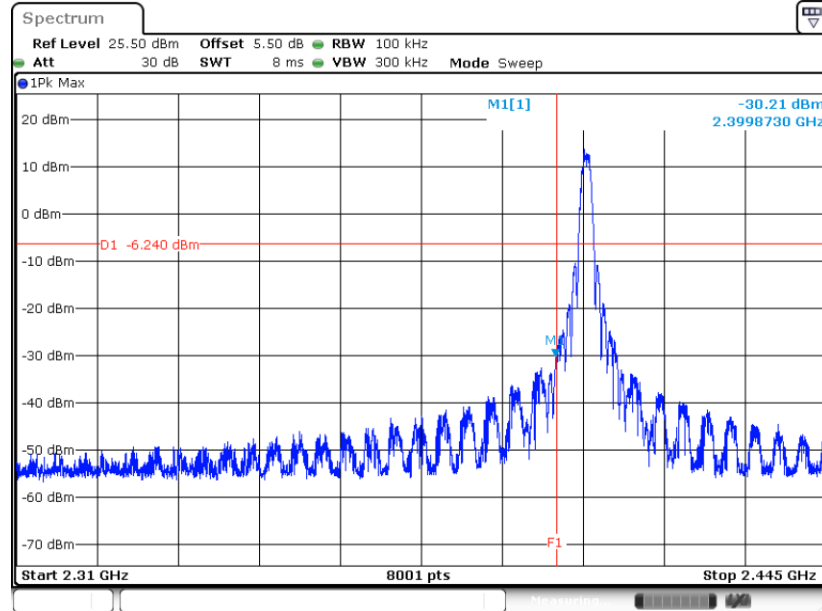

Date: 7.AUG.2023 09:28:15


Low Band Edge Plot on Channel 12

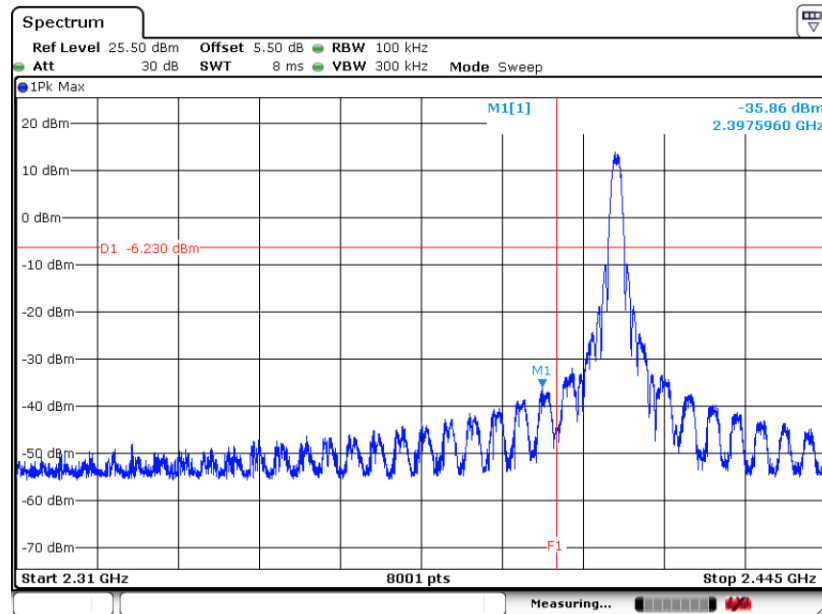

Date: 7.AUG.2023 09:38:07




### High Band Edge Plot on Channel 25

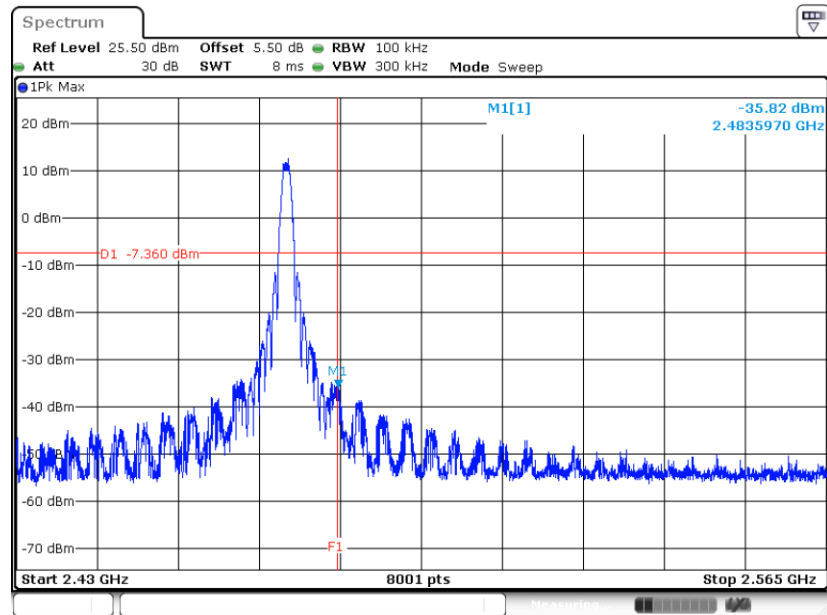

Date: 7.AUG.2023 09:45:14

### High Band Edge Plot on Channel 26

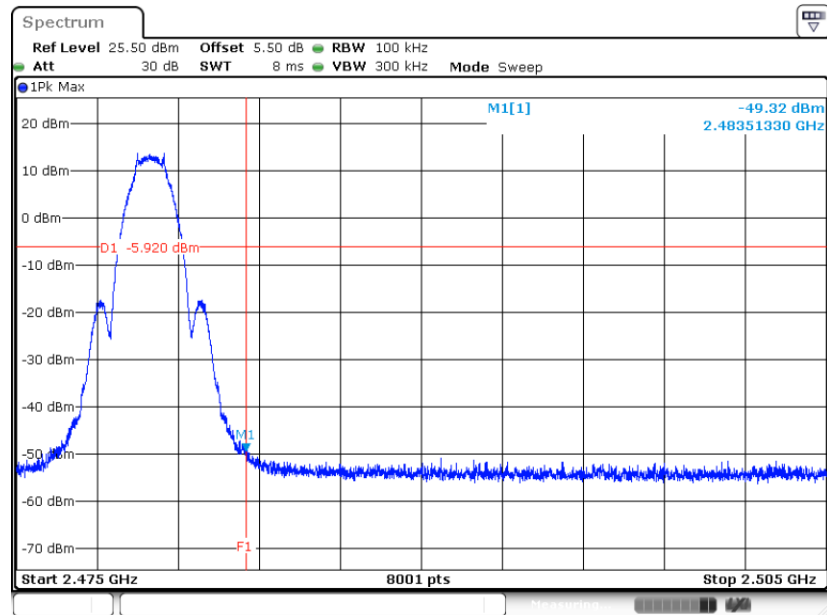


Date: 7.AUG.2023 09:49:56




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Zigbee Channel 11

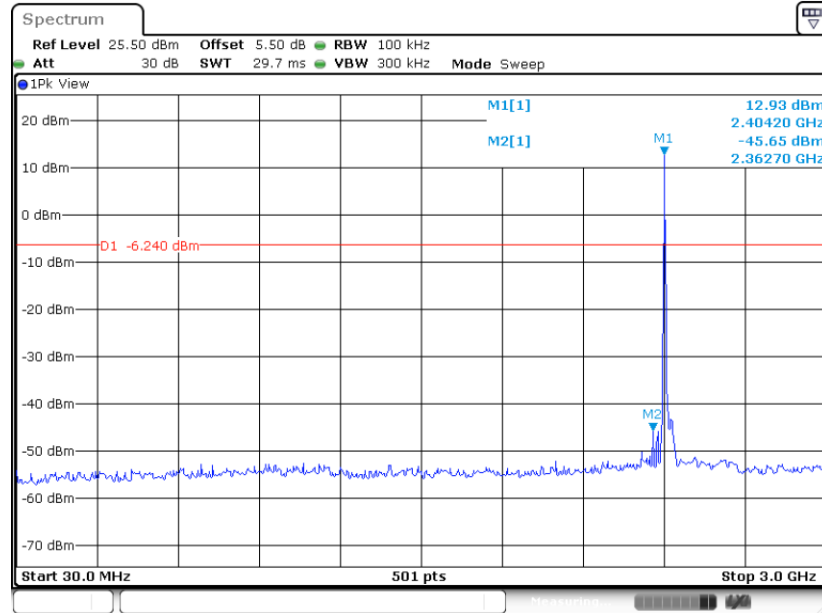

Date: 7.AUG.2023 09:28:36


#### Conducted Spurious Emission Plot on Zigbee Channel 11

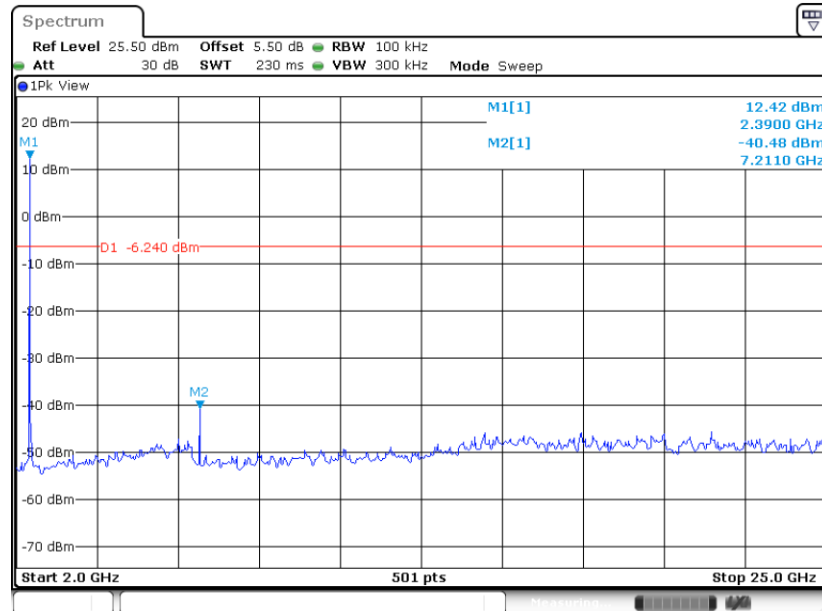

Date: 7.AUG.2023 09:28:56




Conducted Spurious Emission Plot on Zigbee Channel 12

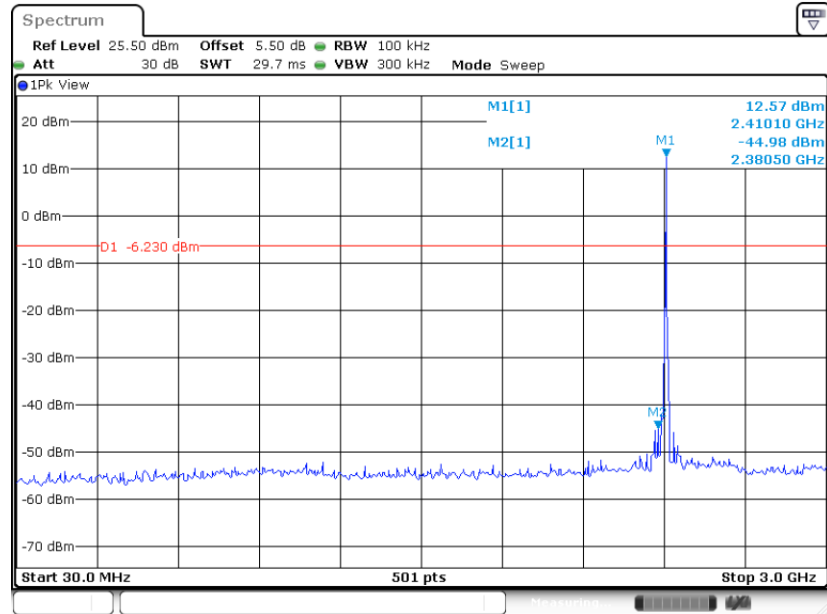

Date: 7.AUG.2023 09:34:27


Conducted Spurious Emission Plot on Zigbee Channel 12

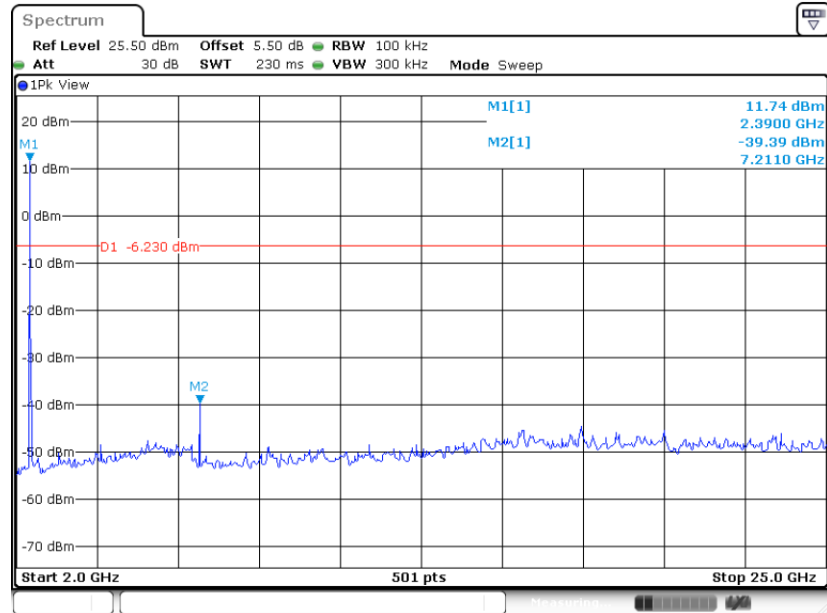

Date: 7.AUG.2023 09:34:47




Conducted Spurious Emission Plot on Zigbee Channel 19

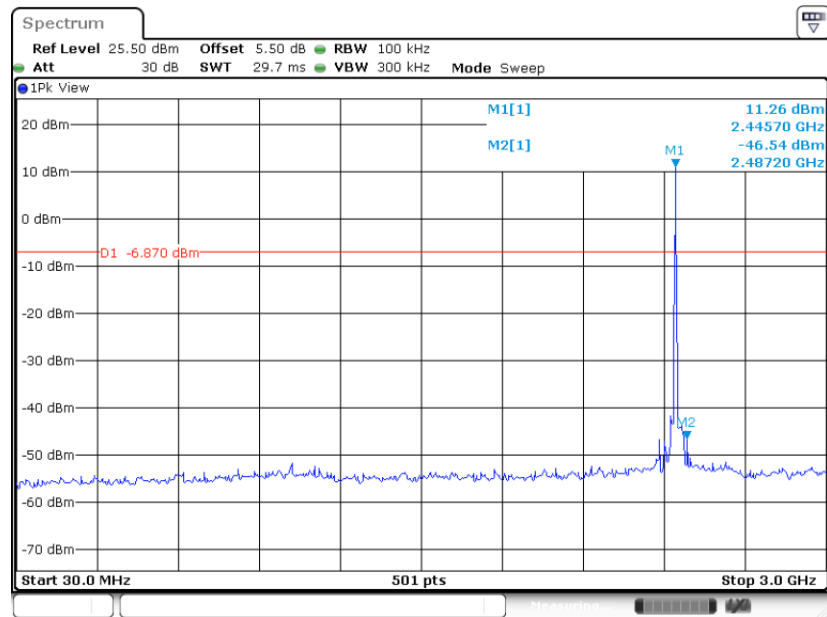

Date: 7.AUG.2023 09:41:12


Conducted Spurious Emission Plot on Zigbee Channel 19

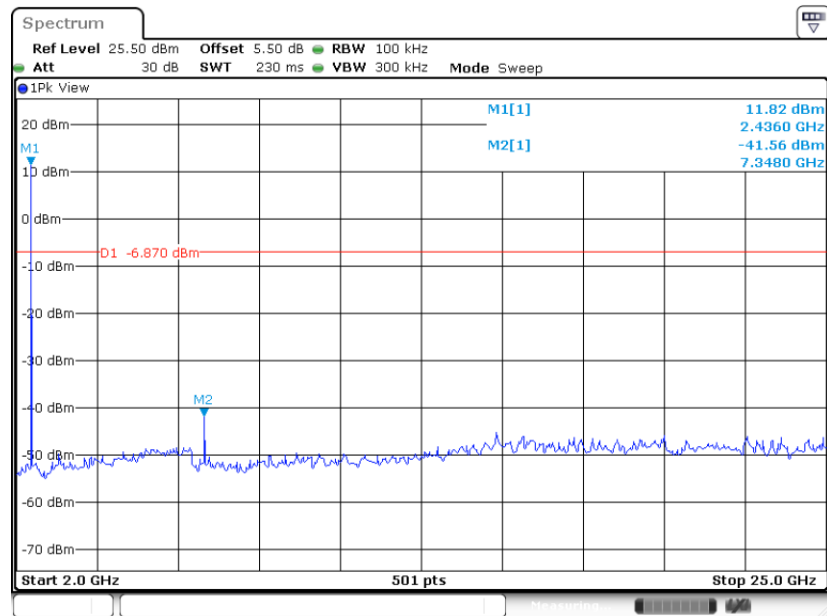

Date: 7.AUG.2023 09:41:32




Conducted Spurious Emission Plot on Zigbee Channel 25

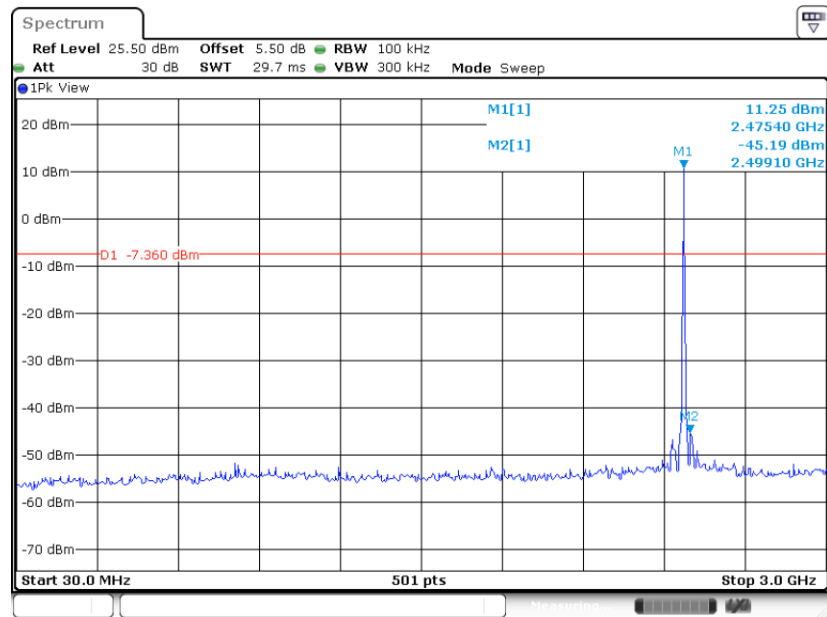

Date: 7.AUG.2023 09:44:00


Conducted Spurious Emission Plot on Zigbee Channel 25

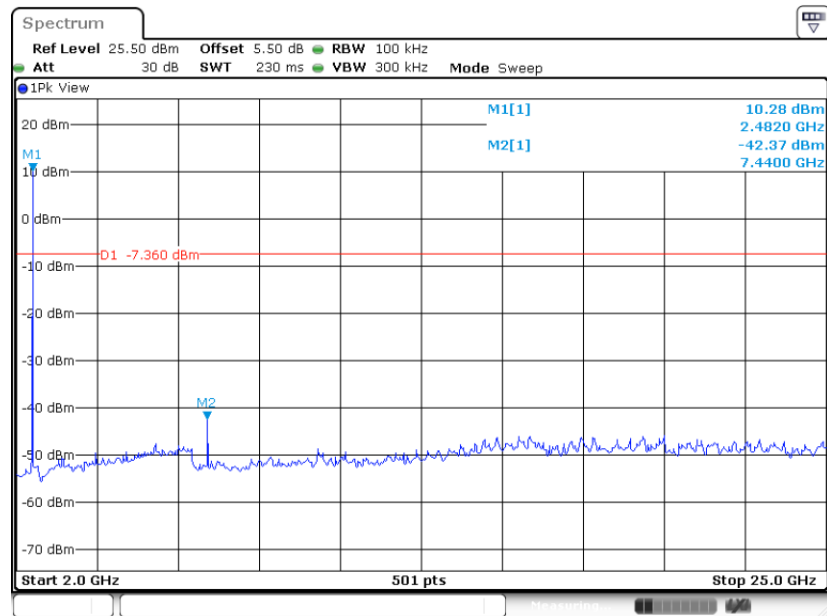

Date: 7.AUG.2023 09:44:20




### Conducted Spurious Emission Plot on Zigbee Channel 26

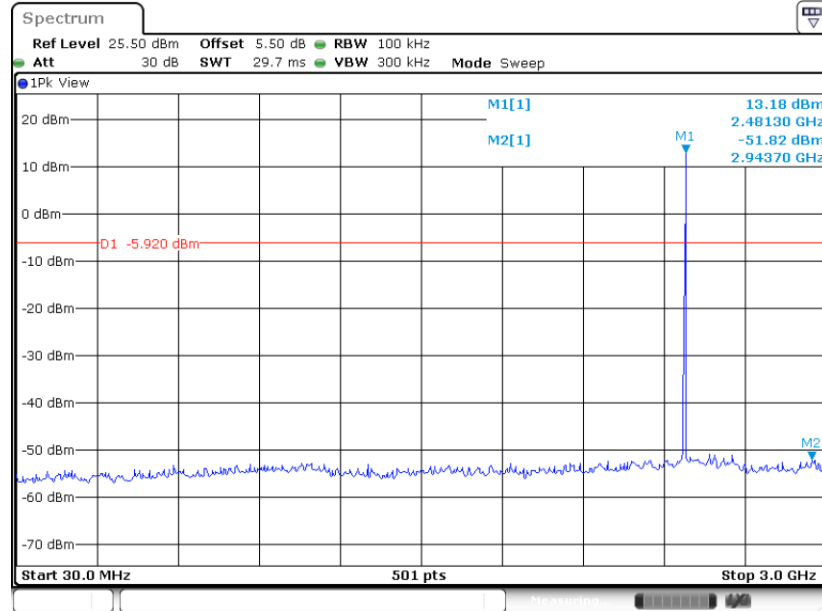

Date: 7.AUG.2023 09:50:17

### Conducted Spurious Emission Plot on Zigbee Channel 26

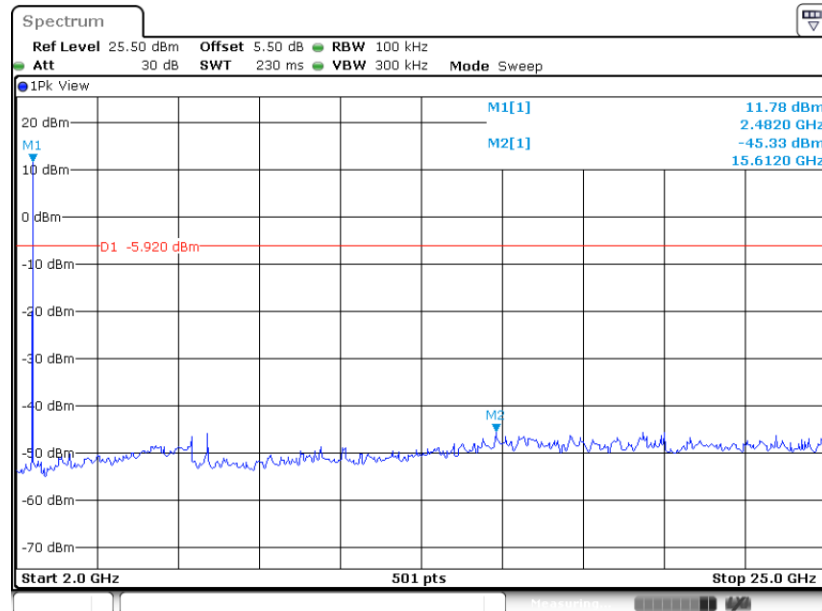

Date: 7.AUG.2023 09:50:37



### 3.5 Spurious Emission Measurement in the Restricted Band

#### 3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;

(2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;


(3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

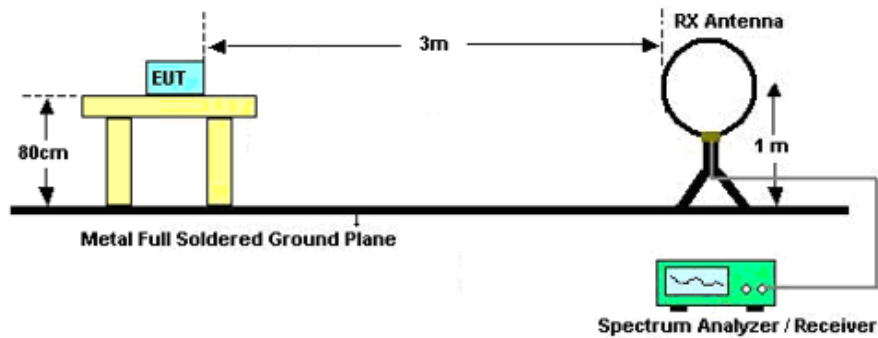

For radiated emissions from 30MHz to 1GHz

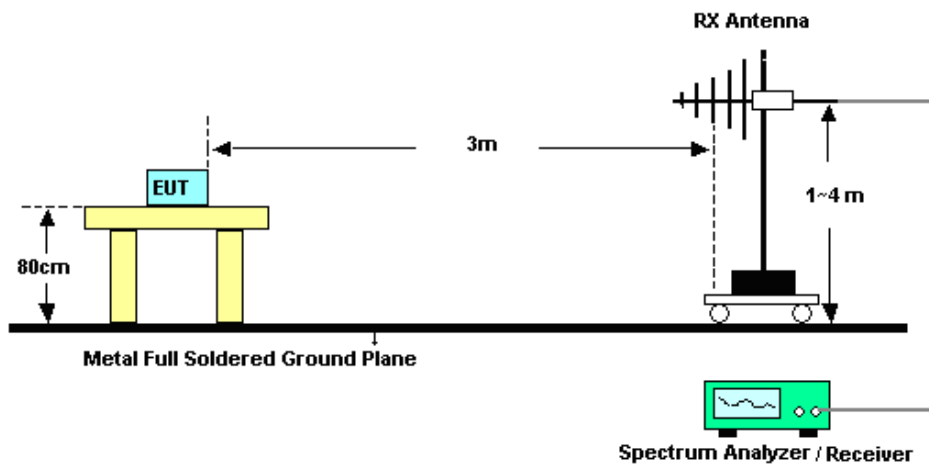

For radiated emissions above 1GHz

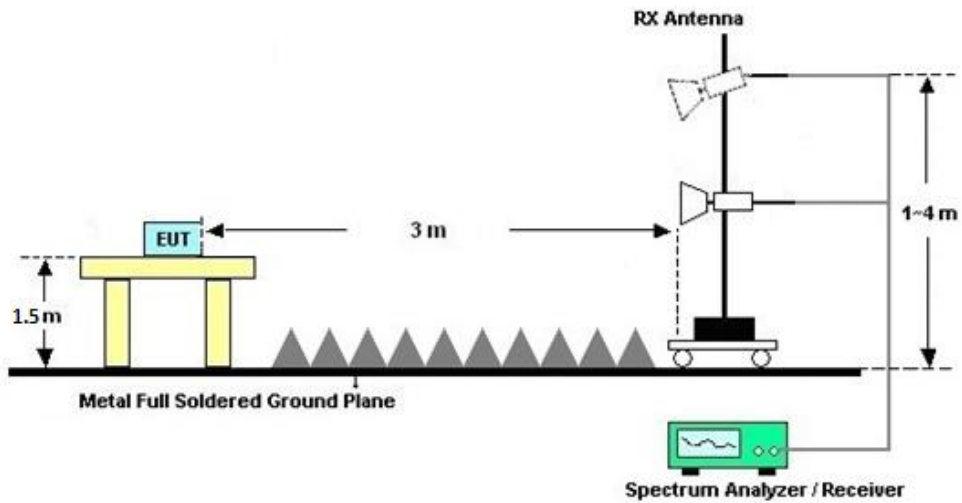

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

### 3.5.8 Duty Cycle

Please refer to Appendix D.

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

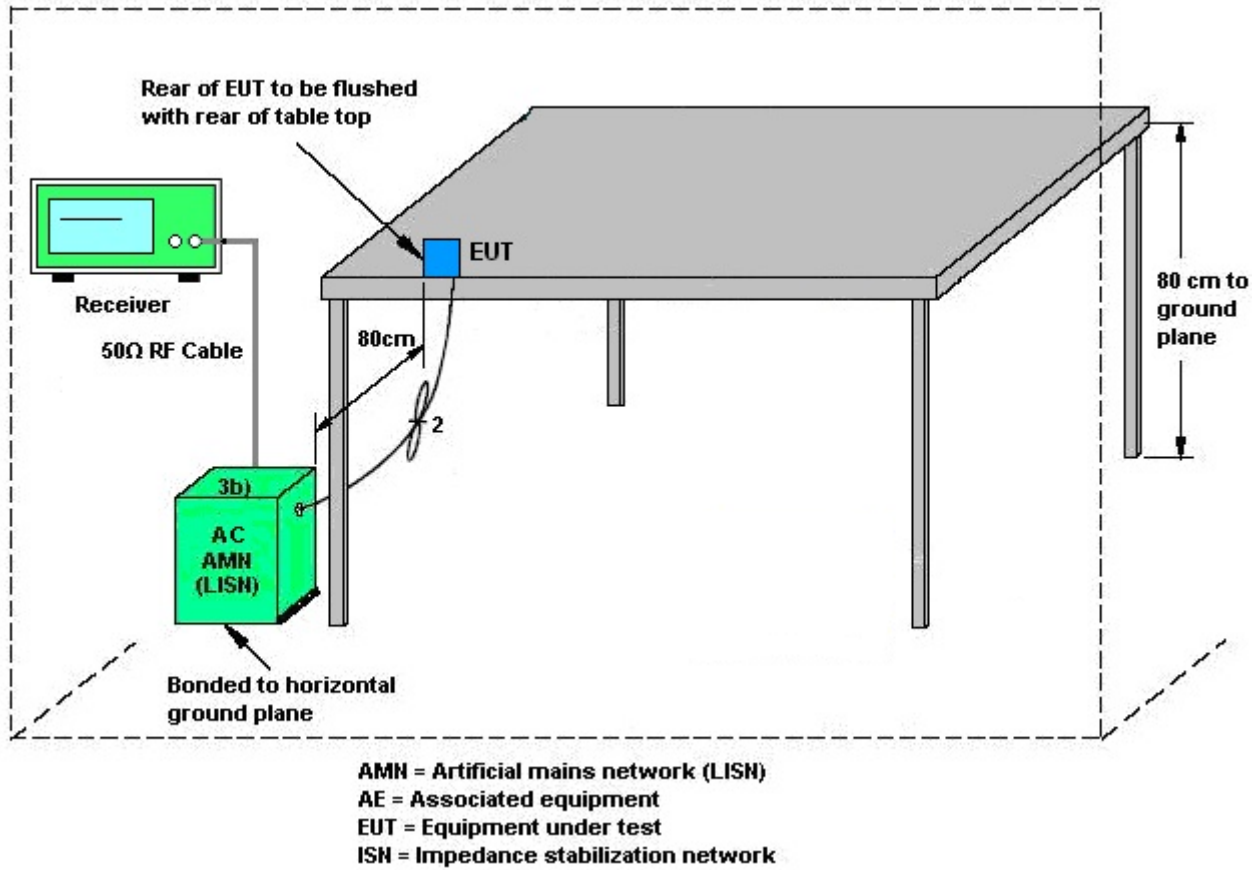

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

Non-standard antenna connector is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Aug. 07, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 04, 2023	Aug. 07, 2023	Jan. 03, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 04, 2023	Aug. 07, 2023	Jan. 03, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Aug. 04, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz-44GHz	Oct. 13, 2022	Aug. 04, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Aug. 04, 2023	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	Apr. 09, 2023	Aug. 04, 2023	Apr. 08, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2023	Aug. 04, 2023	Apr. 05, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Aug. 04, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 06, 2023	Aug. 04, 2023	Jul. 05, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 04, 2023	Aug. 04, 2023	Jan. 03, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 04, 2023	Aug. 04, 2023	Jan. 03, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2022	Aug. 04, 2023	Oct. 11, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 04, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 04, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 04, 2023	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Jul. 18, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jul. 18, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Jul. 18, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jul. 18, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----





## **Appendix A. Conducted Test Results**

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2023/8/7	Relative Humidity:	40~51	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
zigbee	250K	1	11	2405	2.30	1.57	0.50	Pass
zigbee	250K	1	12	2410	2.31	1.52	0.50	Pass
zigbee	250K	1	19	2445	2.31	1.53	0.50	Pass
zigbee	250K	1	25	2475	2.30	1.55	0.50	Pass
zigbee	250K	1	26	2480	2.04	1.37	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
zigbee	250K	1	11	2405	18.10	30.00	1.27	19.37	36.00	Pass
zigbee	250K	1	12	2410	17.93	30.00	1.27	19.20	36.00	Pass
zigbee	250K	1	19	2445	16.48	30.00	1.27	17.75	36.00	Pass
zigbee	250K	1	25	2475	16.71	30.00	1.27	17.98	36.00	Pass
zigbee	250K	1	26	2480	16.59	30.00	1.27	17.86	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
zigbee	250K	1	11	2405	1.53	17.89
zigbee	250K	1	12	2410	1.53	17.72
zigbee	250K	1	19	2445	1.50	16.37
zigbee	250K	1	25	2475	1.53	16.46
zigbee	250K	1	26	2480	0.00	16.53

**TEST RESULTS DATA**  
**Peak Power Density**


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
zigbee	250K	1	11	2405	13.76	2.90	1.27	8.00	Pass
zigbee	250K	1	12	2410	13.77	2.60	1.27	8.00	Pass
zigbee	250K	1	19	2445	13.13	2.68	1.27	8.00	Pass
zigbee	250K	1	25	2475	12.64	1.91	1.27	8.00	Pass
zigbee	250K	1	26	2480	14.08	3.48	1.27	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

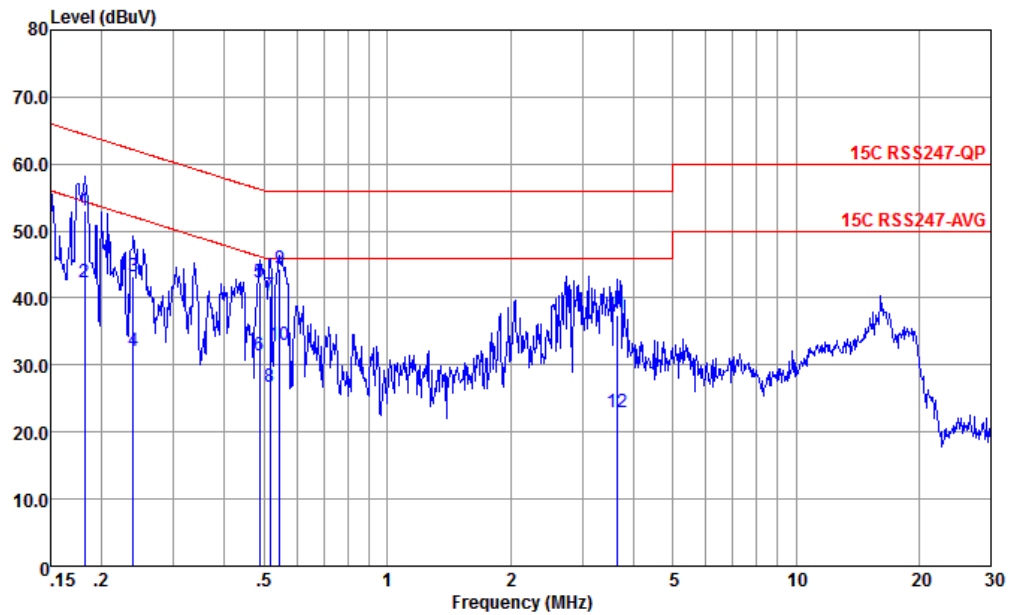


Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.182	53.06	-11.36	64.42	42.60	0.04	10.42	QP
2	0.182	42.36	-12.06	54.42	31.90	0.04	10.42	Average
3	0.239	43.22	-18.91	62.13	32.80	0.03	10.39	QP
4	0.239	32.02	-20.11	52.13	21.60	0.03	10.39	Average
5	0.486	42.39	-13.84	56.23	32.20	-0.03	10.22	QP
6	0.486	31.39	-14.84	46.23	21.20	-0.03	10.22	Average
7	0.516	40.37	-15.63	56.00	30.19	-0.03	10.21	QP
8	0.516	26.77	-19.23	46.00	16.59	-0.03	10.21	Average
9	0.546	44.36	-11.64	56.00	34.20	-0.04	10.20	QP
10	0.546	33.06	-12.94	46.00	22.90	-0.04	10.20	Average
11	3.642	37.45	-18.55	56.00	27.49	-0.10	10.06	QP
12	3.642	22.85	-23.15	46.00	12.89	-0.10	10.06	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

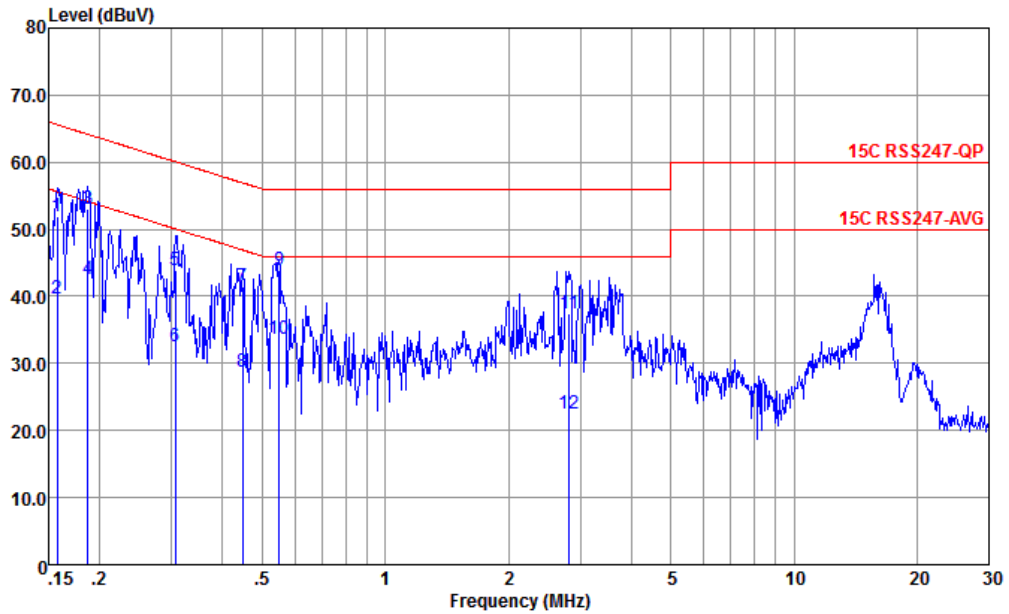

Site : CO01-KS  
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.157	51.97	-13.63	65.60	41.50	0.04	10.43	QP
2	0.157	39.67	-15.93	55.60	29.20	0.04	10.43	Average
3 *	0.187	53.07	-11.08	64.15	42.60	0.05	10.42	QP
4	0.187	42.67	-11.48	54.15	32.20	0.05	10.42	Average
5	0.307	43.90	-16.16	60.06	33.59	-0.04	10.35	QP
6	0.307	32.60	-17.46	50.06	22.29	-0.04	10.35	Average
7	0.447	41.39	-15.54	56.93	31.19	-0.06	10.26	QP
8	0.447	28.69	-18.24	46.93	18.49	-0.06	10.26	Average
9	0.549	43.93	-12.07	56.00	33.80	-0.07	10.20	QP
10	0.549	33.73	-12.27	46.00	23.60	-0.07	10.20	Average
11	2.824	37.43	-18.57	56.00	27.50	-0.13	10.06	QP
12	2.824	22.53	-23.47	46.00	12.60	-0.13	10.06	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2405-2480	O-QPSK	11	2405	250Kbps	-	-
Mode 2	2405-2480	O-QPSK	12	2410	250Kbps	-	-
Mode 3	2405-2480	O-QPSK	19	2445	250Kbps	-	-
Mode 4	2405-2480	O-QPSK	25	2475	250Kbps	-	-
Mode 5	2405-2480	O-QPSK	26	2480	250Kbps	-	-

### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	O-QPSK	11	2389.56	71.94	74.00	-2.06	V	PEAK	Pass	Band Edge
1	O-QPSK	11	4810.00	52.56	54.00	-1.44	H	AVERAGE	Pass	Harmonic
2	O-QPSK	12	-	-	-	-	-	-	-	Band Edge
2	O-QPSK	12	4820.00	52.73	54.00	-1.27	H	Average	Pass	Harmonic
3	O-QPSK	19	-	-	-	-	-	-	-	Band Edge
3	O-QPSK	19	4890.00	53.17	54.00	-0.83	H	Average	Pass	Harmonic
4	O-QPSK	25	-	-	-	-	-	-	-	Band Edge
4	O-QPSK	25	4950.00	53.03	54.00	-0.97	H	Average	Pass	Harmonic
5	O-QPSK	26	2483.50	49.56	54.00	-4.44	V	AVERAGE	Pass	Band Edge
5	O-QPSK	26	4960.00	53.44	54.00	-0.56	H	AVERAGE	Pass	Harmonic
5	O-QPSK	26	240.49	32.52	46.00	-13.48	H	PEAK	Pass	LF



Mode	1																																																																																	
	Band Edge																																																																																	
	2405-2480_ZIGBEE_CH11_2405MHz																																																																																	
ANT	-																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>69.84</td> <td>74.00</td> <td>-4.16</td> <td>58.05</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>168</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.43	69.84	74.00	-4.16	58.05	32.05	6.60	32.86	6.00	168	297	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>111.98</td> <td>-----</td> <td>-----</td> <td>99.98</td> <td>32.22</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>168</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2405.00	111.98	-----	-----	99.98	32.22	6.62	32.84	6.00	168	297	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2389.43	69.84	74.00	-4.16	58.05	32.05	6.60	32.86	6.00	168	297	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2405.00	111.98	-----	-----	99.98	32.22	6.62	32.84	6.00	168	297	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>46.75</td> <td>54.00</td> <td>-7.25</td> <td>34.96</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>168</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.30	46.75	54.00	-7.25	34.96	32.05	6.60	32.86	6.00	168	297	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>108.93</td> <td>-----</td> <td>-----</td> <td>96.89</td> <td>32.24</td> <td>6.63</td> <td>32.83</td> <td>6.00</td> <td>168</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2405.00	108.93	-----	-----	96.89	32.24	6.63	32.83	6.00	168	297	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2389.30	46.75	54.00	-7.25	34.96	32.05	6.60	32.86	6.00	168	297	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2405.00	108.93	-----	-----	96.89	32.24	6.63	32.83	6.00	168	297	AVERAGE																																																																						

Note: The higher Signals which are no mark are within frequency band can be ignored.



Mode	1																																																																																	
	Band Edge																																																																																	
	2405-2480_ZIGBEE_CH11_2405MHz																																																																																	
ANT	-																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>71.94</td> <td>74.00</td> <td>-2.06</td> <td>60.15</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>100</td> <td>112 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	71.94	74.00	-2.06	60.15	32.05	6.60	32.86	6.00	100	112 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>114.65</td> <td>-----</td> <td>-----</td> <td>102.61</td> <td>32.24</td> <td>6.63</td> <td>32.83</td> <td>6.00</td> <td>100</td> <td>112 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	114.65	-----	-----	102.61	32.24	6.63	32.83	6.00	100	112 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.56	71.94	74.00	-2.06	60.15	32.05	6.60	32.86	6.00	100	112 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2405.00	114.65	-----	-----	102.61	32.24	6.63	32.83	6.00	100	112 PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>48.83</td> <td>54.00</td> <td>-5.17</td> <td>37.04</td> <td>32.05</td> <td>6.60</td> <td>32.86</td> <td>6.00</td> <td>100</td> <td>112 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	48.83	54.00	-5.17	37.04	32.05	6.60	32.86	6.00	100	112 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2405.00</td> <td>111.52</td> <td>-----</td> <td>-----</td> <td>99.52</td> <td>32.22</td> <td>6.62</td> <td>32.84</td> <td>6.00</td> <td>100</td> <td>112 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	111.52	-----	-----	99.52	32.22	6.62	32.84	6.00	100	112 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.43	48.83	54.00	-5.17	37.04	32.05	6.60	32.86	6.00	100	112 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2405.00	111.52	-----	-----	99.52	32.22	6.62	32.84	6.00	100	112 AVERAGE																																																																							

Note: The higher Signals which are no mark are within frequency band can be ignored.



Mode	1																																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																																									
	2405-2480_ ZIGBEE _CH11_2405MHZ																																																																																																																																																																																																									
ANT	-																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4810.00</td> <td>56.80</td> <td>74.00</td> <td>-17.20</td> <td>74.07</td> <td>34.20</td> <td>9.45</td> <td>60.92</td> <td>0.00</td> <td>102</td> <td>314</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4810.00</td> <td>52.56</td> <td>54.00</td> <td>-1.44</td> <td>69.83</td> <td>34.20</td> <td>9.45</td> <td>60.92</td> <td>0.00</td> <td>102</td> <td>314</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7215.00</td> <td>52.41</td> <td>86.00</td> <td>-33.59</td> <td>65.21</td> <td>35.66</td> <td>11.65</td> <td>60.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>9630.00</td> <td>52.18</td> <td>86.00</td> <td>-33.82</td> <td>62.50</td> <td>36.90</td> <td>13.57</td> <td>60.79</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>12025.00</td> <td>56.47</td> <td>74.00</td> <td>-17.53</td> <td>62.86</td> <td>38.88</td> <td>15.29</td> <td>60.56</td> <td>0.00</td> <td>100</td> <td>252</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>12025.00</td> <td>50.97</td> <td>54.00</td> <td>-3.03</td> <td>57.37</td> <td>38.87</td> <td>15.29</td> <td>60.56</td> <td>0.00</td> <td>100</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	56.80	74.00	-17.20	74.07	34.20	9.45	60.92	0.00	102	314	PEAK	2	4810.00	52.56	54.00	-1.44	69.83	34.20	9.45	60.92	0.00	102	314	AVERAGE	3	7215.00	52.41	86.00	-33.59	65.21	35.66	11.65	60.11	0.00	---	---	Peak	4	9630.00	52.18	86.00	-33.82	62.50	36.90	13.57	60.79	0.00	---	---	Peak	5	12025.00	56.47	74.00	-17.53	62.86	38.88	15.29	60.56	0.00	100	252	PEAK	6	12025.00	50.97	54.00	-3.03	57.37	38.87	15.29	60.56	0.00	100	252	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4810.00</td> <td>53.18</td> <td>74.00</td> <td>-20.82</td> <td>70.45</td> <td>34.20</td> <td>9.45</td> <td>60.92</td> <td>0.00</td> <td>107</td> <td>310</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4810.00</td> <td>48.16</td> <td>54.00</td> <td>-5.84</td> <td>65.43</td> <td>34.20</td> <td>9.45</td> <td>60.92</td> <td>0.00</td> <td>107</td> <td>310</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7215.00</td> <td>52.56</td> <td>88.00</td> <td>-36.30</td> <td>65.36</td> <td>35.66</td> <td>11.65</td> <td>60.11</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>12030.00</td> <td>57.28</td> <td>74.00</td> <td>-16.72</td> <td>63.68</td> <td>38.87</td> <td>15.29</td> <td>60.56</td> <td>0.00</td> <td>100</td> <td>231</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>12030.00</td> <td>51.95</td> <td>54.00</td> <td>-2.05</td> <td>58.35</td> <td>38.87</td> <td>15.29</td> <td>60.56</td> <td>0.00</td> <td>100</td> <td>231</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4810.00	53.18	74.00	-20.82	70.45	34.20	9.45	60.92	0.00	107	310	PEAK	2	4810.00	48.16	54.00	-5.84	65.43	34.20	9.45	60.92	0.00	107	310	AVERAGE	3	7215.00	52.56	88.00	-36.30	65.36	35.66	11.65	60.11	0.00	---	---	Peak	4	12030.00	57.28	74.00	-16.72	63.68	38.87	15.29	60.56	0.00	100	231	Peak	5	12030.00	51.95	54.00	-2.05	58.35	38.87	15.29	60.56	0.00	100	231	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1	4810.00	56.80	74.00	-17.20	74.07	34.20	9.45	60.92	0.00	102	314	PEAK																																																																																																																																																																																														
2	4810.00	52.56	54.00	-1.44	69.83	34.20	9.45	60.92	0.00	102	314	AVERAGE																																																																																																																																																																																														
3	7215.00	52.41	86.00	-33.59	65.21	35.66	11.65	60.11	0.00	---	---	Peak																																																																																																																																																																																														
4	9630.00	52.18	86.00	-33.82	62.50	36.90	13.57	60.79	0.00	---	---	Peak																																																																																																																																																																																														
5	12025.00	56.47	74.00	-17.53	62.86	38.88	15.29	60.56	0.00	100	252	PEAK																																																																																																																																																																																														
6	12025.00	50.97	54.00	-3.03	57.37	38.87	15.29	60.56	0.00	100	252	AVERAGE																																																																																																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																
1	4810.00	53.18	74.00	-20.82	70.45	34.20	9.45	60.92	0.00	107	310	PEAK																																																																																																																																																																																														
2	4810.00	48.16	54.00	-5.84	65.43	34.20	9.45	60.92	0.00	107	310	AVERAGE																																																																																																																																																																																														
3	7215.00	52.56	88.00	-36.30	65.36	35.66	11.65	60.11	0.00	---	---	Peak																																																																																																																																																																																														
4	12030.00	57.28	74.00	-16.72	63.68	38.87	15.29	60.56	0.00	100	231	Peak																																																																																																																																																																																														
5	12030.00	51.95	54.00	-2.05	58.35	38.87	15.29	60.56	0.00	100	231	Average																																																																																																																																																																																														

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB





Mode	2																																																																																																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																																																																																																							
	2405-2480_ZIGBEE_CH12_2410MHz																																																																																																																																																																																																																																																																							
ANT	-																																																																																																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>4820.00</td><td>55.74</td><td>74.00</td><td>-18.26</td><td>72.99</td><td>34.20</td><td>9.46</td><td>60.91</td><td>0.00</td><td>121</td><td>290</td><td>Peak</td></tr> <tr><td>2</td><td>4820.00</td><td>52.73</td><td>54.00</td><td>-1.27</td><td>69.98</td><td>34.20</td><td>9.46</td><td>60.91</td><td>0.00</td><td>121</td><td>290</td><td>Average</td></tr> <tr><td>3</td><td>7250.00</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>67.49</td><td>35.00</td><td>11.67</td><td>60.19</td><td>0.00</td><td>100</td><td>302</td><td>Peak</td></tr> <tr><td>4</td><td>7250.00</td><td>49.57</td><td>54.00</td><td>-4.43</td><td>62.29</td><td>35.00</td><td>11.67</td><td>60.19</td><td>0.00</td><td>100</td><td>302</td><td>Average</td></tr> <tr><td>5</td><td>9645.00</td><td>51.99</td><td>85.11</td><td>-33.12</td><td>62.32</td><td>36.90</td><td>13.57</td><td>60.00</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>12050.00</td><td>57.11</td><td>74.00</td><td>-16.89</td><td>63.50</td><td>38.85</td><td>15.31</td><td>60.55</td><td>0.00</td><td>108</td><td>254</td><td>PEAK</td></tr> <tr><td>7</td><td>12050.00</td><td>50.94</td><td>54.00</td><td>-3.06</td><td>57.33</td><td>38.85</td><td>15.31</td><td>60.55</td><td>0.00</td><td>108</td><td>254</td><td>AVERAGE</td></tr> <tr><td>8</td><td>14460.00</td><td>53.41</td><td>74.00</td><td>-20.59</td><td>56.82</td><td>39.42</td><td>16.85</td><td>59.68</td><td>0.00</td><td>101</td><td>119</td><td>PEAK</td></tr> <tr><td>9</td><td>14460.00</td><td>45.27</td><td>54.00</td><td>-8.73</td><td>48.67</td><td>39.43</td><td>16.85</td><td>59.68</td><td>0.00</td><td>101</td><td>119</td><td>AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4820.00	55.74	74.00	-18.26	72.99	34.20	9.46	60.91	0.00	121	290	Peak	2	4820.00	52.73	54.00	-1.27	69.98	34.20	9.46	60.91	0.00	121	290	Average	3	7250.00	54.77	74.00	-19.23	67.49	35.00	11.67	60.19	0.00	100	302	Peak	4	7250.00	49.57	54.00	-4.43	62.29	35.00	11.67	60.19	0.00	100	302	Average	5	9645.00	51.99	85.11	-33.12	62.32	36.90	13.57	60.00	0.00	---	---	Peak	6	12050.00	57.11	74.00	-16.89	63.50	38.85	15.31	60.55	0.00	108	254	PEAK	7	12050.00	50.94	54.00	-3.06	57.33	38.85	15.31	60.55	0.00	108	254	AVERAGE	8	14460.00	53.41	74.00	-20.59	56.82	39.42	16.85	59.68	0.00	101	119	PEAK	9	14460.00	45.27	54.00	-8.73	48.67	39.43	16.85	59.68	0.00	101	119	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr><td>1</td><td>4820.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>70.93</td><td>34.20</td><td>9.46</td><td>60.91</td><td>0.00</td><td>100</td><td>312</td><td>PEAK</td></tr> <tr><td>2</td><td>4820.00</td><td>49.42</td><td>54.00</td><td>-4.58</td><td>66.67</td><td>34.20</td><td>9.46</td><td>60.91</td><td>0.00</td><td>100</td><td>312</td><td>AVERAGE</td></tr> <tr><td>3</td><td>7250.00</td><td>52.81</td><td>74.00</td><td>-21.19</td><td>65.53</td><td>35.00</td><td>11.67</td><td>60.19</td><td>0.00</td><td>276</td><td>275</td><td>Peak</td></tr> <tr><td>4</td><td>7250.00</td><td>48.67</td><td>54.00</td><td>-5.33</td><td>61.39</td><td>35.00</td><td>11.67</td><td>60.19</td><td>0.00</td><td>276</td><td>275</td><td>Average</td></tr> <tr><td>5</td><td>12050.00</td><td>55.95</td><td>74.00</td><td>-18.05</td><td>62.34</td><td>38.85</td><td>15.31</td><td>60.55</td><td>0.00</td><td>322</td><td>251</td><td>PEAK</td></tr> <tr><td>6</td><td>12050.00</td><td>50.70</td><td>54.00</td><td>-3.30</td><td>57.09</td><td>38.85</td><td>15.31</td><td>60.55</td><td>0.00</td><td>322</td><td>251</td><td>AVERAGE</td></tr> <tr><td>7</td><td>16875.00</td><td>55.35</td><td>88.71</td><td>-33.36</td><td>54.63</td><td>41.42</td><td>18.15</td><td>58.85</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4820.00	53.68	74.00	-20.32	70.93	34.20	9.46	60.91	0.00	100	312	PEAK	2	4820.00	49.42	54.00	-4.58	66.67	34.20	9.46	60.91	0.00	100	312	AVERAGE	3	7250.00	52.81	74.00	-21.19	65.53	35.00	11.67	60.19	0.00	276	275	Peak	4	7250.00	48.67	54.00	-5.33	61.39	35.00	11.67	60.19	0.00	276	275	Average	5	12050.00	55.95	74.00	-18.05	62.34	38.85	15.31	60.55	0.00	322	251	PEAK	6	12050.00	50.70	54.00	-3.30	57.09	38.85	15.31	60.55	0.00	322	251	AVERAGE	7	16875.00	55.35	88.71	-33.36	54.63	41.42	18.15	58.85	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																																																
1	4820.00	55.74	74.00	-18.26	72.99	34.20	9.46	60.91	0.00	121	290	Peak																																																																																																																																																																																																																																																												
2	4820.00	52.73	54.00	-1.27	69.98	34.20	9.46	60.91	0.00	121	290	Average																																																																																																																																																																																																																																																												
3	7250.00	54.77	74.00	-19.23	67.49	35.00	11.67	60.19	0.00	100	302	Peak																																																																																																																																																																																																																																																												
4	7250.00	49.57	54.00	-4.43	62.29	35.00	11.67	60.19	0.00	100	302	Average																																																																																																																																																																																																																																																												
5	9645.00	51.99	85.11	-33.12	62.32	36.90	13.57	60.00	0.00	---	---	Peak																																																																																																																																																																																																																																																												
6	12050.00	57.11	74.00	-16.89	63.50	38.85	15.31	60.55	0.00	108	254	PEAK																																																																																																																																																																																																																																																												
7	12050.00	50.94	54.00	-3.06	57.33	38.85	15.31	60.55	0.00	108	254	AVERAGE																																																																																																																																																																																																																																																												
8	14460.00	53.41	74.00	-20.59	56.82	39.42	16.85	59.68	0.00	101	119	PEAK																																																																																																																																																																																																																																																												
9	14460.00	45.27	54.00	-8.73	48.67	39.43	16.85	59.68	0.00	101	119	AVERAGE																																																																																																																																																																																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																																																
1	4820.00	53.68	74.00	-20.32	70.93	34.20	9.46	60.91	0.00	100	312	PEAK																																																																																																																																																																																																																																																												
2	4820.00	49.42	54.00	-4.58	66.67	34.20	9.46	60.91	0.00	100	312	AVERAGE																																																																																																																																																																																																																																																												
3	7250.00	52.81	74.00	-21.19	65.53	35.00	11.67	60.19	0.00	276	275	Peak																																																																																																																																																																																																																																																												
4	7250.00	48.67	54.00	-5.33	61.39	35.00	11.67	60.19	0.00	276	275	Average																																																																																																																																																																																																																																																												
5	12050.00	55.95	74.00	-18.05	62.34	38.85	15.31	60.55	0.00	322	251	PEAK																																																																																																																																																																																																																																																												
6	12050.00	50.70	54.00	-3.30	57.09	38.85	15.31	60.55	0.00	322	251	AVERAGE																																																																																																																																																																																																																																																												
7	16875.00	55.35	88.71	-33.36	54.63	41.42	18.15	58.85	0.00	---	---	Peak																																																																																																																																																																																																																																																												

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB



Mode	3																																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																																													
	2405-2480_ZIGBEE_CH19_2445MHz																																																																																																																																																																																																																																													
ANT	-																																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4890.00</td> <td>57.09</td> <td>74.00</td> <td>-16.91</td> <td>74.21</td> <td>34.20</td> <td>9.54</td> <td>60.86</td> <td>0.00</td> <td>121</td> <td>192</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4890.00</td> <td>53.17</td> <td>54.00</td> <td>-0.83</td> <td>70.29</td> <td>34.20</td> <td>9.54</td> <td>60.86</td> <td>0.00</td> <td>121</td> <td>192</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7335.00</td> <td>54.19</td> <td>74.00</td> <td>-19.81</td> <td>67.13</td> <td>35.74</td> <td>11.70</td> <td>60.38</td> <td>0.00</td> <td>102</td> <td>305</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7335.00</td> <td>48.29</td> <td>54.00</td> <td>-5.71</td> <td>61.23</td> <td>35.74</td> <td>11.70</td> <td>60.38</td> <td>0.00</td> <td>102</td> <td>305</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>9780.00</td> <td>50.04</td> <td>85.71</td> <td>-35.67</td> <td>60.13</td> <td>37.16</td> <td>13.59</td> <td>60.84</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>12225.00</td> <td>54.84</td> <td>74.00</td> <td>-19.16</td> <td>61.04</td> <td>38.88</td> <td>15.45</td> <td>60.53</td> <td>0.00</td> <td>102</td> <td>274</td> <td>PEAK</td> </tr> <tr> <td>7</td> <td>12225.00</td> <td>48.79</td> <td>54.00</td> <td>-5.21</td> <td>55.00</td> <td>38.87</td> <td>15.45</td> <td>60.53</td> <td>0.00</td> <td>102</td> <td>274</td> <td>AVERAGE</td> </tr> <tr> <td>8</td> <td>14685.00</td> <td>52.00</td> <td>85.71</td> <td>-33.71</td> <td>55.23</td> <td>39.69</td> <td>17.01</td> <td>59.93</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4890.00	57.09	74.00	-16.91	74.21	34.20	9.54	60.86	0.00	121	192	Peak	2	4890.00	53.17	54.00	-0.83	70.29	34.20	9.54	60.86	0.00	121	192	Average	3	7335.00	54.19	74.00	-19.81	67.13	35.74	11.70	60.38	0.00	102	305	PEAK	4	7335.00	48.29	54.00	-5.71	61.23	35.74	11.70	60.38	0.00	102	305	AVERAGE	5	9780.00	50.04	85.71	-35.67	60.13	37.16	13.59	60.84	0.00	---	---	Peak	6	12225.00	54.84	74.00	-19.16	61.04	38.88	15.45	60.53	0.00	102	274	PEAK	7	12225.00	48.79	54.00	-5.21	55.00	38.87	15.45	60.53	0.00	102	274	AVERAGE	8	14685.00	52.00	85.71	-33.71	55.23	39.69	17.01	59.93	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4890.00</td> <td>52.22</td> <td>74.00</td> <td>-21.78</td> <td>69.34</td> <td>34.20</td> <td>9.54</td> <td>60.86</td> <td>0.00</td> <td>194</td> <td>274</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4890.00</td> <td>46.76</td> <td>54.00</td> <td>-7.24</td> <td>63.88</td> <td>34.20</td> <td>9.54</td> <td>60.86</td> <td>0.00</td> <td>194</td> <td>274</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7335.00</td> <td>52.62</td> <td>74.00</td> <td>-21.38</td> <td>65.56</td> <td>35.74</td> <td>11.70</td> <td>60.38</td> <td>0.00</td> <td>292</td> <td>277</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7335.00</td> <td>46.89</td> <td>54.00</td> <td>-7.11</td> <td>59.03</td> <td>35.74</td> <td>11.70</td> <td>60.38</td> <td>0.00</td> <td>292</td> <td>277</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>12225.00</td> <td>56.23</td> <td>74.00</td> <td>-17.77</td> <td>62.43</td> <td>38.88</td> <td>15.45</td> <td>60.53</td> <td>0.00</td> <td>243</td> <td>264</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>12225.00</td> <td>50.36</td> <td>54.00</td> <td>-3.64</td> <td>56.57</td> <td>38.87</td> <td>15.45</td> <td>60.53</td> <td>0.00</td> <td>243</td> <td>264</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	4890.00	52.22	74.00	-21.78	69.34	34.20	9.54	60.86	0.00	194	274	PEAK	2	4890.00	46.76	54.00	-7.24	63.88	34.20	9.54	60.86	0.00	194	274	AVERAGE	3	7335.00	52.62	74.00	-21.38	65.56	35.74	11.70	60.38	0.00	292	277	PEAK	4	7335.00	46.89	54.00	-7.11	59.03	35.74	11.70	60.38	0.00	292	277	AVERAGE	5	12225.00	56.23	74.00	-17.77	62.43	38.88	15.45	60.53	0.00	243	264	PEAK	6	12225.00	50.36	54.00	-3.64	56.57	38.87	15.45	60.53	0.00	243	264	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																						
1	4890.00	57.09	74.00	-16.91	74.21	34.20	9.54	60.86	0.00	121	192	Peak																																																																																																																																																																																																																																		
2	4890.00	53.17	54.00	-0.83	70.29	34.20	9.54	60.86	0.00	121	192	Average																																																																																																																																																																																																																																		
3	7335.00	54.19	74.00	-19.81	67.13	35.74	11.70	60.38	0.00	102	305	PEAK																																																																																																																																																																																																																																		
4	7335.00	48.29	54.00	-5.71	61.23	35.74	11.70	60.38	0.00	102	305	AVERAGE																																																																																																																																																																																																																																		
5	9780.00	50.04	85.71	-35.67	60.13	37.16	13.59	60.84	0.00	---	---	Peak																																																																																																																																																																																																																																		
6	12225.00	54.84	74.00	-19.16	61.04	38.88	15.45	60.53	0.00	102	274	PEAK																																																																																																																																																																																																																																		
7	12225.00	48.79	54.00	-5.21	55.00	38.87	15.45	60.53	0.00	102	274	AVERAGE																																																																																																																																																																																																																																		
8	14685.00	52.00	85.71	-33.71	55.23	39.69	17.01	59.93	0.00	---	---	Peak																																																																																																																																																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																																																						
1	4890.00	52.22	74.00	-21.78	69.34	34.20	9.54	60.86	0.00	194	274	PEAK																																																																																																																																																																																																																																		
2	4890.00	46.76	54.00	-7.24	63.88	34.20	9.54	60.86	0.00	194	274	AVERAGE																																																																																																																																																																																																																																		
3	7335.00	52.62	74.00	-21.38	65.56	35.74	11.70	60.38	0.00	292	277	PEAK																																																																																																																																																																																																																																		
4	7335.00	46.89	54.00	-7.11	59.03	35.74	11.70	60.38	0.00	292	277	AVERAGE																																																																																																																																																																																																																																		
5	12225.00	56.23	74.00	-17.77	62.43	38.88	15.45	60.53	0.00	243	264	PEAK																																																																																																																																																																																																																																		
6	12225.00	50.36	54.00	-3.64	56.57	38.87	15.45	60.53	0.00	243	264	AVERAGE																																																																																																																																																																																																																																		





Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB



Mode	4																																																																																																																																																																																																																																																				
	Harmonic																																																																																																																																																																																																																																																				
	2405-2480_ZIGBEE_CH25_2475MHZ																																																																																																																																																																																																																																																				
ANT	-																																																																																																																																																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																			
Peak Avg																																																																																																																																																																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.00</td> <td>56.70</td> <td>74.00</td> <td>-17.30</td> <td>73.71</td> <td>34.20</td> <td>9.60</td> <td>60.81</td> <td>0.00</td> <td>141</td> <td>292</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4950.00</td> <td>53.03</td> <td>54.00</td> <td>-0.97</td> <td>70.04</td> <td>34.20</td> <td>9.60</td> <td>60.81</td> <td>0.00</td> <td>141</td> <td>292</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7425.00</td> <td>54.45</td> <td>74.00</td> <td>-19.55</td> <td>67.57</td> <td>35.70</td> <td>11.76</td> <td>60.58</td> <td>0.00</td> <td>107</td> <td>300</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7425.00</td> <td>49.33</td> <td>54.00</td> <td>-4.67</td> <td>62.45</td> <td>35.70</td> <td>11.76</td> <td>60.58</td> <td>0.00</td> <td>107</td> <td>300</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>9915.00</td> <td>49.04</td> <td>86.02</td> <td>-36.98</td> <td>58.83</td> <td>37.33</td> <td>13.76</td> <td>60.88</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>12375.00</td> <td>56.63</td> <td>74.00</td> <td>-17.37</td> <td>62.69</td> <td>38.88</td> <td>15.56</td> <td>60.50</td> <td>0.00</td> <td>100</td> <td>287</td> <td>PEAK</td> </tr> <tr> <td>7</td> <td>12375.00</td> <td>50.76</td> <td>54.00</td> <td>-3.24</td> <td>56.83</td> <td>38.87</td> <td>15.56</td> <td>60.50</td> <td>0.00</td> <td>100</td> <td>287</td> <td>AVERAGE</td> </tr> <tr> <td>8</td> <td>14865.00</td> <td>54.35</td> <td>86.02</td> <td>-31.67</td> <td>57.53</td> <td>39.80</td> <td>17.14</td> <td>60.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4950.00	56.70	74.00	-17.30	73.71	34.20	9.60	60.81	0.00	141	292	Peak	2	4950.00	53.03	54.00	-0.97	70.04	34.20	9.60	60.81	0.00	141	292	Average	3	7425.00	54.45	74.00	-19.55	67.57	35.70	11.76	60.58	0.00	107	300	PEAK	4	7425.00	49.33	54.00	-4.67	62.45	35.70	11.76	60.58	0.00	107	300	AVERAGE	5	9915.00	49.04	86.02	-36.98	58.83	37.33	13.76	60.88	0.00	---	---	Peak	6	12375.00	56.63	74.00	-17.37	62.69	38.88	15.56	60.50	0.00	100	287	PEAK	7	12375.00	50.76	54.00	-3.24	56.83	38.87	15.56	60.50	0.00	100	287	AVERAGE	8	14865.00	54.35	86.02	-31.67	57.53	39.80	17.14	60.12	0.00	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.00</td> <td>52.03</td> <td>74.00</td> <td>-21.97</td> <td>69.04</td> <td>34.20</td> <td>9.60</td> <td>60.81</td> <td>0.00</td> <td>100</td> <td>307</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4950.00</td> <td>46.91</td> <td>54.00</td> <td>-7.09</td> <td>63.92</td> <td>34.20</td> <td>9.60</td> <td>60.81</td> <td>0.00</td> <td>100</td> <td>307</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7425.00</td> <td>54.00</td> <td>74.00</td> <td>-20.00</td> <td>67.12</td> <td>35.70</td> <td>11.76</td> <td>60.58</td> <td>0.00</td> <td>204</td> <td>273</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>7425.00</td> <td>48.16</td> <td>54.00</td> <td>-5.84</td> <td>61.28</td> <td>35.70</td> <td>11.76</td> <td>60.58</td> <td>0.00</td> <td>204</td> <td>273</td> <td>AVERAGE</td> </tr> <tr> <td>5</td> <td>12375.00</td> <td>56.70</td> <td>74.00</td> <td>-17.30</td> <td>62.76</td> <td>38.88</td> <td>15.56</td> <td>60.50</td> <td>0.00</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> <tr> <td>6</td> <td>12375.00</td> <td>51.12</td> <td>54.00</td> <td>-2.88</td> <td>57.18</td> <td>38.88</td> <td>15.56</td> <td>60.50</td> <td>0.00</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4950.00	52.03	74.00	-21.97	69.04	34.20	9.60	60.81	0.00	100	307	PEAK	2	4950.00	46.91	54.00	-7.09	63.92	34.20	9.60	60.81	0.00	100	307	AVERAGE	3	7425.00	54.00	74.00	-20.00	67.12	35.70	11.76	60.58	0.00	204	273	PEAK	4	7425.00	48.16	54.00	-5.84	61.28	35.70	11.76	60.58	0.00	204	273	AVERAGE	5	12375.00	56.70	74.00	-17.30	62.76	38.88	15.56	60.50	0.00	100	62	PEAK	6	12375.00	51.12	54.00	-2.88	57.18	38.88	15.56	60.50	0.00	100	62
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																											
1	4950.00	56.70	74.00	-17.30	73.71	34.20	9.60	60.81	0.00	141	292	Peak																																																																																																																																																																																																																																									
2	4950.00	53.03	54.00	-0.97	70.04	34.20	9.60	60.81	0.00	141	292	Average																																																																																																																																																																																																																																									
3	7425.00	54.45	74.00	-19.55	67.57	35.70	11.76	60.58	0.00	107	300	PEAK																																																																																																																																																																																																																																									
4	7425.00	49.33	54.00	-4.67	62.45	35.70	11.76	60.58	0.00	107	300	AVERAGE																																																																																																																																																																																																																																									
5	9915.00	49.04	86.02	-36.98	58.83	37.33	13.76	60.88	0.00	---	---	Peak																																																																																																																																																																																																																																									
6	12375.00	56.63	74.00	-17.37	62.69	38.88	15.56	60.50	0.00	100	287	PEAK																																																																																																																																																																																																																																									
7	12375.00	50.76	54.00	-3.24	56.83	38.87	15.56	60.50	0.00	100	287	AVERAGE																																																																																																																																																																																																																																									
8	14865.00	54.35	86.02	-31.67	57.53	39.80	17.14	60.12	0.00	---	---	Peak																																																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																											
1	4950.00	52.03	74.00	-21.97	69.04	34.20	9.60	60.81	0.00	100	307	PEAK																																																																																																																																																																																																																																									
2	4950.00	46.91	54.00	-7.09	63.92	34.20	9.60	60.81	0.00	100	307	AVERAGE																																																																																																																																																																																																																																									
3	7425.00	54.00	74.00	-20.00	67.12	35.70	11.76	60.58	0.00	204	273	PEAK																																																																																																																																																																																																																																									
4	7425.00	48.16	54.00	-5.84	61.28	35.70	11.76	60.58	0.00	204	273	AVERAGE																																																																																																																																																																																																																																									
5	12375.00	56.70	74.00	-17.30	62.76	38.88	15.56	60.50	0.00	100	62	PEAK																																																																																																																																																																																																																																									
6	12375.00	51.12	54.00	-2.88	57.18	38.88	15.56	60.50	0.00	100	62	AVERAGE																																																																																																																																																																																																																																									

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

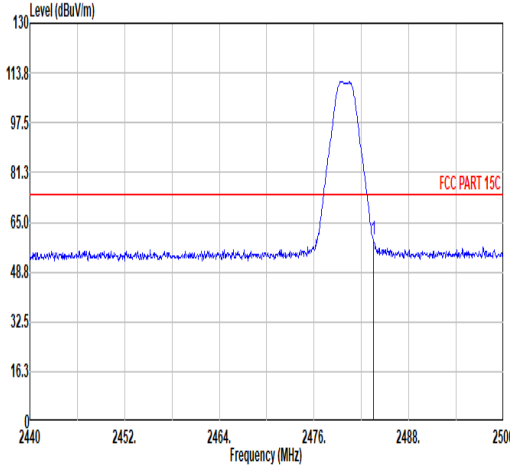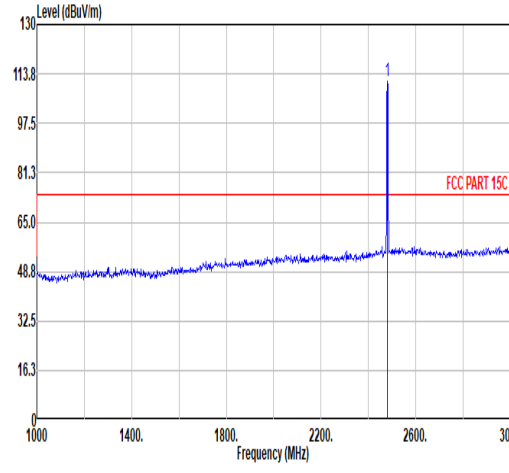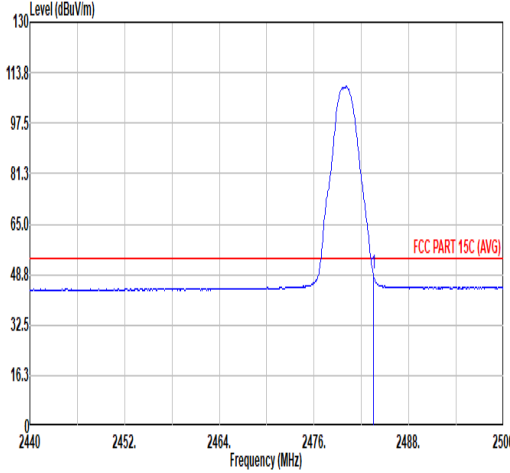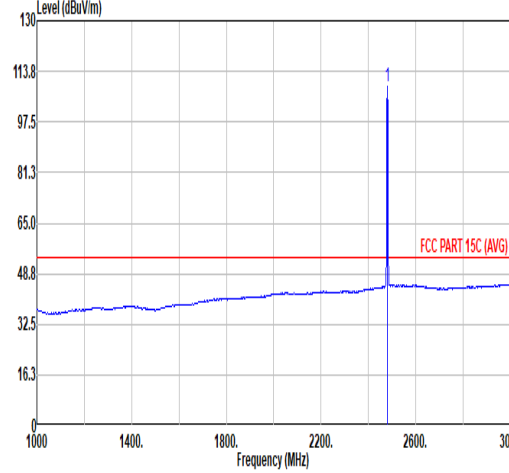

Mode	5																																																																																	
	Band Edge																																																																																	
	2405-2480_ZIGBEE_CH26_2480MHZ																																																																																	
ANT	-																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <table border="1" data-bbox="263 1108 774 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>59.30</td> <td>74.00</td> <td>-14.70</td> <td>46.43</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>294 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	59.30	74.00	-14.70	46.43	32.77	6.73	32.63	6.00	100	294 PEAK	 <table border="1" data-bbox="901 1108 1412 1232"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>111.18</td> <td>-----</td> <td>-----</td> <td>98.34</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>294 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.18	-----	-----	98.34	32.74	6.73	32.63	6.00	100	294 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.50	59.30	74.00	-14.70	46.43	32.77	6.73	32.63	6.00	100	294 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	111.18	-----	-----	98.34	32.74	6.73	32.63	6.00	100	294 PEAK																																																																							
Avg	 <table border="1" data-bbox="263 1792 774 1915"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.89</td> <td>54.00</td> <td>-5.11</td> <td>36.02</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>294 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.89	54.00	-5.11	36.02	32.77	6.73	32.63	6.00	100	294 AVERAGE	 <table border="1" data-bbox="901 1792 1412 1915"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>109.12</td> <td>-----</td> <td>-----</td> <td>96.28</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>294 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	109.12	-----	-----	96.28	32.74	6.73	32.63	6.00	100	294 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.50	48.89	54.00	-5.11	36.02	32.77	6.73	32.63	6.00	100	294 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	109.12	-----	-----	96.28	32.74	6.73	32.63	6.00	100	294 AVERAGE																																																																							





Mode	5																																																																															
	Band Edge																																																																															
	2405-2480_ZIGBEE_CH26_2480MHz																																																																															
ANT	-																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>59.23</td> <td>74.00</td> <td>-14.77</td> <td>46.36</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>253 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.50	59.23	74.00	-14.77	46.36	32.77	6.73	32.63	6.00	100	253 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>111.84</td> <td>-----</td> <td>-----</td> <td>99.00</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>253 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	111.84	-----	-----	99.00	32.74	6.73	32.63	6.00	100	253 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.50	59.23	74.00	-14.77	46.36	32.77	6.73	32.63	6.00	100	253 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	111.84	-----	-----	99.00	32.74	6.73	32.63	6.00	100	253 PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.50</td> <td>49.56</td> <td>54.00</td> <td>-4.44</td> <td>36.69</td> <td>32.77</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>253 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.50	49.56	54.00	-4.44	36.69	32.77	6.73	32.63	6.00	100	253 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2480.00</td> <td>109.63</td> <td>-----</td> <td>-----</td> <td>96.79</td> <td>32.74</td> <td>6.73</td> <td>32.63</td> <td>6.00</td> <td>100</td> <td>253 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	109.63	-----	-----	96.79	32.74	6.73	32.63	6.00	100	253 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2483.50	49.56	54.00	-4.44	36.69	32.77	6.73	32.63	6.00	100	253 AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 2480.00	109.63	-----	-----	96.79	32.74	6.73	32.63	6.00	100	253 AVERAGE																																																																						



	5	
Mode	Harmonic	
	2405-2480_ZIGBEE_CH26_2480MHZ	
ANT	-	

Pol.	Horizontal	Vertical
------	------------	----------

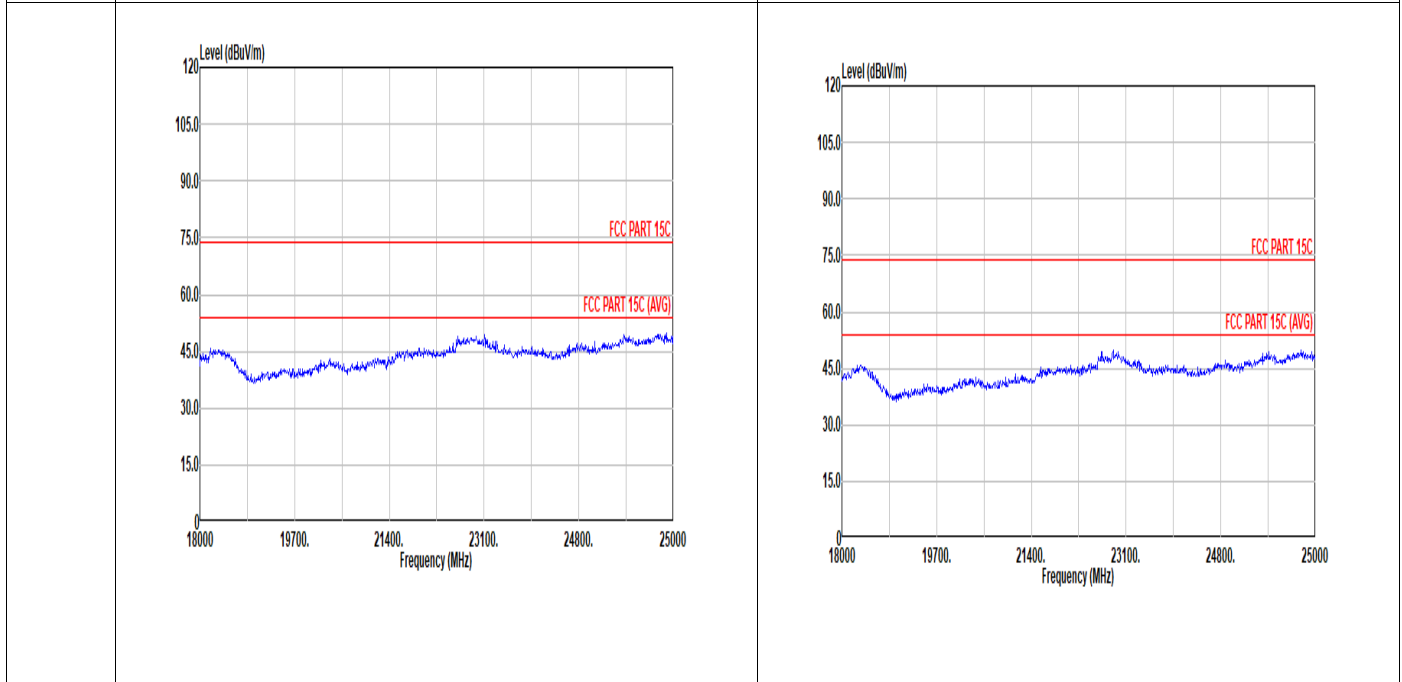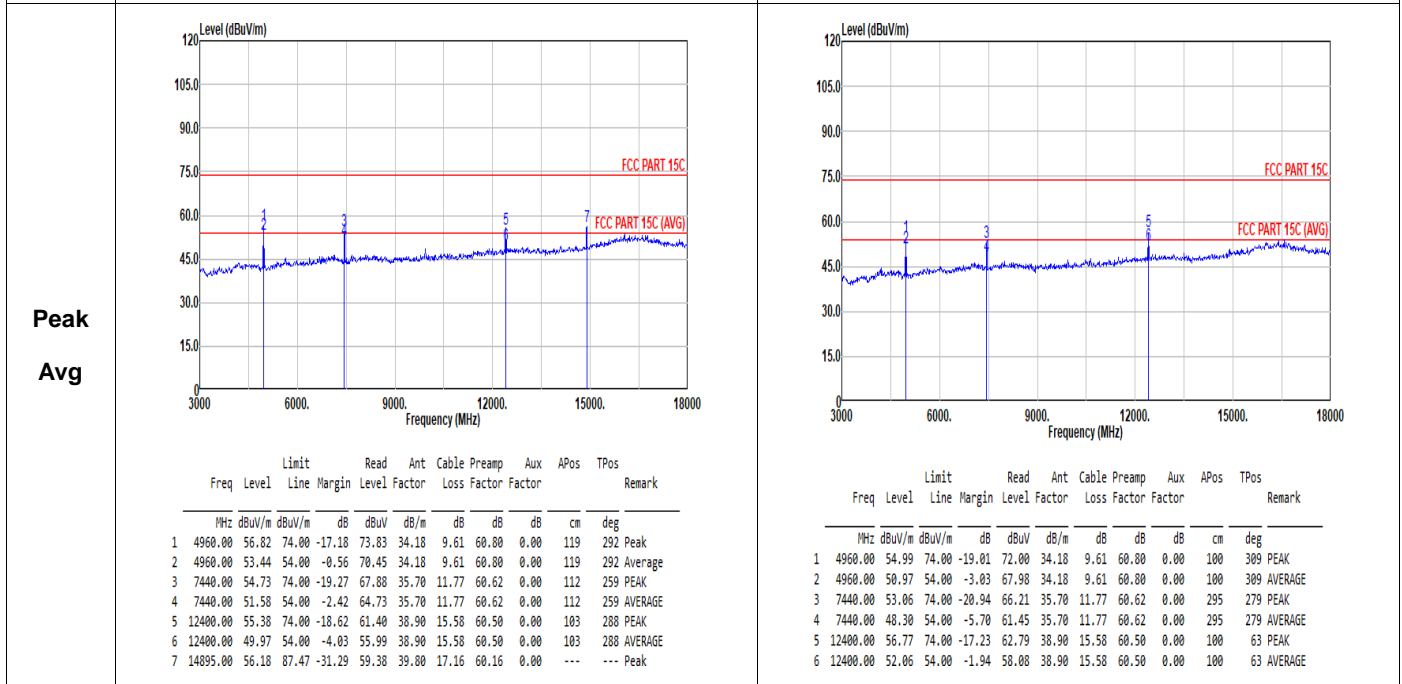

Note:




1. Only the worst case has assessed 18G ~25GHz to test.
2. The non-restricted frequency which limit is 100kHz-PSD down 20dB

Mode	5																																																																																																																																																																									
	LF																																																																																																																																																																									
	2405-2480_ZIGBEE_CH26_2480MHZ																																																																																																																																																																									
ANT	-																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
Peak QP	<p>Data: 1</p> <p>Site : 03CH06-KS Condition : FCC PART 15C 3m LF 6111D SN44483 HORIZONTAL Project : 351810</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over (dB)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV)</th> <th>CableAntenna Loss (dB)</th> <th>Preamp Factor (dB/m)</th> <th>Preamp (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>191.99</td><td>28.59</td><td>-14.91</td><td>43.50</td><td>44.03</td><td>1.87</td><td>14.86</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>240.49</td><td>32.52</td><td>-13.48</td><td>46.00</td><td>44.96</td><td>2.09</td><td>17.64</td><td>32.17</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>385.02</td><td>28.05</td><td>-17.95</td><td>46.00</td><td>36.26</td><td>2.65</td><td>21.38</td><td>32.24</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>482.02</td><td>29.36</td><td>-16.64</td><td>46.00</td><td>35.38</td><td>2.96</td><td>23.67</td><td>32.65</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>699.30</td><td>26.66</td><td>-19.34</td><td>46.00</td><td>28.64</td><td>3.58</td><td>26.70</td><td>32.26</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>913.67</td><td>30.00</td><td>-16.00</td><td>46.00</td><td>27.68</td><td>4.07</td><td>29.62</td><td>31.37</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	Read (dBuV)	CableAntenna Loss (dB)	Preamp Factor (dB/m)	Preamp (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	191.99	28.59	-14.91	43.50	44.03	1.87	14.86	32.17	---	---	Peak	2	240.49	32.52	-13.48	46.00	44.96	2.09	17.64	32.17	---	---	Peak	3	385.02	28.05	-17.95	46.00	36.26	2.65	21.38	32.24	---	---	Peak	4	482.02	29.36	-16.64	46.00	35.38	2.96	23.67	32.65	---	---	Peak	5	699.30	26.66	-19.34	46.00	28.64	3.58	26.70	32.26	---	---	Peak	6	913.67	30.00	-16.00	46.00	27.68	4.07	29.62	31.37	---	---	Peak	<p>Data: 2</p> <p>Site : 03CH06-KS Condition : FCC PART 15C 3m LF 6111D SN44483 VERTICAL Project : 351810</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over (dB)</th> <th>Limit (dBuV/m)</th> <th>Read (dBuV)</th> <th>CableAntenna Loss (dB)</th> <th>Preamp Factor (dB/m)</th> <th>Preamp (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>332.64</td><td>25.67</td><td>-20.33</td><td>46.00</td><td>35.44</td><td>2.46</td><td>19.97</td><td>32.20</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>385.02</td><td>27.74</td><td>-18.26</td><td>46.00</td><td>35.95</td><td>2.65</td><td>21.38</td><td>32.24</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>559.62</td><td>29.59</td><td>-16.41</td><td>46.00</td><td>33.39</td><td>3.19</td><td>25.48</td><td>32.47</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>744.89</td><td>27.97</td><td>-18.03</td><td>46.00</td><td>28.41</td><td>3.69</td><td>28.05</td><td>32.18</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>911.73</td><td>30.01</td><td>-15.99</td><td>46.00</td><td>27.78</td><td>4.07</td><td>29.55</td><td>31.39</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>958.29</td><td>31.94</td><td>-14.06</td><td>46.00</td><td>27.74</td><td>4.17</td><td>30.93</td><td>30.90</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	Read (dBuV)	CableAntenna Loss (dB)	Preamp Factor (dB/m)	Preamp (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	332.64	25.67	-20.33	46.00	35.44	2.46	19.97	32.20	---	---	Peak	2	385.02	27.74	-18.26	46.00	35.95	2.65	21.38	32.24	---	---	Peak	3	559.62	29.59	-16.41	46.00	33.39	3.19	25.48	32.47	---	---	Peak	4	744.89	27.97	-18.03	46.00	28.41	3.69	28.05	32.18	---	---	Peak	5	911.73	30.01	-15.99	46.00	27.78	4.07	29.55	31.39	---	---	Peak	6	958.29	31.94	-14.06	46.00	27.74	4.17	30.93	30.90	---	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	Read (dBuV)	CableAntenna Loss (dB)	Preamp Factor (dB/m)	Preamp (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	191.99	28.59	-14.91	43.50	44.03	1.87	14.86	32.17	---	---	Peak																																																																																																																																																															
2	240.49	32.52	-13.48	46.00	44.96	2.09	17.64	32.17	---	---	Peak																																																																																																																																																															
3	385.02	28.05	-17.95	46.00	36.26	2.65	21.38	32.24	---	---	Peak																																																																																																																																																															
4	482.02	29.36	-16.64	46.00	35.38	2.96	23.67	32.65	---	---	Peak																																																																																																																																																															
5	699.30	26.66	-19.34	46.00	28.64	3.58	26.70	32.26	---	---	Peak																																																																																																																																																															
6	913.67	30.00	-16.00	46.00	27.68	4.07	29.62	31.37	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Over (dB)	Limit (dBuV/m)	Read (dBuV)	CableAntenna Loss (dB)	Preamp Factor (dB/m)	Preamp (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																																																																																																															
1	332.64	25.67	-20.33	46.00	35.44	2.46	19.97	32.20	---	---	Peak																																																																																																																																																															
2	385.02	27.74	-18.26	46.00	35.95	2.65	21.38	32.24	---	---	Peak																																																																																																																																																															
3	559.62	29.59	-16.41	46.00	33.39	3.19	25.48	32.47	---	---	Peak																																																																																																																																																															
4	744.89	27.97	-18.03	46.00	28.41	3.69	28.05	32.18	---	---	Peak																																																																																																																																																															
5	911.73	30.01	-15.99	46.00	27.78	4.07	29.55	31.39	---	---	Peak																																																																																																																																																															
6	958.29	31.94	-14.06	46.00	27.74	4.17	30.93	30.90	---	---	Peak																																																																																																																																																															

## Appendix D. Duty Cycle Plots

Mode	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee CH11	70.29	1.797	0.556	0.62KHz
Zigbee CH12	70.86	1.797	0.556	0.62KHz
Zigbee CH19	70.86	1.797	0.556	0.62KHz
Zigbee CH25	70.86	1.797	0.556	0.62KHz
Zigbee CH26	100	-	-	10Hz


### Zigbee CH11 mode

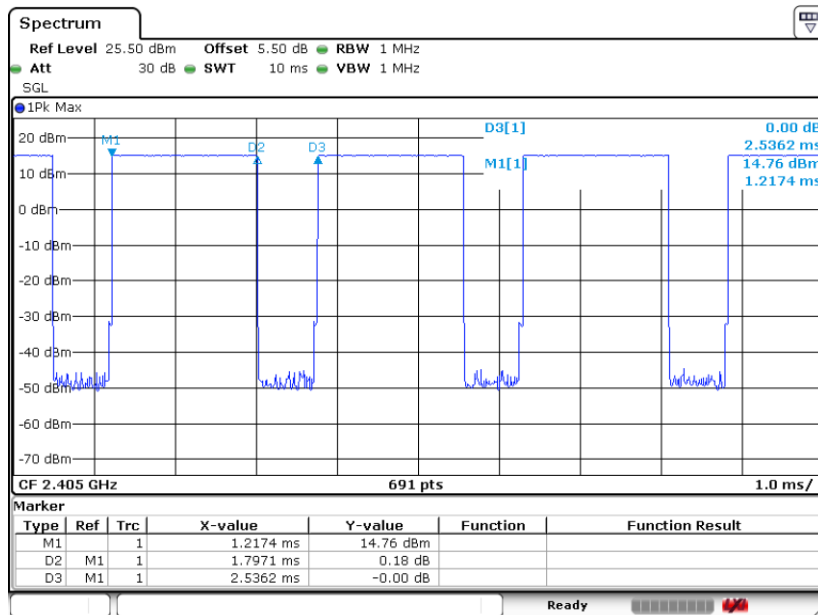






Zigbee CH12 mode

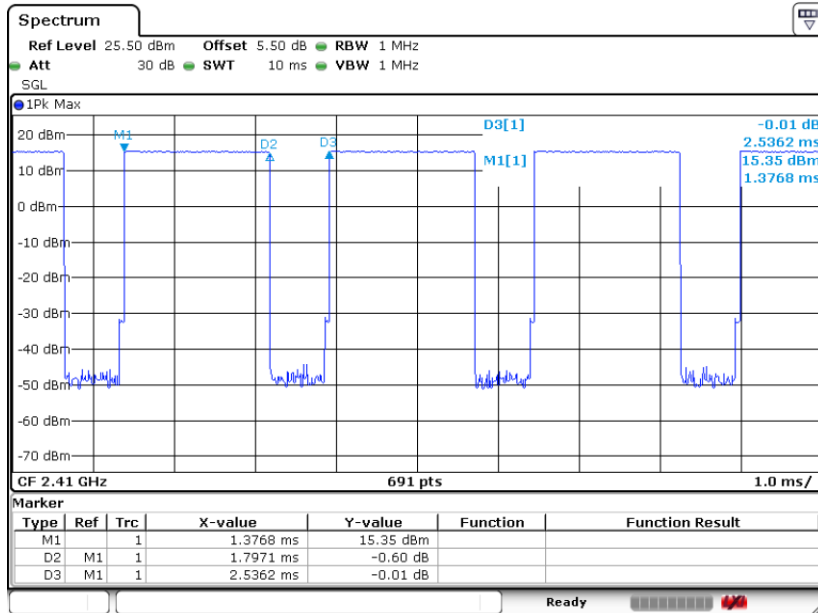


Zigbee CH19 mode

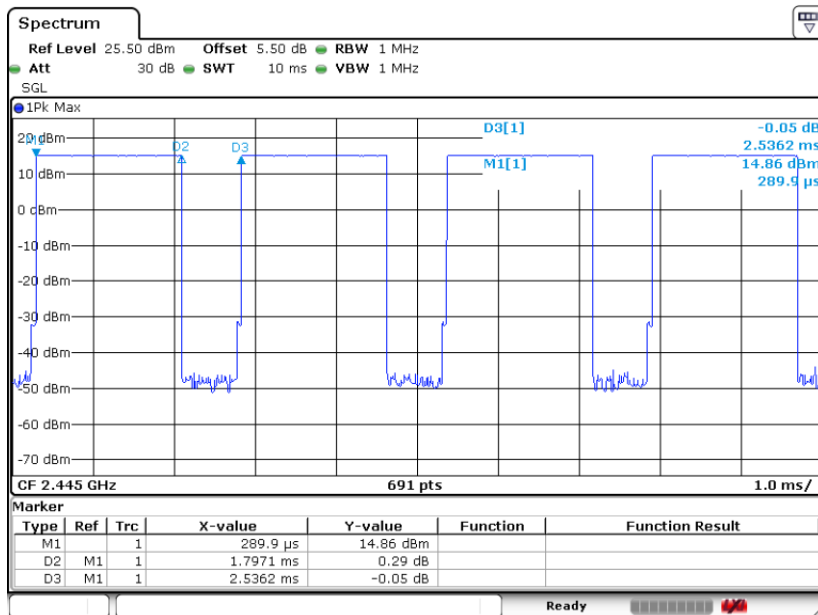



Zigbee CH25 mode

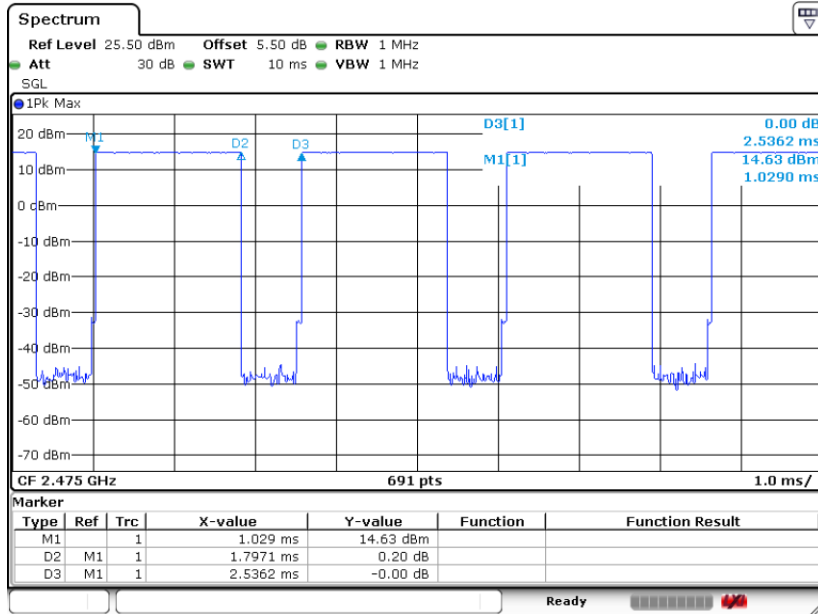

Zigbee CH26 mode

