



**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15 C (15.225)

**Report Reference No.** ..... : **GTS20200512007-1-1**

**FCC ID.** ..... : **2AOFJ-UR5000-MT-6**

Compiled by  
( position+printed name+signature) .: File administrators Tracy Hu

*Tracy Hu*

Supervised by  
( position+printed name+signature) .: Test Engineer Moon Tan



*Moon Tan*

Approved by  
( position+printed name+signature) .: Manager Simon Hu

*Simon Hu*

Date of issue ..... : May. 16, 2020

**Representative Laboratory Name.:** **Shenzhen Global Test Service Co.,Ltd.**

Address ..... : No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

**Applicant's name.....:** **Shenzhen Digitalor Technology Co., Ltd**

Address ..... : Room305-2, Shen zhen IC Design&ApplicationIndustril Park, No.1089, Chaguang Rd, Nanshan District, Shenzhen, China

**Test specification** .....

Standard..... : **FCC Part 15 C (15.225)**

TRF Originator..... : Shenzhen Global Test Service Co.,Ltd.

Master TRF ..... : Dated 2014-12

**Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** ..... : **U-level Assets Management Module**

Trade Mark..... : N/A

Manufacturer ..... : **Shenzhen Digitalor Technology Co., Ltd**

Model/Type reference ..... : UR5000-MT-6

List Model ..... : UR5000-SL-6, UR5000-SL-5

Modulation Type..... : ASK

Operation Frequency ..... : 13.56 MHz

Hardware Version ..... : V2.0

Software Version..... : V2.0

Rating ..... : Adapter 1: Input: 100-240V~50/60Hz 1.0A MAX  
Output: 12V= 2500mA  
Adapter 2: Input: 100-240V~50/60Hz 2.0A MAX  
Output: 24V= 3A

Result ..... : **PASS**



## Contents

<b>1. TEST STANDARDS .....</b>	<b>4</b>
<b>2. SUMMARY .....</b>	<b>5</b>
2.1. General Remarks .....	5
2.2. Product Description .....	5
2.3. Equipment Under Test .....	5
2.4. Short description of the Equipment under Test (EUT) .....	5
2.5. Block Diagram of Test Setup .....	5
2.6. Related Submittal(s) / Grant (s) .....	6
2.7. Special Accessories .....	6
2.8. Modifications .....	6
<b>3. TEST ENVIRONMENT .....</b>	<b>7</b>
3.1. Address of the test laboratory .....	7
3.2. Test Facility .....	7
3.3. Environmental conditions .....	7
3.4. Summary of measurement results .....	7
3.5. Statement of the measurement uncertainty .....	8
3.6. Equipments Used during the Test .....	9
<b>4. RADIATED MEASUREMENT .....</b>	<b>10</b>
4.1. Standard Applicable .....	10
4.2. Measuring Instruments and Setting .....	10
4.3. Test Procedures .....	11
4.4. Test Setup Layout .....	13
4.5. Test Results .....	14
<b>5. FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT .....</b>	<b>17</b>
5.1. Block Diagram of Test Setup .....	17
5.2. Field strength of fundamental emissions limit and Mask limit .....	17
5.3. Test Results .....	18
<b>6. BANDWIDTH OF THE OPERATING FREQUENCY .....</b>	<b>19</b>
6.1. Standard Applicable .....	19
6.2. Test Result .....	19
<b>7. FREQUENCY STABILITY MEASUREMENT .....</b>	<b>20</b>
7.1. Standard Applicable .....	20
7.2. Test Result .....	20
<b>8. LINE CONDUCTED EMISSIONS .....</b>	<b>21</b>
8.1. Standard Applicable .....	21
8.2. Block Diagram of Test Setup .....	21
8.3. Test Results .....	21
<b>9. ANTENNA REQUIREMENTS .....</b>	<b>24</b>
9.1. Standard Applicable .....	24
9.2. Antenna Connected Construction .....	24
9.2.1. Standard Applicable .....	24
9.2.2. Antenna Connector Construction .....	24
9.2.3. Results: Compliance. ....	24
<b>10. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>25</b>
<b>11. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>25</b>

## 1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.225](#): RADIO FREQUENCY DEVICES.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	May. 14, 2020
Testing commenced on	:	May. 14, 2020
Testing concluded on	:	May. 16, 2020

### 2.2. Product Description

Product Name	U-level Assets Management Module
Trade Mark	N/A
Model/Type reference	UR5000-MT-6
List Model	UR5000-SL-6, UR5000-SL-5
Model Declaration	PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Power supply:	Adapter 1: Input: 100-240V~50/60Hz 1.0A MAX Output: 12V $\overline{\text{---}}$ 2500mA Adapter 2: Input: 100-240V~50/60Hz 2.0A MAX Output: 24V $\overline{\text{---}}$ 3A
Sample ID	GTS20200512007-1-1 #
RFID(13.56MHz)	
Frequency Range	13.56MHz
Channel Number	1
Modulation Type	ASK
Antenna Description	Internal Antenna, 0.00dBi (Max.)

### 2.3. Equipment Under Test

#### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input checked="" type="radio"/> 12 V DC	<input checked="" type="radio"/> 24 V DC
		<input type="radio"/> Other (specified in blank below)	


DC 12V from Adapter 1, DC 24V from Adapter 2

### 2.4. Short description of the Equipment under Test (EUT)

This is a U-level Assets Management Module

For more details, refer to the user's manual of the EUT.

### 2.5. Block Diagram of Test Setup

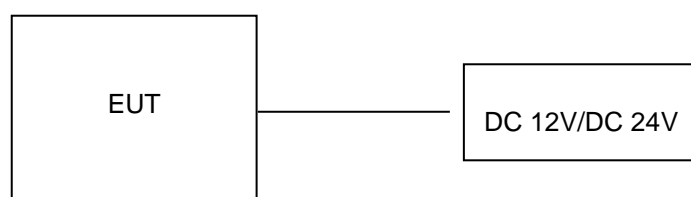

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AOFJ-UR5000-MT-6** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.7. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen City Yunsheng Plastic Electronics Co.,Ltd	Adapter 1	YS04-120250D	--	SDOC
Shenzhen Simsukian Electronics Technology Co.,Ltd	Adapter 2	SK08T-2400300W2	--	SDOC

## 2.8. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST ENVIRONMENT

#### 3.1. Address of the test laboratory

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

#### 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

#### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

#### 3.4. Summary of measurement results

Applied Standard: FCC Part 15 Subpart C			
Test Items	FCC Rules	Test Sample	Result
Line Conducted Emissions	§15.207(a)	GTS20200512007-1-1 #	PASS
Field Strength of Fundamental Emissions	§15.225(a)(b)(c)	GTS20200512007-1-1 #	PASS
Radiated Emissions	§15.225(d) & §15.209	GTS20200512007-1-1 #	PASS
20dB Bandwidth	§ 15.215	GTS20200512007-1-1 #	PASS
Frequency Stability	§15.225(e)	GTS20200512007-1-1 #	PASS
Antenna Requirement	§15.203	GTS20200512007-1-1 #	PASS

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



### 3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESPI3	101841-cd	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSV40	100019	2019/09/20	2020/09/19
Vector Signal generator	Agilent	N5181A	MY49060502	2019/09/20	2020/09/19
Signal generator	Agilent	E4421B	3610AO1069	2019/09/20	2020/09/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/23	2020/09/22
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2019/10/12	2020/10/11
Bilog Antenna	Schwarzbeck	VULB9163	000976	2019/05/26	2020/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV9179	9719-025	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
Test Control Unit	Tonscend	JS0806-1	178060067	2019/06/20	2020/06/19
Automated filter bank	Tonscend	JS0806-F	19F8060177	2019/06/20	2020/06/19
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

## 4. RADIATED MEASUREMENT

### 4.1. Standard Applicable

According to §15.209/ §15.205

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 4.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 2) Sequence of testing 30 MHz to 1 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

##### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 4) Sequence of testing above 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.




#### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

#### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### 4.4. Test Setup Layout

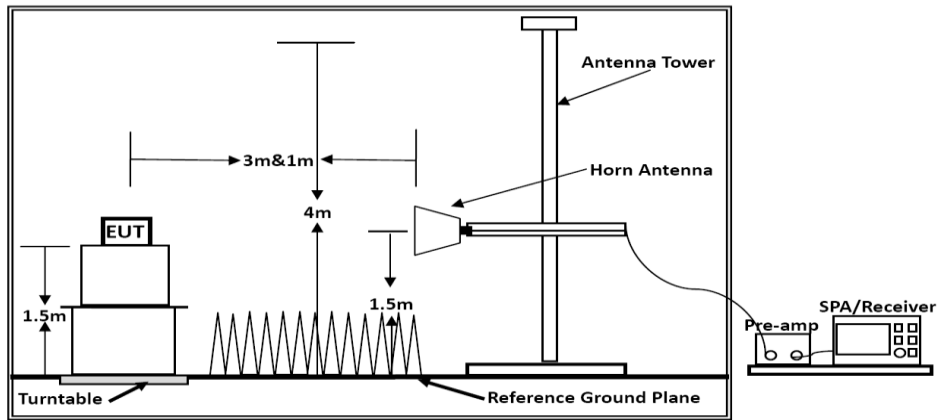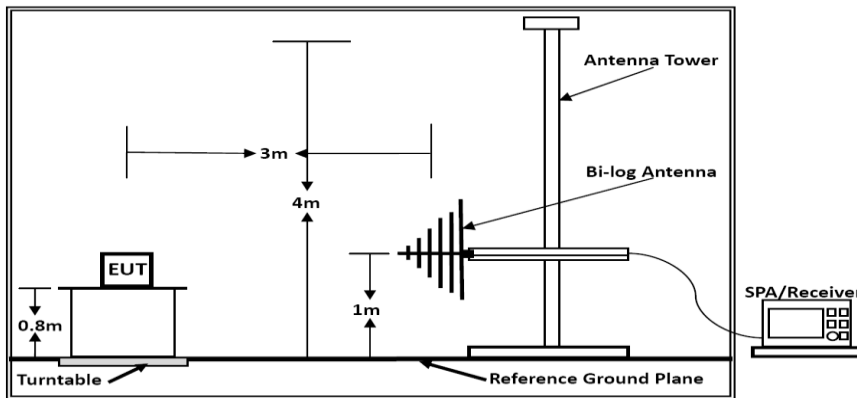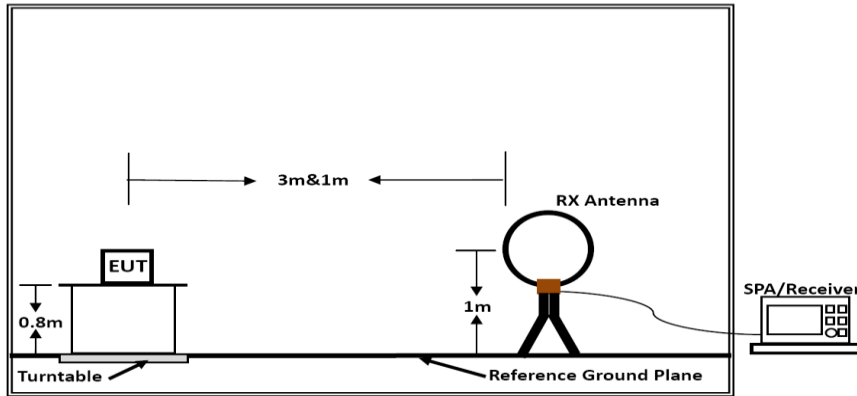

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

**4.5. Test Results**

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Moon Tan	Configurations	NFC

PASS.

The test data please refer to following page:

**9 KHz~30MHz****Adapter 1:**

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.64	--	--	--	71.48	--	--
1.62	--	--	--	63.41	--	--
2.66	19.45	20.76	40.21	69.5	29.29	QP
7.23	22.38	20.78	43.16	69.5	26.34	QP
13.56	39.29	20.64	59.93	124	64.07	QP
19.86	22.01	20.78	42.79	69.5	26.71	QP
20.87	23.76	20.43	44.19	69.5	25.31	QP
26.55	20.16	20.41	40.57	69.5	28.93	QP

**Adapter 2:**

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.64	--	--	--	71.48	--	--
1.62	--	--	--	63.41	--	--
2.62	20.16	20.74	40.9	69.5	28.6	QP
7.33	23.11	20.68	43.79	69.5	25.71	QP
13.56	41.56	20.71	62.27	124	61.73	QP
19.94	23.09	20.69	43.78	69.5	25.72	QP
21.06	22.07	20.42	42.49	69.5	27.01	QP
25.64	23.62	20.39	44.01	69.5	25.49	QP

\*Note: Emission Level= Reading Level + Antenna Factor + Cable Loss

Margin = Emission Level Limit – Measured Values


“--” means noise floor.

30MHz ~ 1GHz

Adapter 1:

Horizontal

Test Graph

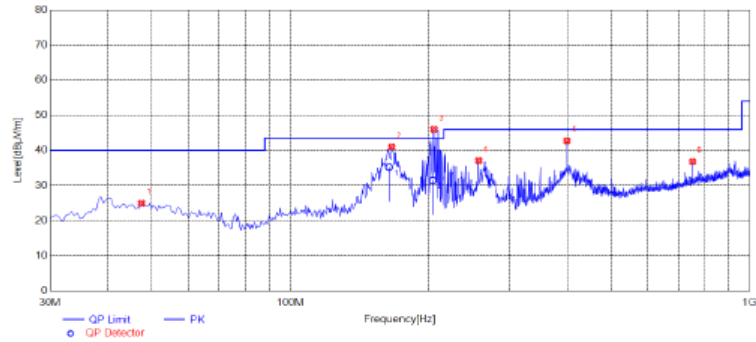

Suspected List

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	47.4600	31.47	-6.51	24.96	40.00	15.04	100	54	PK	Horizontal	PASS
2	166.2850	52.42	-11.43	40.99	43.50	2.51	100	277	PK	Horizontal	PASS
3	205.5700	55.41	-9.42	45.99	43.50	-2.49	100	32	PK	Horizontal	FAIL
4	256.9800	45.17	-8.10	37.07	46.00	8.93	100	336	PK	Horizontal	PASS
5	400.0550	48.05	-5.32	42.73	46.00	3.27	100	26	PK	Horizontal	PASS
6	750.2250	36.35	0.44	36.79	46.00	9.21	100	325	PK	Horizontal	PASS

Quasi-peak Final Data List


NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
1	164.1566	46.83	-11.61	35.22	43.50	8.28	185.8	256.1	Horizontal	PASS
2	204.1927	40.84	-9.38	31.46	43.50	12.04	164.7	21.5	Horizontal	PASS

Note:1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

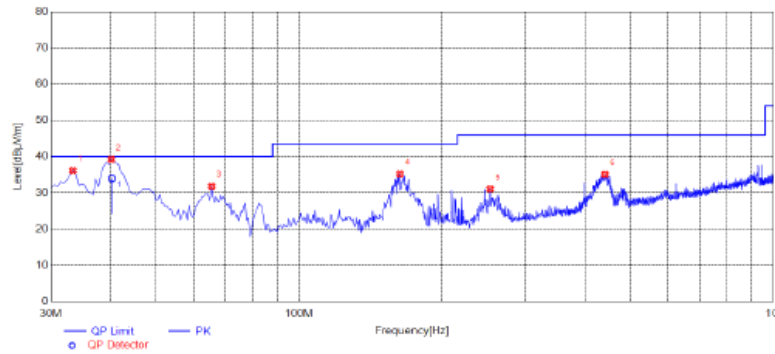

Suspected List

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	33.3950	46.03	-9.87	36.16	40.00	3.84	100	83	PK	Vertical	PASS
2	40.1850	46.72	-7.48	39.24	40.00	0.76	100	348	PK	Vertical	PASS
3	65.4050	41.23	-9.41	31.82	40.00	8.18	100	284	PK	Vertical	PASS
4	163.3750	46.84	-11.64	35.20	43.50	8.30	100	348	PK	Vertical	PASS
5	253.1000	39.34	-8.26	31.08	46.00	14.92	100	218	PK	Vertical	PASS
6	441.7650	39.70	-4.62	35.08	46.00	10.92	100	317	PK	Vertical	PASS

Quasi-peak Final Data List

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
1	40.3297	41.41	-7.43	33.98	40.00	6.02	102	313.5	Vertical	PASS


Note:1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter 2:

Horizontal

Test Graph

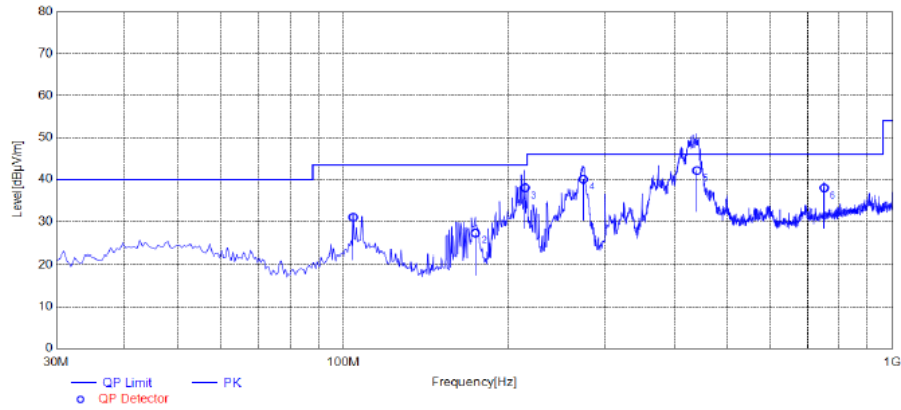

Quasi-peak Final Data List


NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
1	104.2050	39.23	-8.22	31.01	43.50	12.49	100	358	Horizontal	PASS
2	174.0450	38.39	-11.19	27.20	43.50	16.30	100	71	Horizontal	PASS
3	214.3000	47.52	-9.48	38.04	43.50	5.46	100	36	Horizontal	PASS
4	273.4700	47.89	-7.86	40.03	46.00	5.97	100	247	Horizontal	PASS
5	440.3100	46.8	-4.68	42.12	46.00	3.88	100	226	Horizontal	PASS
6	750.2250	37.56	0.44	38.00	46.00	8.00	100	36	Horizontal	PASS

Note: 1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

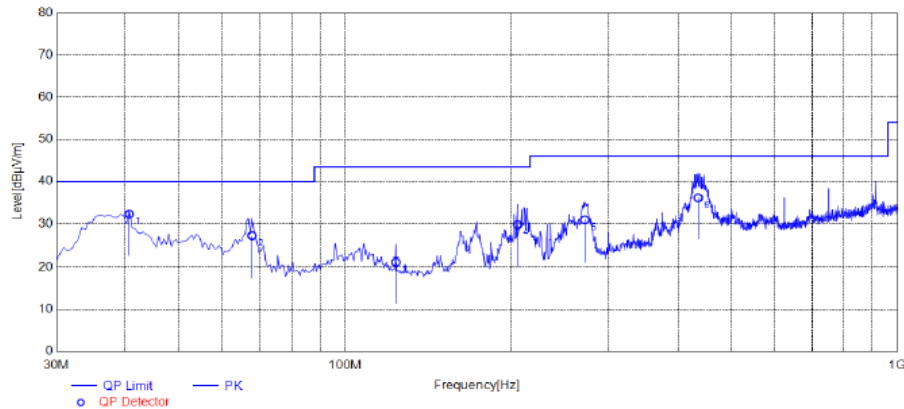

Quasi-peak Final Data List

NO.	Frequency [MHz]	Reading [dBµV/m]	Factor [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Remark
1	40.6700	39.56	-7.32	32.24	40.00	7.76	100	305	Vertical	PASS
2	67.8300	36.47	-9.34	27.13	40.00	12.87	100	283	Vertical	PASS
3	123.6050	32.26	-11.15	21.11	43.50	22.39	100	207	Vertical	PASS
4	205.0850	39.23	-9.42	29.81	43.50	13.69	100	331	Vertical	PASS
5	271.5300	38.76	-7.86	30.90	46.00	15.10	100	336	Vertical	PASS
6	435.4600	40.86	-4.71	36.15	46.00	9.85	100	2	Vertical	PASS


Note: 1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).




## 5. FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT

### 5.1. Block Diagram of Test Setup

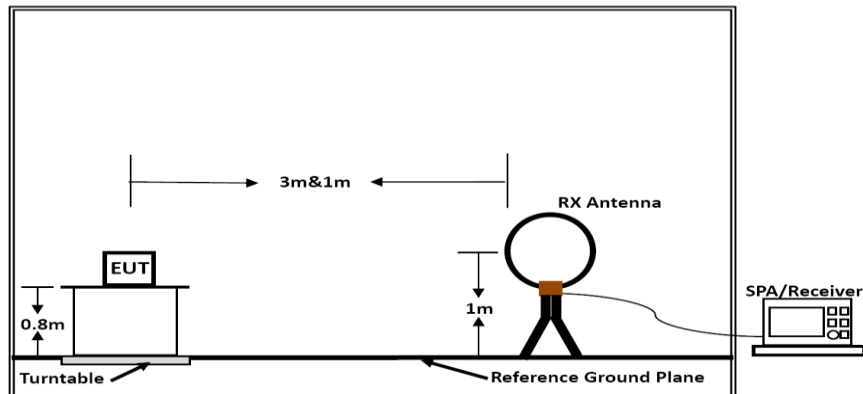

Below 30MHz

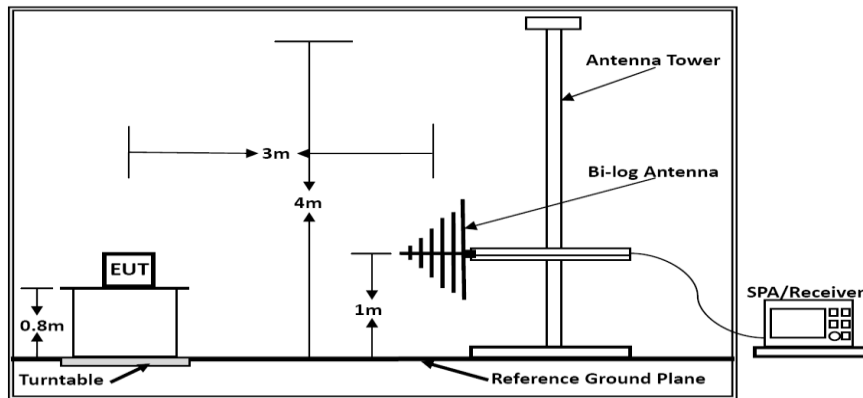

Below 1GHz

### 5.2. Field strength of fundamental emissions limit and Mask limit

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask Limit:

Frequency (MHz)	Limit (dB $\mu$ V/m)	Distance (m)
1.705-13.110	69.5	3
13.110-13.410	80.5	3
13.410-13.553	90.5	3
13.553-13.567	124.0	3
13.567-13.710	90.5	3
13.710-14.010	80.5	3
14.010-30.000	69.5	3

**5.3. Test Results**

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Moon Tan	Configurations	NFC

PASS.

The test data please refer to following page:

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Pol.	Remark
1	13.56	55.35	20.64	75.99	124	H	QP
2	13.45	46.34	20.64	66.98	90.5	H	QP
3	13.39	42.37	20.64	63.01	80.5	H	QP
4	13.66	43.87	20.64	64.51	90.5	H	QP
5	13.89	38.69	20.64	59.33	80.5	H	QP

\*Note: Factor= Antenna Factor + Cable Loss

Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

## 6. BANDWIDTH OF THE OPERATING FREQUENCY

### 6.1. Standard Applicable


Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

### 6.2. Test Result

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Moon Tan	Configurations	NFC

Carrier Frequency (MHz)	20dB Bandwidth (KHz)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)
13.56	2.1	13.559276	13.561389

Please refer to the test plot:

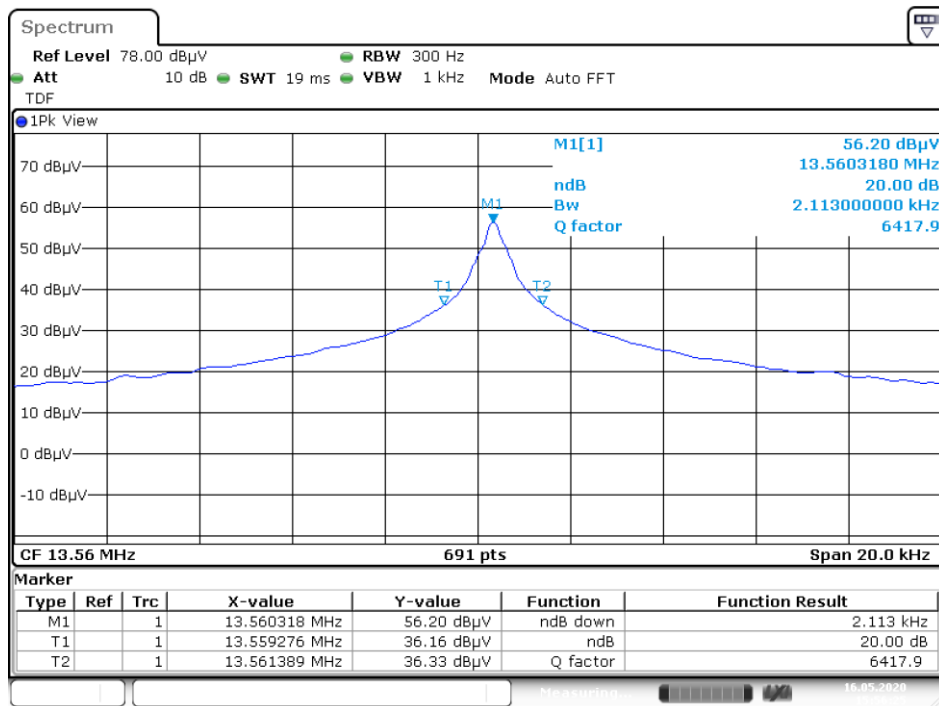

Date: 16.MAY.2020 15:56:24

## 7. FREQUENCY STABILITY MEASUREMENT

### 7.1. Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a full charged battery.

### 7.2. Test Result

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Moon Tan	Configurations	NFC

#### Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
AC 102V	13.56048	0.48	35.4	100
AC 120V	13.56025	0.25	18.44	100
AC 138V	13.56036	0.36	26.55	100

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
-20	13.56017	0.17	12.54	100
-10	13.56017	0.17	12.54	100
0	13.56031	0.31	22.86	100
10	13.56017	0.17	12.54	100
20	13.56042	0.42	30.97	100
30	13.56003	0.03	2.21	100
40	13.56029	0.29	21.39	100
50	13.5602	0.2	14.75	100

## 8. LINE CONDUCTED EMISSIONS


### 8.1. Standard Applicable

According to §15.207(a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 8.2. Block Diagram of Test Setup

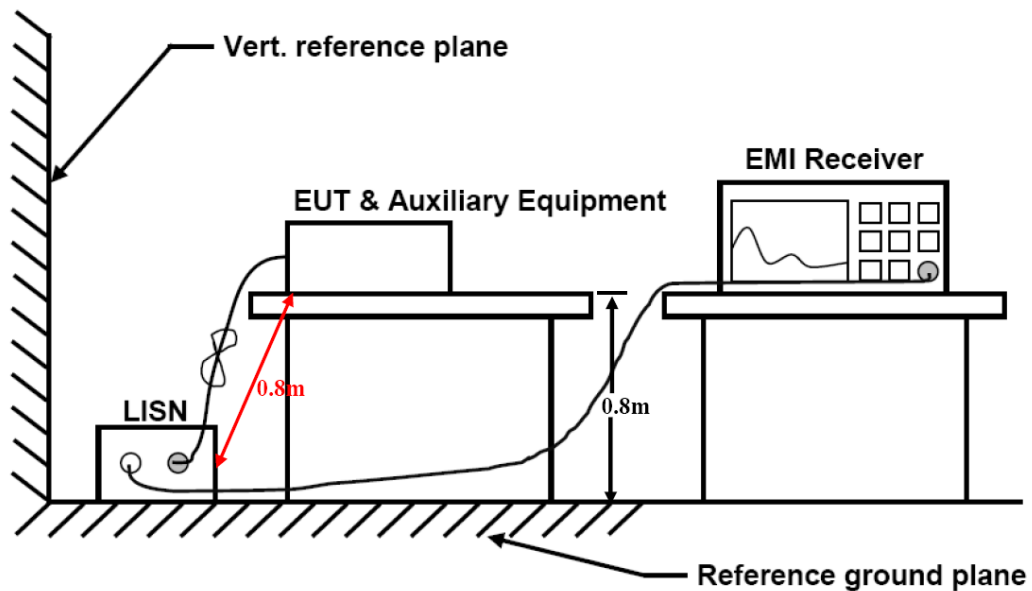



### 8.3. Test Results

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Moon Tan	Configurations	NFC

**PASS.**

The test data please refer to following page.


AC Conducted Emission of charge from adapter mode @ AC 120V/60Hz (worst case)  
 Adapter 1:

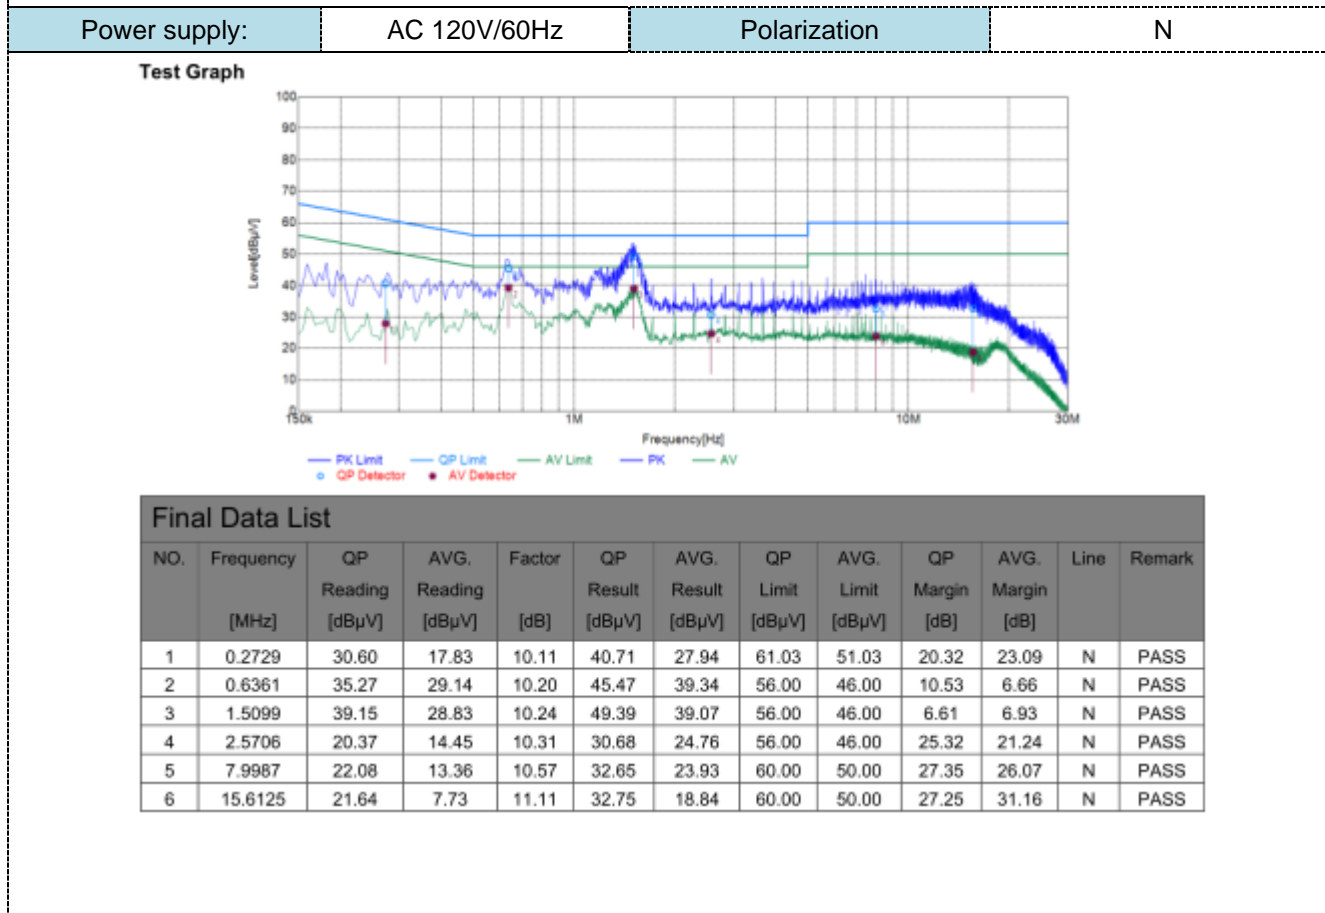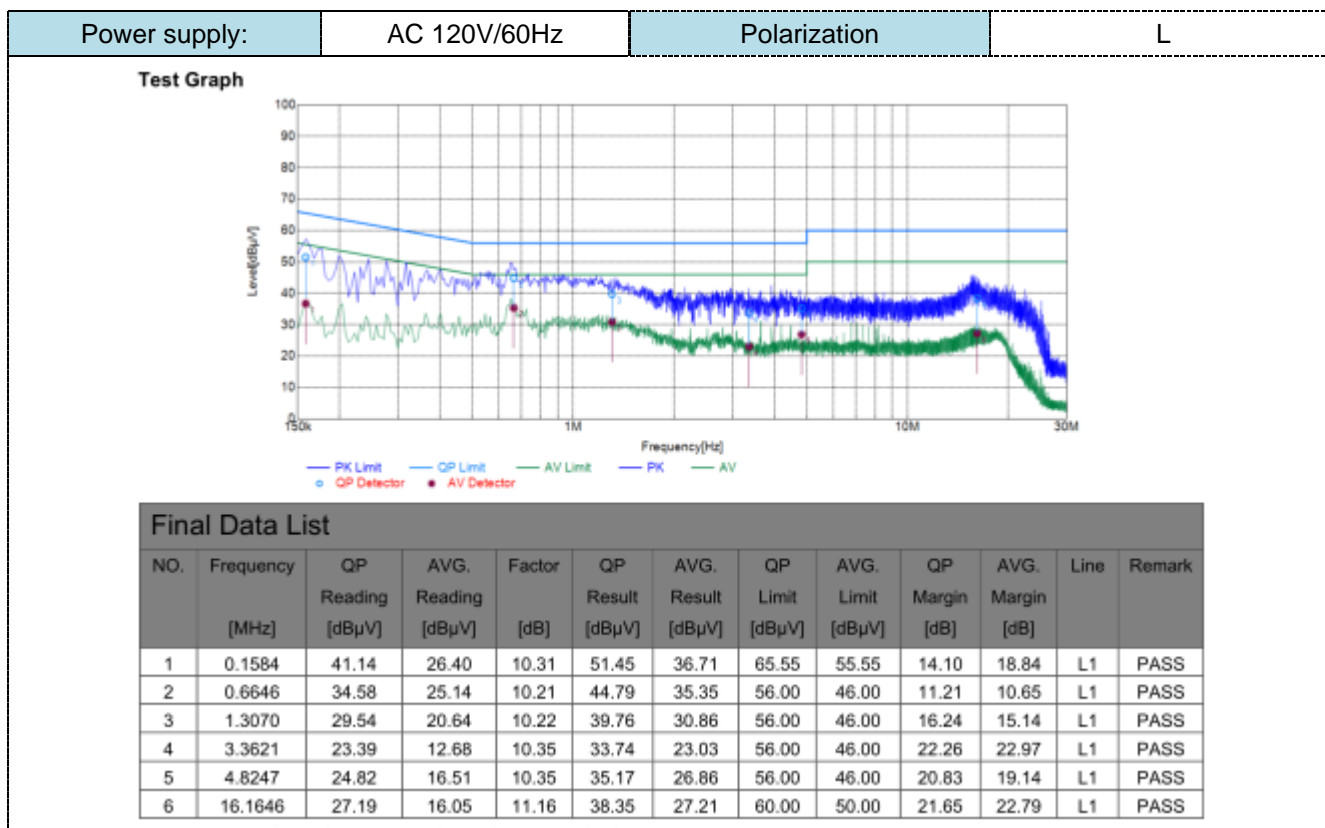

Adapter 2:

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

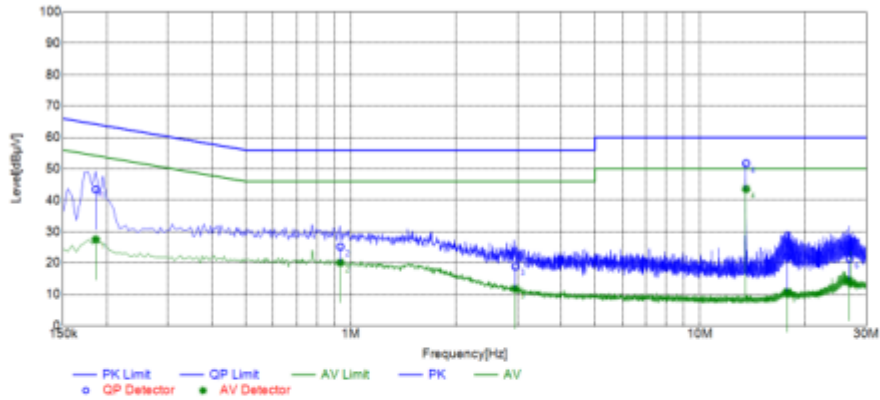


Final Data List

NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1859	33.41	17.41	10.06	43.47	27.47	64.22	54.22	20.75	26.75	L1	PASS
2	0.9331	15.13	10.07	10.06	25.19	20.13	56.00	46.00	30.81	25.87	L1	PASS
3	2.9619	8.63	1.54	10.29	18.92	11.83	56.00	46.00	37.08	34.17	L1	PASS
4	13.5605	40.8	32.64	10.95	51.75	43.59	60.00	50.00	8.25	6.41	L1	PASS
5	17.7682	10.69	-0.55	11.30	21.99	10.75	60.00	50.00	38.01	39.25	L1	PASS
6	26.8073	9.61	2.70	11.73	21.34	14.43	60.00	50.00	38.66	35.57	L1	PASS

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

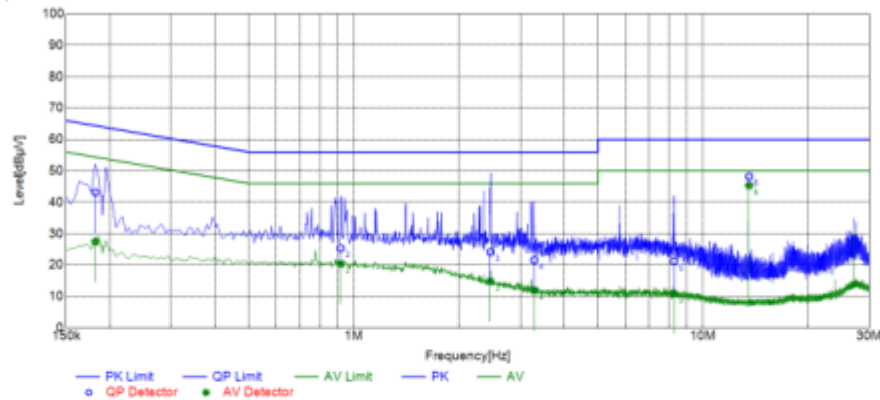

Final Data List

NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1819	33.06	17.35	10.06	43.12	27.41	64.40	54.40	21.28	26.99	N	PASS
2	0.9169	15.33	10.33	10.06	25.39	20.39	56.00	46.00	30.61	25.61	N	PASS
3	2.4616	13.91	4.59	10.22	24.13	14.81	56.00	46.00	31.87	31.19	N	PASS
4	3.2863	11.27	1.62	10.32	21.59	11.94	56.00	46.00	34.41	34.06	N	PASS
5	8.2585	10.56	0.30	10.63	21.19	10.93	60.00	50.00	38.81	39.07	N	PASS
6	13.5608	37.30	34.41	10.95	48.25	45.36	60.00	50.00	11.75	4.64	N	PASS

## **9. ANTENNA REQUIREMENTS**

### **9.1. Standard Applicable**

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### **9.2. Antenna Connected Construction**

#### 9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 0dBi, and the antenna is a Loop antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 9.2.3. Results: Compliance.



**10. TEST SETUP PHOTOS OF THE EUT**

Reference to the TEST SETUP PHOTOS

**11. EXTERNAL AND INTERNAL PHOTOS OF THE EUT**

Reference to the EXTERNAL AND INTERNAL PHOTOS

.....End of Report.....