



# FCC Radio Test Report

## FCC ID: 2AOHHTURBOXC7230C

This report concerns: **Class II Permissive Change**

**Project No.** : 2307C207A  
**Equipment** : Smart Module  
**Brand Name** : TurboX  
**Test Model** : C7230C  
**Series Model** : N/A  
**Applicant** : Thundercomm Technology Co., Ltd  
**Address** : No. 107, Middle Datagu Road, Xiantao Street, Yubei District,  
Chongqing, China, 401122  
**Manufacturer** : Thundercomm Technology Co., Ltd  
**Address** : No. 107, Middle Datagu Road, Xiantao Street, Yubei District,  
Chongqing, China, 401122  
**Factory** : Thundercomm Technology Co., Ltd  
**Address** : No. 107, Middle Datagu Road, Xiantao Street, Yubei District,  
Chongqing, China, 401122  
**Date of Receipt** : Apr. 17, 2024  
**Date of Test** : Apr. 19, 2024 ~ May 16, 2024  
**Issued Date** : May 28, 2024  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG20240417147  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

**Prepared by** : Chella Zheng  
Chella Zheng

**Approved by** : Chay Cai  
Chay Cai

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong,  
People's Republic of China

Tel: +86-769-8318-3000    Web: [www.newbtl.com](http://www.newbtl.com)    Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>4</b>
<b>1 . APPLICABLE STANDARDS</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
2.3 TEST ENVIRONMENT CONDITIONS	6
<b>3 . GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 SUPPORT UNITS	9
3.5 CUSTOMER INFORMATION DESCRIPTION	9
<b>4 . RADIATED EMISSIONS</b>	<b>10</b>
4.1 LIMIT	10
4.2 TEST PROCEDURE	10
4.3 DEVIATION FROM TEST STANDARD	11
4.4 TEST SETUP	11
4.5 EUT OPERATING CONDITIONS	11
4.6 TEST RESULTS - ABOVE 1000 MHZ	11
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>12</b>
<b>6 . EUT TEST PHOTO</b>	<b>13</b>
<b>APPENDIX A - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>14</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2307C207A	R00	Original Report.	May 28, 2024	Valid

## 1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX A	PASS	-----

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The worst cases of radiated emissions above 1GHz have been re-evaluated by sample of FCC ID: 2AOHHTURBOXC7230C, model name: C7230C. It is found that the new data are the worse, so the test data are reissue from the FCC ID: 2AOHHTURBOXC7230C, model name: C7230C.  
Model difference(s):
  - a. Changed the software.
  - b. Added point-to-point connection capabilities for 2.4G and 5G WIFI UNII-1 and UNII-3, which frequencies support both client and master.
- (3) The other test records and results please refer to the test report number: RF230731014-01-002, issued date is Aug. 31, 2023, and issued by:  
Test Laboratory: Shenzhen Haiyun Standard Technical CO., Ltd.  
Address: Room 110,111,112,113,115,116,Block B,Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China.

Which was accredited by A2LA, accreditation number is 6823.01, with the scopes of cited standards in this test report.

This report is only valid conjunction with the above referenced test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor ( $k=2$ ))

The BTL measurement uncertainty as below table:

### A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	$U$ , (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

## 2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Radiated Emissions- Above 1000 MHz	21°C	56%	AC 120V/60Hz	Jensen Zhou	May 16, 2024

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Module
Brand Name	TurboX
Test Model	C7230C
Series Model	N/A
Model Difference(s)	N/A
Power Rating	INPUT: 100-240V~ 50/60Hz 1.5A OUTPUT: 5.0V === 3.0A 15.0W; 9.0V === 3.0A 27W; 15.0V === 3.0A 45.0W; 20V === 2.25A 45.0W
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps, 2Mbps

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

#### 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

#### 3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PIFA	N/A	3.35

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.


Pretest Mode	Description
Mode 1	TX Mode_2Mbps Channel 00
Mode 2	TX Mode_2Mbps Channel 39

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_2Mbps Channel 00
Mode 2	TX Mode_2Mbps Channel 39



### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

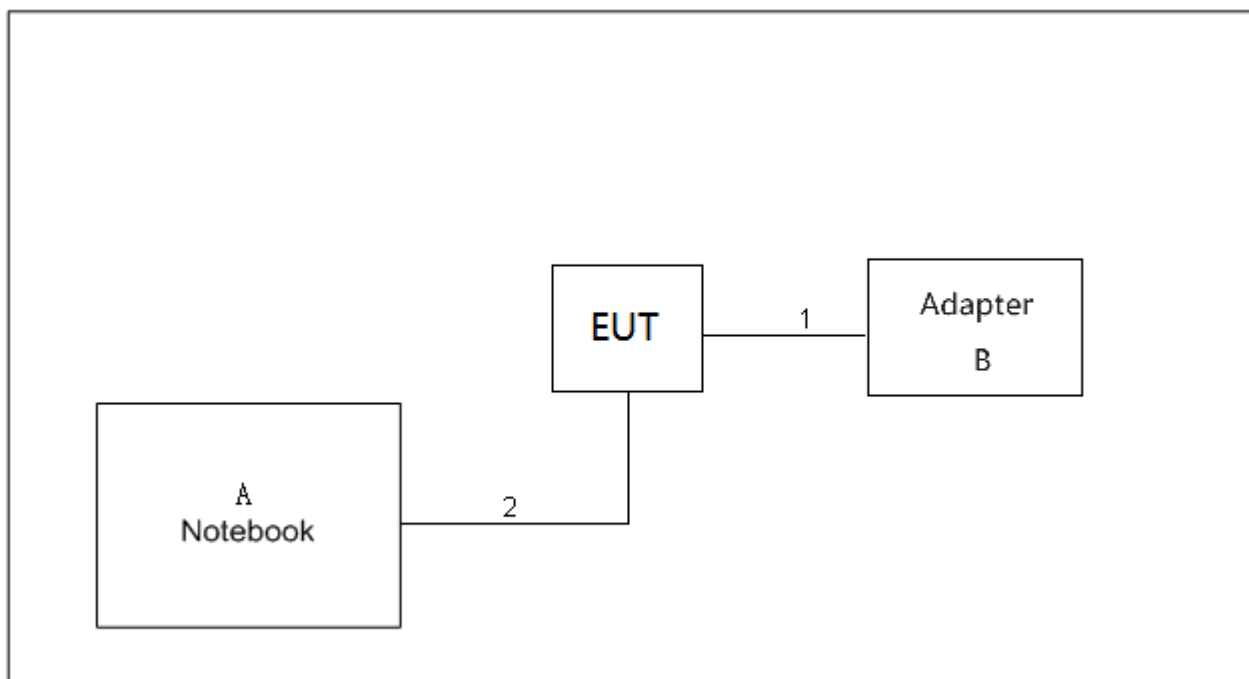

### 3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	Air14	N/A
B	Adapter	CWT	S1C045DC	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Type C Cable	NO	NO	2m
2	Type C Cable	NO	NO	2m

### 3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
 Margin Level = Measurement Value - Limit Value

### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- e. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:


Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

Spectrum Parameters	Setting
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

#### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4 TEST SETUP

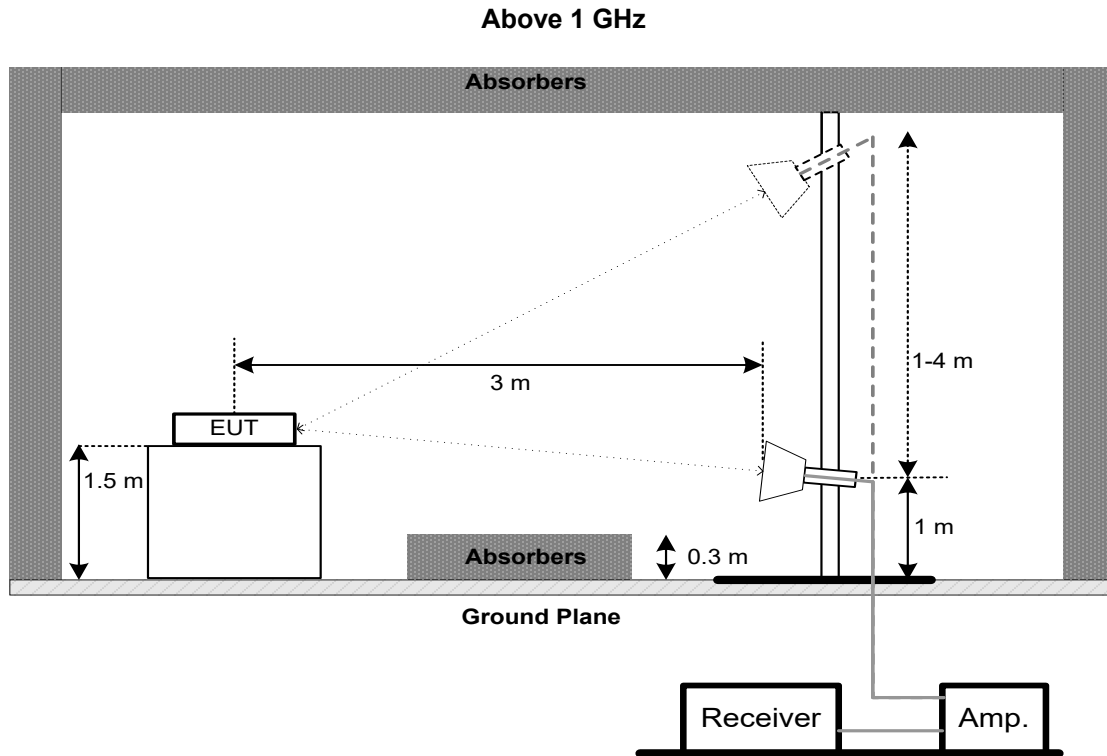

#### 4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.6 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX A.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Dec. 22, 2024
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	Nov. 17, 2024
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Nov. 17, 2024
4	Double Ridged Guide Antenna	ETS	3115	75789	May 31, 2024
5	Cable	RegalWay	RWLP50-4.0A-SMSM-1 2.5M	N/A	N/A
6	Cable	RegalWay	RWLP50-4.0A-NMRAS M-2.5M	N/A	N/A
7	Cable	RegalWay	RWLP50-4.0A-NMRAS MRA-0.8M	N/A	N/A
8	966 Chamber room	CM	9*6*6	N/A	May 17, 2024
9	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Jun. 16, 2024
11	Positioning Controller	MF	MF-7802	N/A	N/A
12	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A



Remark "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## 6. EUT TEST PHOTO


### Radiated Emissions Test Photos

#### Above 1 GHz

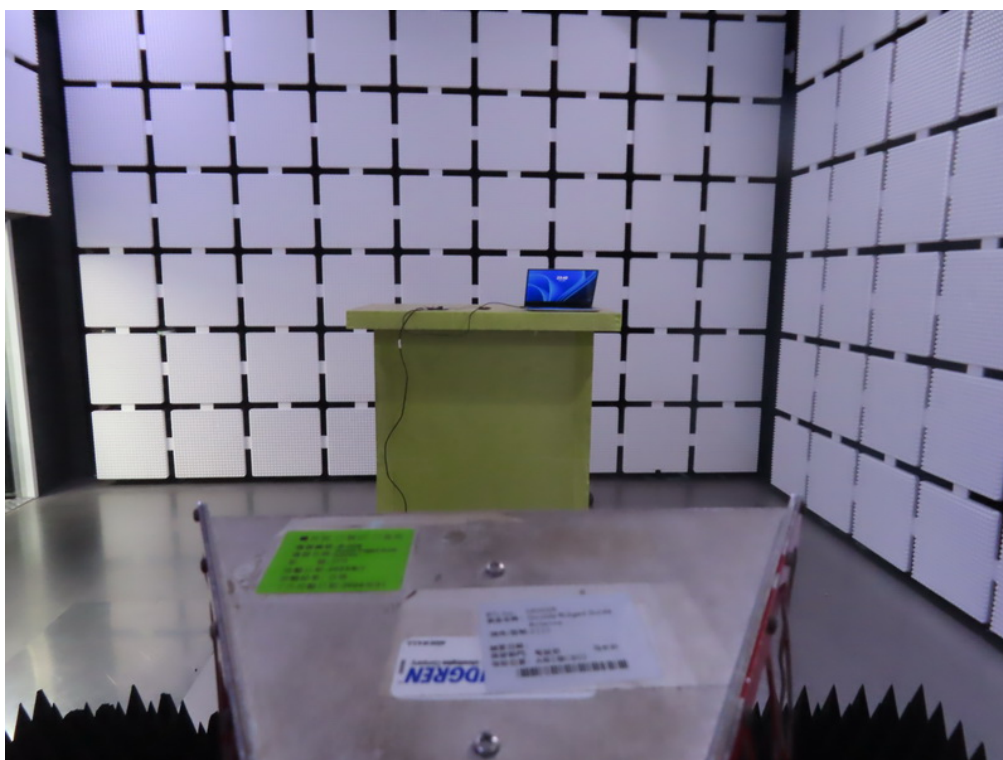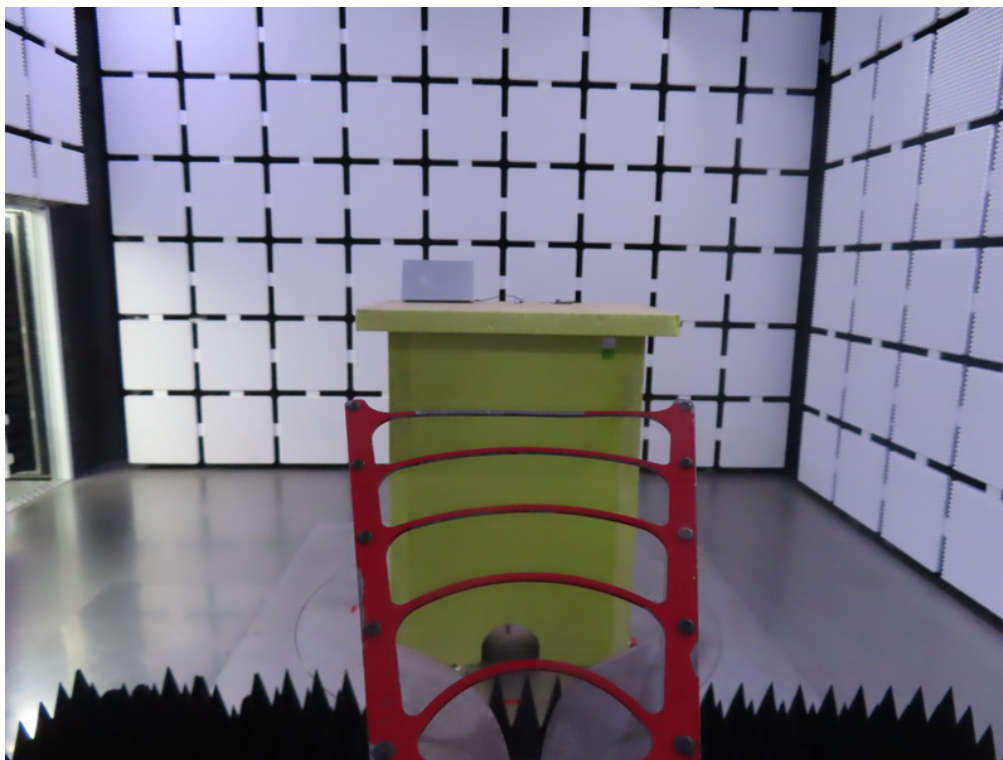

## **APPENDIX A - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

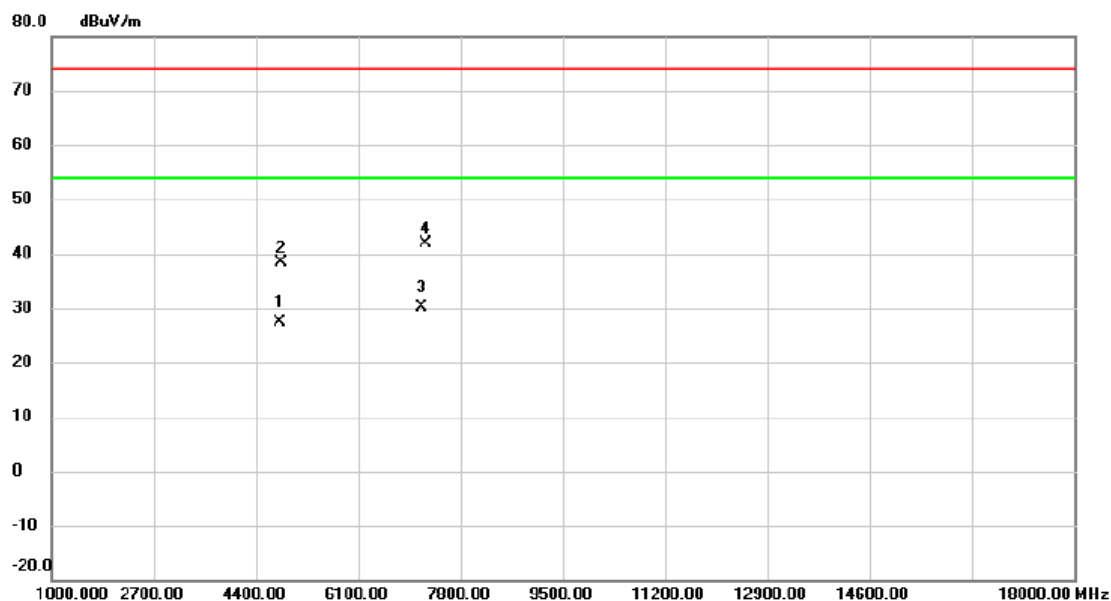


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4799.425	26.83	0.65	27.48	54.00	-26.52	AVG	
2		4827.575	37.53	0.73	38.26	74.00	-35.74	peak	
3	*	7162.650	24.30	5.90	30.20	54.00	-23.80	AVG	
4		7230.850	36.06	5.91	41.97	74.00	-32.03	peak	

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2402 MHz _CH00_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

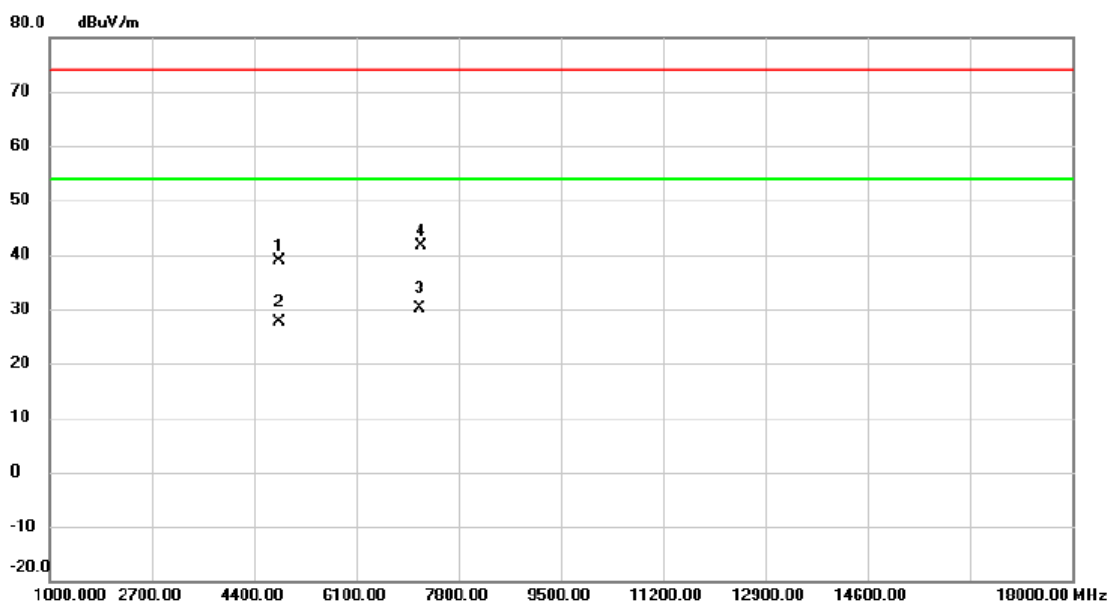

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4811.125	38.15	0.68	38.83	74.00	-35.17	peak	
2		4827.625	26.82	0.73	27.55	54.00	-26.45	AVG	
3	*	7156.650	24.11	5.90	30.01	54.00	-23.99	AVG	
4		7187.650	35.64	5.90	41.54	74.00	-32.46	peak	


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value



Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Vertical
-----------	-------------------------	--------------	----------

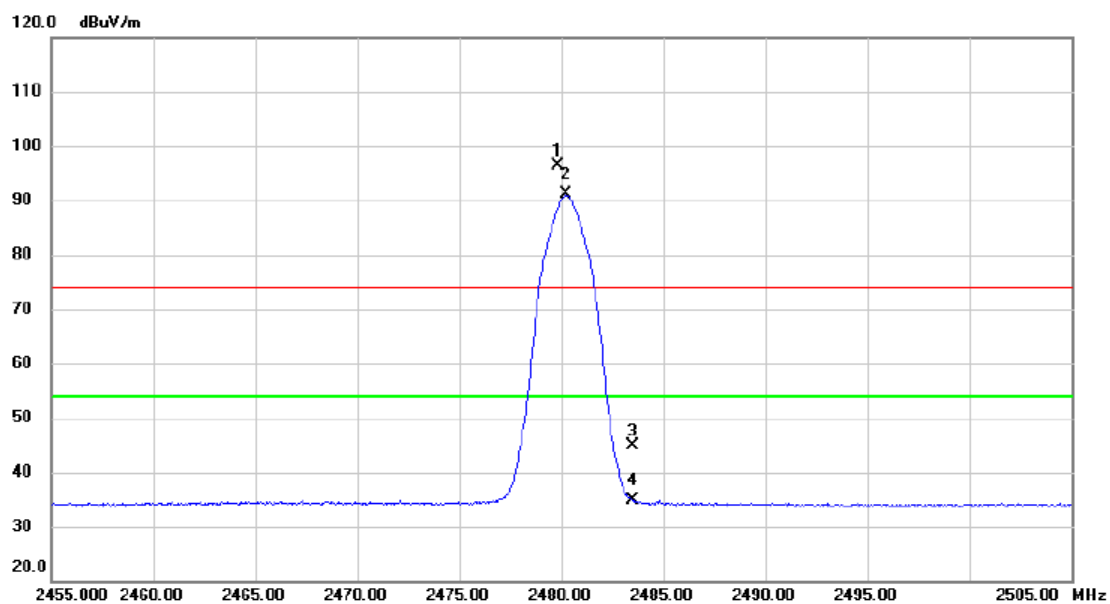


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2479.825	90.28	6.00	96.28	74.00	22.28	peak	No Limit
2	*	2480.250	85.04	6.00	91.04	54.00	37.04	AVG	No Limit
3		2483.500	38.84	5.99	44.83	74.00	-29.17	peak	
4		2483.500	28.91	5.99	34.90	54.00	-19.10	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2480 MHz _CH39_2Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

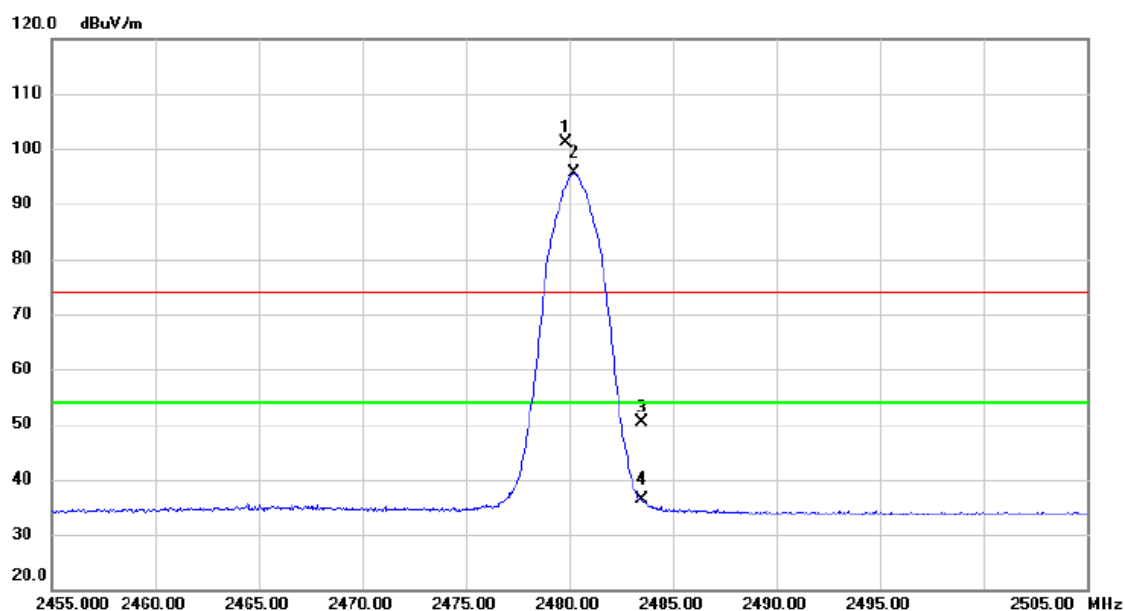

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2479.825	95.05	6.00	101.05	74.00	27.05	peak	No Limit
2	*	2480.250	89.71	6.00	95.71	54.00	41.71	AVG	No Limit
3		2483.500	44.30	5.99	50.29	74.00	-23.71	peak	
4		2483.500	30.39	5.99	36.38	54.00	-17.62	AVG	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

End of Test Report