

# FCC SAR Measurement and Test Report

For

**WGI TELECOM INC**

**1786 NORTH COMMERCE PARKWAY, WESTON, FL, U.S.A.**

**FCC ID: 2A0II-JS551**

<b>Test Standards:</b>	FCC Part 2.1093 ANSI / IEEE C95.1 ::2005+A1:2010 ANSI / IEEE C95.3 : 2002(R2008) <u>IEEE 1528 :2013</u>
<b>Product Description:</b>	<u>4G Smart Phone</u>
<b>Tested Model:</b>	<u>JS551</u>
<b>Report No.:</b>	<u>STR17128059H</u>
<b>Sample Received Date:</b>	<u>2017-12-11</u>
<b>Tested Date:</b>	<u>2017-12-11 to 2017-12-15</u>
<b>Issued Date:</b>	<u>2017-12-19</u>
<b>Tested By:</b>	<u>Lucy Wei / Engineer</u> <i>Lucy Wei</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> <i>Silin chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	

**Shenzhen SEM Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. General Information .....3**

    1.1 Product Description for Equipment Under Test (EUT).....3

    1.2 Test Standards .....6

    1.3 Test Methodology.....6

    1.4 Test Facility .....6

**2. Summary of Test Results .....7**

**3. Specific Absorption Rate (SAR).....8**

    3.1 Introduction.....8

    3.2 SAR Definition .....8

**4. SAR Measurement System.....9**

    4.1 The Measurement System .....9

    4.2 Probe.....9

    4.3 Probe Calibration Process .....11

    4.4 Phantom .....12

    4.5 Device Holder .....12

    4.6 Test Equipment List.....13

**5. Tissue Simulating Liquids.....14**

    5.1 Composition of Tissue Simulating Liquid.....14

    5.2 Tissue Dielectric Parameters for Head and Body Phantoms .....15

    5.3 Tissue Calibration Result.....16

**6. SAR Measurement Evaluation .....17**

    6.1 Purpose of System Performance Check.....17

    6.2 System Setup .....17

    6.3 Validation Results.....18

**7. EUT Testing Position .....19**

    7.1 Define Two Imaginary Lines on The Handset.....19

    7.2 Cheek Position .....20

    7.3 Tilted Position .....20

    7.4 Body Worn Position .....21

    7.5 EUT Antenna Position .....21

    7.6 EUT Testing Position.....22

**8. SAR Measurement Procedures .....23**

    8.1 Measurement Procedures .....23

    8.2 Spatial Peak SAR Evaluation .....23

    8.3 Area & Zoom Scan Procedures.....24

    8.4 Volume Scan Procedures.....24

    8.5 SAR Averaged Methods .....24

    8.6 Power Drift Monitoring.....24

**9. SAR Test Result .....25**

    9.1 Conducted RF Output Power .....25

    9.2 Test Results for Standalone SAR Test.....41

    9.3 Simultaneous Multi-band Transmission SAR Analysis .....48

**10. Measurement Uncertainty .....54**

    10.1 Uncertainty for EUT SAR Test.....54

    10.2 Uncertainty for System Performance Check.....55

**Annex A. Plots of System Performance Check .....57**

**Annex B. Plots of SAR Measurement .....73**

**Annex C. EUT Photos .....106**

**Annex D. Test Setup Photos .....108**

**Annex E. Calibration Certificate.....113**

## 1. General Information

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: WGI TELECOM INC  
Address of applicant: 1786 NORTH COMMERCE PARKWAY, WESTON, FL,  
U.S.A.

Manufacturer: WGI TELECOM INC  
Address of manufacturer: 1786 NORTH COMMERCE PARKWAY, WESTON, FL,  
U.S.A.

General Description of EUT:	
Product Name:	4G Smart Phone
Brand Name:	/
Model No.:	JS551
Adding Model(s):	/
Rated Voltage:	DC 3.7V by Battery
Battery Capacity:	2000mAh
Device Category:	Portable Device
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 32.74dBm, GSM1900: 29.45dBm EDGE850: 27.95dBm, EDGE1900: 26.49dBm
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 0.45dBi; GSM1900: 0.65dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 5
Uplink Frequency:	WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 5: 22.97dBm
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 5: 0.45dBi
<b>4G</b>	
Support Networks:	FDD-LTE
Support Band:	FDD-LTE Band 2, 12
Uplink Frequency:	FDD-LTE Band 2: Tx: 1850-1910MHz, FDD-LTE Band 12: Tx: 699-716MHz
Downlink Frequency:	FDD-LTE Band 2: Rx: 1930-1990MHz, FDD-LTE Band 12: Rx: 729-746MHz
RF Output Power:	FDD-LTE Band 2: 24.05dBm, FDD-LTE Band 12: 24.01dBm
Type of Modulation:	QPSK, 16QAM
Antenna Type:	Integral Antenna
Antenna Gain:	FDD-LTE Band 2: 0.7dBi, FDD-LTE Band 12: 0.3dBi
<b>WIFI</b>	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
RF Output Power:	14.27dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps

Quantity of Channels:	11/7
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.2dBi
<b>Bluetooth</b>	
Bluetooth Version:	V4.0
Frequency Range:	2402-2480MHz
RF Output Power:	4.823dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79/40
Channel Separation:	1MHz/2MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.2dBi

## 1.2 Test Standards

The following report is prepared on behalf of the WGI TELECOM INC in accordance with FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-2005, ANSI / IEEE C95.3 :2002, IEEE 1528-2013, KDB 447498 D01 v06, KDB 648474 D04 v01r03, KDB 248227 D01 v02r02, KDB 941225 D01 v03r01, KDB 941225 D05 v02r05 ,KDB 941225 D06 v02r01, and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02.

The objective is to determine compliance with FCC Part 2.1093 of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02. The public notice KDB 447498 D01 v06 for Mobile and Portable Devices RF Exposure Procedure also.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 2. Summary of Test Results

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Head SAR	Body-worn (10mm Gap)	Hotspot (10mm Gap)	SAR <sub>1g</sub> Limit (W/kg)
	Maximum Reported SAR <sub>1g</sub> (W/kg)	Maximum Reported SAR <sub>1g</sub> (W/kg)	Maximum Reported SAR <sub>1g</sub> (W/kg)	
GSM850	0.226	<b>0.307</b>	<b>0.299</b>	1.6
GSM1900	0.071	0.246	0.246	
WCDMA Band 5	0.141	0.146	0.146	1.6
FDD-LTE 2	0.068	0.268	0.268	1.6
FDD-LTE 12	0.081	0.212	0.212	
WLAN 2.4G	<b>0.472</b>	0.161	0.161	1.6
Simultaneous Transmission	<b>0.694</b>	0.425	0.460	1.6

**Remark:**

*The highest reported SAR values for head, body-worn accessory, wireless router(hotspot), and simultaneous transmission conditions are **0.472 W/kg, 0.307W/kg, 0.299W/kg, and 0.694W/kg** respectively.*

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2.1093 and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013 and KDB 865664 D01 v01r04 and KDB 865664 D02 v01r02

### 3. Specific Absorption Rate (SAR)

---

#### 3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



---

## 4. SAR Measurement System

---

### 4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


### 4.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE5 SN 09/13 EP168 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Probe Length: 330 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter : 5 mm
- Distance between dipoles / probe extremity: 2.7mm

- Probe linearity: <0.25 dB
  - Axial Isotropy: <0.25 dB
  - Spherical Isotropy: <0.50 dB
  - Calibration range: 700 to 3000MHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annexe technique using reference guide at the five frequencies.

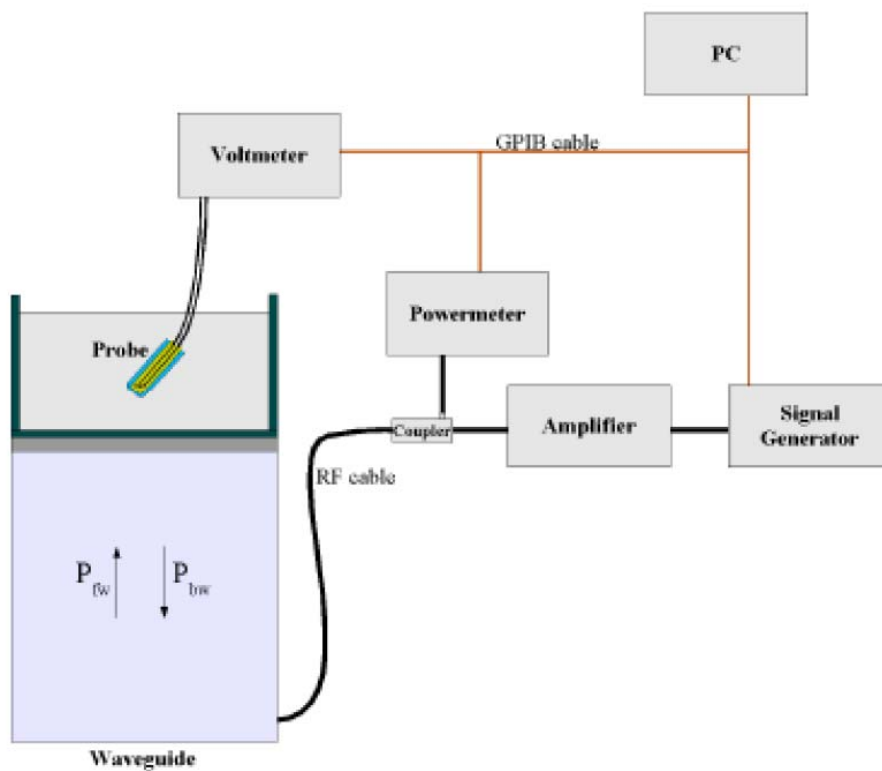

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

$P_{fw}$  = Forward Power

$P_{bw}$  = Backward Power

a and b = Waveguide dimensions

$\delta$  = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 4.3 Probe Calibration Process

#### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

#### Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T/\Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,


$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

#### 4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

#### 4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

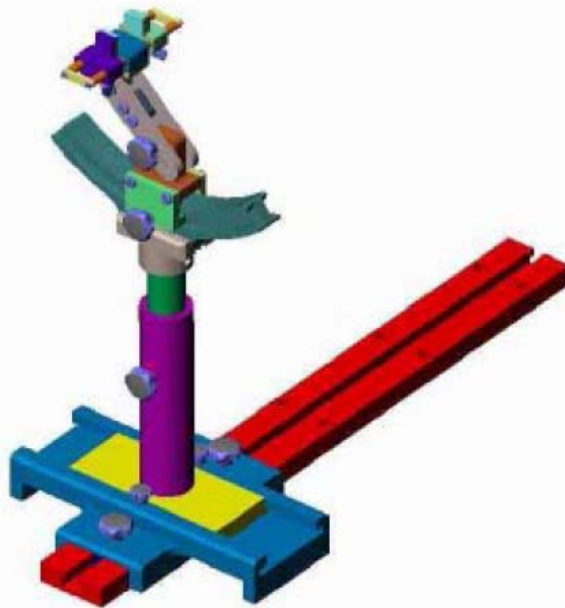

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

#### 4.6 Test Equipment List

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
E-Field Probe	MVG	SSE5	SN 09/13 EP168	2017-06-01	2018-05-31
750MHz Dipole	SATIMO	SID750	SN 47/12 DIP 0G750-203	2017-03-16	2018-03-15
835MHz Dipole	MVG	SID835	SN 47/12 DIP 0G835-204	2017-03-16	2018-03-15
1900MHz Dipole	MVG	SID1900	SN 47/12 DIP 1G900-207	2017-03-16	2018-03-15
2450MHz Dipole	MVG	SID2450	SN 13/15 DIP 2G450-364	2017-03-16	2018-03-15
Dielectric Probe Kit	MVG	SCLMP	SN 47/12 OCPG49	2017-03-16	2018-03-15
SAM Phantom	MVG	SAM	SN/ 47/12 SAM95	N/A	N/A
MULTIMETER	KEITHLEY	Keithley 2000	4006367	2017-06-12	2018-06-11
Signal Generator	Rohde & Schwarz	SMR20	100047	2017-06-12	2018-06-11
Universal Tester	Rohde & Schwarz	CMU200	112012	2017-06-12	2018-06-11
Communications Tester	Rohde & Schwarz	CMW500	148650	2017-06-12	2018-06-11
Network Analyzer	HP	8753C	2901A00831	2017-06-12	2018-06-11
Directional Couplers	Agilent	778D	20160	2017-06-12	2018-06-11

## 5. Tissue Simulating Liquids

### 5.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



**Liquid Height for Head SAR**



**Liquid Height for Body SAR**

#### The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	HEC (%)	Preventol (%)	DGBE (%)
<b>Head</b>						
750	41.1	1.4	57.0	0.2	0.3	0
835	40.3	1.4	57.9	0.2	0.2	0
1800-1900	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
<b>Body</b>						
750	50.0	0.8	48.8	0.2	0.2	0
835	50.8	0.9	48.1	0.1	0.1	0
1800-1900	70.2	0.4	0	0	0	29.4
2450	68.6	0.1	0	0	0	31.3

## 5.2 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head		Body	
	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
150	0.76	52.3	0.80	61.9
300	0.87	45.3	0.92	58.2
450	0.87	43.5	0.94	56.7
<b>750</b>	<b>0.89</b>	<b>41.9</b>	<b>0.96</b>	<b>55.5</b>
<b>835</b>	<b>0.90</b>	<b>41.5</b>	<b>0.97</b>	<b>55.2</b>
900	0.97	41.5	1.05	55.0
915	0.98	41.5	1.06	55.0
1450	1.20	40.5	1.30	54.0
1610	1.29	40.3	1.40	53.8
<b>1800-2000</b>	<b>1.40</b>	<b>40.0</b>	<b>1.52</b>	<b>53.3</b>
<b>2450</b>	<b>1.80</b>	<b>39.2</b>	<b>1.95</b>	<b>52.7</b>
3000	2.40	38.5	2.73	52.0
5800	5.27	35.3	6.00	48.2

### 5.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and an Agilent Network Analyzer.

#### Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Head Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading ( $\sigma$ )	Target ( $\sigma$ )	Delta (%)	Reading ( $\epsilon_r$ )	Target ( $\epsilon_r$ )	Delta (%)		
750	21.2	0.86	0.89	-3.37	41.32	41.90	-1.38	±5	2017-12-11
835	21.2	0.87	0.90	-3.33	41.11	41.50	-0.94	±5	2017-12-11
1900	21.3	1.38	1.40	-1.43	38.56	40.00	-3.60	±5	2017-12-12
2450	21.3	1.74	1.80	-3.33	38.15	39.20	-2.68	±5	2017-12-13

Body Tissue Simulating Liquid									
Freq. MHz.	Temp. (°C)	Conductivity			Permittivity			Limit (%)	Date
		Reading ( $\sigma$ )	Target ( $\sigma$ )	Delta (%)	Reading ( $\epsilon_r$ )	Target ( $\epsilon_r$ )	Delta (%)		
750	21.2	0.93	0.96	-3.12	54.96	55.50	-0.97	±5	2017-12-11
835	21.2	0.95	0.97	-2.06	54.85	55.20	-0.63	±5	2017-12-11
1900	21.3	1.50	1.52	-1.32	52.42	53.30	-1.65	±5	2017-12-12
2450	21.3	1.91	1.95	-2.05	52.01	52.70	-1.31	±5	2017-12-13




## 6. SAR Measurement Evaluation

### 6.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 6.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

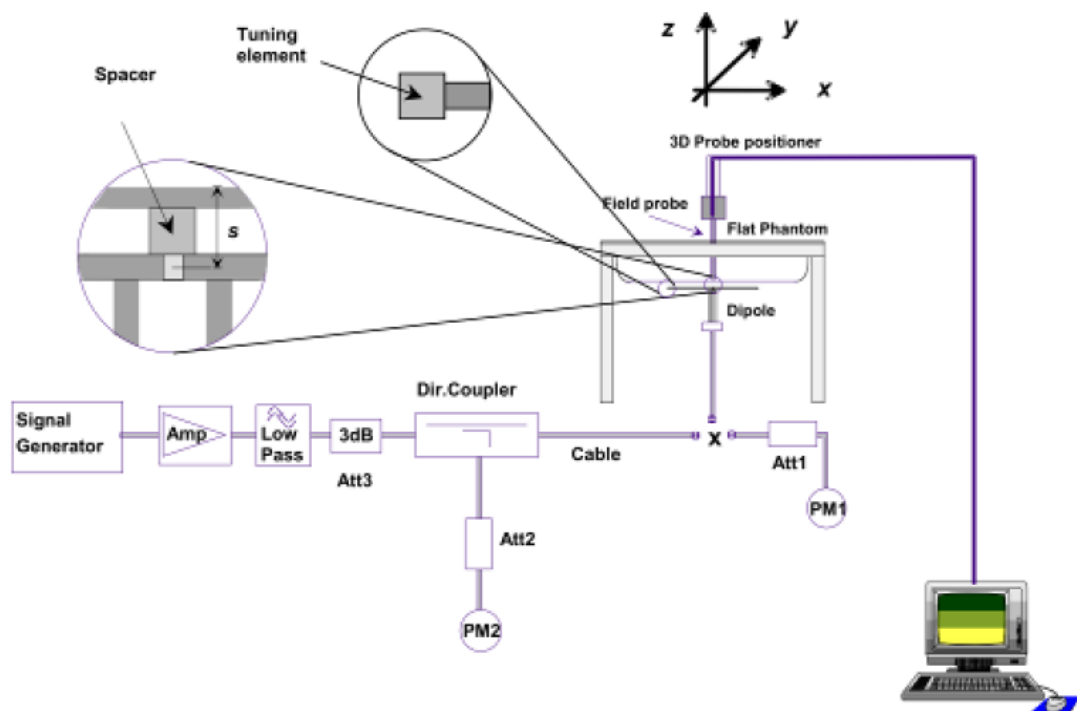

System Verification Setup Block Diagram



**Setup Photo of Dipole Antenna**

The output power on dipole port must be calibrated to 24 dBm(250 mW) before dipole is connected.

### 6.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. Table 6.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency	Targeted SAR <sub>1g</sub>	Measured SAR <sub>1g</sub>	Normalized SAR <sub>1g</sub>	Tolerance
MHz	(W/kg)	(W/kg)	(W/kg)	(%)
Head				
750	8.40	2.16	8.64	2.86
835	9.65	2.41	9.64	-0.10
1900	39.59	9.91	39.64	0.13
2450	53.76	13.45	53.8	0.07
Body				
750	8.40	2.12	8.48	0.95
835	9.36	2.35	9.4	0.43
1900	39.01	9.78	39.12	0.28
2450	50.33	12.59	50.36	0.06


Targeted and Measurement SAR

*Please refer to Annex A for the plots of system performance check.*

## 7. EUT Testing Position

### 7.1 Define Two Imaginary Lines on The Handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

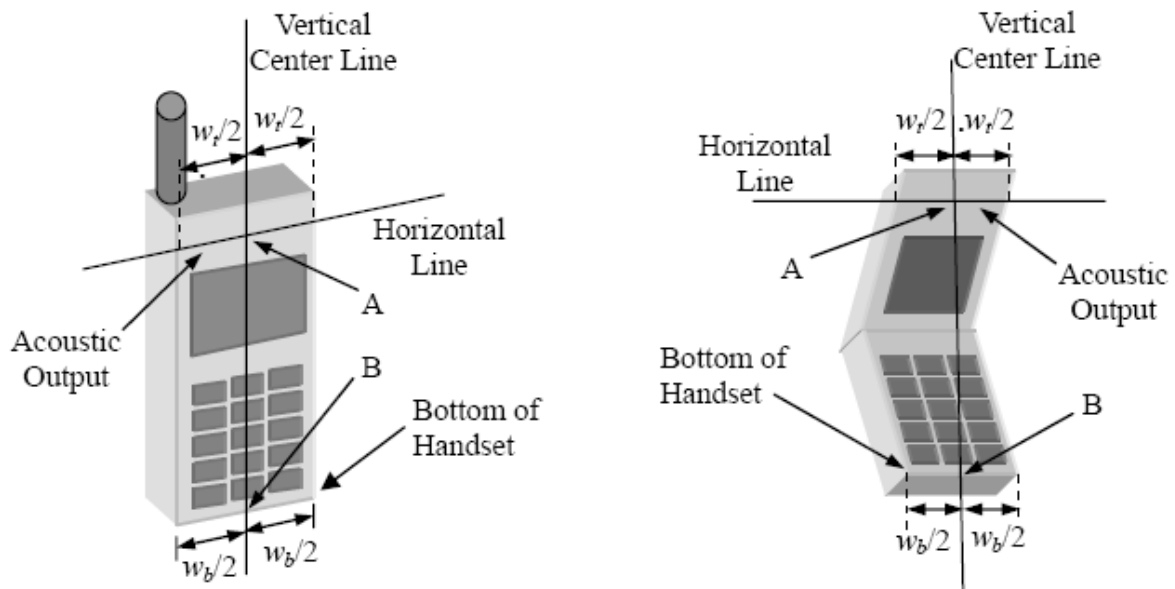

**Illustration for Handset Vertical and Horizontal Reference Lines**

## 7.2 Cheek Position

(a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

(b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 7.2).

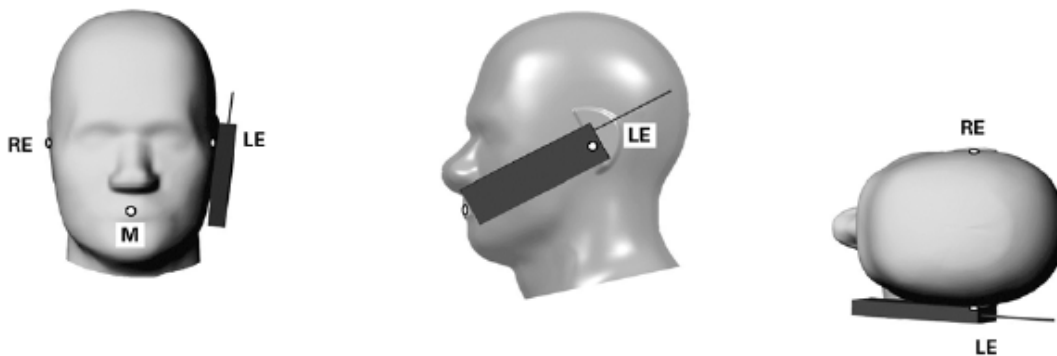


Illustration for Cheek Position

## 7.3 Tilted Position

(a) To position the device in the “cheek” position described above.

(b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 7.3).

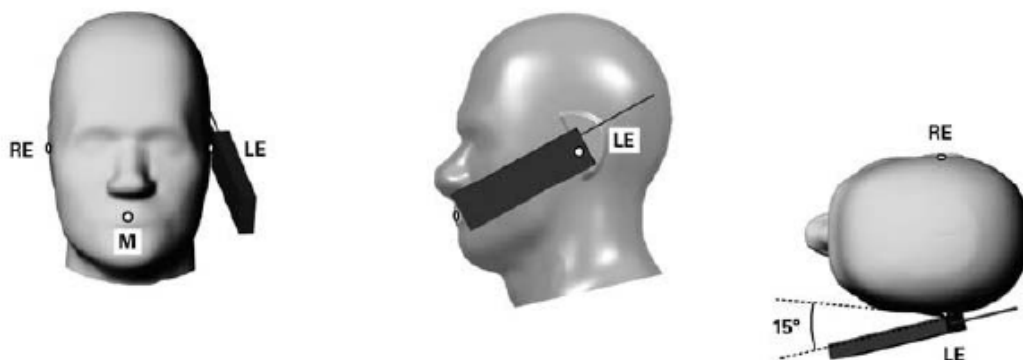


Illustration for Tilted Position

### 7.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 10mm.


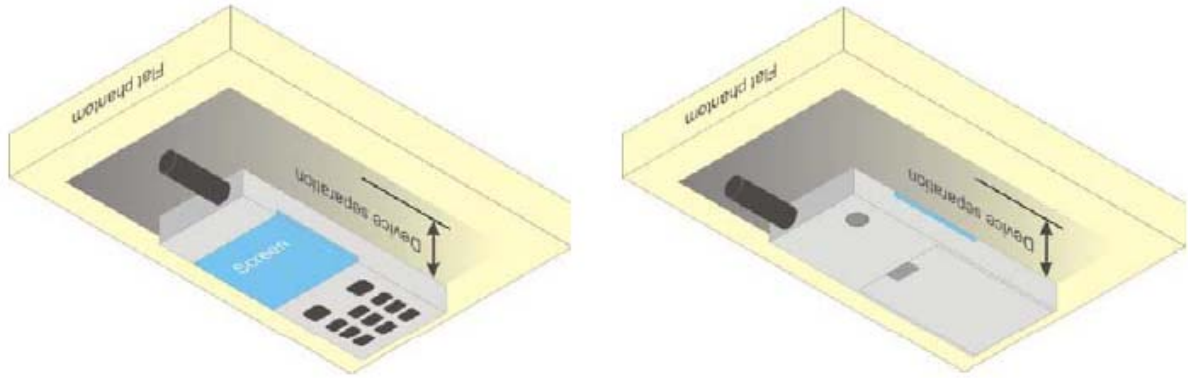


Illustration for Body Worn Position

### 7.5 EUT Antenna Position

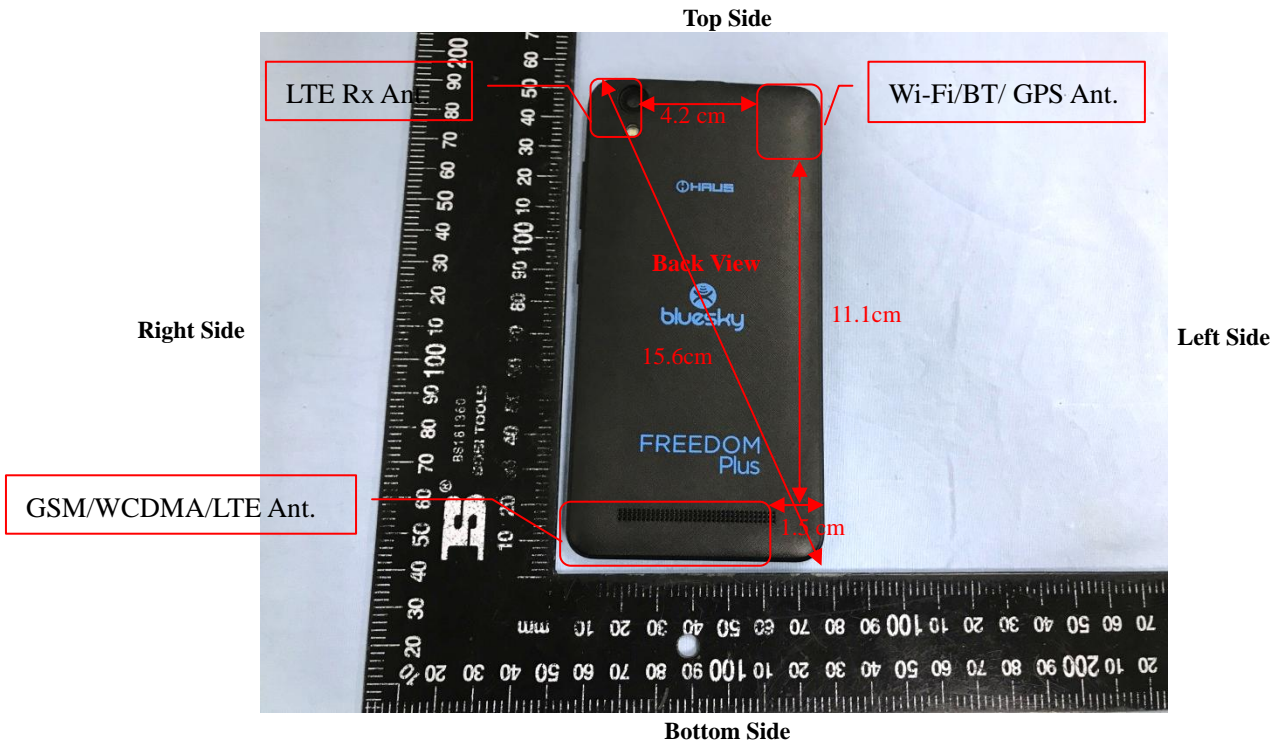

Block Diagram for EUT Antenna Position

## 7.6 EUT Testing Position

Head/Body-worn/Hotspot mode SAR assessments are required for this device. This EUT was tested in different positions for different SAR test modes, more information as below:

Head SAR tests				
Antennas	Right Cheek	Left Cheek	Right Tilted	Left Tilted
WWAN	Yes	Yes	Yes	Yes
WLAN	Yes	Yes	Yes	Yes

Hotspot SAR tests, Test distance: 10mm						
Antennas	Front	Back	Right Side	Left Side	Top Side	Bottom Side
WWAN	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

Body-worn SAR tests		
Antennas	Front	Back
WWAN	Yes	Yes
WLAN	Yes	Yes

**Remark:**

1. Referring to KDB 941225 D06, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test separation distances is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

**Please refer to Annex D for the EUT test setup photos.**

---

## 8. SAR Measurement Procedures

---

### 8.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### 8.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### 8.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.5 SAR Averaged Methods

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.



## 9. SAR Test Result

### 9.1 Conducted RF Output Power

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.74	32.66	32.54	33.0	29.44	29.40	29.38	30.0
GPRS (1 slot)	32.72	32.63	32.52	33.0	29.45	29.42	29.4	30.0
GPRS (2 slots)	31.82	31.71	31.64	32.0	28.85	28.83	28.81	29.0
GPRS (3 slots)	29.80	29.71	29.66	30.0	27.15	27.20	27.2	27.5
GPRS (4 slots)	28.64	28.57	28.51	29.0	26.08	26.13	26.13	26.5
EDGE (1 slot)	27.95	27.79	27.5	28.5	25.67	26.08	26.49	27.0
EDGE (2 slots)	26.87	26.68	26.39	27.0	24.72	25.11	25.48	26.0
EDGE (3 slots)	24.78	24.6	24.31	25.0	22.77	23.13	23.61	24.0
EDGE (4 slots)	23.42	23.19	22.86	24.0	21.39	21.77	22.38	22.5

GSM - Source-Based Time-Average Power (dBm)								
Band	GSM850			Tune-up power (dBm)	PCS1900			Tune-up power (dBm)
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	23.74	23.66	23.54	24.0	20.44	20.40	20.38	21.0
GPRS (1 slot)	23.72	23.63	23.52	24.0	20.45	20.42	20.40	21.0
GPRS (2 slots)	25.82	25.71	25.64	26.0	22.85	22.83	22.81	23.0
GPRS (3 slots)	25.55	25.46	25.41	26.0	22.90	22.95	22.95	23.5
GPRS (4 slots)	25.64	25.57	25.51	26.0	23.08	23.13	23.13	23.5
EDGE (1 slot)	18.95	18.79	18.50	19.5	16.67	17.08	17.49	18.0
EDGE (2 slots)	20.87	20.68	20.39	21.0	18.72	19.11	19.48	20.0
EDGE (3 slots)	20.53	20.35	20.06	21.0	18.52	18.88	19.36	19.5
EDGE (4 slots)	20.42	20.19	19.86	21.0	18.39	18.77	19.38	19.5

Note: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time-average power = Burst averaged power - Duty cycle factor in dB

Duty cycle factor = 9 dB for 1 Tx slot, 6 dB for 2 Tx slots, 4.25 dB for 3 Tx slots, 3 dB for 4 Tx slots

#### Remark:

1. For Head SAR testing, GSM and GPRS (2TX slots), GPRS (4TX slots) should be evaluated, therefore the EUT was set in GSM and GPRS (2TX slots) for GSM850 , GSM and GPRS (4TX slots) for GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (2TX slots) for GSM850 and

GPRS (4TX slots) for GSM1900 due to its highest source-based time-average power.

3. Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The DUT do not support DTM function.
5. This device supports VOIP capability through 3rd party apps software.

WCDMA - Average Power (dBm)							
Band	WCDMA Band V						
Channel	4132	4183	4233	Tune-up power (dBm)			
Frequency (MHz)	826.4	836.4	846.6				
RMC 12.2k	22.84	22.97	22.95	23.5			
HSDPA Subtest-1	21.75	21.81	21.97	22.5			
HSDPA Subtest-2	21.73	21.80	21.96	22.5			
HSDPA Subtest-3	21.74	21.80	21.95	22.5			
HSDPA Subtest-4	21.73	21.80	21.94	22.5			
HSUPA Subtest-1	22.00	22.07	21.94	22.5			
HSUPA Subtest-2	21.98	22.05	21.93	22.5			
HSUPA Subtest-3	21.97	22.05	21.94	22.5			
HSUPA Subtest-4	21.98	22.06	21.93	22.5			
HSUPA Subtest-5	21.96	22.04	21.93	22.5			

**Remark:**

1. For Head SAR, per KDB 941225 D01 v03, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
2. For Body SAR, per KDB 941225 D01 v03, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is  $\leq 1.2W/kg$ , HSDPA SAR evaluation can be excluded

**FDD-LTE Band 2:**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.79	24.5
		1	3	23.87	24.5
		1	5	23.76	24.5
		3	0	22.86	24.5
		3	2	22.73	24.5
		3	3	22.65	24.5
		6	0	22.76	24.5
	MCH	1	0	23.24	24.5
		1	3	23.29	24.5
		1	5	23.20	24.5
		3	0	23.31	24.5
		3	2	23.29	24.5
		3	3	23.30	24.5
		6	0	22.26	24.5
	HCH	1	0	22.88	24.5
		1	3	22.87	24.5
		1	5	22.89	24.5
		3	0	22.93	24.5
		3	2	22.85	24.5
		3	3	22.88	24.5
		6	0	21.90	24.5
16QAM	LCH	1	0	23.03	24.5
		1	3	23.19	24.5
		1	5	23.03	24.5
		3	0	23.02	24.5
		3	2	22.97	24.5
		3	3	22.97	24.5
		6	0	21.82	24.5
	MCH	1	0	22.47	24.5
		1	3	22.62	24.5
		1	5	22.47	24.5
		3	0	22.47	24.5
		3	2	22.41	24.5
		3	3	22.43	24.5
		6	0	21.23	24.5
HCH	1	0	22.18	24.5	

		1	3	22.20	24.5
		1	5	22.15	24.5
		3	0	21.86	24.5
		3	2	21.81	24.5
		3	3	21.84	24.5
		6	0	20.82	24.5

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.75	24.5
		1	7	23.77	24.5
		1	14	23.68	24.5
		8	0	22.88	24.5
		8	4	22.85	24.5
		8	7	22.83	24.5
		15	0	22.84	24.5
	MCH	1	0	23.19	24.5
		1	7	23.23	24.5
		1	14	23.13	24.5
		8	0	22.31	24.5
		8	4	22.28	24.5
		8	7	22.28	24.5
		15	0	22.29	24.5
	HCH	1	0	22.88	24.5
		1	7	22.91	24.5
		1	14	22.88	24.5
		8	0	21.98	24.5
		8	4	21.96	24.5
		8	7	21.97	24.5
		15	0	21.93	24.5
16QAM	LCH	1	0	23.04	24.5
		1	7	23.05	24.5
		1	14	22.95	24.5
		8	0	21.95	24.5
		8	4	21.95	24.5
		8	7	21.89	24.5
		15	0	21.86	24.5
	MCH	1	0	22.49	24.5
		1	7	22.54	24.5
		1	14	22.44	24.5
		8	0	21.40	24.5

		8	4	21.39	24.5
		8	7	21.34	24.5
		15	0	21.30	24.5
	HCH	1	0	22.21	24.5
		1	7	22.21	24.5
		1	14	22.14	24.5
		8	0	20.96	24.5
		8	4	20.92	24.5
		8	7	20.95	24.5
		15	0	20.93	24.5

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.93	24.5
		1	12	23.86	24.5
		1	24	23.77	24.5
		12	0	22.97	24.5
		12	6	22.94	24.5
		12	13	22.88	24.5
		25	0	22.87	24.5
	MCH	1	0	23.37	24.5
		1	12	23.34	24.5
		1	24	23.23	24.5
		12	0	22.43	24.5
		12	6	22.40	24.5
		12	13	22.36	24.5
		25	0	22.32	24.5
	HCH	1	0	23.04	24.5
		1	12	23.00	24.5
		1	24	22.98	24.5
		12	0	22.01	24.5
		12	6	21.99	24.5
		12	13	21.99	24.5
		25	0	21.95	24.5
16QAM	LCH	1	0	23.28	24.5
		1	12	23.23	24.5
		1	24	23.09	24.5
		12	0	22.13	24.5
		12	6	22.10	24.5
		12	13	22.05	24.5
		25	0	21.94	24.5

	MCH	1	0	22.78	24.5
		1	12	22.75	24.5
		1	24	22.64	24.5
		12	0	21.61	24.5
		12	6	21.58	24.5
		12	13	21.55	24.5
		25	0	21.41	24.5
	HCH	1	0	22.00	24.5
		1	12	22.00	24.5
		1	24	21.87	24.5
		12	0	21.07	24.5
		12	6	21.06	24.5
		12	13	21.03	24.5
		25	0	21.02	24.5

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.90	24.5
		1	24	23.77	24.5
		1	49	23.70	24.5
		25	0	22.89	24.5
		25	12	22.83	24.5
		25	25	22.76	24.5
		50	0	22.82	24.5
	MCH	1	0	23.39	24.5
		1	24	23.29	24.5
		1	49	23.17	24.5
		25	0	22.41	24.5
		25	12	22.35	24.5
		25	25	22.30	24.5
		50	0	22.34	24.5
	HCH	1	0	23.02	24.5
		1	24	22.93	24.5
		1	49	22.91	24.5
		25	0	21.97	24.5
		25	12	21.96	24.5
		25	25	21.95	24.5
		50	0	21.96	24.5
16QAM	LCH	1	0	23.19	24.5
		1	24	23.04	24.5
		1	49	22.88	24.5

		25	0	21.93	24.5
		25	12	21.86	24.5
		25	25	21.77	24.5
		50	0	21.85	24.5
	MCH	1	0	22.70	24.5
		1	24	22.62	24.5
		1	49	22.46	24.5
		25	0	21.43	24.5
		25	12	21.39	24.5
		25	25	21.33	24.5
		50	0	21.38	24.5
	HCH	1	0	22.26	24.5
		1	24	22.30	24.5
		1	49	22.24	24.5
		25	0	21.02	24.5
		25	12	21.02	24.5
		25	25	21.00	24.5
50		0	21.03	24.5	

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.93	24.5
		1	37	23.73	24.5
		1	74	23.63	24.5
		37	0	22.98	24.5
		37	18	22.91	24.5
		37	38	22.88	24.5
		75	0	22.94	24.5
	MCH	1	0	23.49	24.5
		1	37	23.32	24.5
		1	74	23.12	24.5
		37	0	22.54	24.5
		37	18	22.47	24.5
		37	38	22.37	24.5
		75	0	22.47	24.5
	HCH	1	0	23.19	24.5
		1	37	23.01	24.5
		1	74	22.97	24.5
		37	0	22.24	24.5
		37	18	22.18	24.5
		37	38	22.12	24.5

		75	0	22.19	24.5
16QAM	LCH	1	0	23.21	24.5
		1	37	22.92	24.5
		1	74	22.79	24.5
		37	0	21.93	24.5
		37	18	21.84	24.5
		37	38	21.79	24.5
		75	0	21.89	24.5
	MCH	1	0	22.73	24.5
		1	37	22.65	24.5
		1	74	22.38	24.5
		37	0	21.53	24.5
		37	18	21.45	24.5
		37	38	21.35	24.5
		75	0	21.45	24.5
	HCH	1	0	22.25	24.5
		1	37	22.23	24.5
		1	74	22.17	24.5
		37	0	21.18	24.5
		37	18	21.14	24.5
		37	38	21.09	24.5
		75	0	21.10	24.5

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	24.05	24.5
		1	49	23.82	24.5
		1	99	23.69	24.5
		50	0	23.87	24.5
		50	25	23.84	24.5
		50	50	23.87	24.5
		100	0	22.84	24.5
	MCH	1	0	23.66	24.5
		1	49	23.42	24.5
		1	99	23.24	24.5
		50	0	22.52	24.5
		50	25	22.38	24.5
		50	50	22.28	24.5
		100	0	22.40	24.5
	HCH	1	0	23.29	24.5
		1	49	23.13	24.5



		1	99	23.05	24.5
		50	0	22.07	24.5
		50	25	22.01	24.5
		50	50	22.01	24.5
		100	0	22.06	24.5
16QAM	LCH	1	0	23.23	24.5
		1	49	22.93	24.5
		1	99	22.78	24.5
		50	0	21.85	24.5
		50	25	21.72	24.5
		50	50	21.63	24.5
		100	0	21.75	24.5
	MCH	1	0	22.80	24.5
		1	49	22.60	24.5
		1	99	22.34	24.5
		50	0	21.51	24.5
		50	25	21.41	24.5
		50	50	21.29	24.5
		100	0	21.40	24.5
	HCH	1	0	22.47	24.5
		1	49	22.31	24.5
		1	99	22.33	24.5
		50	0	21.11	24.5
		50	25	21.06	24.5
		50	50	21.06	24.5
		100	0	21.04	24.5

**FDD-LTE Band 12:**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.39	24.5
		1	3	23.44	24.5
		1	5	23.38	24.5
		3	0	23.46	24.5
		3	2	23.46	24.5
		3	3	23.48	24.5
		6	0	22.44	24.5
	MCH	1	0	23.67	24.5
		1	3	23.72	24.5
		1	5	23.66	24.5
		3	0	22.53	24.5
		3	2	22.59	24.5
		3	3	22.67	24.5
		6	0	22.62	24.5
	HCH	1	0	23.36	24.5
		1	3	23.36	24.5
		1	5	23.27	24.5
		3	0	23.37	24.5
		3	2	23.34	24.5
		3	3	23.34	24.5
		6	0	22.40	24.5
16QAM	LCH	1	0	22.66	24.5
		1	3	22.80	24.5
		1	5	22.71	24.5
		3	0	22.63	24.5
		3	2	22.60	24.5
		3	3	22.61	24.5
		6	0	21.40	24.5
	MCH	1	0	22.93	24.5
		1	3	23.08	24.5
		1	5	22.97	24.5
		3	0	22.64	24.5
		3	2	22.67	24.5
		3	3	22.71	24.5
		6	0	21.61	24.5
HCH	1	0	22.40	24.5	

		1	3	22.51	24.5
		1	5	22.41	24.5
		3	0	22.33	24.5
		3	2	22.32	24.5
		3	3	22.36	24.5
		6	0	21.41	24.5

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.33	24.5
		1	7	23.46	24.5
		1	14	23.34	24.5
		8	0	22.50	24.5
		8	4	22.47	24.5
		8	7	22.50	24.5
		15	0	22.48	24.5
	MCH	1	0	23.56	24.5
		1	7	23.68	24.5
		1	14	23.56	24.5
		8	0	22.74	24.5
		8	4	22.72	24.5
		8	7	22.72	24.5
		15	0	22.71	24.5
	HCH	1	0	23.36	24.5
		1	7	23.45	24.5
		1	14	23.24	24.5
		8	0	22.48	24.5
		8	4	22.45	24.5
		8	7	22.43	24.5
		15	0	22.35	24.5
16QAM	LCH	1	0	22.64	24.5
		1	7	22.78	24.5
		1	14	22.61	24.5
		8	0	21.55	24.5
		8	4	21.57	24.5
		8	7	21.55	24.5
		15	0	21.47	24.5
	MCH	1	0	22.71	24.5
		1	7	22.94	24.5
		1	14	22.82	24.5
		8	0	21.74	24.5

		8	4	21.76	24.5
		8	7	21.75	24.5
		15	0	21.64	24.5
	HCH	1	0	22.63	24.5
		1	7	22.60	24.5
		1	14	22.49	24.5
		8	0	21.40	24.5
		8	4	21.34	24.5
		8	7	21.34	24.5
		15	0	21.33	24.5

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.47	24.5
		1	12	23.56	24.5
		1	24	23.60	24.5
		12	0	22.55	24.5
		12	6	22.56	24.5
		12	13	22.60	24.5
		25	0	22.51	24.5
	MCH	1	0	23.71	24.5
		1	12	23.78	24.5
		1	24	23.71	24.5
		12	0	22.73	24.5
		12	6	22.78	24.5
		12	13	22.80	24.5
		25	0	22.69	24.5
	HCH	1	0	23.60	24.5
		1	12	23.64	24.5
		1	24	23.46	24.5
		12	0	22.57	24.5
		12	6	22.47	24.5
		12	13	22.41	24.5
		25	0	22.44	24.5
16QAM	LCH	1	0	22.90	24.5
		1	12	22.97	24.5
		1	24	22.81	24.5
		12	0	21.71	24.5
		12	6	21.71	24.5
		12	13	21.72	24.5
		25	0	21.55	24.5

	MCH	1	0	22.85	24.5
		1	12	23.11	24.5
		1	24	23.13	24.5
		12	0	21.81	24.5
		12	6	21.88	24.5
		12	13	21.93	24.5
		25	0	21.72	24.5
	HCH	1	0	22.65	24.5
		1	12	22.43	24.5
		1	24	22.28	24.5
		12	0	21.62	24.5
		12	6	21.52	24.5
		12	13	21.42	24.5
		25	0	21.47	24.5

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Average Power [dBm]	Tune-up power (dBm)
		Size	Offset		
QPSK	LCH	1	0	23.42	24.5
		1	24	23.53	24.5
		1	49	24.01	24.5
		25	0	23.72	24.5
		25	12	23.69	24.5
		25	25	23.73	24.5
		50	0	22.73	24.5
	MCH	1	0	23.48	24.5
		1	24	23.67	24.5
		1	49	23.50	24.5
		25	0	22.63	24.5
		25	12	22.68	24.5
		25	25	22.71	24.5
		50	0	22.67	24.5
	HCH	1	0	23.73	24.5
		1	24	23.61	24.5
		1	49	23.36	24.5
		25	0	22.69	24.5
		25	12	22.62	24.5
		25	25	22.49	24.5
		50	0	22.58	24.5
16QAM	LCH	1	0	22.73	24.5
		1	24	22.68	24.5
		1	49	22.96	24.5

		25	0	21.55	24.5
		25	12	21.57	24.5
		25	25	21.65	24.5
		50	0	21.62	24.5
	MCH	1	0	22.67	24.5
		1	24	22.90	24.5
		1	49	22.81	24.5
		25	0	21.61	24.5
		25	12	21.69	24.5
		25	25	21.72	24.5
		50	0	21.66	24.5
	HCH	1	0	22.97	24.5
		1	24	23.06	24.5
		1	49	22.59	24.5
		25	0	21.73	24.5
		25	12	21.66	24.5
		25	25	21.51	24.5
		50	0	21.63	24.5

**Remark:**

- Per KDB941225 D05 v02r05, Start with the largest channel bandwidth then measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle, and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. 6 When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.
- Per KDB941225 D05 v02r05, The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- Per KDB941225 D05 v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
- Per KDB941225 D05 v02r05, For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in 5.2.1, 5.2.2, and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

WLAN - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
802.11b	1Mbps	CH 01	2412	14.26	14.5
		CH 06	2437	14.27	14.5
		CH 11	2462	13.85	14.5
802.11g	54Mbps	CH 01	2412	9.97	12.5
		CH 06	2437	12.24	12.5
		CH 11	2462	11.24	12.5
802.11n (20MHz)	MCS7	CH 01	2412	9.55	12.5
		CH 06	2437	12.38	12.5
		CH 11	2462	11.53	12.5
802.11n (40MHz)	MCS7	CH 03	2422	10.74	11.5
		CH 06	2437	10.97	11.5
		CH 09	2452	10.59	11.5

**Remark:**

1. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.
2. Per KDB 248227 D01 v02r02, For 802.11b DSSS SAR measurements, when the reported SAR of the highest measured maximum output power channel (see 3.1) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.
3. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is  $\leq 1.2$  W/kg.

Bluetooth - Maximum Average Power			
Test Mode	Data Rate	Average Power(dBm)	Tune-up power (dBm)
GFSK	1Mbps	4.823	5.0
Pi/4 QDPSK	2Mbps	3.987	5.0
8DPSK	3Mbps	4.149	5.0

Bluetooth - Maximum Average Power					
Test Mode	Data Rate	Channel	Frequency (MHz)	Average Power (dBm)	Tune-up power (dBm)
BLE	1Mbps	CH 00	2402	4.741	5.0
		CH 19	2440	3.445	5.0
		CH 39	2480	3.663	5.0

**Remark:**

Bluetooth maximum output power is 4.823dBm, and Maximum Tune-Up output power is 5.0dBm. Per KDB 447498 D01 V06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, } 4.87\text{mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR,16 where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation<sup>17</sup>
- The result is rounded to one decimal place for comparison

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	Result	Limit
5.0	3.16	5	2.402	0.98	3

The exclusion thresholds is  $0.98 < 3$ , therefore, the RF exposure evaluation is not required.



## 9.2 Test Results for Standalone SAR Test

### Head SAR

GSM850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
1.	GSM	Right Cheek	128	824.2	32.74	33.0	1.062	0.133	0.141
2.	GSM	Right Tilted	128	824.2	32.74	33.0	1.062	0.016	0.017
3.	GSM	Left Cheek	128	824.2	32.74	33.0	1.062	0.151	0.160
4.	GSM	Left Tilted	128	824.2	32.74	33.0	1.062	0.017	0.018

GSM1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
5.	GSM	Right Cheek	512	1850.2	29.44	30.0	1.138	0.033	0.038
6.	GSM	Right Tilted	512	1850.2	29.44	30.0	1.138	0.013	0.015
7.	GSM	Left Cheek	512	1850.2	29.44	30.0	1.138	0.031	0.035
8.	GSM	Left Tilted	512	1850.2	29.44	30.0	1.138	0.012	0.014

GPRS850 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
9.	GPRS_2TX	Right Cheek	128	824.2	31.82	32.0	1.042	0.213	0.222
10.	GPRS_2TX	Right Tilted	128	824.2	31.82	32.0	1.042	0.042	0.044
11.	GPRS_2TX	Left Cheek	128	824.2	31.82	32.0	1.042	0.217	0.226
12.	GPRS_2TX	Left Tilted	128	824.2	31.82	32.0	1.042	0.045	0.047

GPRS1900 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	M Hz					
13.	GPRS_4TX	Right Cheek	661	1880.0	26.13	26.5	1.089	0.065	0.071
14.	GPRS_4TX	Right Tilted	661	1880.0	26.13	26.5	1.089	0.021	0.023
15.	GPRS_4TX	Left Cheek	661	1880.0	26.13	26.5	1.089	0.045	0.049
16.	GPRS_4TX	Left Tilted	661	1880.0	26.13	26.5	1.089	0.016	0.017

WCDMA Band 5 – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
17.	RMC	Right Cheek	4183	836.4	22.97	23.5	1.130	0.115	0.130
18.	RMC	Right Tilted	4183	836.4	22.97	23.5	1.130	0.021	0.024
19.	RMC	Left Cheek	4183	836.4	22.97	23.5	1.130	0.125	0.141
20.	RMC	Left Tilted	4183	836.4	22.97	23.5	1.130	0.024	0.027

LTE Band 2– Head SAR Test									
Plot No.	Mode		Test Position Head	Frequency MHz	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB								
21.	RMC QPSK 20MHz 1RB		Right Cheek	1860.0	24.05	24.5	1.109	0.061	0.068
22.	RMC QPSK 20MHz 1RB		Right Tilted	1860.0	24.05	24.5	1.109	0.022	0.024
23.	RMC QPSK 20MHz 1RB		Left Cheek	1860.0	24.05	24.5	1.109	0.051	0.057
24.	RMC QPSK 20MHz 1RB		Left Tilted	1860.0	24.05	24.5	1.109	0.02	0.022
25.	RMC QPSK 20MHz 50%RB		Right Cheek	1860.0	23.87	24.0	1.030	0.051	0.053
26.	RMC QPSK 20MHz 50%RB		Right Tilted	1860.0	23.87	24.0	1.030	0.019	0.020
27.	RMC QPSK 20MHz 50%RB		Left Cheek	1860.0	23.87	24.0	1.030	0.046	0.047
28.	RMC QPSK 20MHz 50%RB		Left Tilted	1860.0	23.87	24.0	1.030	0.015	0.015

LTE Band 12– Head SAR Test									
Plot No.	Mode		Test Position Head	Frequency MHz	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth								
29.	RMC QPSK 10MHz 1RB		Right Cheek	704.0	24.01	24.5	1.119	0.07	0.078
30.	RMC QPSK 10MHz 1RB		Right Tilted	704.0	24.01	24.5	1.119	0.024	0.027
31.	RMC QPSK 10MHz 1RB		Left Cheek	704.0	24.01	24.5	1.119	0.072	0.081
32.	RMC QPSK 10MHz 1RB		Left Tilted	704.0	24.01	24.5	1.119	0.025	0.028
33.	RMC QPSK 10MHz 50%RB		Right Cheek	704.0	23.73	24.0	1.064	0.067	0.071
34.	RMC QPSK 10MHz 50%RB		Right Tilted	704.0	23.73	24.0	1.064	0.021	0.022
35.	RMC QPSK 10MHz 50%RB		Left Cheek	704.0	23.73	24.0	1.064	0.069	0.073
36.	RMC QPSK 10MHz 50%RB		Left Tilted	704.0	23.73	24.0	1.064	0.02	0.021

WLAN 2.4GHz – Head SAR Test									
Plot No.	Mode	Test Position Head	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
37.	802.11b	Right Cheek	06	2437	14.27	14.5	1.054	0.448	0.472
38.	802.11b	Right Tilted	06	2437	14.27	14.5	1.054	0.102	0.108
39.	802.11b	Left Cheek	06	2437	14.27	14.5	1.054	0.251	0.265
40.	802.11b	Left Tilted	06	2437	14.27	14.5	1.054	0.068	0.072

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

**Body-worn SAR**

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
41.	GSM	Back	128	824.2	32.74	33.0	1.062	0.289	0.307
42.	GSM	Front	128	824.2	32.74	33.0	1.062	0.175	0.186

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
43.	GSM	Back	512	1850.2	29.44	30.0	1.138	0.126	0.143
44.	GSM	Front	512	1850.2	29.44	30.0	1.138	0.052	0.059

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
55	RMC 12.2k	Back Side	4183	836.4	22.97	23.5	1.130	0.122	0.138
56	RMC 12.2k	Front Side	4183	836.4	22.97	23.5	1.130	0.129	0.146

LTE Band 2–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
60	RMC QPSK 20MHz 1RB	Back Side	1860.0	24.05	24.5	1.109	0.242	0.268	
61	RMC QPSK 20MHz 1RB	Front Side	1860.0	24.05	24.5	1.109	0.107	0.119	
65	RMC QPSK 20MHz 50%RB	Back Side	1860.0	23.87	24.0	1.030	0.206	0.212	
66	RMC QPSK 20MHz 50%RB	Front Side	1860.0	23.87	24.0	1.030	0.102	0.105	

LTE Band 12–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
70	RMC QPSK 10MHz 1RB	Back Side	704.0	24.01	24.5	1.119	0.189	0.212	
71	RMC QPSK 10MHz 1RB	Front Side	704.0	24.01	24.5	1.119	0.107	0.120	
75	RMC QPSK 10MHz 50%RB	Back Side	704.0	23.73	24.0	1.064	0.167	0.178	
76	RMC QPSK 10MHz 50%RB	Front Side	704.0	23.73	24.0	1.064	0.095	0.101	

WLAN 2.4GHz –Body SAR Test									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
80	802.11b	Back Side	06	2437	14.27	14.5	1.054	0.112	0.118
81	802.11b	Front Side	06	2437	14.27	14.5	1.054	0.153	0.161

**Remark:** Per KDB 447498 D01 v06, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

**Hotspot SAR**

GSM850 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
45.	GPRS_2TX	Back Side	128	824.2	31.82	32.0	1.042	0.224	0.233
46.	GPRS_2TX	Front Side	128	824.2	31.82	32.0	1.042	0.287	0.299
47.	GPRS_2TX	Bottom side	128	824.2	31.82	32.0	1.042	0.05	0.052
48.	GPRS_2TX	Right side	128	824.2	31.82	32.0	1.042	0.068	0.071
49.	GPRS_2TX	Left side	128	824.2	31.82	32.0	1.042	0.027	0.028

GSM1900 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
50.	GPRS_4TX	Back Side	661	1880.0	26.13	26.5	1.089	0.226	0.246
51.	GPRS_4TX	Front Side	661	1880.0	26.13	26.5	1.089	0.093	0.101
52.	GPRS_4TX	Bottom side	661	1880.0	26.13	26.5	1.089	0.11	0.120
53.	GPRS_4TX	Right side	661	1880.0	26.13	26.5	1.089	0.084	0.091
54.	GPRS_4TX	Left side	661	1880.0	26.13	26.5	1.089	0.052	0.057

WCDMA Band 5 – Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
55.	RMC 12.2k	Back Side	4183	836.4	22.97	23.5	1.130	0.122	0.138
56.	RMC 12.2k	Front Side	4183	836.4	22.97	23.5	1.130	0.129	0.146
57.	RMC 12.2k	Bottom side	4183	836.4	22.97	23.5	1.130	0.022	0.025
58.	RMC 12.2k	Right side	4183	836.4	22.97	23.5	1.130	0.024	0.027
59.	RMC 12.2k	Left side	4183	836.4	22.97	23.5	1.130	0.019	0.021

LTE Band 2–Body SAR Test (Gap: 10mm)									
Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)	
	Modulation, Bandwidth, RB		MHz						
60.	RMC QPSK 20MHz 1RB	Back Side	1860.0	24.05	24.5	1.109	0.242	0.268	
61.	RMC QPSK 20MHz 1RB	Front Side	1860.0	24.05	24.5	1.109	0.107	0.119	
62.	RMC QPSK 20MHz 1RB	Bottom side	1860.0	24.05	24.5	1.109	0.111	0.123	
63.	RMC QPSK 20MHz 1RB	Right side	1860.0	24.05	24.5	1.109	0.084	0.093	

64.	RMC QPSK 20MHz 1RB	Left side	1860.0	24.05	24.5	1.109	0.038	0.042
65.	RMC QPSK 20MHz 50%RB	Back Side	1860.0	23.87	24.0	1.030	0.206	0.212
66.	RMC QPSK 20MHz 50%RB	Front Side	1860.0	23.87	24.0	1.030	0.102	0.105
67.	RMC QPSK 20MHz 50%RB	Bottom side	1860.0	23.87	24.0	1.030	0.104	0.107
68.	RMC QPSK 20MHz 50%RB	Right side	1860.0	23.87	24.0	1.030	0.057	0.059
69.	RMC QPSK 20MHz 50%RB	Left side	1860.0	23.87	24.0	1.030	0.026	0.027

**LTE Band 12–Body SAR Test (Gap: 10mm)**

Plot No.	Mode	Test Position Body	Frequency	Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
	Modulation, Bandwidth, RB		MHz					
70.	RMC QPSK 10MHz 1RB	Back Side	704.0	24.01	24.5	1.119	0.189	0.212
71.	RMC QPSK 10MHz 1RB	Front Side	704.0	24.01	24.5	1.119	0.107	0.120
72.	RMC QPSK 10MHz 1RB	Bottom side	704.0	24.01	24.5	1.119	0.019	0.021
73.	RMC QPSK 10MHz 1RB	Right side	704.0	24.01	24.5	1.119	0.084	0.094
74.	RMC QPSK 10MHz 1RB	Left side	704.0	24.01	24.5	1.119	0.069	0.077
75.	RMC QPSK 10MHz 50%RB	Back Side	704.0	23.73	24.0	1.064	0.167	0.178
76.	RMC QPSK 10MHz 50%RB	Front Side	704.0	23.73	24.0	1.064	0.095	0.101
77.	RMC QPSK 10MHz 50%RB	Bottom side	704.0	23.73	24.0	1.064	0.015	0.016
78.	RMC QPSK 10MHz 50%RB	Right side	704.0	23.73	24.0	1.064	0.063	0.067
79.	RMC QPSK 10MHz 50%RB	Left side	704.0	23.73	24.0	1.064	0.059	0.063

**WLAN 2.4GHz –Body SAR Test**

Plot No.	Mode	Test Position Body	Frequency		Output Power (dBm)	Rated Limit (dBm)	Scaling Factor	SAR1g (W/kg)	Scaled SAR1g (W/kg)
			CH.	MHz					
80.	802.11b	Back Side	06	2437	14.27	14.5	1.054	0.112	0.118
81.	802.11b	Front Side	06	2437	14.27	14.5	1.054	0.153	0.161
82.	802.11b	Left side	06	2437	14.27	14.5	1.054	0.131	0.138
83.	802.11b	Top Side	06	2437	14.27	14.5	1.054	0.046	0.049

### 9.3 Simultaneous Multi-band Transmission SAR Analysis

#### List of Mode for Simultaneous Multi-band Transmission

No.	Configurations	Head SAR	Body-worn SAR	Hotspot SAR
1	GSM(Voice) + WLAN(Data)	Yes	Yes	-
2	GPRS/ EDGE(Data) + WLAN(Data)	-	-	Yes
3	WCDMA (Voice)+ WLAN(Data)	Yes	Yes	-
4	HSDPA(Data) + WLAN(Data)	-	-	Yes
5	HSUPA(Data) + WLAN(Data)	-	-	Yes
6	LTE(Data) + WLAN(Data)	-	-	Yes
7	GSM(Voice) + Bluetooth(Data)	Yes	Yes	-
8	GPRS/ EDGE(Data) + Bluetooth(Data)	-	-	Yes
9	WCDMA(Voice) + Bluetooth(Data)	Yes	Yes	-
10	HSDPA(Data)+ Bluetooth(Data)	-	-	Yes
11	HSUPA(Data) + Bluetooth(Data)	-	-	Yes
12	LTE(Data) + Bluetooth(Data)	-	-	Yes

#### Remark:

- GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:  
 $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ;  
 where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

#### Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm	SAR(1g) 10mm
5.0	3.16	5/10	2.402	7.5	0.131	0.065

- The maximum SAR summation is calculated based on the same configuration and test position.



**Head SAR**
**WWAN and WLAN**

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	0.141	0.472	0.613
Right Tilted	GSM850	0.017	0.108	0.125
Left Cheek	GSM850	0.160	0.265	0.425
Left Tilted	GSM850	0.018	0.072	0.09
Right Cheek	GSM1900	0.038	0.472	0.51
Right Tilted	GSM1900	0.015	0.108	0.123
Left Cheek	GSM1900	0.035	0.265	0.3
Left Tilted	GSM1900	0.014	0.072	0.086
Right Cheek	GPRS850	0.222	0.472	<b>0.694</b>
Right Tilted	GPRS850	0.044	0.108	0.152
Left Cheek	GPRS850	0.226	0.265	0.491
Left Tilted	GPRS850	0.047	0.072	0.119
Right Cheek	GPRS1900	0.071	0.472	0.543
Right Tilted	GPRS1900	0.023	0.108	0.131
Left Cheek	GPRS1900	0.049	0.265	0.314
Left Tilted	GPRS1900	0.017	0.072	0.089
Right Cheek	WCDMA Band 5	0.130	0.472	0.602
Right Tilted	WCDMA Band 5	0.024	0.108	0.132
Left Cheek	WCDMA Band 5	0.141	0.265	0.406
Left Tilted	WCDMA Band 5	0.027	0.072	0.099
Right Cheek	LTE Band 2	0.068	0.472	0.54
Right Tilted	LTE Band 2	0.024	0.108	0.132
Left Cheek	LTE Band 2	0.057	0.265	0.322
Left Tilted	LTE Band 2	0.022	0.072	0.094
Right Cheek	LTE Band 12	0.078	0.472	0.55
Right Tilted	LTE Band 12	0.027	0.108	0.135
Left Cheek	LTE Band 12	0.081	0.265	0.346
Left Tilted	LTE Band 12	0.028	0.072	0.1

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	0.141	0.131	0.272
Right Tilted	GSM850	0.017	0.131	0.148
Left Cheek	GSM850	0.160	0.131	0.291
Left Tilted	GSM850	0.018	0.131	0.149
Right Cheek	GSM1900	0.038	0.131	0.169
Right Tilted	GSM1900	0.015	0.131	0.146
Left Cheek	GSM1900	0.035	0.131	0.166
Left Tilted	GSM1900	0.014	0.131	0.145
Right Cheek	GPRS850	0.222	0.131	0.353
Right Tilted	GPRS850	0.044	0.131	0.175
Left Cheek	GPRS850	0.226	0.131	<b>0.357</b>
Left Tilted	GPRS850	0.047	0.131	0.178
Right Cheek	GPRS1900	0.071	0.131	0.202
Right Tilted	GPRS1900	0.023	0.131	0.154
Left Cheek	GPRS1900	0.049	0.131	0.18
Left Tilted	GPRS1900	0.017	0.131	0.148
Right Cheek	WCDMA Band 5	0.130	0.131	0.261
Right Tilted	WCDMA Band 5	0.024	0.131	0.155
Left Cheek	WCDMA Band 5	0.141	0.131	0.272
Left Tilted	WCDMA Band 5	0.027	0.131	0.158
Right Cheek	LTE Band 2	0.068	0.131	0.199
Right Tilted	LTE Band 2	0.024	0.131	0.155
Left Cheek	LTE Band 2	0.057	0.131	0.188
Left Tilted	LTE Band 2	0.022	0.131	0.153
Right Cheek	LTE Band 12	0.078	0.131	0.209
Right Tilted	LTE Band 12	0.027	0.131	0.158
Left Cheek	LTE Band 12	0.081	0.131	0.212
Left Tilted	LTE Band 12	0.028	0.131	0.159

**Body-worn SAR**
**WWAN and WLAN**

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.307	0.118	<b>0.425</b>
Front	GSM850	0.186	0.161	0.347
Back	GSM1900	0.143	0.118	0.261
Front	GSM1900	0.059	0.161	0.22
Back	WCDMA Band 5	0.138	0.118	0.256
Front	WCDMA Band 5	0.146	0.161	0.307
Back	LTE Band 2	0.268	0.118	0.386
Front	LTE Band 2	0.119	0.161	0.28
Back	LTE Band 12	0.212	0.118	0.33
Front	LTE Band 12	0.120	0.161	0.281

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.307	0.065	<b>0.372</b>
Front	GSM850	0.186	0.065	0.251
Back	GSM1900	0.143	0.065	0.208
Front	GSM1900	0.059	0.065	0.124
Back	WCDMA Band 5	0.138	0.065	0.203
Front	WCDMA Band 5	0.146	0.065	0.211
Back	LTE Band 2	0.268	0.065	0.333
Front	LTE Band 2	0.119	0.065	0.184
Back	LTE Band 12	0.212	0.065	0.277
Front	LTE Band 12	0.120	0.065	0.185

**Hotspot SAR**
**WWAN and WLAN**

Position	WWAN		WLAN	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.233	0.118	0.351
Front	GSM850	0.299	0.161	<b>0.460</b>
Top side	GSM850	--	0.049	0.049
Bottom side	GSM850	0.052	--	0.052
Right side	GSM850	0.071	--	0.071
Left side	GSM850	0.028	0.138	0.166
Back	GSM1900	0.246	0.118	0.364
Front	GSM1900	0.101	0.161	0.262
Top side	GSM1900	--	0.049	0.049
Bottom side	GSM1900	0.120	--	0.120
Right side	GSM1900	0.091	--	0.091
Left side	GSM1900	0.057	0.138	0.195
Back	WCDMA Band 5	0.138	0.118	0.256
Front	WCDMA Band 5	0.146	0.161	0.307
Top side	WCDMA Band 5	--	0.049	0.049
Bottom side	WCDMA Band 5	0.025	--	0.025
Right side	WCDMA Band 5	0.027	--	0.027
Left side	WCDMA Band 5	0.021	0.138	0.159
Back	LTE Band 2	0.268	0.118	0.386
Front	LTE Band 2	0.119	0.161	0.28
Top side	LTE Band 2	--	0.049	0.049
Bottom side	LTE Band 2	0.123	--	0.123
Right side	LTE Band 2	0.093	--	0.093
Left side	LTE Band 2	0.042	0.138	0.18
Back	LTE Band 12	0.212	0.118	0.33
Front	LTE Band 12	0.120	0.161	0.281
Top side	LTE Band 12	--	0.049	0.049
Bottom side	LTE Band 12	0.021	--	0.021
Right side	LTE Band 12	0.094	--	0.094
Left side	LTE Band 12	0.077	0.138	0.215

**WWAN and Bluetooth**

Position	WWAN		Bluetooth	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Back	GSM850	0.233	0.065	0.298
Front	GSM850	0.299	0.065	<b>0.364</b>
Top side	GSM850	--	0.065	0.065
Bottom side	GSM850	0.052	--	0.052
Right side	GSM850	0.071	--	0.071
Left side	GSM850	0.028	0.065	0.093
Back	GSM1900	0.246	0.065	0.311
Front	GSM1900	0.101	0.065	0.166
Top side	GSM1900	--	0.065	0.065
Bottom side	GSM1900	0.120	--	0.120
Right side	GSM1900	0.091	--	0.091
Left side	GSM1900	0.057	0.065	0.122
Back	WCDMA Band 5	0.138	0.065	0.203
Front	WCDMA Band 5	0.146	0.065	0.211
Top side	WCDMA Band 5	--	0.065	0.065
Bottom side	WCDMA Band 5	0.025	--	0.025
Right side	WCDMA Band 5	0.027	--	0.027
Left side	WCDMA Band 5	0.021	0.065	0.086
Back	LTE Band 2	0.268	0.065	0.333
Front	LTE Band 2	0.119	0.065	0.184
Top side	LTE Band 2	--	0.065	0.065
Bottom side	LTE Band 2	0.123	--	0.123
Right side	LTE Band 2	0.093	--	0.093
Left side	LTE Band 2	0.042	0.065	0.107
Back	LTE Band 12	0.212	0.065	0.277
Front	LTE Band 12	0.120	0.065	0.185
Top side	LTE Band 12	--	0.065	0.065
Bottom side	LTE Band 12	0.021	--	0.021
Right side	LTE Band 12	0.094	--	0.094
Left side	LTE Band 12	0.077	0.065	0.142

## 10. Measurement Uncertainty

### 10.1 Uncertainty for EUT SAR Test

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+- %)	10g Ui (+- %)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
<b>Test Sample Related</b>									
Test sample positioning	E.4.2	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1	5.00	N	1	1	1	5.00	5.00	
Output power Variation - SAR drift measurement	E.2.9	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
SAR scaling	E6.5	0.0	R	$\sqrt{3}$	1	1	0.0	0.0	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	1.9	R	$\sqrt{3}$	1	0.84	1.10	0.90	$\infty$
Liquid conductivity - deviation	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	$\infty$

from target value										
Liquid conductivity measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	$\infty$	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	$\infty$	
Liquid permittivity measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	$\infty$	
Combined Standard Uncertainty			RSS				12.98	12.53		
Expanded Uncertainty (95% Confidence interval)			K=2				25.32	24.43		

## 10.2 Uncertainty for System Performance Check

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+- %)	10g Ui (+- %)	Vi
<b>Measurement System</b>									
Probe calibration	E.2.1	7.0	N	1	1	1	7.00	7.00	$\infty$
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	$(1_{Cp})^{1/2}$	$(1_{Cp})^{1/2}$	1.02	1.02	$\infty$
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	$(Cp)^{1/2}$	$(Cp)^{1/2}$	1.63	1.63	$\infty$
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Modulation response	E.2.5	0	R	$\sqrt{3}$	0	0	0.0	0.0	$\infty$
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	$\infty$
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
RF ambient Conditions – Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient Conditions - Reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Extrapolation, interpolation and integration Algorithms for Max.	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$

SAR Evaluation									
<b>Dipole</b>									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	N-1
Input power and SAR drift measurement	8,6.6.2	12.02	R	$\sqrt{3}$	1	1	6.94	6.94	$\infty$
Deviation of experimental dipole from numerical dipole	E.6.4	5.5	R	$\sqrt{3}$	1	1	3.20	3.20	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	E3.2	2.0	R	$\sqrt{3}$	1	0.84	1.10	1.10	$\infty$
Liquid conductivity - deviation from target value	E.3.2	5.00	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	
Liquid permittivity - deviation from target value	E.3.2	0.37	R	$\sqrt{3}$	0.6	0.49	0.13	0.10	
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				12.00	11.50	
Expanded Uncertainty (95% Confidence interval)			K=2				23.39	22.43	



## Annex A. Plots of System Performance Check

# MEASUREMENT 1

### For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/11/2017

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.99; Calibrated: 06/01/2017

### A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	Duty Cycle 1:1

### B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	41.320574
Conductivity (S/m)	0.862373
Power Variation (%)	0.038363
Ambient Temperature	21.1
Liquid Temperature	21.3

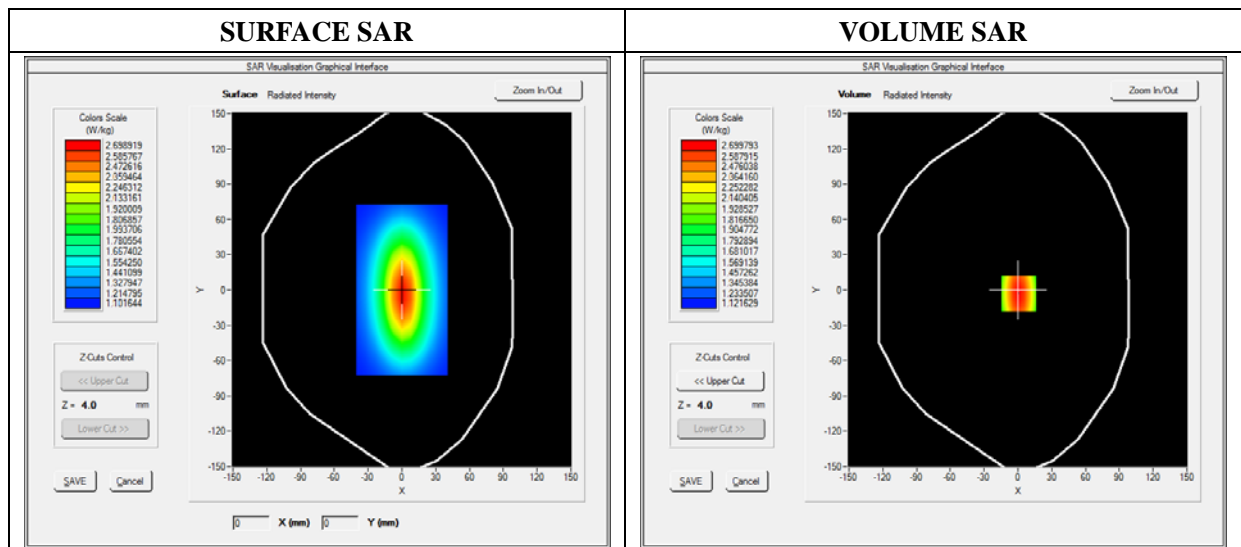




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.042744
SAR 1g (W/Kg)	2.164534

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.3634	1.8023	1.4523	1.2514	1.1005	1.0245

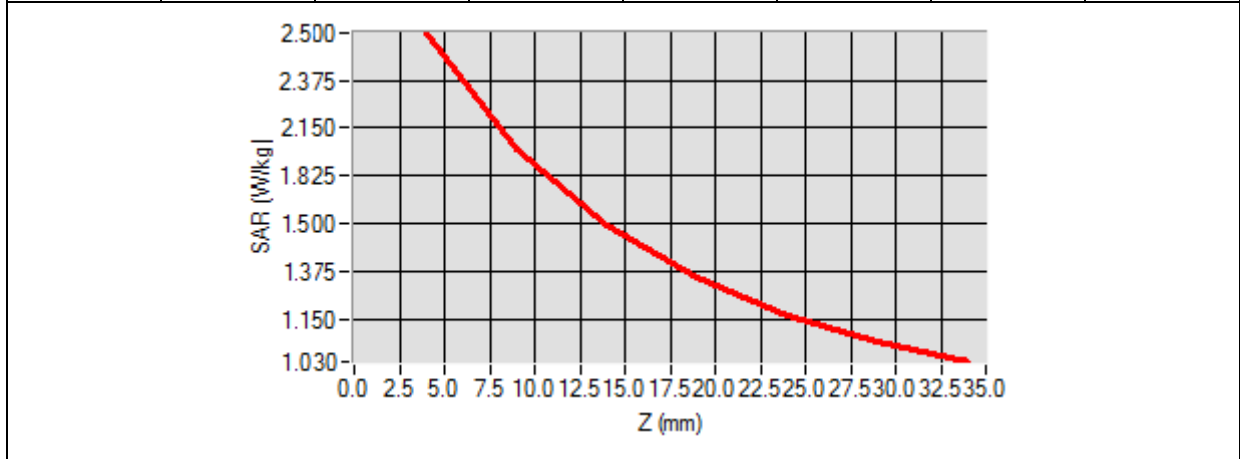

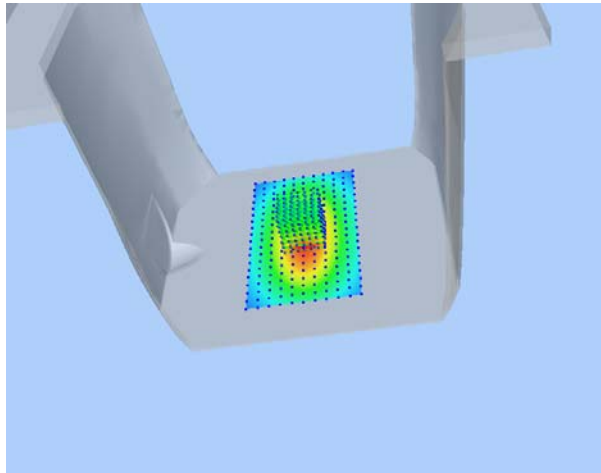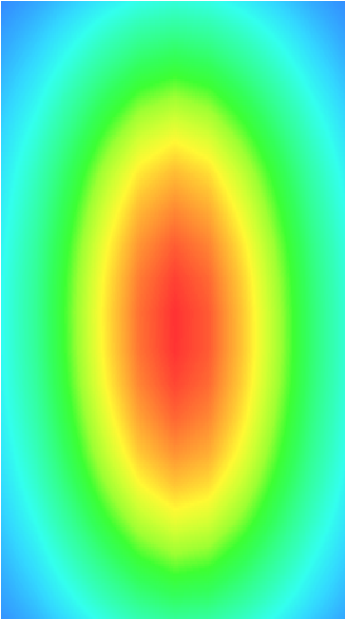3D screen shot	Hot spot position
	

## MEASUREMENT 2

### For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/11/2017

Measurement duration: 7 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW835
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative Permittivity (real part)</b>	41.110245
<b>Conductivity (S/m)</b>	0.871245
<b>Power Variation (%)</b>	0.038437
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

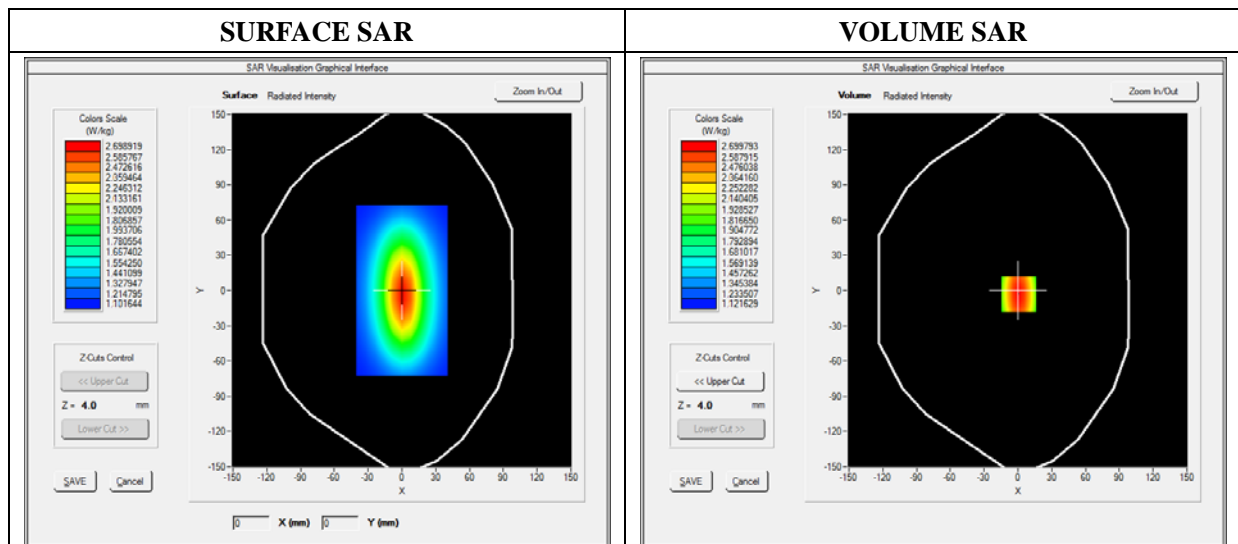




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.129489
SAR 1g (W/Kg)	2.411253

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.4900	1.8942	1.4811	1.3541	1.1123	1.0539

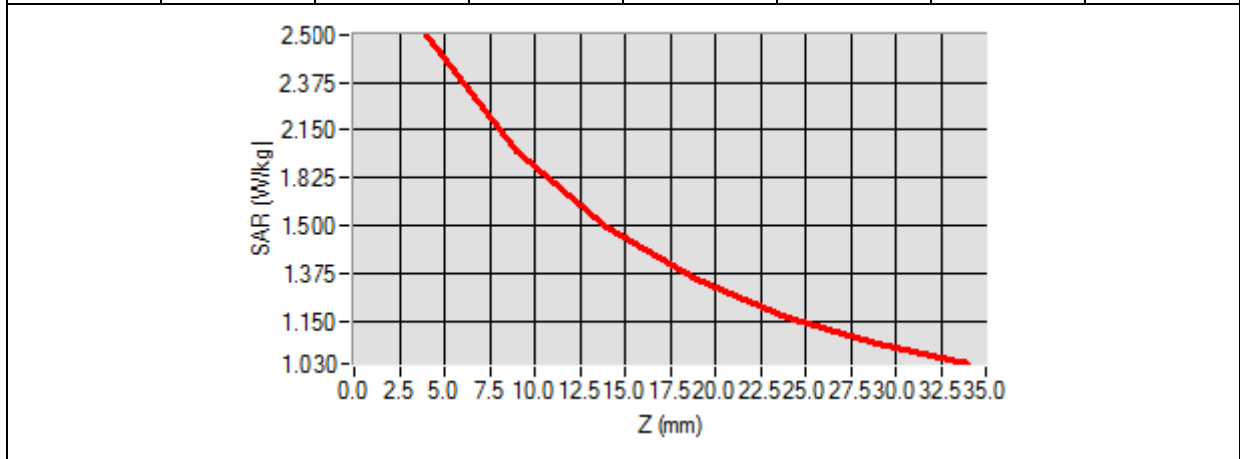

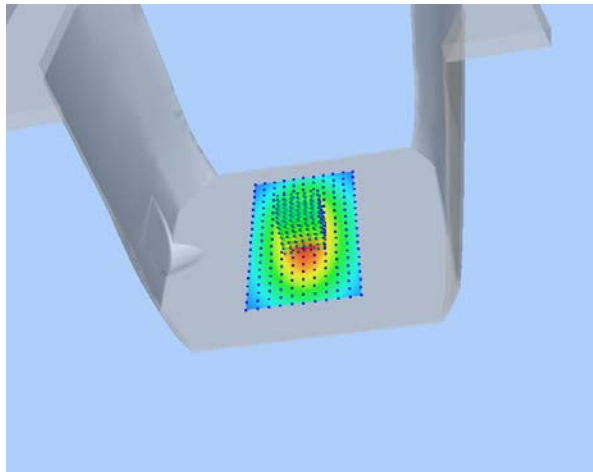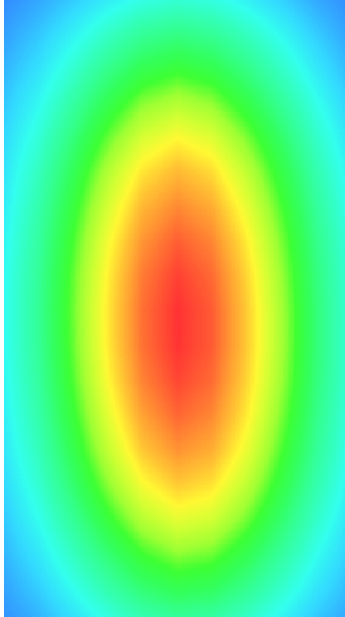3D screen shot	Hot spot position
	

# MEASUREMENT 3

## For Head Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW1900
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1900.000000
<b>Relative Permittivity (real part)</b>	38.560124
<b>Conductivity (S/m)</b>	1.380369
<b>Power Variation (%)</b>	1.022540
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

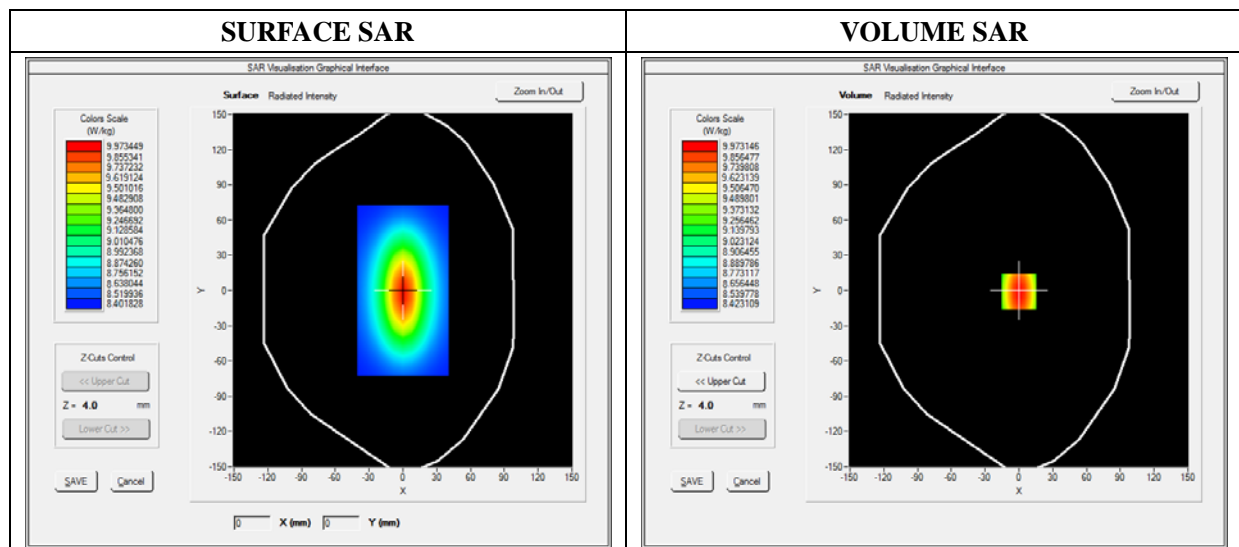




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.174526
SAR 1g (W/Kg)	9.913214

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2354	6.8400	5.0121	4.1189	3.0522	2.8424

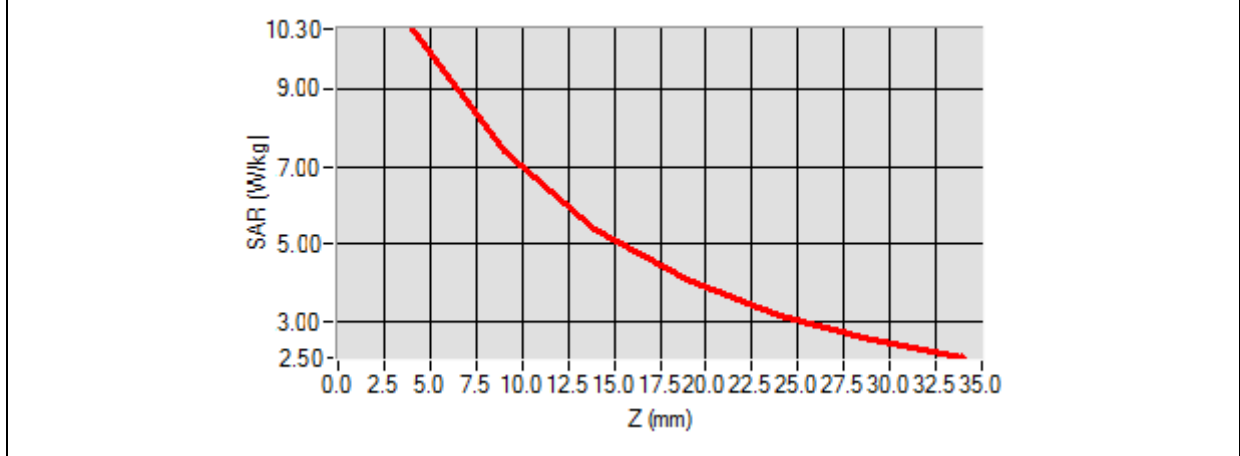

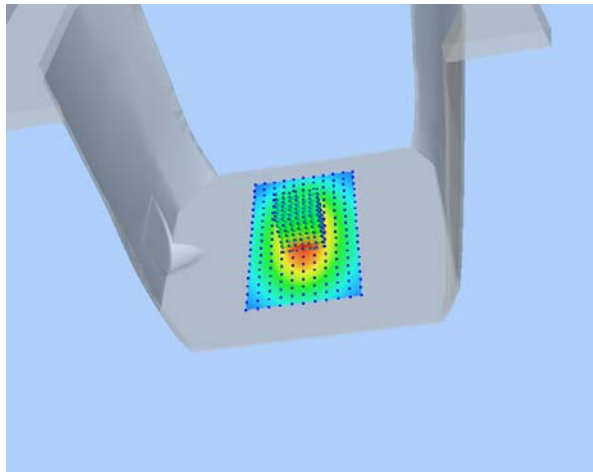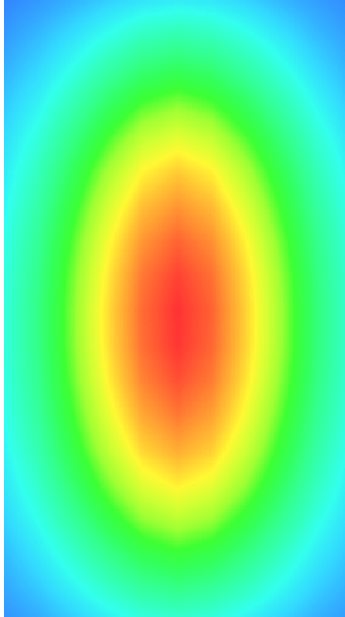3D screen shot	Hot spot position
	

# MEASUREMENT 4

**For Head Liquid**

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/13/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2450
<b>Signal</b>	Duty Cycle 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	2450.000000
<b>Relative Permittivity (real part)</b>	38.153660
<b>Conductivity (S/m)</b>	1.740236
<b>Power Variation (%)</b>	1.141452
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

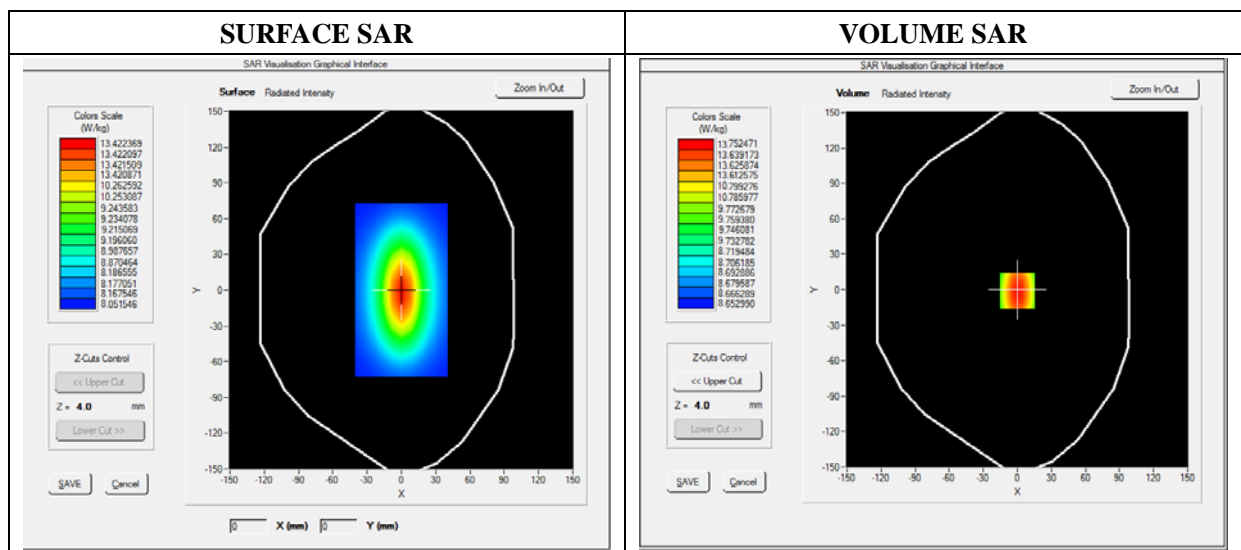




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	8.020427
SAR 1g (W/Kg)	13.452457

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	14.1034	12.0012	10.2624	7.4715	5.9022	4.5114

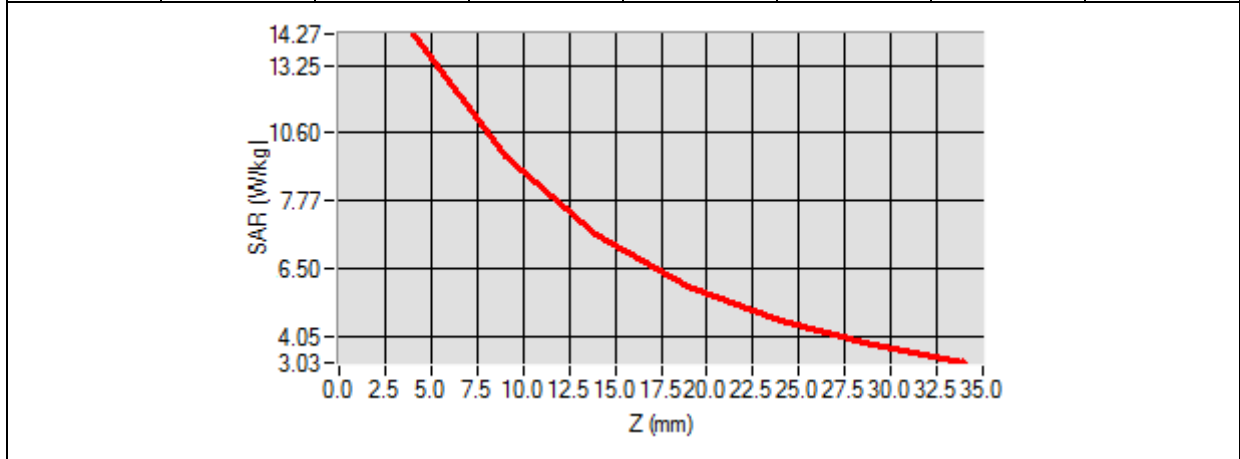

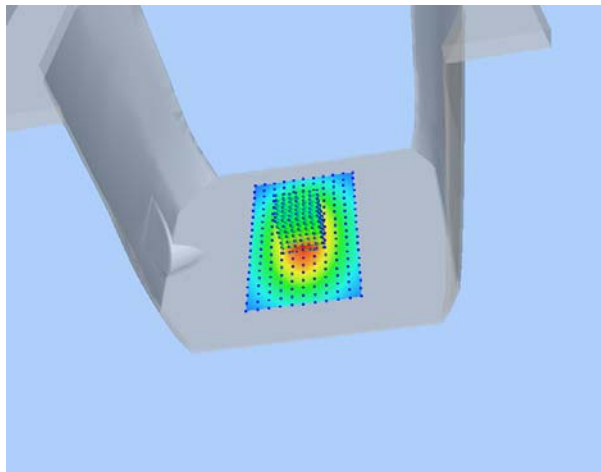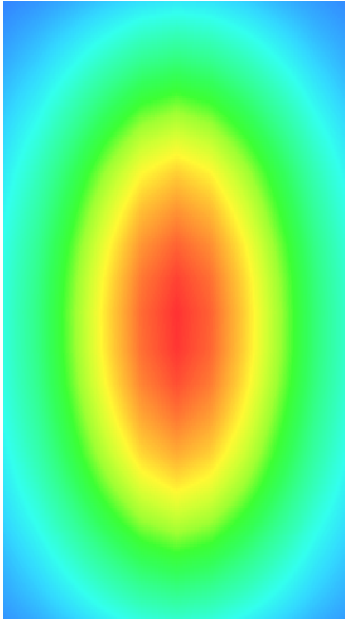3D screen shot	Hot spot position
	



# MEASUREMENT 5

**For Body Liquid**

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 06/01/2017

**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW750
<b>Signal</b>	Duty Cycle 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	750.000000
<b>Relative Permittivity (real part)</b>	54.964739
<b>Conductivity (S/m)</b>	0.931048
<b>Power Variation (%)</b>	0.034745
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

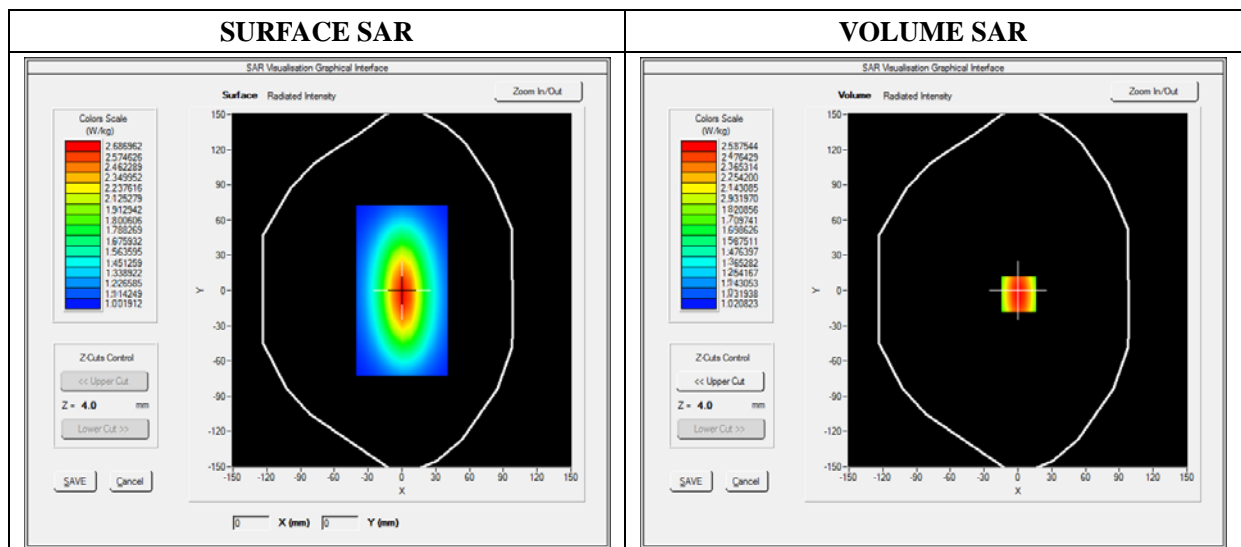




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.000865
SAR 1g (W/Kg)	2.124211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5132	1.1087	0.8214	0.5160	0.4875	0.4864

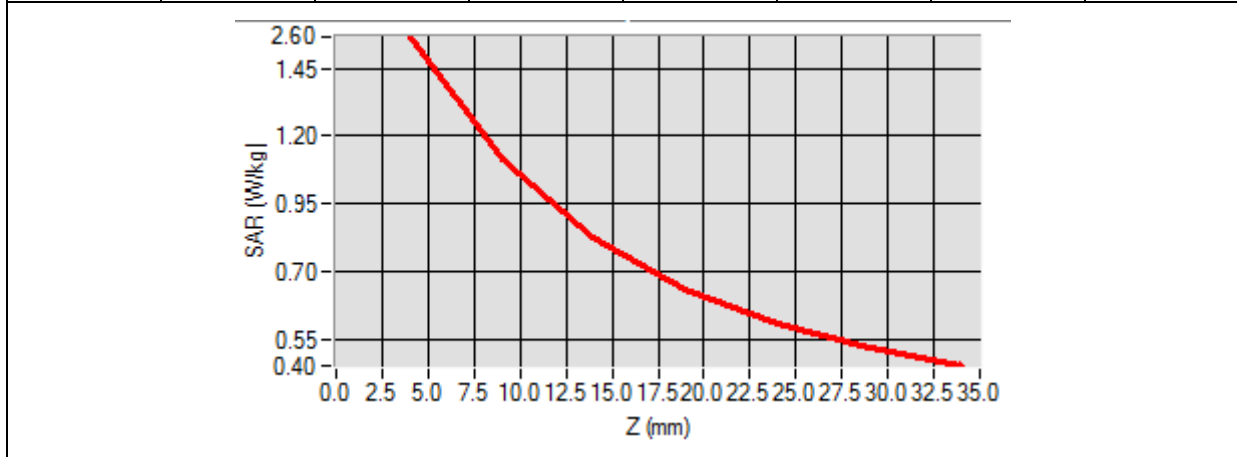

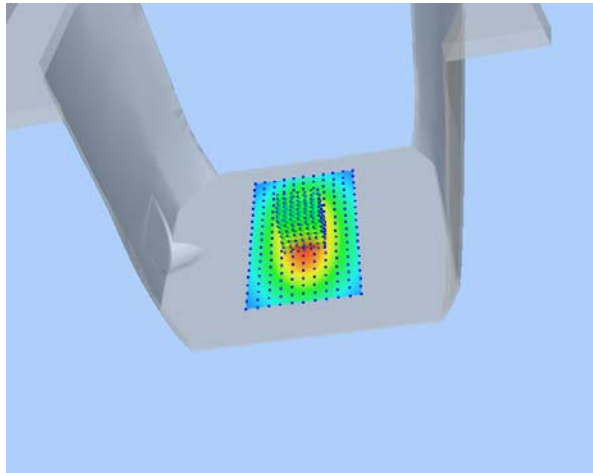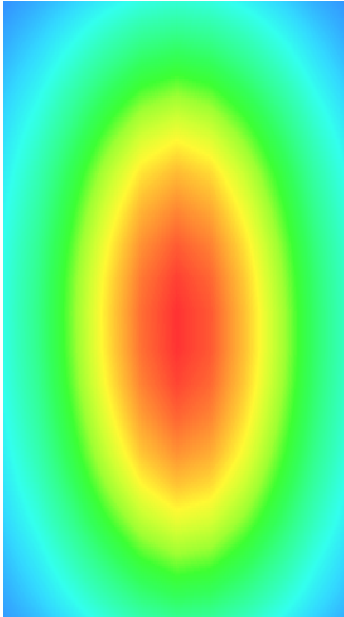3D screen shot	Hot spot position
	

# MEASUREMENT 6

## For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW835
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	0.901472
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

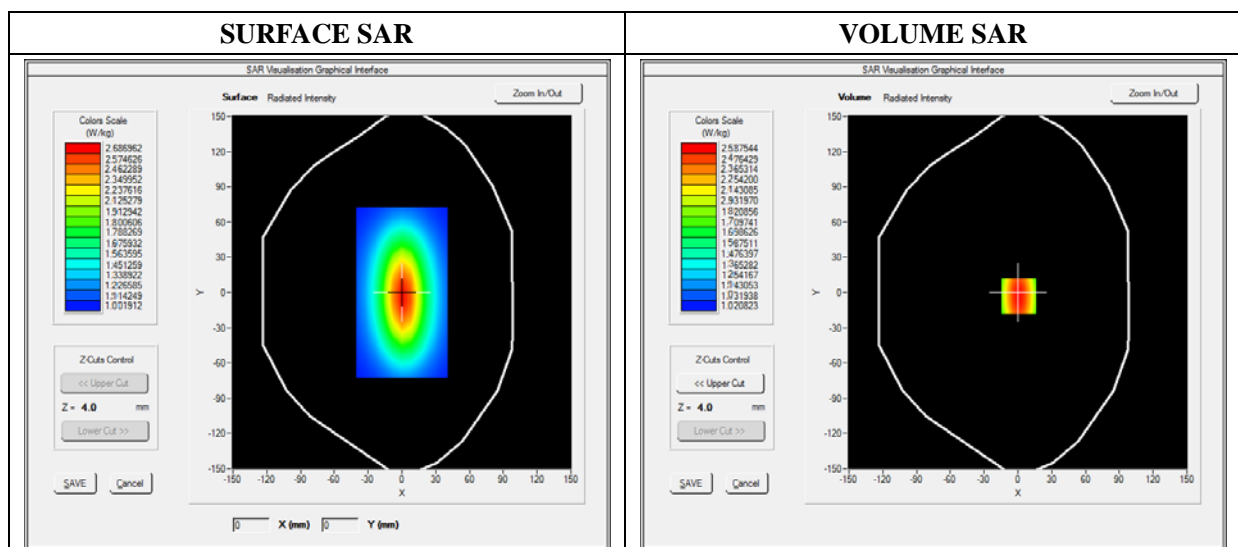




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	1.028956
SAR 1g (W/Kg)	2.354211

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5789	1.1300	0.8795	0.5940	0.5011	0.5100

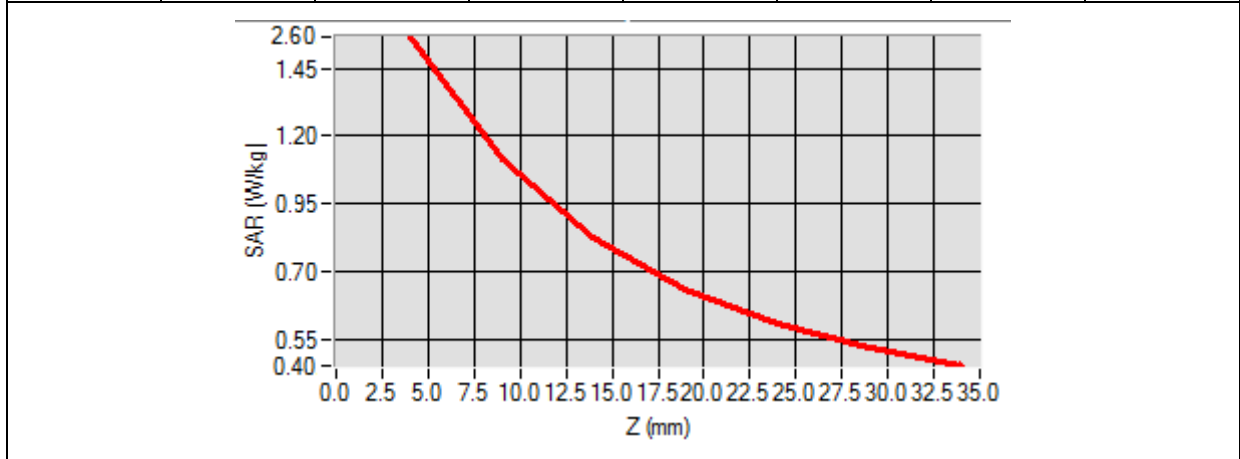

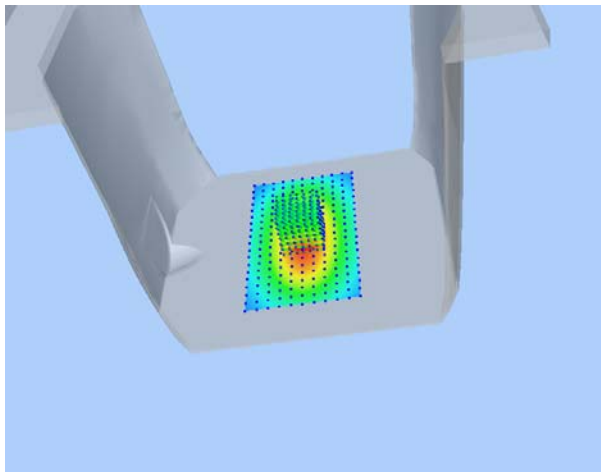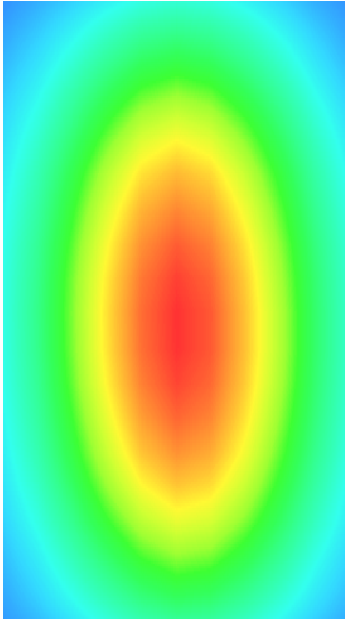3D screen shot	Hot spot position
	

# MEASUREMENT 7

**For Body Liquid**

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

**A. Experimental conditions**

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW1900
<b>Signal</b>	Duty Cycle 1:1

**B. SAR Measurement Results**

<b>Frequency (MHz)</b>	1900.000000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	0.541872
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

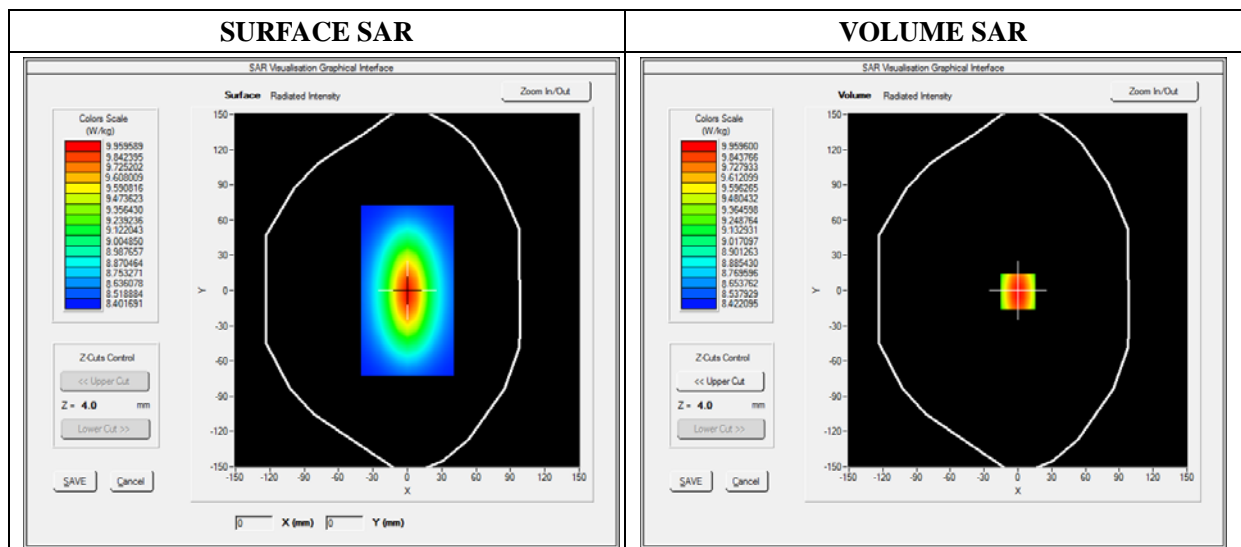




Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	5.134651
SAR 1g (W/Kg)	9.781550

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2031	6.43001	4.9011	4.5325	3.1201	2.5024

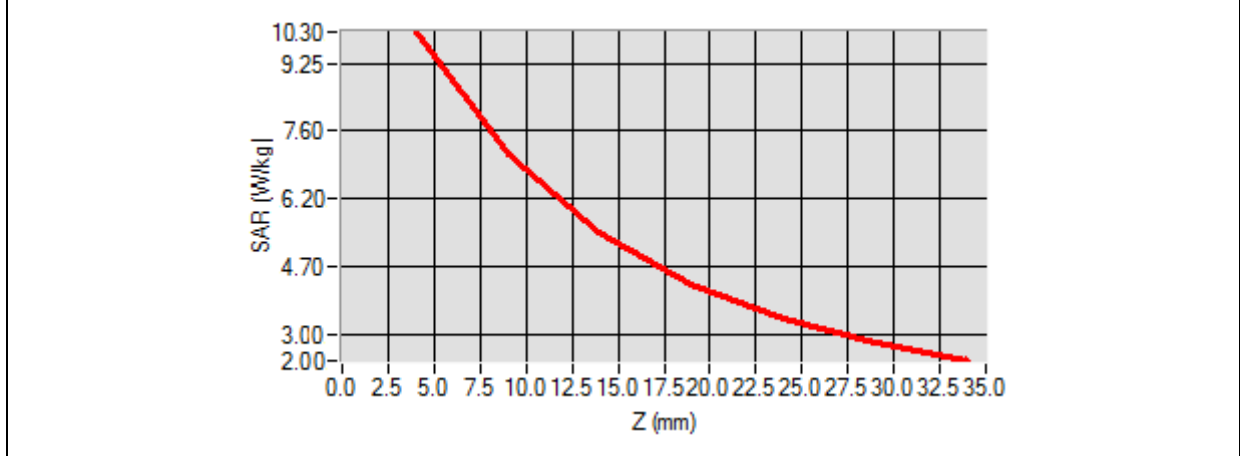

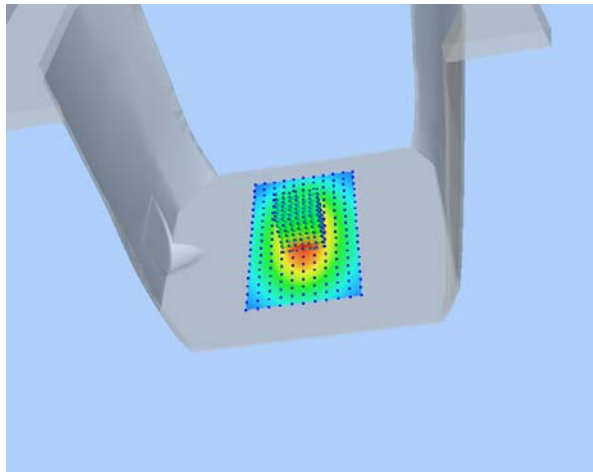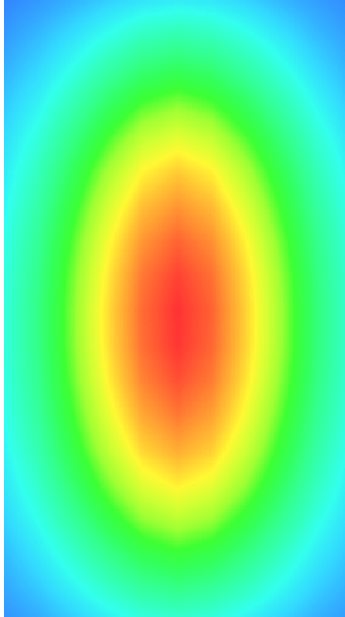3D screen shot	Hot spot position
	

# MEASUREMENT 8

## For Body Liquid

Type: Validation measurement (Fast, 75.00 %)

Date of measurement: 12/13/2017

Measurement duration: 12 minutes 21 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	dx=8mm dy=8mm
<b>Phantom</b>	Validation plane
<b>Device Position</b>	Dipole
<b>Band</b>	CW2450
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2450.000000
<b>Relative Permittivity (real part)</b>	52.010212
<b>Conductivity (S/m)</b>	1.910255
<b>Power Variation (%)</b>	1.369745
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2


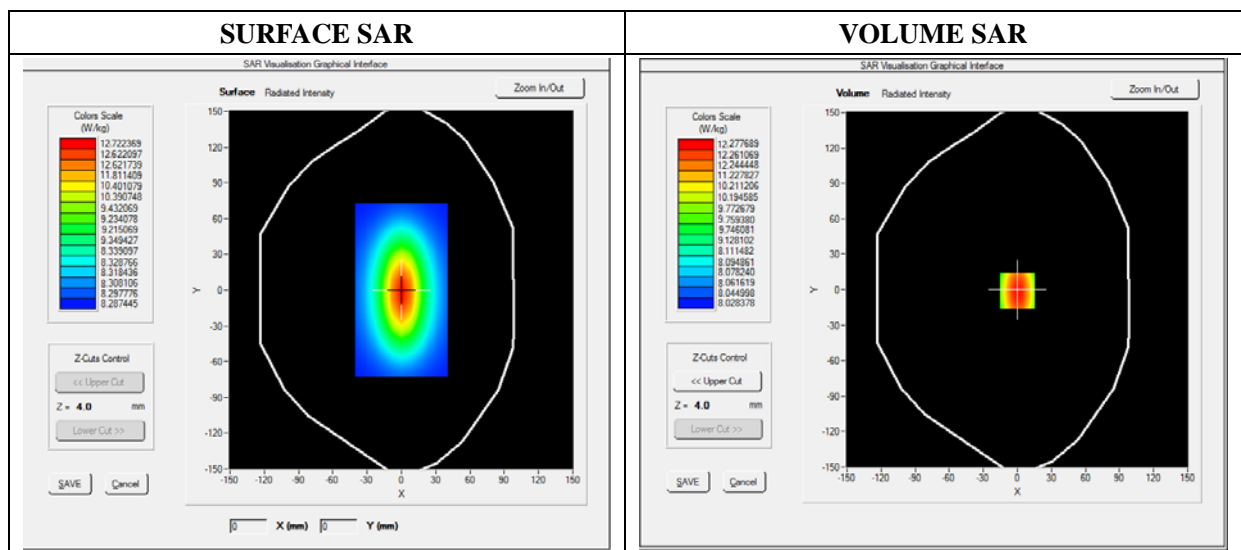


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	7.119522
SAR 1g (W/Kg)	12.592360

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	13.3911	11.7951	9.2945	8.5400	6.3712	4.6225

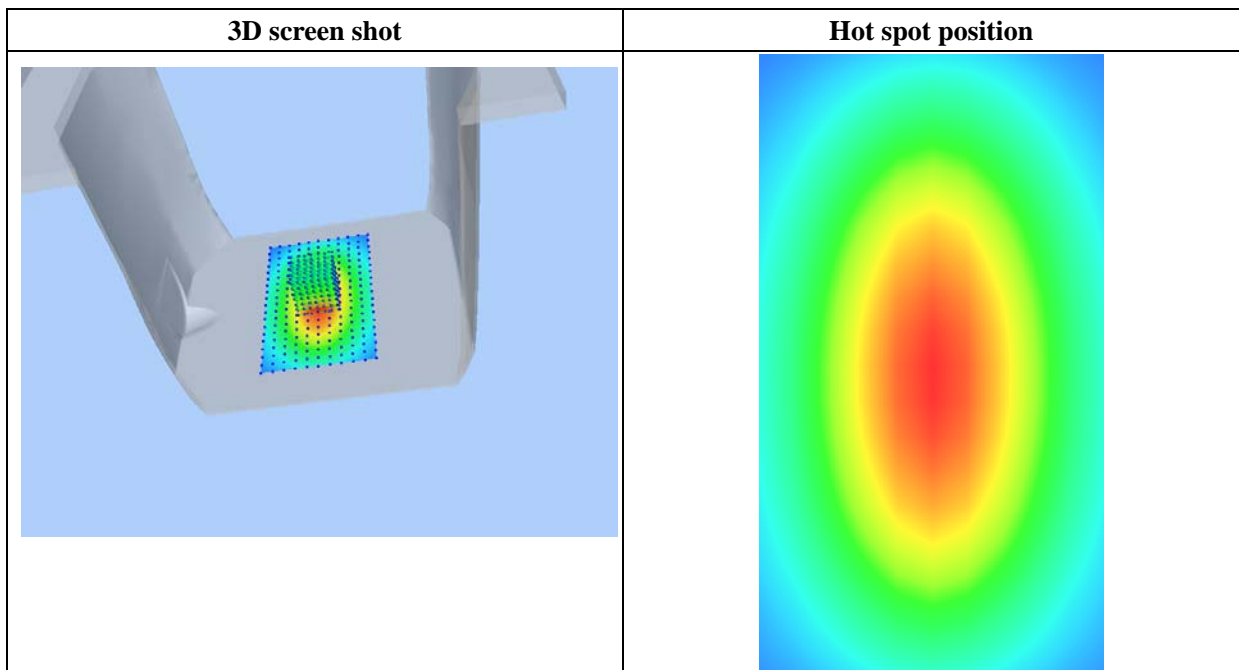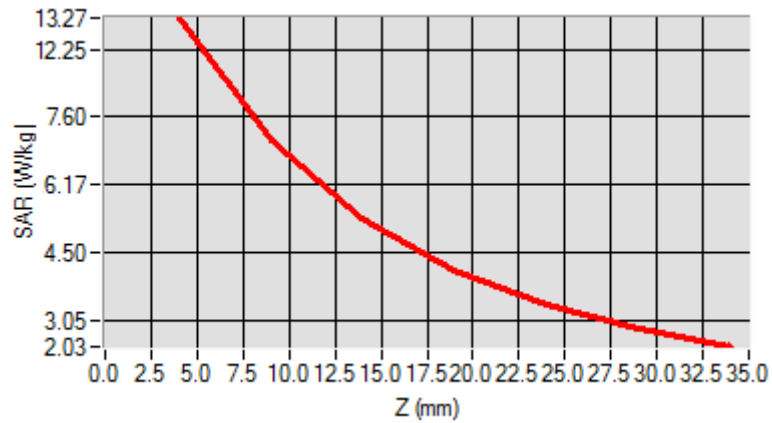



## Annex B. Plots of SAR Measurement

<b><u>TYPE</u></b>	<b><u>BAND</u></b>	<b><u>PARAMETERS</u></b>
<b>Phone</b>	<b>GSM850</b>	<u>Measurement 3:</u> Left Head with Cheek device position on Low Channel in GSM mode
<b>Phone</b>	<b>GSM1900</b>	<u>Measurement 5:</u> Right Head with Cheek device position on Low Channel in GSM mode
<b>Phone</b>	<b>GPRS850_2TX</b>	<u>Measurement 11:</u> Left Head with Cheek device position on Low Channel in GPRS mode
<b>Phone</b>	<b>GPRS1900_4TX</b>	<u>Measurement 13:</u> Right Head with Cheek device position on Middle Channel in GPRS mode
<b>Phone</b>	<b>WCDMA850_RMC</b>	<u>Measurement 19:</u> Left Head with Cheek device position on Middle Channel in WCDMA mode
<b>Phone</b>	<b>LTE Band 2_RMC</b>	<u>Measurement 21:</u> Right Head with Cheek device position on Low Channel in LTE mode
<b>Phone</b>	<b>LTE Band 12_RMC</b>	<u>Measurement 31:</u> Left Head with Cheek device position on Low Channel in LTE mode
<b>Phone</b>	<b>WiFi_802.11b</b>	<u>Measurement 37:</u> Right Head with Cheek device position on Middle Channel in 802.11b mode
<b>Phone</b>	<b>GSM850</b>	<u>Measurement 41:</u> Flat Plane with Back(Body-worn) device position on Low Channel in GSM mode
<b>Phone</b>	<b>GSM1900</b>	<u>Measurement 43:</u> Flat Plane with Back(Body-worn) device position on Low Channel in GSM mode
<b>Phone</b>	<b>GPRS850_2TX</b>	<u>Measurement 46:</u> Flat Plane with Front device position on Low Channel in GPRS mode
<b>Phone</b>	<b>GPRS1900_4TX</b>	<u>Measurement 50:</u> Flat Plane with Back device position on Middle Channel in GPRS mode
<b>Phone</b>	<b>WCDMA850_RMC</b>	<u>Measurement 56:</u> Flat Plane with Front device position on Middle Channel in WCDMA mode
<b>Phone</b>	<b>LTE Band 2_RMC</b>	<u>Measurement 60:</u> Flat Plane with Back device position on Low Channel in LTE mode
<b>Phone</b>	<b>LTE Band 12_RMC</b>	<u>Measurement 70:</u> Flat Plane with Back device position on Low Channel in LTE mode
<b>Phone</b>	<b>WiFi_802.11b</b>	<u>Measurement 81:</u> Flat Plane with Front side device position on Middle Channel in 802.11b mode
<i>Remark: SAR plot is showed the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.</i>		

# MEASUREMENT 3

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	41.110245
<b>Conductivity (S/m)</b>	0.871245
<b>Power Variation (%)</b>	1.144536
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

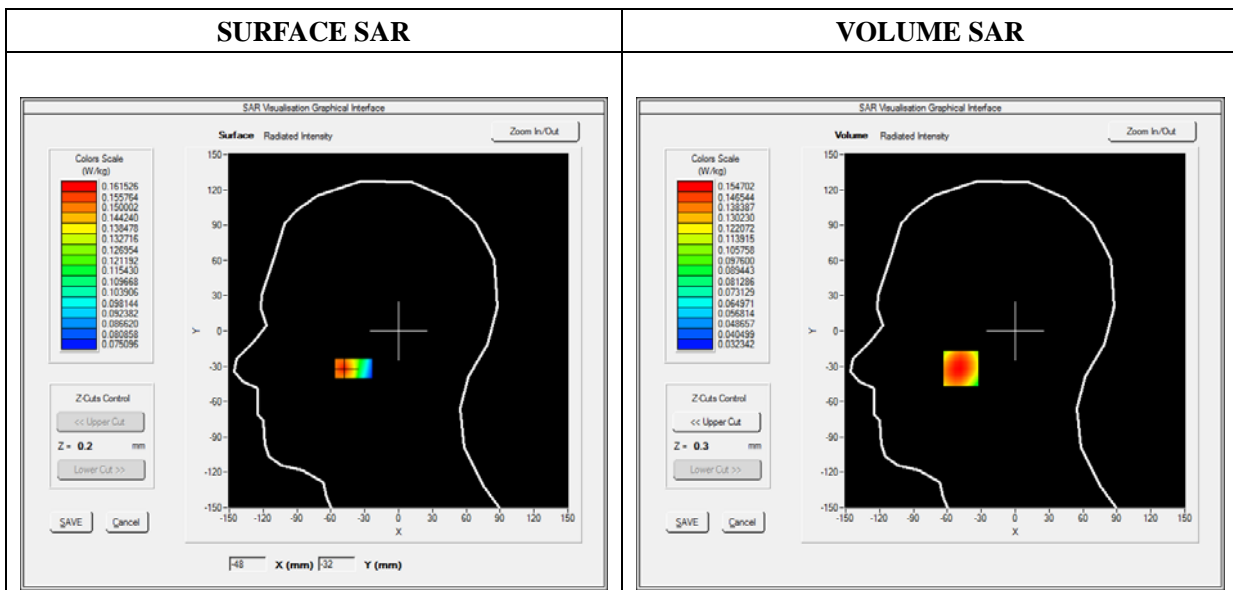




Maximum location: X=-48.00, Y=-32.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.119472
SAR 1g (W/Kg)	0.150562

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1790	0.1547	0.1289	0.1078	0.0904

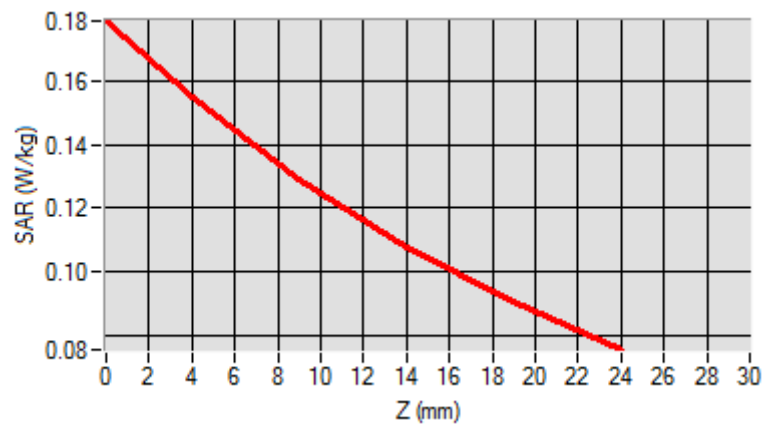

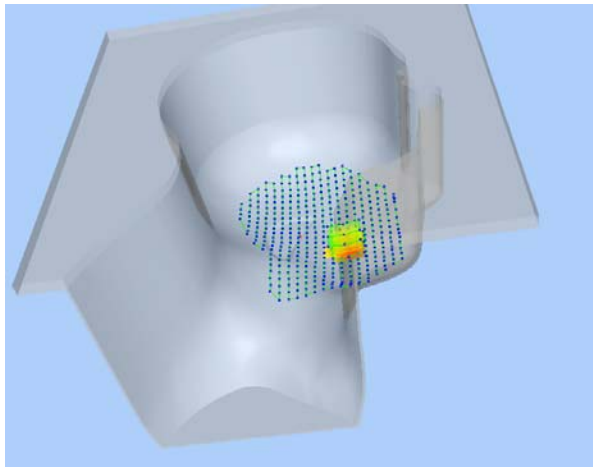3D screen shot	Hot spot position
	

# MEASUREMENT 5

Type: Phone measurement (Complete)

Date of measurement: 12/12/2017

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1850.200000
<b>Relative Permittivity (real part)</b>	38.560124
<b>Conductivity (S/m)</b>	1.380369
<b>Power Variation (%)</b>	1.442440
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

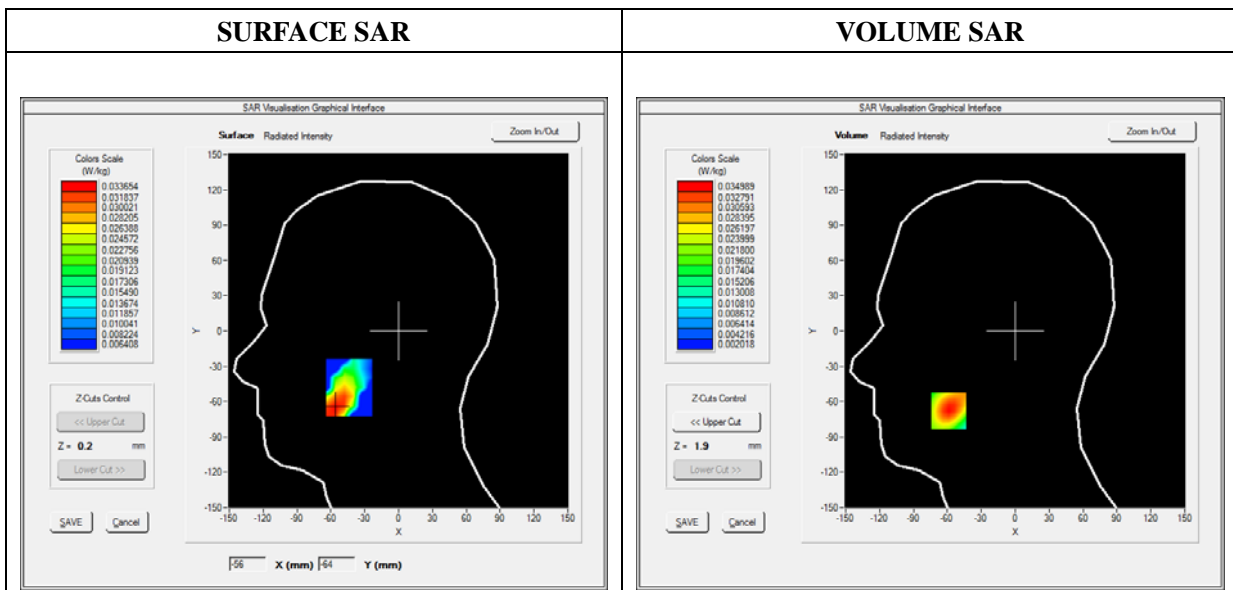




**Maximum location: X=-59.00, Y=-68.00**

**SAR Peak: 0.06 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.018383</b>
<b>SAR 1g (W/Kg)</b>	<b>0.032955</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.0580</b>	<b>0.0350</b>	<b>0.0182</b>	<b>0.0099</b>	<b>0.0062</b>

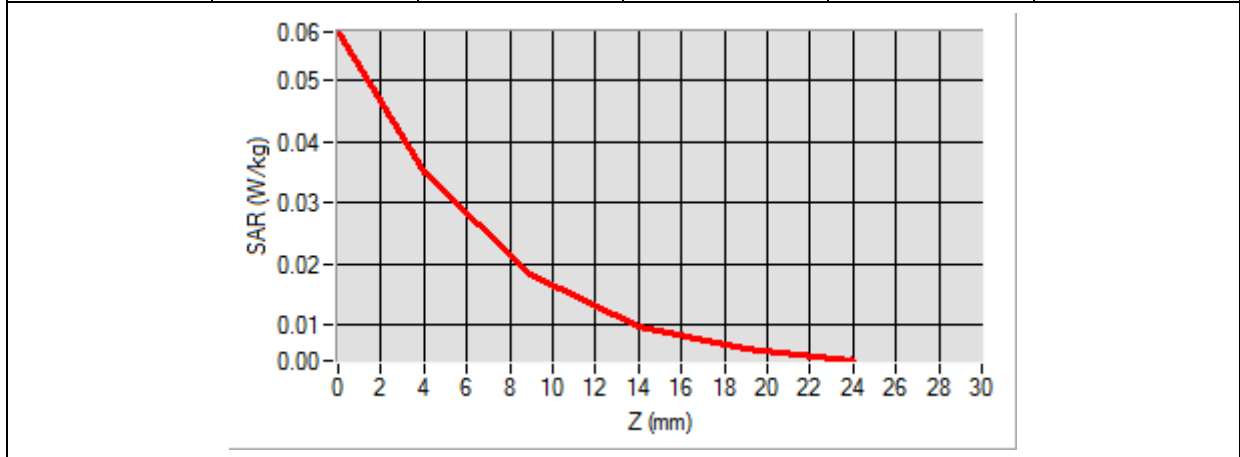

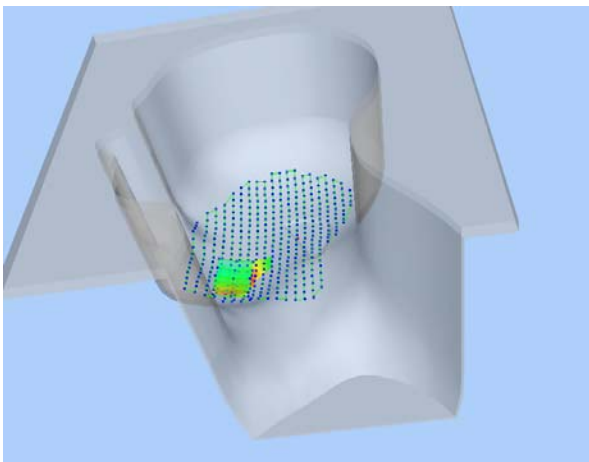3D screen shot	Hot spot position
	

# MEASUREMENT 11

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	GPRS850_2TX
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:4

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	41.110245
<b>Conductivity (S/m)</b>	0.871245
<b>Power Variation (%)</b>	1.536272
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

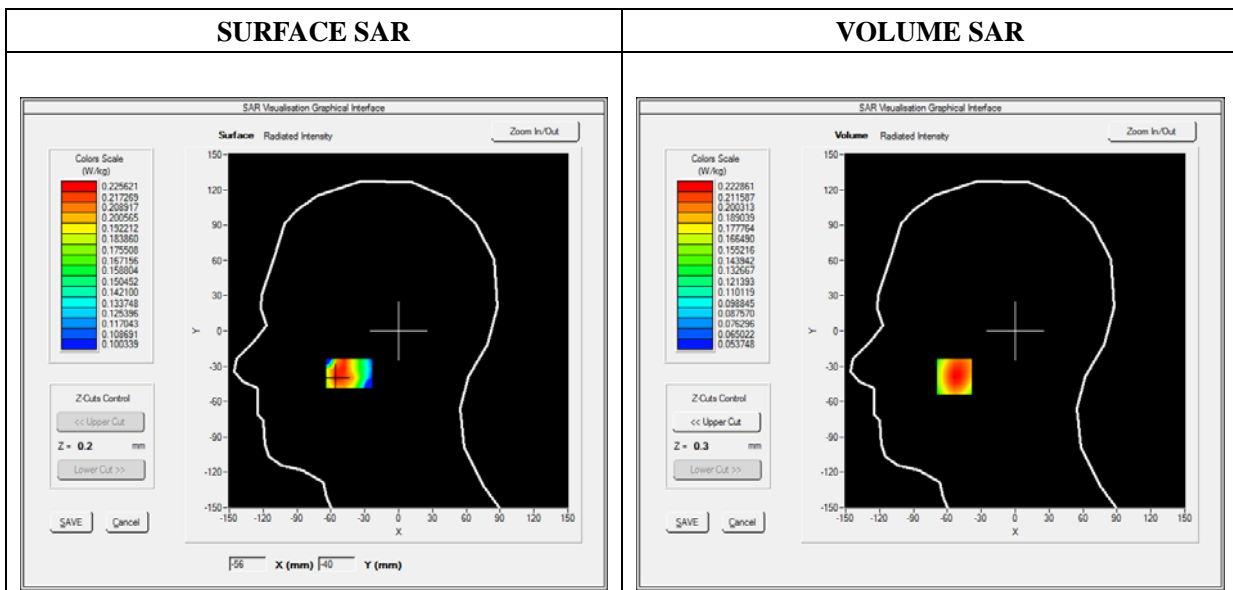




Maximum location: X=-54.00, Y=-39.00

SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.172690
SAR 1g (W/Kg)	0.216572

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2450	0.2229	0.1942	0.1648	0.1357

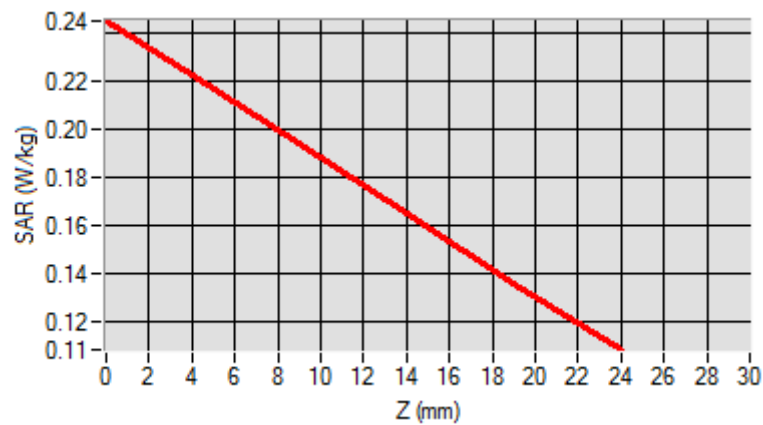

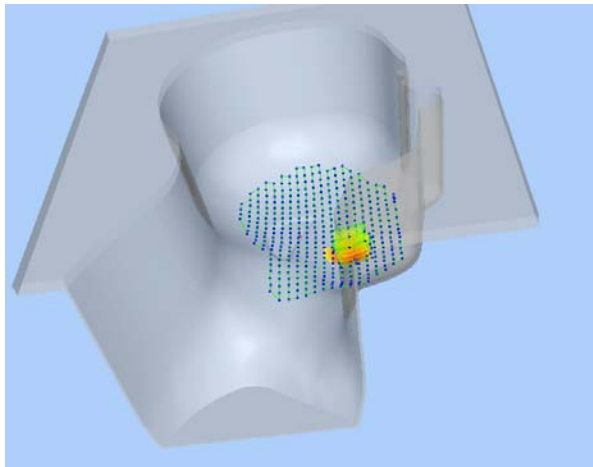3D screen shot	Hot spot position
	

# MEASUREMENT 13

Type: Phone measurement (Complete)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1:2

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	38.560124
<b>Conductivity (S/m)</b>	1.380369
<b>Power Variation (%)</b>	1.536272
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

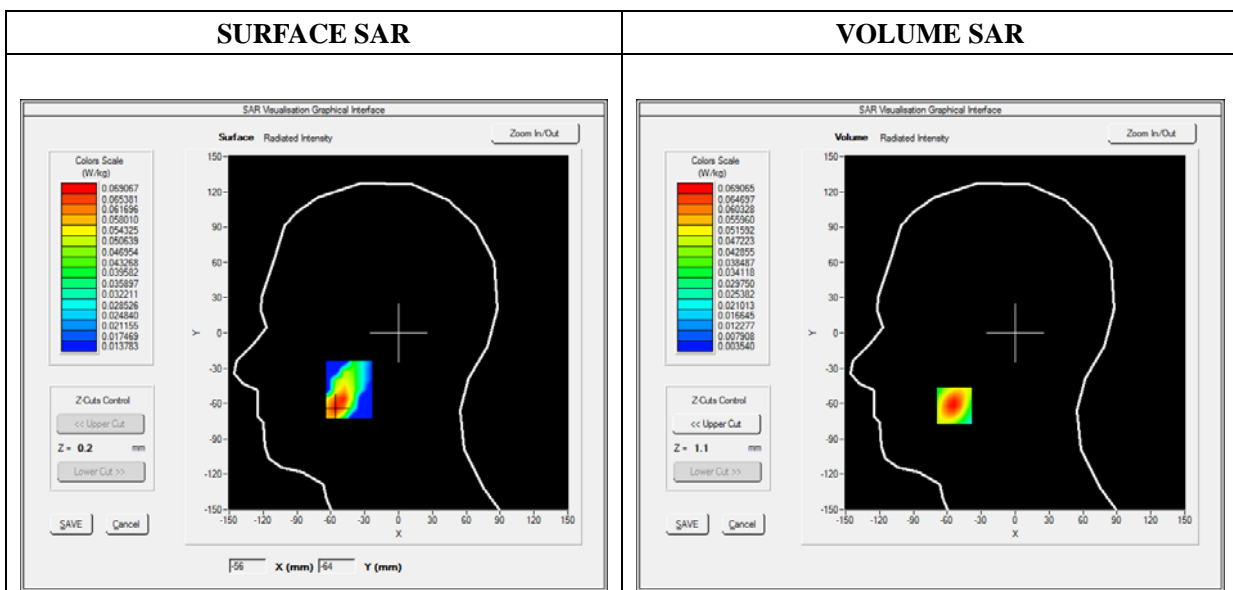






Maximum location: X=-54.00, Y=-62.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.034157
SAR 1g (W/Kg)	0.064736

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1195	0.0691	0.0334	0.0166	0.0096

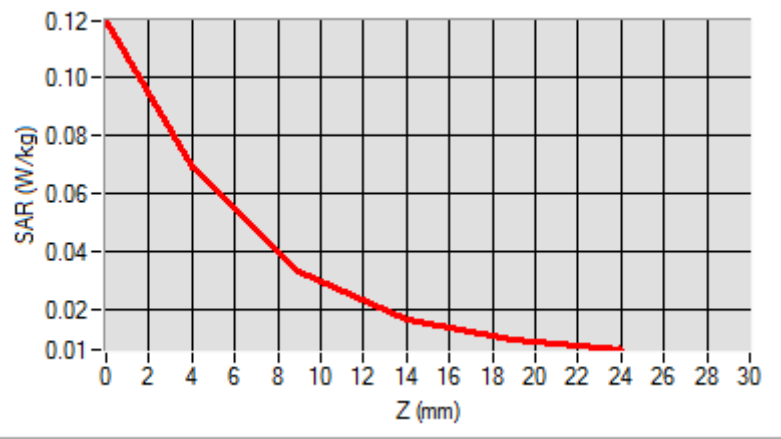

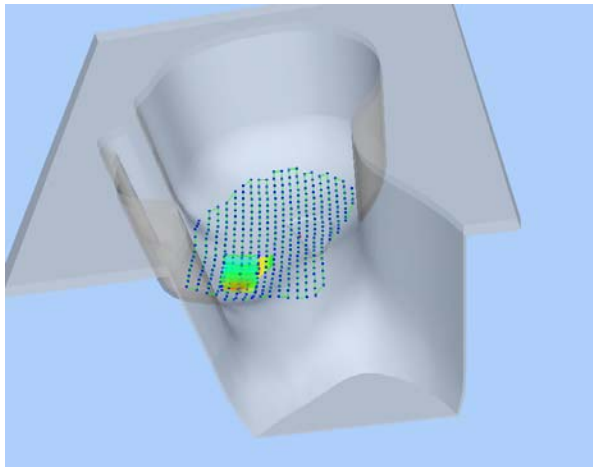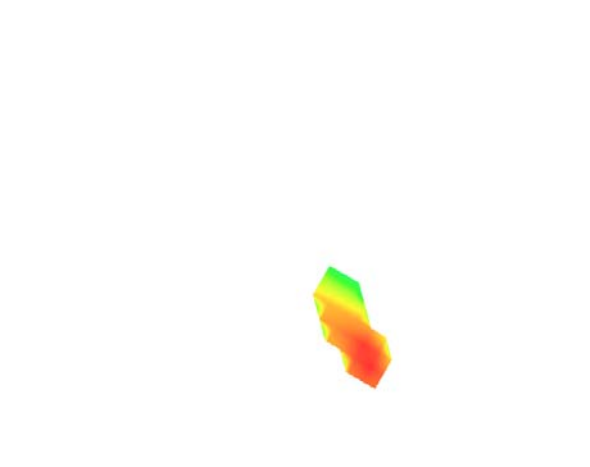3D screen shot	Hot spot position
	

# MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	41.110245
<b>Conductivity (S/m)</b>	0.871245
<b>Power Variation (%)</b>	1.342427
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

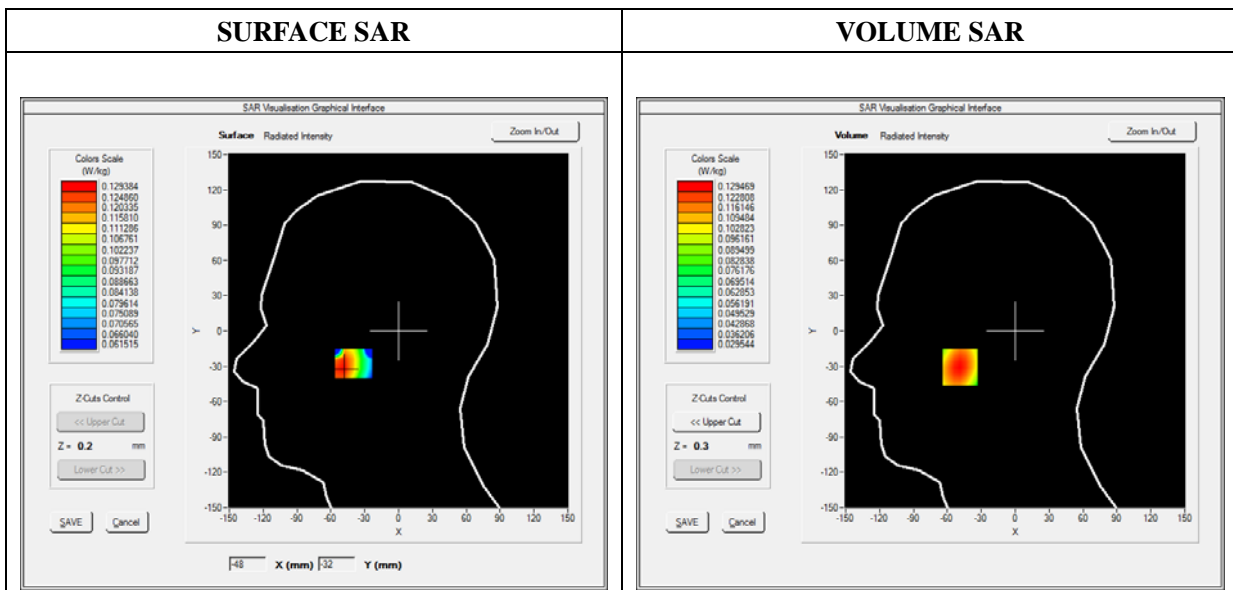




Maximum location: X=-49.00, Y=-31.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.097744
SAR 1g (W/Kg)	0.124546

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1461	0.1295	0.1102	0.0925	0.0765

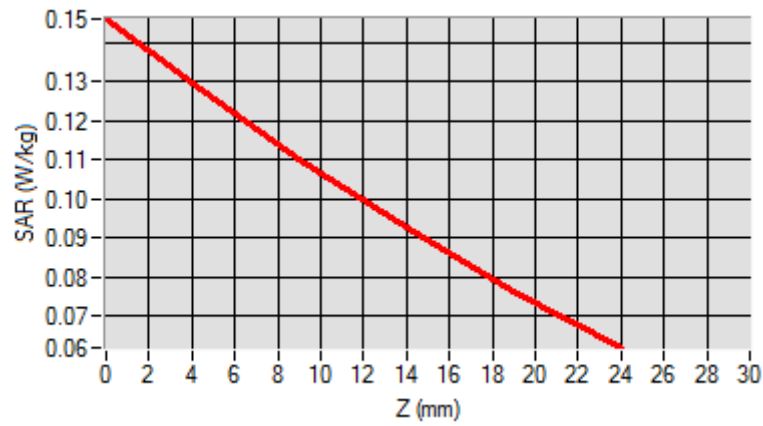

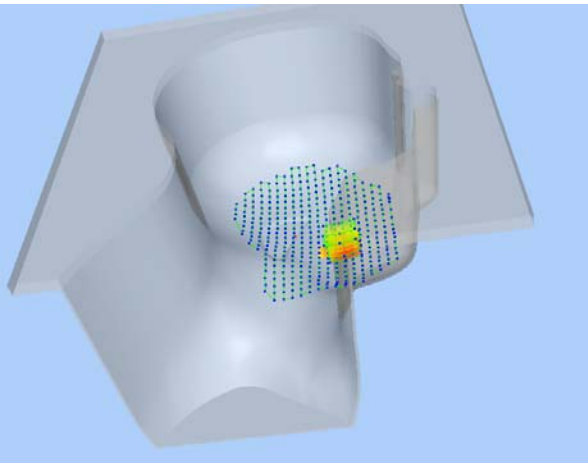3D screen shot	Hot spot position
	

# MEASUREMENT 21

Type: Phone measurement (Complete)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	LTE Band 2_RMC
<b>Channels</b>	QPSK, 20MHz, 1RB, Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1860.000000
<b>Relative Permittivity (real part)</b>	38.560124
<b>Conductivity (S/m)</b>	1.380369
<b>Power Variation (%)</b>	1.743564
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

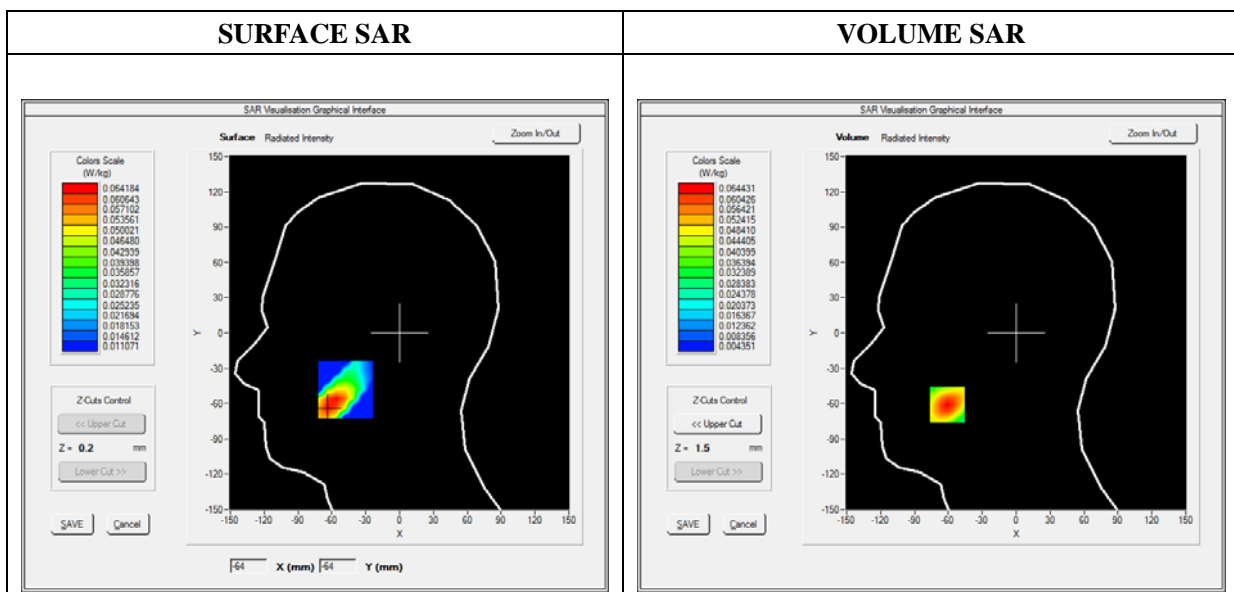




**Maximum location: X=-61.00, Y=-61.00**

**SAR Peak: 0.12 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.031799</b>
<b>SAR 1g (W/Kg)</b>	<b>0.060707</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.1152</b>	<b>0.0644</b>	<b>0.0295</b>	<b>0.0140</b>	<b>0.0079</b>

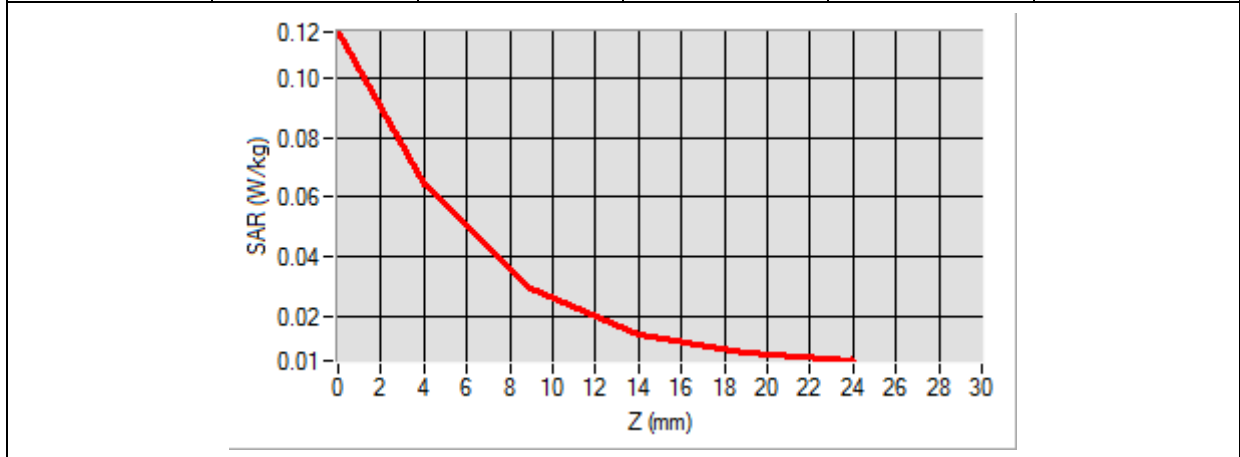

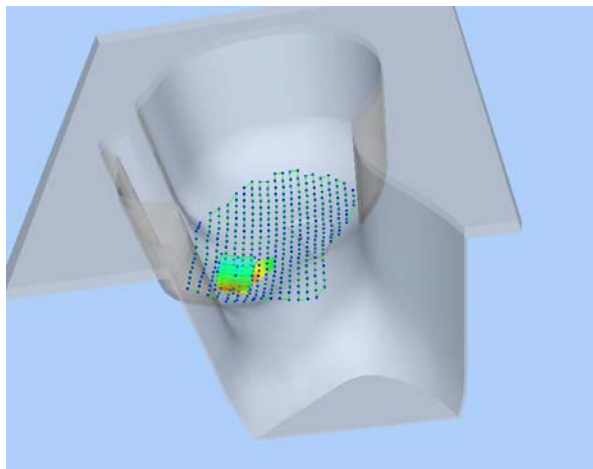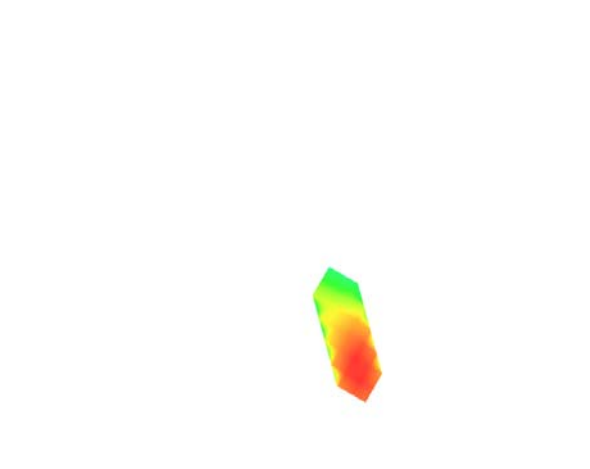3D screen shot	Hot spot position
	

# MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.99; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Left head
<b>Device Position</b>	Cheek
<b>Band</b>	LTE Band 12_RMC
<b>Channels</b>	QPSK, 10MHz, 1RB, Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	704.000000
<b>Relative Permittivity (real part)</b>	41.320574
<b>Conductivity (S/m)</b>	0.862373
<b>Power Variation (%)</b>	0.924535
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

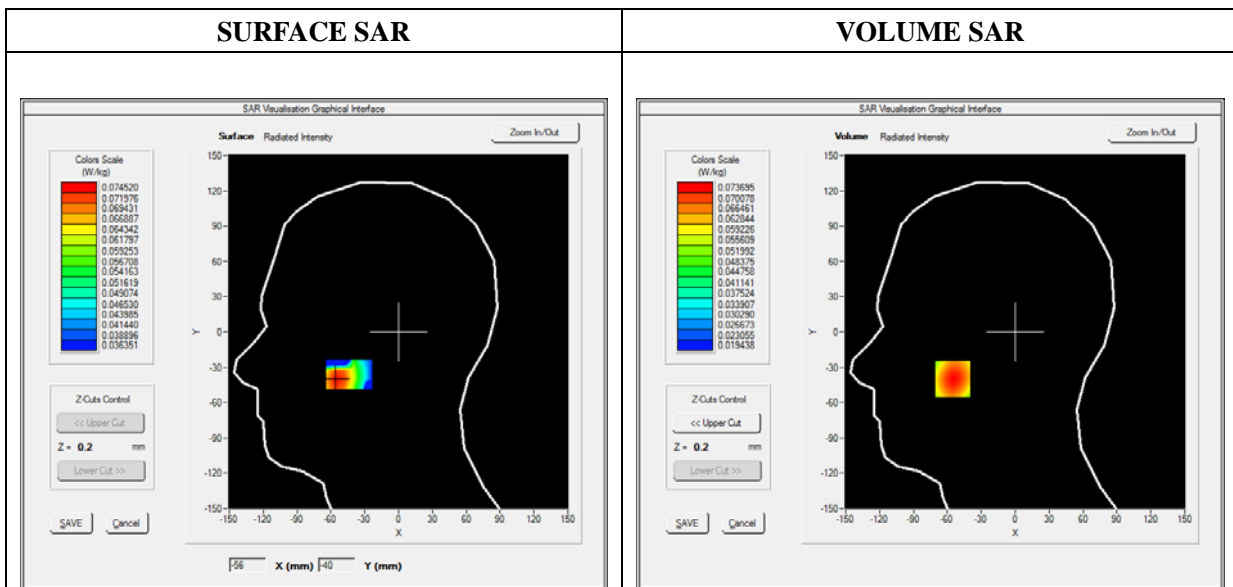




Maximum location: X=-55.00, Y=-40.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.056435
SAR 1g (W/Kg)	0.072418

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0824	0.0737	0.0629	0.0524	0.0423

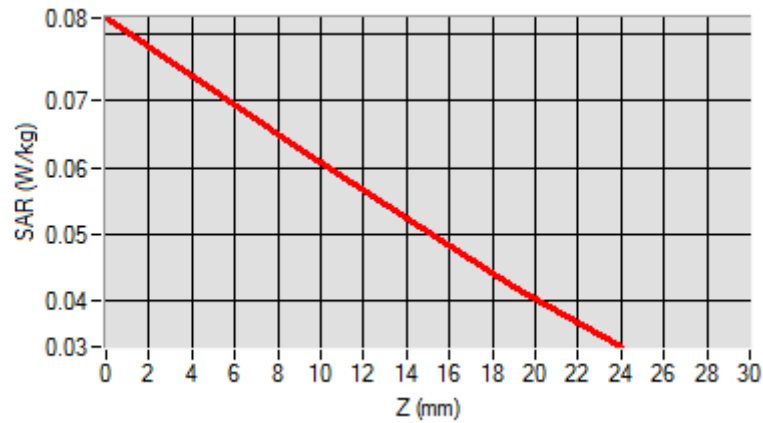

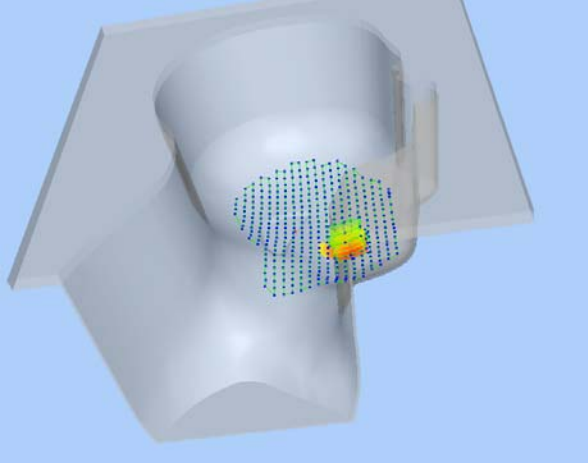3D screen shot	Hot spot position
	

# MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 12/13/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Right head
<b>Device Position</b>	Cheek
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative Permittivity (real part)</b>	38.153660
<b>Conductivity (S/m)</b>	1.740236
<b>Power Variation (%)</b>	3.234772
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

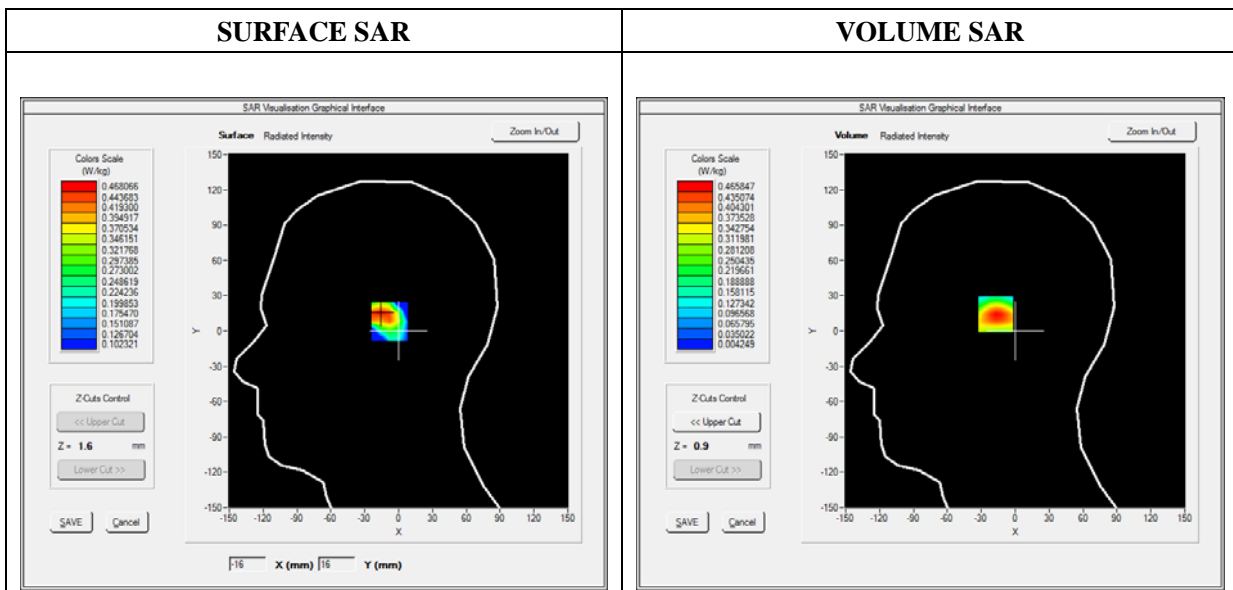






**Maximum location: X=-16.00, Y=15.00**

**SAR Peak: 1.04 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.196242</b>
<b>SAR 1g (W/Kg)</b>	<b>0.448018</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>1.0409</b>	<b>0.4658</b>	<b>0.1371</b>	<b>0.0336</b>	<b>0.0109</b>

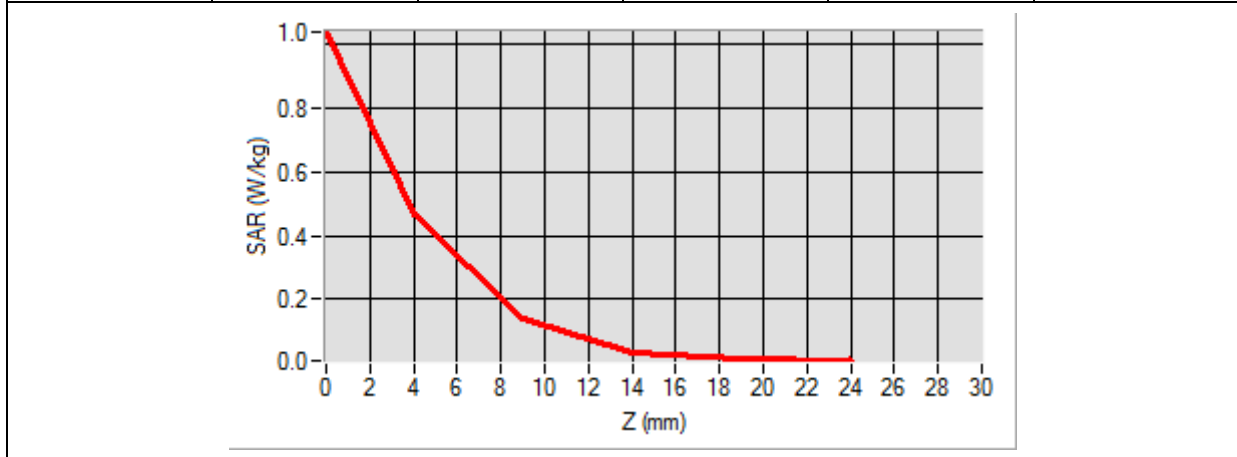

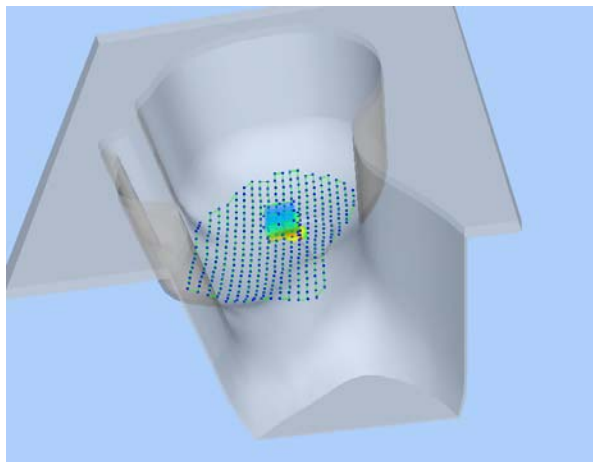3D screen shot	Hot spot position
	

# MEASUREMENT 41

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back(Body-worn)
<b>Band</b>	GSM850
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	0.901472
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

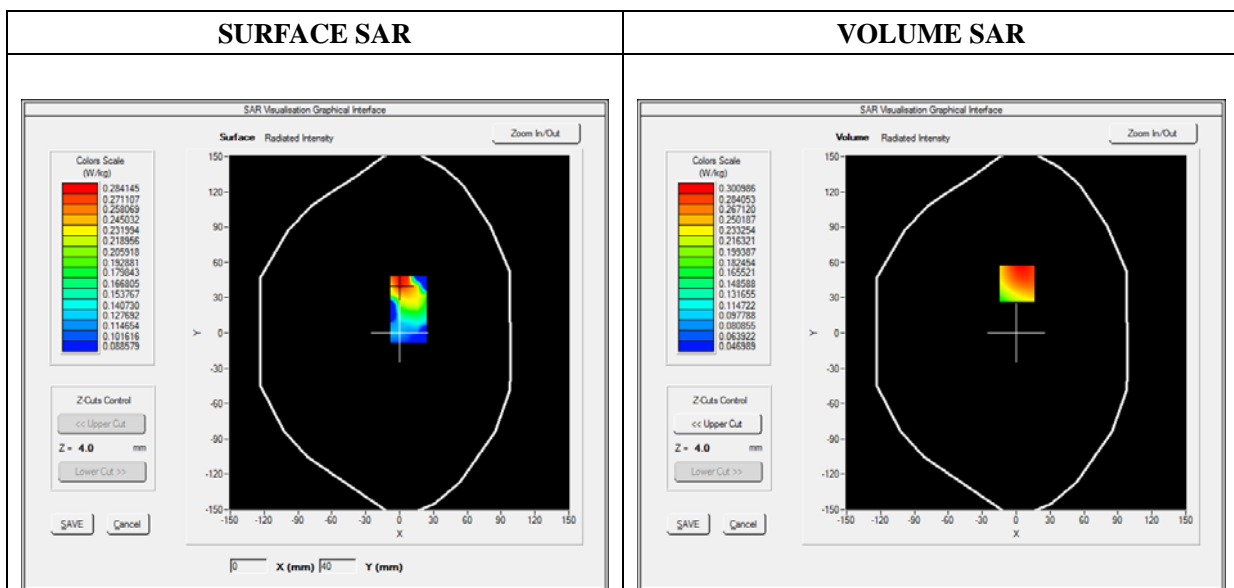




Maximum location: X=1.00, Y=42.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.212998
SAR 1g (W/Kg)	0.288796

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0960	0.3010	0.1515	0.1827	0.0909

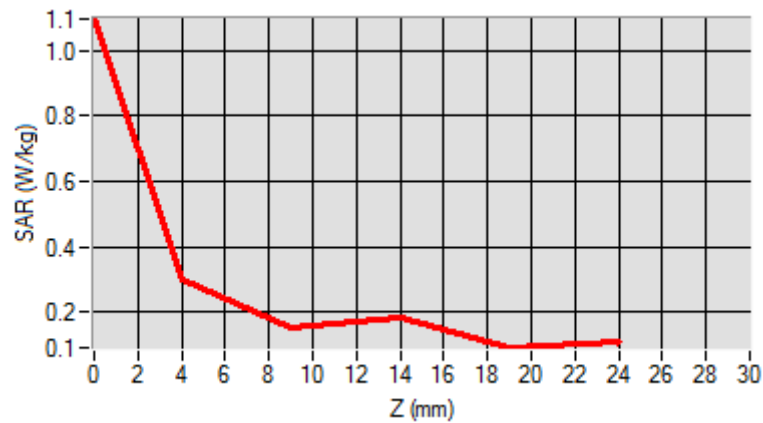

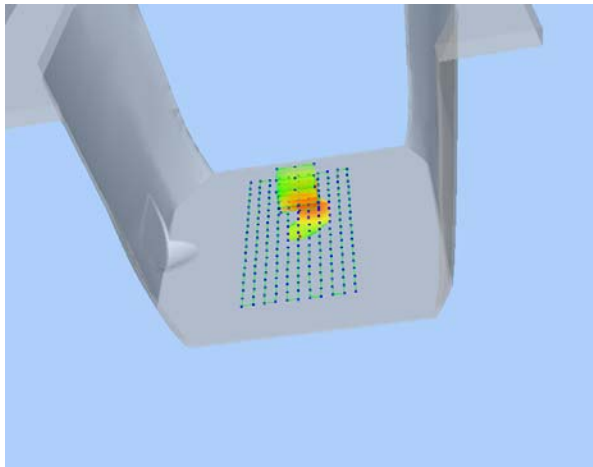3D screen shot	Hot spot position
	

# MEASUREMENT 43

Type: Phone measurement (Complete)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back(Body-worn)
<b>Band</b>	GSM1900
<b>Channels</b>	Low
<b>Signal</b>	TDMA (Crest factor: 8.0)

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1850.200000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	1.474622
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

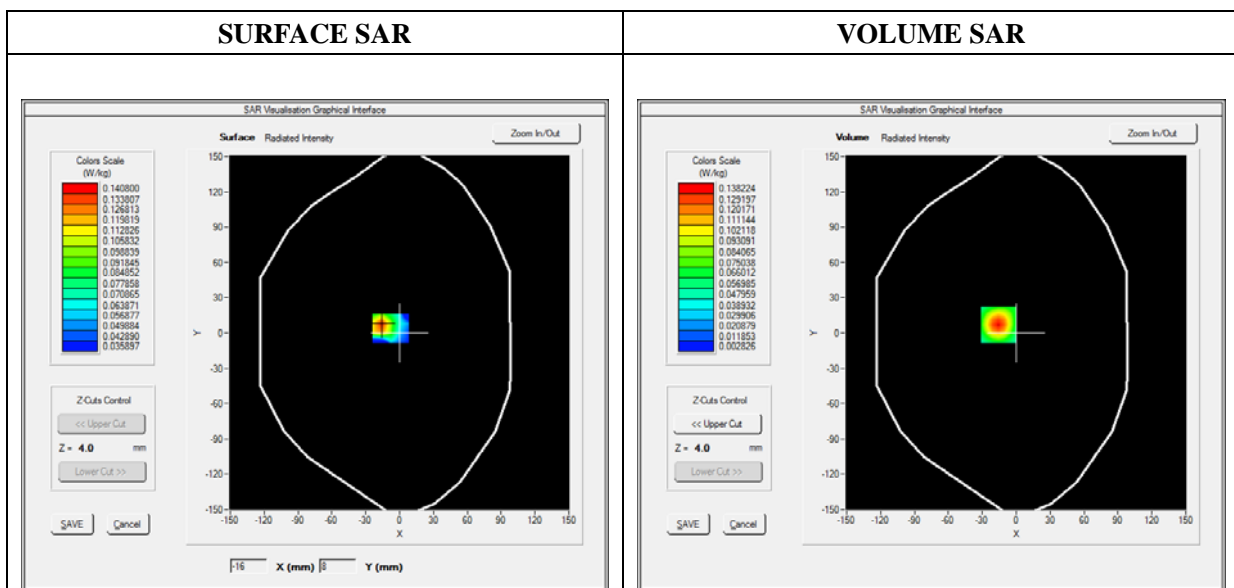




**Maximum location: X=-16.00, Y=7.00**

**SAR Peak: 0.25 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.060152</b>
<b>SAR 1g (W/Kg)</b>	<b>0.126385</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.2479</b>	<b>0.1382</b>	<b>0.0621</b>	<b>0.0274</b>	<b>0.0133</b>

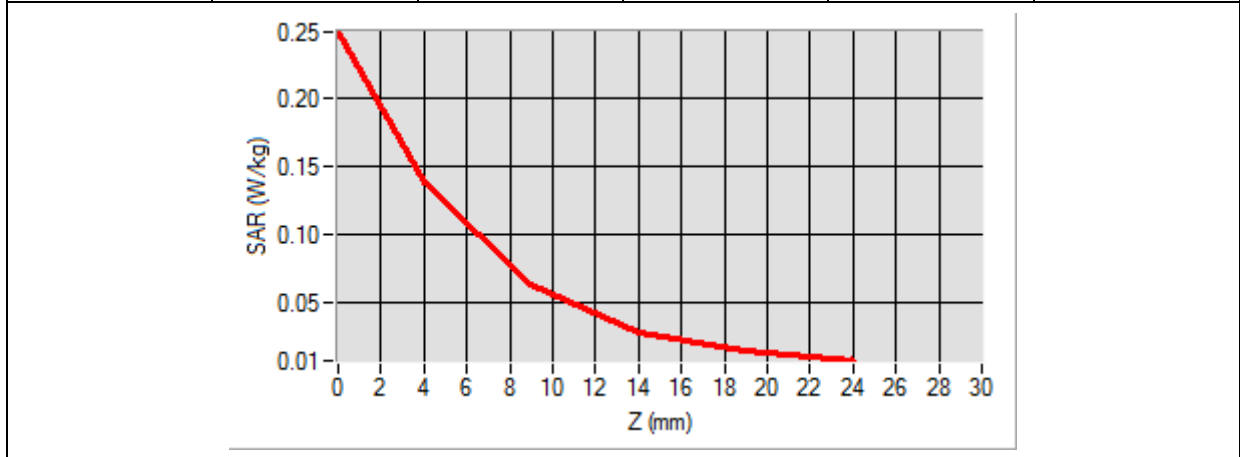

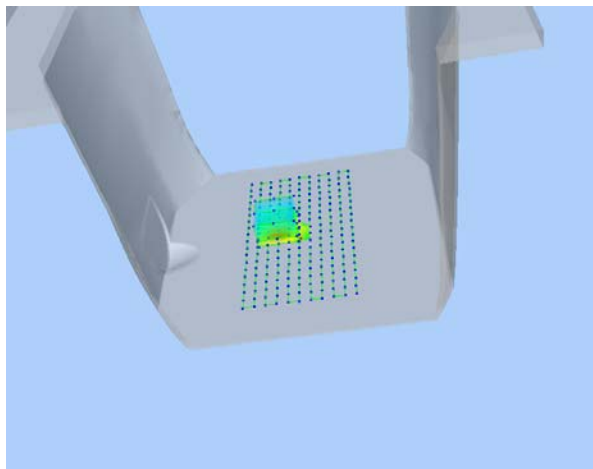3D screen shot	Hot spot position
	

# MEASUREMENT 46

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Front
<b>Band</b>	GPRS850_2TX
<b>Channels</b>	Low
<b>Signal</b>	Duty Cycle: 1:4

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	824.200000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	0.901472
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

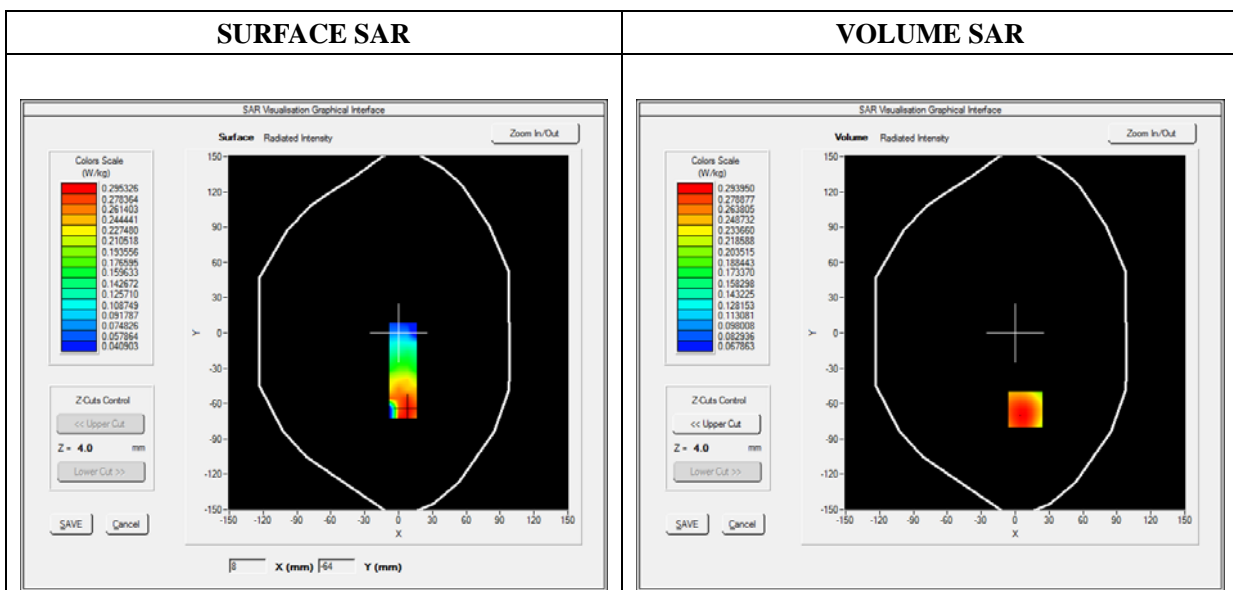




Maximum location: X=9.00, Y=-65.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.214299
SAR 1g (W/Kg)	0.287156

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5625	0.2939	0.2040	0.1754	0.1224

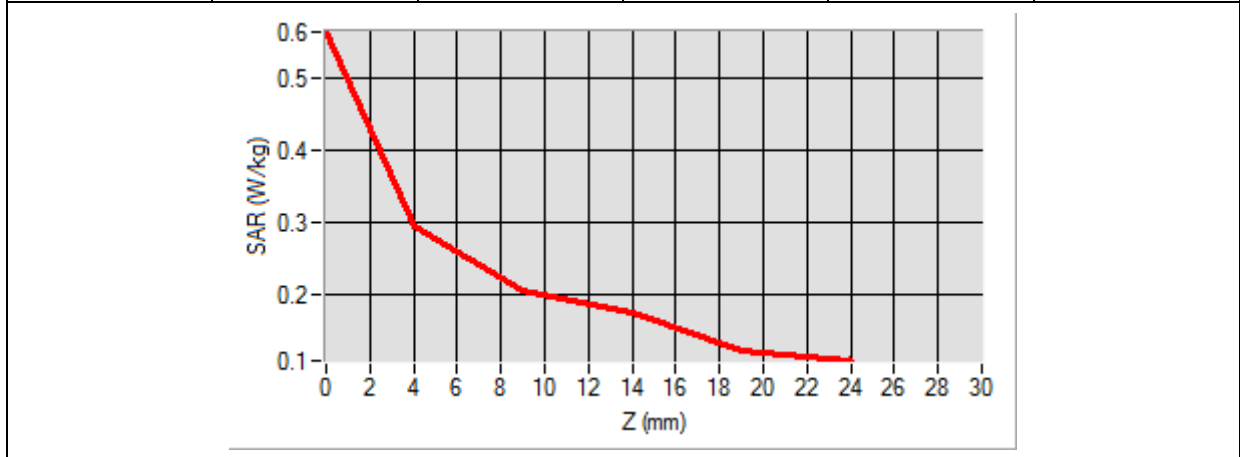

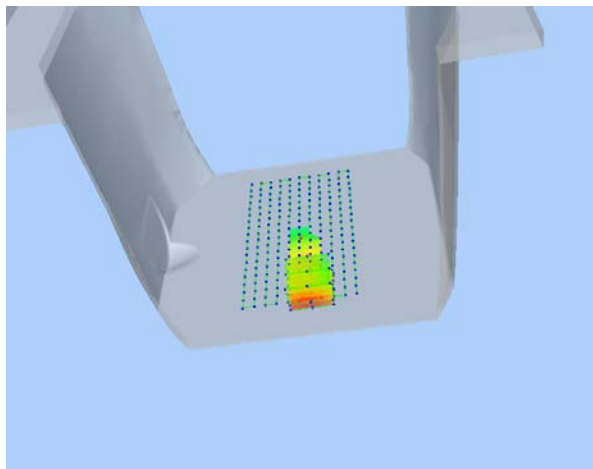3D screen shot	Hot spot position
	

# MEASUREMENT 50

Type: Phone measurement (Complete)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat plane
<b>Device Position</b>	Back
<b>Band</b>	GPRS1900_4TX
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle: 1:2

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	2.483762
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

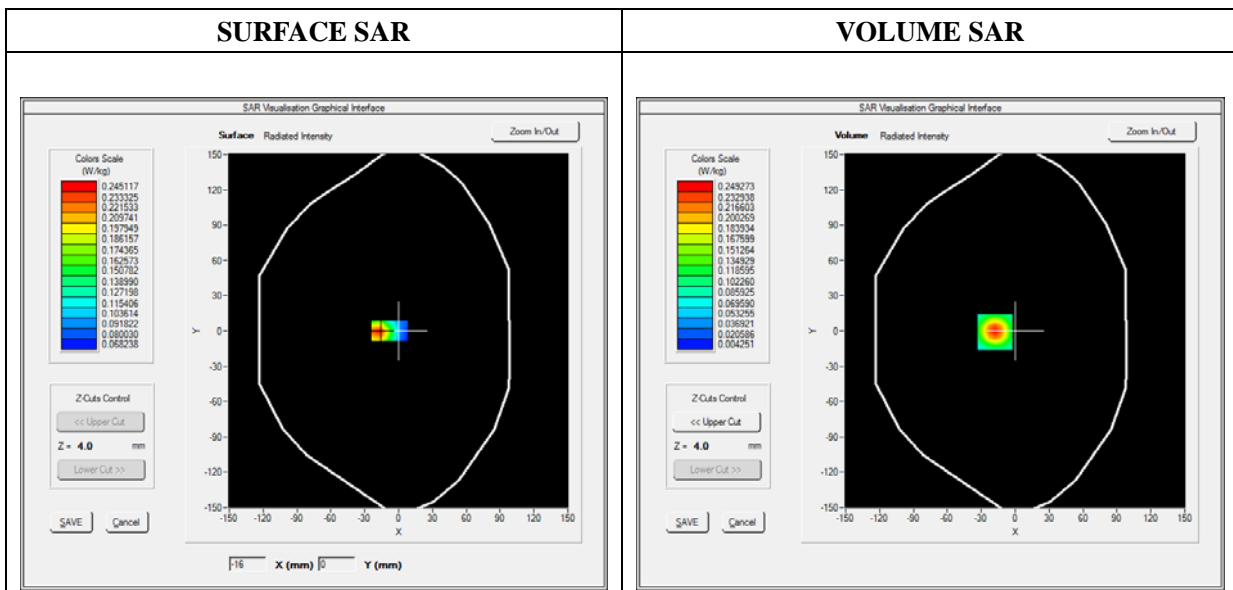






**Maximum location: X=-18.00, Y=-1.00**

**SAR Peak: 0.46 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.103306</b>
<b>SAR 1g (W/Kg)</b>	<b>0.226292</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.4589</b>	<b>0.2493</b>	<b>0.1070</b>	<b>0.0446</b>	<b>0.0205</b>

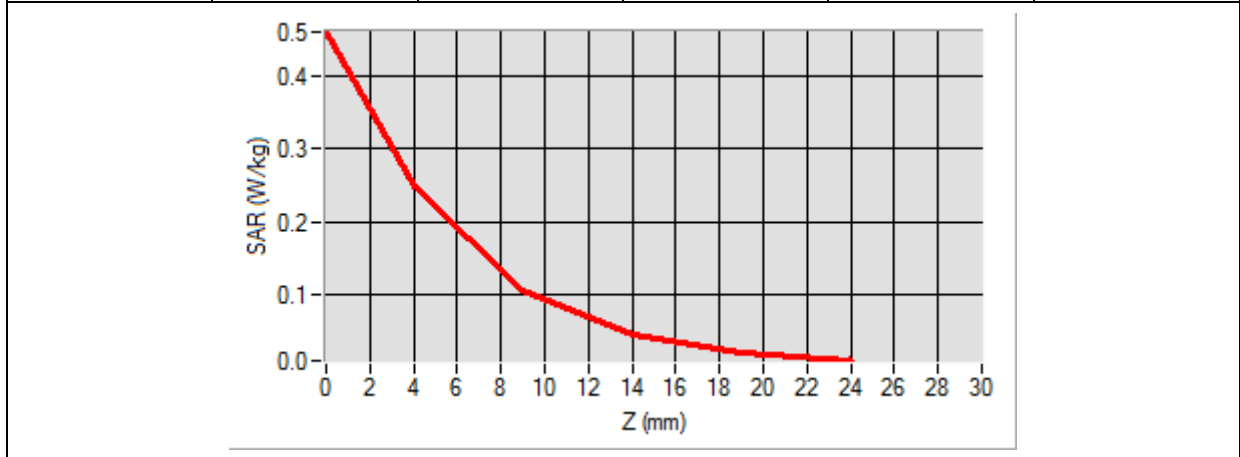

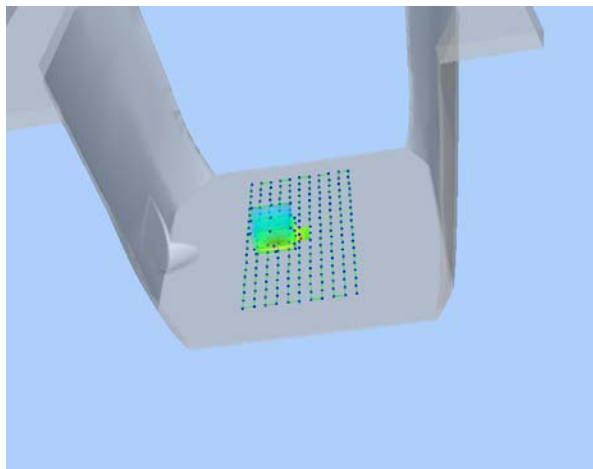3D screen shot	Hot spot position
	

# MEASUREMENT 56

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/01/2017

## A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front
<b>Band</b>	WCDMA850_RMC
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative Permittivity (real part)</b>	54.851214
<b>Conductivity (S/m)</b>	0.951454
<b>Power Variation (%)</b>	2.341234
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

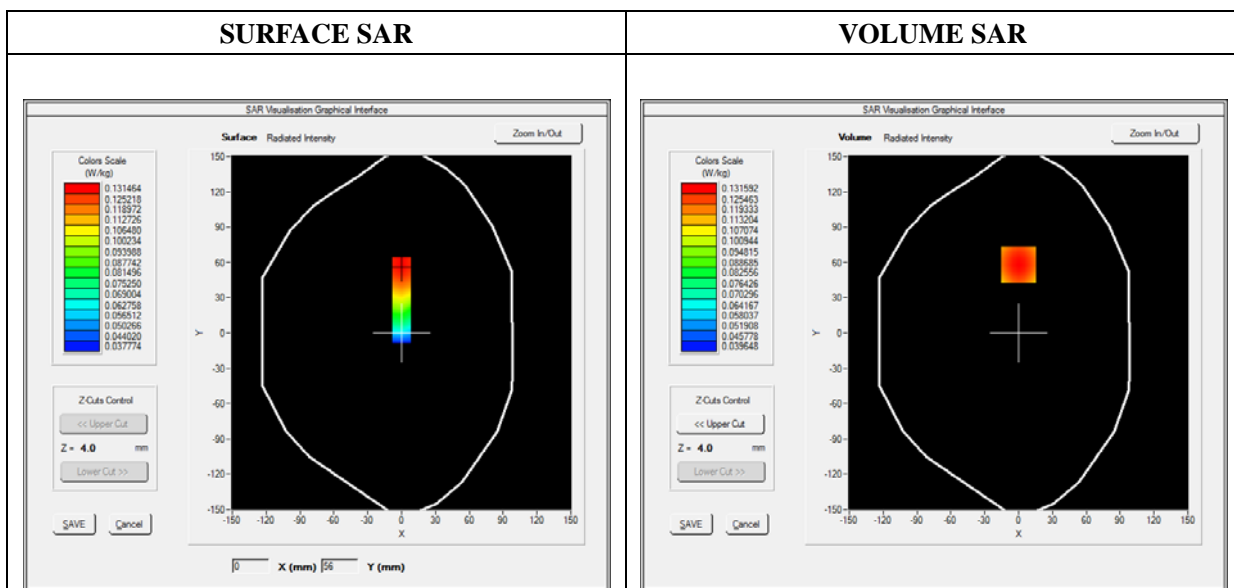




**Maximum location: X=0.00, Y=58.00**

**SAR Peak: 0.16 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.097299</b>
<b>SAR 1g (W/Kg)</b>	<b>0.128911</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.1585</b>	<b>0.1316</b>	<b>0.1043</b>	<b>0.0831</b>	<b>0.0665</b>

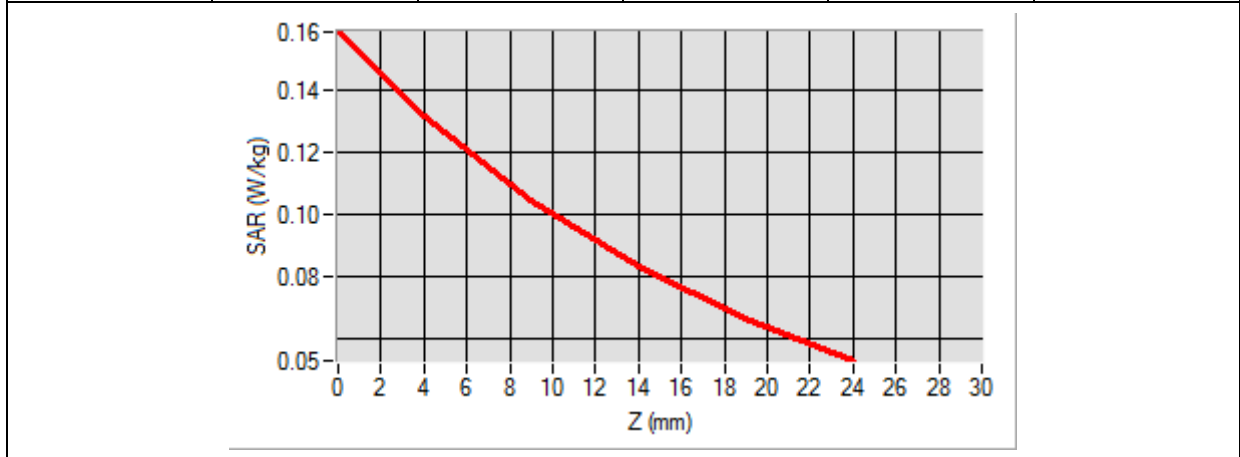

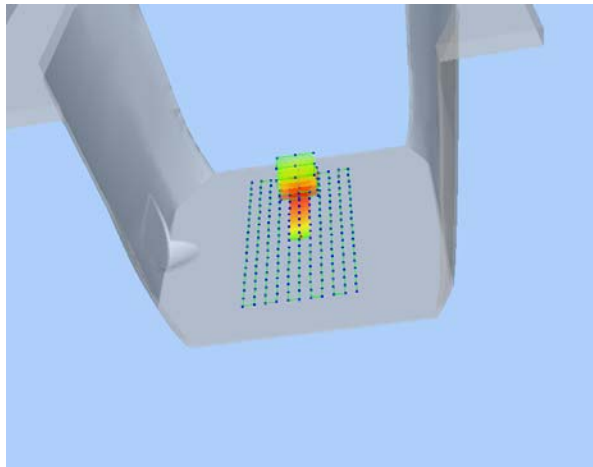3D screen shot	Hot spot position
	

# MEASUREMENT 60

Type: Phone measurement (Complete)

Date of measurement: 12/12/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	LTE Band 2_RMC
<b>Channels</b>	QPSK, 20MHz, 1RB, Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	1860.000000
<b>Relative Permittivity (real part)</b>	52.420415
<b>Conductivity (S/m)</b>	1.501966
<b>Power Variation (%)</b>	1.523573
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.3

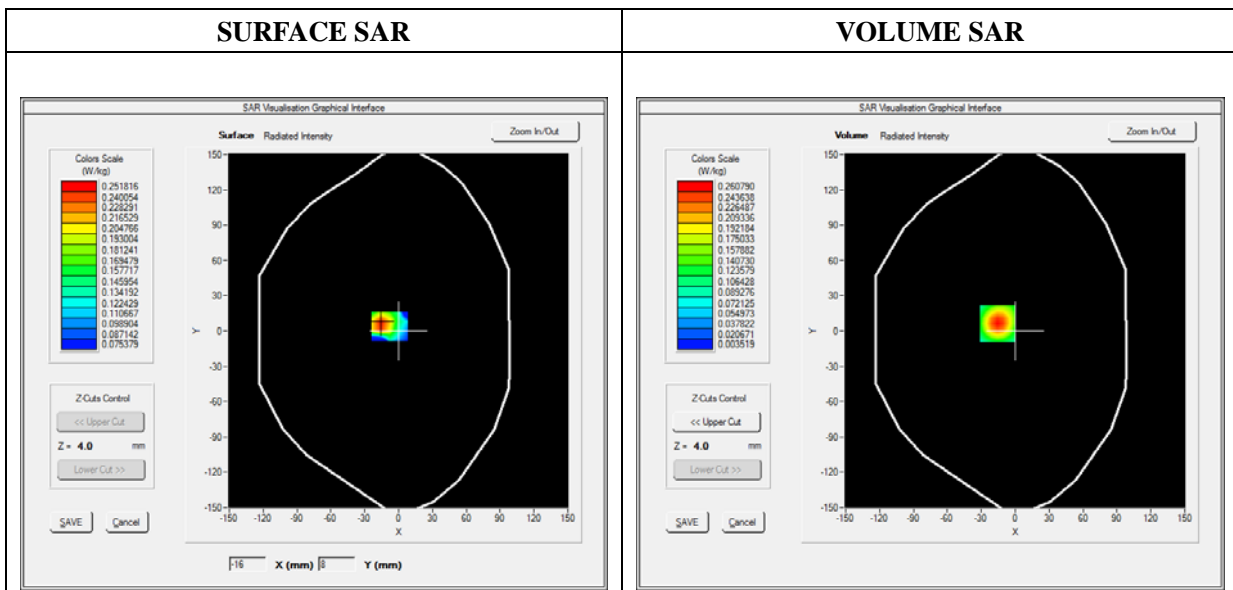




Maximum location: X=-16.00, Y=6.00

SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.112996
SAR 1g (W/Kg)	0.241762

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4906	0.2608	0.1076	0.0424	0.0184

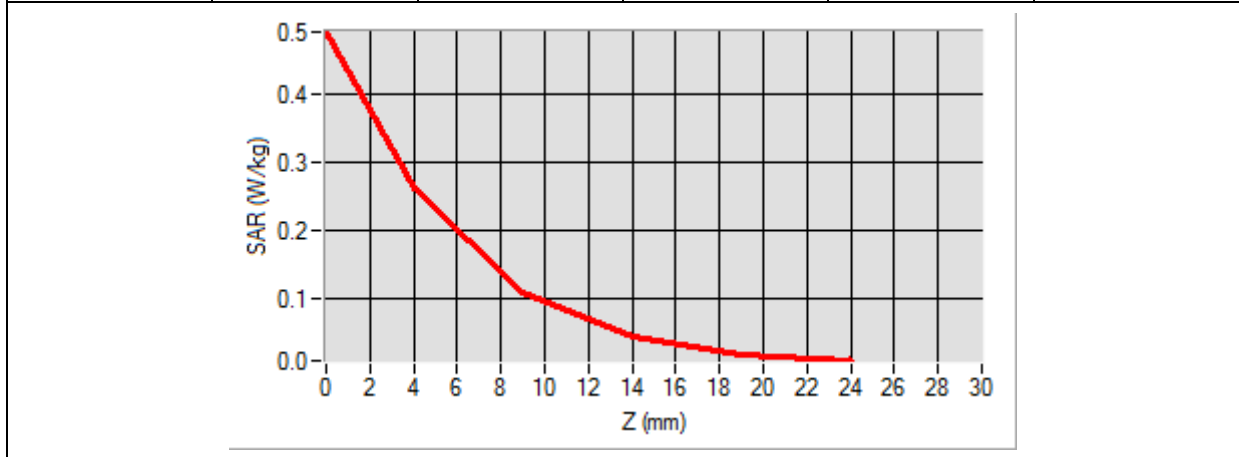

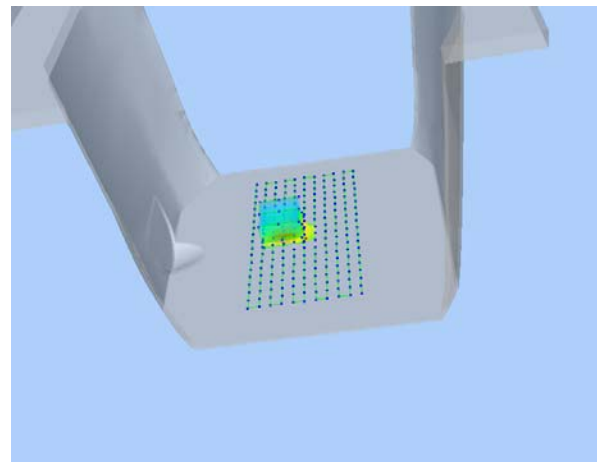3D screen shot	Hot spot position
	

# MEASUREMENT 70

Type: Phone measurement (Complete)

Date of measurement: 12/11/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.28; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Back
<b>Band</b>	LTE Band 12_RMC
<b>Channels</b>	QPSK, 10MHz, 1RB, Low
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	704.000000
<b>Relative Permittivity (real part)</b>	54.964739
<b>Conductivity (S/m)</b>	0.931048
<b>Power Variation (%)</b>	3.672346
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

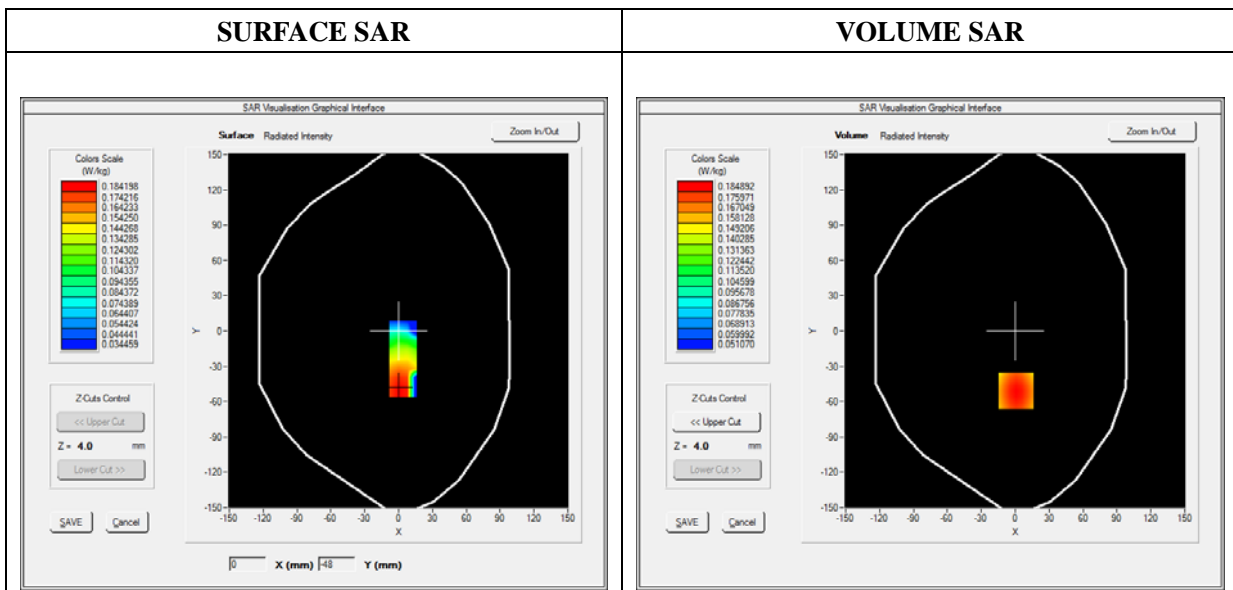




**Maximum location: X=1.00, Y=-51.00**

**SAR Peak: 0.22 W/kg**

<b>SAR 10g (W/Kg)</b>	<b>0.142731</b>
<b>SAR 1g (W/Kg)</b>	<b>0.188704</b>

<b>Z (mm)</b>	<b>0.00</b>	<b>4.00</b>	<b>9.00</b>	<b>14.00</b>	<b>19.00</b>
<b>SAR (W/Kg)</b>	<b>0.2207</b>	<b>0.1849</b>	<b>0.1475</b>	<b>0.1172</b>	<b>0.0926</b>

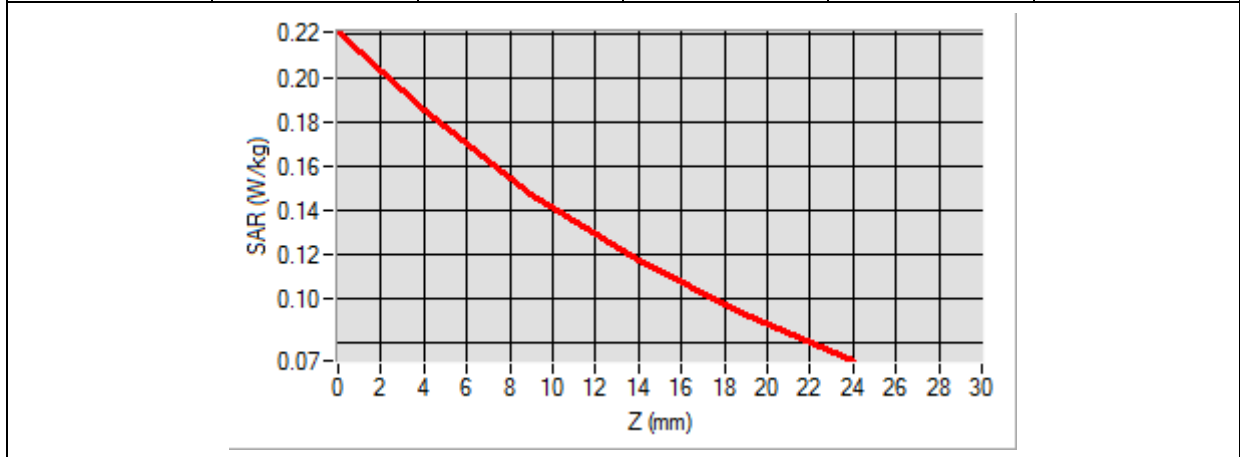

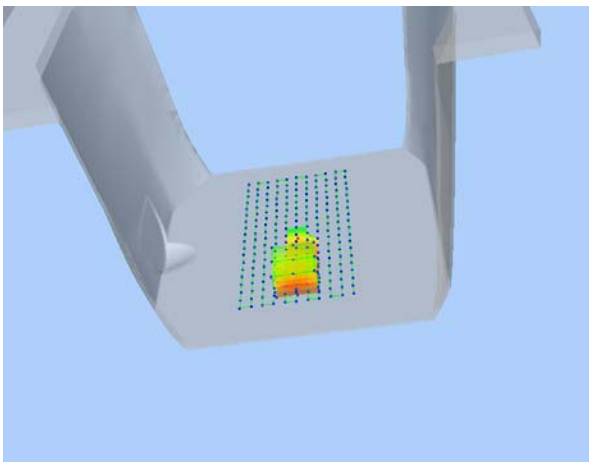3D screen shot	Hot spot position
	

# MEASUREMENT 81

Type: Phone measurement (Complete)

Date of measurement: 12/13/2017

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/01/2017

### A. Experimental conditions

<b>Area Scan</b>	sam_direct_droit2_surf8mm.txt
<b>Phantom</b>	Flat Plane
<b>Device Position</b>	Front
<b>Band</b>	WiFi_802.11b
<b>Channels</b>	Middle
<b>Signal</b>	Duty Cycle 1:1

### B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative Permittivity (real part)</b>	52.010212
<b>Conductivity (S/m)</b>	1.910255
<b>Power Variation (%)</b>	2.492743
<b>Ambient Temperature</b>	21.1
<b>Liquid Temperature</b>	21.2

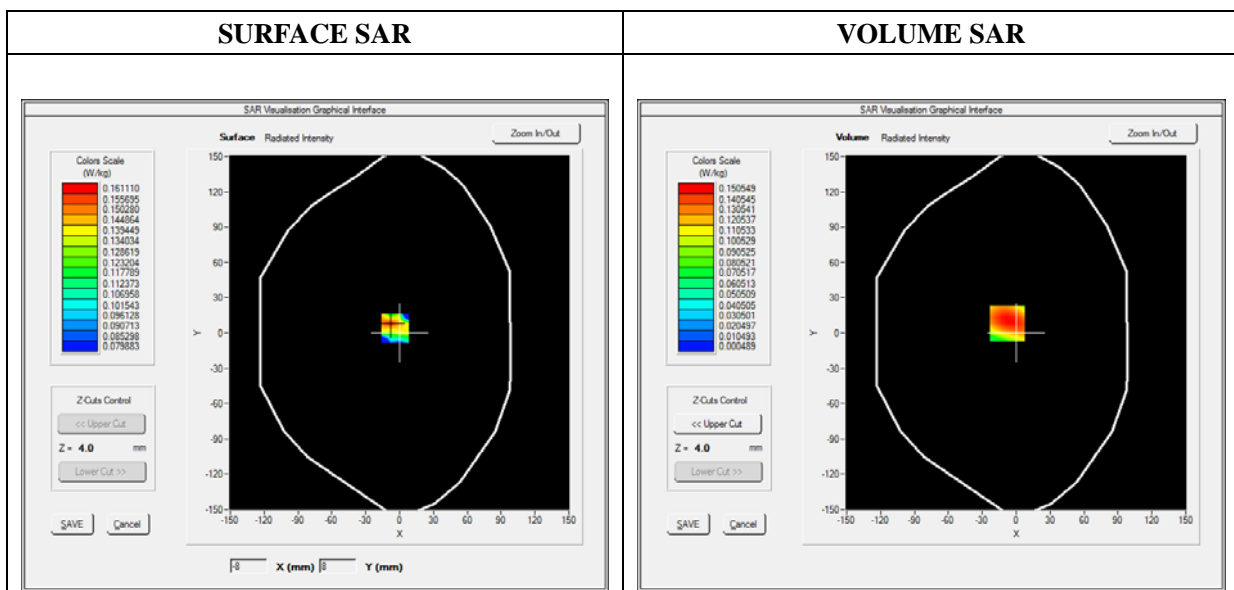






Maximum location: X=-8.00, Y=8.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.073889
SAR 1g (W/Kg)	0.153396

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3705	0.1505	0.0430	0.0152	0.0046

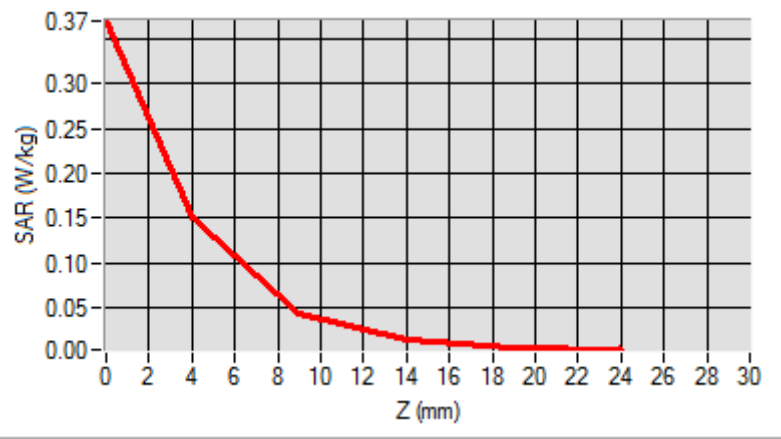

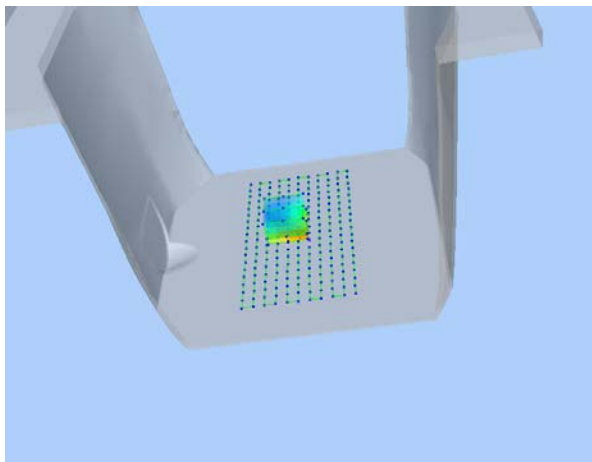3D screen shot	Hot spot position
	


## Annex C. EUT Photos

---


### EUT View Front



### EUT View Back

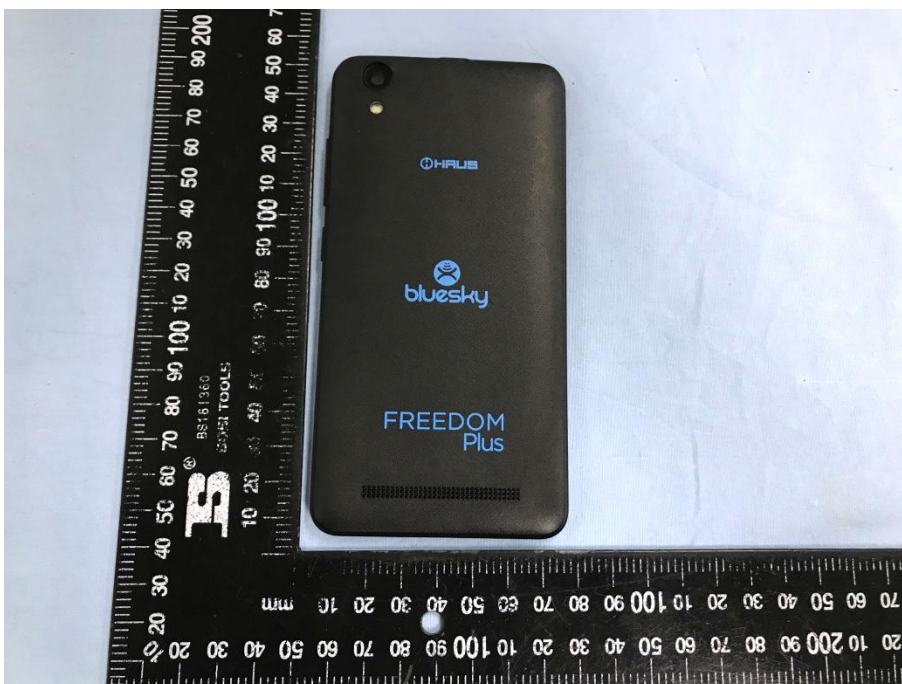

### Antenna View

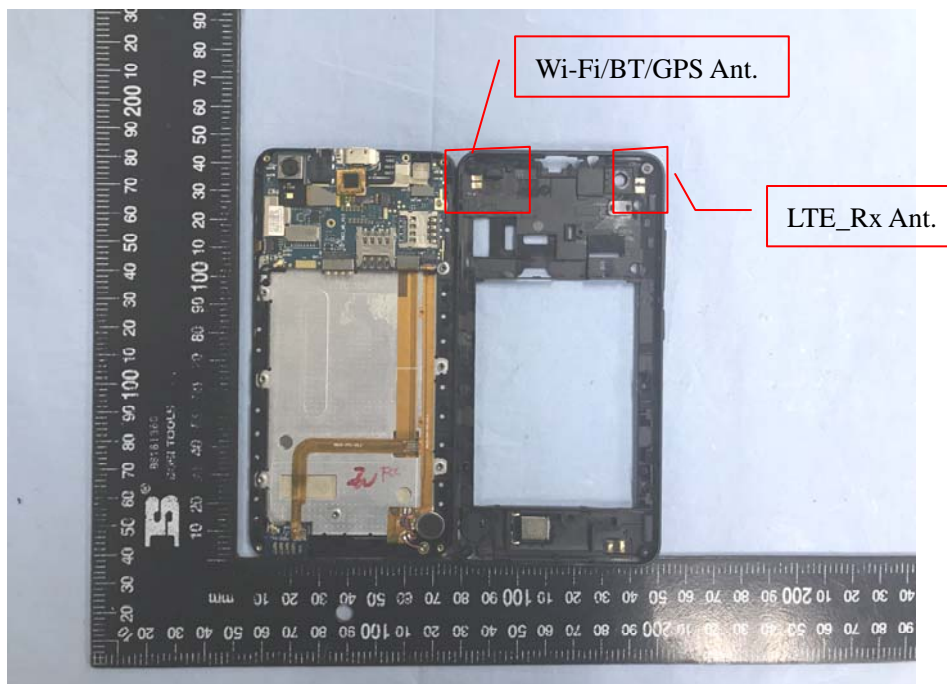

## Annex D. Test Setup Photos


---

### Head Exposure Conditions


**Cheek**




**Tilt**

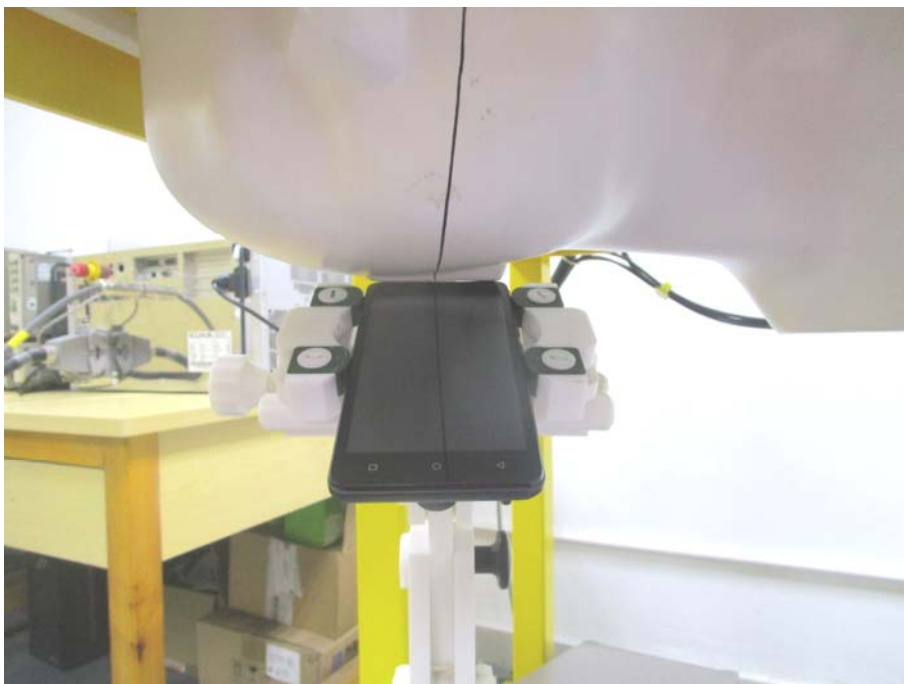

### Cheek

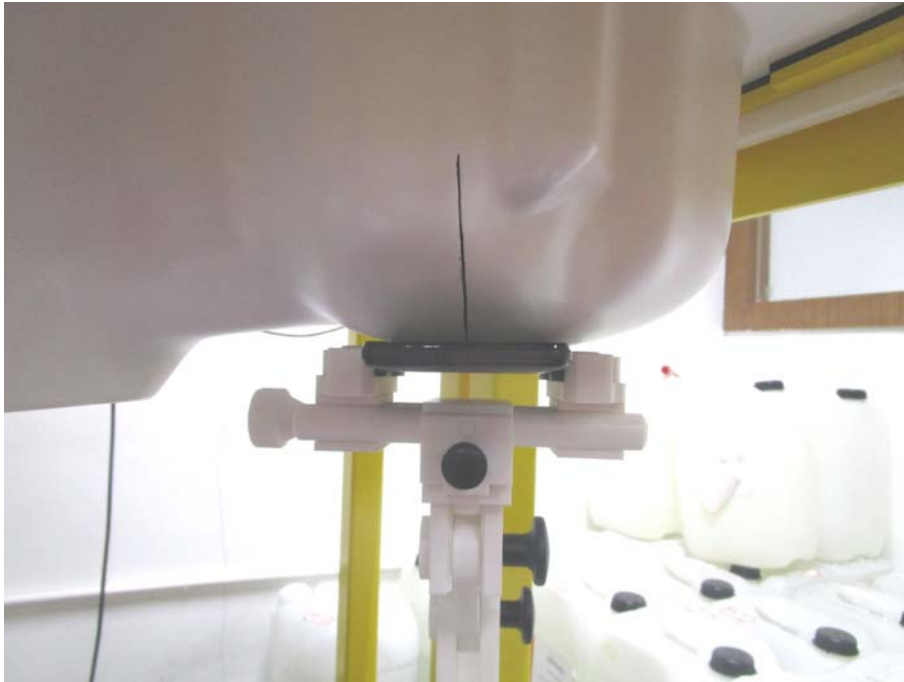

### Tilt

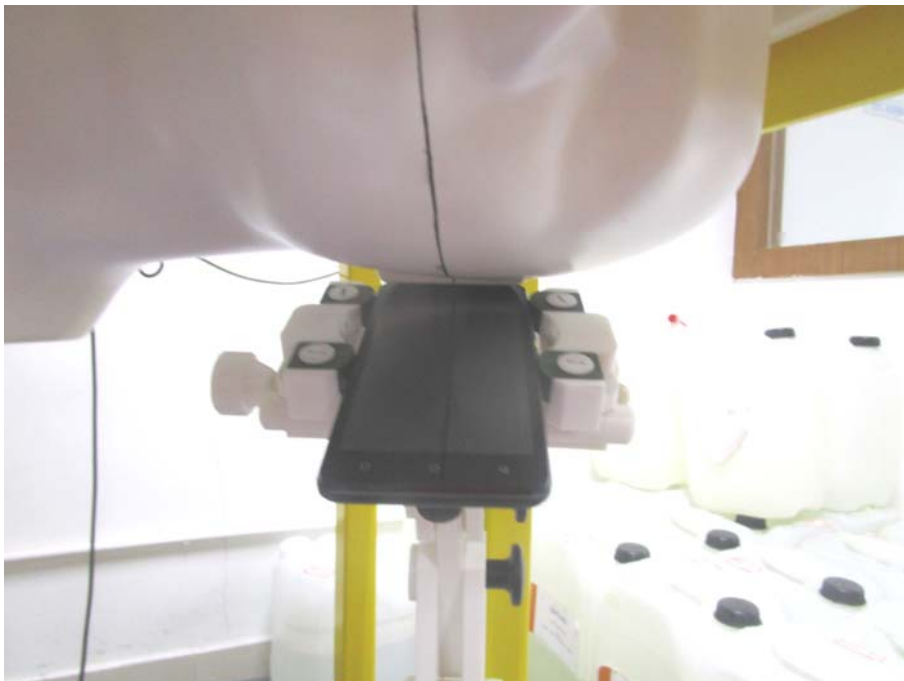

## Body-worn & Hotspot mode Exposure Conditions

### Body Front




### Body Back




## Hotspot Exposure Conditions


### Body Left

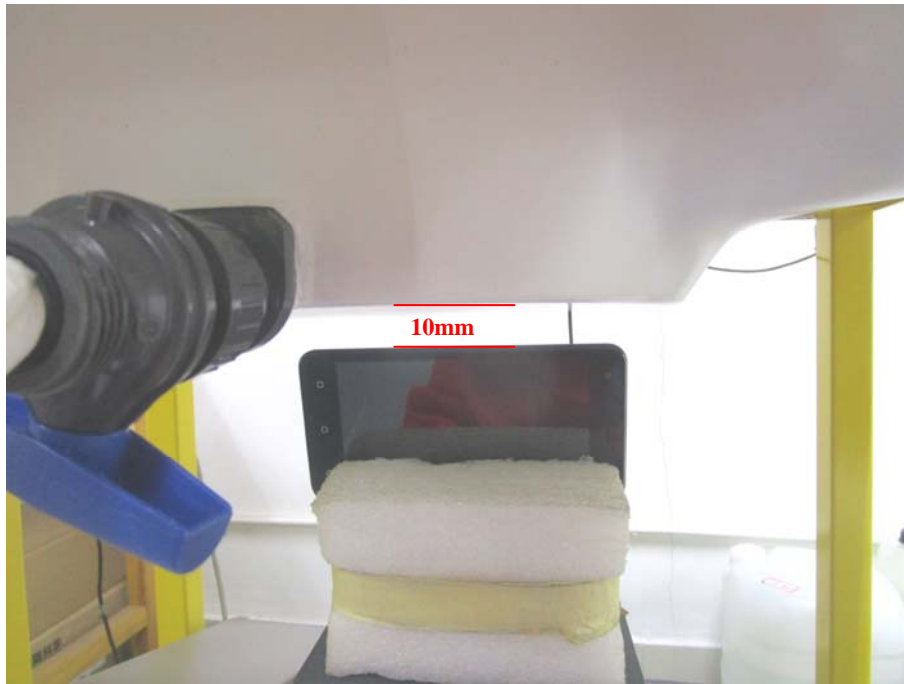


### Body Right

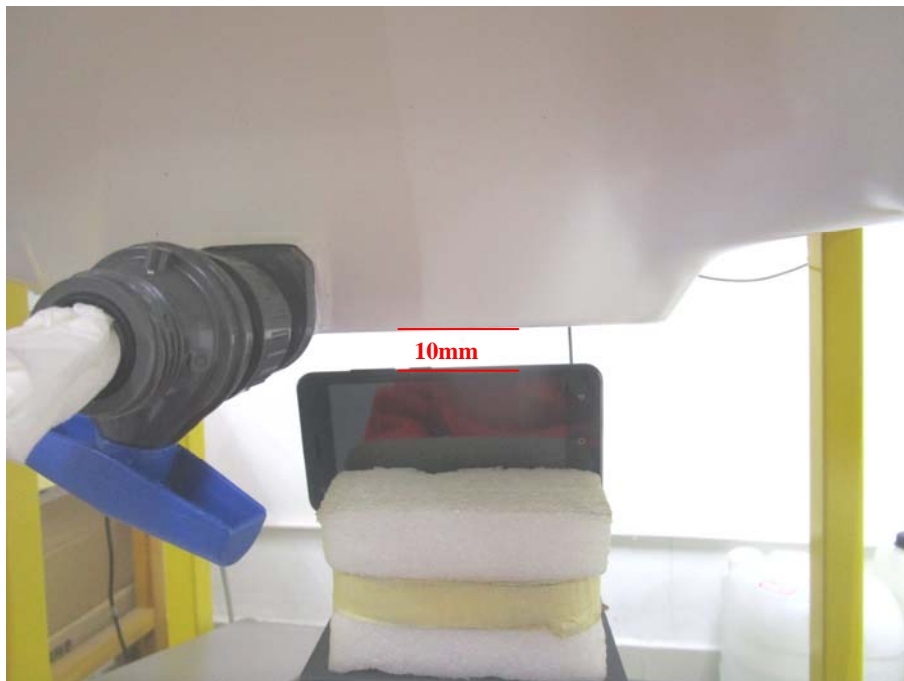

### Body Top

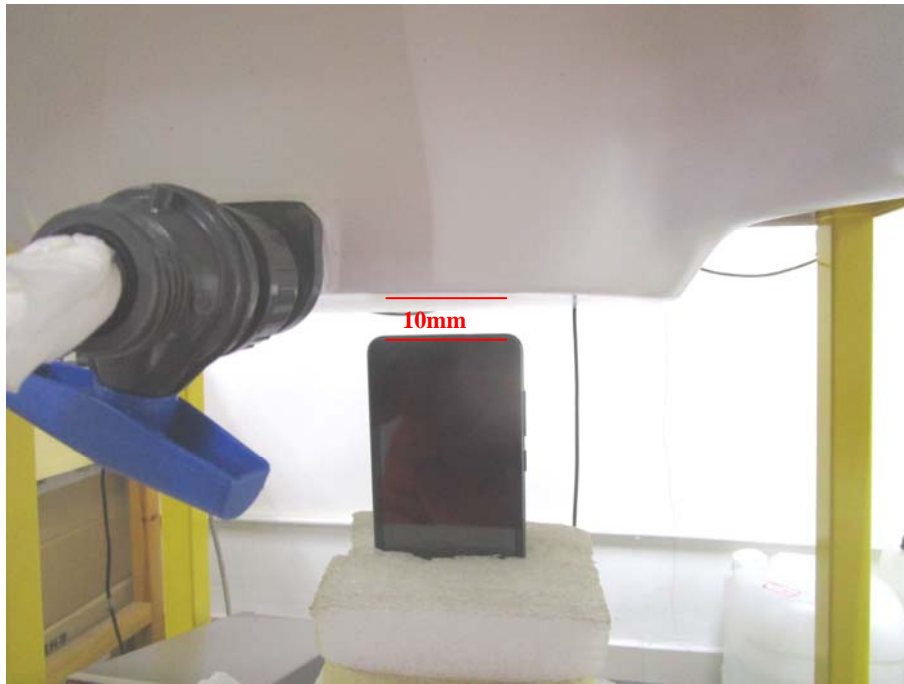

### Body Bottom

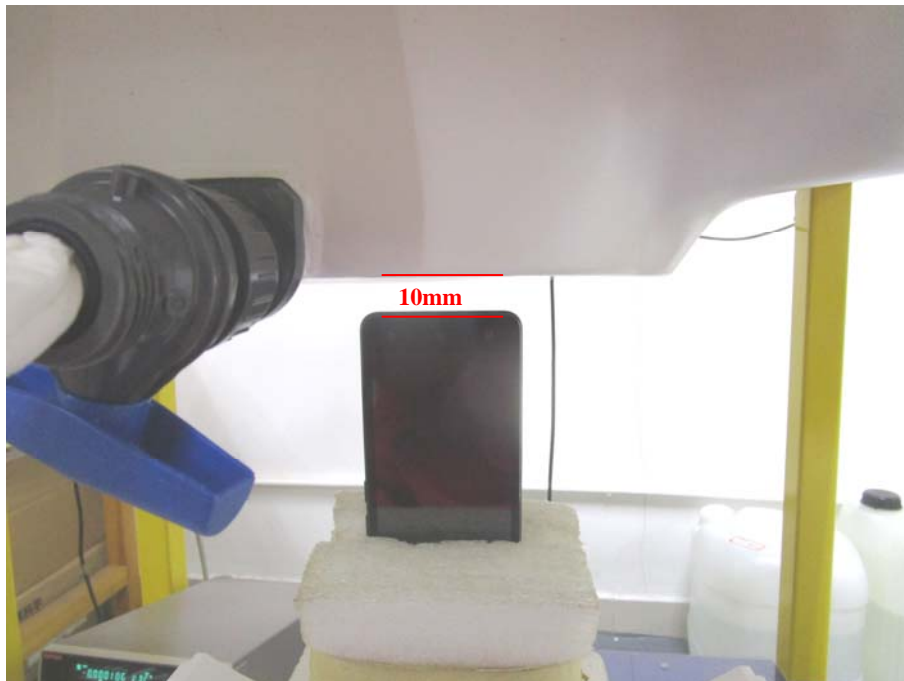



## Annex E. Calibration Certificate

---

*Please refer to the exhibit for the calibration certificate*

**\*\*\*\*\* END OF REPORT \*\*\*\*\***