

## FCC 47 CFR MPE REPORT

Pelican Products, Inc.

EMS Wireless Charging

Model Number: C00210

FCC ID: 2AOIU-C00210

Prepared for:	Pelican Products, Inc.
	23215 Early Avenue, Torrance, California, 90505, United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	

Report Number:	ESTE-R1908013
Date of Test:	Jul. 18~30, 2019
Date of Report:	Aug. 03, 2019

**Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310**

**1. Limits for Maximum Permissible Exposure (MPE)**

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
(A) Limits for Occupational / Control Exposures				
0.3-3.0	614	1.63	*(100)	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30


“\*” means Plane-wave equivalent power density

**2. Test equipment**


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
E-Magnetic field probe	Narda	2304/03	M-0018	June,29,19	1 Year
Broadband field meter	Narda	ELT-400	N-0045	June,29,19	1 Year

**3. Test setup**

A:

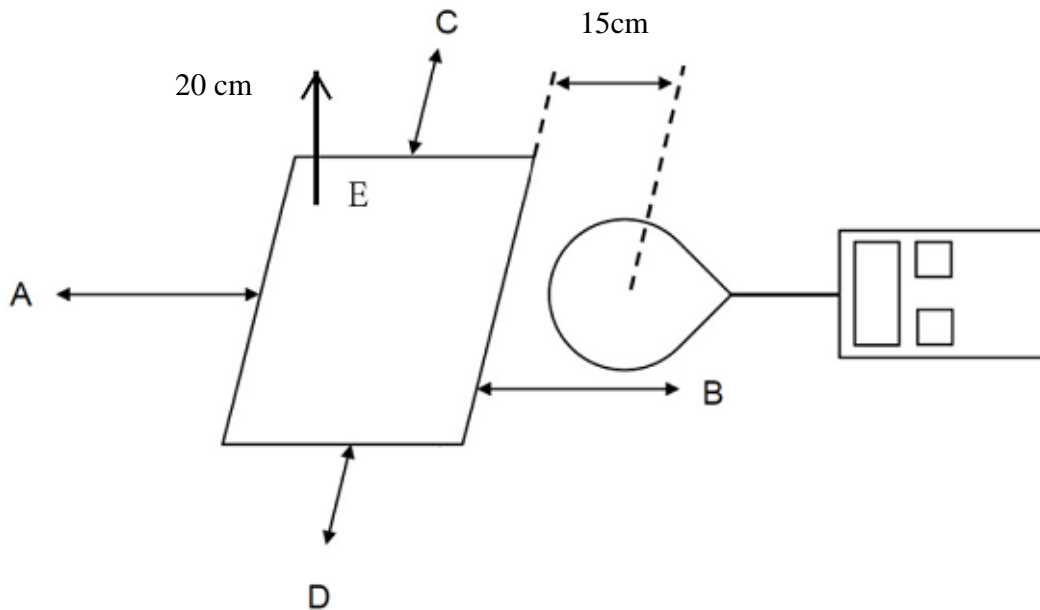

**B:**

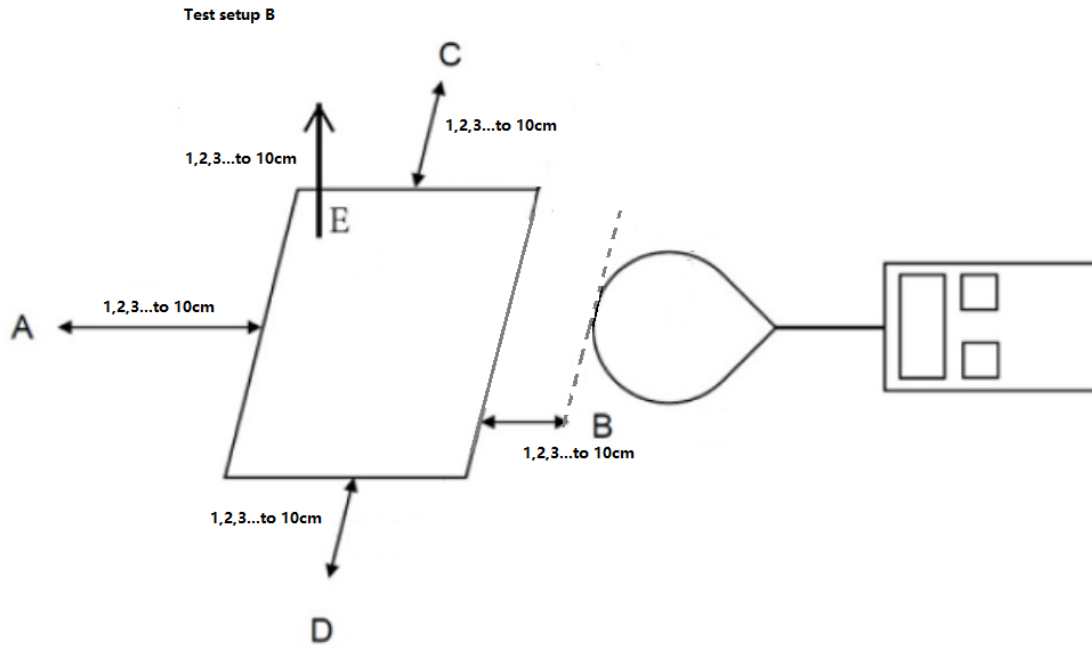

- a. The test was performed on 360 degree turn table in anechoic chamber.
- b. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe, for test setup A.
- c. Measure magnetic and electrical field strength at a distance 10cm to 1cm at 1cm iteration, Which is between the edge of the charger and the edge of of probe, for test setup B.
- d. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.
- e. The EUT was measured according to the dictates of KDB680106D01v03; And KDB Tracking Number 671578; TCB Workshop, October 2018, 5.2 RF Exposure Procedures.

**4. Equipment Approval Considerations**

According to the item 5(b) of KDB 680106 D01 RF Exposure Wireless Charging App v03.

1	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 110.5-205KHz.
2	Output power from each primary coil is less than or equal to 15 watts.
	YES; the maximum output power of the primary coil is 10W.
3	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
	YES; the transfer system includes only single primary and secondary coils.
4	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
5	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	YES
6	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

**5. Test Mode**

Mode	Description
Charging mode with dummy load	Full Load
	Half Load
	Empty Load
All power supplies working mode have been tested, and only the worst results have been reported. 5V/2.4A,9V/2A ,All have test,9V/2A is worse case.	

**6. Test Result****Test Result for Test setup A:****E-Filed Strength at (15 cm from edges A,B,C,D, 20 cm from top E) surrounding the EUT (V/m)**


Test Mode	Full Load	Half Load	Empty Load
Frequency range (kHz)	110.5 to 205 kHz		
Position A(V/m)	1.348	1.211	1.171
Position B(V/m)	1.322	1.212	1.168
Position C(V/m)	1.344	1.152	1.121
Position D(V/m)	1.205	1.201	1.115
Position E(V/m)	1.511	1.352	1.315
Limits (V/m)	614		
50% Limits(V/m)	307		

**H-Filed Strength at (15 cm from edges A,B,C,D, 20 cm from top E) surrounding the EUT (A/m)**

Test Mode	Full Load	Half Load	Empty Load
Frequency range (kHz)	110.5 to 205 kHz		
Position A(A/m)	0.321	0.215	0.207
Position B(A/m)	0.302	0.211	0.195
Position C(A/m)	0.291	0.204	0.187
Position D(A/m)	0.287	0.200	0.189
Position E(A/m)	0.205	0.187	0.168
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

## 8. Test Setup Photo


Position A

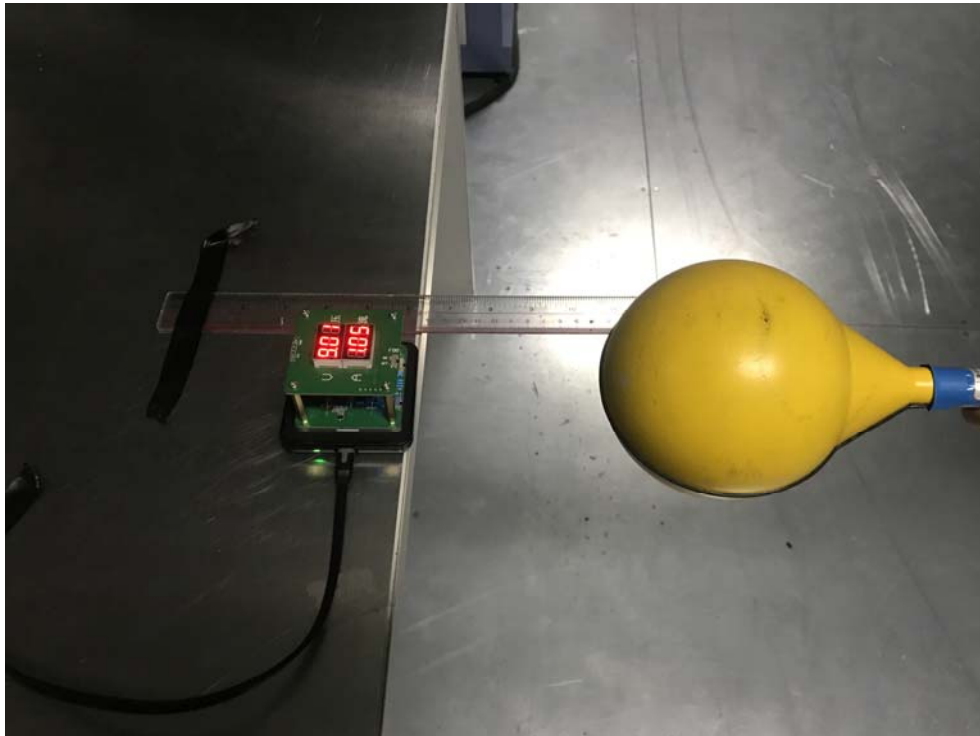


Position B




Position C

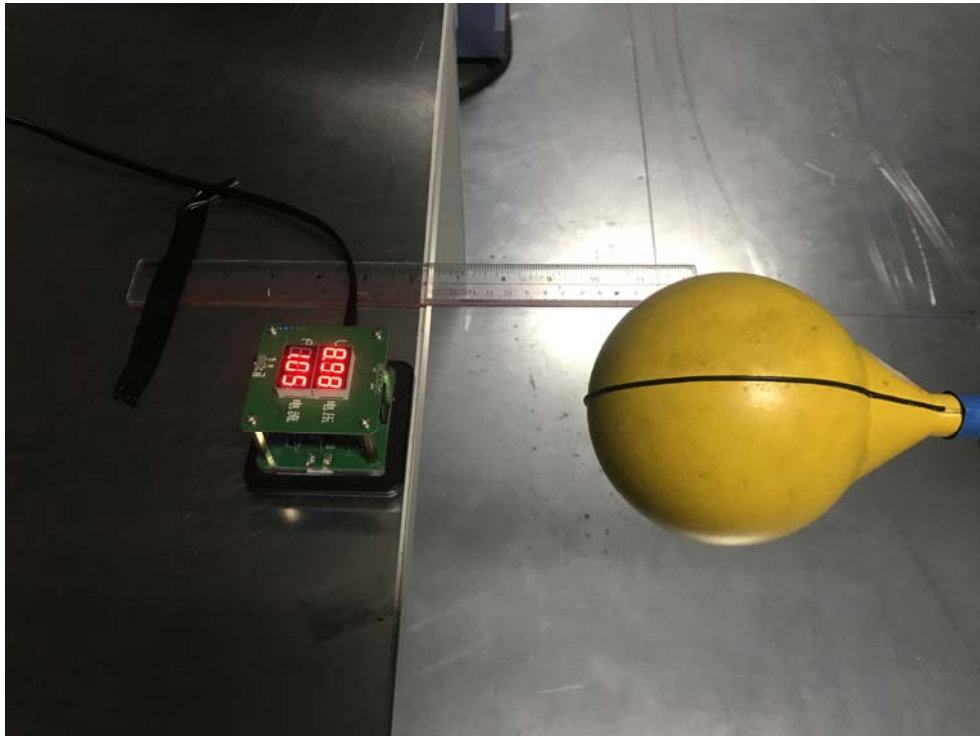

Position D

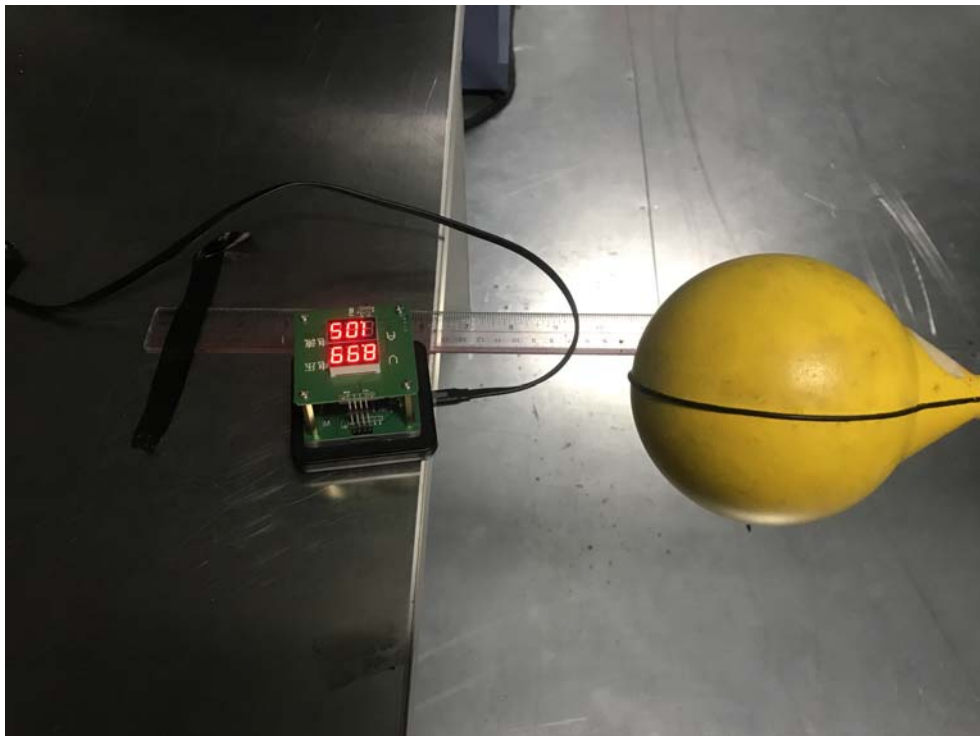

Position E

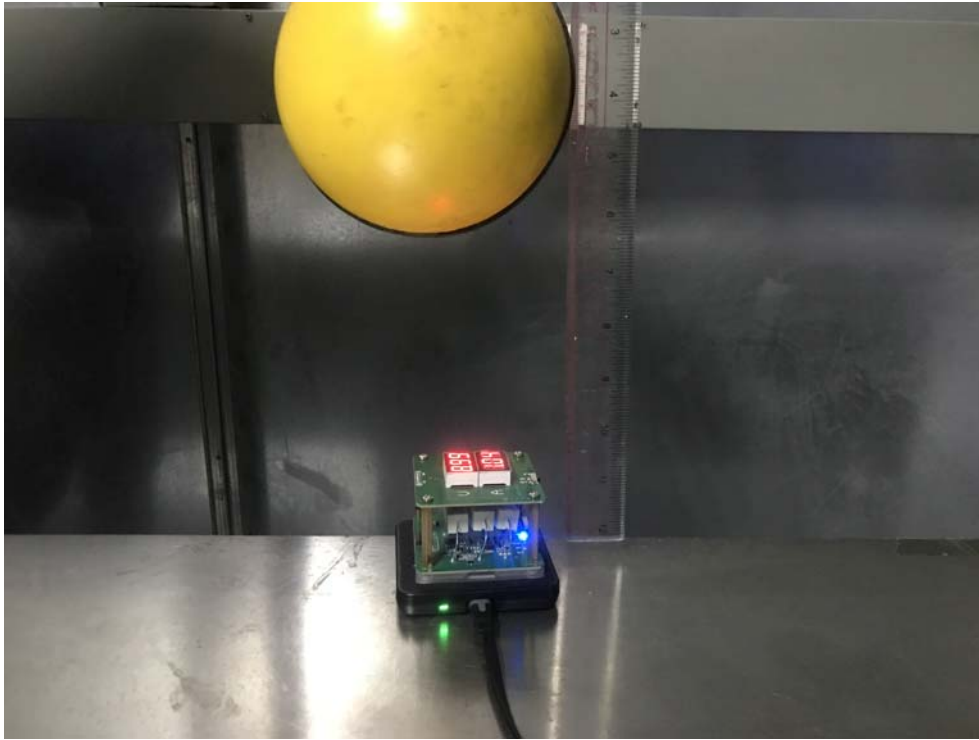

**Note: The dummy load must be placed horizontal of the EUT at the top.(Parallel to the coil)**  
=====END=====