

Dates of Tests: July 04 ~ July 11, 2019  
Test Report S/N: LR500111907C  
Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2AOJB-SKYBRIDGERF100**

APPLICANT

**Globalbridge Co., Ltd.**

|                           |   |                                                                     |
|---------------------------|---|---------------------------------------------------------------------|
| Equipment Class           | : | Digital Transmission System (DTS)                                   |
| Manufacturing Description | : | ISM Dual Band(2.4/5GHz) RF Module                                   |
| Manufacturer              | : | Globalbridge Co., Ltd.                                              |
| Model name                | : | SKYBRIDGE RF-100                                                    |
| Test Device Serial No.:   | : | Identical prototype                                                 |
| Rule Part(s)              | : | FCC Part 15.247 Subpart C ; ANSI C-63.10-2013                       |
| Frequency Range           | : | 2410 ~ 2474 MHz<br>5733 ~ 5813 MHz                                  |
| Max. Output Power         | : | 2.4 GHz Max 6.23 dBm – Conducted<br>5 GHz Max 12.14 dBm – Conducted |
| Date of issue             | : | July 12, 2019                                                       |

This test report is issued under the authority of:



Ja-Beom, Koo / Manager

The test was supervised by:



Eun-Hwan Jung, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

|                                        |       |    |
|----------------------------------------|-------|----|
| 1. GENERAL INFORMATION                 | ----- | 3  |
| 2. INFORMATION ABOUT TEST ITEM         | ----- | 4  |
| 3. TEST REPORT                         | ----- | 6  |
| 3.1 SUMMARY OF TESTS                   | ----- | 6  |
| 3.2 TECHNICAL CHARACTERISTICS TEST     | ----- | 7  |
| 3.2.1 6 dB BANDWIDTH                   | ----- | 7  |
| 3.2.2 OUTPUT POWER                     | ----- | 13 |
| 3.2.3 POWER SPECTRAL DENSITY           | ----- | 18 |
| 3.2.4 BAND EDGE                        | ----- | 23 |
| 3.2.5 CONDUCTED SPURIOUS EMISSIONS     | ----- | 27 |
| 3.2.6 RADIATED SPURIOUS EMISSIONS      | ----- | 32 |
| 3.2.7 AC Conducted Emissions           | ----- | 53 |
| <br><b>APPENDIX</b>                    |       |    |
| APPENDIX TEST EQUIPMENT USED FOR TESTS | ----- | 54 |

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No. | Validity   | Reference             |
|--------|---------|-------------------|------------|-----------------------|
| NVLAP  | U.S.A   | 200723-0          | 2019-09-30 | ECT accredited Lab.   |
| RRA    | KOREA   | KR0049            | -          | EMC accredited Lab.   |
| FCC    | U.S.A   | 649054            | 2021-04-11 | FCC CAB               |
| VCCI   | JAPAN   | C-4948,           | 2020-09-10 | VCCI registration     |
| VCCI   | JAPAN   | T-2416,           | 2020-09-10 | VCCI registration     |
| VCCI   | JAPAN   | R-4483(10 m),     | 2020-10-15 | VCCI registration     |
| VCCI   | JAPAN   | G-847             | 2021-12-13 | VCCI registration     |
| IC     | CANADA  | 5799A-1           | 2019-11-07 | IC filing             |
| KOLAS  | KOREA   | NO.551            | 2021-08-20 | KOLAS accredited Lab. |
| NVLAP  | U.S.A   | 200723-0          | 2021-08-20 | ECT accredited Lab.   |

## 2. Information about test item

### 2-1 Client & Manufacturer

Company name : Globalbridge Co., Ltd.  
 Address : #1710, 17F, Songdo Smart valley-A, Songdomirae-ro 30 beon-gil,  
 Yeonsu-gu, Incheon, South Korea  
 Tel / Fax : TEL No : +82-10-6676-8403 / FAX No : -

### 2-2 Equipment Under Test (EUT)

Trade name : Globalbridge Co., Ltd.  
 Model name : SKYBRIDGE RF-100  
 Serial number : Identical prototype  
 Date of receipt : July 04, 2019  
 EUT condition : Pre-production, not damaged  
 Antenna type : Dipole Antenna (Max Gain : 2.4 GHz : 2.5 dBi, 5 GHz : 4dBi)  
 Frequency Range : 2410 ~ 2474 MHz  
 5733 ~ 5813 MHz  
 RF output power : 2.4 GHz Max 6.23 dBm – Conducted  
 5 GHz Max 12.14 dBm – Conducted  
 Number of channels : 2.4 GHz : 5  
 5 GHz : 6  
 Type of Modulation : BPSK, QPSK  
 Power Source : 3.3 Vdc

### 2-3 Tested frequency

|                 | LOW  | MID  | HIGH |
|-----------------|------|------|------|
| Frequency (MHz) | 2410 | 2442 | 2474 |
|                 | 5733 | 5781 | 5813 |

### 2-4 Ancillary Equipment

| Equipment | Model No. | Serial No. | Manufacturer |
|-----------|-----------|------------|--------------|
| Notebook  | CR720     | MS-1736    | MSI          |

### 2-5 Operating Mode

| Mode           | Remarks <sup>1)</sup> |
|----------------|-----------------------|
| 2.4 GHz, 5 GHz | Maximum Power         |

<sup>1)</sup> This setting of software is the worst case.

Any conditions under the normal use do not exceed the condition of setting

In addition, end users cannot change the settings of the output power of the product.

In accordance with FCC KDB 996369 D03 this module has been tested as a stand-alone device.

### 3. Test Report

#### 3.1 Summary of tests

| FCC Part Section(s) | Parameter                          | Limit           | Test Condition | Status (note 1)   |
|---------------------|------------------------------------|-----------------|----------------|-------------------|
| 15.247(a)           | 6 dB Bandwidth                     | > 500 kHz       | Conducted      | C                 |
| 15.247(b)           | Transmitter Peak Output Power      | < 1 Watt        |                | C                 |
| 15.247(e)           | Transmitter Power Spectral Density | < 8 dBm @ 3 kHz |                | C                 |
| 15.247(d)           | Band Edge                          | > 20 dBc        |                | C                 |
|                     | Conducted Spurious Emissions       | > 20 dBc        |                | C                 |
| 15.209(a)           | Radiated Spurious Emissions        | On page 32      | Radiated       | C                 |
| 15.207              | AC Conducted Emissions             | Emissions       | Conducted      | NA <sup>(2)</sup> |
| 15.203              | Antenna requirement                | -               | -              | C                 |

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: This product operates only with battery

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

Frequency range to be scanned:

0.15 MHz - 30 MHz as conducted measurement

30 MHz to 5<sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower as radiated measurement.

Bandwidth:

Measured by the CISPR quasi-peak function Bandwidth is 9 kHz in the frequency 0.15 MHz to 30 MHz and 120 kHz in the frequency 30 MHz to 1,000 MHz.

Measured by the Peak function Bandwidth is 1 MHz in the frequency 1 GHz to 40 GHz.

A sample calculation:

COR. F (correction factor)= Antenna factor + Cable loss- Amp.gain- Distance correction

Emission Level= meter reading + COR.F

---

**→ Antenna Requirement**

The Globalbridge Co., Ltd. FCC ID: 2AOJB-SKYBRIDGERF100 unit complies with the requirement of §15.203.  
The antenna type is Dipole Antenna.

**3.2 MEASUREMENT METHODS**

| Parameter                          | METHODS                                |
|------------------------------------|----------------------------------------|
| 6 dB Bandwidth                     | KDB 558074 D01 v05r02, Section 8.2     |
| Transmitter Peak Output Power      | KDB 558074 D01 v05r02, Section 8.3.1.1 |
| Transmitter Power Spectral Density | KDB 558074 D01 v05r02, Section 8.4.    |
| Band Edge                          | KDB 558074 D01 v05r02, Section 8.7     |
| Conducted Spurious Emissions       | KDB 558074 D01 v05r02, Section 8.5     |
| Radiated Spurious Emissions        | KDB 558074 D01 v05r02, Section 8.6     |
| AC Conducted Emissions             | ANSI C63.10-2013, Section 6.2.         |

## 3.2 Technical Characteristics Test

### 3.2.1 6 dB Bandwidth

#### Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 300 kHz (VBW  $\geq$  3\*RBW)

Sweep = auto

Trace = max hold

Detector function = peak

#### Measurement Data : **Complies**

| Frequency<br>(MHz) | Test Results             |          |
|--------------------|--------------------------|----------|
|                    | Measured Bandwidth (MHz) | Result   |
| 2410               | 9.407                    | Complies |
| 2442               | 9.262                    | Complies |
| 2474               | 9.334                    | Complies |
| Frequency<br>(MHz) | Test Results             |          |
|                    | Measured Bandwidth (MHz) | Result   |
| 5733               | 9.624                    | Complies |
| 5781               | 10.926                   | Complies |
| 5813               | 10.420                   | Complies |

- See next pages for actual measured spectrum plots.

---

**Minimum Standard:**

---

6 dB Bandwidth > 500 kHz

---




**Measurement Setup**

Figure 1: Measurement setup for the carrier frequency separation


## 2.4 GHz Low Channel




## Middle Channel

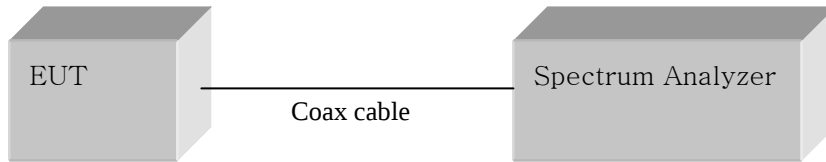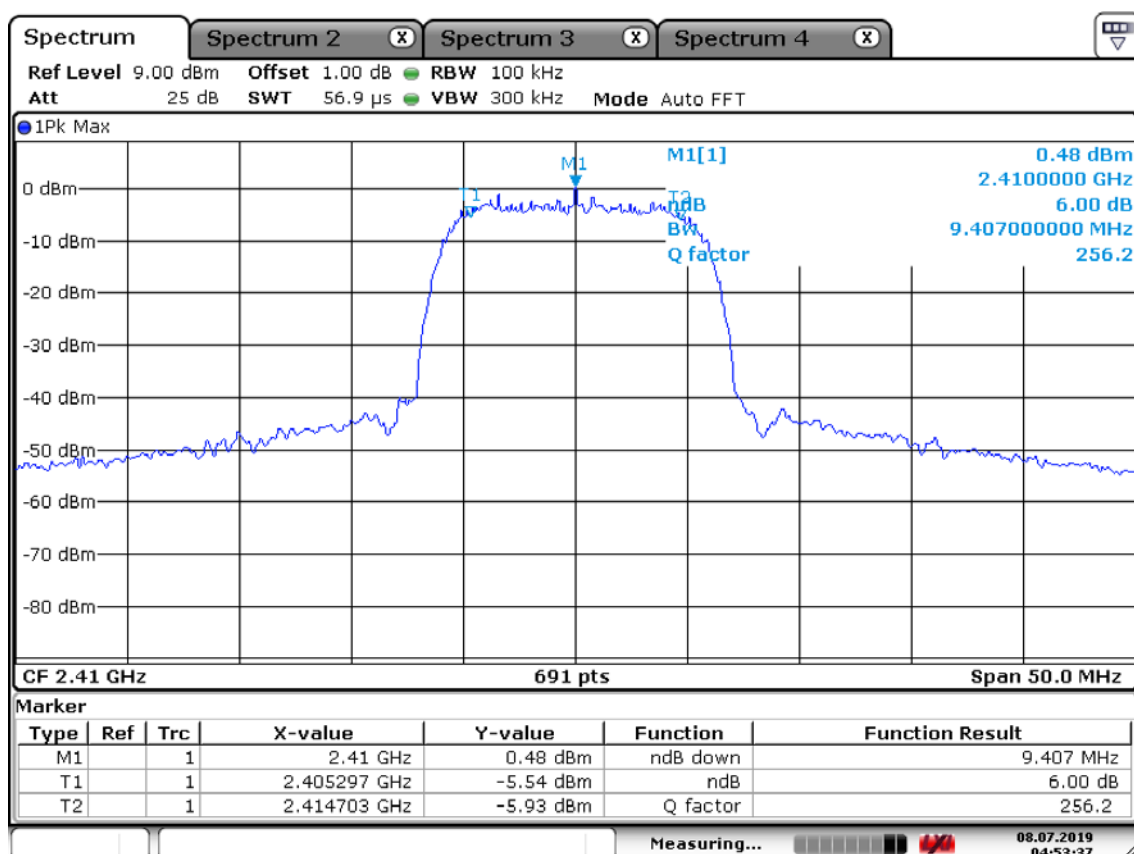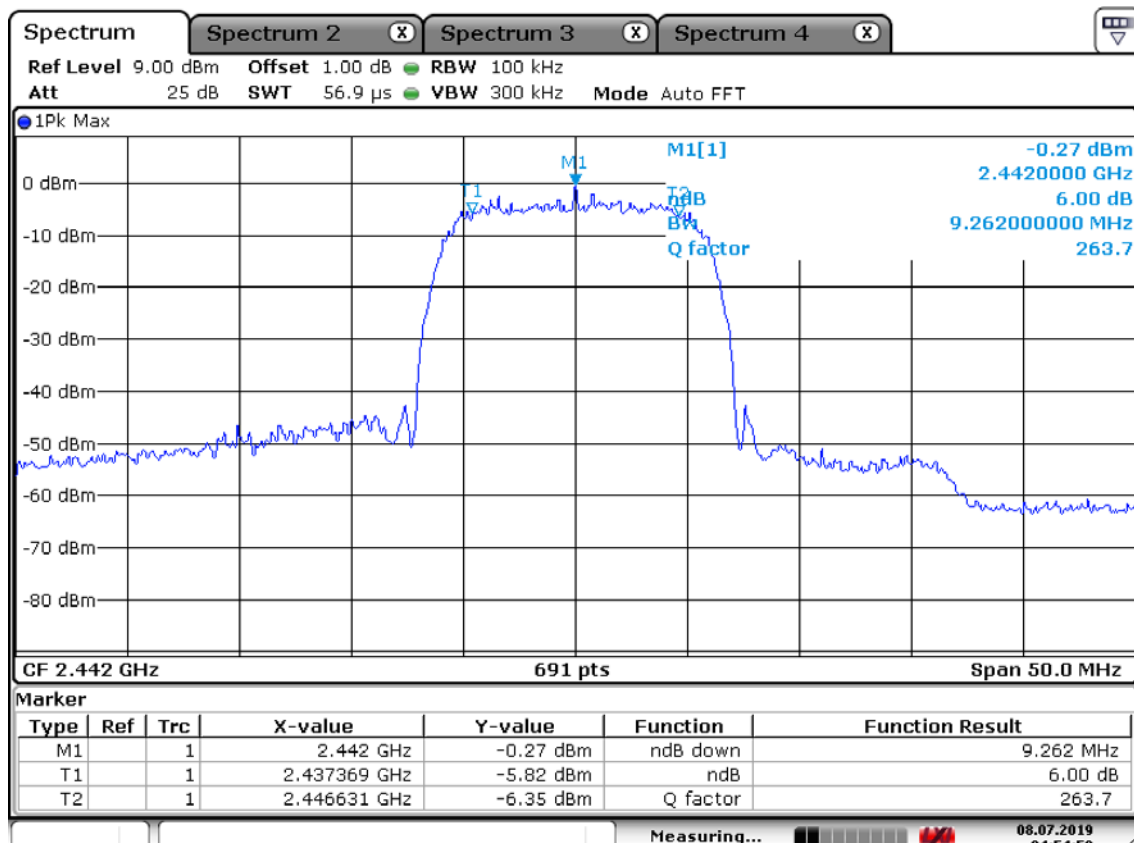


## High Channel

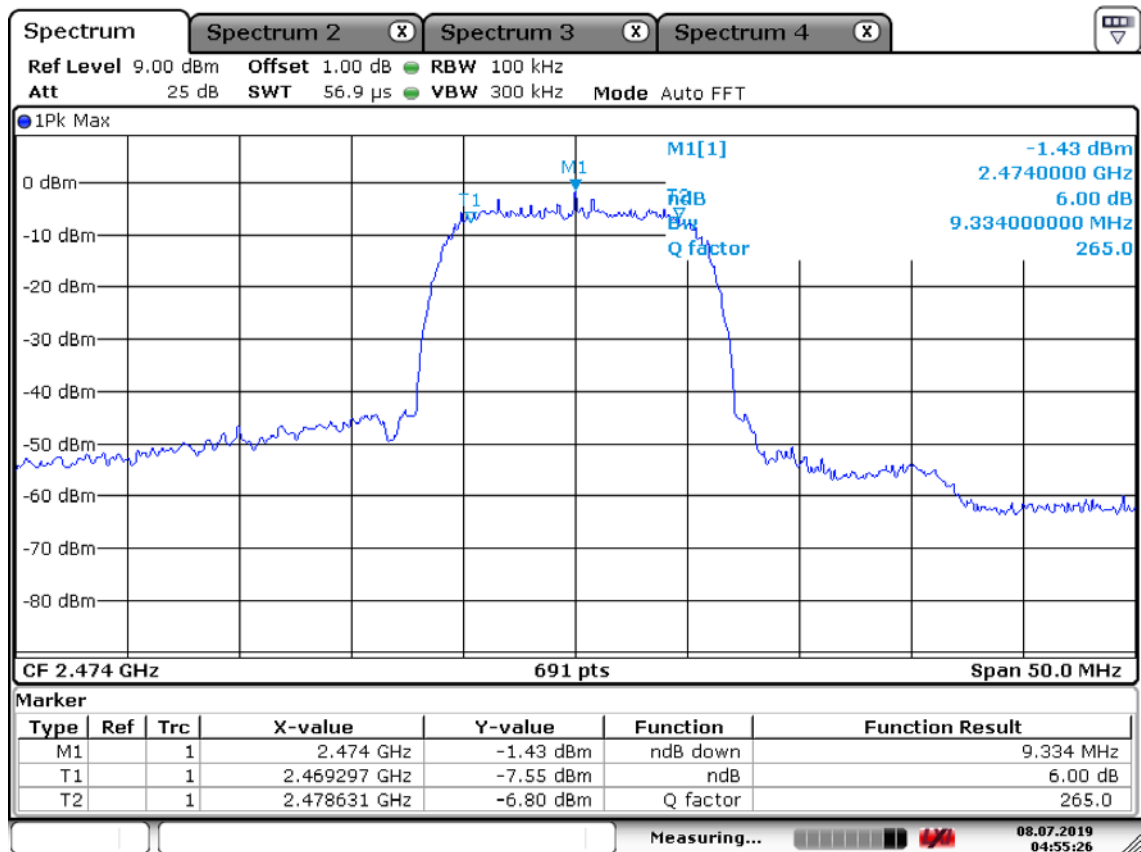


## 5 GHz Low Channel

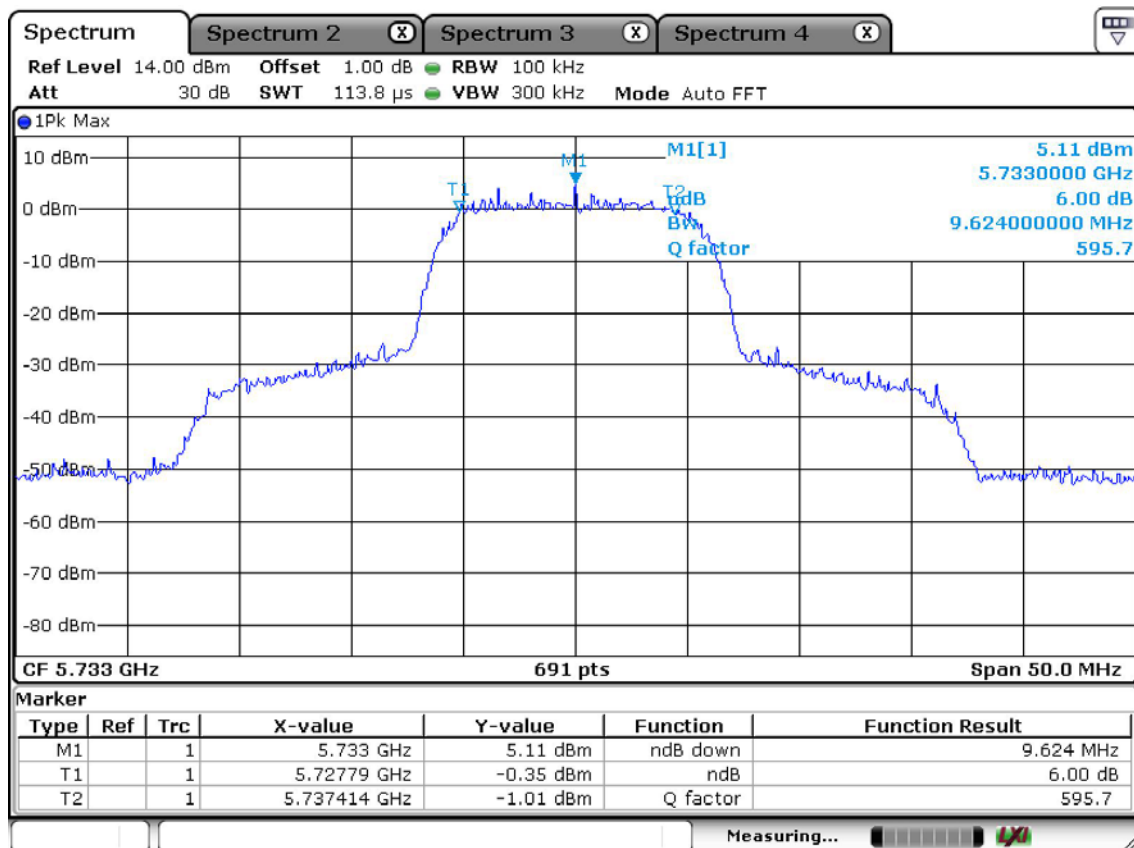

## Middle Channel

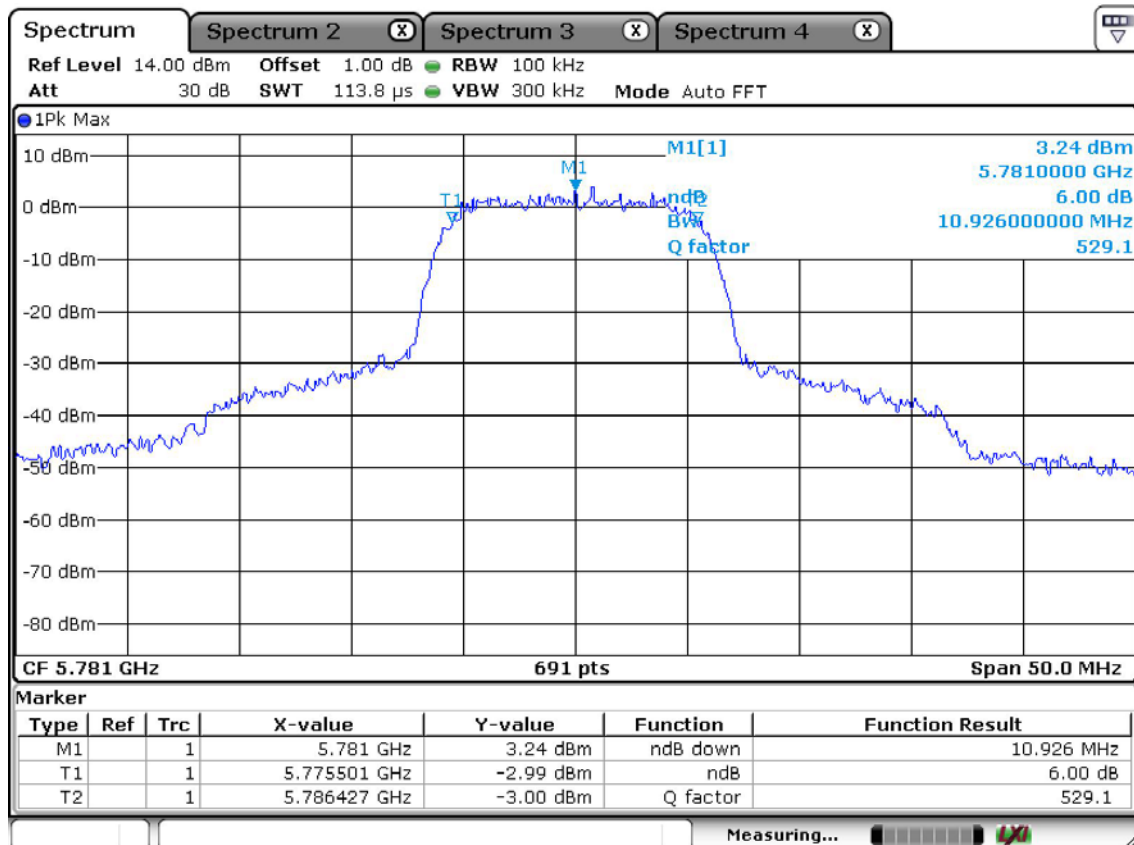

## High Channel

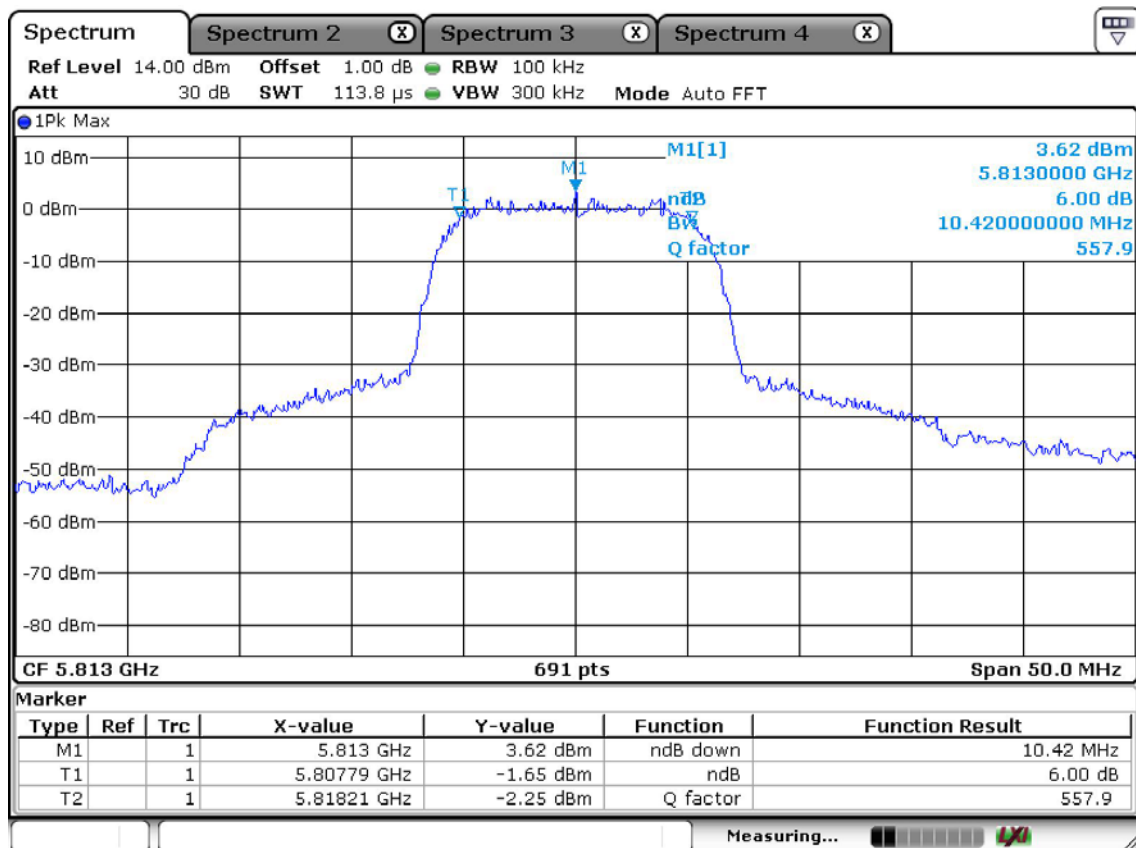

### 3.2.2 Output Power Measurement

#### Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99 % bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

#### The spectrum analyzer is set to(Peak):

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

Span = auto

VBW = 3 MHz ( $VBW \geq 3 * RBW$ )

Sweep = auto

Detector function = peak

#### The spectrum analyzer is set to(Average):

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

Span = auto

VBW = 3 MHz ( $VBW \geq 3 * RBW$ )

Sweep = auto

Detector function = RMS

#### Measurement Data : **Complies**

| Frequency<br>(MHz) | Test Results |       |          |
|--------------------|--------------|-------|----------|
|                    | dBm          | mW    | Result   |
| 2410               | 6.23         | 4.19  | Complies |
| 2442               | 5.59         | 3.62  | Complies |
| 2474               | 4.00         | 2.51  | Complies |
| Frequency<br>(MHz) | Test Results |       |          |
|                    | dBm          | mW    | Result   |
| 5733               | 12.14        | 16.37 | Complies |
| 5781               | 11.96        | 15.70 | Complies |
| 5813               | 11.46        | 14.00 | Complies |

- See next pages for actual measured spectrum plots.


#### Minimum Standard:

|                   |       |
|-------------------|-------|
| Peak output power | < 1 W |
|-------------------|-------|


#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


## 2.4 GHz Low Channel

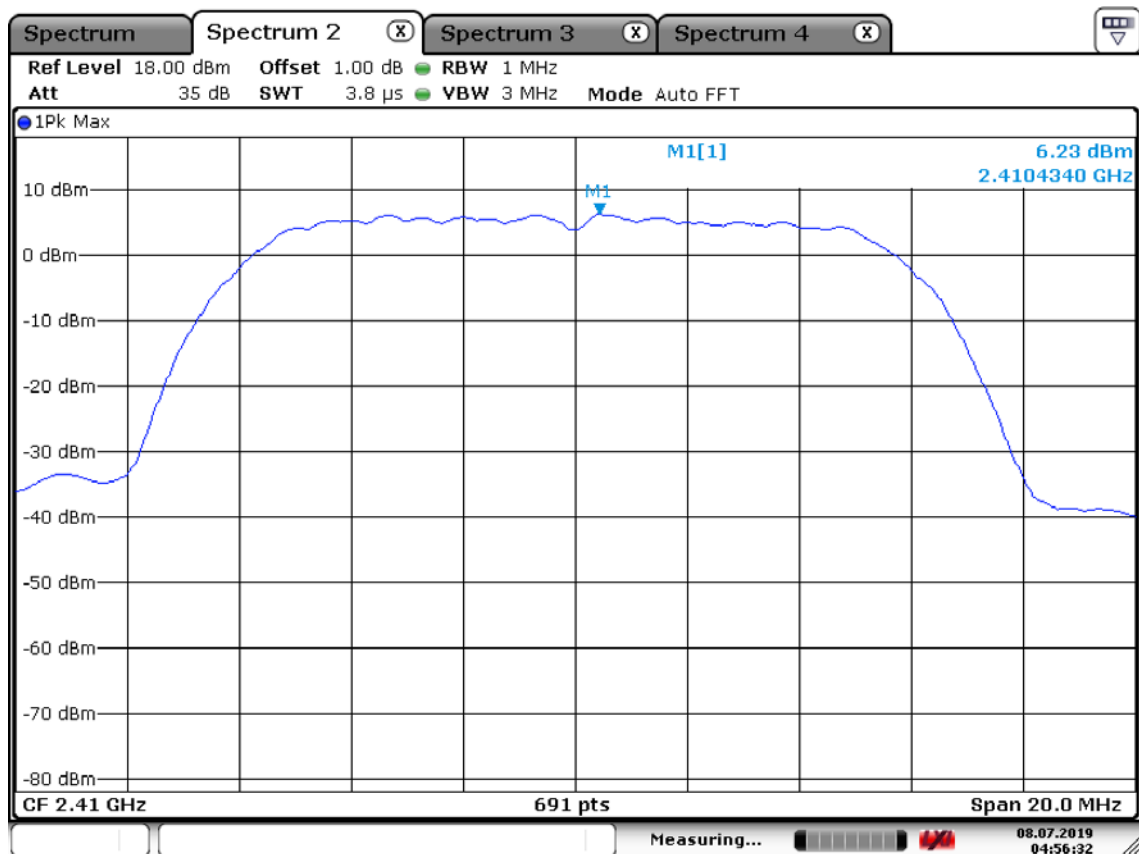


## Middle Channel

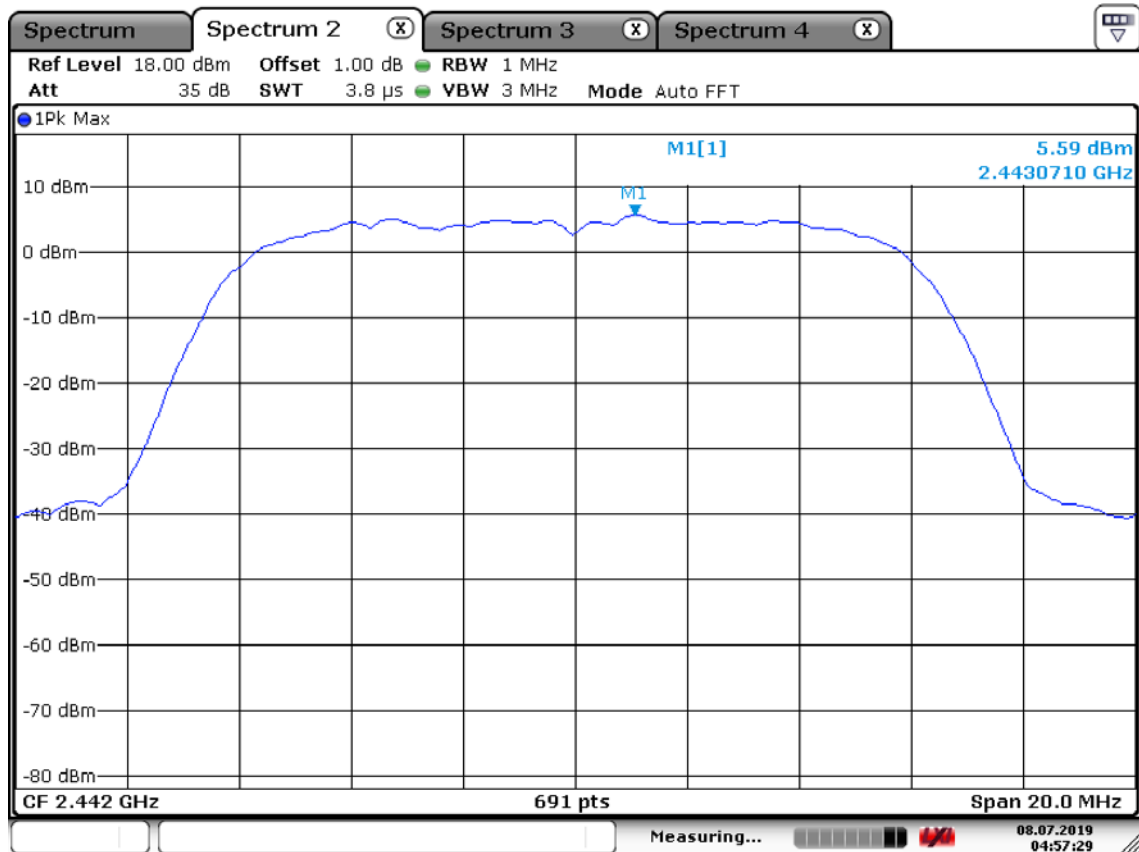


## High Channel(Peak)

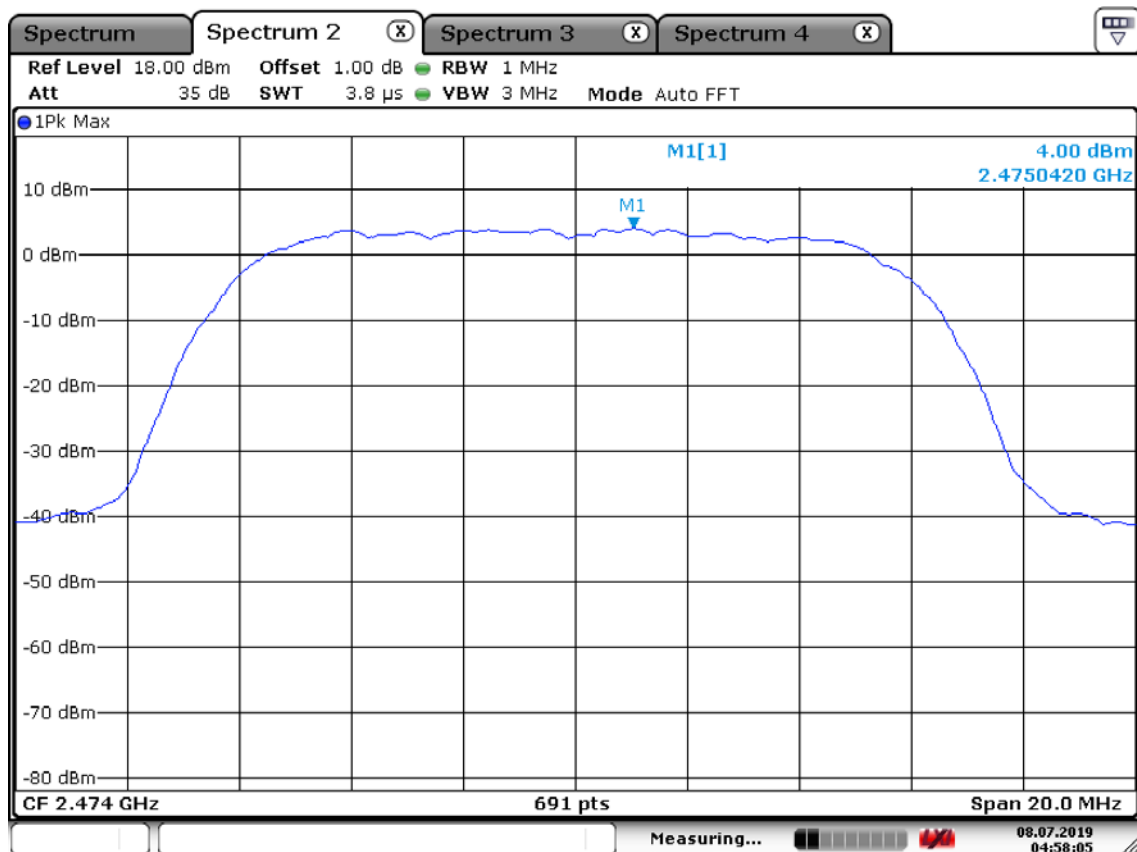


## 5 GHz Low Channel(Peak)

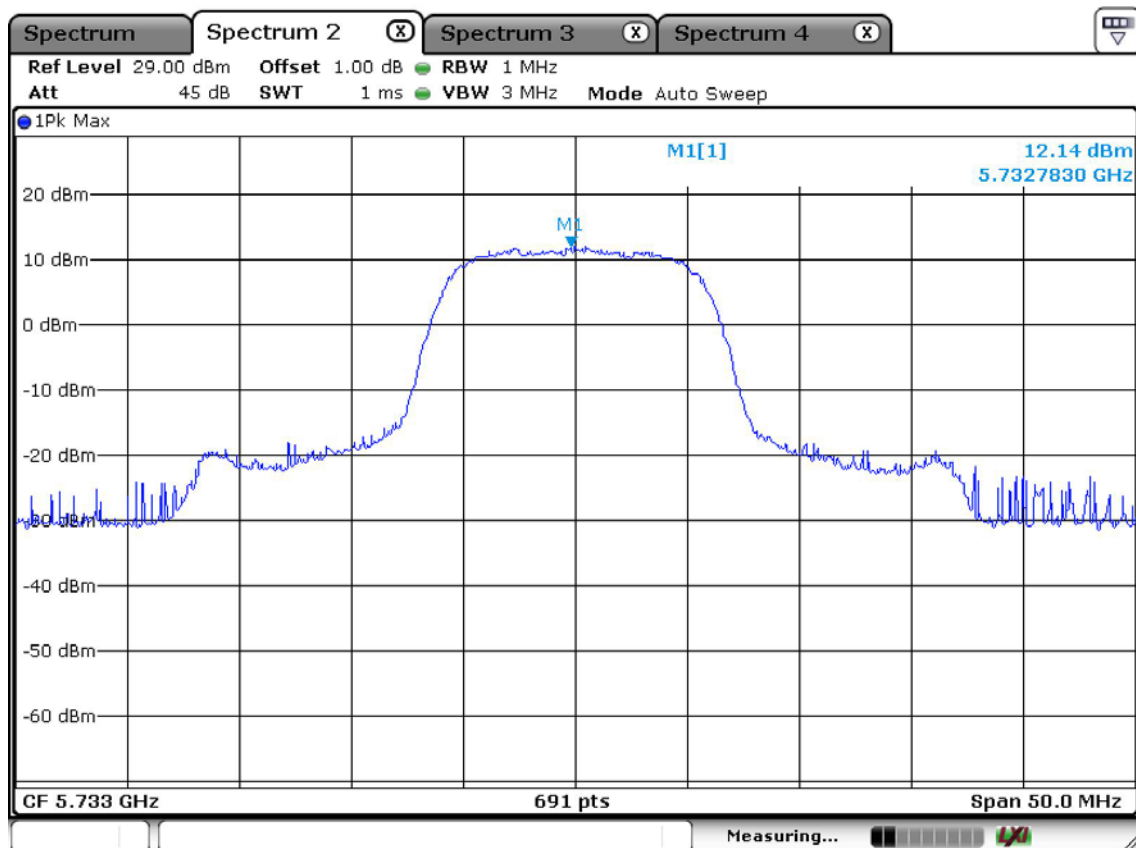

## Middle Channel(Peak)

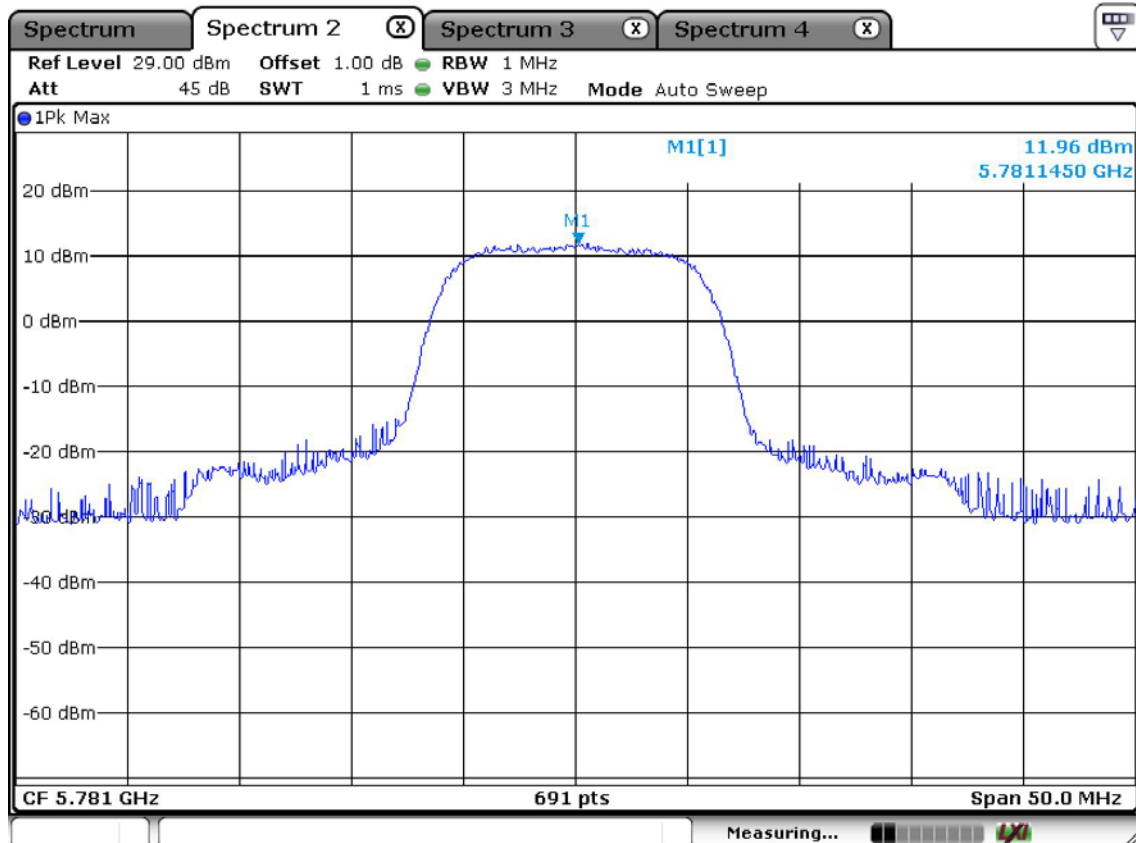

## High Channel(Peak)

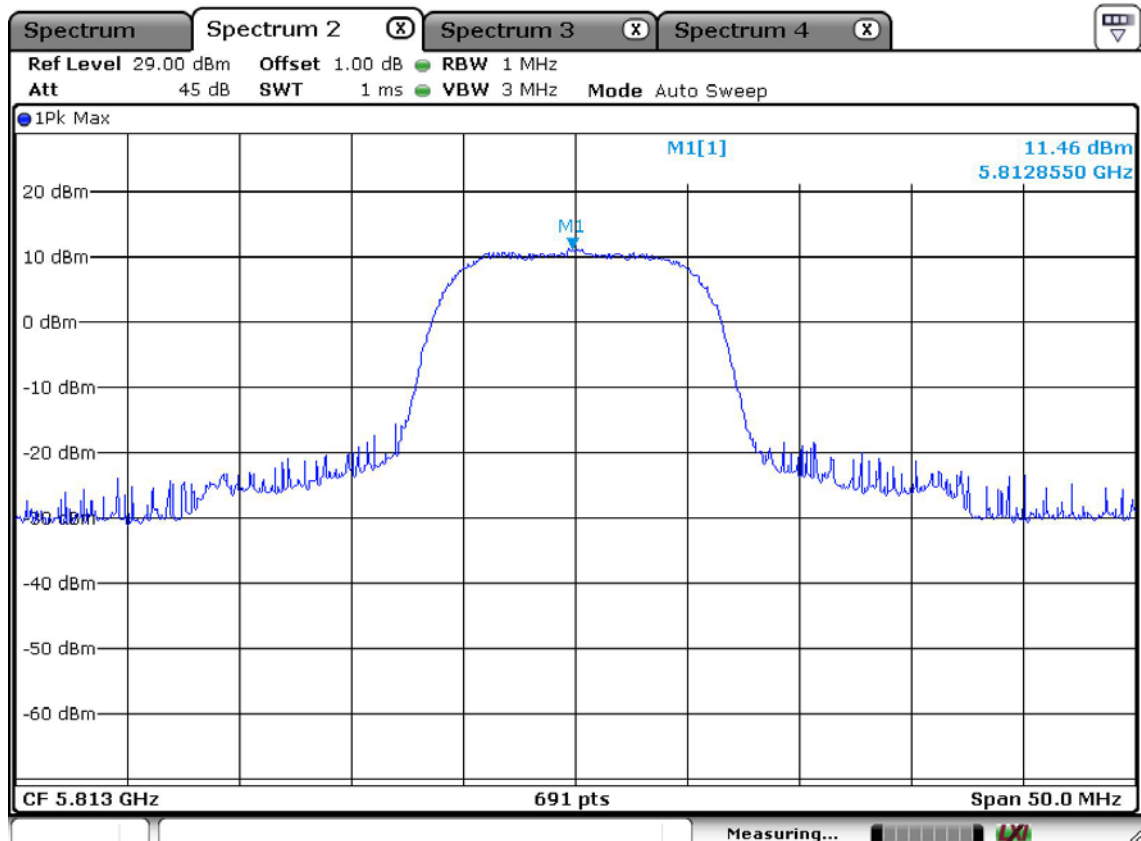

### 3.2.3 Power Spectral Density

#### Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz ( $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ )

Span = 1.5 times the DTS bandwidth

VBW = 10 kHz ( $3 * \text{RBW}$ )

Sweep = auto

Detector function = peak

Trace = max hold

#### Measurement Data : **Complies**

| Frequency<br>(MHz) | Test Results |          |
|--------------------|--------------|----------|
|                    | dBm          | Result   |
| 2410               | -16.73       | Complies |
| 2442               | -15.39       | Complies |
| 2474               | -16.75       | Complies |
| Frequency<br>(MHz) | Test Results |          |
|                    | dBm          | Result   |
| 5733               | -5.92        | Complies |
| 5781               | -7.91        | Complies |
| 5813               | -9.12        | Complies |

- See next pages for actual measured spectrum plots.

#### Minimum Standard:

|                        |                    |
|------------------------|--------------------|
| Power Spectral Density | < 8 dBm @ 3 kHz BW |
|------------------------|--------------------|


#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


## Power Density Measurement

2.4 GHz


### Low Channel

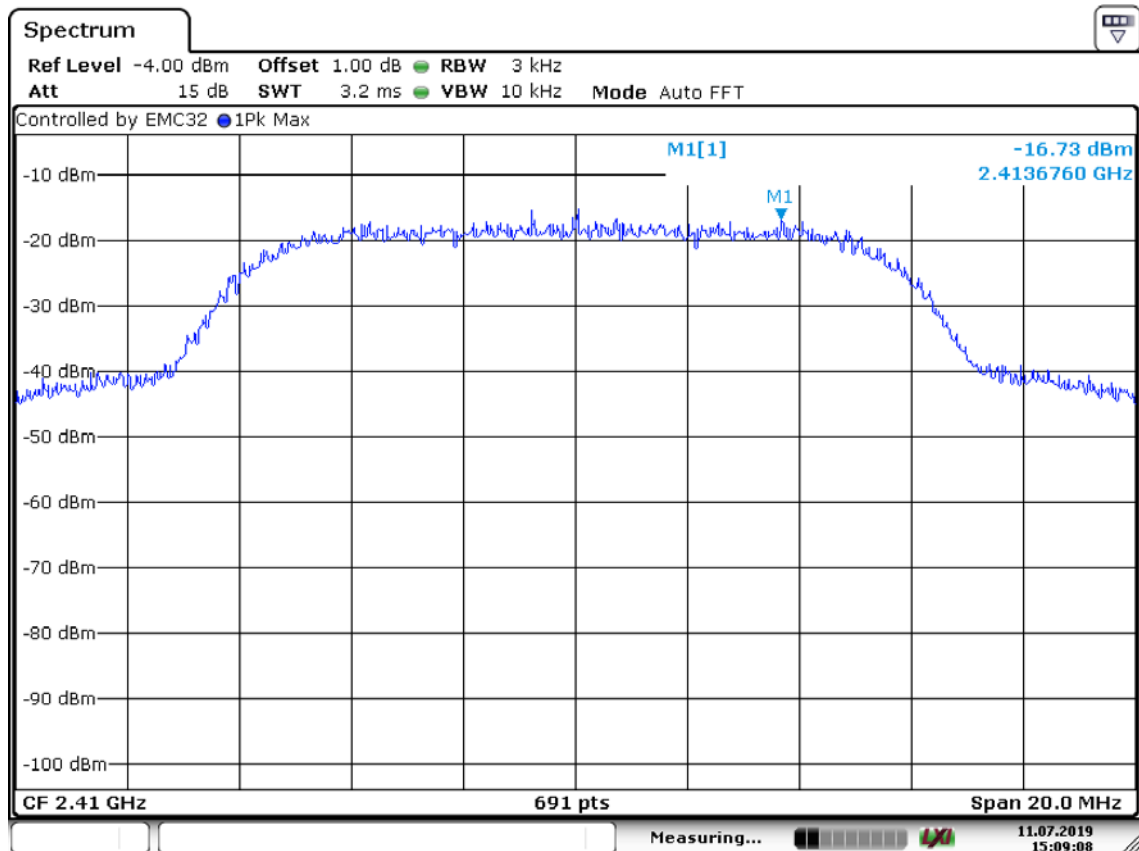


### Middle Channel

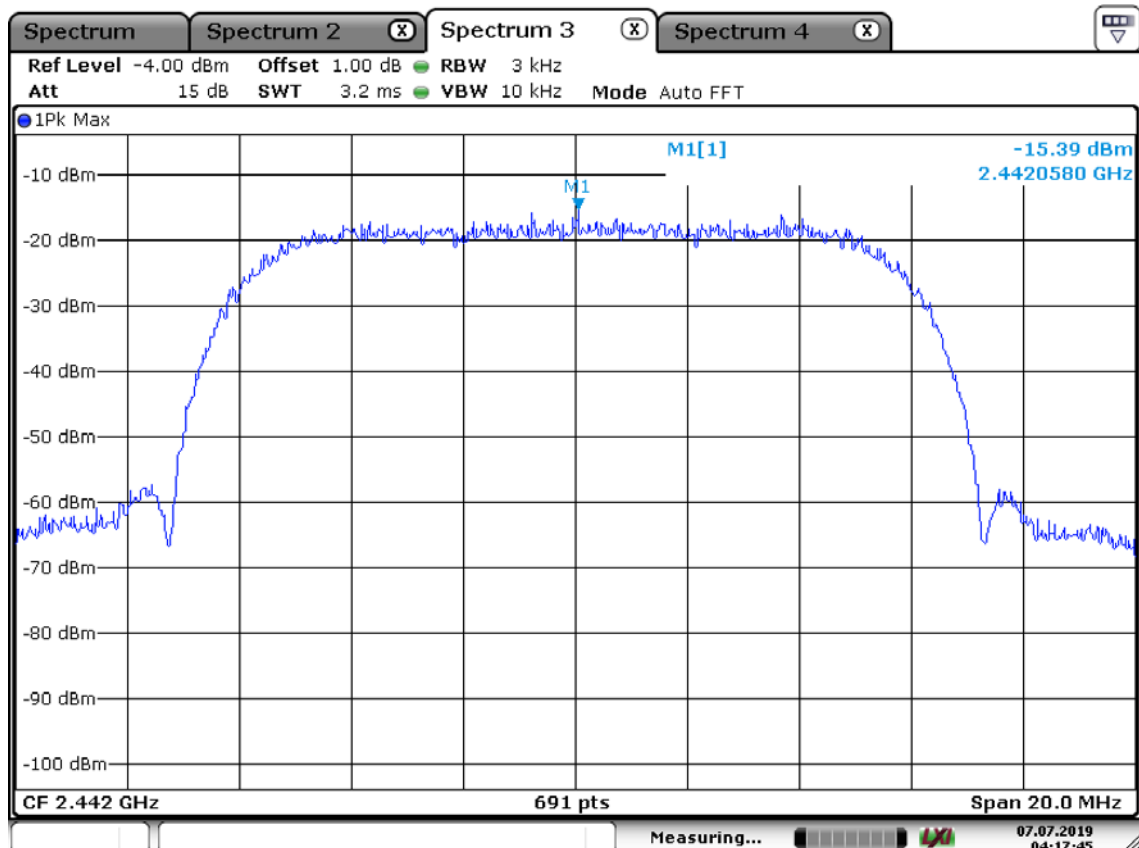


## High Channel

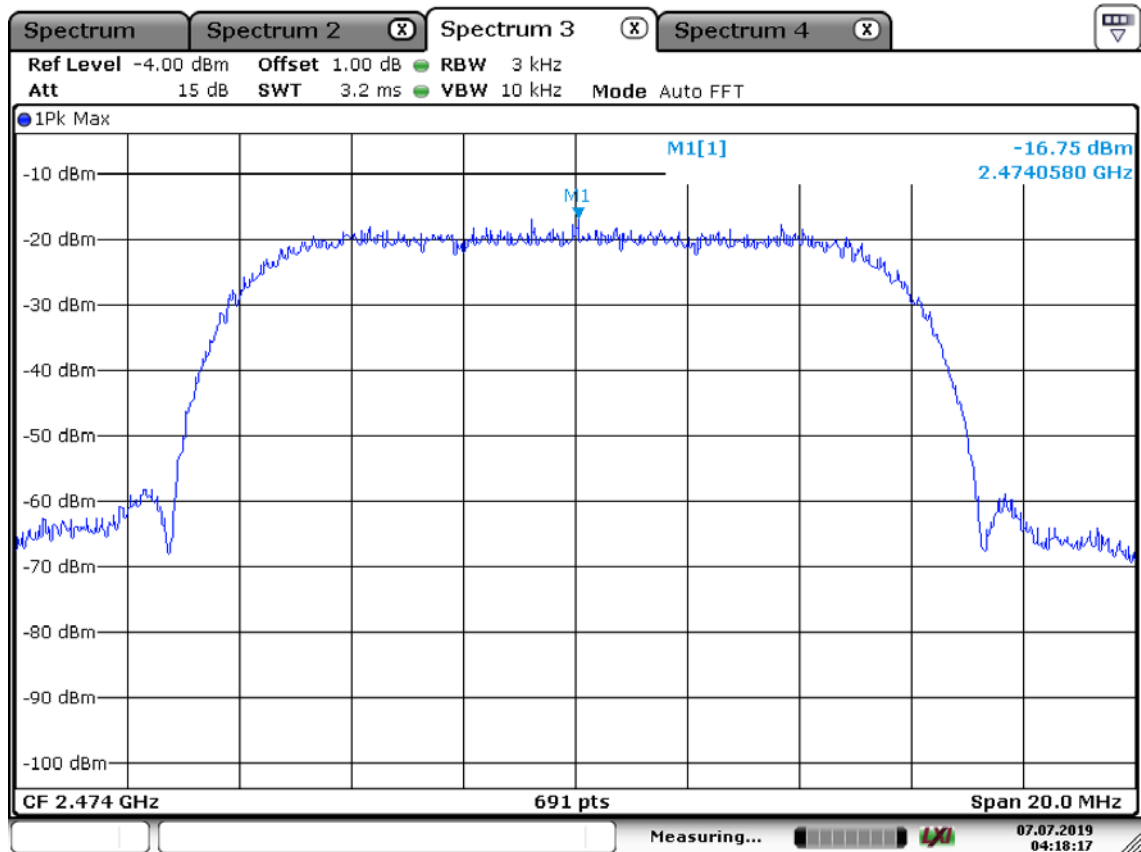


## 5 GHz Low Channel

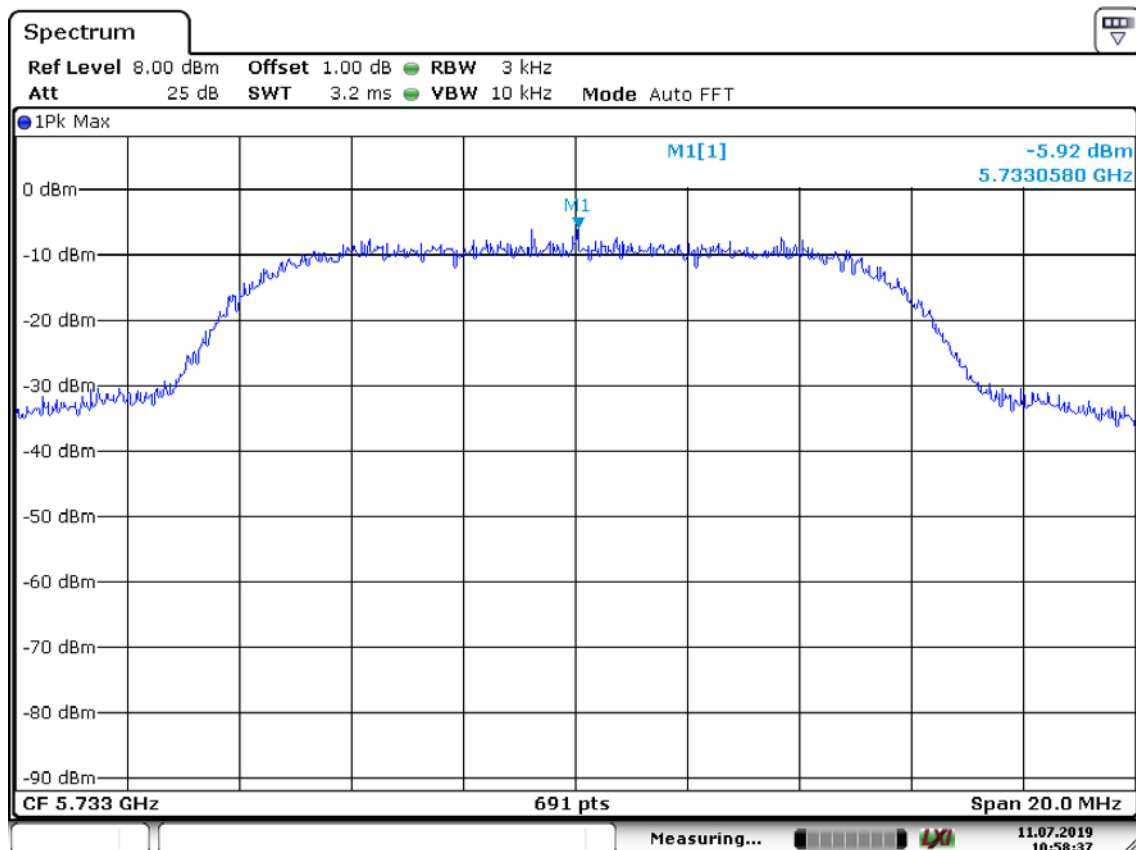

## Middle Channel

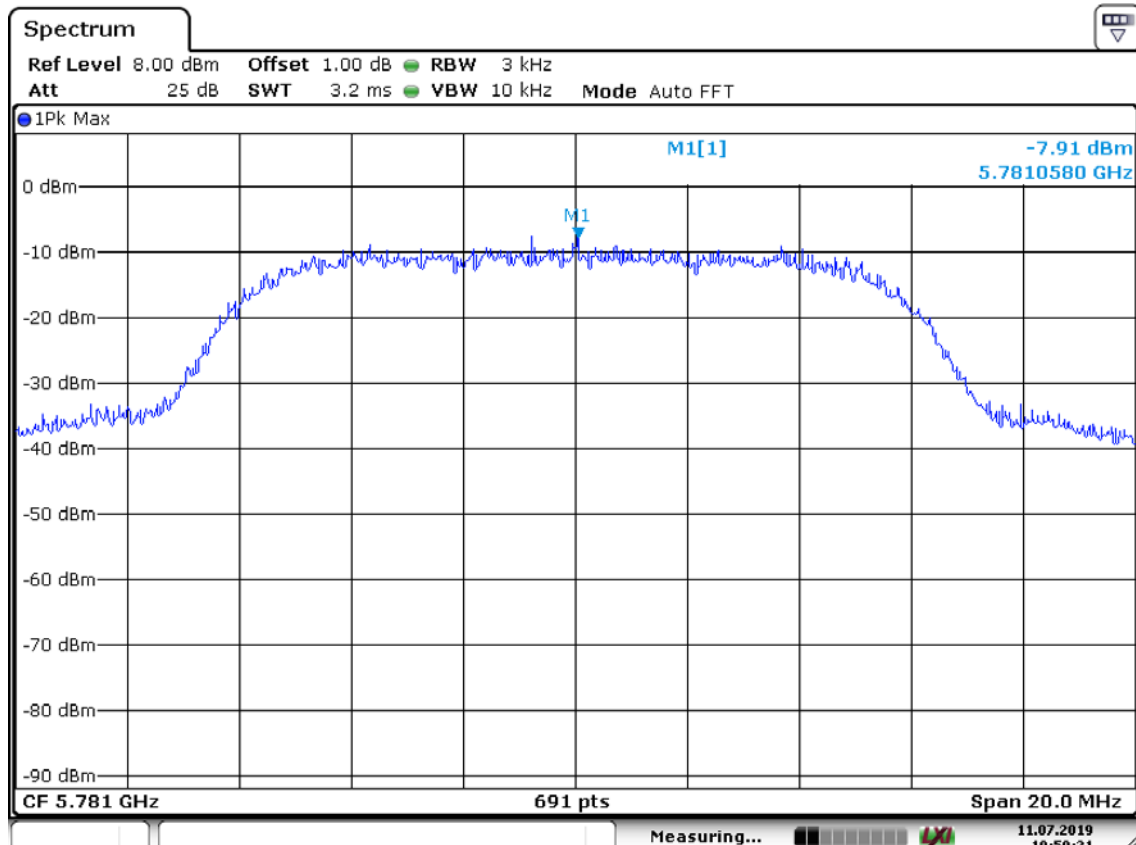

## High Channel

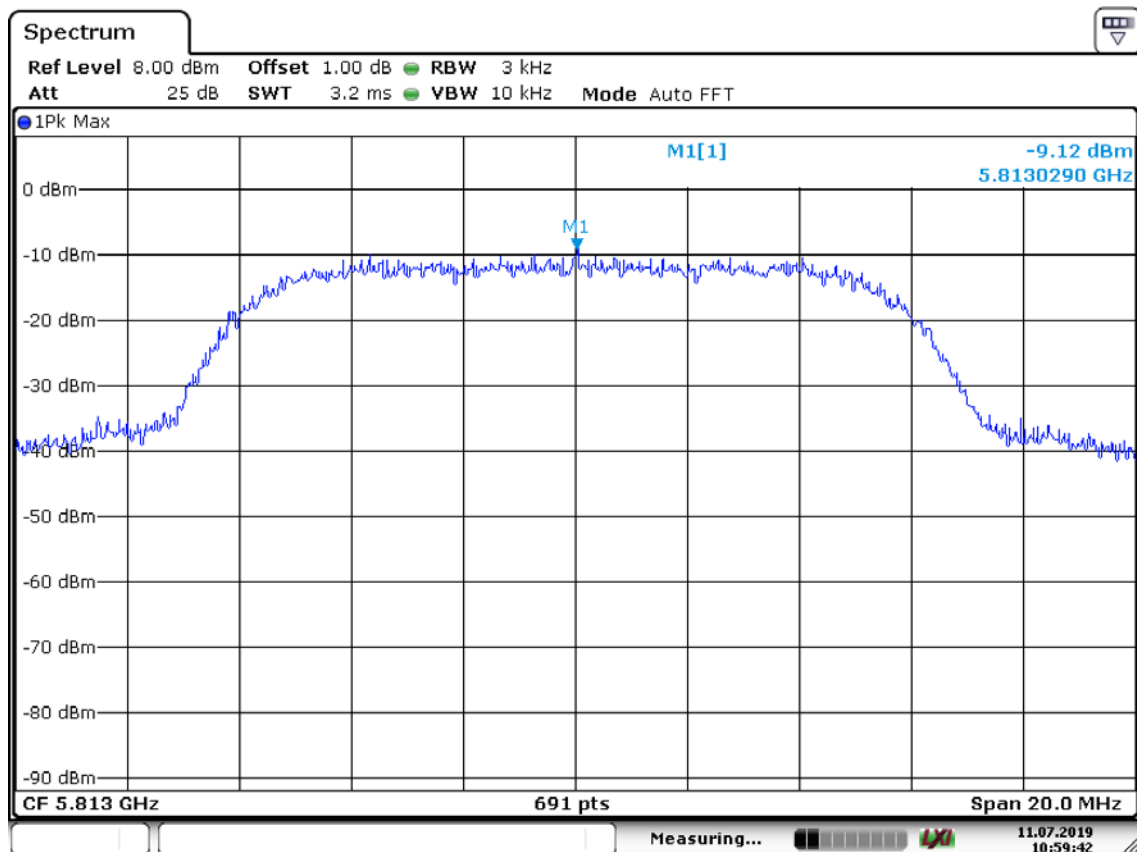

### 3.2.4 Band Edge

#### Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz, 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK:

RBW = 1 MHz, VBW  $\geq$  3 MHz, Sweep=Auto

Average:

RBW = 1 MHz, VBW = 3 MHz, Sweep=Auto

Measurement Distance:

3 m

Polarization:



Horizontal / Vertical

#### Measurement Data: Complies



- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

|                          |          |
|--------------------------|----------|
| <b>Minimum Standard:</b> | > 20 dBc |
|--------------------------|----------|

2.4 GHz

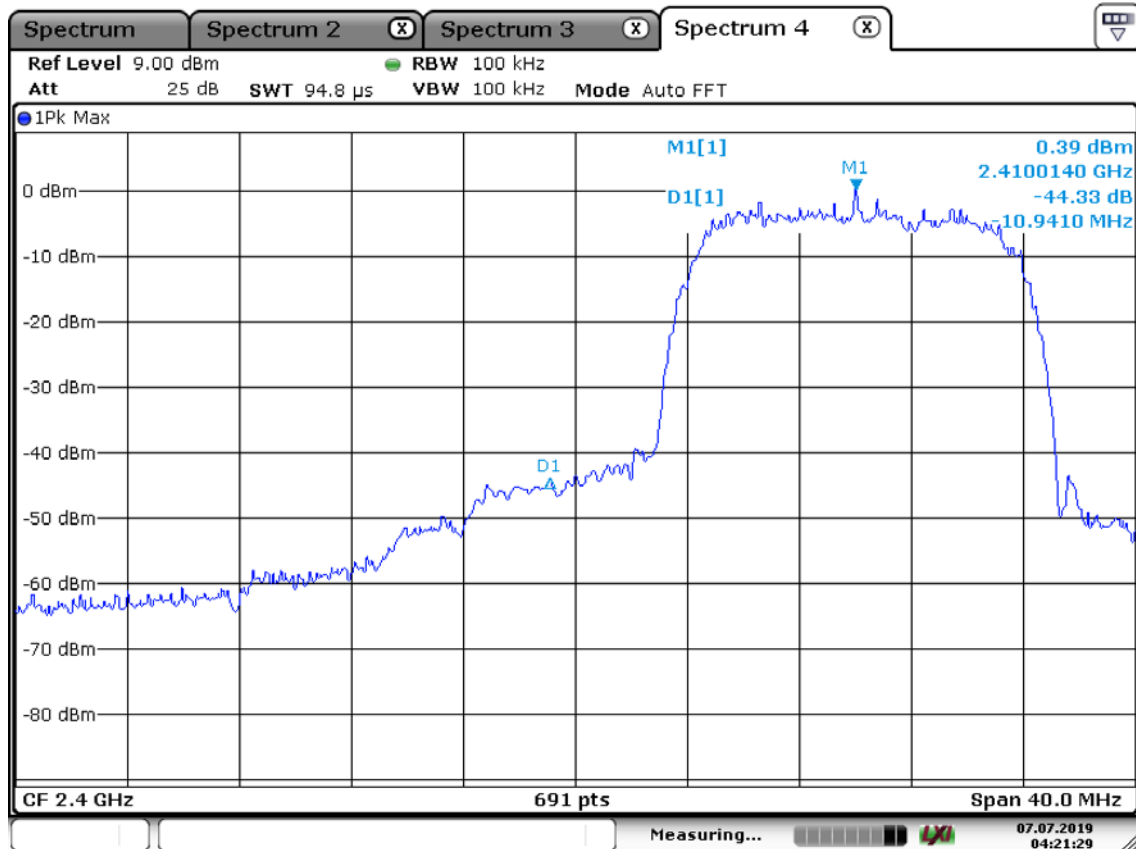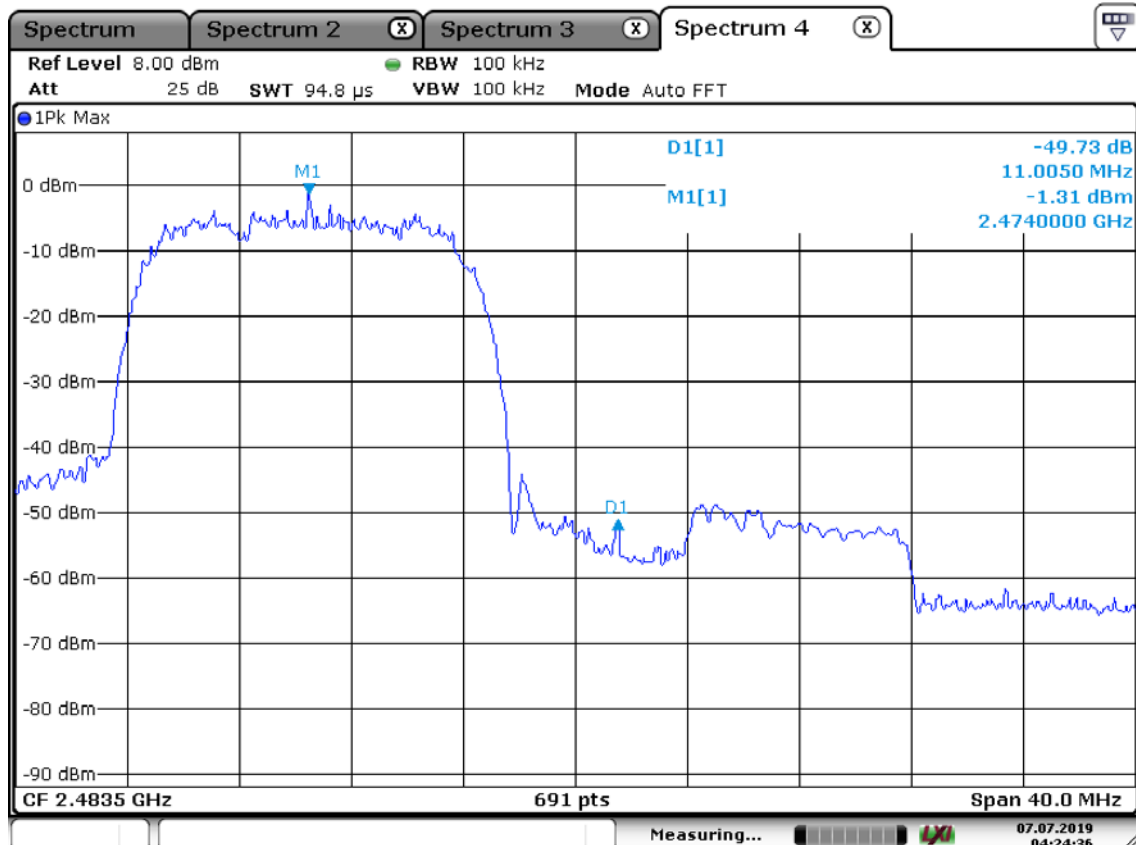Lower edgeUpper edge

5 GHz

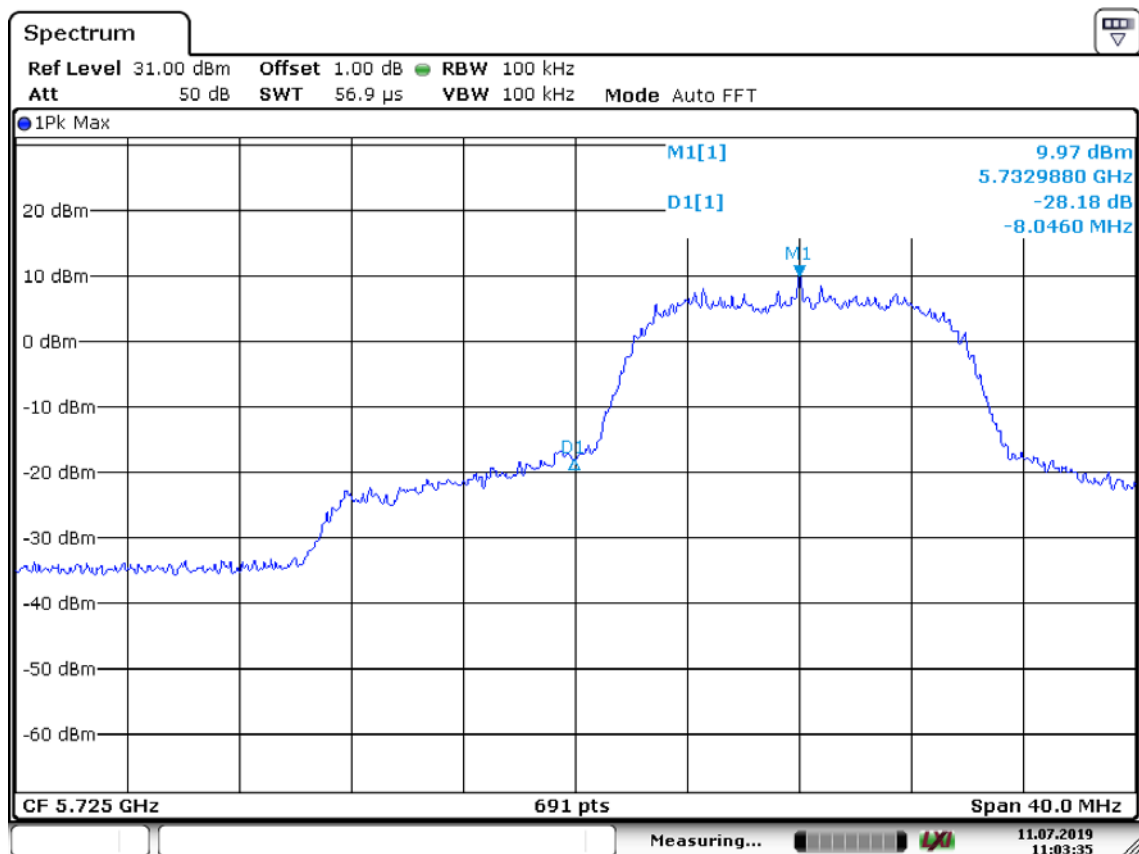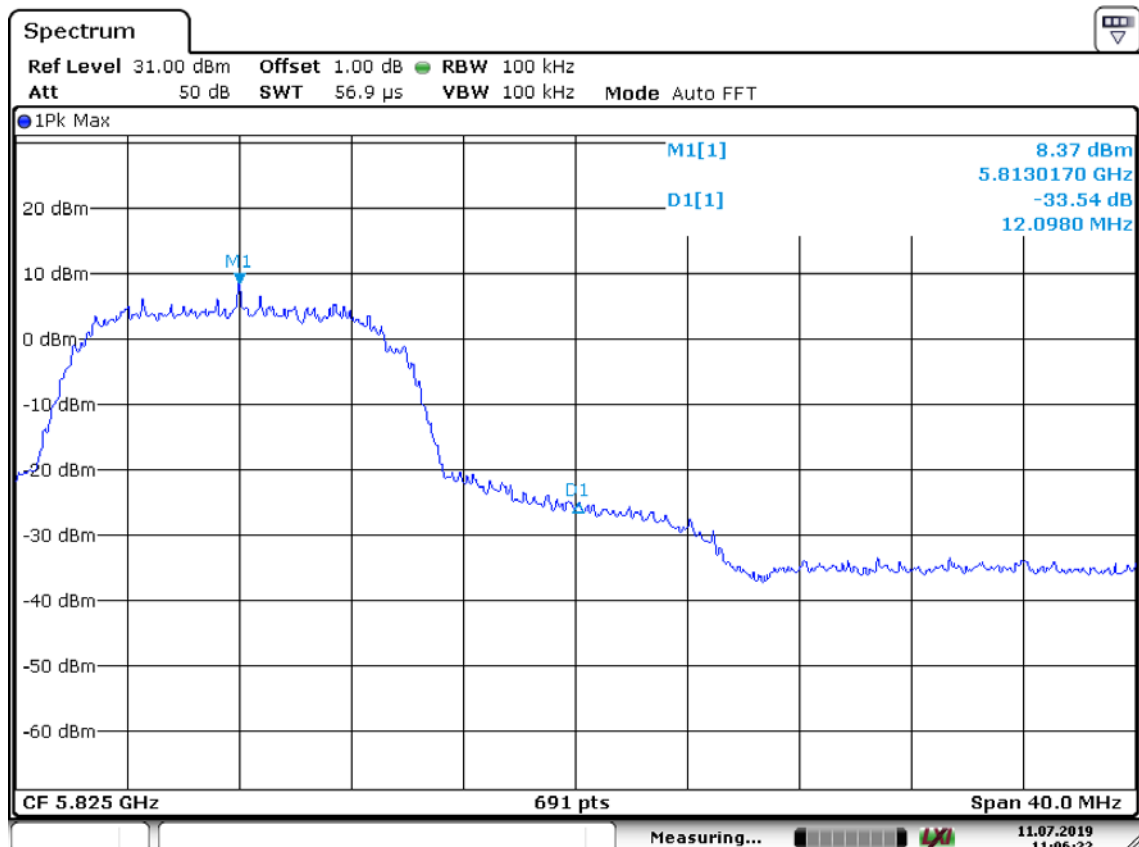Lower edgeUpper edge

**Radiated Band-edges in the restricted band 2310-2390 MHz measurement**

| Frequency<br><br>[MHz] | Reading<br>[dBuV / m] |       | Pol. | Correction<br><br>Factor |                           | Limits<br>[dBuV / m] |    | Result<br>[dBuV / m] |       | Margin<br>[dB] |       |
|------------------------|-----------------------|-------|------|--------------------------|---------------------------|----------------------|----|----------------------|-------|----------------|-------|
|                        | AV / Peak             |       |      | Antenna                  | Amp. Gain<br>+ Cable Loss | AV / Peak            |    | AV / Peak            |       | AV / Peak      |       |
|                        |                       |       |      |                          |                           |                      |    |                      |       |                |       |
| 2400                   | 16.96                 | 26.26 | H    | 28.08                    | 8.77                      | 54                   | 74 | 36.27                | 45.57 | 17.73          | 28.43 |
| 2399                   | 16.47                 | 26.30 | H    | 28.09                    | 8.78                      | 54                   | 74 | 35.78                | 45.61 | 18.22          | 28.39 |
| 2398                   | 16.94                 | 26.8  | H    | 28.08                    | 8.77                      | 54                   | 74 | 36.25                | 46.11 | 17.75          | 27.89 |

**Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement**

| Frequency<br><br>[MHz] | Reading<br>[dBuV / m] |       | Pol. | Correction<br><br>Factor |                           | Limits<br>[dBuV / m] |    | Result<br>[dBuV / m] |       | Margin<br>[dB] |       |
|------------------------|-----------------------|-------|------|--------------------------|---------------------------|----------------------|----|----------------------|-------|----------------|-------|
|                        | AV / Peak             |       |      | Antenna                  | Amp. Gain<br>+ Cable Loss | AV / Peak            |    | AV / Peak            |       | AV / Peak      |       |
|                        |                       |       |      |                          |                           |                      |    |                      |       |                |       |
| 2493.1                 | 16.25                 | 26.17 | H    | 27.88                    | 8.57                      | 54                   | 74 | 35.56                | 45.48 | 18.44          | 28.52 |
| 2492.2                 | 16.07                 | 26.45 | H    | 27.88                    | 8.57                      | 54                   | 74 | 35.38                | 45.76 | 18.62          | 28.24 |
| 2491.4                 | 16.65                 | 26.98 | H    | 27.88                    | 8.57                      | 54                   | 74 | 35.96                | 46.29 | 18.04          | 24.03 |

**Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented**

**Radiated Band-edges in the restricted band 5715-5725 MHz measurement**

| Frequency<br><br>[MHz] | Reading<br>[dBuV / m] |       | Pol. | Correction<br><br>Factor | Limits<br>[dBuV / m] |    | Result<br>[dBuV / m] |       | Margin<br>[dB] |       |
|------------------------|-----------------------|-------|------|--------------------------|----------------------|----|----------------------|-------|----------------|-------|
|                        | AV / Peak             |       |      |                          | AV / Peak            |    | AV / Peak            |       | AV / Peak      |       |
|                        |                       |       |      |                          |                      |    |                      |       |                |       |
| 5715.6                 | 20.16                 | 28.21 | H    | 15.57                    | 54                   | 74 | 35.73                | 43.78 | 18.27          | 30.22 |
| 5716.8                 | 18.55                 | 27.10 | H    | 15.57                    | 54                   | 74 | 34.12                | 42.67 | 19.88          | 31.33 |
| 5724.7                 | 18.70                 | 26.13 | H    | 15.63                    | 54                   | 74 | 34.33                | 41.76 | 19.67          | 32.24 |

**Radiated Band-edges in the restricted band 5850-5860 MHz measurement**

| Frequency<br><br>[MHz] | Reading<br>[dBuV / m] |       | Pol. | Correction<br><br>Factor | Limits<br>[dBuV / m] |    | Result<br>[dBuV / m] |       | Margin<br>[dB] |       |
|------------------------|-----------------------|-------|------|--------------------------|----------------------|----|----------------------|-------|----------------|-------|
|                        | AV / Peak             |       |      |                          | AV / Peak            |    | AV / Peak            |       | AV / Peak      |       |
|                        |                       |       |      |                          |                      |    |                      |       |                |       |
| 5850.9                 | 18.64                 | 21.15 | H    | 16.44                    | 54                   | 74 | 35.08                | 37.59 | 18.92          | 36.41 |
| 5855.4                 | 19.07                 | 23.25 | H    | 16.51                    | 54                   | 74 | 35.58                | 39.76 | 18.42          | 34.24 |
| 5857.3                 | 18.76                 | 24.88 | H    | 16.52                    | 54                   | 74 | 35.28                | 41.4  | 18.72          | 32.6  |

**Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented**

### 3.2.5 Conducted Spurious Emissions

**Procedure:**

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold



**Measurement Data: Complies**

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


|                          |          |
|--------------------------|----------|
| <b>Minimum Standard:</b> | > 20 dBc |
|--------------------------|----------|



**Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

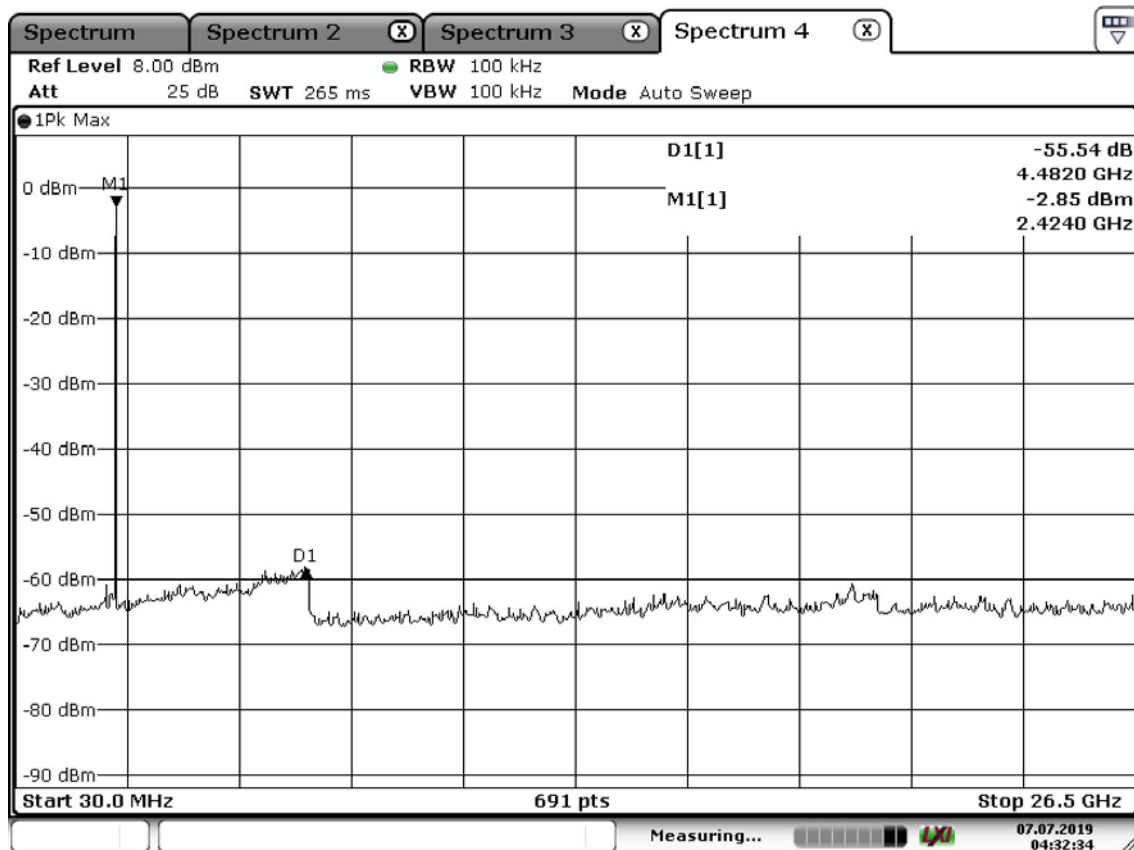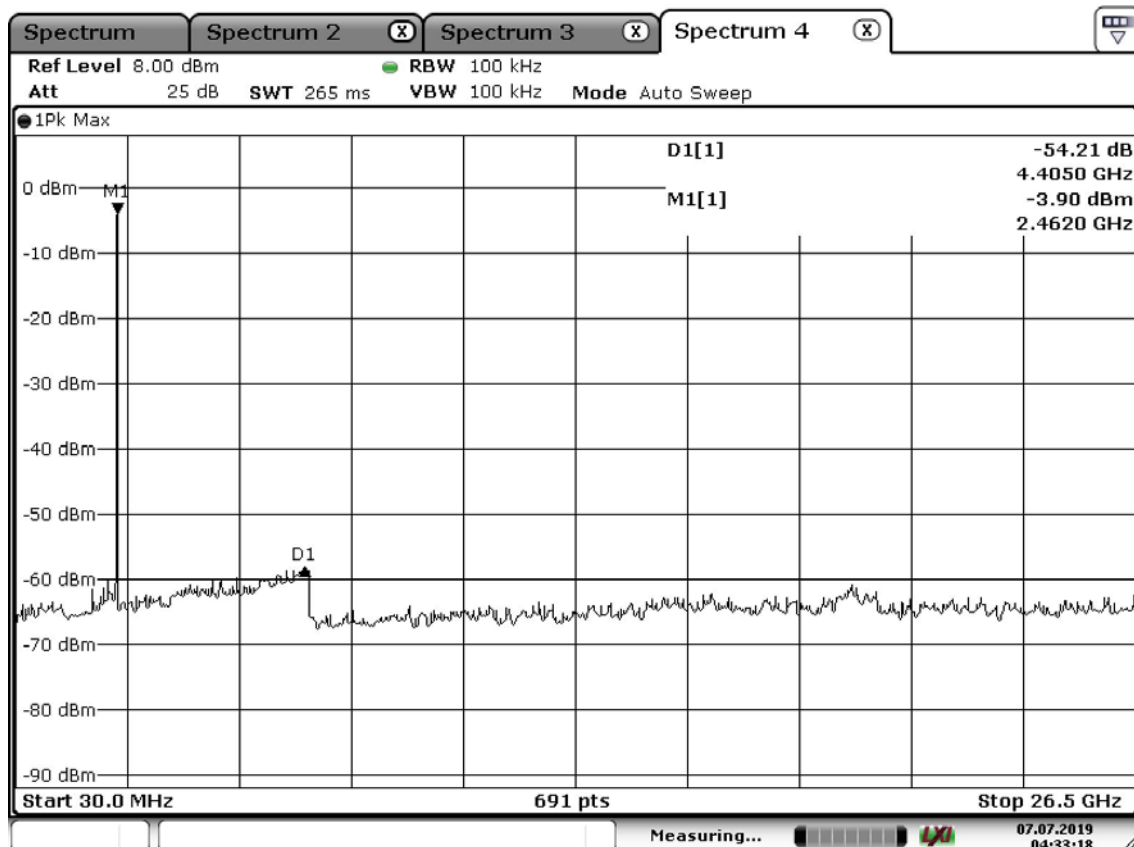
**2.4 GHz Unwanted Emission – Low Channel****Frequency Range = 30 MHz ~ 26.5 GHz****Unwanted Emission – Middle Channel****Frequency Range = 30 MHz ~ 26.5 GHz**

**Unwanted Emission – High Channel**  
**Frequency Range = 30 MHz ~ 26.5 GHz**

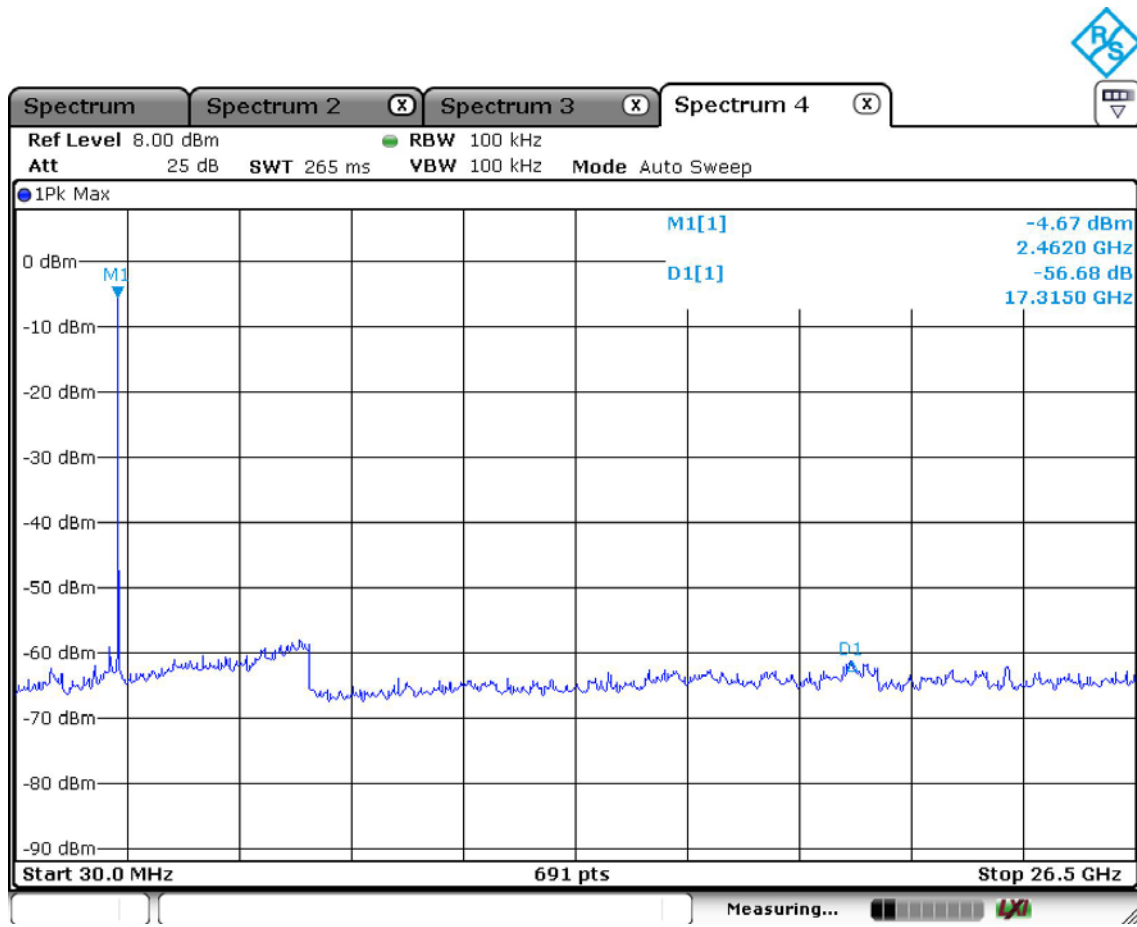

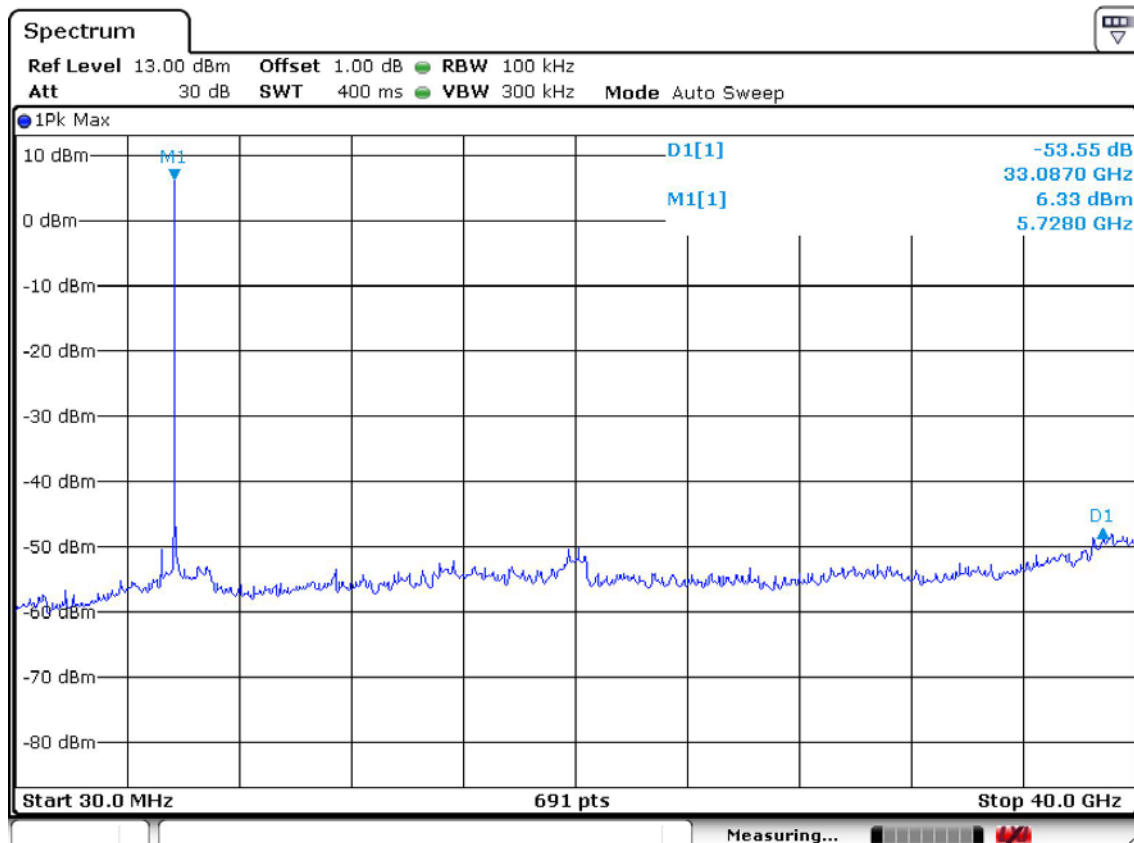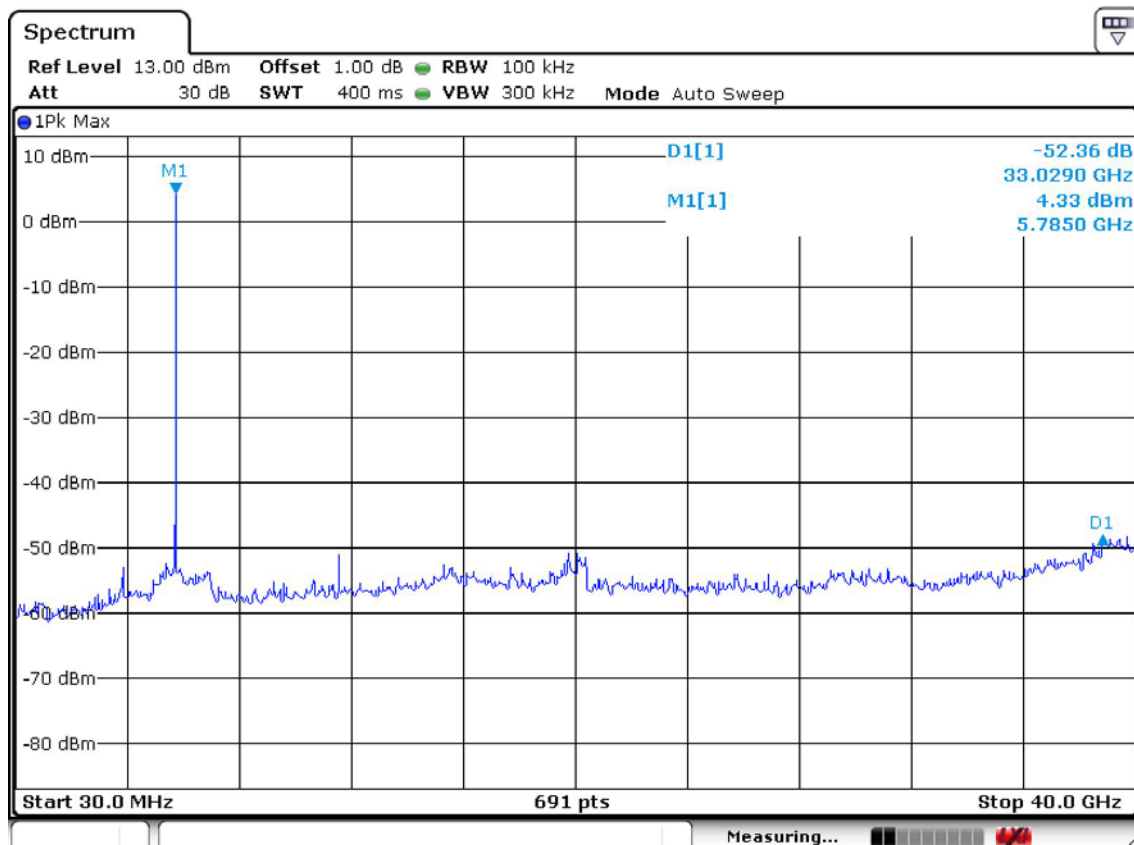**5 GHz Unwanted Emission – Low Channel****Frequency Range = 30 MHz ~ 40 GHz****Unwanted Emission – Middle Channel****Frequency Range = 30 MHz ~ 40 GHz**

**Unwanted Emission – High Channel**  
**Frequency Range = 30 MHz ~ 40 GHz**

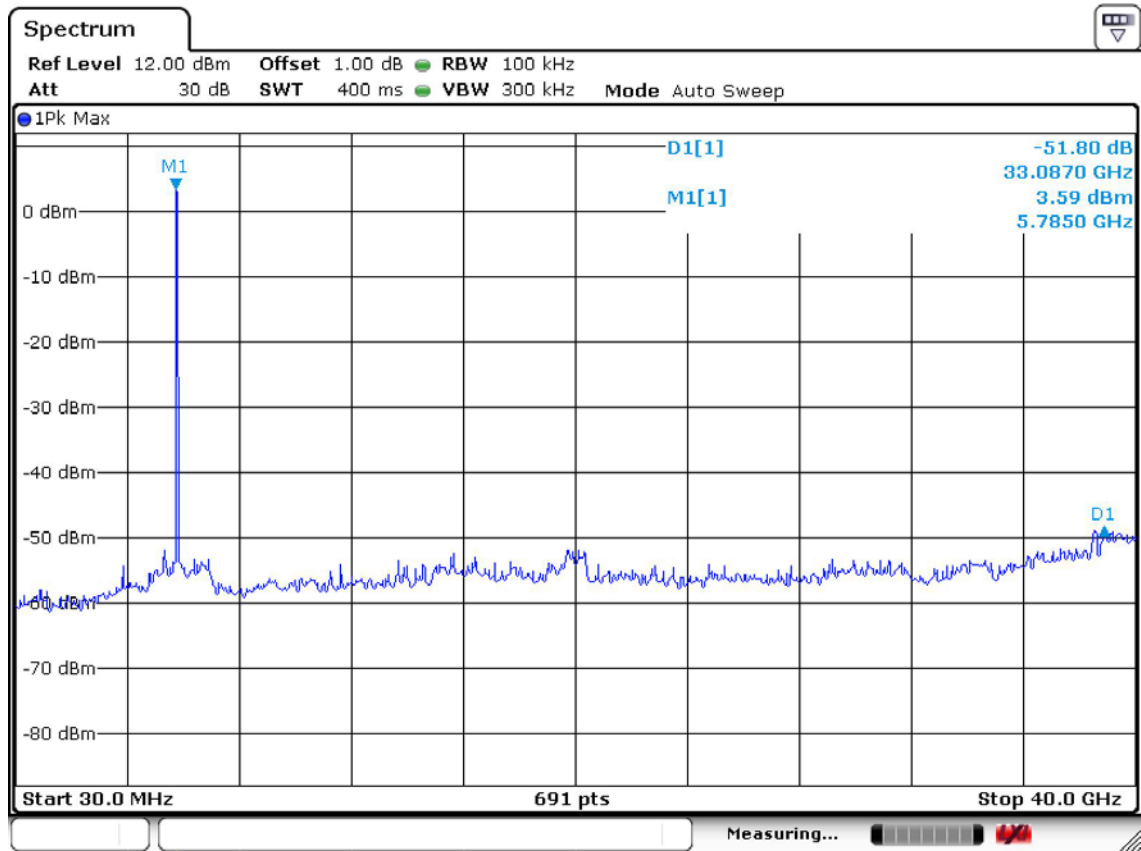

### 3.2.6 Radiated Spurious Emissions

#### Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

PK

RBW = 100 kHz ( 30 MHz ~ 1 GHz)

VBW ≥ RBW

= 1 MHz (1 GHz ~ 10<sup>th</sup> harmonic )

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

AV

RBW = 1 MHz

VBW = 3MHz


Trace = 100

Detector function = RMS


Duty cycle

The EUT configureal to transmit continuously(D ≥ 98%)/ Duty Factor = 0


**below 30 MHz**

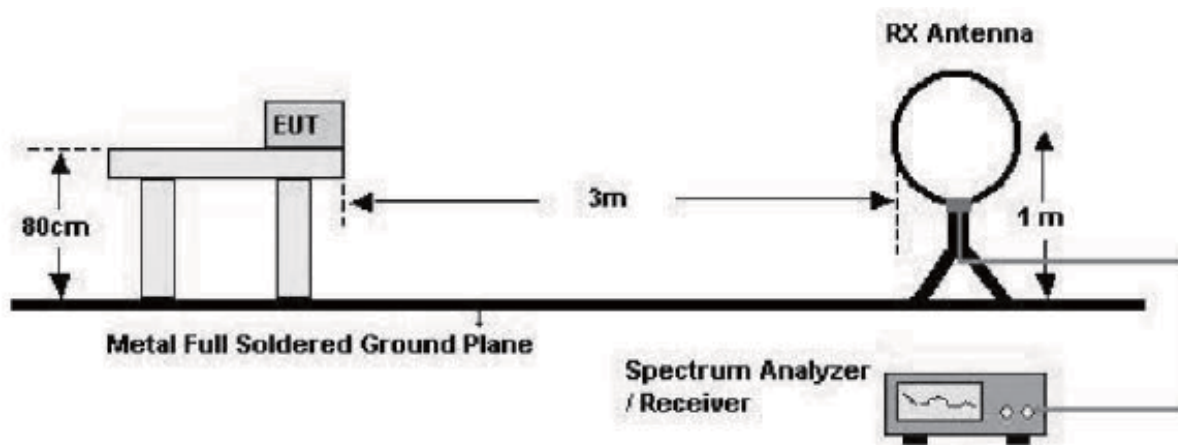

below 1 GHz (30 MHz to 1 GHz)

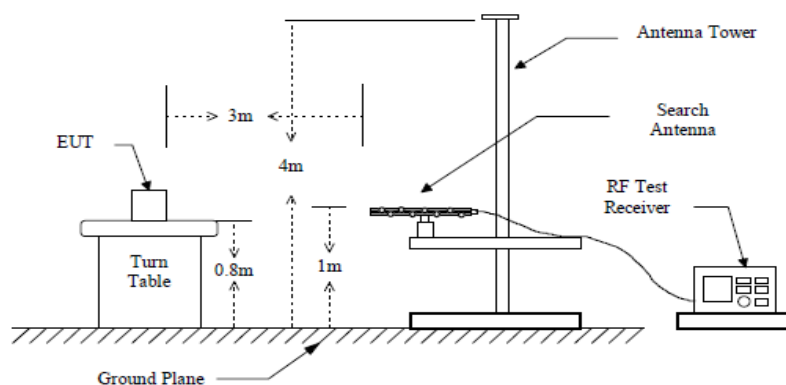

above 1 GHz

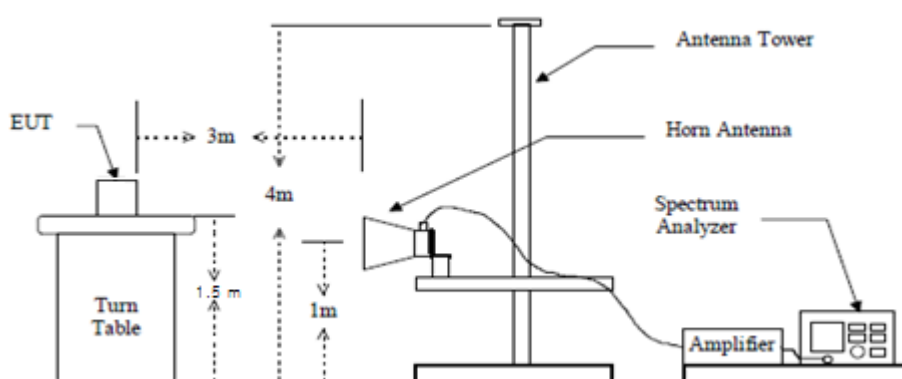

**Measurement Data: Complies**

- See next pages for actual measured data.
- 30 MHz or less Although these tests were performed other than open field test site, adequate comparison on measurements were confirmed against 10m open field test site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlated with the one of tests made in an open field site based on KDB 414788.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.

**Minimum Standard: FCC Part 15.209(a)**

| Frequency (MHz) | Limit (uV/m) @ 3 m    |
|-----------------|-----------------------|
| 0.009 ~ 0.490   | 2400/F(kHz) (@ 300 m) |
| 0.490 ~ 1.705   | 24000/F(kHz) (@ 30 m) |
| 1.705 ~ 30      | 30(@ 30 m)            |
| 30 ~ 88         | 100 **                |
| 88 ~ 216        | 150 **                |
| 216 ~ 960       | 200 **                |
| Above 960       | 500                   |

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

**Measurement Data : (9 kHz – 30 MHz)**

| Frequency<br><br>[MHz]                                                | Reading<br>[dBuV / m] |   | Pol. | Correction<br><br>Factor |                | Limits<br>[dBuV / m] |           | Result<br>[dBuV / m] |           | Margin<br>[dB] |   |
|-----------------------------------------------------------------------|-----------------------|---|------|--------------------------|----------------|----------------------|-----------|----------------------|-----------|----------------|---|
|                                                                       | AV / Peak             |   |      | Antenna                  | Amp.Gain+Cable | AV / Peak            | AV / Peak | AV / Peak            | AV / Peak |                |   |
|                                                                       |                       |   |      |                          |                |                      |           |                      |           |                |   |
| -                                                                     | -                     | - | -    | -                        | -              | -                    | -         | -                    | -         | -              | - |
| No emissions were detected at a level greater than 20 dB below limit. |                       |   |      |                          |                |                      |           |                      |           |                |   |
| -                                                                     | -                     | - | -    | -                        | -              | -                    | -         | -                    | -         | -              | - |
| -                                                                     | -                     | - | -    | -                        | -              | -                    | -         | -                    | -         | -              | - |

The eut configureal to transmit continuously( $D \geq 98\%$ )

**Radiated Emissions - (2.4 GHz)**

4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 2.4G LOW

Tested by: JUNG E H

Power :

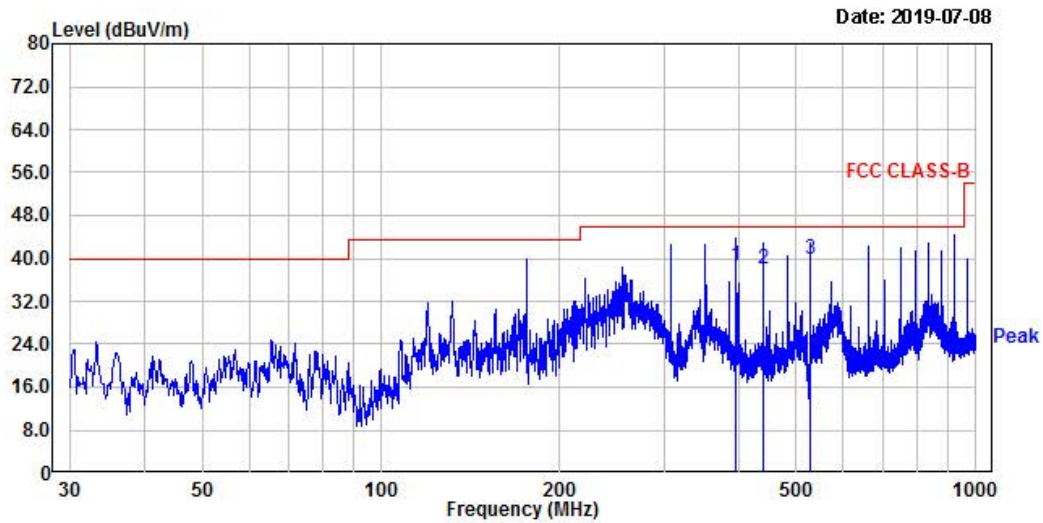

| Freq   | Reading | C.F   | Result       | Limit  | Margin | Height | Angle | Polarity   |
|--------|---------|-------|--------------|--------|--------|--------|-------|------------|
| MHz    | dBuV    | dB    | QP<br>dBUV/m | dBUV/m | dB     | cm     | deg   |            |
| 396.05 | 47.79   | -9.06 | 38.73        | 46.00  | 7.27   | 400    | 112   | horizontal |
| 439.95 | 45.92   | -7.96 | 37.96        | 46.00  | 8.04   | 400    | 253   | horizontal |
| 528.10 | 46.57   | -6.72 | 39.85        | 46.00  | 6.15   | 400    | 0     | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 2.4G LOW

Tested by: JUNG E H

Power :

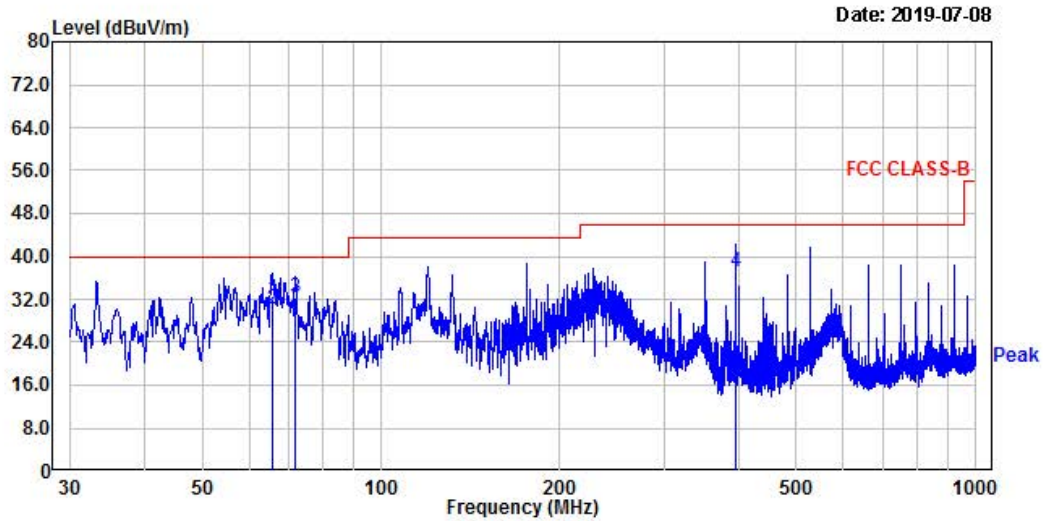

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |          |
| 65.53  | 46.56   | -14.64 | 31.92        | 40.00  | 8.08   | 100    | 222   | vertical |
| 65.77  | 44.91   | -14.68 | 30.23        | 40.00  | 9.77   | 100    | 302   | vertical |
| 71.59  | 47.82   | -15.57 | 32.25        | 40.00  | 7.75   | 100    | 260   | vertical |
| 395.93 | 46.20   | -9.05  | 37.15        | 46.00  | 8.85   | 100    | 245   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 2.4G MID

Tested by: JUNG E H

Power :

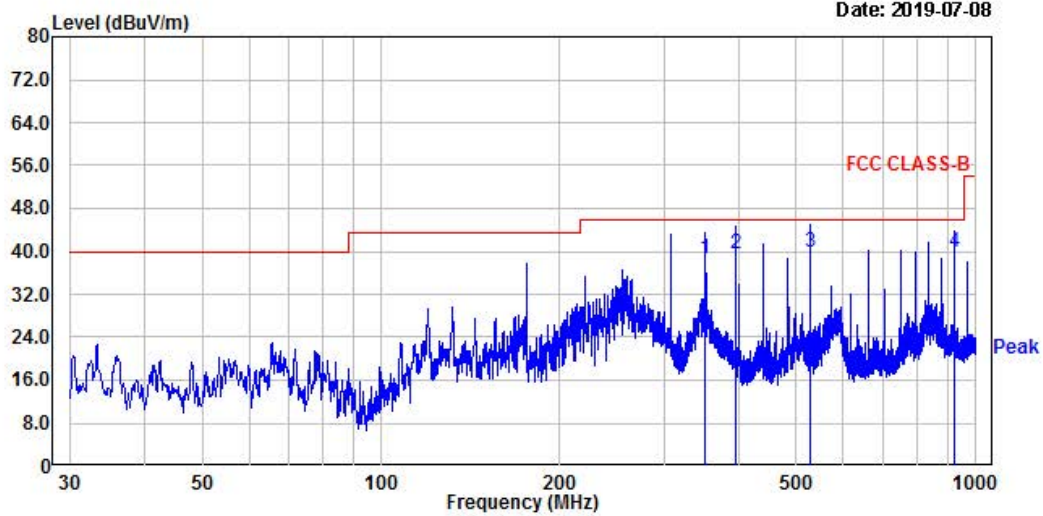

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity   |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |            |
| 352.04 | 48.54   | -10.04 | 38.50        | 46.00  | 7.50   | 400    | 262   | horizontal |
| 395.93 | 48.60   | -9.05  | 39.55        | 46.00  | 6.45   | 400    | 112   | horizontal |
| 527.97 | 46.65   | -6.72  | 39.93        | 46.00  | 6.07   | 400    | 0     | horizontal |
| 924.10 | 39.31   | 0.42   | 39.73        | 46.00  | 6.27   | 400    | 312   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 2.4G MID

Tested by: JUNG E H

Power :

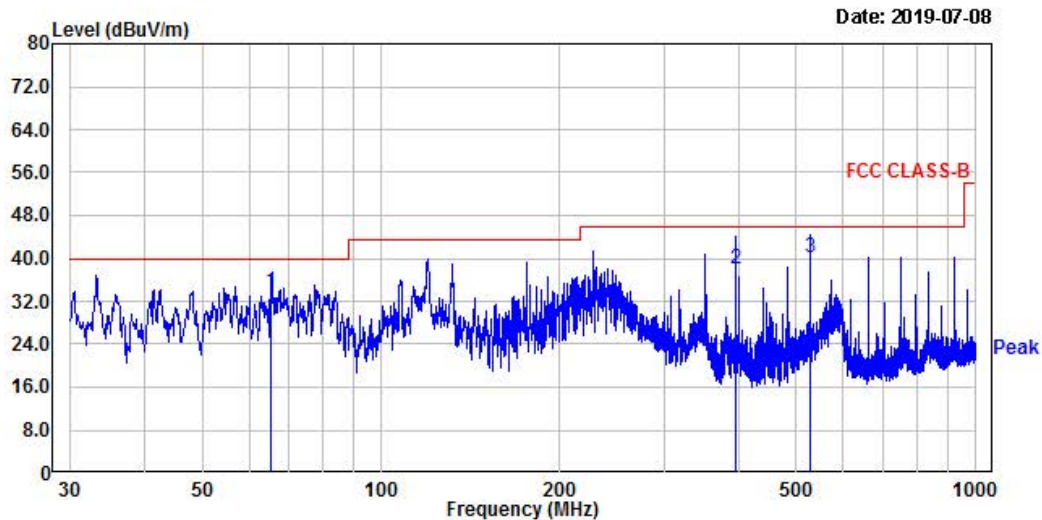

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |          |
| 65.41  | 48.52   | -14.62 | 33.90        | 40.00  | 6.10   | 100    | 180   | vertical |
| 395.93 | 47.22   | -9.05  | 38.17        | 46.00  | 7.83   | 100    | 226   | vertical |
| 527.97 | 46.96   | -6.72  | 40.24        | 46.00  | 5.76   | 100    | 180   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 2.4G HIGH

Tested by: JUNG E H

Power :

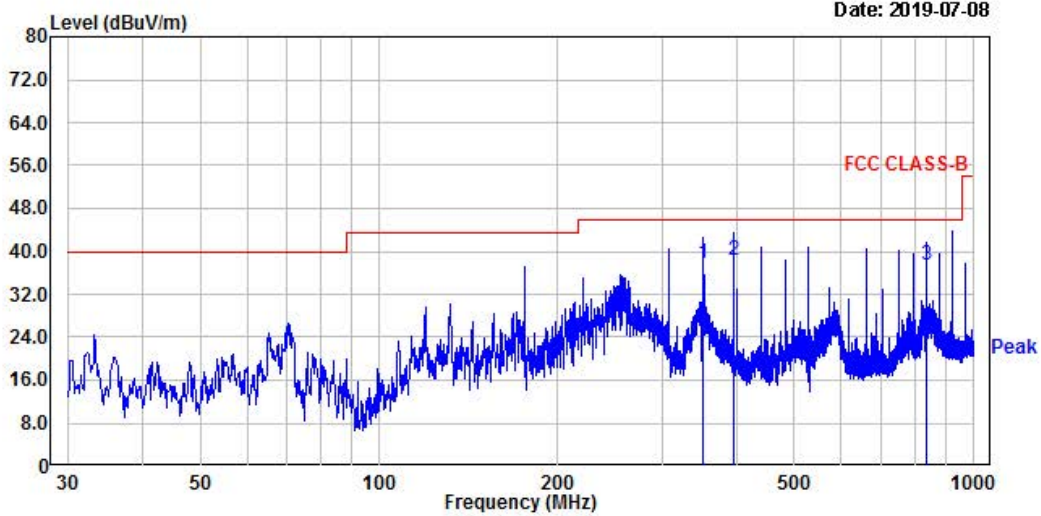

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity   |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |            |
| 352.04 | 47.69   | -10.04 | 37.65        | 46.00  | 8.35   | 400    | 263   | horizontal |
| 395.93 | 47.40   | -9.05  | 38.35        | 46.00  | 7.65   | 400    | 118   | horizontal |
| 836.07 | 38.53   | -0.97  | 37.56        | 46.00  | 8.44   | 400    | 288   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 2.4G HIGH

Tested by: JUNG E H

Power :

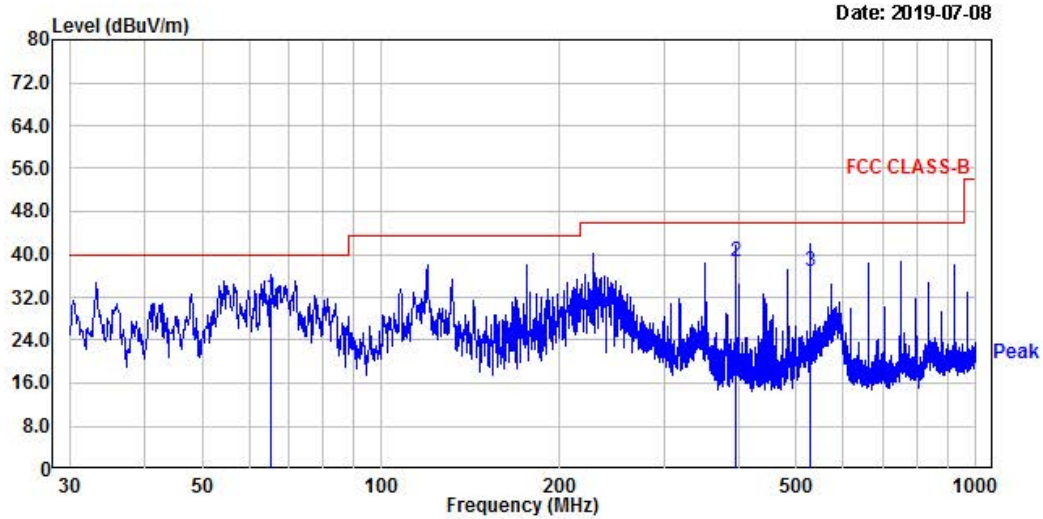

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz    | dBuV    | dB     | QP<br>dBUV/m | dBUV/m | dB     | cm     | deg   |          |
| 65.41  | 46.75   | -14.62 | 32.13        | 40.00  | 7.87   | 100    | 272   | vertical |
| 396.05 | 47.84   | -9.06  | 38.78        | 46.00  | 7.22   | 100    | 260   | vertical |
| 527.97 | 43.64   | -6.72  | 36.92        | 46.00  | 9.08   | 100    | 186   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



EMI Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No. : SKYBRIDGE RF-100

Test Mode: 2.4G Low


Tested by : JUNG E H

Temp/Humi :

Data: 36

Level (dBuV/m)

Date: 2019-07-10

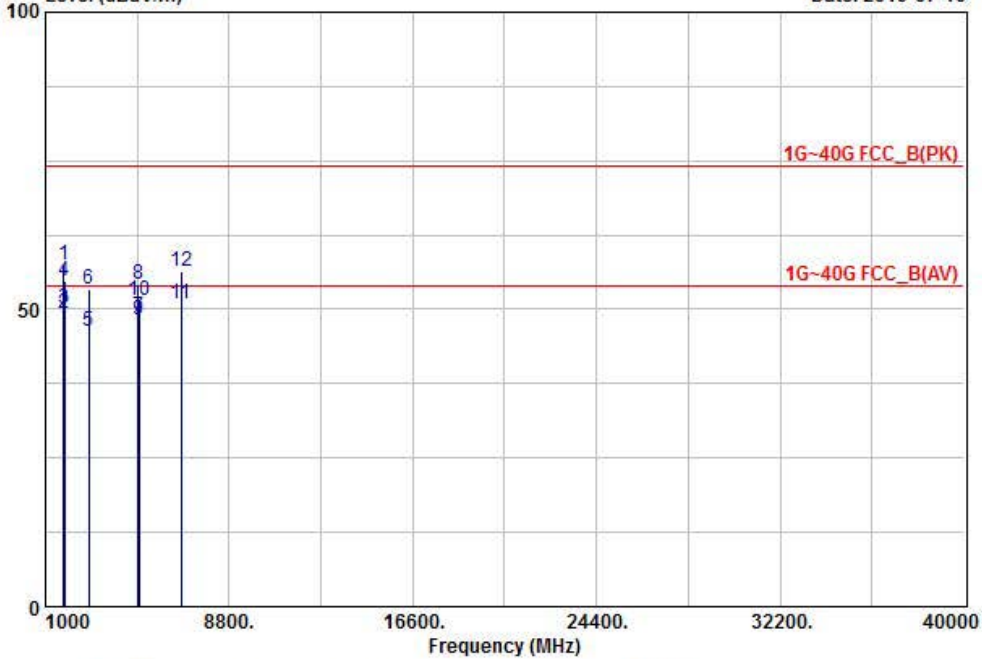

|    | Freq    | Reading | C.F   | Result       | Limit  | Margin | Polarity   |
|----|---------|---------|-------|--------------|--------|--------|------------|
|    | MHz     | dBuV    | dB    | PK<br>dBuV/m | dBuV/m | dB     |            |
| 1  | 1783.00 | 57.80   | -0.30 | 57.50        | 74.00  | 16.50  | HORIZONTAL |
| 2  | 1783.00 | 49.70   | -0.30 | 49.40        | 54.00  | 4.60   | HORIZONTAL |
| 3  | 1800.20 | 50.30   | -0.24 | 50.06        | 54.00  | 3.94   | VERTICAL   |
| 4  | 1800.20 | 55.10   | -0.24 | 54.86        | 74.00  | 19.14  | VERTICAL   |
| 5  | 2847.60 | 40.30   | 6.09  | 46.39        | 54.00  | 7.61   | HORIZONTAL |
| 6  | 2847.60 | 47.40   | 6.09  | 53.49        | 74.00  | 20.51  | HORIZONTAL |
| 7  | 4955.00 | 30.70   | 18.02 | 48.72        | 54.00  | 5.28   | VERTICAL   |
| 8  | 4955.00 | 36.30   | 18.02 | 54.32        | 74.00  | 19.68  | VERTICAL   |
| 9  | 4966.20 | 30.30   | 18.06 | 48.36        | 54.00  | 5.64   | HORIZONTAL |
| 10 | 4966.20 | 33.30   | 18.06 | 51.36        | 74.00  | 22.64  | HORIZONTAL |
| 11 | 6744.30 | 27.40   | 23.44 | 50.84        | 54.00  | 3.16   | VERTICAL   |
| 12 | 6744.30 | 33.10   | 23.44 | 56.54        | 74.00  | 17.46  | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No. : SKYBRIDGE RF-100

Test Mode: 2.4G Mid


Tested by : JUNG E H

Temp/Humi :

Data: 37

Level (dBuV/m)

Date: 2019-07-10

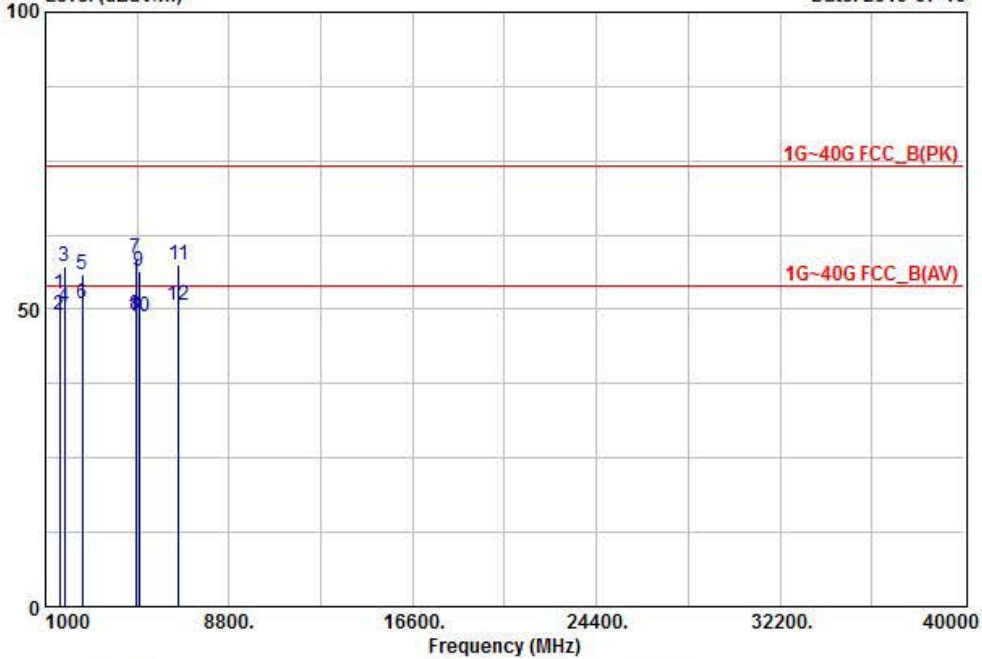

| Freq       | Reading | C.F   | Result       | Limit  | Margin | Polarity   |
|------------|---------|-------|--------------|--------|--------|------------|
| MHz        | dBuV    | dB    | PK<br>dBuV/m | dBuV/m | dB     |            |
| 1 1604.10  | 55.30   | -2.69 | 52.61        | 74.00  | 21.39  | VERTICAL   |
| 2 1604.10  | 51.60   | -2.69 | 48.91        | 54.00  | 5.09   | VERTICAL   |
| 3 1803.20  | 57.40   | -0.21 | 57.19        | 74.00  | 16.81  | HORIZONTAL |
| 4 1803.20  | 50.60   | -0.21 | 50.39        | 54.00  | 3.61   | HORIZONTAL |
| 5 2564.30  | 51.40   | 4.52  | 55.92        | 74.00  | 18.08  | HORIZONTAL |
| 6 2564.30  | 46.30   | 4.52  | 50.82        | 54.00  | 3.18   | HORIZONTAL |
| 7 4847.20  | 40.50   | 17.95 | 58.45        | 74.00  | 15.55  | VERTICAL   |
| 8 4847.20  | 31.20   | 17.95 | 49.15        | 54.00  | 4.85   | VERTICAL   |
| 9 4964.50  | 38.30   | 18.06 | 56.36        | 74.00  | 17.64  | HORIZONTAL |
| 10 4964.50 | 30.70   | 18.06 | 48.76        | 54.00  | 5.24   | HORIZONTAL |
| 11 6654.70 | 34.70   | 22.92 | 57.62        | 74.00  | 16.38  | VERTICAL   |
| 12 6654.70 | 27.70   | 22.92 | 50.62        | 54.00  | 3.38   | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No. : SKYBRIDGE RF-100

Test Mode: 2.4G High


Tested by : JUNG E H

Temp/Humi :

Data: 38

Level (dBuV/m)

Date: 2019-07-10

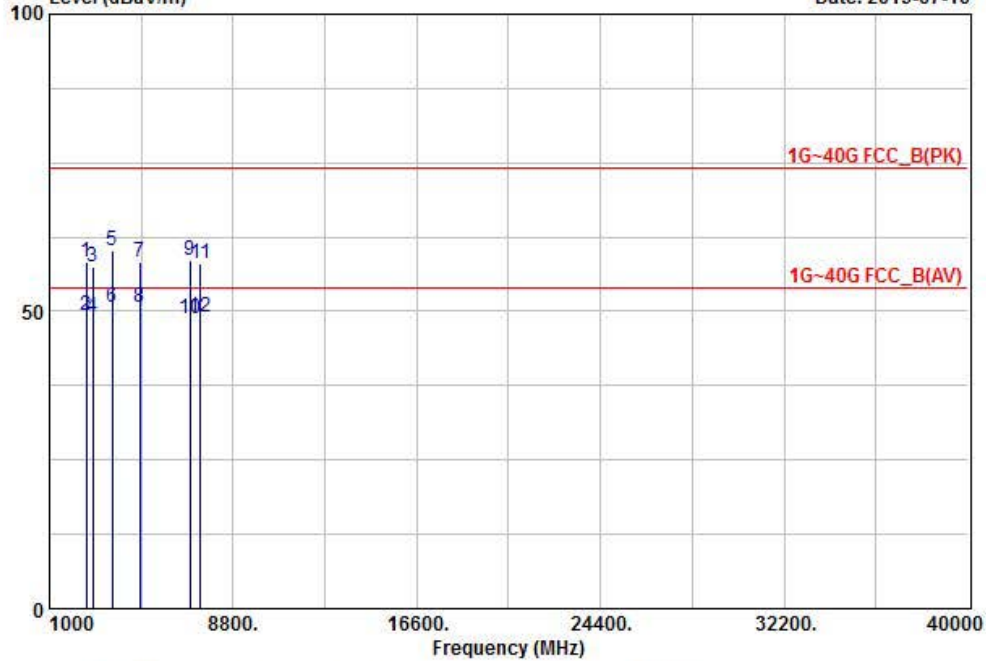

| Freq       | Reading | C.F   | Result       | Limit  | Margin | Polarity   |
|------------|---------|-------|--------------|--------|--------|------------|
| MHz        | dBuV    | dB    | PK<br>dBuV/m | dBuV/m | dB     |            |
| 1 2566.90  | 53.90   | 4.54  | 58.44        | 74.00  | 15.56  | HORIZONTAL |
| 2 2566.90  | 44.80   | 4.54  | 49.34        | 54.00  | 4.66   | HORIZONTAL |
| 3 2828.30  | 51.40   | 6.00  | 57.40        | 74.00  | 16.60  | VERTICAL   |
| 4 2828.30  | 43.00   | 6.00  | 49.00        | 54.00  | 5.00   | VERTICAL   |
| 5 3678.20  | 46.30   | 13.96 | 60.26        | 74.00  | 13.74  | HORIZONTAL |
| 6 3678.20  | 36.60   | 13.96 | 50.56        | 54.00  | 3.44   | HORIZONTAL |
| 7 4822.00  | 40.60   | 17.84 | 58.44        | 74.00  | 15.56  | VERTICAL   |
| 8 4822.00  | 32.80   | 17.84 | 50.64        | 54.00  | 3.36   | VERTICAL   |
| 9 6974.50  | 34.20   | 24.31 | 58.51        | 74.00  | 15.49  | HORIZONTAL |
| 10 6974.50 | 24.40   | 24.31 | 48.71        | 54.00  | 5.29   | HORIZONTAL |
| 11 7400.30 | 27.20   | 30.75 | 57.95        | 74.00  | 16.05  | VERTICAL   |
| 12 7400.30 | 18.20   | 30.75 | 48.95        | 54.00  | 5.05   | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal

**Radiated Emissions - (5 GHz)**

4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 5G LOW

Tested by: JUNG E H

Power :

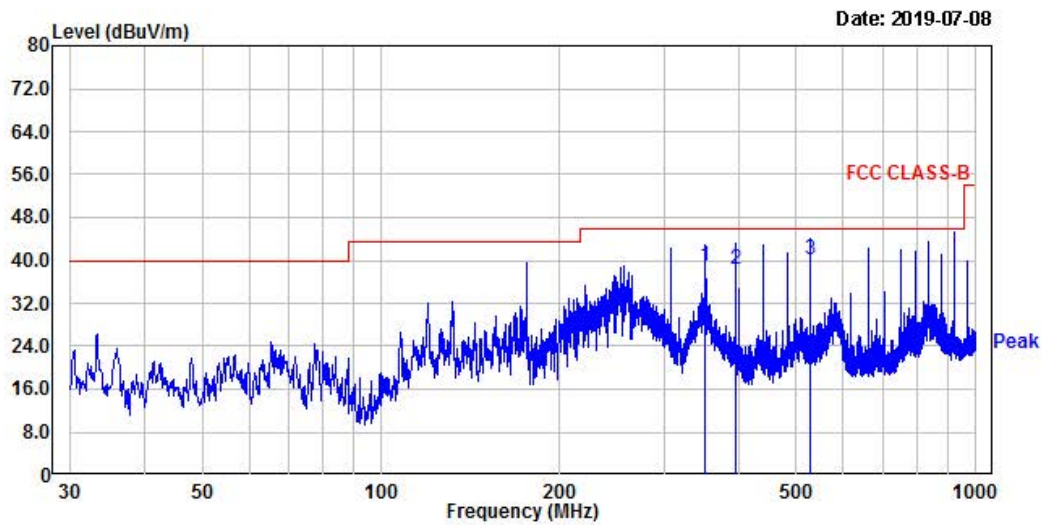

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity   |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |            |
| 351.92 | 48.84   | -10.04 | 38.80        | 46.00  | 7.20   | 400    | 254   | horizontal |
| 396.05 | 47.31   | -9.06  | 38.25        | 46.00  | 7.75   | 400    | 113   | horizontal |
| 527.97 | 46.84   | -6.72  | 40.12        | 46.00  | 5.88   | 231    | 0     | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 5G LOW

Tested by: JUNG E H

Power :

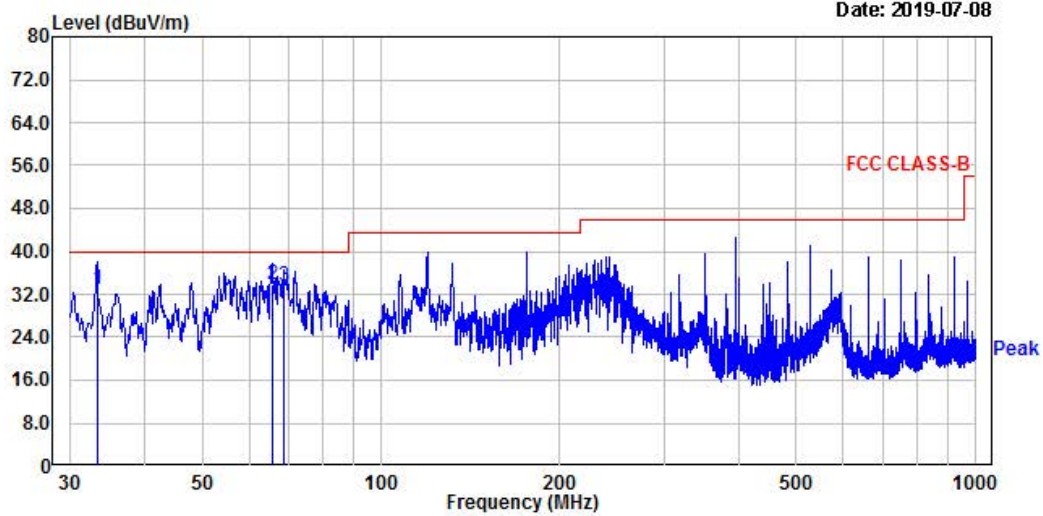

| Freq  | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity |
|-------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz   | dBuV    | dB     | QP<br>dBUV/m | dBUV/m | dB     | cm     | deg   |          |
| 33.27 | 47.99   | -14.94 | 33.05        | 40.00  | 6.95   | 100    | 269   | vertical |
| 65.53 | 48.41   | -14.64 | 33.77        | 40.00  | 6.23   | 100    | 260   | vertical |
| 68.68 | 48.71   | -15.16 | 33.55        | 40.00  | 6.45   | 100    | 236   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 5G MID

Tested by: JUNG E H

Power :

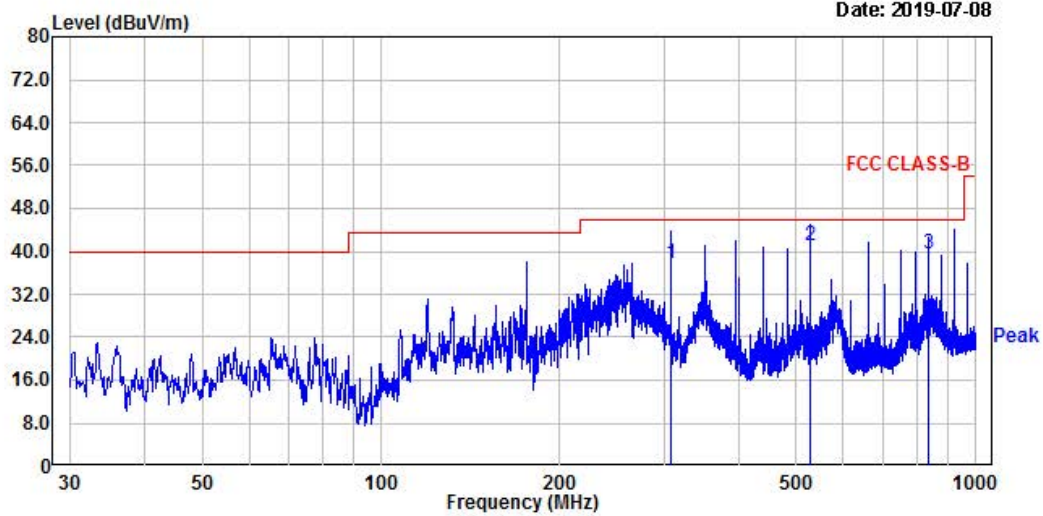

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity   |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |            |
| 308.03 | 48.48   | -10.85 | 37.63        | 46.00  | 8.37   | 400    | 276   | horizontal |
| 527.97 | 47.71   | -6.72  | 40.99        | 46.00  | 5.01   | 400    | 135   | horizontal |
| 836.07 | 40.42   | -0.97  | 39.45        | 46.00  | 6.55   | 400    | 195   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 5G MID

Tested by: JUNG E H

Power :

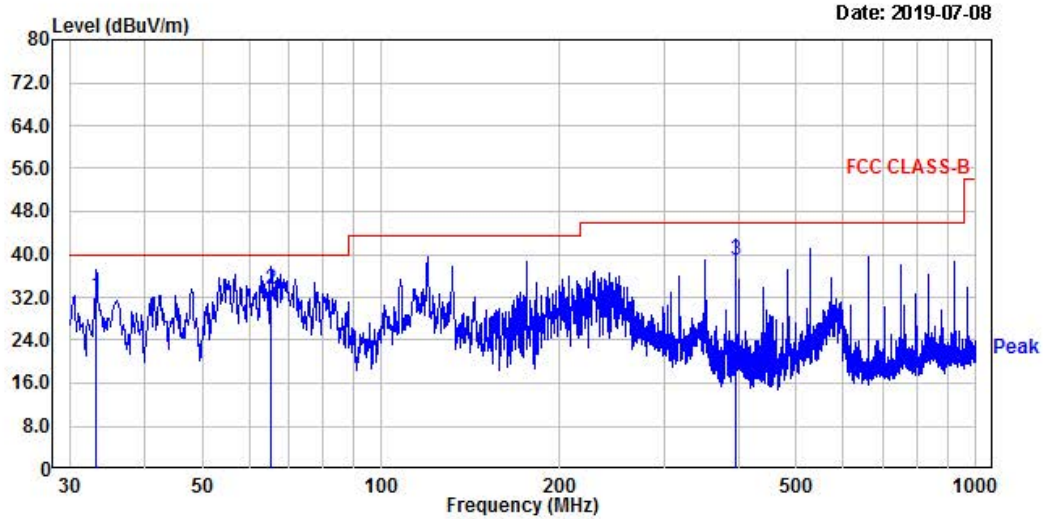

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |          |
| 33.15  | 47.14   | -14.96 | 32.18        | 40.00  | 7.82   | 100    | 220   | vertical |
| 65.41  | 48.23   | -14.62 | 33.61        | 40.00  | 6.39   | 100    | 210   | vertical |
| 395.93 | 47.91   | -9.05  | 38.86        | 46.00  | 7.14   | 100    | 234   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 5G HIGH

Tested by: JUNG E H

Power :

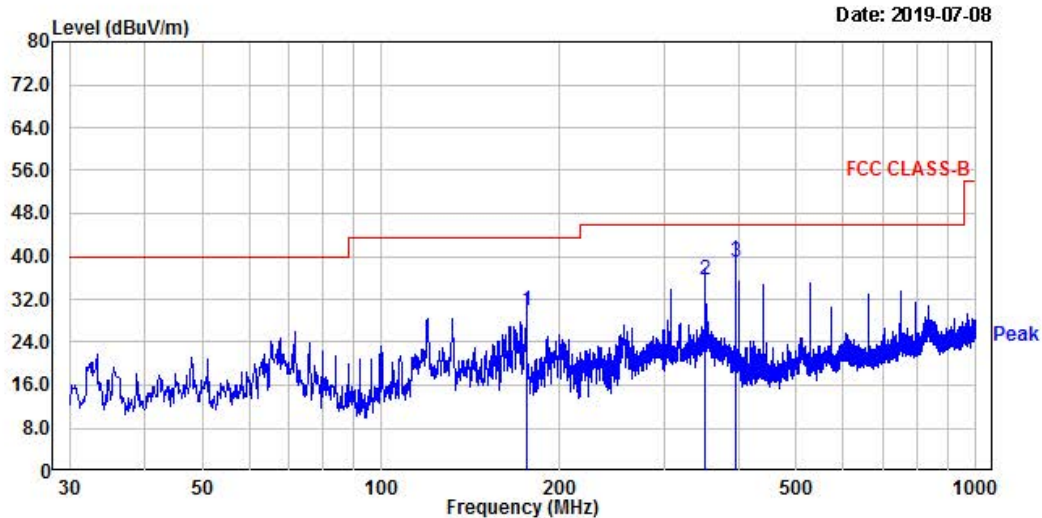

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity   |
|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |            |
| 175.99 | 43.15   | -13.21 | 29.94        | 43.50  | 13.56  | 400    | 107   | horizontal |
| 352.04 | 45.71   | -10.04 | 35.67        | 46.00  | 10.33  | 400    | 107   | horizontal |
| 395.93 | 47.88   | -9.05  | 38.83        | 46.00  | 7.17   | 400    | 107   | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,  
Yongin-si, Gyeonggi-do, Korea  
Tel : +82-31-3236008,9  
Fax : +82-31-3236010  
www.ltalab.com


EUT/Model No.: SKYBRIDGE RF-100

Temp/Humi: 23 °C / 46 % R.H

Test Mode : 5G HIGH

Tested by: JUNG E H

Power :

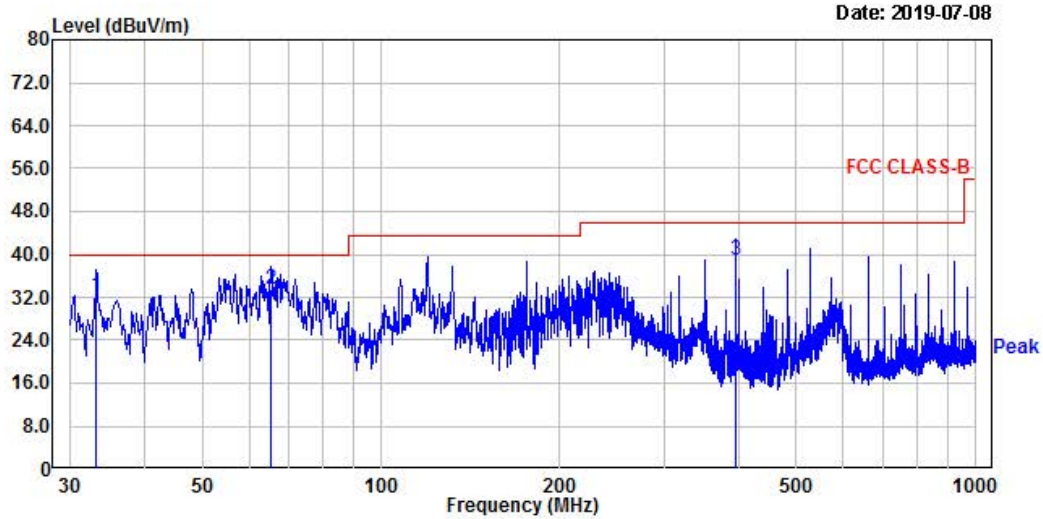

| Freq   | Reading | C.F    | Result       | Limit  | Margin | Height | Angle | Polarity |
|--------|---------|--------|--------------|--------|--------|--------|-------|----------|
| MHz    | dBuV    | dB     | QP<br>dBuV/m | dBuV/m | dB     | cm     | deg   |          |
| 33.15  | 47.14   | -14.96 | 32.18        | 40.00  | 7.82   | 100    | 220   | vertical |
| 65.41  | 48.23   | -14.62 | 33.61        | 40.00  | 6.39   | 100    | 210   | vertical |
| 395.93 | 47.91   | -9.05  | 38.86        | 46.00  | 7.14   | 100    | 234   | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



EMI Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No. : SKYBRIDGE RF-100

Test Mode: 5G Low


Tested by : JUNG E H

Temp/Humi :

Data: 39

Level (dBuV/m)

Date: 2019-07-10

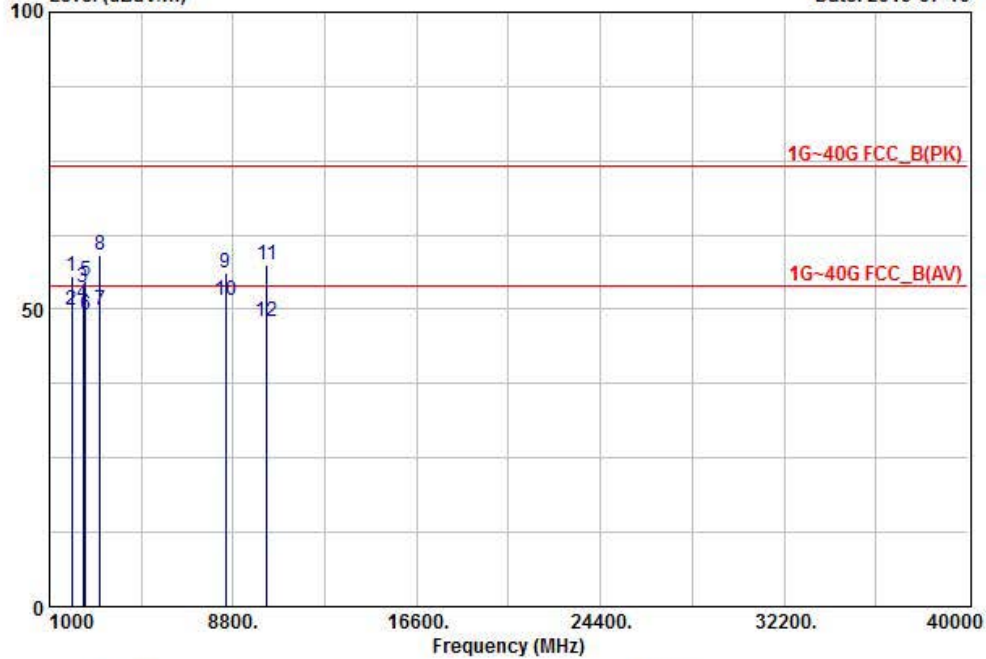

| Freq        | Reading | C.F   | Result       | Limit  | Margin | Polarity   |
|-------------|---------|-------|--------------|--------|--------|------------|
| MHz         | dBuV    | dB    | PK<br>dBuV/m | dBuV/m | dB     |            |
| 1 1933.70   | 54.30   | 1.16  | 55.46        | 74.00  | 18.54  | HORIZONTAL |
| 2 1933.70   | 48.80   | 1.16  | 49.96        | 54.00  | 4.04   | HORIZONTAL |
| 3 2411.50   | 50.20   | 3.34  | 53.54        | 74.00  | 20.46  | VERTICAL   |
| 4 2411.50   | 47.50   | 3.34  | 50.84        | 54.00  | 3.16   | VERTICAL   |
| 5 2533.60   | 50.40   | 4.25  | 54.65        | 74.00  | 19.35  | HORIZONTAL |
| 6 2533.60   | 44.80   | 4.25  | 49.05        | 54.00  | 4.95   | HORIZONTAL |
| 7 3143.50   | 40.50   | 9.38  | 49.88        | 54.00  | 4.12   | HORIZONTAL |
| 8 3143.50   | 49.80   | 9.38  | 59.18        | 74.00  | 14.82  | HORIZONTAL |
| 9 8466.50   | 27.60   | 28.56 | 56.16        | 74.00  | 17.84  | VERTICAL   |
| 10 8466.50  | 22.90   | 28.56 | 51.46        | 54.00  | 2.54   | VERTICAL   |
| 11 10220.60 | 27.40   | 30.13 | 57.53        | 74.00  | 16.47  | VERTICAL   |
| 12 10220.60 | 17.80   | 30.13 | 47.93        | 54.00  | 6.07   | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No. : SKYBRIDGE RF-100

Test Mode: 5G Mid


Tested by : JUNG E H

Temp/Humi :

Data: 40

Level (dBuV/m)

Date: 2019-07-10

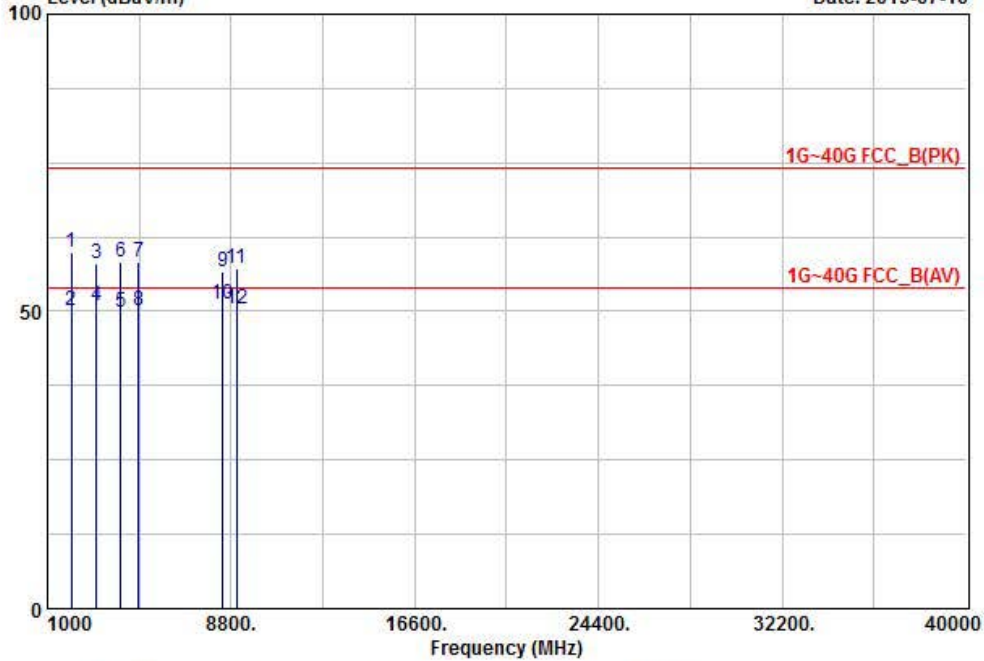

|    | Freq    | Reading | C.F   | Result       | Limit  | Margin | Polarity   |
|----|---------|---------|-------|--------------|--------|--------|------------|
|    | MHz     | dBuV    | dB    | PK<br>dBuV/m | dBuV/m | dB     |            |
| 1  | 2011.80 | 58.30   | 1.63  | 59.93        | 74.00  | 14.07  | HORIZONTAL |
| 2  | 2011.80 | 48.60   | 1.63  | 50.23        | 54.00  | 3.77   | HORIZONTAL |
| 3  | 3087.40 | 49.20   | 8.78  | 57.98        | 74.00  | 16.02  | HORIZONTAL |
| 4  | 3087.40 | 42.30   | 8.78  | 51.08        | 54.00  | 2.92   | HORIZONTAL |
| 5  | 4099.20 | 35.20   | 14.80 | 50.00        | 54.00  | 4.00   | VERTICAL   |
| 6  | 4099.20 | 43.60   | 14.80 | 58.40        | 74.00  | 15.60  | VERTICAL   |
| 7  | 4866.70 | 40.20   | 18.00 | 58.20        | 74.00  | 15.80  | VERTICAL   |
| 8  | 4866.70 | 32.10   | 18.00 | 50.10        | 54.00  | 3.90   | VERTICAL   |
| 9  | 8457.30 | 28.20   | 28.54 | 56.74        | 74.00  | 17.26  | HORIZONTAL |
| 10 | 8457.30 | 22.80   | 28.54 | 51.34        | 54.00  | 2.66   | HORIZONTAL |
| 11 | 9022.50 | 29.30   | 27.90 | 57.20        | 74.00  | 16.80  | VERTICAL   |
| 12 | 9022.50 | 22.50   | 27.90 | 50.40        | 54.00  | 3.60   | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal



EMI Chamber of LTA CO.,LTD.  
4, Songjuro236Beon-gil, Yangji-myeon,  
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP  
Tel :+82-31-3236008,9 www.ltalab.com  
Fax:+82-31-3236010

EUT/Model No. : SKYBRIDGE RF-100

Test Mode: 5G High


Tested by : JUNG E H

Temp/Humi :

Data: 41

Level (dBuV/m)

Date: 2019-07-10

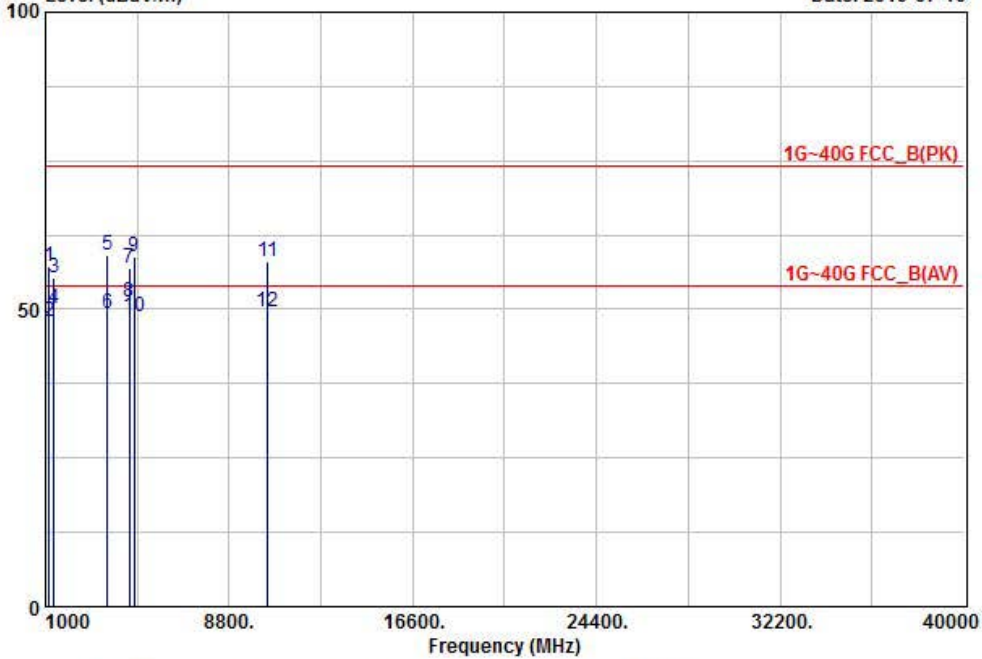

| Freq        | Reading | C.F   | Result       | Limit  | Margin | Polarity   |
|-------------|---------|-------|--------------|--------|--------|------------|
| MHz         | dBuV    | dB    | PK<br>dBuV/m | dBuV/m | dB     |            |
| 1 1155.20   | 63.40   | -6.27 | 57.13        | 74.00  | 16.87  | HORIZONTAL |
| 2 1155.20   | 54.30   | -6.27 | 48.03        | 54.00  | 5.97   | HORIZONTAL |
| 3 1355.90   | 60.20   | -4.84 | 55.36        | 74.00  | 18.64  | VERTICAL   |
| 4 1355.90   | 54.90   | -4.84 | 50.06        | 54.00  | 3.94   | VERTICAL   |
| 5 3647.90   | 45.60   | 13.59 | 59.19        | 74.00  | 14.81  | HORIZONTAL |
| 6 3647.90   | 35.80   | 13.59 | 49.39        | 54.00  | 4.61   | HORIZONTAL |
| 7 4562.80   | 40.00   | 16.97 | 56.97        | 74.00  | 17.03  | VERTICAL   |
| 8 4562.80   | 34.20   | 16.97 | 51.17        | 54.00  | 2.83   | VERTICAL   |
| 9 4756.30   | 41.20   | 17.56 | 58.76        | 74.00  | 15.24  | HORIZONTAL |
| 10 4756.30  | 31.20   | 17.56 | 48.76        | 54.00  | 5.24   | HORIZONTAL |
| 11 10440.80 | 27.20   | 30.96 | 58.16        | 74.00  | 15.84  | VERTICAL   |
| 12 10440.80 | 18.60   | 30.96 | 49.56        | 54.00  | 4.44   | VERTICAL   |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain  
Blue : Vertical      Black : Horizontal

### 3.2.7 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**Measurement Data:** NT

**Minimum Standard:** FCC Part 15.207(a) / EN 55022

| Frequency Range | quasi-peak | Average    |
|-----------------|------------|------------|
| 0.15 ~ 0.5      | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5         | 56         | 46         |
| 5 ~ 30          | 60         | 50         |

\* Note: This product operates only with battery

## APPENDIX

### TEST EQUIPMENT USED FOR TESTS

|    | Use | Description                           | Model No.        | Serial No. | Manufacturer           | Interval | Last Cal. Date |
|----|-----|---------------------------------------|------------------|------------|------------------------|----------|----------------|
| 1  |     | Signal Analyzer (9 kHz ~ 30 GHz)      | FSV30            | 100757     | R&S                    | 1 year   | 2018-09-06     |
| 2  |     | SYNTHESIZED CW GENERATOR              | 83711B           | US34490456 | HP                     | 1 year   | 2019-03-16     |
| 3  |     | Attenuator (3 dB)                     | 8491A            | 37822      | HP                     | 1 year   | 2018-09-07     |
| 4  |     | Attenuator (10 dB)                    | 8491A            | 63196      | HP                     | 1 year   | 2018-09-07     |
| 5  | ■   | EMI Test Receiver (~7 GHz)            | ESCI7            | 100722     | R&S                    | 1 year   | 2018-09-07     |
| 6  |     | RF Amplifier (~1.3 GHz)               | 8447D OPT 010    | 2944A07684 | HP                     | 1 year   | 2018-09-07     |
| 7  | ■   | RF Amplifier (1~26.5 GHz)             | 8449B            | 3008A02126 | HP                     | 1 year   | 2019-03-21     |
| 8  | ■   | Horn Antenna (1~18 GHz)               | 3115             | 00114105   | ETS                    | 2 year   | 2018-09-26     |
| 9  |     | DRG Horn (Small)                      | 3116B            | 81109      | ETS-Lindgren           | 2 year   | 2018-05-03     |
| 10 |     | DRG Horn (Small)                      | 3116B            | 133350     | ETS-Lindgren           | 2 year   | 2018-05-03     |
| 11 | ■   | TRILOG Antenna                        | VULB 9160        | 9160-3237  | SCHWARZBECK            | 2 year   | 2019-04-17     |
| 12 |     | Temp.Humidity Data Logger             | SK-L200TH II A   | 00801      | SATO                   | 1 year   | 2018-11-23     |
| 13 | ■   | DC Power Supply                       | 6674A            | 3637A01657 | Agilent                | -        | -              |
| 14 |     | AC Power Supply                       | HK-80            | LR001      | DAERIMTECH             | -        | -              |
| 15 | ■   | Power Meter                           | EPM-441A         | GB32481702 | HP                     | 1 year   | 2019-03-20     |
| 16 | ■   | Power Sensor                          | 8481A            | 3318A94972 | HP                     | 1 year   | 2018-12-26     |
| 17 |     | Audio Analyzer                        | 8903B            | 3729A18901 | HP                     | 1 year   | 2018-09-07     |
| 18 |     | Modulation Analyzer                   | 8901B            | 3749A05878 | HP                     | 1 year   | 2018-09-07     |
| 19 | ■   | TEMP & HUMIDITY Chamber               | YJ-500           | LTAS06041  | JinYoung Tech          | 1 year   | 2018-09-07     |
| 20 |     | Stop Watch                            | HS-3             | 812Q08R    | CASIO                  | 2 year   | 2019-03-21     |
| 21 |     | LISN                                  | KNW-407          | 8-1430-1   | Kyoritsu               | 1 year   | 2018-09-07     |
| 22 |     | Two-Lime V-Network                    | ESH3-Z5          | 893045/017 | R&S                    | 1 year   | 2019-03-20     |
| 23 |     | Highpass Filter                       | WHKX1.5/15G-10SS | 74         | Wainwright Instruments | 1 year   | 2019-03-19     |
| 24 |     | Highpass Filter                       | WHKX3.0/18G-10SS | 118        | Wainwright Instruments | 1 year   | 2019-03-19     |
| 25 |     | OSP120 BASE UNIT                      | OSP120           | 101230     | R&S                    | 1 year   | 2019-03-21     |
| 26 | ■   | Signal Generator(100 kHz ~ 40 GHz)    | SMB100A          | 177621     | R&S                    | 1 year   | 2019-03-20     |
| 27 |     | Vector Signal Generator(9kHz ~ 6 GHz) | SMBV100A         | 255081     | R&S                    | 1 year   | 2019-03-20     |
| 28 | ■   | Signal Analyzer (10 Hz ~ 40 GHz)      | FSV40            | 101367     | R&S                    | 1 year   | 2019-03-20     |