

FCC SAR REPORT

Applicant: Shenzhen Light Pioneer Technology Co., Ltd

Address of Applicant: 10th Floor, Block B, Guanghao International Centre, Longhua District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Handheld RFID Reader

Model No.: LP-006-GI

Trade mark: LightPioneer

FCC ID: 2AOJULP006GI

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 11 Sep., 2019 ~ 25 Sep., 2019

Test Result: Maximum Reported 1-g SAR (W/kg)
Front of face: 0.568
Maximum Reported 10-g SAR (W/kg)
Extremity: 1.230

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	30 Sep., 2019	Original
01	06 Nov., 2019	1. Updated the basic information on page 5.
02	07 Nov., 2019	2. Updated the Equipment Class on page 5.

Tested by: Huheng Cai **Date:** 06 Nov., 2019
Report Clerk

Reviewed by: Janet Wei **Date:** 06 Nov., 2019
Project Engineer

3 Contents

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY	5
5	GENERAL INFORMATION	6
5.1	CLIENT INFORMATION.....	6
5.2	GENERAL DESCRIPTION OF EUT	6
5.3	MAXIMUM RF OUTPUT POWER	7
5.4	ENVIRONMENT OF TEST SITE	8
5.5	TEST LOCATION	8
6	INTRODUCTION	9
6.1	INTRODUCTION	9
6.2	SAR DEFINITION	9
7	RF EXPOSURE LIMITS	10
7.1	UNCONTROLLED ENVIRONMENT	10
7.2	CONTROLLED ENVIRONMENT	10
7.3	RF EXPOSURE LIMITS	10
8	SAR MEASUREMENT SYSTEM	11
8.1	E-FIELD PROBE.....	12
8.2	DATA ACQUISITION ELECTRONICS (DAE).....	12
8.3	ROBOT	13
8.4	MEASUREMENT SERVER	13
8.5	LIGHT BEAM UNIT.....	13
8.6	PHANTOM.....	14
8.7	DEVICE HOLDER.....	15
8.8	DATA STORAGE AND EVALUATION	16
8.9	TEST EQUIPMENT LIST	18
9	TISSUE SIMULATING LIQUIDS	19
10	SAR SYSTEM VERIFICATION	22
11	EUT TESTING POSITION	24
11.1	FRONT OF FACE ACCESSORY CONFIGURATIONS	24
11.2	EXTREMITY ACCESSORY CONFIGURATIONS	24
12	MEASUREMENT PROCEDURES	25
12.1	SPATIAL PEAK SAR EVALUATION	25
12.2	POWER REFERENCE MEASUREMENT.....	26
12.3	AREA & ZOOM SCAN PROCEDURES.....	26
12.4	VOLUME SCAN PROCEDURES	27
12.5	SAR AVERAGED METHODS	27
12.6	POWER DRIFT MONITORING	27
13	CONDUCTED RF OUTPUT POWER	28
13.1	GSM CONDUCTED POWER	28
13.2	WCDMA CONDUCTED POWER	30
13.3	LTE CONDUCTED POWER	33
13.4	WLAN 2.4 GHZ BAND CONDUCTED POWER	47
13.5	WLAN 5.8GHZ BAND CONDUCTED POWER	48
13.6	BLUETOOTH CONDUCTED POWER	49
13.7	RFID CONDUCTED POWER	49
14	EXPOSURE POSITIONS CONSIDERATION	50
14.1	EUT ANTENNA LOCATIONS.....	50
14.2	TEST POSITIONS CONSIDERATION	50
15	SAR TEST RESULTS SUMMARY	51
15.1	FRONT OF FACE SAR DATA	51

15.2 EXTREMITY SAR DATA.....53
15.3 MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS.....56
15.4 SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....57
15.5 MEASUREMENT UNCERTAINTY.....62
15.6 MEASUREMENT CONCLUSION64
16 REFERENCE..... 65
APPENDIX A: PLOTS OF SAR SYSTEM CHECK 66
APPENDIX B: PLOTS OF SAR TEST DATA 79
APPENDIX C: SYSTEM CALIBRATION CERTIFICATE..... 111

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Front to face 1-g SAR (10 mm Gap)	GSM 850	0.035	PCB	0.568
	GSM 1900	0.411		
	WCDMA Band V	0.042		
	WCDMA Band II	0.568		
	LTE Band 2	0.548		
	LTE Band 4	0.420		
	LTE Band 7	0.190		
	LTE Band 17	0.002		
	LTE Band 41	0.085		
	WLAN 2.4 GHz	0.035	DTS	
Extremity 10-g SAR (0 mm Gap)	GSM 850	0.287	PCB	1.014
	GSM 1900	1.014		
	WCDMA Band V	0.166		
	WCDMA Band II	0.843		
	LTE Band 2	0.847		
	LTE Band 4	0.731		
	LTE Band 7	0.471		
	LTE Band 17	0.011		
	LTE Band 41	0.223		
	WLAN 2.4 GHz	0.198	DTS	

Exposure Position	Frequency Band	Reported 10-g SAR (W/kg)	Equipment Class	Highest Reported 10-g SAR (W/kg)
Extremity 10-g SAR (0 mm Gap)	RFID	1.230	DSS	1.230

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission SAR (W/kg)
Front to face	WCDMA Band II	0.568	PCB	0.729
	WLAN 5.8 GHz	0.161	DTS	
Wrist-worn	GPRS1900/4 slots	1.014	PCB	1.336
	WLAN 5.8 GHz	0.322	DTS	

Note:

- The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
- This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Light Pioneer Technology Co., Ltd
Address of Applicant:	10th Floor, Block B, Guanghao International Centre, Longhua District, Shenzhen, China
Manufacturer:	Shenzhen Light Pioneer Technology Co., Ltd
Address of Manufacturer:	10th Floor, Block B, Guanghao International Centre, Longhua District, Shenzhen, China

5.2 General Description of EUT

Product Name:	Handheld RFID Reader
Model No.:	LP-006-GI
Category of device	Portable device
Operation Frequency:	GSM850: 824.2 ~ 848.8 MHz PCS 1900: 1850.2 ~ 1909.8 MHz WCDMA Band V: 826.4 ~ 846.6 MHz WCDMA Band II: 1852.4 ~ 1907.6 MHz FDD LTE Band 2 :1850MHz~1910MHz FDD LTE Band 4 :1710MHz~1755MHz FDD LTE Band 7: 2500MHz~2570MHz FDD LTE Band 17: 704MHz~716MHz TDD LTE Band 41: 2496MHz~2690MHz Bluetooth: 2402 MHz ~ 2480 MHz Wi-Fi: 802.11b/g/n-HT20: 2412MHz ~ 2462 MHz 802.11n-HT40 :2422MHz~2452MHz 802.11a/n: 5725MHz~5850MHz RFID: 902 MHz~928MHz
Modulation technology:	GSM/GPRS:GMSK, WCDMA/HSDPA/HSUPA: BPSK/QPSK LTE:QPSK/16QAM Bluetooth: GFSK/π/4DQPSK/8DPSK Wi-Fi: 802.11b: DSSS, 802.11a/g/n: OFDM RFID: 2-FSK
Antenna Type:	Internal Antenna
Antenna Gain:	GSM 850: 0.6dBi, PCS 1900: 0.6 dBi WCDMA Band V: 0.6 dBi, WCDMA Band II: 0.6 dBi LTE Band 2: 0.6dBi, LTE Band 4: 0.6dBi LTE Band 7: 0.6dBi, LTE Band 17: 0.6dBi LTE Band 41: 0.6dBi WIFI/BT: 0.6dBi, RFID: 2.5dBi
GPRS Class:	GPRS Class: 12
Dimensions (L*W*H):	Host: 172 mm (L)× 85 mm (W)× 32 mm (H) Hand shank: 111 mm (L)× 48 mm (W)× 28 mm (H) RFID module: 84 mm (L)× 74 mm (W)× 24 mm (H)

Accessories information:	Adapter: Model: GME10C-050200FCu Input: AC100-240V, 50/60Hz, 0.28A Output: DC 5.0V, 2A	Battery: Rechargeable Li-ion Battery 3.7V 8100mAh
--------------------------	---	---

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	GSM 1900
GSM (Voice)	32.63	30.26
GPRS (1 TX Slot)	32.69	30.28
GPRS (2 TX Slots)	32.14	29.56
GPRS (3 TX Slots)	30.63	27.75
GPRS (4 TX Slots)	29.52	26.60

Mode	Average Power (dBm)	
	WCDMA Band V	WCDMA Band II
AMR 12.2 kbps	23.58	23.85
RMC 12.2 kbps	23.70	23.92
HSDPA Sub-test 1	22.70	22.93
HSDPA Sub-test 2	22.36	22.59
HSDPA Sub-test 3	20.92	20.95
HSDPA Sub-test 4	20.82	20.92
HSUPA Sub-test 1	22.65	22.89
HSUPA Sub-test 2	22.64	22.93
HSUPA Sub-test 3	20.93	21.08
HSUPA Sub-test 4	22.69	22.90
HSUPA Sub-test 5	21.76	22.02

Mode	Average Power (dBm)				
	LTE Band 2	LTE Band 4	LTE Band 7	LTE Band 17	LTE Band 41
BW/1.4 MHz	23.46	23.49	/	/	/
BW/3.0 MHz	23.34	23.40	/	/	/
BW/5.0 MHz	23.50	23.51	23.12	22.65	24.24
BW/10 MHz	23.50	23.55	23.07	22.62	24.22
BW/15 MHz	23.45	23.62	23.12	/	24.22
BW/20 MHz	23.54	23.58	23.03	/	24.23

WLAN 2.4 GHz Band Average Power (dBm)				
Mode/Band	b	g	n (HT-20)	n (HT-40)
WLAN 2.4GHz	13.24	12.27	12.27	11.90

WLAN 5.8 GHz Band Average Power (dBm)			
Mode/Band	a	n (HT-20)	n (HT-40)
WLAN 5.8GHz	6.74	6.57	5.83

Bluetooth Average Power (dBm)				
Mode/Band	1 Mbps(GFSK)	2 Mbps(π /4DQPSK)	3 Mbps (8DPSK)	LE (BT 4.0)
Bluetooth 2.4 GHz	1.82	0.93	1.00	1.64

RFID Average Power (dBm)	
Mode	2-FSK
Power	23.57

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
E-mail: info@ccis-cb.com

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

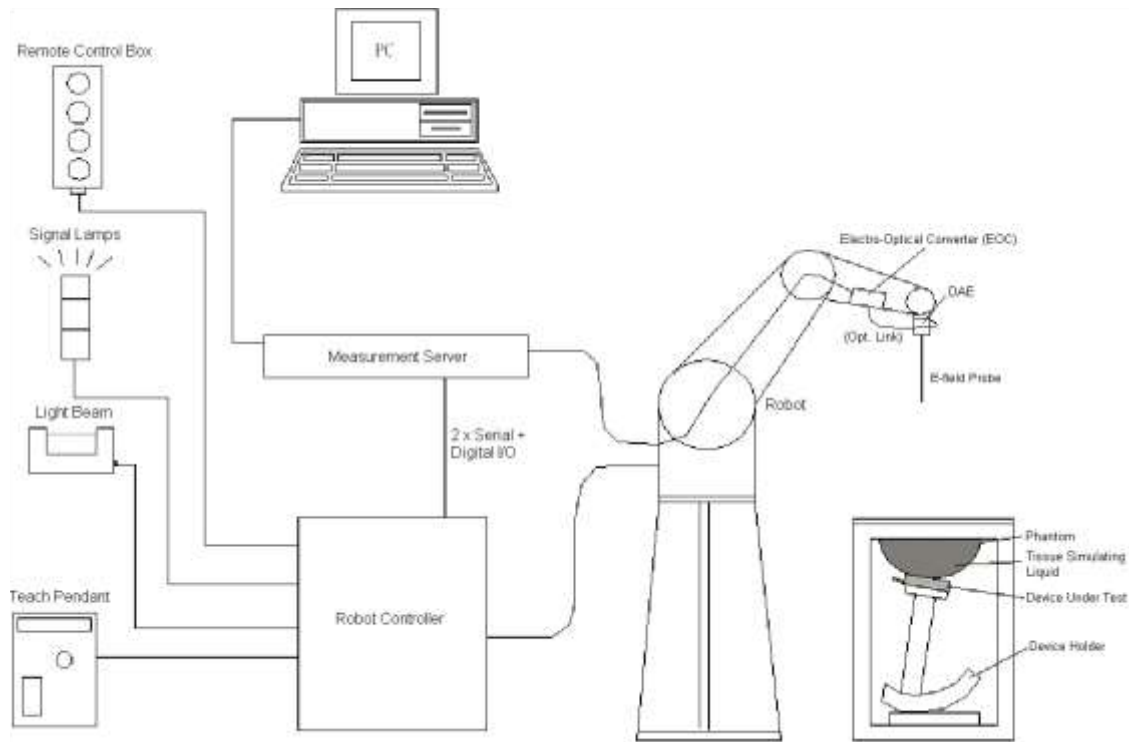


Fig. 8.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in the following sub-sections.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification <EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency Directivity	10 MHz to 6 GHz; Linearity: ± 0.2 dB ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20mm) Tip diameter: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1 mm



Fig. 8.2 Photo of E-Field Probe

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y and Norm Z), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix E of this report.

8.2 Data Acquisition Electronics (DAE)

The Data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig. 8.3 Photo of DAE

8.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Fig. 8.4 Photo of Robot

8.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY 5: 400MHz, Intel Celeron), chip-disk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig. 8.5 Photo of Server for DASY5

8.5 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 8.6 Photo of Light Beam

8.6 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume Dimensions	Approx. 25 liters Length: 1000mm; Width: 500mm; Height: adjustable feet
Measurement Areas	Left Head, Right Head, Flat phantom



Fig. 8.7 Photo of SAM Twin Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom >

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

ELI4 has been optimized regarding its performance and can be integrated into a SPEAG standard phantom table. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom can be used with the following tissue simulating liquids:

- Water-sugar based liquids can be left permanently in the phantom. Always cover the liquid if the system is not in use; otherwise the parameters will change due to water evaporation.
- DGBE based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the phantom resistiveness.

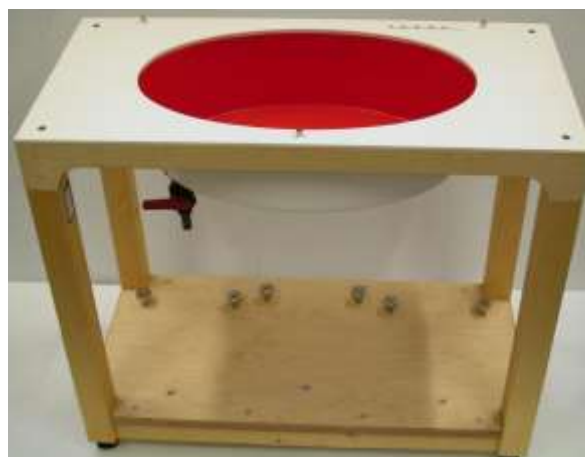


Fig.8.8 Photo of ELI4 Phantom

8.7 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards. The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP).

Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig. 8.9 Photo of Device Holder

8.8 Data storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verifications of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe Parameters:	<ul style="list-style-type: none"> - Sensitivity - Conversion - Diode compression point 	<ul style="list-style-type: none"> Norm_i, a_{i0}, a_{i1}, a_{i2} ConvF_i dcp_i
Device Parameters:	<ul style="list-style-type: none"> - Frequency - Crest 	<ul style="list-style-type: none"> f cf
Media Parameters:	<ul style="list-style-type: none"> - Conductivity - Density 	<ul style="list-style-type: none"> σ ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E- Field Probes: } E_i = \sqrt{\frac{v_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-Field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency (GHz)
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

With SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in (mho/m) or (Siemens/m)
 ρ = equipment tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

8.9 Test Equipment List

Manufacturer	Equipment Description	Model	S/N	Cal. Information	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1118	06.08.2017	06.07.2020
SPEAG	835MHz System Validation Kit	D835V2	4d154	06.11.2019	06.10.2022
MVG	COMOSAR 1800 MHz REFERENCE DIPOLE	SID1800	SN 09/15 DIP 1G800-360	02.28.2018	02.27.2021
SPEAG	1900MHz System Validation Kit	D1900V2	5d175	06.11.2019	06.10.2022
SPEAG	2450MHz System Validation Kit	D2450V2	910	06.10.2019	06.09.2022
SPEAG	2600MHz System Validation Kit	D2600V2	1114	11.05.2018	11.04.2021
SPEAG	Data Acquisition Electronics	DAE4	1373	08.09.2019	08.08.2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3924	08.30.2019	08.29.2020
SPEAG	DASY 52 Measurement Software	DASY 52	Version: 52.8.8.1222	N.C.R	N.C.R
SPEAG	DASY 52 File Conversion Software	SEMCAD X	Version: 14.6.10 (7331)	N.C.R	N.C.R
SPEAG	Phantom	Twin Phantom	1765	N.C.R	N.C.R
SPEAG	Phantom	ELI V5.0	1208	N.C.R	N.C.R
SPEAG	Phone Positioner	N/A	N/A	N.C.R	N.C.R
Stäubli	Robot	TX60L	F13/5P6VB1/A/01	N.C.R	N.C.R
Anritsu	Universal Radio Communication Analyzer	MT8820C	6201060814	03.18.2019	03.17.2020
R&S	Universal Radio Communication Tester	CMU200	113097	03.18.2019	03.17.2020
HP	Network Analyzer	8753D	3410A06291	07.22.2019	07.21.2020
Agilent	Spectrum Analyzer	ESRP7	101070	03.18.2019	03.17.2020
R&S	Spectrum Analyzer	FSP30	101454	03.18.2019	03.17.2020
R&S	Signal Generator	N5182A	MY49060014	11.07.2018	11.06.2019
Huber Suhner	RF Cable	SUCOFLEX	12341	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	17268	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	2080	See Note 3	
Weinschel	Attenuator	23-3-34	BL5513	See Note 3	
Anritsu	Directional Coupler	MP654A	100217491	See Note 3	
SPEAG	Dielectric Assessment Kit	3.5 Probe	1119	See Note 4	
SPEAG	DAK Measurement Software	DAK	Version: DAK 3.5	N.C.R	
Mini-circuits	Low Noise Amplifier	Power amplifier	LNA-00500200-2515	See Note 5	

Note:

- The calibration certificate of DASY can be referred to appendix C of this report.
- Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
- The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
- In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the spectrum analyzer is critical and we do have calibration for it
- Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
- N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.

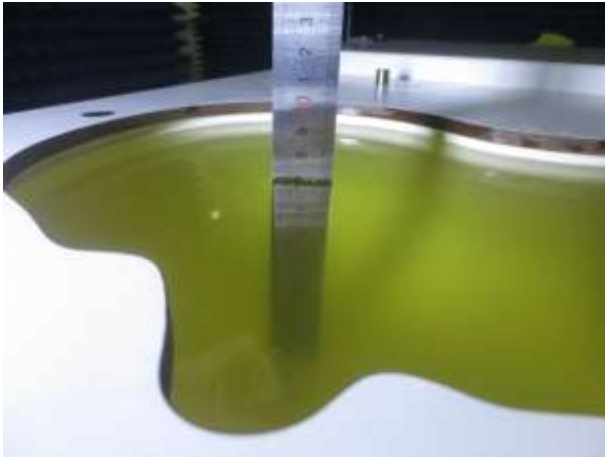


Fig. 9.1 Photo of Liquid Height for Head SAR (700MHz~1000MHz) (depth>15cm)

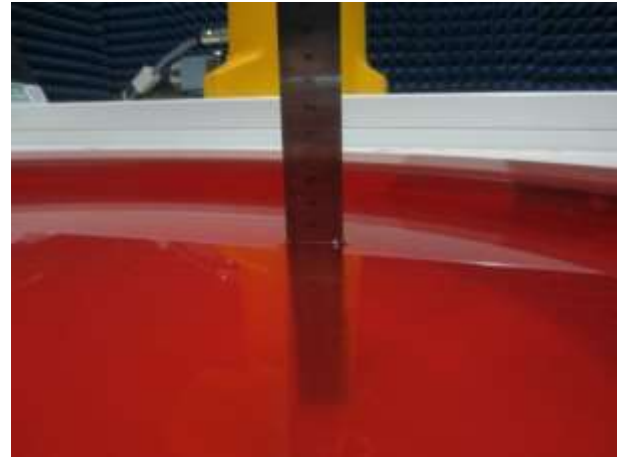


Fig. 9.2 Photo of Liquid Height for Body SAR of (700MHz~1000MHz) (depth>15cm)

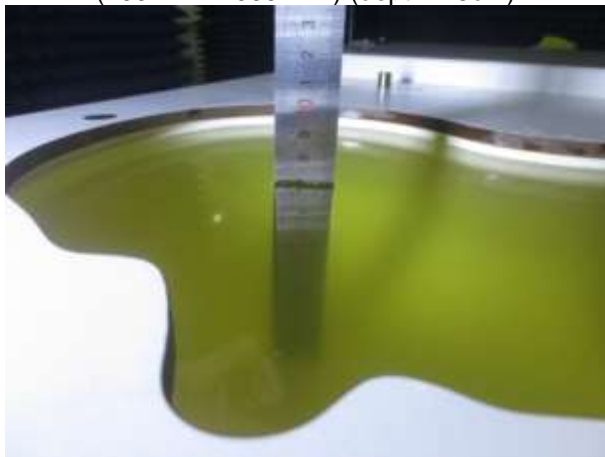


Fig. 9.3 Photo of Liquid Height for Head SAR (1710MHz~1910MHz) (depth>15cm)

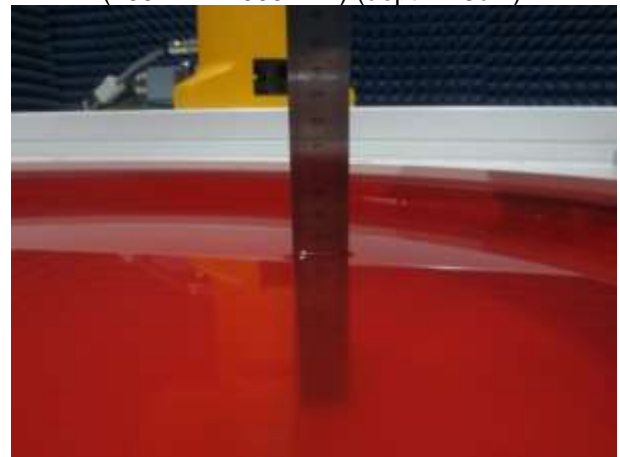


Fig. 9.4 Photo of Liquid Height for Body SAR of ELI V5.0 (1710MHz~1910MHz) (depth>15cm)

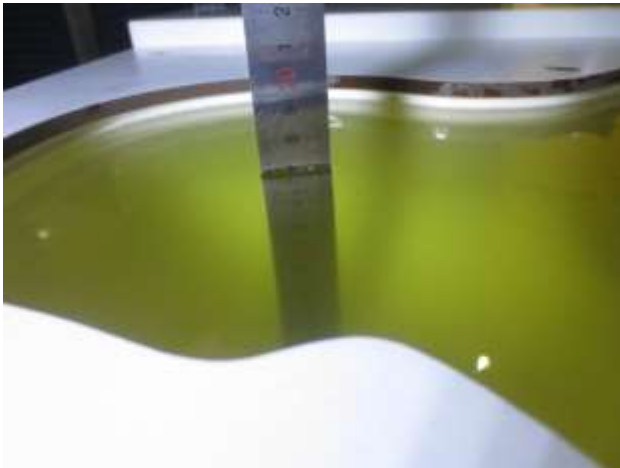


Fig. 9.5 Photo of Liquid Height for Head SAR (2000MHz~2600MHz) (depth>15cm)

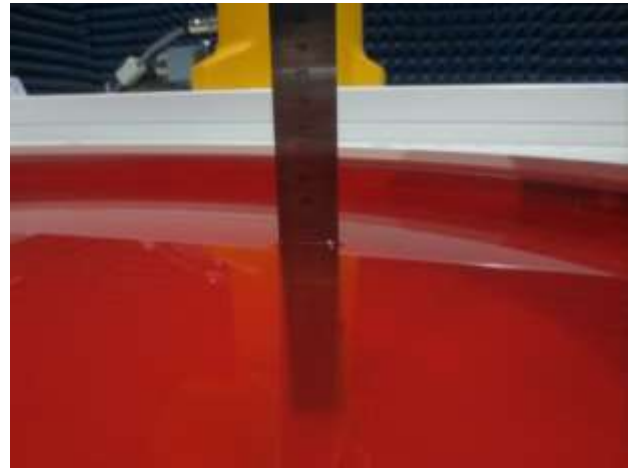


Fig. 9.6 Photo of Liquid Height for Body SAR of Twin Phantom (2000MHz~2600MHz) (depth>15cm)

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

The dielectric parameters of liquids were verified prior to the SAR evaluation using a Speag Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (mm/dd/yy)
750	Head	22.7	0.87	42.81	0.89	41.9	-2.25	2.17	±5	09.16.2019
835	Head	22.7	0.91	42.16	0.9	41.5	1.11	1.59	±5	09.16.2019
1800	Head	22.6	1.39	40.52	1.4	40.0	-0.71	1.30	±5	09.11.2019
1900	Head	22.6	1.42	39.48	1.4	40.0	1.43	-1.30	±5	09.11.2019
2450	Head	22.9	1.79	39.73	1.8	39.2	-0.56	1.35	±5	09.23.2019
2600	Head	22.9	1.99	38.69	1.96	39.0	1.53	-0.79	±5	09.23.2019
750	Body	22.5	0.97	55.92	0.96	55.5	1.04	0.76	±5	09.21.2019
835	Body	22.5	1.00	55.50	0.97	55.2	3.09	0.54	±5	09.21.2019
1800	Body	22.8	1.51	52.84	1.52	53.3	-0.66	-0.86	±5	09.25.2019
1900	Body	22.8	1.55	52.44	1.52	53.3	1.97	-1.61	±5	09.25.2019
2450	Body	22.7	1.97	53.48	1.95	52.7	1.03	1.48	±5	09.12.2019
2600	Body	22.7	2.21	51.28	2.16	52.5	2.31	-2.32	±5	09.12.2019

10 SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

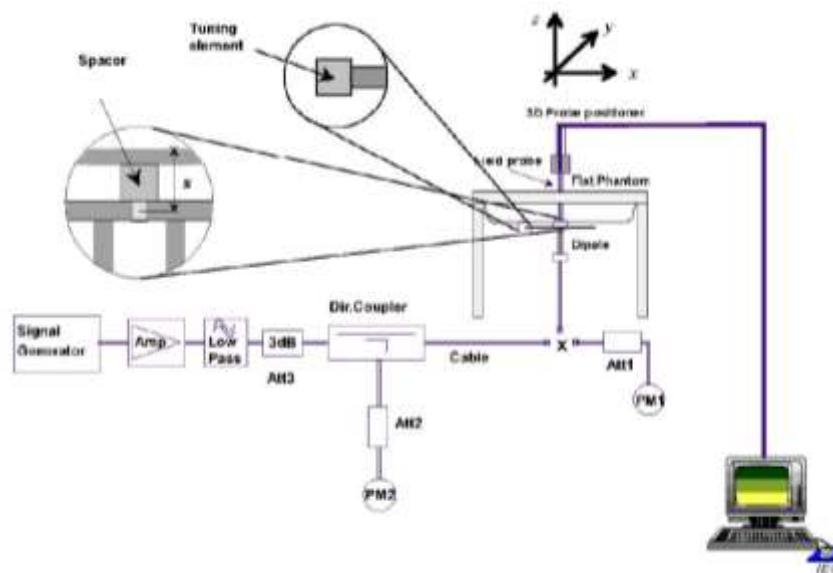


Fig.10.1 System Verification Setup Diagram



Fig.10.2 Photo of Dipole setup

➤ **System Verification Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Liquid Type	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
09.16.2019	750	Head	80	0.681	8.53	8.31	2.65
09.16.2019	835	Head	80	0.786	9.83	9.49	3.58
09.11.2019	1800	Head	40	1.54	38.5	38.76	-0.67
09.11.2019	1900	Head	40	1.60	40.0	39.4	1.52
09.23.2019	2450	Head	40	2.14	53.5	52.6	1.71
09.23.2019	2600	Head	40	2.27	56.75	56.3	0.80
09.21.2019	750	Body	80	0.715	8.94	8.76	2.05
09.21.2019	835	Body	80	0.789	9.86	9.57	3.03
09.25.2019	1800	Body	40	1.58	39.5	38.90	1.54
09.25.2019	1900	Body	40	1.64	41.0	40.5	1.23
09.12.2019	2450	Body	40	2.11	52.75	50.9	3.63
09.12.2019	2600	Body	40	2.17	54.25	53.1	2.17

11 EUT Testing Position

This EUT was tested in two different positions. They are front of face for head with phantom 10 mm gap, extremity of the EUT with phantom 0 mm gap, as illustrated below.

11.1 Front of face Accessory Configurations

- To position the device parallel to the phantom surface with either screen up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 10 mm.

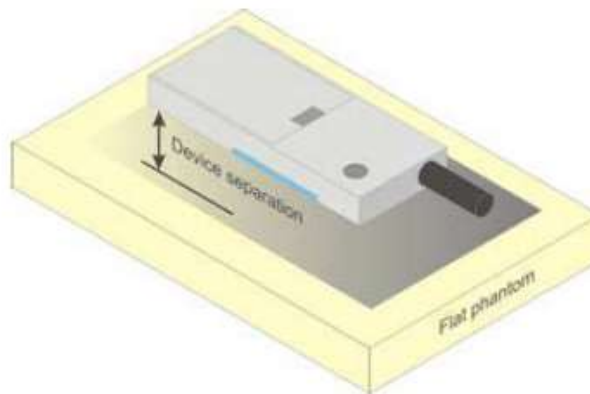


Fig.11.1 Illustration for Extremity Position

11.2 Extremity Accessory Configurations

- To position the device parallel to the phantom surface with either screen up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 0 mm or holster surface and the flat phantom to 0 mm.

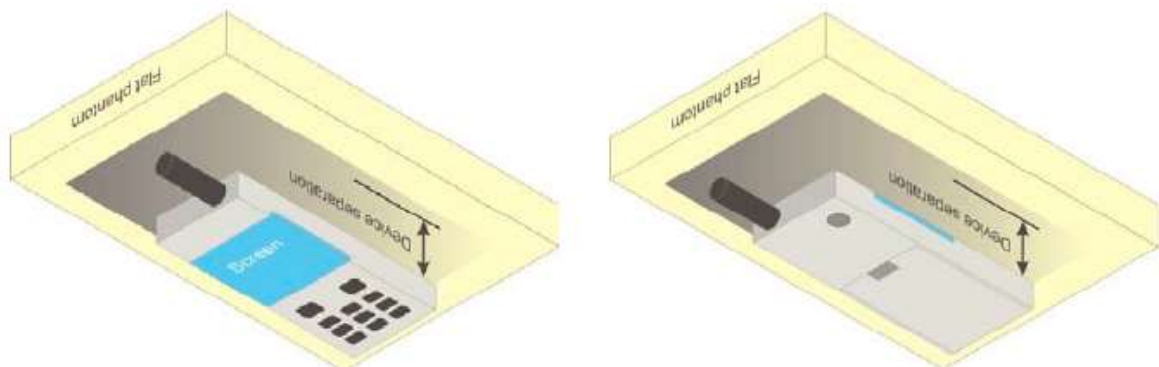


Fig.11.2 Illustration for Extremity Position

12 Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the DASY software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

12.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD post-processor scan combine and subsequently superpose these measurement data to calculating the multiband SAR.

12.5 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 GSM Conducted Power

Band: GSM 850 Channel	Burst Average Power (dBm)			Frame-Average Power(dBm)		
	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, Voice)	32.63	32.62	32.63	23.60	23.59	23.60
GPRS (GMSK, 1 TX slot)	32.66	32.63	32.69	23.63	23.60	23.66
GPRS (GMSK, 2 TX slots)	32.14	32.11	32.12	26.12	26.09	26.10
GPRS (GMSK, 3 TX slots)	30.63	30.54	30.53	26.37	26.28	26.27
GPRS (GMSK, 4 TX slots)	29.52	29.42	29.41	26.51	26.41	26.40

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle “x” of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Body worn SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Hotspot mode SAR testing, GPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- The EUT do not support DTM and VoIP function.

Band: PCS 1900	Burst Average Power (dBm)			Frame-Average Power(dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, Voice)	29.53	30.18	30.26	20.50	21.15	21.23
GPRS (GMSK, 1 TX slot)	29.56	30.21	30.28	20.53	21.18	21.25
GPRS (GMSK, 2 TX slots)	28.68	29.43	29.56	22.66	23.41	23.54
GPRS (GMSK, 3 TX slots)	26.72	27.54	27.75	22.46	23.28	23.49
GPRS (GMSK, 4 TX slots)	25.54	26.38	26.60	22.53	23.37	23.59

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 1900 Voice mode.
- For Body worn SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM Voice 1900 mode.
- For Hotspot mode SAR testing, GPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- The EUT do not support DTM and VoIP function.

13.2 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	23.46	23.58	23.13
RMC 12.2 kbps	23.59	23.70	23.21
HSDPA Sub-test 1	22.60	22.70	22.24
HSDPA Sub-test 2	22.36	22.35	21.83
HSDPA Sub-test 3	20.73	20.92	20.23
HSDPA Sub-test 4	20.68	20.82	20.2
HSUPA Sub-test 1	22.65	22.65	22.11
HSUPA Sub-test 2	22.63	22.64	22.10
HSUPA Sub-test 3	20.93	20.75	20.16
HSUPA Sub-test 4	22.59	22.69	22.22
HSUPA Sub-test 5	21.76	21.74	21.23

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	23.51	23.85	23.47
RMC 12.2 kbps	23.68	23.92	23.69
HSDPA Sub-test 1	22.72	22.93	22.76
HSDPA Sub-test 2	22.25	22.59	22.39
HSDPA Sub-test 3	20.94	20.95	20.75
HSDPA Sub-test 4	20.92	20.87	20.77
HSUPA Sub-test 1	22.59	22.89	22.61
HSUPA Sub-test 2	22.62	22.93	22.71
HSUPA Sub-test 3	20.83	21.08	20.88
HSUPA Sub-test 4	22.68	22.90	22.77
HSUPA Sub-test 5	21.81	22.02	21.76

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.
3. AMR, HSDPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.

13.3 LTE Conducted Power

13.3.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.3.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

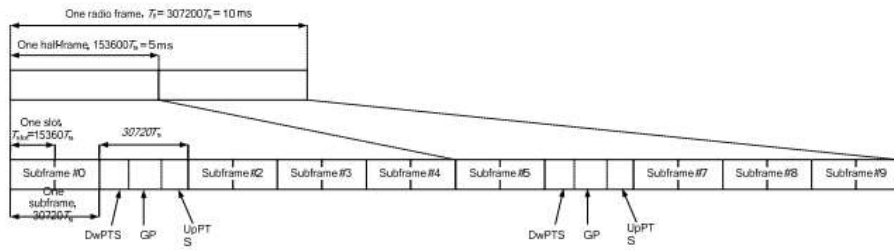


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592 · T _s	2192 · T _s	2560 · T _s	7680 · T _s	2192 · T _s	2560 · T _s
1	19760 · T _s			20480 · T _s		
2	21952 · T _s			23040 · T _s		
3	24144 · T _s			25600 · T _s		
4	26336 · T _s	4384 · T _s	5120 · T _s	7680 · T _s	4384 · T _s	5120 · T _s
5	6592 · T _s			20480 · T _s		
6	19760 · T _s			23040 · T _s		
7	21952 · T _s			12800 · T _s		
8	24144 · T _s	-	-	-	-	-
9	13168 · T _s	-	-	-	-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_f=37200 \cdot T_s = 10$ ms consists of two half-frames of length $153600 \cdot T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 \cdot T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 2 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
Band 2	1.4	QPSK	1	0	23.26	23.46	23.22
			1	2	23.32	23.42	23.25
			1	5	23.24	23.45	23.19
			3	0	22.34	22.45	22.34
			3	1	22.42	22.40	22.33
			3	2	22.37	22.52	22.35
			6	0	22.38	22.40	22.41
		16QAM	1	0	22.49	22.35	22.57
			1	2	22.35	22.56	22.30
			1	5	22.10	22.18	22.28
			3	0	22.31	22.34	22.34
			3	1	22.25	22.27	22.27
			3	2	22.31	22.30	22.15
			6	0	21.15	21.43	21.25

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
Band 2	3	QPSK	1	0	23.25	23.31	23.27
			1	7	23.28	23.34	23.26
			1	14	23.24	23.30	23.20
			8	0	22.35	22.44	22.39
			8	4	22.36	22.47	22.42
			8	7	22.35	22.43	22.39
			15	0	22.35	22.47	22.42
		16QAM	1	0	22.04	22.35	22.53
			1	7	22.27	22.26	22.26
			1	14	22.05	22.24	22.52
			8	0	21.41	21.31	21.30
			8	4	21.25	21.30	21.40
			8	7	21.23	21.44	21.35
			15	0	21.30	21.43	21.35

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
Band 2	5	QPSK	1	0	23.38	23.48	23.50
			1	12	23.37	23.44	23.42
			1	24	23.28	23.40	23.31
			12	0	22.46	22.45	22.53
			12	6	22.44	22.45	22.47
			12	11	22.40	22.51	22.47
			25	0	22.36	22.45	22.46
		16QAM	1	0	22.34	22.66	22.29
			1	12	22.33	22.35	22.34
			1	24	22.61	22.31	22.04
			12	0	21.44	21.30	21.43
			12	6	21.33	21.39	21.49
			12	11	21.25	21.37	21.31
			25	0	21.35	21.34	21.40

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
Band 2	10	QPSK	1	0	23.49	23.50	23.42
			1	24	23.42	23.49	23.38
			1	49	23.35	23.49	23.24
			25	0	22.45	22.64	22.56
			25	12	22.49	22.49	22.59
			25	24	22.41	22.46	22.58
			50	0	22.52	22.49	22.61
		16QAM	1	0	22.61	22.40	22.81
			1	24	22.29	22.61	22.40
			1	49	22.25	22.66	22.32
			25	0	21.32	21.41	21.42
			25	12	21.42	21.34	21.41
			25	24	21.41	21.34	21.34
			50	0	21.39	21.47	21.38

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
Band 2	15	QPSK	1	0	23.44	23.45	23.43
			1	37	23.37	23.39	23.37
			1	74	23.35	23.40	23.25
			36	0	22.45	22.57	22.53
			36	16	22.45	22.55	22.57
			36	35	22.38	22.47	22.42
			75	0	22.44	22.62	22.48
		16QAM	1	0	22.30	22.36	22.46
			1	37	22.58	22.25	22.41
			1	74	22.48	22.79	22.28
			36	0	21.35	21.44	21.47
			36	16	21.36	21.43	21.49
			36	35	21.40	21.37	21.44
			75	0	21.44	21.48	21.41

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
Band 2	20	QPSK	1	0	23.41	23.45	23.54
			1	49	23.31	23.32	23.49
			1	99	23.34	23.35	23.34
			50	0	22.68	22.52	22.58
			50	24	22.60	22.51	22.64
			50	49	22.61	22.48	22.64
			100	0	22.46	22.70	22.50
		16QAM	1	0	22.51	22.49	22.49
			1	49	22.47	22.50	22.60
			1	99	22.78	22.49	22.07
			50	0	21.53	21.44	21.47
			50	24	21.30	21.55	21.52
			50	49	21.52	21.47	21.48
			100	0	21.55	21.55	21.55

LTE Band 4 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
Band 4	1.4	QPSK	1	0	23.49	23.42	23.40
			1	2	23.44	22.45	23.40
			1	5	23.41	22.43	23.39
			3	0	22.55	22.61	22.44
			3	1	22.44	22.68	22.38
			3	2	22.45	22.51	22.41
			6	0	22.46	22.51	22.39
		16QAM	1	0	22.18	22.28	22.16
			1	2	22.32	22.33	22.30
			1	5	22.22	22.24	22.46
			3	0	22.47	22.46	22.27
			3	1	22.23	22.42	22.25
			3	2	22.22	22.37	22.27
			6	0	21.27	21.36	21.28

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
Band 4	3	QPSK	1	0	23.36	23.35	23.20
			1	7	23.40	23.40	23.23
			1	14	23.35	23.35	23.17
			8	0	22.50	22.46	22.40
			8	4	22.54	22.50	22.43
			8	7	22.47	22.46	22.39
			15	0	22.54	22.52	22.38
		16QAM	1	0	22.27	22.28	22.16
			1	7	22.18	22.52	22.19
			1	14	22.12	22.45	22.13
			8	0	21.49	21.30	21.37
			8	4	21.45	21.36	21.34
			8	7	21.42	21.38	21.32
			15	0	21.42	21.39	21.22

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19975	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
Band 4	5	QPSK	1	0	23.51	23.45	23.42
			1	12	23.51	23.45	23.39
			1	24	23.43	23.36	23.51
			12	0	22.56	22.55	22.40
			12	6	22.54	22.50	22.36
			12	11	22.55	22.47	22.40
			25	0	22.47	22.64	22.53
		16QAM	1	0	22.35	22.35	22.16
			1	12	22.45	22.40	22.11
			1	24	22.16	22.30	22.41
			12	0	21.42	21.35	21.29
			12	6	21.38	21.32	21.26
			12	11	21.40	21.31	21.24
			25	0	21.32	21.43	21.22

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20000	20175	20350
					1715.0MHz	1732.5MHz	1750.0MHz
Band 4	10	QPSK	1	0	23.41	23.55	23.44
			1	24	23.39	23.50	23.27
			1	49	23.43	23.47	23.24
			25	0	22.61	22.49	22.52
			25	12	22.64	22.47	22.37
			25	24	22.58	22.46	22.33
			50	0	22.69	22.70	22.59
		16QAM	1	0	22.41	22.25	22.58
			1	24	22.63	22.30	22.10
			1	49	21.40	22.27	22.21
			25	0	21.36	21.32	21.32
			25	12	21.37	21.28	21.23
			25	24	21.56	21.27	21.26
			50	0	21.35	21.52	21.17

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20025	20175	20325
					1717.5MHz	1732.5MHz	1747.5MHz
Band 4	15	QPSK	1	0	23.61	23.62	23.48
			1	37	23.51	23.57	23.32
			1	74	23.42	23.51	23.22
			36	0	22.59	22.57	22.53
			36	16	22.53	22.65	22.38
			36	35	22.59	22.52	22.35
			75	0	22.51	22.56	22.59
		16QAM	1	0	22.59	22.80	22.12
			1	37	22.55	22.65	22.40
			1	74	22.33	22.61	22.58
			36	0	21.52	21.40	21.40
			36	16	21.38	21.35	21.36
			36	35	21.39	21.25	21.26
			75	0	21.32	21.41	21.21

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20050	20175	20300
					1720.0MHz	1732.5MHz	1745.0MHz
Band 4	20	QPSK	1	0	23.58	23.52	23.57
			1	49	23.40	23.45	23.36
			1	99	23.38	23.37	23.25
			50	0	22.80	22.53	22.64
			50	24	22.61	22.70	22.40
			50	49	22.54	22.44	22.50
			100	0	22.51	22.48	22.60
		16QAM	1	0	22.88	22.34	22.44
			1	49	22.49	22.12	22.29
			1	99	22.45	22.20	22.97
			50	0	21.65	21.45	21.48
			50	24	21.43	21.45	21.39
			50	49	21.38	21.40	21.32
			100	0	21.35	21.40	21.30

LTE Band 7 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20775	21100	21425
					2502.5MHz	2535.0MHz	2567.5MHz
Band 7	5	QPSK	1	0	22.36	22.74	23.09
			1	12	22.38	22.78	23.12
			1	24	22.21	22.69	23.07
			12	0	21.45	21.68	21.11
			12	6	21.52	21.74	21.10
			12	11	21.44	21.77	21.20
			25	0	21.48	21.89	22.11
		16QAM	1	0	21.45	21.40	22.02
			1	12	21.69	21.44	22.25
			1	24	21.41	21.63	22.19
			12	0	21.37	21.73	21.95
			12	6	21.39	21.72	21.87
			12	11	21.57	21.66	21.94
			25	0	20.42	20.70	21.01

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20800	21100	21400
					2505.0MHz	2535.0MHz	2565.0MHz
Band 7	10	QPSK	1	0	22.60	22.65	23.03
			1	24	22.45	22.69	22.97
			1	49	22.41	22.76	23.07
			25	0	21.59	21.70	22.02
			25	12	21.51	21.78	22.18
			25	24	21.48	21.85	22.21
			50	0	21.52	21.87	22.29
		16QAM	1	0	21.34	21.50	21.85
			1	24	21.31	21.56	21.89
			1	49	21.78	21.61	21.95
			25	0	20.55	20.75	21.07
			25	12	20.41	20.69	21.07
			25	24	20.44	20.74	21.05
			50	0	20.49	20.76	21.15

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20825	21100	21375
					2507.5MHz	2535.0MHz	2562.5MHz
Band 7	15	QPSK	1	0	22.79	22.61	22.97
			1	37	22.63	22.68	23.06
			1	74	22.61	22.70	23.12
			36	0	21.70	21.80	22.18
			36	16	21.67	21.81	22.10
			36	35	21.67	21.93	22.14
			75	0	21.69	21.80	22.09
		16QAM	1	0	22.02	21.77	21.98
			1	37	21.40	21.84	22.38
			1	74	21.66	21.94	21.94
			36	0	20.71	20.78	21.11
			36	16	20.69	20.81	21.04
			36	35	20.71	20.88	21.17
			75	0	20.66	20.76	21.16

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20850	21100	21350
					2510.0MHz	2535.0MHz	2560.0MHz
Band 7	20	QPSK	1	0	22.65	22.57	22.82
			1	49	22.52	22.63	22.90
			1	99	22.49	22.84	23.03
			50	0	21.74	21.84	22.11
			50	24	21.72	21.89	22.27
			50	49	21.68	21.91	22.22
			100	0	21.65	21.82	22.06
		16QAM	1	0	21.78	21.82	22.40
			1	49	21.76	21.58	21.76
			1	99	21.40	21.90	22.40
			50	0	20.70	20.74	21.11
			50	24	20.66	20.78	21.21
			50	49	20.66	20.86	21.24
			100	0	20.67	20.80	21.15

LTE Band 17 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
Band 17	5	QPSK	1	0	22.65	22.53	22.48
			1	12	22.61	22.49	22.55
			1	24	22.54	22.41	22.61
			12	0	21.73	21.68	21.66
			12	6	21.74	21.70	21.62
			12	11	21.78	21.70	21.58
			25	0	21.62	21.61	21.59
		16QAM	1	0	21.75	21.81	21.78
			1	12	21.77	21.76	21.56
			1	24	21.81	22.01	21.75
			12	0	20.71	20.78	20.76
			12	6	20.80	20.77	20.63
			12	11	20.79	20.77	20.71
			25	0	20.73	20.69	20.59

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
Band 17	10	QPSK	1	0	22.60	22.58	22.62
			1	24	22.54	22.51	22.53
			1	49	22.38	22.60	22.51
			25	0	21.72	21.62	21.55
			25	12	21.64	21.59	21.50
			25	24	21.58	21.59	21.55
			50	0	21.68	21.70	21.66
		16QAM	1	0	21.55	21.70	22.08
			1	24	21.73	21.74	21.79
			1	49	21.54	21.50	21.82
			25	0	20.65	21.70	20.58
			25	12	20.74	21.55	20.65
			25	24	20.63	21.50	20.63
			50	0	20.69	20.64	20.68

LTE Band 41 part:

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39675	40148	40620	41093	41565
					2498.5MHz	2545.5MHz	2593.0MHz	2640.3MHz	2687.5MHz
Band 41	5	QPSK	1	0	23.48	23.67	24.10	24.11	24.23
			1	12	23.45	23.62	24.09	24.12	24.24
			1	24	23.43	23.59	24.03	23.96	24.17
			12	0	22.60	23.01	23.26	23.21	23.32
			12	6	22.59	22.64	23.27	23.19	23.28
			12	11	22.56	22.70	23.21	23.25	23.33
		16QAM	25	0	22.56	22.65	23.21	23.20	23.28
			1	0	22.56	22.68	23.25	23.26	23.31
			1	12	22.56	22.73	23.23	23.23	23.30
			1	24	22.53	22.78	23.19	23.30	23.38
			12	0	21.52	22.01	22.28	22.26	22.28
			12	6	21.51	21.89	22.30	22.18	22.29
			12	11	21.50	21.80	22.24	22.21	22.29
			25	0	21.55	21.83	22.33	22.27	22.37

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39700	40160	40620	41080	41540
					2501.0MHz	2547.0MHz	2593.0MHz	2639.0MHz	2685.0MHz
Band 41	10	QPSK	1	0	23.47	23.60	24.09	24.09	24.20
			1	24	23.47	23.63	24.08	24.06	24.22
			1	49	23.49	23.65	24.09	24.05	24.20
			25	0	22.58	22.80	23.21	23.20	23.26
			25	12	22.58	22.73	23.22	23.26	23.31
			25	24	22.55	22.70	23.22	23.21	23.26
			50	0	22.58	22.69	23.25	23.18	23.32
		16QAM	1	0	22.59	22.72	23.26	23.22	23.33
			1	24	22.54	22.73	23.23	23.16	23.29
			1	49	22.55	22.76	23.21	23.25	23.29
			25	0	21.52	21.95	22.22	22.29	22.34
			25	12	21.53	21.96	22.26	22.31	22.35
			25	24	21.53	21.90	22.23	22.21	22.22
			50	0	21.53	21.92	22.28	22.25	22.26

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39725	40173	40620	41068	41515
					2503.5MHz	2548.5MHz	2593.0MHz	2637.8MHz	2682.5MHz
Band 41	15	QPSK	1	0	23.50	23.79	24.09	24.10	24.21
			1	37	23.50	23.76	24.07	24.06	24.20
			1	74	23.54	23.80	24.08	24.08	24.22
			36	0	22.65	22.94	23.29	23.35	23.40
			36	16	22.63	22.98	23.31	23.33	23.39
			36	35	22.66	22.91	23.20	23.31	23.39
			75	0	22.61	22.76	23.28	23.29	23.32
		16QAM	1	0	22.72	22.81	23.34	23.35	23.39
			1	37	22.72	22.76	23.43	23.36	23.37
			1	74	22.76	22.80	23.30	23.28	23.37
			36	0	21.63	21.90	22.31	22.32	22.38
			36	16	21.61	21.87	22.34	22.39	22.50
			36	35	21.66	21.85	22.30	22.29	22.28
			75	0	21.60	21.79	22.37	22.36	22.38

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					39750	40185	40620	41055	41490
					2506.0MHz	2549.5MHz	2593.0MHz	2636.5MHz	2680.0MHz
Band 41	20	QPSK	1	0	23.53	23.73	24.11	24.13	24.22
			1	49	23.52	23.72	24.10	24.15	24.22
			1	99	23.54	23.75	24.09	24.11	24.23
			50	0	22.60	22.91	23.26	23.29	23.34
			50	24	22.63	22.85	23.26	23.28	23.32
			50	49	22.64	22.86	23.24	23.29	23.33
			100	0	22.64	22.90	23.31	23.35	23.38
		16QAM	1	0	22.74	22.93	23.36	23.32	23.39
			1	49	22.78	22.96	23.39	23.38	23.37
			1	99	22.78	22.95	23.31	23.30	23.39
			50	0	21.59	21.92	22.32	22.35	22.36
			50	24	21.58	21.95	22.32	22.34	22.36
			50	49	21.63	21.96	22.31	22.32	22.40
			100	0	21.63	21.98	22.36	22.35	22.42

Note:

1. Per KDB 447498 D01v05r02 section 4.1, 6), the required test channels number is 5 for LTE Band 41.

13.4 WLAN 2.4 GHz Band Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)
CH 01	2412	12.27	9.25	9.65
CH 06	2437	13.24	12.27	12.27
CH 11	2462	13.24	12.21	12.16

Average Power (dBm)		
Channel	Frequency (MHz)	802.11n (HT40)
CH 03	2422	10.36
CH 06	2437	11.90
CH 09	2452	11.77

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
b/CH 06	2.437	13.5	22.39	5	6.99	3.0
g/CH 06	2.437	12.5	17.78	5	5.55	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 b mode is required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
 Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 95.7%, so the duty cycle factor is 1.04

13.5 WLAN 5.8GHz Band Conducted Power

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 a	802.11 n20
CH 149	5745	6.46	6.57
CH 157	5785	6.74	6.20
CH 165	5825	6.57	6.11

Average Power (dBm)		
Channel	Frequency (MHz)	802.11n 40
CH 151	5755	5.16
CH 159	5795	5.83

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
a/CH 157	5.785	7.0	5.01	5.0	2.41	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 a mode is not required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 94.0%, so the duty cycle factor is 1.06.

13.6 Bluetooth Conducted Power

Average Power (dBm) (Bluetooth)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 01	2402	-0.56	-1.51	-1.45
CH 39	2441	1.34	0.51	0.57
CH 78	2480	1.82	0.93	1.00

Average Power (dBm)		
Channel	Frequency (MHz)	BLE
CH 00	2402	-0.90
CH 20	2442	1.02
CH 39	2480	1.64

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
CH 78	2.480	2.0	1.58	5	0.50	3.0

- The max. tune-up power was provided by manufacturer, base on the result of note 1, RF exposure evaluation is not required.
- The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.
- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.

13.7 RFID Conducted Power

Channel	Frequency (MHz)	Average Power (dBm)
CH 00	902.75	23.50
CH 25	915.25	23.54
CH 49	927.25	23.57

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
CH 49	0.92725	24.0	251.2	5	48.2	7.5

- Base on the result of note1, RF exposure evaluation of RFID is required.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 79.2%, so the duty cycle factor is 1.26.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

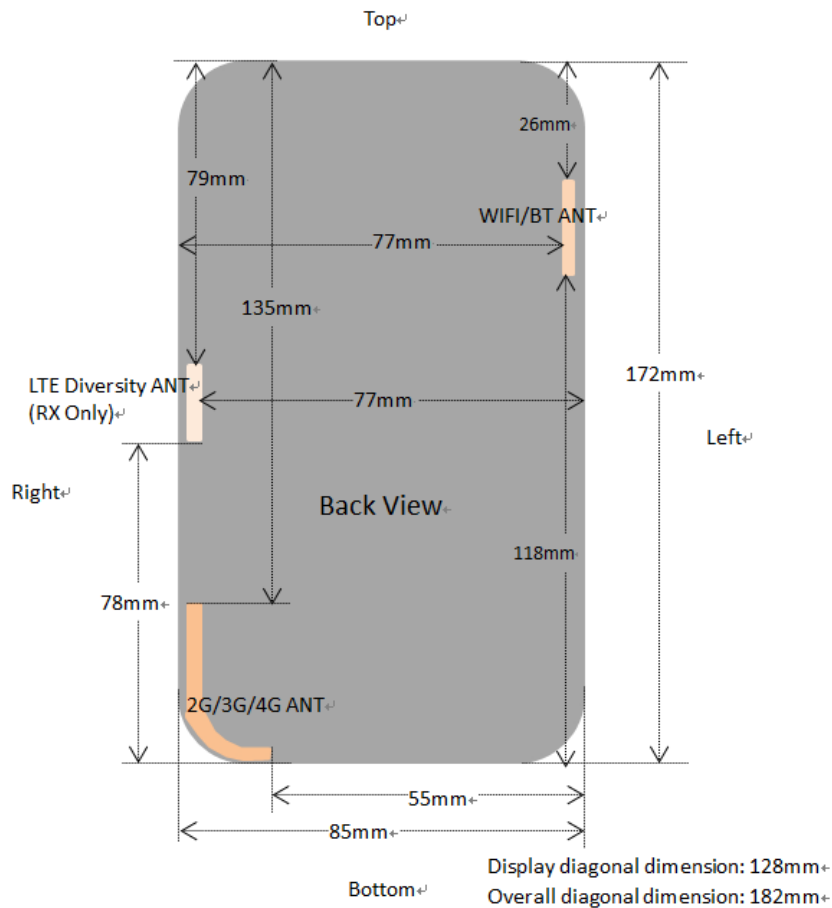


Fig.14.1 EUT Antenna Locations

14.2 Test Positions Consideration

Distance of Antennas to EUT edge/surface Test distance: 10mm					
Antennas	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	<25mm	135mm	<25mm	<25mm	55mm
WLAN & Bluetooth	<25mm	26mm	118mm	77mm	<25mm
RFID	<25mm	28mm	<25mm	<25mm	<25mm

Test Positions Test distance: 10mm					
Antennas	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	No	Yes	Yes	No
WLAN & Bluetooth	Yes	No	No	No	Yes
RFID	Yes	No	Yes	Yes	Yes

Note:

- Extremity (hands) SAR mode SAR assessments is required.
- Referring to KDB 941225 D06v02r01, when the overall device length and width are $\geq 9\text{cm} * 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
- Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for extremity SAR.

15 SAR Test Results Summary

15.1 Front of Face SAR Data

> GSM Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
1	GSM850/Voice	Front	128	824.2	32.63	-0.01	33.0	0.032	1.089	0.035
2	GSM1900/Voice	Front	810	1909.8	30.26	0.14	30.5	0.389	1.057	0.411
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> WCDMA Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
3	WCDMA Band V	Front	4183	836.6	23.70	-0.23	24.0	0.039	1.072	0.042
4	WCDMA Band II	Front	9400	1880.0	23.92	0.08	24.0	0.557	1.019	0.568
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> LTE 20MHz QPSK 1RB Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
5	Band2/RB#0	Front	19100	1900.0	23.54	-0.08	24.0	0.493	1.112	0.548
6	Band4/RB#0	Front	20050	1720.0	23.58	-0.03	24.0	0.381	1.102	0.420
7	Band7/RB#99	Front	21350	2560.0	23.03	-0.20	23.5	0.171	1.114	0.190
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> LTE 10MHz QPSK 1RB Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
8	Band17/RB#0	Front	23800	711.0	22.62	0.23	23.0	0.002	1.091	0.002
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> TDD-LTE 20MHz QPSK 1RB Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
9	Band41/RB#99	Front	41490	2680	24.23	0.19	24.5	0.079	1.064	1.008	0.085
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ LTE 20MHz QPSK 50%RB Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
10	Band2/RB#0	Front	18700	1860.0	22.68	0.21	23.0	0.412	1.076	0.443
11	Band4/RB#0	Front	20050	1720.0	22.80	-0.10	23.0	0.310	1.047	0.325
12	Band7/RB#24	Front	21350	2560.0	22.27	0.01	22.5	0.123	1.054	0.130
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ LTE 10MHz QPSK 50%RB Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
13	Band17/RB#0	Front	23780	709.0	21.72	-0.28	22.0	0.002	1.067	0.002
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ TDD-LTE 20MHz QPSK 50%RB Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
14	Band41/RB#0	Front	41490	2680	23.34	0.04	23.5	0.063	1.038	1.008	0.066
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 2.4 GHz Front of Face SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
15	2.4GHz/802.11b	Front	06	2437	13.24	-0.31	13.5	0.032	1.062	1.04	0.035
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

Note:

- Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. Cuz the maximum output power specified for OFDM and DSSS are 17.78mW(12.5dBm) and 22.39mW(13.5dBm), the scaled SAR would be $0.035 \times (17.78/22.39) = 0.028$ W/Kg < 1.2 W/kg, therefore, SAR is not required for OFDM.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

15.2 Extremity SAR Data

> GSM Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	GSM850/Voice	Front	128	824.2	32.63	0.07	33.0	0.108	1.089	0.118
	GPRS850/4 slots	Front	128	824.2	29.52	0.29	30.0	0.172	1.117	0.192
	GPRS850/4 slots	Right	128	824.2	29.52	0.14	30.0	0.123	1.117	0.137
16	GPRS850/4 slots	Bottom	128	824.2	29.52	-0.24	30.0	0.257	1.117	0.287
	GSM1900/Voice	Front	810	1909.8	30.26	-0.32	30.5	0.550	1.057	0.581
17	GPRS1900/4 slots	Front	810	1909.8	26.60	-0.34	27.0	0.925	1.096	1.014
	GPRS1900/4 slots	Right	810	1909.8	26.60	-0.21	27.0	0.332	1.096	0.364
	GPRS1900/4 slots	Bottom	810	1909.8	26.60	-0.15	27.0	0.870	1.096	0.954
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							4.0 W/kg (mW/g) Averaged over 10g			

> WCDMA Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	Band V/RMC	Front	4183	836.6	23.70	0.30	24.0	0.096	1.072	0.103
	Band V/RMC	Right	4183	836.6	23.70	-0.15	24.0	0.096	1.072	0.103
18	Band V/RMC	Bottom	4183	836.6	23.70	-0.11	24.0	0.155	1.072	0.166
19	Band II/RMC	Front	9400	1880.0	23.92	0.01	24.0	0.827	1.019	0.843
	Band II/RMC	Right	9400	1880.0	23.92	-0.01	24.0	0.348	1.019	0.355
	Band II/RMC	Bottom	9400	1880.0	23.92	-0.29	24.0	0.639	1.019	0.651
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							4.0 W/kg (mW/g) Averaged over 10g			

> LTE 20MHz QPSK 1RB Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
20	Band2/RB#0	Front	19100	1900.0	23.54	-0.09	24.0	0.762	1.112	0.847
	Band2/RB#0	Right	19100	1900.0	23.54	-0.21	24.0	0.282	1.112	0.314
	Band2/RB#0	Bottom	19100	1900.0	23.54	-0.04	24.0	0.578	1.112	0.643
21	Band4/RB#0	Front	20050	1720.0	23.58	0.17	24.0	0.663	1.102	0.731
	Band4/RB#0	Right	20050	1720.0	23.58	0.07	24.0	0.182	1.102	0.201
	Band4/RB#0	Bottom	20050	1720.0	23.58	-0.24	24.0	0.660	1.102	0.727
	Band7/RB#99	Front	21350	2560.0	23.03	0.24	23.5	0.315	1.114	0.351
22	Band7/RB#99	Right	21350	2560.0	23.03	-0.03	23.5	0.423	1.114	0.471
	Band7/RB#99	Bottom	21350	2560.0	23.03	-0.26	23.5	0.312	1.114	0.348
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							4.0 W/kg (mW/g) Averaged over 10g			

> LTE 10MHz QPSK 1RB Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
23	Band17/RB#0	Front	23800	711.0	22.62	0.23	23.0	0.010	1.091	0.011
	Band17/RB#0	Right	23800	711.0	22.62	0.01	23.0	0.005	1.091	0.005
	Band17/RB#0	Bottom	23800	711.0	22.62	-0.01	23.0	0.009	1.091	0.010
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							4.0 W/kg (mW/g) Averaged over 10g			

➤ TDD-LTE 20MHz QPSK 1RB Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{10g} (W/kg)
	Band41/RB#99	Front	41490	2680	24.23	-0.12	24.5	0.138	1.064	1.008	0.148
24	Band41/RB#99	Right	41490	2680	24.23	0.15	24.5	0.208	1.064	1.008	0.223
	Band41/RB#99	Bottom	41490	2680	24.23	-0.25	24.5	0.144	1.064	1.008	0.154
ANSI / IEEE C95.1 – SAFETY LIMIT							4.0 W/kg (mW/g)				
Spatial Peak											
Uncontrolled Exposure/General Population											

➤ LTE 20MHz QPSK 50%RB Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)	
25	Band2/RB#0	Front	18700	1860.0	22.68	0.05	23.0	0.629	1.076	0.677	
	Band2/RB#0	Right	18700	1860.0	22.68	-0.17	23.0	0.233	1.076	0.251	
	Band2/RB#0	Bottom	18700	1860.0	22.68	-0.32	23.0	0.483	1.076	0.520	
26	Band4/RB#0	Front	20050	1720.0	22.80	0.19	23.0	0.542	1.047	0.567	
	Band4/RB#0	Right	20050	1720.0	22.80	0.06	23.0	0.146	1.047	0.153	
	Band4/RB#0	Bottom	20050	1720.0	22.80	-0.36	23.0	0.533	1.047	0.558	
	Band7/RB#24	Front	21350	2560.0	22.27	0.17	22.5	0.297	1.054	0.313	
27	Band7/RB#24	Right	21350	2560.0	22.27	0.01	22.5	0.416	1.054	0.438	
	Band7/RB#24	Bottom	21350	2560.0	22.27	-0.29	22.5	0.282	1.054	0.297	
ANSI / IEEE C95.1 – SAFETY LIMIT							4.0 W/kg (mW/g)				
Spatial Peak											
Uncontrolled Exposure/General Population											

➤ LTE 10MHz QPSK 50%RB Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)	
28	Band17/RB#0	Front	23780	709.0	21.72	0.12	22.0	0.010	1.067	0.011	
	Band17/RB#0	Right	23780	709.0	21.72	0.14	22.0	0.004	1.067	0.004	
	Band17/RB#0	Bottom	23780	709.0	21.72	-0.05	22.0	0.010	1.067	0.011	
ANSI / IEEE C95.1 – SAFETY LIMIT							4.0 W/kg (mW/g)				
Spatial Peak											
Uncontrolled Exposure/General Population											

➤ TDD-LTE 20MHz QPSK 50%RB Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{10g} (W/kg)
	Band41/RB#0	Front	41490	2680	23.34	-0.11	23.5	0.141	1.038	1.008	0.148
29	Band41/RB#0	Right	41490	2680	23.34	0.26	23.5	0.213	1.038	1.008	0.223
	Band41/RB#0	Bottom	41490	2680	23.34	-0.24	23.5	0.146	1.038	1.008	0.153
ANSI / IEEE C95.1 – SAFETY LIMIT							4.0 W/kg (mW/g)				
Spatial Peak											
Uncontrolled Exposure/General Population											

➤ WLAN 2.4GHz Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{10g} (W/kg)
	2.4GHz/802.11b	Front	06	2437	13.24	-0.08	13.5	0.057	1.062	1.04	0.063
30	2.4GHz/802.11b	Left	06	2437	13.24	-0.33	13.5	0.179	1.062	1.04	0.198
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							4.0 W/kg (mW/g) Averaged over 10g				

➤ RFID Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{10g} (W/kg)
31	RFID	Front	49	927.25	23.57	-0.16	24.0	0.884	1.104	1.26	1.230
	RFID	Left	49	927.25	23.57	-0.02	24.0	0.469	1.104	1.26	0.652
	RFID	Right	49	927.25	23.57	0.12	24.0	0.337	1.104	1.26	0.469
	RFID	Bottom	49	927.25	23.57	-0.18	24.0	0.782	1.104	1.26	1.088
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							4.0 W/kg (mW/g) Averaged over 10g				

Note:

1. Extremity SAR testing was performed at 0mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR $\leq 2.0W/kg$, other channels SAR testing is not necessary.
3. Additional WLAN SAR testing was performed for simultaneous transmission analysis.
4. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA output power is $< 0.25dB$ higher than RMC 12.2kbps, or Reported SAR with RMC 12.2kbps setting is $\leq 1.2W/kg$, HSDPA SAR evaluation can be excluded.
5. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is $\geq 2.0W/kg$.
6. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are $\leq 2.0 W/kg$. Otherwise, SAR is measured for the highest output power channel.
7. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

15.3 Multi-Band Simultaneous Transmission Considerations

➤ Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Fig.15.1 Simultaneous Transmission Paths

➤ Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} \cdot \frac{\text{Max. power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Max. tune-up Power (dBm)	Exposure Position	Front	Extremity
		Test Distance (mm)	10	0
Bluetooth	2.0	Estimated SAR (W/kg)	0.033	0.066
5.8GHz WIFI	7.0	Estimated SAR (W/kg)	0.161	0.322

Note:

- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.

➤ Multi-Band simultaneous Transmission Consideration

Simultaneous Transmission Consideration	Position	Applicable Combination
	Front of Face	WWAN (Voice) + WLAN 2.4 GHz/5.8GHz
		WWAN (Voice) + Bluetooth
	Extremity	WWAN (Voice) + WLAN 2.4 GHz/5.8GHz
WWAN (Voice) + Bluetooth		

Note:

- WLAN 2.4GHz Band, WLAN 5.8GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
- GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
- The Report SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6 W/kg.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg

15.4 SAR Simultaneous Transmission Analysis

> Front of Face Simultaneous Transmission

WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	2.4GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
GSM 850	Front	0.035	0.035	0.07	GSM 850	Front	0.035	0.033	0.068
GSM 1900	Front	0.411	0.035	0.446	GSM 1900	Front	0.411	0.033	0.444

WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	2.4GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
WCDMA Band V	Front	0.042	0.035	0.077	WCDMA Band V	Front	0.042	0.033	0.075
WCDMA Band II	Front	0.568	0.035	0.603	WCDMA Band II	Front	0.568	0.033	0.601

WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	2.4GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 2	Front	0.548	0.035	0.583	LTE Band 2	Front	0.548	0.033	0.581
LTE Band 4	Front	0.420	0.035	0.455	LTE Band 4	Front	0.420	0.033	0.453
LTE Band 7	Front	0.190	0.035	0.225	LTE Band 7	Front	0.190	0.033	0.223
LTE Band 17	Front	0.002	0.035	0.037	LTE Band 17	Front	0.002	0.033	0.035
LTE Band 41	Front	0.085	0.035	0.12	LTE Band 41	Front	0.085	0.033	0.118

WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	5.8GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	5.8GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)
GSM 850	Front	0.035	0.161	0.196	WCDMA Band V	Front	0.042	0.161	0.203
GSM 1900	Front	0.411	0.161	0.572	WCDMA Band II	Front	0.568	0.161	0.729

WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	5.8GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{1g} (W/kg)	5.8GHz WLAN SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 2	Front	0.548	0.161	0.709	LTE Band 17	Front	0.002	0.161	0.163
LTE Band 4	Front	0.420	0.161	0.581	LTE Band 41	Front	0.085	0.161	0.246
LTE Band 7	Front	0.190	0.161	0.351					

> **Extremity Simultaneous Transmission**

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
GSM850	Front	0.192	0.063	0.255	GSM850	Front	0.192	0.066	0.258
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.137	/	0.137		Right	0.137	/	0.137
	Top	/	/	/		Top	/	/	/
	Bottom	0.287	/	0.287		Bottom	0.287	/	0.287

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
GSM1900	Front	1.014	0.063	1.077	GSM1900	Front	1.014	0.066	1.08
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.364	/	0.364		Right	0.364	/	0.364
	Top	/	/	/		Top	/	/	/
	Bottom	0.954	/	0.954		Bottom	0.954	/	0.954

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
WCDMA Band V	Front	0.103	0.063	0.166	WCDMA Band V	Front	0.103	0.066	0.169
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.103	/	0.103		Right	0.103	/	0.103
	Top	/	/	/		Top	/	/	/
	Bottom	0.166	/	0.166		Bottom	0.166	/	0.166

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
WCDMA Band II	Front	0.843	0.063	0.906	WCDMA Band II	Front	0.843	0.066	0.909
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.355	/	0.355		Right	0.355	/	0.355
	Top	/	/	/		Top	/	/	/
	Bottom	0.651	/	0.651		Bottom	0.651	/	0.651

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 2	Front	0.847	0.063	0.91	LTE Band 2	Front	0.847	0.066	0.913
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.314	/	0.314		Right	0.314	/	0.314
	Top	/	/	/		Top	/	/	/
	Bottom	0.643	/	0.643		Bottom	0.643	/	0.643

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 4	Front	0.731	0.063	0.794	LTE Band 4	Front	0.731	0.066	0.797
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.201	/	0.201		Right	0.201	/	0.201
	Top	/	/	/		Top	/	/	/
	Bottom	0.727	/	0.727		Bottom	0.727	/	0.727

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 7	Front	0.351	0.063	0.414	LTE Band 7	Front	0.351	0.066	0.417
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.471	/	0.471		Right	0.471	/	0.471
	Top	/	/	/		Top	/	/	/
	Bottom	0.348	/	0.348		Bottom	0.348	/	0.348

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 17	Front	0.011	0.063	0.074	LTE Band 17	Front	0.005	0.066	0.074
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.198
	Right	0.011	/	0.011		Right	0.011	/	0.011
	Top	/	/	/		Top	/	/	/
	Bottom	0.011	/	0.011		Bottom	0.010	/	0.011

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	2.4GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	Bluetooth Estimated SAR _{1g} (W/kg)	ΣSAR (W/kg)
LTE Band 41	Front	0.148	0.063	0.211	LTE Band 41	Front	0.148	0.066	0.214
	Back	/	/	/		Back	/	/	/
	Left	/	0.198	0.198		Left	/	0.066	0.066
	Right	0.223	/	0.223		Right	0.223	/	0.223

	Top	/	/	/		Top	/	/	/
	Bottom	0.154	/	0.154		Bottom	0.154	/	0.154

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)
GSM850	Front	0.192	0.322	0.514	GSM1900	Front	1.014	0.322	1.336
	Back	/	/	/		Back	/	/	/
	Left	/	0.322	0.322		Left	/	0.322	0.322
	Right	0.137	/	0.137		Right	0.364	/	0.364
	Top	/	/	/		Top	/	/	/
	Bottom	0.287	/	0.287		Bottom	0.954	/	0.954

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)
WCDMA Band V	Front	0.103	0.322	0.425	WCDMA Band II	Front	0.843	0.322	1.165
	Back	/	/	/		Back	/	/	/
	Left	/	0.322	0.322		Left	/	0.322	0.322
	Right	0.103	/	0.103		Right	0.355	/	0.355
	Top	/	/	/		Top	/	/	/
	Bottom	0.166	/	0.166		Bottom	0.651	/	0.651

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)
LTE Band 2	Front	0.847	0.322	1.169	LTE Band 4	Front	0.731	0.322	1.053
	Back	/	/	/		Back	/	/	/
	Left	/	0.322	0.322		Left	/	0.322	0.322
	Right	0.314	/	0.314		Right	0.201	/	0.201
	Top	/	/	/		Top	/	/	/
	Bottom	0.643	/	0.643		Bottom	0.727	/	0.727

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)	WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)
LTE Band 7	Front	0.351	0.322	0.673	LTE Band 17	Front	0.011	0.322	0.333
	Back	/	/	/		Back	/	/	/
	Left	/	0.322	0.322		Left	/	0.322	0.322
	Right	0.471	/	0.471		Right	0.011	/	0.011
	Top	/	/	/		Top	/	/	/
	Bottom	0.348	/	0.348		Bottom	0.011	/	0.011

WWAN Mode	Position	WWAN SAR _{10g} (W/kg)	5.8GHz WLAN SAR _{10g} (W/kg)	ΣSAR (W/kg)
LTE Band 41	Front	0.148	0.322	0.47
	Back	/	/	/
	Left	/	0.322	0.322
	Right	0.223	/	0.223
	Top	/	/	/
	Bottom	0.154	/	0.154

➤ **Simultaneous Transmission Conclusion**

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

15.5 Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A Type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in below Table.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor	1/k(b)	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Uncertainty Component	Section	Uncert. Value	Prob. Dist.	Div.	(C _i) (1 g)	(C _i) (10 g)	Std. Unc. (1 g)	Std. Unc. (10 g)	V _i
Measurement System									
Probe Calibration	E.2.1	±7.4%	N	1	1	1	±7.4%	±7.4%	∞
Axial Isotropy	E.2.2	±1.2%	R	√3	0.7	0.7	±0.49%	±0.49%	∞
Hemispherical Isotropy	E.2.2	±3.2%	R	√3	0.7	0.7	±1.29%	±1.29%	∞
Boundary Effects	E.2.3	±1.0%	R	√3	1	1	±0.58%	±0.58%	∞
Linearity	E.2.4	±0.9%	R	√3	1	1	±0.52%	±0.52%	∞
System Detection Limits	E.2.5	±0.25%	R	√3	1	1	±0.14%	±0.14%	∞
Readout Electronics	E.2.6	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response Time	E.2.7	±0.8%	R	√3	1	1	±0.46%	±0.46%	∞
Integration Time	E.2.8	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF Ambient Noise	E.6.1	±3.0%	R	√3	1	1	±1.73%	±1.73%	∞
RF Ambient Reflections	E.6.1	±3.0%	R	√3	1	1	±1.73%	±1.73%	∞
Probe positioner mechanical tolerances	E.6.2	±0.4%	R	√3	1	1	±0.23%	±0.23%	∞
Probe positioning tolerance with respect to the phantom shell surface	E.6.3	±2.9%	R	√3	1	1	±1.67%	±1.67%	∞
Interpolation, extrapolation, and integration algorithm For max. SAR Evaluation.	E.5	±1.0%	R	√3	1	1	±0.58%	±0.58%	∞
Test Sample Related									
Device Positioning	E.4.2	±4.6%	N	1	1	1	±4.6%	±4.6%	M-1
Device Holder	E.4.1	±5.2%	N	1	1	1	±5.2%	±5.2%	M-1
Power Drift	6.6.2	±5.0%	R	√3	1	1	±2.89%	±2.89%	∞
Phantom and Setup									
Phantom Uncertainty	E.3.1	±4.0%	R	√3	1	1	±2.31%	±2.31%	∞
Liquid conductivity (measured value)	E.3.3	±3.51%	N	1	0.78	0.71	±2.74%	±2.49%	M
Liquid dielectric constant (measured value)	E.3.3	±3.4%	N	1	0.23	0.26	±0.78%	±0.88%	M
Liquid Conductivity - Temperature Uncertainty	E.3.4	±1.6%	R	√3	0.78	0.71	±0.72%	±0.66%	∞
Liquid Dielectric Constant - Temperature Uncertainty	E.3.4	±0.9%	R	√3	0.23	0.26	±0.12%	±0.14%	∞
Combined Standard Uncertainty (RSS)							±11.61%	±11.55%	
Expanded Uncertainty (95% Confidence Level, k = 2)							±23.23%	±23.10%	

Uncertainty Budget for frequency range 300 MHz to 3 GHz according to IEEE1528-2013

15.6 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested. Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

16 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. IEEE Std. 1528-2013, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, September 2013
- [4]. SPEAG DASY52 System Handbook
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D01 v06, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, October 2015
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D01 v03r01, “3G SAR MEASUREMENT PROCEDURES”, October 2015
- [9]. FCC KDB 941225 D05 v02r05, “SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES”, Dec 2015
- [10]. FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [11]. FCC KDB 941225 D06 v02r01, “SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES”, October 2015
- [12]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

Test Laboratory: CCIS

Date/Time: 09.16.2019 15:10:42

DUT: Dipole 750 MHz; Type: D750V3; Serial: SN:1118

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.869 \text{ S/m}$; $\epsilon_r = 42.811$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(10.07, 10.07, 10.07); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 750 MHz Head Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 31.86 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.987 W/kg
SAR(1 g) = 0.682 W/kg; SAR(10 g) = 0.458 W/kg
 Maximum value of SAR (measured) = 0.852 W/kg

System Performance Check at Frequency 750 MHz Head Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Area Scan (41x131x1): Interpolated grid:
 dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.829 W/kg

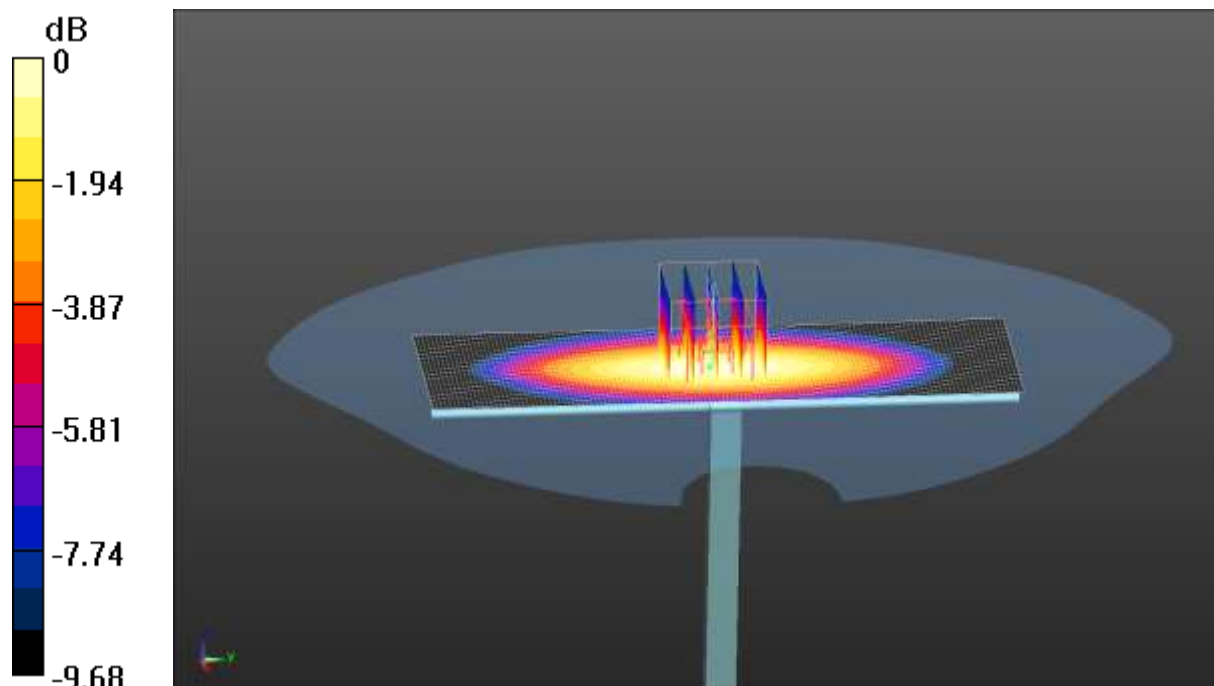

0 dB = 0.829 W/kg = -0.81 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.16.2019 15:31:25

DUT: Dipole 835 MHz; Type: D835V2; Serial: SN:4d154


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.158$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.67, 9.67, 9.67); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 835 MHz Head Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.04 W/kg

System Performance Check at Frequency 835 MHz Head Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:
 Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 32.94 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.523 W/kg
 Maximum value of SAR (measured) = 0.996 W/kg

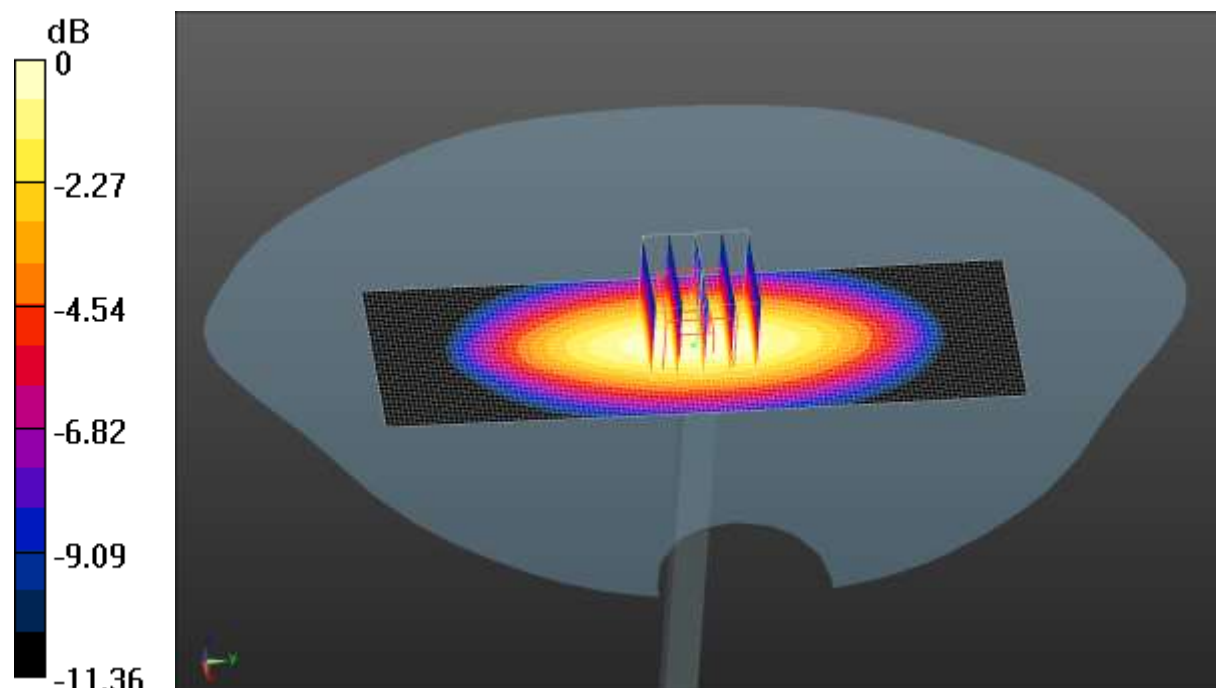

0 dB = 0.996 W/kg = -0.02 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 08:25:01

DUT: Dipole 1800 MHz; Type: SID1800; Serial: SN:09/15 DIP IG800-360

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 40.521$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(8.4, 8.4, 8.4); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 1800MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 41.68 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 3.08 W/kg
SAR(1 g) = 1.54 W/kg; SAR(10 g) = 0.792 W/kg
 Maximum value of SAR (measured) = 2.32 W/kg

System Performance Check at Frequency 1800MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (41x51x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 2.54 W/kg

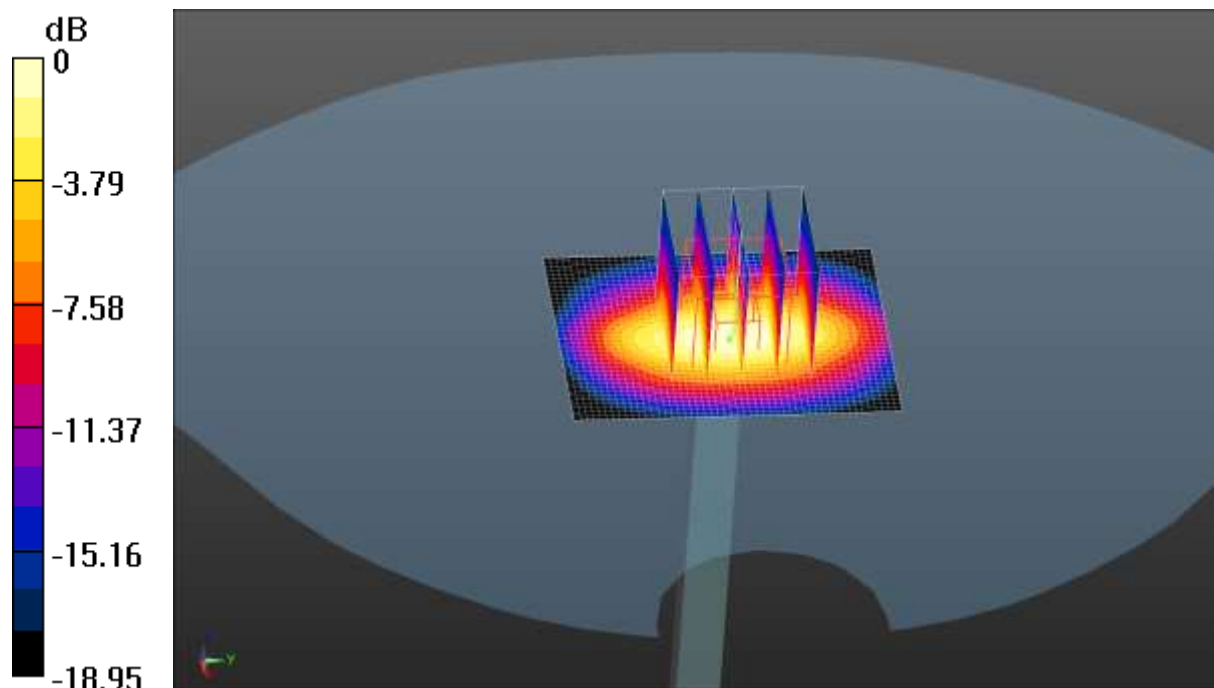

0 dB = 2.54 W/kg = 4.05 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 08:07:22

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d175


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.476$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.17, 8.17, 8.17); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 1900MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (41x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 2.53 W/kg

System Performance Check at Frequency 1900MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:
 Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 42.38 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 3.26 W/kg
SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.814 W/kg
 Maximum value of SAR (measured) = 2.41 W/kg

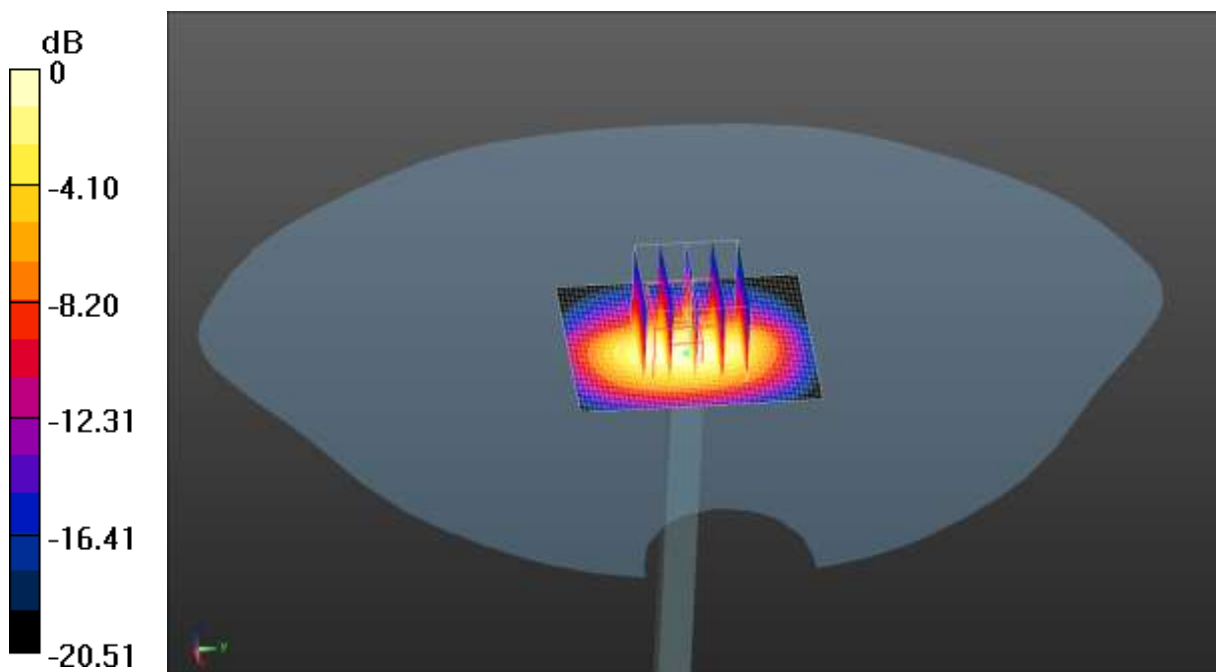

0 dB = 2.41 W/kg = 3.82 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 08:02:54

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN:910


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.785 \text{ S/m}$; $\epsilon_r = 39.726$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.54, 7.54, 7.54); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 2450MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (51x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 3.54 W/kg

System Performance Check at Frequency 2450MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.78 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 4.43 W/kg
SAR(1 g) = 2.14 W/kg; SAR(10 g) = 0.961 W/kg
 Maximum value of SAR (measured) = 3.32 W/kg

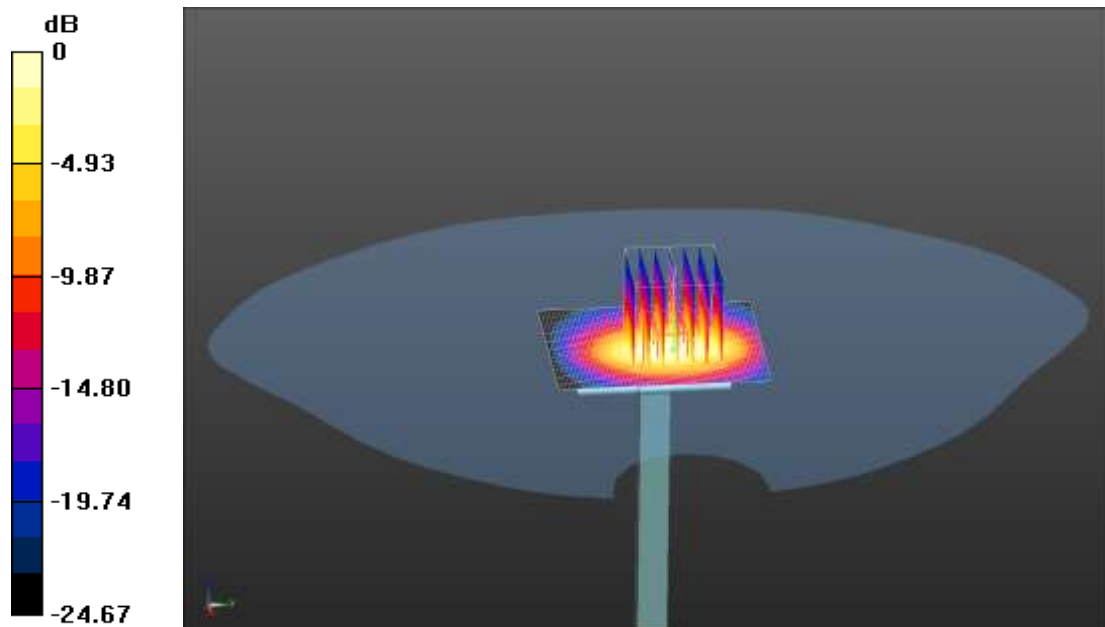

0 dB = 3.32 W/kg = 5.21 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 08:29:38

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: SN:1114

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.992 \text{ S/m}$; $\epsilon_r = 38.694$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 – SN3924; ConvF(7.3, 7.3, 7.3); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 2600MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan(7X7X7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 44.02 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 5.12 W/kg
SAR(1 g) = 2.27 W/kg; SAR(10 g) = 0.991 W/kg
 Maximum value of SAR (measured) = 3.94 W/kg

System Performance Check at Frequency 2600MHz Head Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (51x61x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 4.21 W/kg

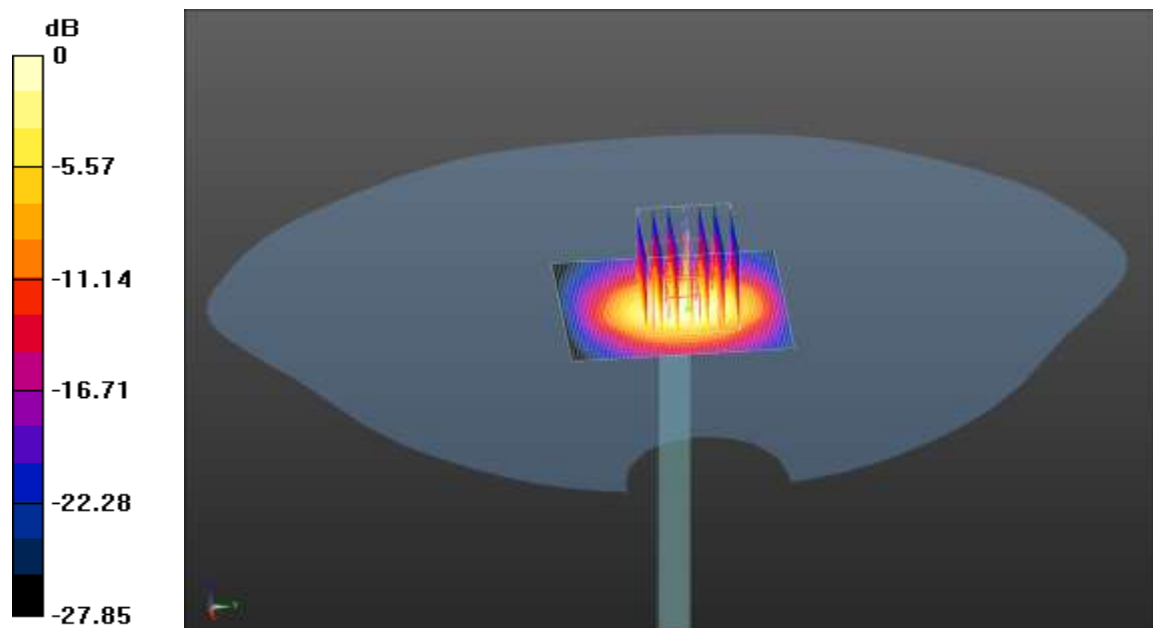

0 dB = 4.21 W/kg = 6.24 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.21.2019 08:10:09

DUT: Dipole 750 MHz; Type: D750V3; Serial: SN:1118

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 55.918$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 – SN3924; ConvF(10.07, 10.07, 10.07); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 750 MHz Body Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 30.12 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.715 W/kg; SAR(10 g) = 0.476 W/kg
 Maximum value of SAR (measured) = 1.01 W/kg

System Performance Check at Frequency 750 MHz Body Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Area Scan (41x131x1): Interpolated grid:
 dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

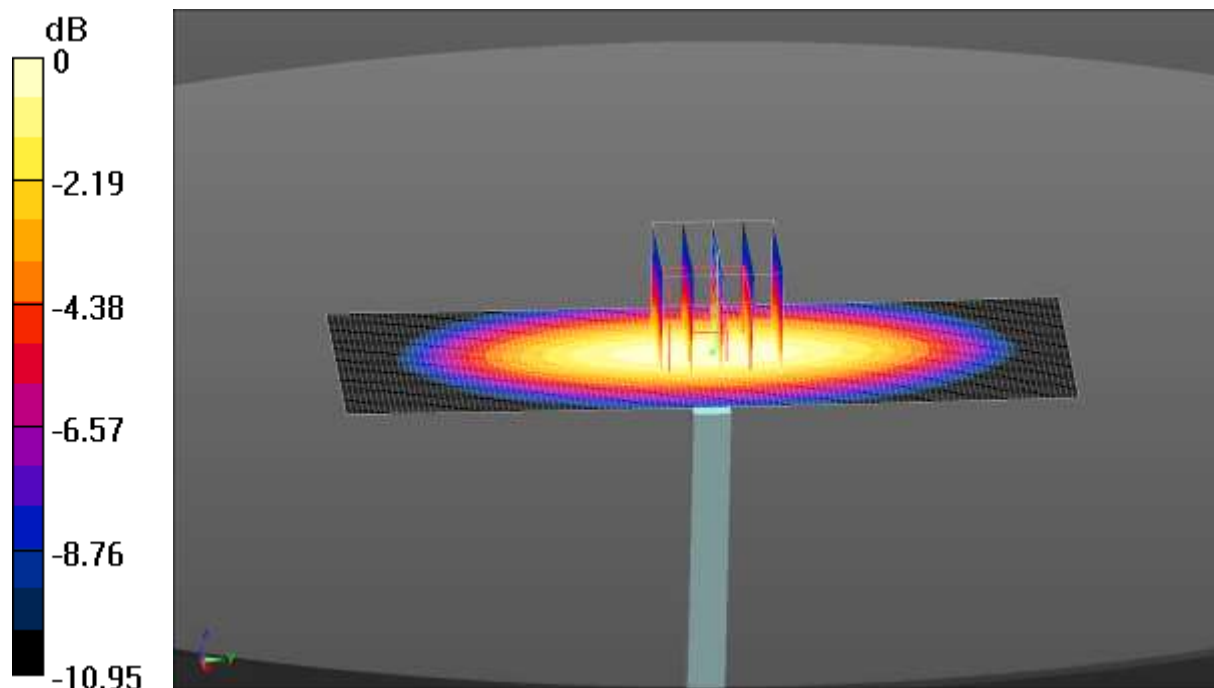

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.21.2019 08:28:45

DUT: Dipole 835 MHz ; Type: D835V2; Serial: SN:4d154


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 1.004 \text{ S/m}$; $\epsilon_r = 55.497$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.72, 9.72, 9.72); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 835 MHz Body Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Area Scan (41x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.09 W/kg

System Performance Check at Frequency 835 MHz Body Tissue/d=15mm, Pin=80 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 32.48 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.515 W/kg
 Maximum value of SAR (measured) = 1.02 W/kg

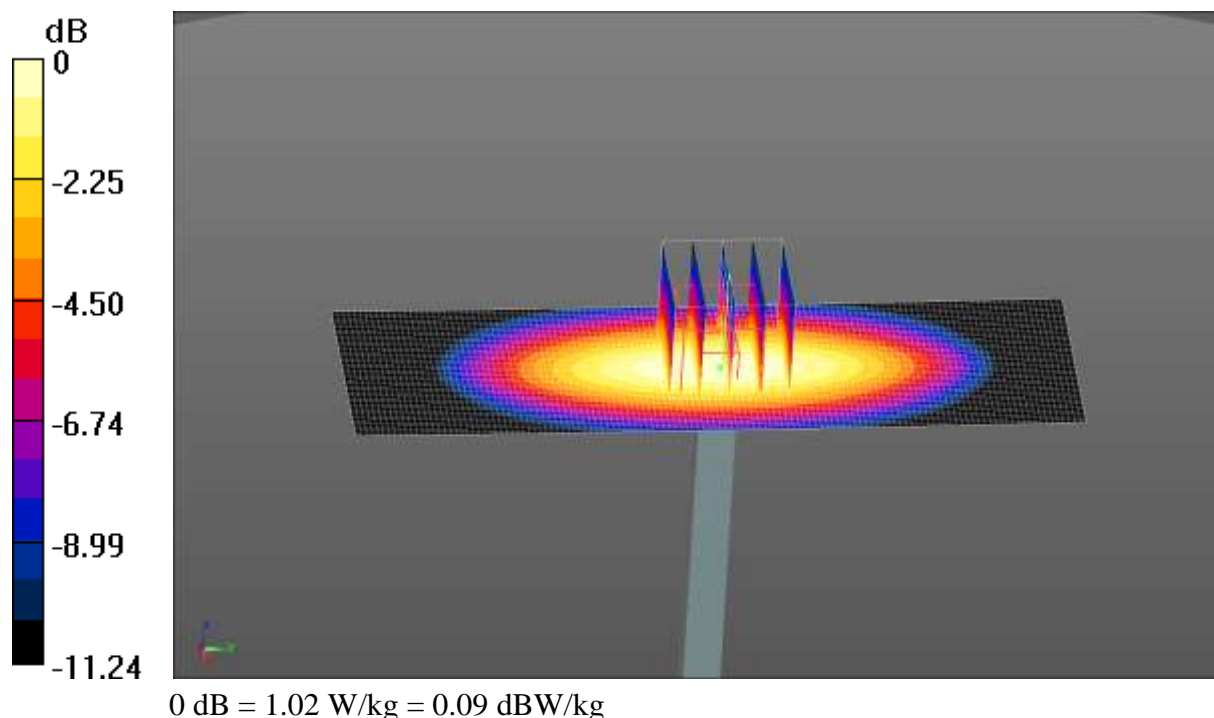

Test Laboratory: CCIS

Date/Time: 09.25.2019 08:21:32

DUT: Dipole 1800 MHz; Type: SID 1800; Serial: SN:09/15 DIP IG800-360

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.512 \text{ S/m}$; $\epsilon_r = 52.841$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(8.12, 8.12, 8.12); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 1800MHz Body Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 38.04 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 3.09 W/kg
SAR(1 g) = 1.58 W/kg; SAR(10 g) = 0.814 W/kg
 Maximum value of SAR (measured) = 2.29 W/kg

System Performance Check at Frequency 1800MHz Body Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (41x51x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 2.37 W/kg

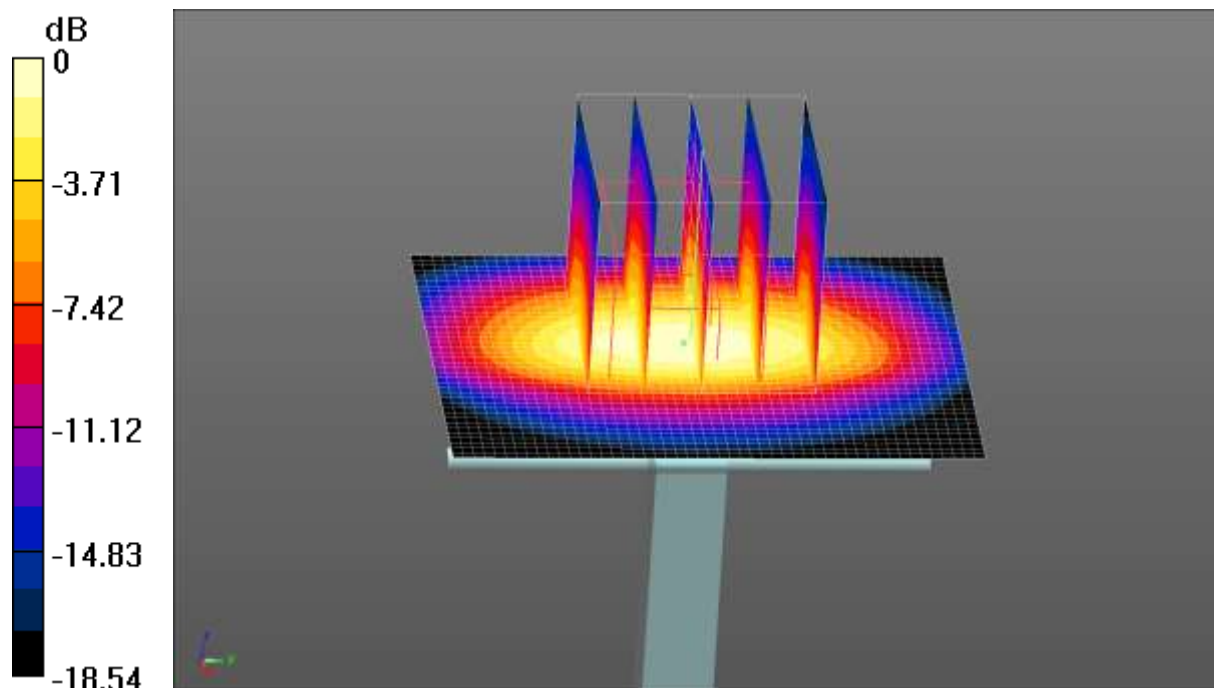

0 dB = 2.37 W/kg = 3.75 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.25.2019 08:04:57

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d175


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.552 \text{ S/m}$; $\epsilon_r = 52.438$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.83, 7.83, 7.83); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 1900MHz Body Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (41x51x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 2.78 W/kg

System Performance Check at Frequency 1900MHz Body Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 42.37 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 3.25 W/kg
SAR(1 g) = 1.64 W/kg; SAR(10 g) = 0.829 W/kg
 Maximum value of SAR (measured) = 2.49 W/kg

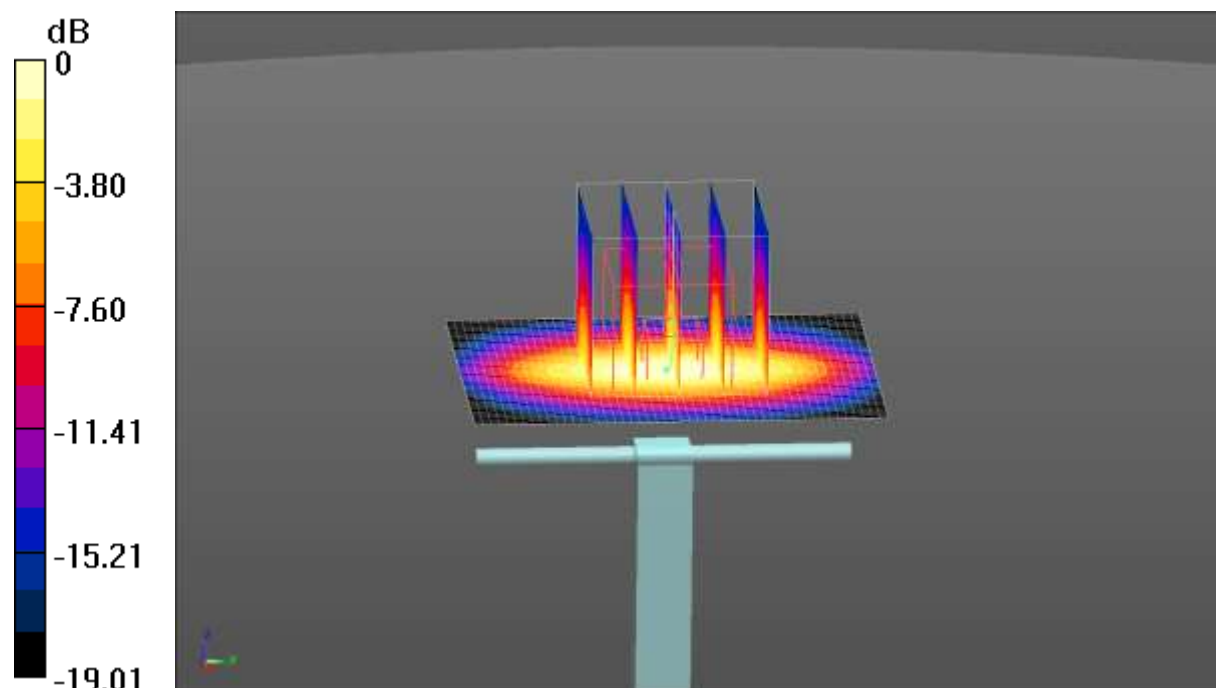

0 dB = 2.49 W/kg = 3.96 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.12.2019 17:41:51

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN:910

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.974 \text{ S/m}$; $\epsilon_r = 53.476$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.51, 7.51, 7.51); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 2450MHz Body Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.02 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 4.29 W/kg
SAR(1 g) = 2.11 W/kg; SAR(10 g) = 0.962 W/kg
 Maximum value of SAR (measured) = 3.12 W/kg

System Performance Check at Frequency 2450MHz Body Tissue/d=10mm, Pin=40 mW, dist=2.0mm (EX-Probe)/Area Scan (51x61x1): Interpolated grid:

dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 3.45 W/kg

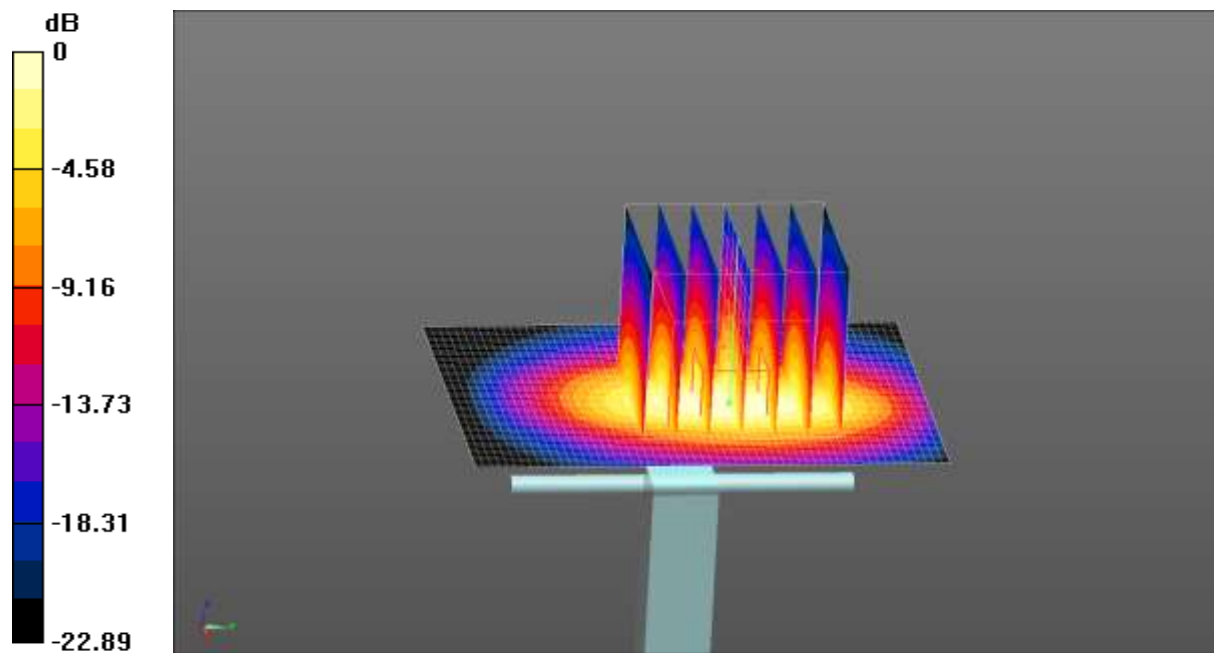

0 dB = 3.45 W/kg = 5.38 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.12.2019 18:05:08

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: SN:1114


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 2.208 \text{ S/m}$; $\epsilon_r = 51.283$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN3924; ConvF(7.26, 7.26, 7.26); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequency 2600MHz Body Tissue/d=10mm, Pin=40mW, dist=2.0mm(EX-Probe)/Area Scan (51x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 3.69 W/kg

System Performance Check at Frequency 2600MHz Body Tissue/d=10mm, Pin=40mW, dist=2.0mm(EX-Probe)/Zoom Scan(7X7X7) (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 38.14 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 4.59 W/kg
SAR(1 g) = 2.17 W/kg; SAR(10 g) = 0.962 W/kg
 Maximum value of SAR (measured) = 3.53 W/kg

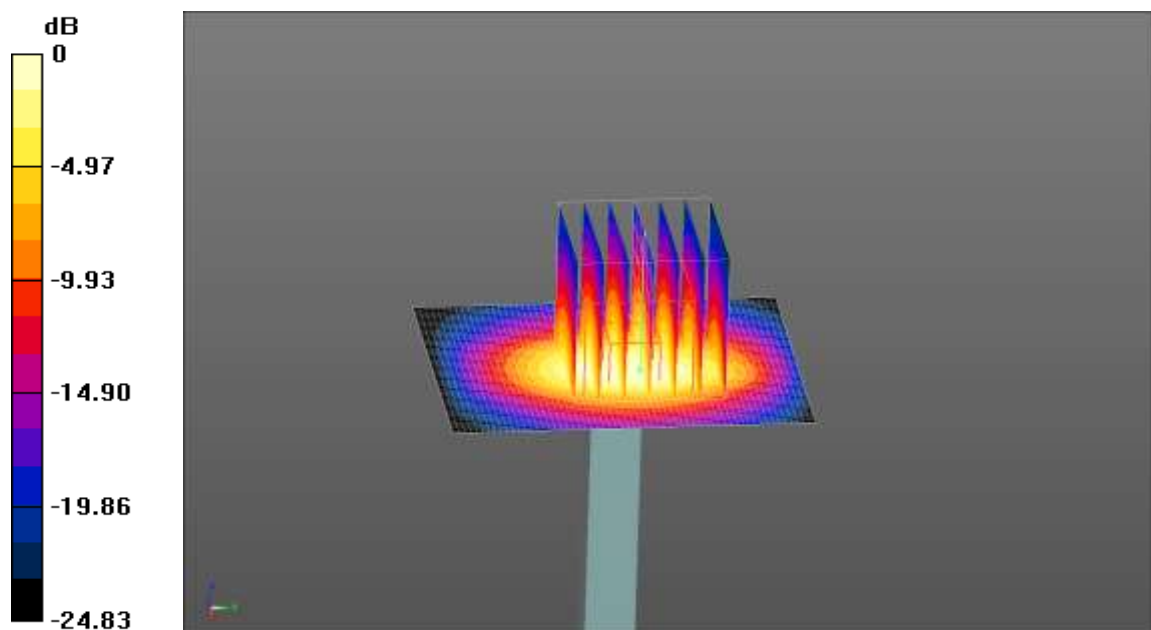

0 dB = 3.53 W/kg = 5.48 dBW/kg

Appendix B: Plots of SAR Test Data

Test Laboratory: CCIS

Date/Time: 09.16.2019 16:02:54

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#


Communication System: UID 0, GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8.30042
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.218$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.67, 9.67, 9.67); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM 850 Front to Face/Low Channel/Area Scan (61x91x1): Interpolated grid:
 $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 0.0459 W/kg

GSM 850 Front to Face/Low Channel/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 5.352 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.0550 W/kg
SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.021 W/kg
 Maximum value of SAR (measured) = 0.0455 W/kg

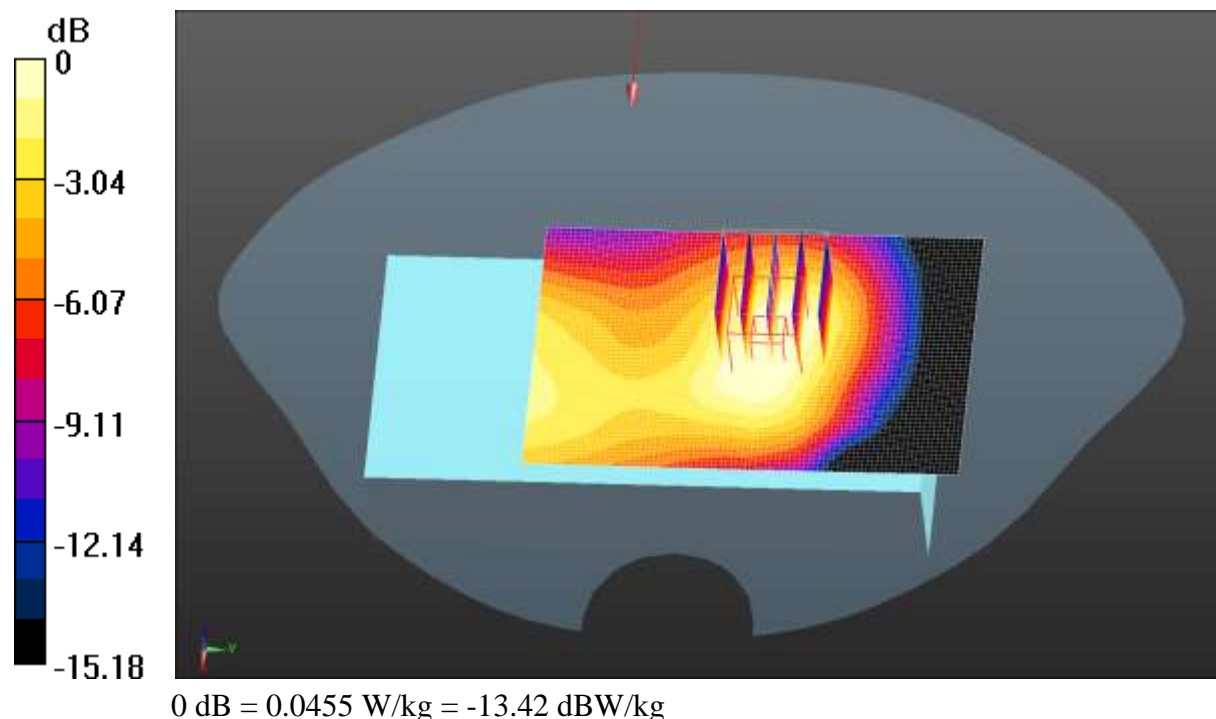

Test Laboratory: CCIS

Date/Time: 09.11.2019 12:02:57

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#


Communication System: UID 0, GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042
 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.425 \text{ S/m}$; $\epsilon_r = 39.504$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.17, 8.17, 8.17); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GSM 1900 Front to Face/High Channel/Area Scan (51x71x1): Interpolated grid:
 $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.619 W/kg

GSM 1900 Front to Face/High Channel/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.320 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.668 W/kg
SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.224 W/kg
 Maximum value of SAR (measured) = 0.553 W/kg

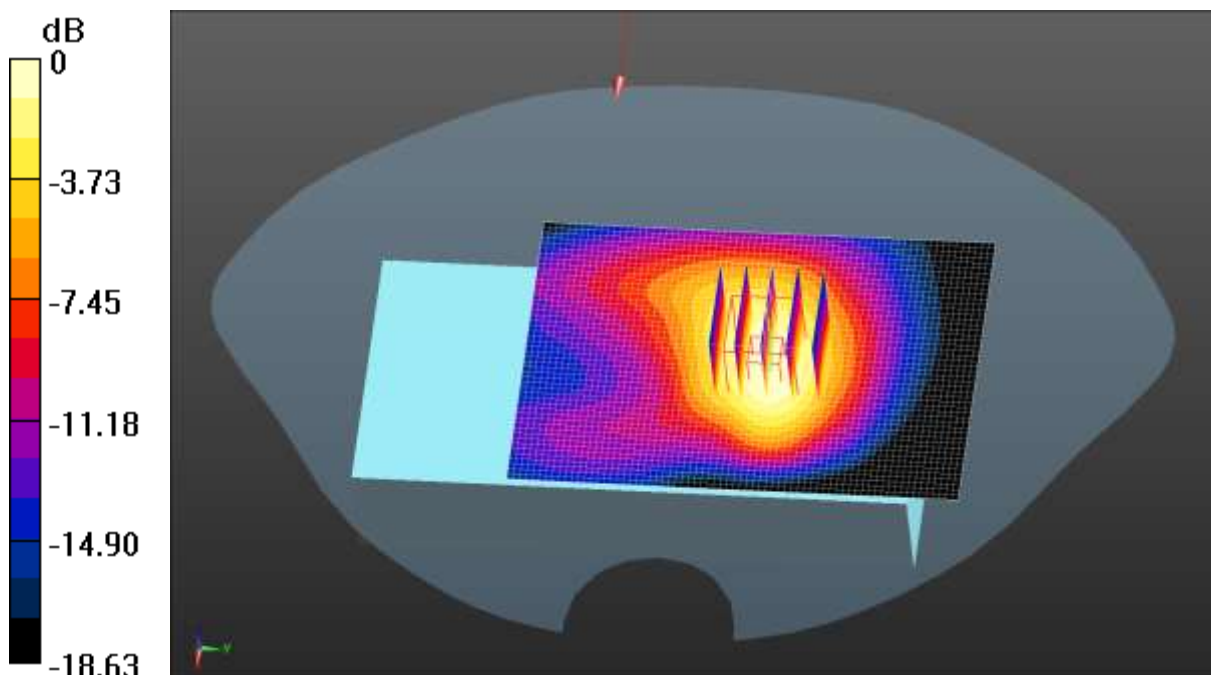

0 dB = 0.553 W/kg = -2.57 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.16.2019 16:21:40

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.158$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.67, 9.67, 9.67); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

WCDMA 850 Front to Face/Middle Channel/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0606 W/kg

WCDMA 850 Front to Face/Middle Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.817 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0546 W/kg

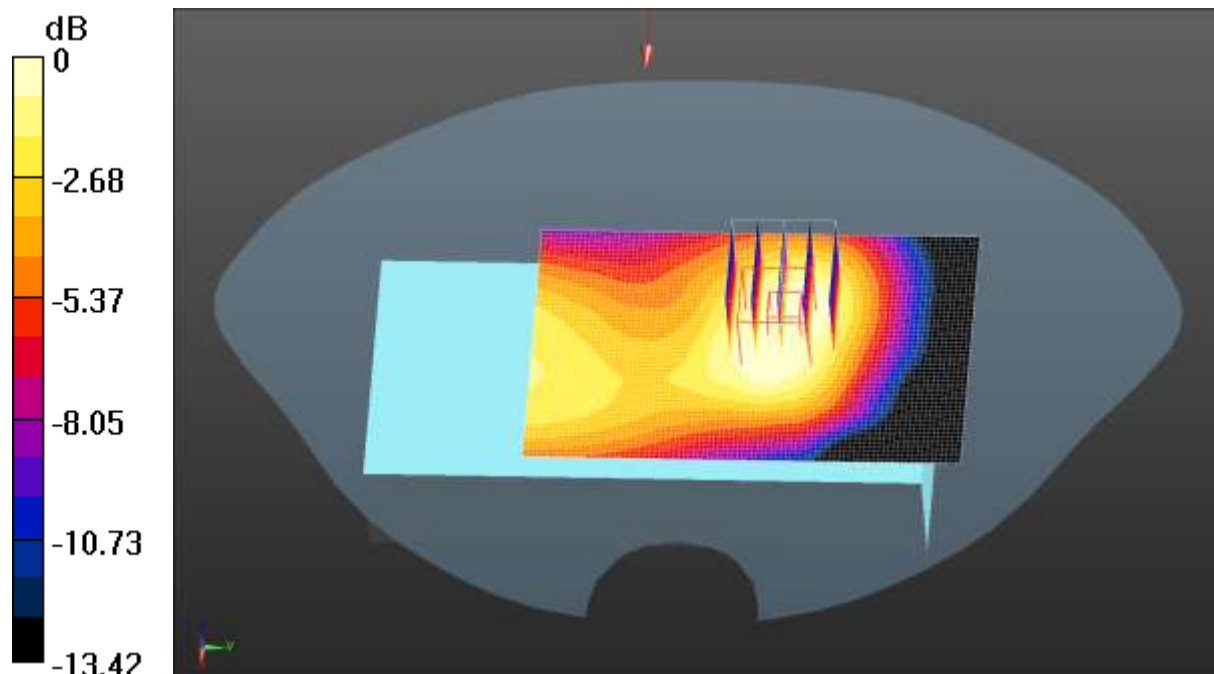

0 dB = 0.0546 W/kg = -12.63 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 13:31:24

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1


Medium parameters used: $f = 1880$ MHz; $\sigma = 1.413$ S/m; $\epsilon_r = 39.548$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.17, 8.17, 8.17); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

WCDMA 1900 Front to Face/Middle Channel/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.827 W/kg

WCDMA 1900 Front to Face/Middle Channel/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.351 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.951 W/kg
SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.322 W/kg
Maximum value of SAR (measured) = 0.789 W/kg

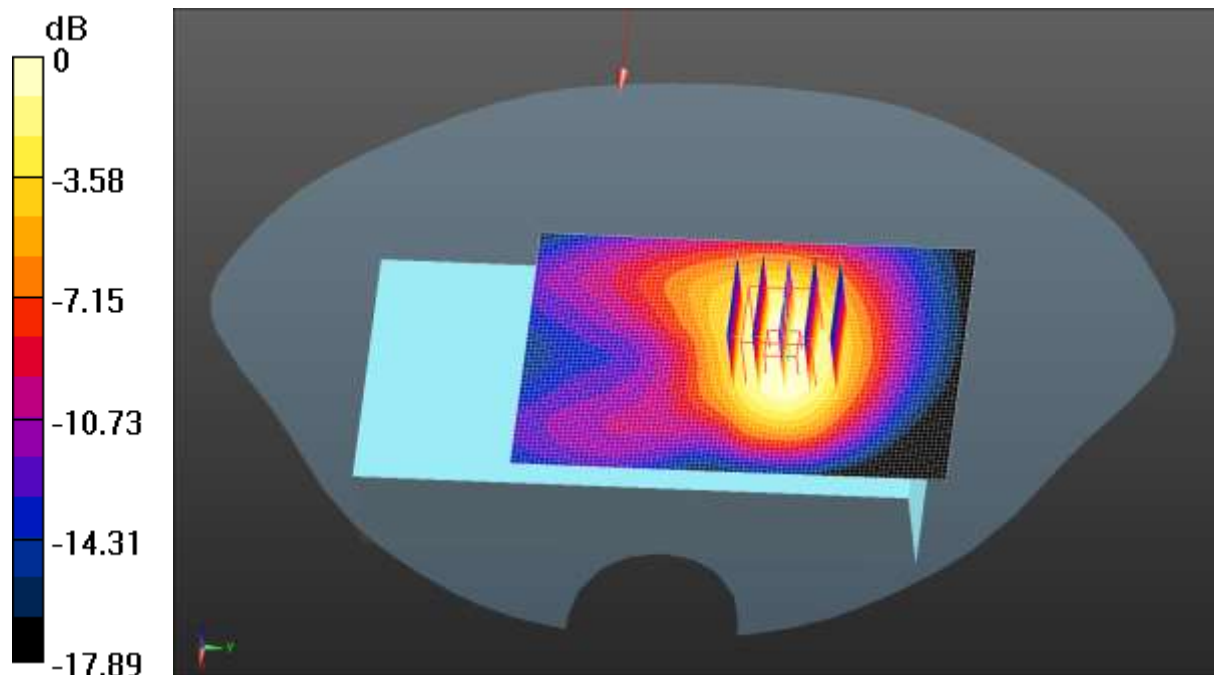

0 dB = 0.789 W/kg = -1.03 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 13:54:25

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 1900 MHz;
 Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.422 \text{ S/m}$; $\epsilon_r = 39.476$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(8.17, 8.17, 8.17); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 2 1RB(20MHz) Front to Face/High Channel/Area Scan (61x91x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.728 W/kg

LTE Band 2 1RB(20MHz) Front to Face/High Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.298 V/m ; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.847 W/kg
SAR(1 g) = 0.493 W/kg ; SAR(10 g) = 0.287 W/kg
 Maximum value of SAR (measured) = 0.702 W/kg

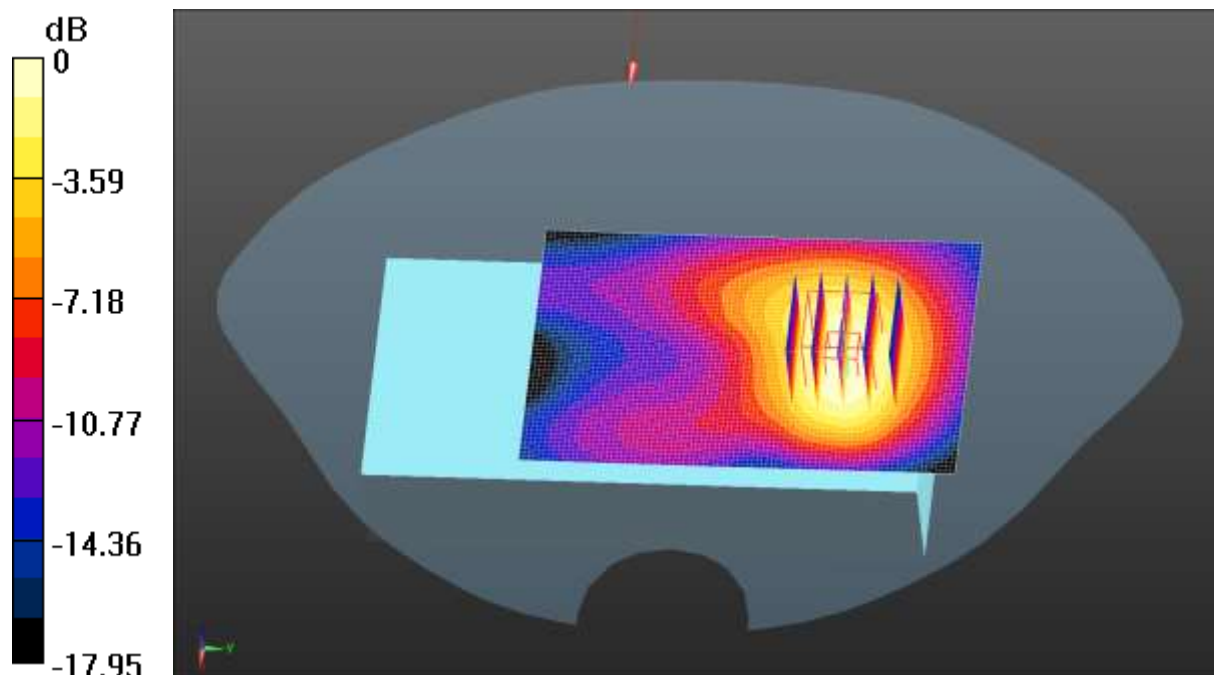

0 dB = 0.702 W/kg = -1.54 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 14:32:41

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 1720 MHz;

Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 41.108$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.4, 8.4, 8.4); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 4 1RB(20MHz) Front to Face/Low Channel/Area Scan (61x91x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.556 W/kg

LTE Band 4 1RB(20MHz) Front to Face/Low Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.177 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.534 W/kg

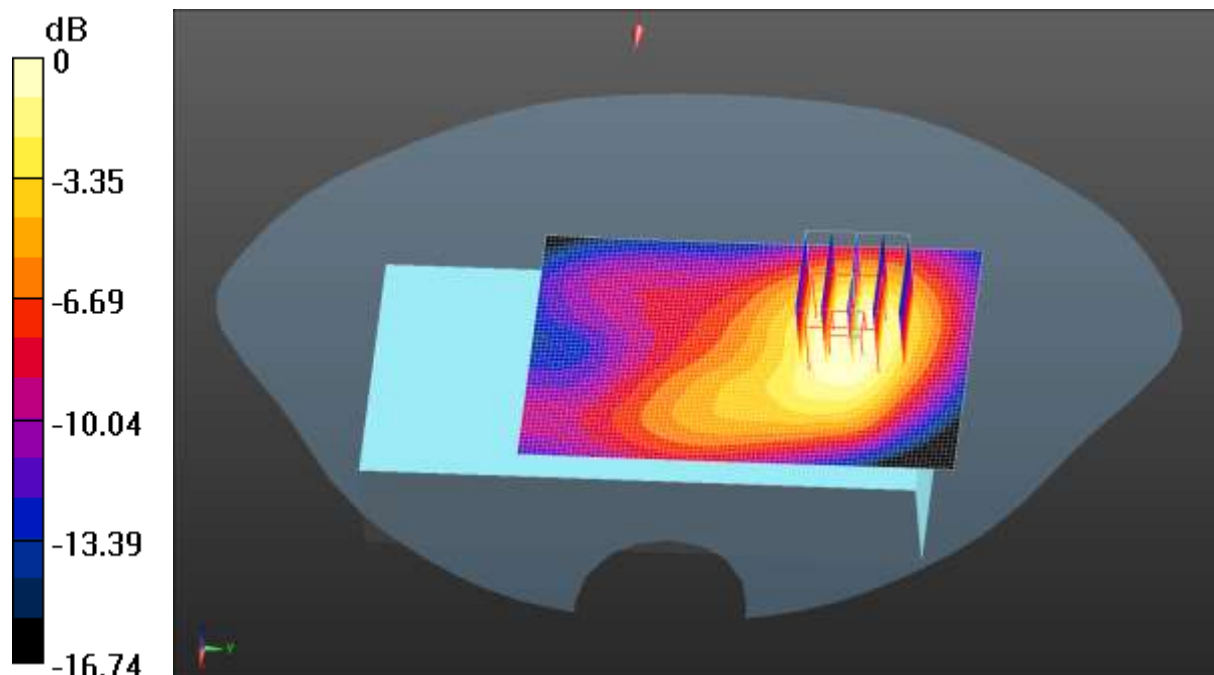

0 dB = 0.534 W/kg = -2.72 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 09:18:03

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 2560 MHz;

Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 38.826$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 7.3, 7.3); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 7 1RB(20MHz) Front to Face/High Channel/Area Scan (51x71x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.268 W/kg

LTE Band 7 1RB(20MHz) Front to Face/High Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.615 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

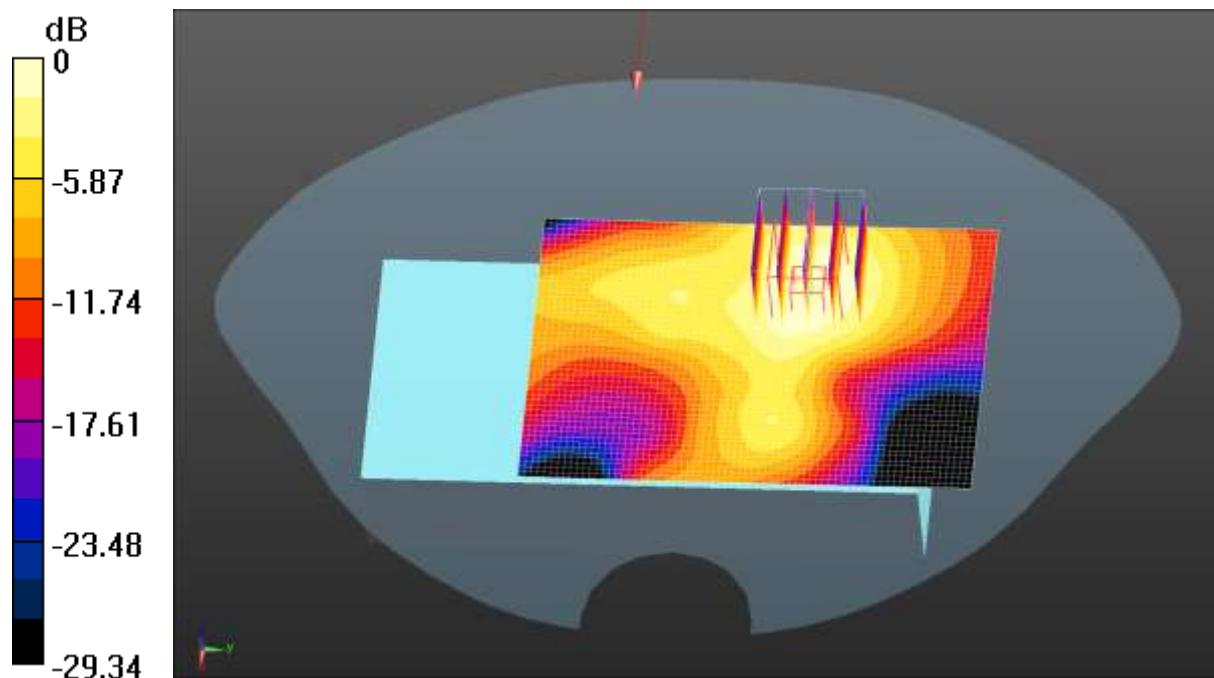

0 dB = 0.270 W/kg = -5.69 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.16.2019 16:45:31

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.853 \text{ S/m}$; $\epsilon_r = 42.927$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10.07, 10.07, 10.07); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 17 1RB(10MHz) Front to Face/High Channel/Area Scan (61x91x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.00550 W/kg

LTE Band 17 1RB(10MHz) Front to Face/High Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.068 V/m; Power Drift = 0.23 dB

Peak SAR (extrapolated) = 0.00977 W/kg

SAR(1 g) = 0.00238 W/kg; SAR(10 g) = 0.00129 W/kg

Maximum value of SAR (measured) = 0.00387 W/kg

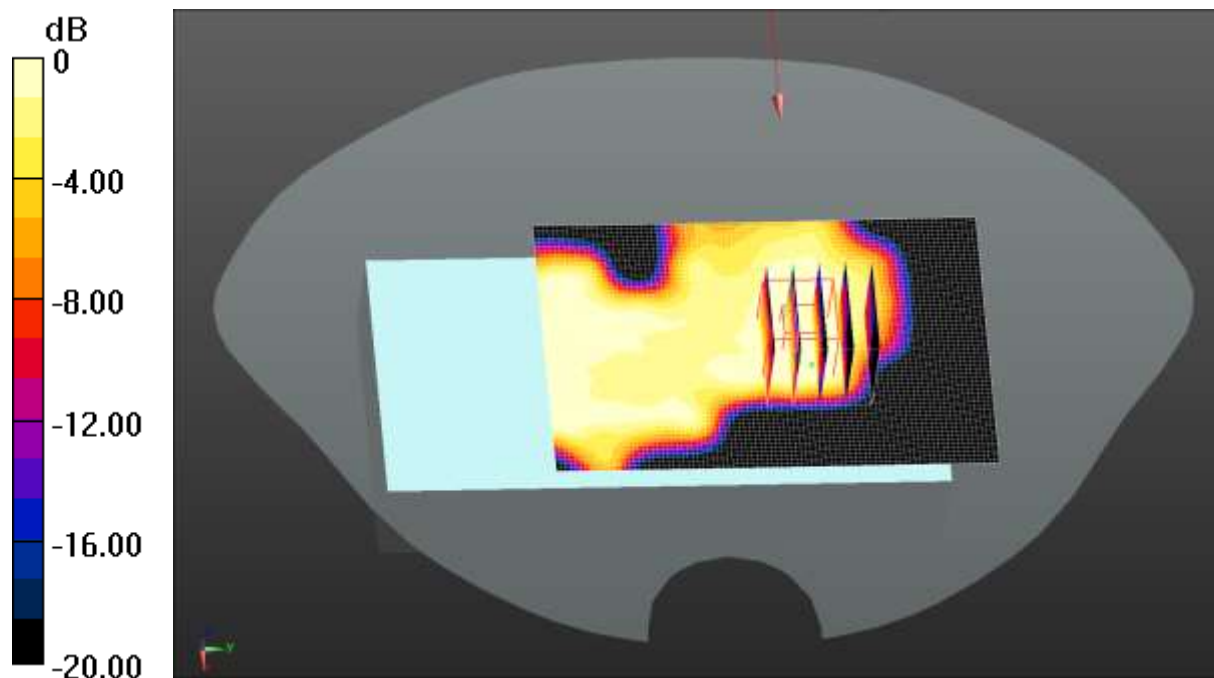

0 dB = 0.00387 W/kg = -24.12 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 09:54:19

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-TDD(USA) 20MHz 1RB QPSK (0); Frequency: 2680 MHz; Duty Cycle: 1:1.59956
 Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.015$ S/m; $\epsilon_r = 38.523$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.3, 7.3, 7.3); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 1RB(20MHz) Front to Face/High Channel/Area Scan (51x71x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.129 W/kg

LTE Band 41 1RB(20MHz) Front to Face/High Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.992 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.162 W/kg
SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.041 W/kg
 Maximum value of SAR (measured) = 0.128 W/kg

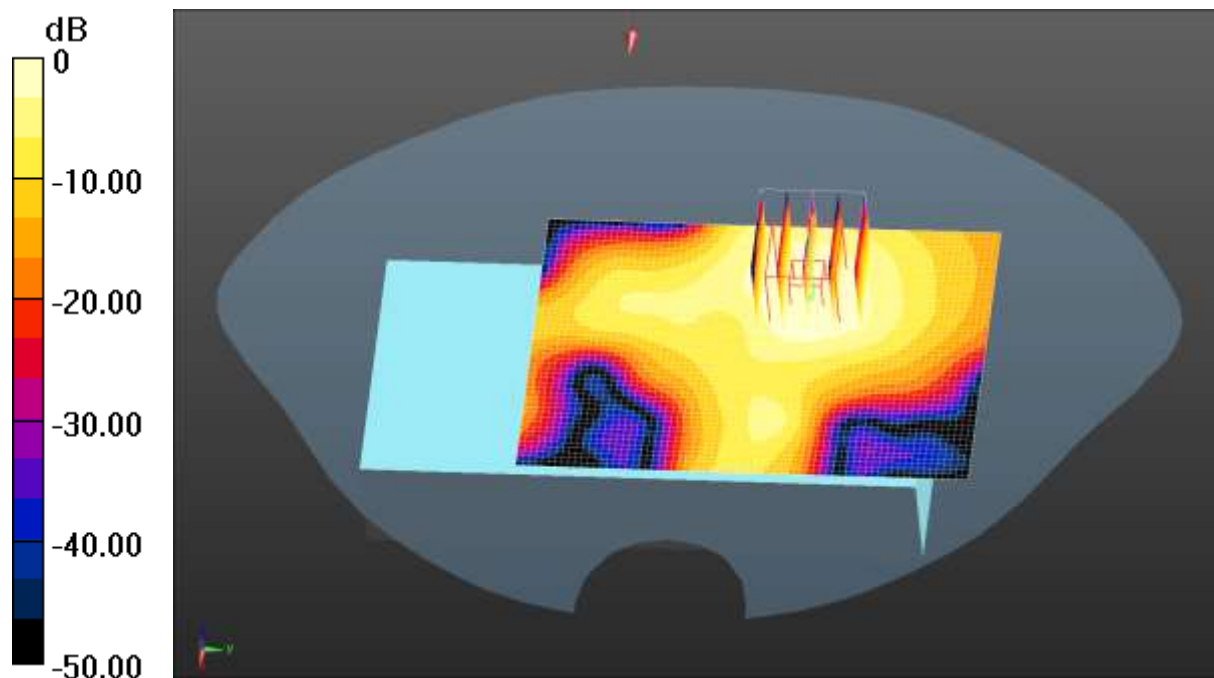

0 dB = 0.128 W/kg = -8.93 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 14:12:02

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-FDD(USA) 20MHz 50%RB QPSK (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.405 \text{ S/m}$; $\epsilon_r = 39.604$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.17, 8.17, 8.17); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 2 50%RB(20MHz) Front to Face/Low Channel/Area Scan

(61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.611 W/kg

LTE Band 2 50%RB(20MHz) Front to Face/Low Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.322 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.412 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.588 W/kg

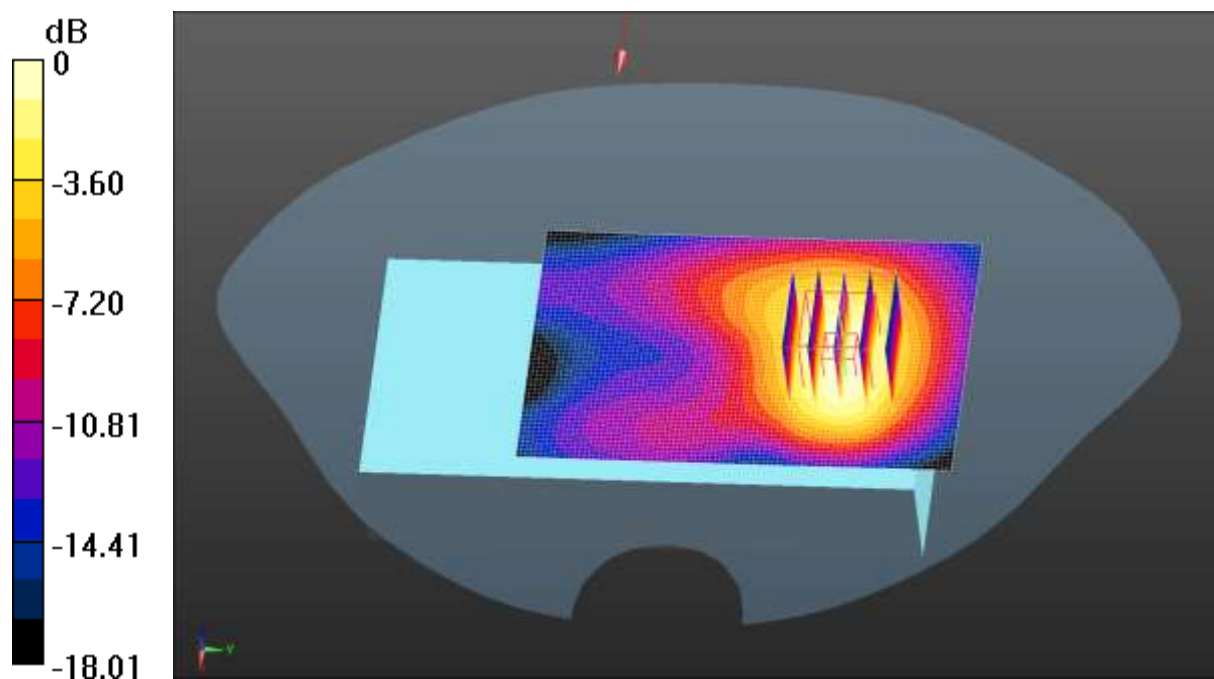

0 dB = 0.588 W/kg = -2.31 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.11.2019 14:48:07

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-FDD(USA) 20MHz 50%RB QPSK (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720 \text{ MHz}$; $\sigma = 1.329 \text{ S/m}$; $\epsilon_r = 41.108$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.4, 8.4, 8.4); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 4 50%RB(20MHz) Front to Face/Low Channel/Area Scan

(61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.454 W/kg

LTE Band 4 50%RB(20MHz) Front to Face/Low Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.198 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

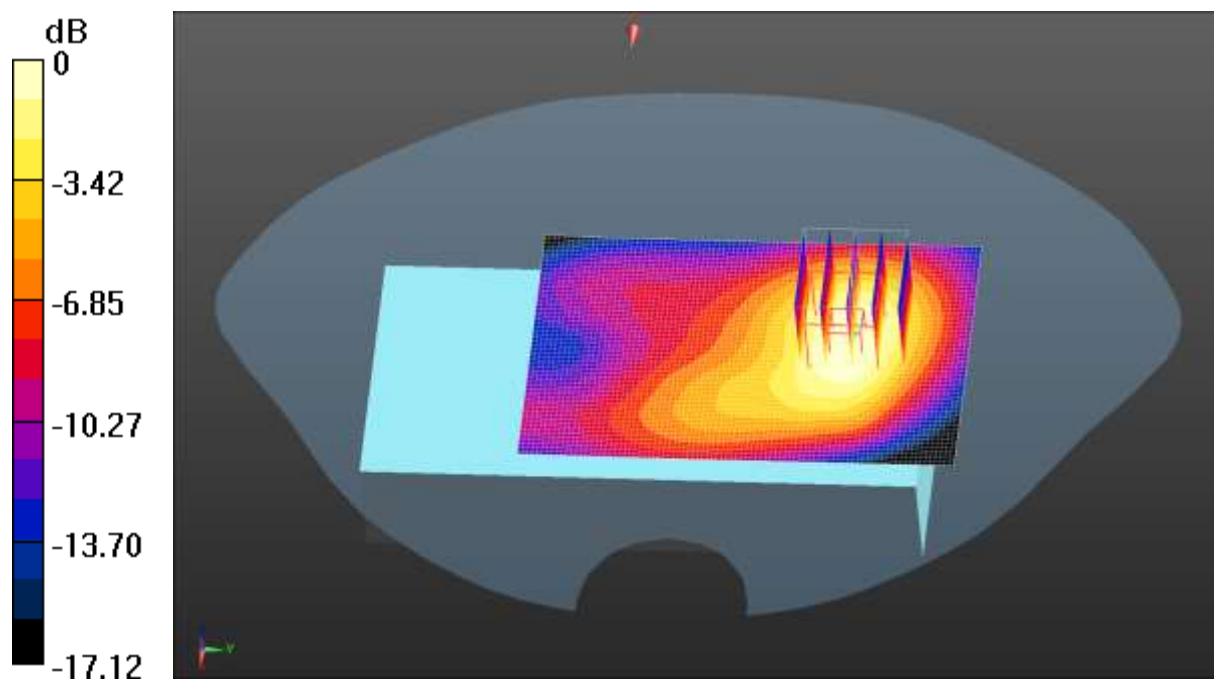

0 dB = 0.437 W/kg = -3.60 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 09:35:45

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-FDD(USA) 20MHz 50%RB QPSK (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 38.826$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 7.3, 7.3); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 7 50%RB(20MHz) Front to Face/High Channel/Area Scan

(51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.210 W/kg

LTE Band 7 50%RB(20MHz) Front to Face/High Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.688 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

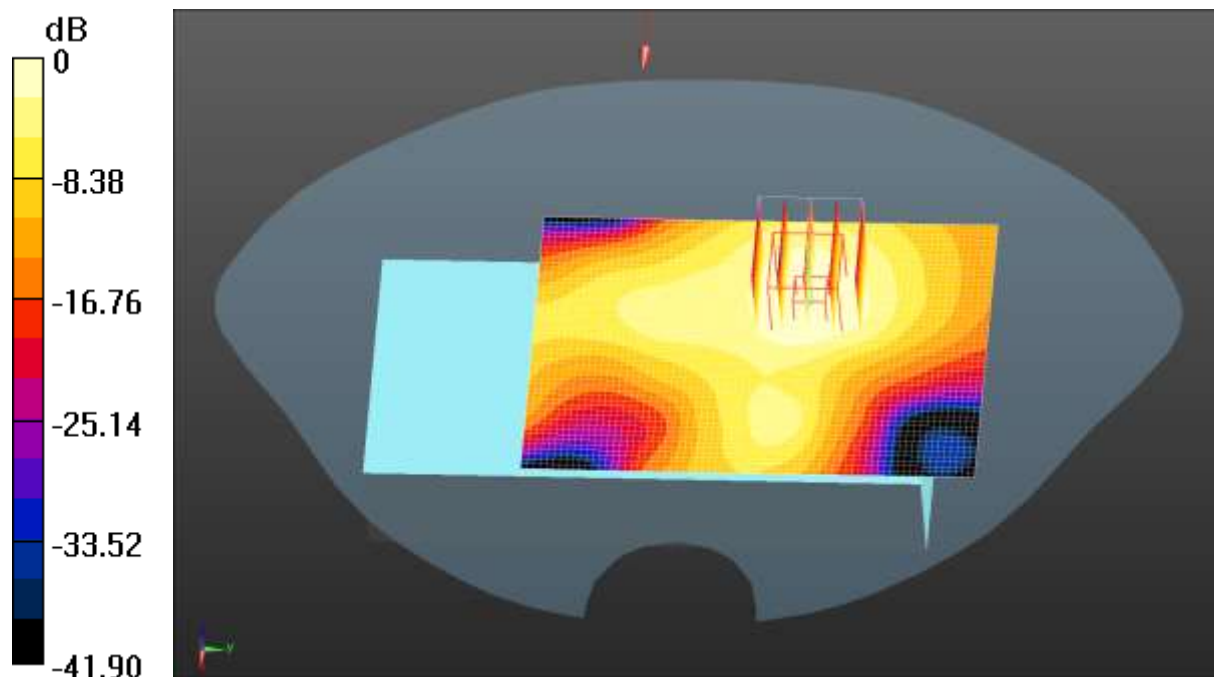

0 dB = 0.193 W/kg = -7.14 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.16.2019 17:04:59

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-FDD (USA) 10MHz 50%RB QPSK (0); Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 709 \text{ MHz}$; $\sigma = 0.849 \text{ S/m}$; $\epsilon_r = 42.956$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(10.07, 10.07, 10.07); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 17 50%RB(10MHz) Front to Face/Low Channel/Area Scan

(61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.00578 W/kg

LTE Band 17 50%RB(10MHz) Front to Face/Low Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.293 V/m; Power Drift = -0.28 dB

Peak SAR (extrapolated) = 0.00781 W/kg

SAR(1 g) = 0.00236 W/kg; SAR(10 g) = 0.000617 W/kg

Maximum value of SAR (measured) = 0.00473 W/kg

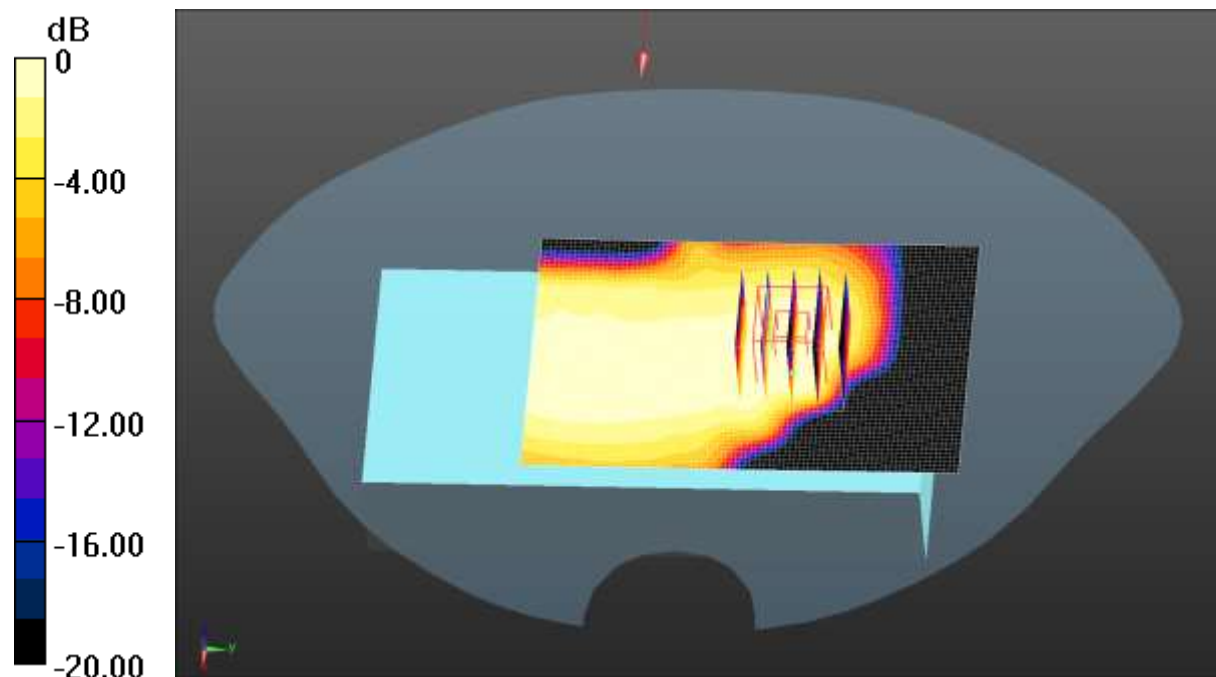

0 dB = 0.00473 W/kg = -23.25 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 10:16:50

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-TDD(USA) 20MHz 50%RB QPSK (0); Frequency: 2680 MHz; Duty Cycle: 1:1.59956

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.015$ S/m; $\epsilon_r = 38.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.3, 7.3, 7.3); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 41 50%RB(20MHz) Front to Face/High Channel/Area Scan

(51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.104 W/kg

LTE Band 41 50%RB(20MHz) Front to Face/High Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.777 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

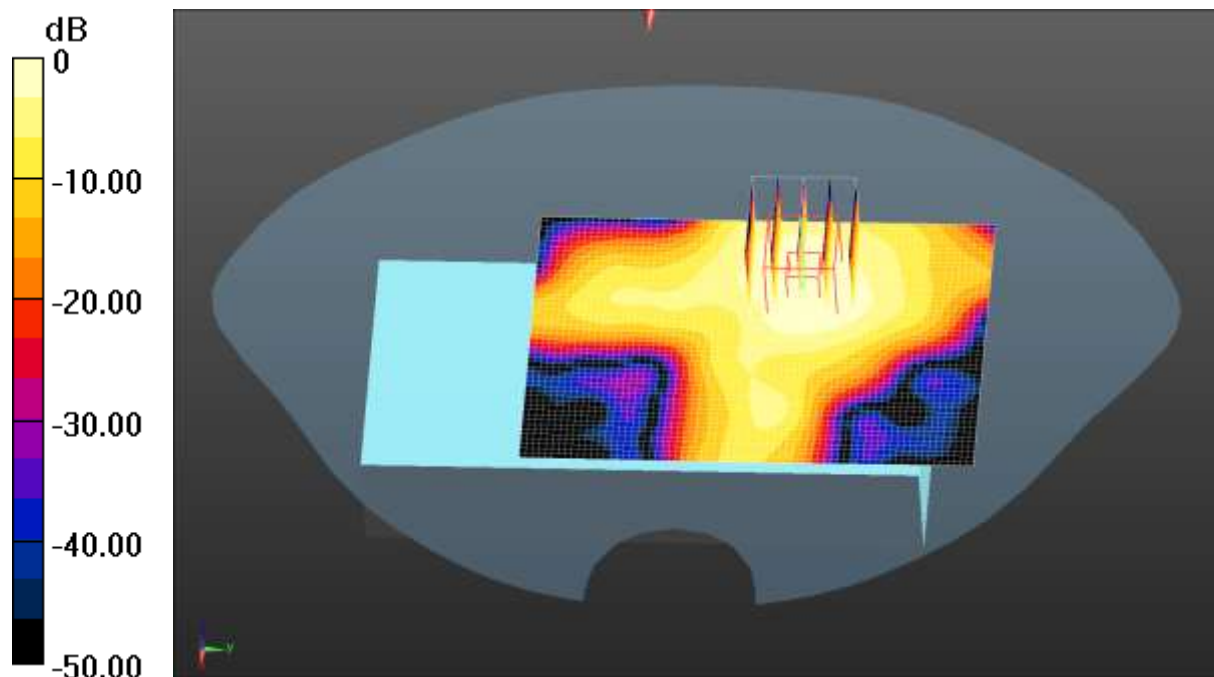

0 dB = 0.103 W/kg = -9.87 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.23.2019 08:54:21

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#


Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);
 Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 39.873$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.54, 7.54, 7.54); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: SAM 5.0; Type: QD000P40CD; Serial: TP:1765
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

WIFI Front to Face/Middle Channel/Area Scan (51x81x1): Interpolated grid:
 $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 0.0455 W/kg

WIFI Front to Face/Middle Channel/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 2.216 V/m; Power Drift = -0.31 dB
 Peak SAR (extrapolated) = 0.0640 W/kg
SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.015 W/kg
 Maximum value of SAR (measured) = 0.0489 W/kg

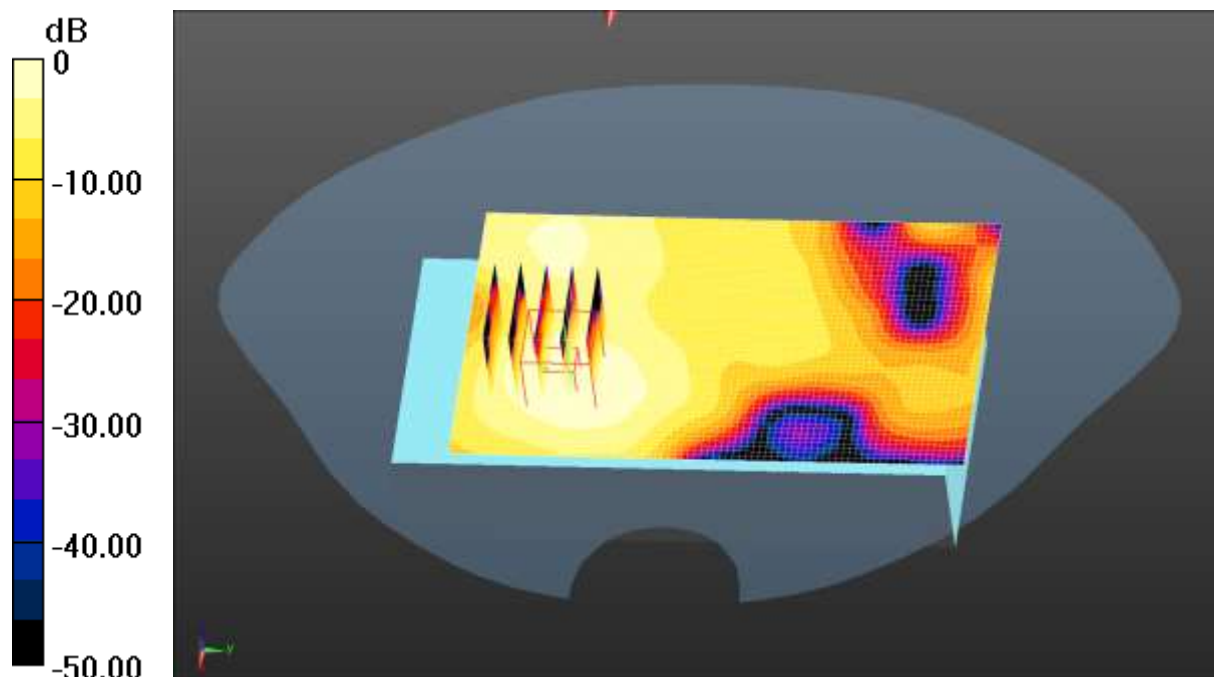

0 dB = 0.0489 W/kg = -13.11 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.21.2019 09:39:27

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, GPRS(4 Slots) (0); Frequency: 824.2 MHz; Duty Cycle: 1:1.99986

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.994$ S/m; $\epsilon_r = 55.602$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.72, 9.72, 9.72); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GPRS 850 4Slots Extremity Bottom/Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.81 V/m; Power Drift = -0.24 dB

Peak SAR (extrapolated) = 1.18 W/kg


SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

GPRS 850 4Slots Extremity Bottom/Low Channel/Area Scan (41x61x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.609 W/kg

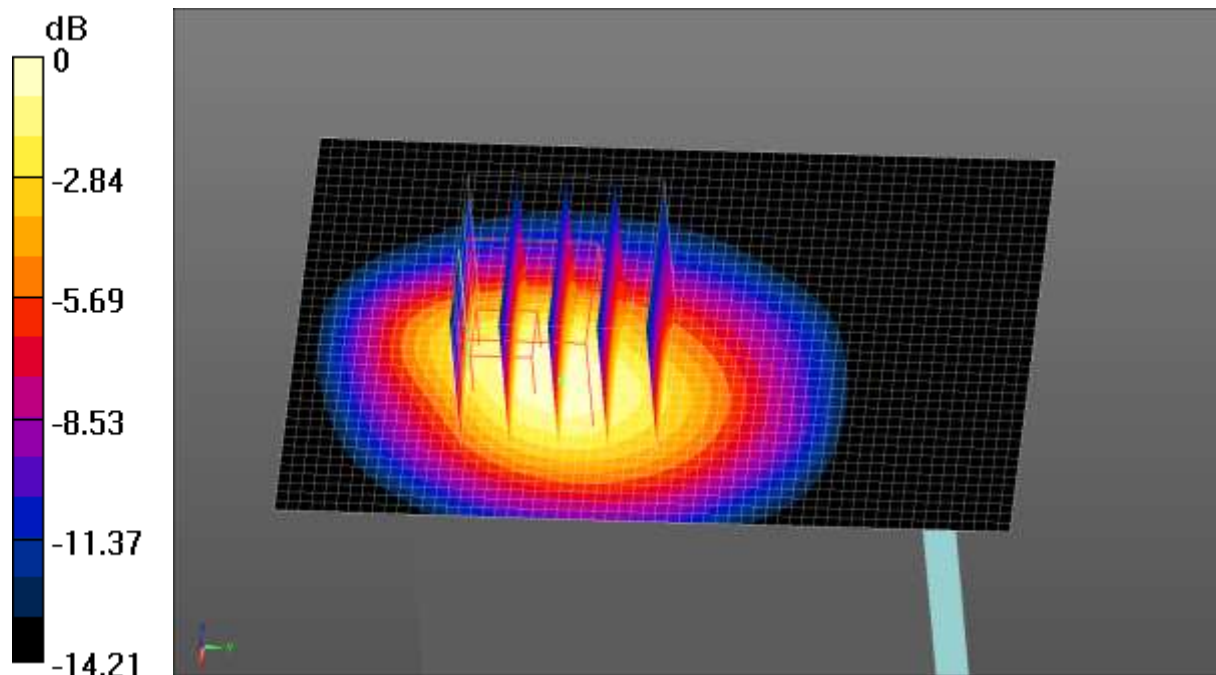

0 dB = 0.609 W/kg = -2.15 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.25.2019 09:01:03

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, GPRS(4 Slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:1.99986

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.558 \text{ S/m}$; $\epsilon_r = 52.421$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.83, 7.83, 7.83); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

GPRS 1900 4Slots Extremity Front/High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.26 V/m; Power Drift = -0.34 dB

Peak SAR (extrapolated) = 2.57 W/kg


SAR(1 g) = 1.61 W/kg; SAR(10 g) = 0.925 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

GPRS 1900 4Slots Extremity Front/High Channel/Area Scan (51x71x1):

Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.17 W/kg

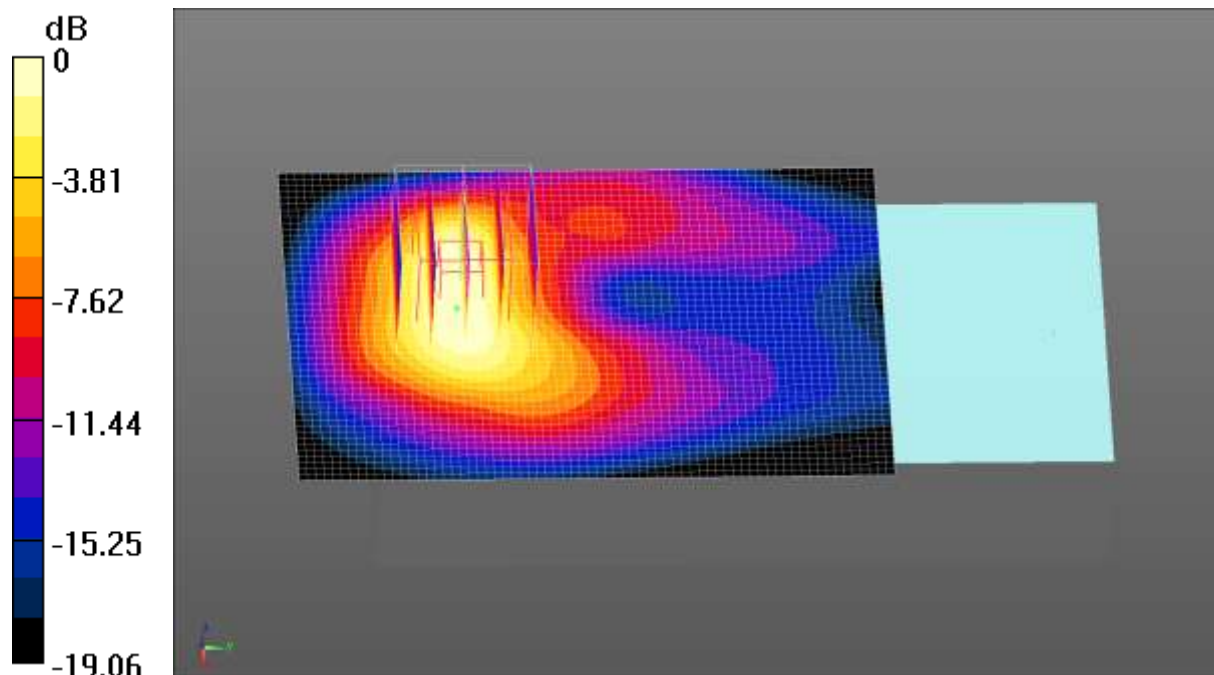

0 dB = 2.17 W/kg = 3.36 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.21.2019 10:30:40

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 55.497$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(9.72, 9.72, 9.72); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

WCDMA 850 Extremity Bottom/Middle Channel/Area Scan (41x51x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.589 W/kg

WCDMA 850 Extremity Bottom/Middle Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.85 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.722 W/kg

SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.504 W/kg

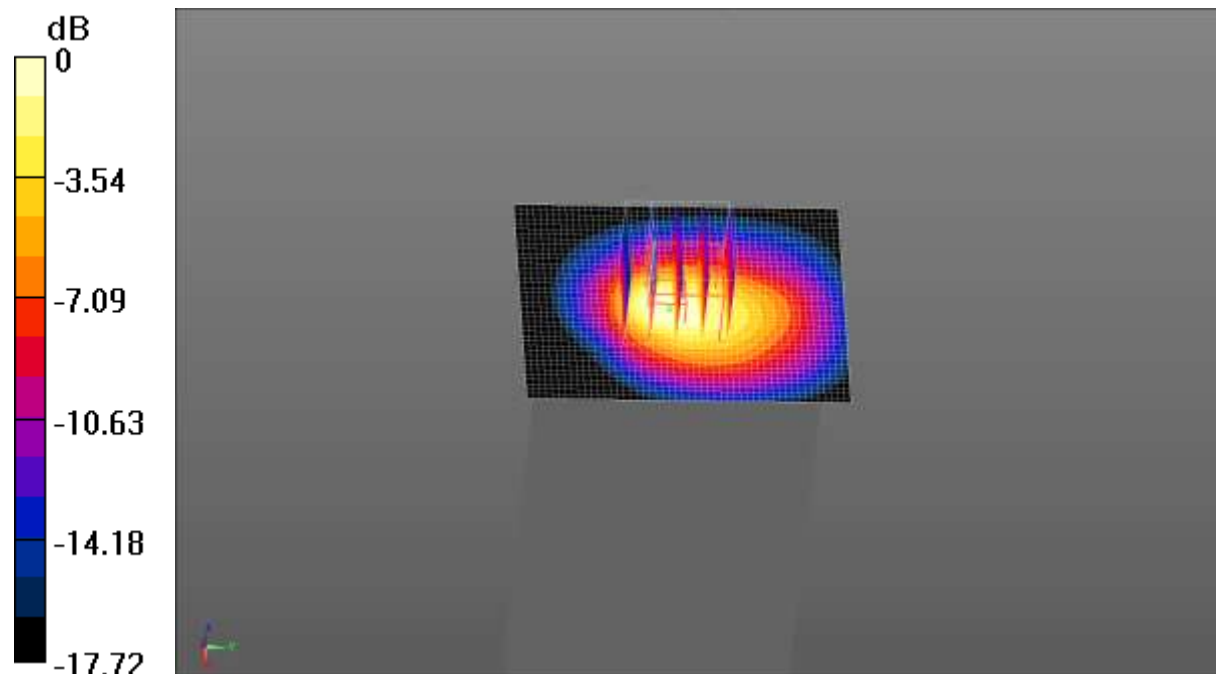

0 dB = 0.504 W/kg = -2.98 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.25.2019 09:42:11

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.541$ S/m; $\epsilon_r = 52.562$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3924; ConvF(7.83, 7.83, 7.83); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

WCDMA 1900 Extremity Front/Middle Channel/Area Scan (61x91x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.17 W/kg

WCDMA 1900 Extremity Front/Middle Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 32.32 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.41 W/kg
SAR(1 g) = 1.46 W/kg; SAR(10 g) = 0.827 W/kg
Maximum value of SAR (measured) = 2.03 W/kg

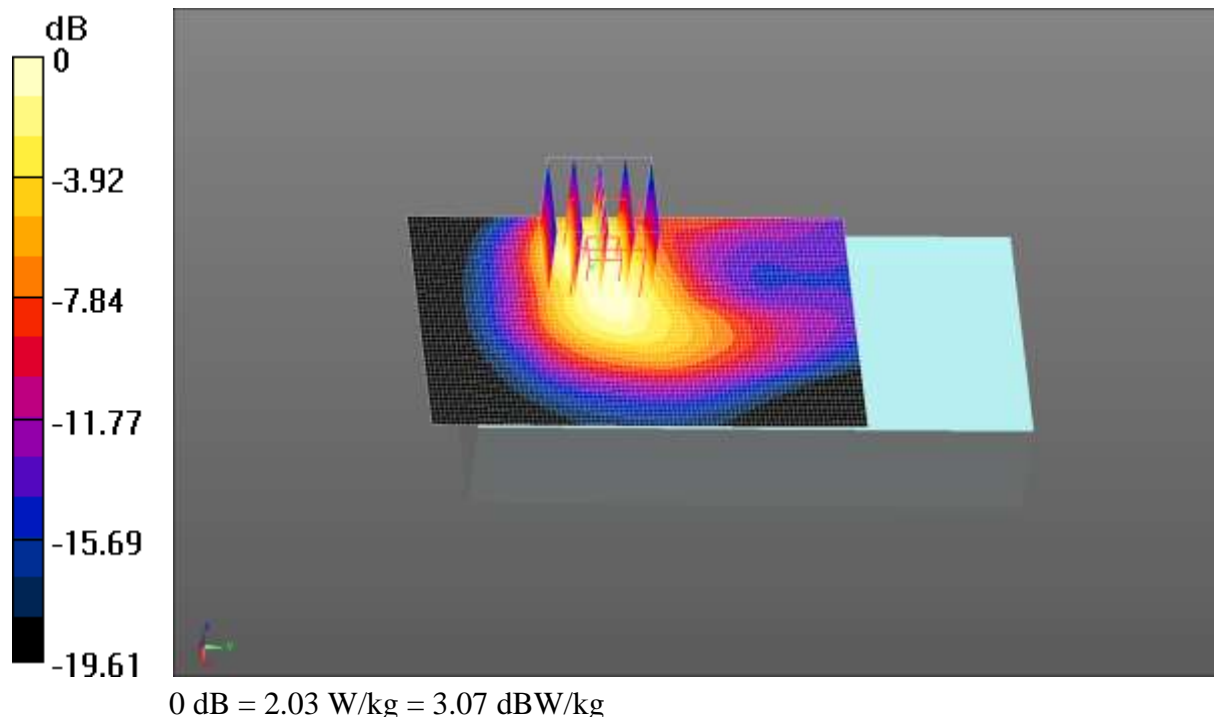

Test Laboratory: CCIS

Date/Time: 09.25.2019 10:36:02

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 1900 MHz;
 Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.552 \text{ S/m}$; $\epsilon_r = 52.438$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(7.83, 7.83, 7.83); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 2 1RB(20MHz) Extremity Front/High Channel/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.357 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.29 W/kg


SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.762 W/kg

Maximum value of SAR (measured) = 1.93 W/kg

LTE Band 2 1RB(20MHz) Extremity Front/High Channel/Area Scan

(61x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.06 W/kg

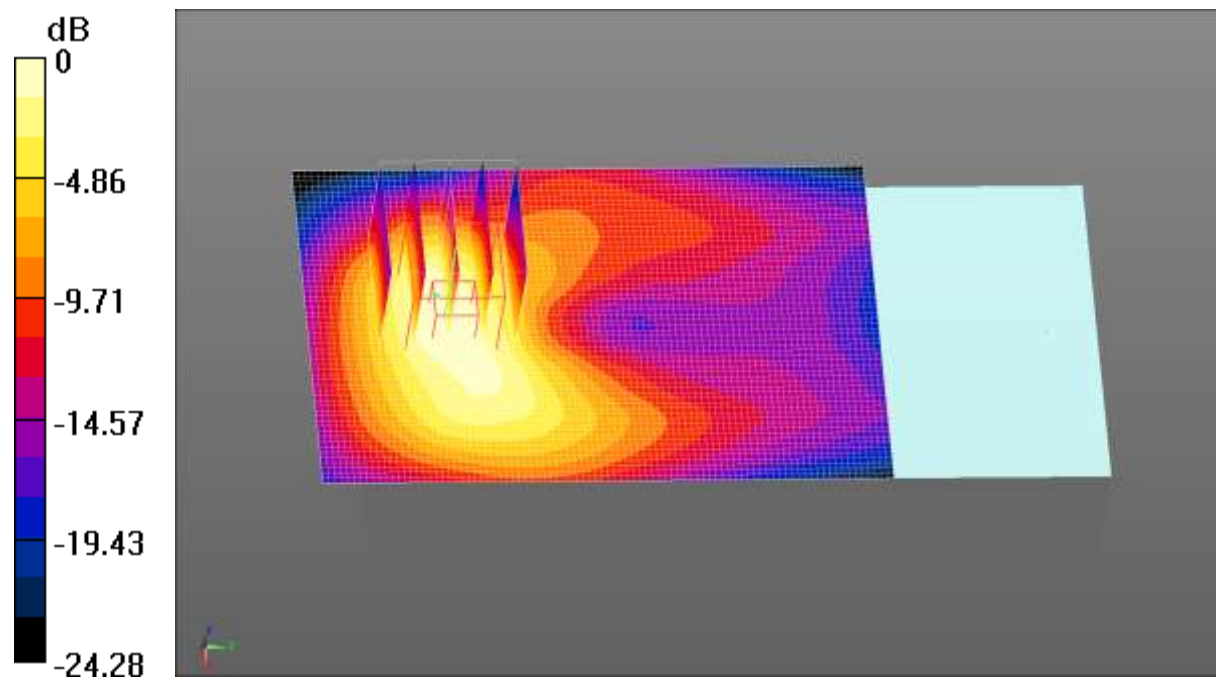

0 dB = 2.06 W/kg = 3.14 dBW/kg

Test Laboratory: CCIS

Date/Time: 09.25.2019 12:18:59

DUT: Handheld RFID Reader; Type: LP-006-GI; Serial: 1#

Communication System: UID 0, LTE-Fdd(USA) 1RB QPSK (0); Frequency: 1720 MHz;

Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.467$ S/m; $\epsilon_r = 53.419$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3924; ConvF(8.12, 8.12, 8.12); Calibrated: 08.30.2019;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1373; Calibrated: 08.09.2019
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1208
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

LTE Band 4 1RB(20MHz) Extremity Front/Low Channel/Area Scan

(61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.60 W/kg

LTE Band 4 1RB(20MHz) Extremity Front/Low Channel/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.98 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.663 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

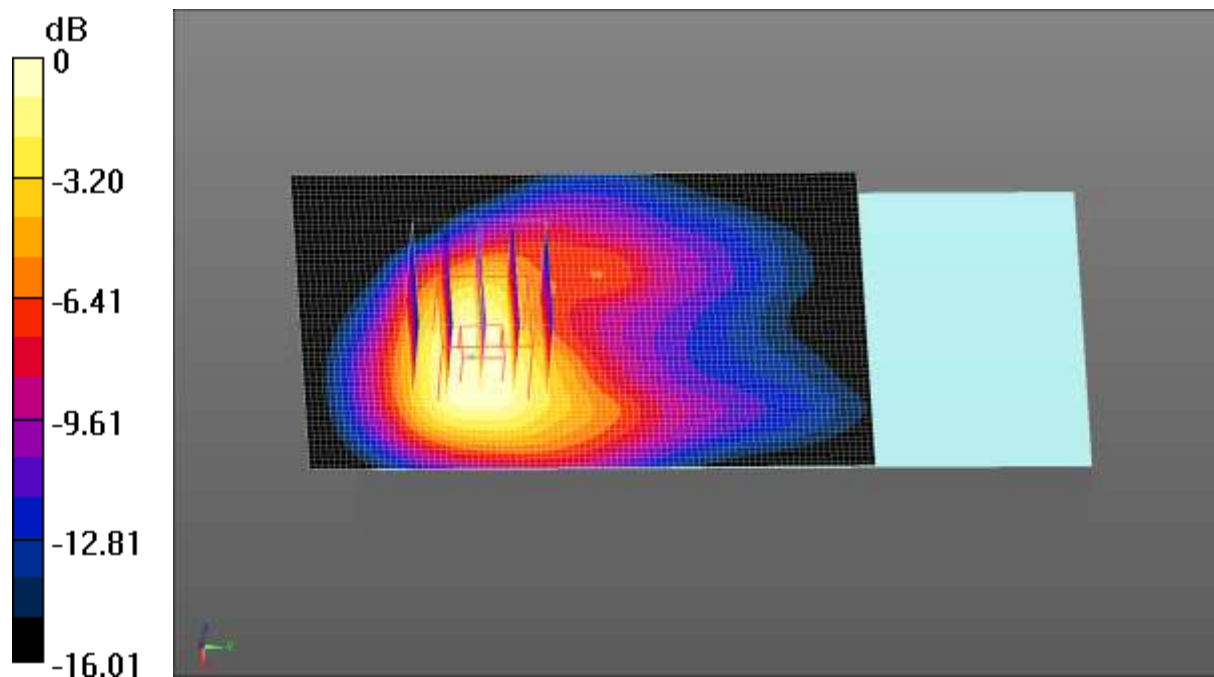

0 dB = 1.55 W/kg = 1.90 dBW/kg