

FCC/ISED - TEST REPORT

Report Number : **68.950.23.0491.01** Date of Issue: **2023-08-28**

Model/HVIN : **M200**

Product Type : Dash Cam

Applicant : 70mai Co., Ltd.

Address : Room 2220, building 2, No. 588, Zixing road, MinHang District,
Shanghai, CHINA

Manufacturer : 70mai Co., Ltd.

Address : Room 2220, building 2, No. 588, Zixing road, MinHang District,
Shanghai, CHINA

Test Result : **Positive** Negative

Total pages including
Appendices : **65**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks	7
7	Test Setups	8
8	Systems Test Configuration	9
9	Technical Requirement	10
9.1	Conducted Output Power & EIRP	10
9.2	6dB Bandwidth and 99% Occupied Bandwidth.....	12
9.3	Power Spectral Density	22
9.4	Spurious RF Conducted Emissions	27
9.5	Band Edge Testing.....	41
9.6	Spurious Radiated Emissions for Transmitter.....	45
10	Test Equipment List.....	64
11	System Measurement Uncertainty	65

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,
Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

3 Description of the Equipment Under Test

Product:	Dash Cam
Model no.:	M200
Hardware Version Identification No. (HVIN)	M200
Product Marketing Name (PMN)	M200
Brand name:	70mai
FCC ID:	2AOK9-M200
IC:	28033-M200
Options and accessories:	Car charger
Rating:	5VDC, 2.4A (powered by car charger) or 3.7VDC, 300mAh powered by rechargeable Li-ion battery
Battery information:	Rechargeable Li-ion Battery Model: HCC1330 Rated:3.7VDC 300mAh/1.11Wh
RF Transmission Frequency:	2412MHz-2462MHz for 802.11b/g/n20/n40 (Wi-Fi)
No. of Operated Channel:	11 for 802.11b/g/n20 (Wi-Fi) 7 for 802.11n40 (Wi-Fi)
Modulation:	DSSS, OFDM
Antenna Type:	Metal Case Antenna
Antenna 1	2.64dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Dash Cam which supports Wi-Fi technology and operated at 2.4GHz. Only 2.4GHz Wi-Fi included in this report.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C/ RSS-247 Issue 2/RSS-Gen Issue 5					
Test Condition		Test Site	Test Result		
			Pass	Fail	N/A
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Band edge	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a metal case antenna, which gain are 2.64dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2AOK9-M200, IC: 28033-M200, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-08-08

Testing Start Date: 2023-08-08

Testing End Date: 2023-08-15

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Reviewed by:

Prepared by:

Tested by:



John Zhi
Section Manager


Sanvin Zheng
Project Engineer

Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9KHz - 30MHz

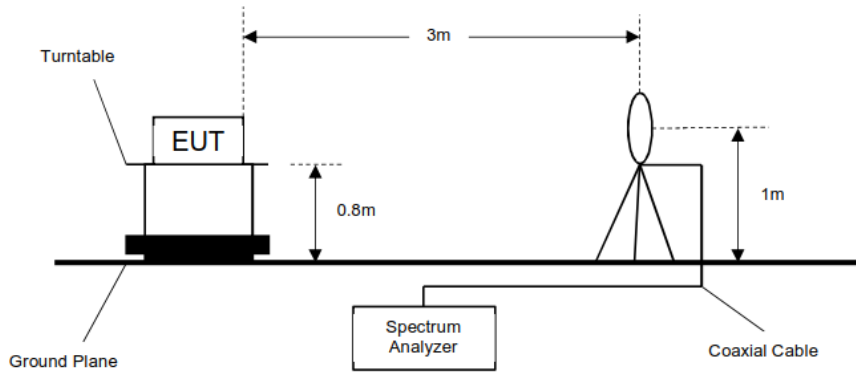


30MHz - 1GHz

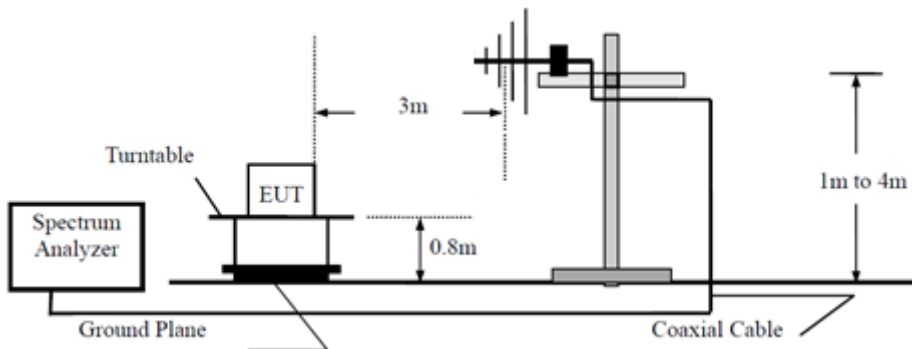

Above 1GHz

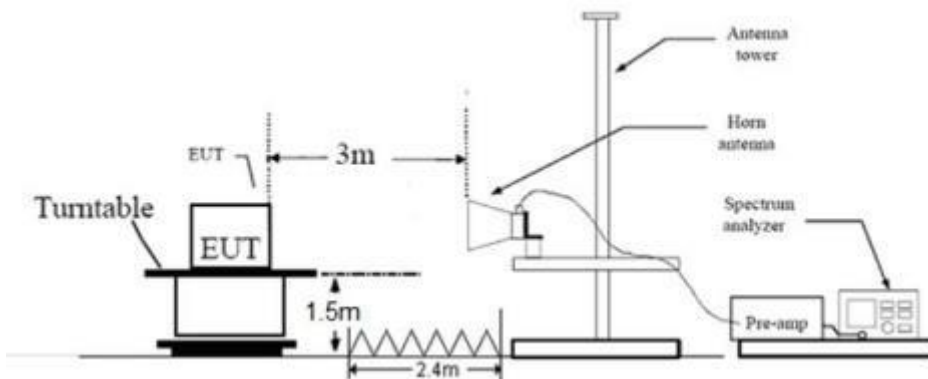

7.2 Conducted RF test setups



8 Systems Test Configuration

Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Car charger	70mai	CZCDQ01BY	Model: CZCDQ01BY Rated: Input: DC 12V-24V, 1A Output: DC 5V, 2.4A
Notebook	LENOVO	X220	---

Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
USB cable	350cm	shield	---

Test software information:

Test Software Version	sscom5.13.1		
Mode	Setting TX Power	Packet Type	
802.11b	26	DSSS	
802.11g	38	OFDM	
802.11n20	38	OFDM	
802.11n40	36	OFDM	

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.


Through pre-scan all kind of modulation and all kind of rates, find the 11Mbps of rate is the worst case of 802.11b; the 54Mbps of rate is the worst case of 802.11g; the 65Mbps of rate is the worst case of 802.11n20 & 802.11n40, only the worst case transmitter rate data mode in recorded in the report.

9 Technical Requirement

9.1 Conducted Output Power & EIRP

Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

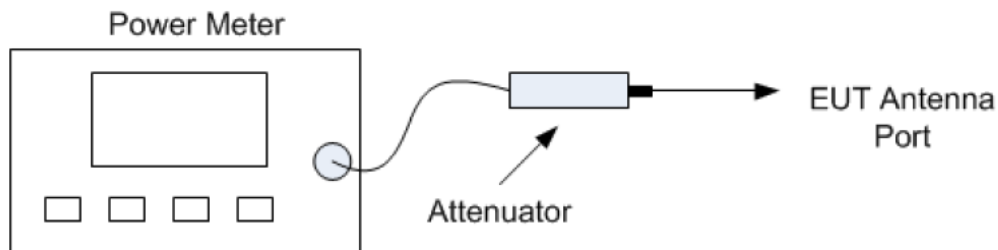

Power meter conducted test setup

Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Test result as below table

802.11b modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	11.3	2.64	13.94	Pass
Middle channel 2437MHz	10.6	2.64	13.24	Pass
High channel 2462MHz	9.6	2.64	12.24	Pass

802.11g modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	10.5	2.64	13.14	Pass
Middle channel 2437MHz	9.5	2.64	12.14	Pass
High channel 2462MHz	8.0	2.64	10.64	Pass

802.11n20 modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	10.3	2.64	12.94	Pass
Middle channel 2437MHz	9.4	2.64	12.04	Pass
High channel 2462MHz	7.8	2.64	10.44	Pass

802.11n40 modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2422MHz	9.1	2.64	11.74	Pass
Middle channel 2437MHz	8.5	2.64	11.14	Pass
High channel 2452MHz	7.6	2.64	10.24	Pass

9.2 6dB Bandwidth and 99% Occupied Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=100KHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Test Method for 99 % Bandwidth

1. Connect EUT test port to spectrum analyzer.
Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the occupied bandwidth measurement capability of test receiver.
3. Allow the trace to stabilize, record the occupied bandwidth value.

Limit

6dB bandwidth Limit [kHz]	99% bandwidth Limit [kHz]
≥500	--

802.11b modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	8.200	13.387	0.5	Pass
Middle channel 2437MHz	9.280	13.387	0.5	Pass
High channel 2462MHz	8.360	13.387	0.5	Pass

802.11g modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	16.360	17.023	0.5	Pass
Middle channel 2437MHz	16.160	17.023	0.5	Pass
High channel 2462MHz	16.560	17.263	0.5	Pass


802.11n-HT20 modulation Test Result


Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	17.400	18.022	0.5	Pass
Middle channel 2437MHz	17.720	18.022	0.5	Pass
High channel 2462MHz	17.280	17.982	0.5	Pass

802.11n-HT40 modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2422MHz	35.840	36.843	0.5	Pass
Middle channel 2437MHz	35.600	36.603	0.5	Pass
High channel 2452MHz	35.680	36.603	0.5	Pass


6 dB Bandwidth

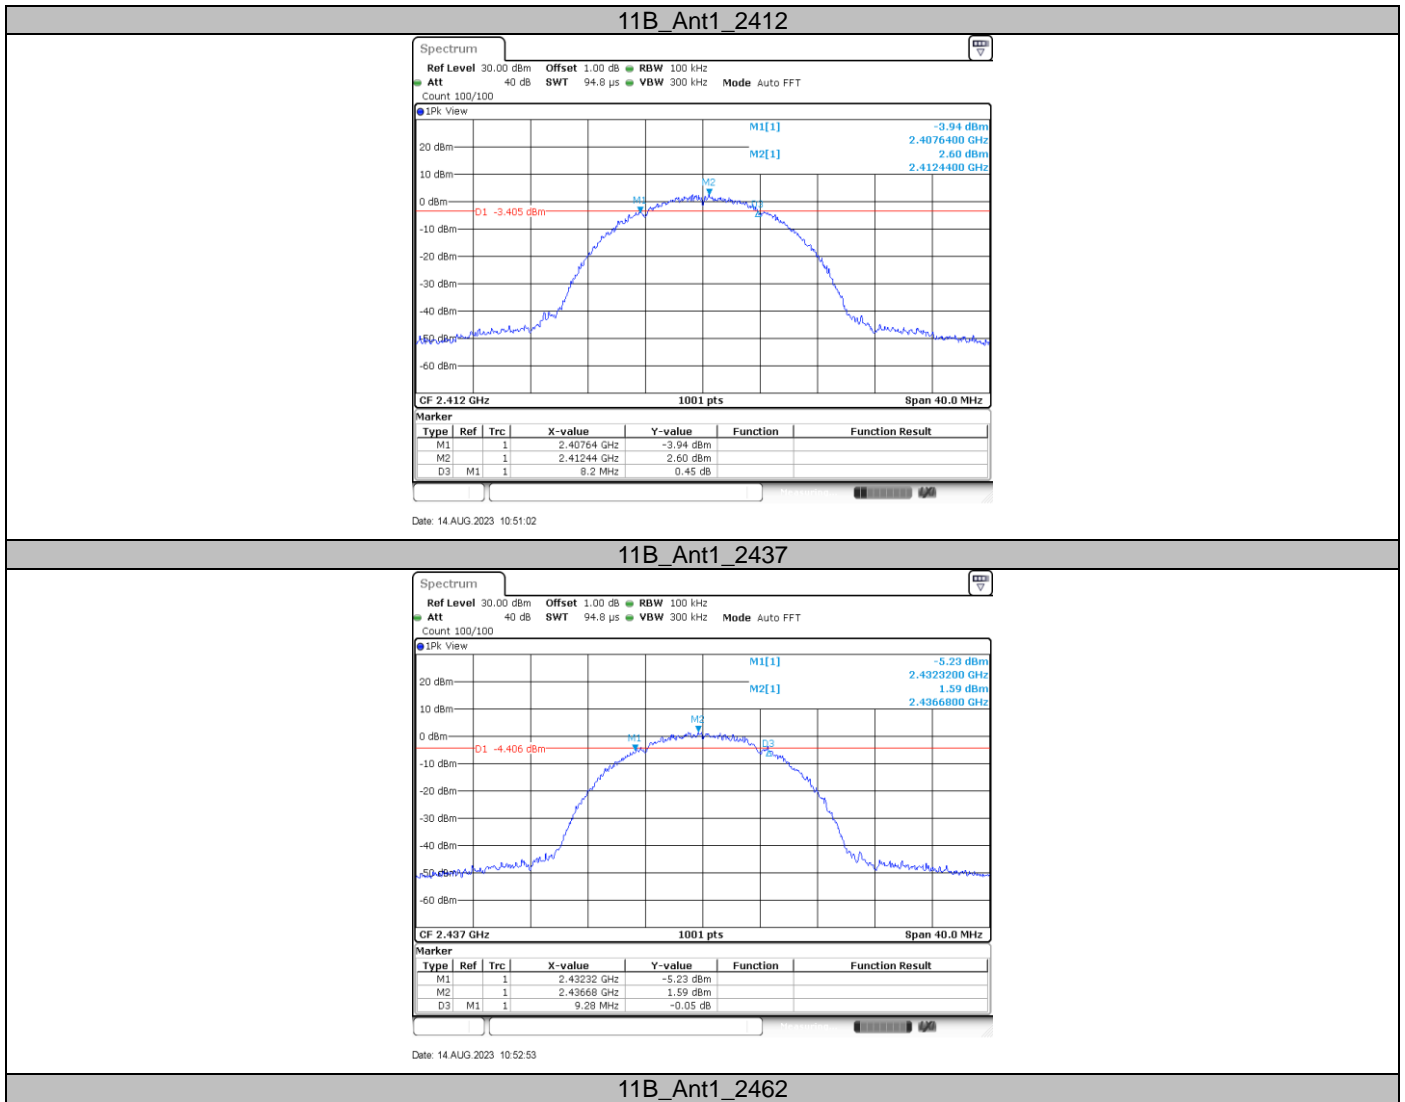

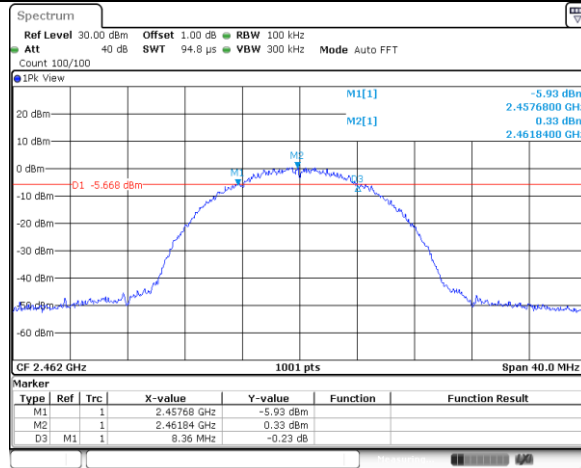


Date: 14.AUG.2023 10:54:39

11G_Ant1_2412

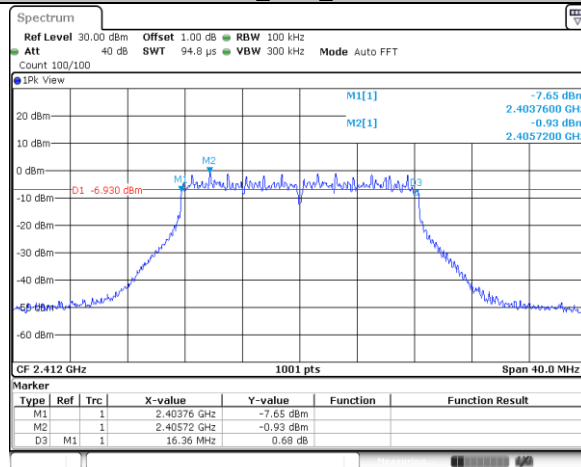


Date: 14.AUG.2023 10:57:35

11G_Ant1_2437

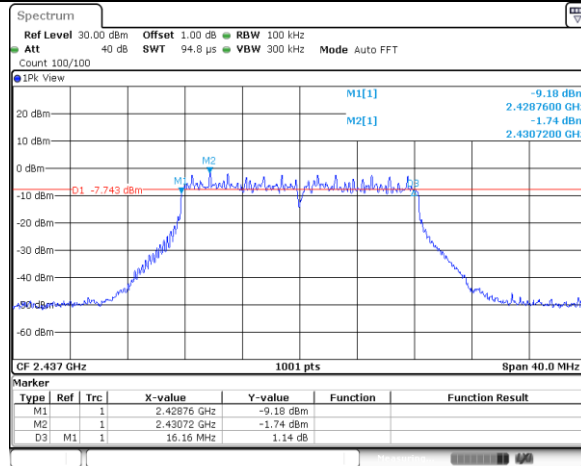


Date: 14.AUG.2023 10:59:28

11G_Ant1_2462

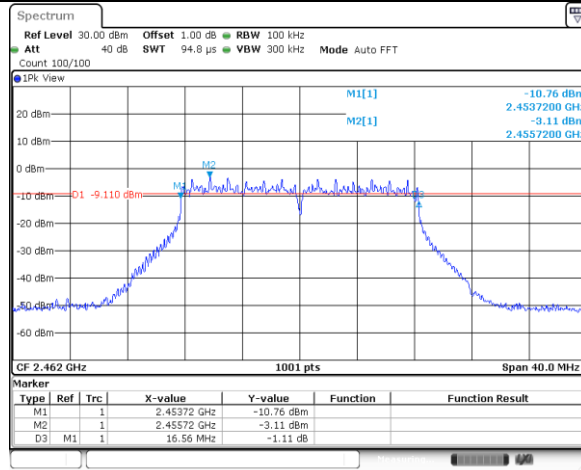


Date: 14.AUG.2023 11:01:05

11N20SISO_Ant1_2412

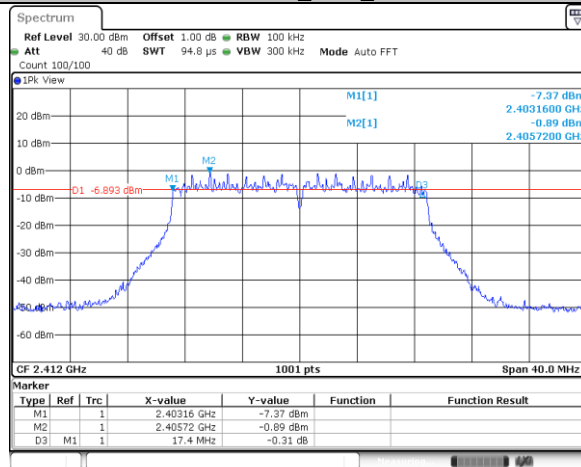


Date: 14.AUG.2023 11:03:28

11N20SISO_Ant1_2437

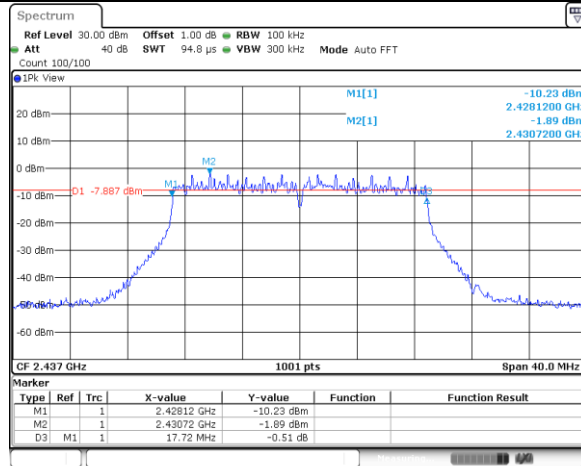


Date: 14.AUG.2023 11:05:22

11N20SISO_Ant1_2462

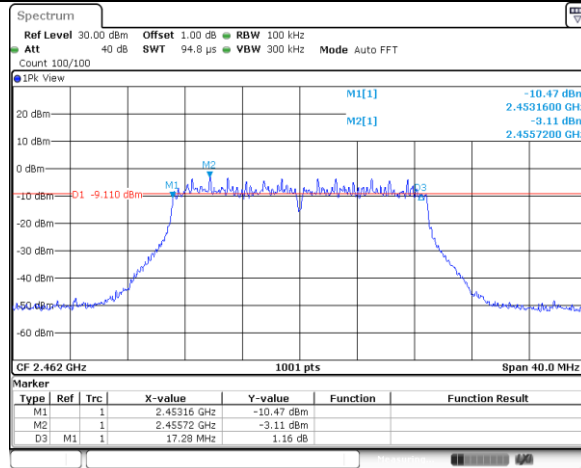


Date: 14.AUG.2023 11:07:03

11N40SISO_Ant1_2422

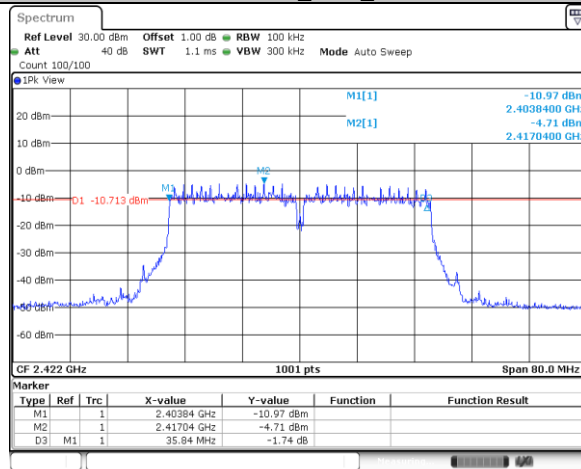


Date: 14.AUG.2023 11:09:07

11N40SISO_Ant1_2437

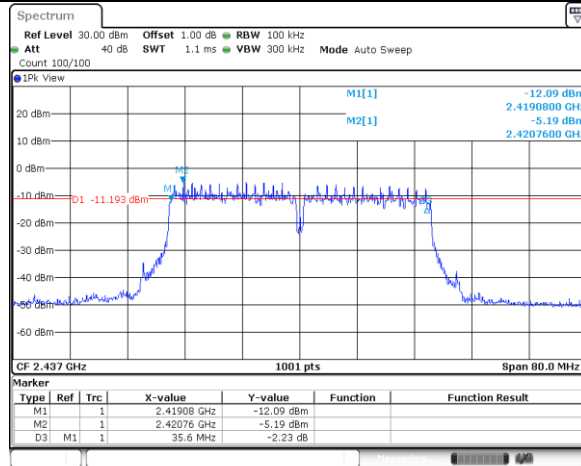


Date: 14.AUG.2023 11:11:57

11N40SISO_Ant1_2452

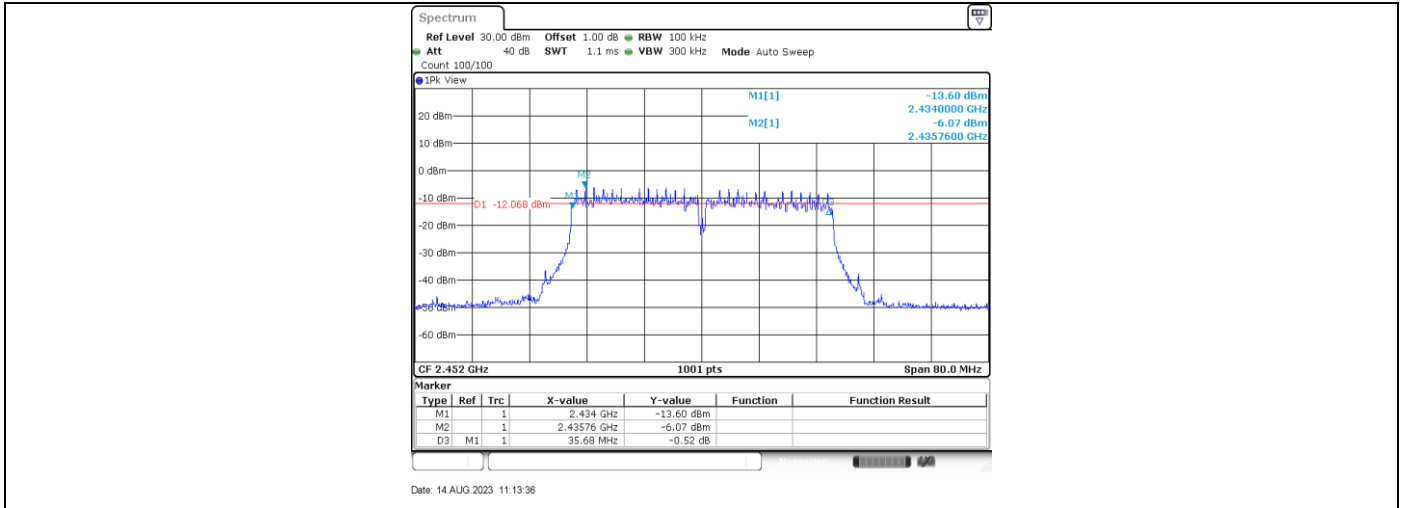


99% Bandwidth

11B_Ant1_2412

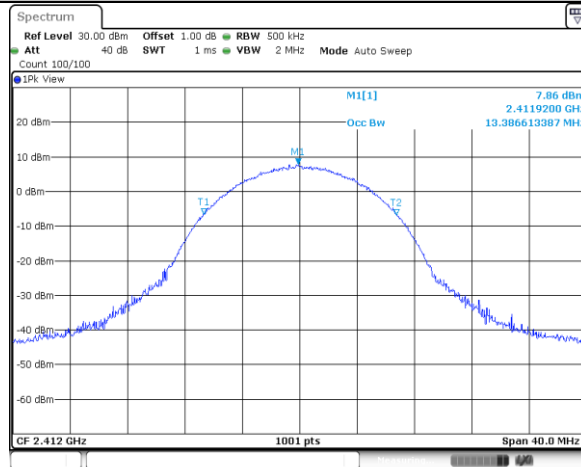


Date: 14.AUG.2023 10:51:13

11B_Ant1_2437

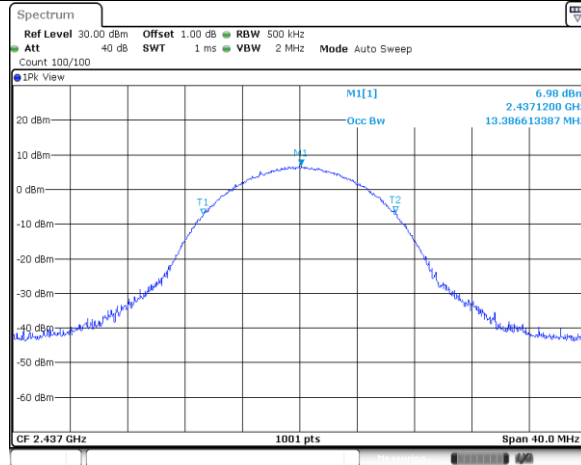


Date: 14.AUG.2023 10:53:04

11B_Ant1_2462

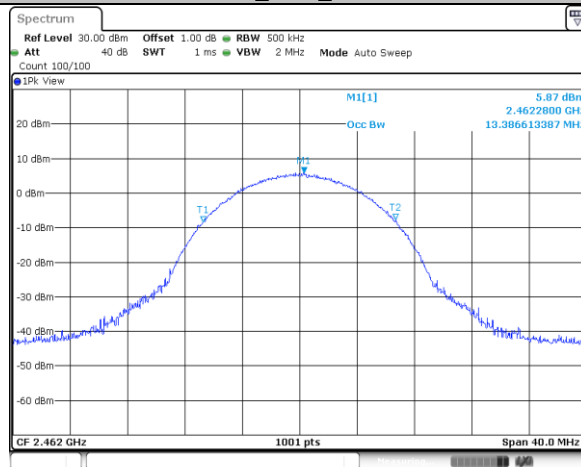


Date: 14.AUG.2023 10:54:50

11G_Ant1_2412

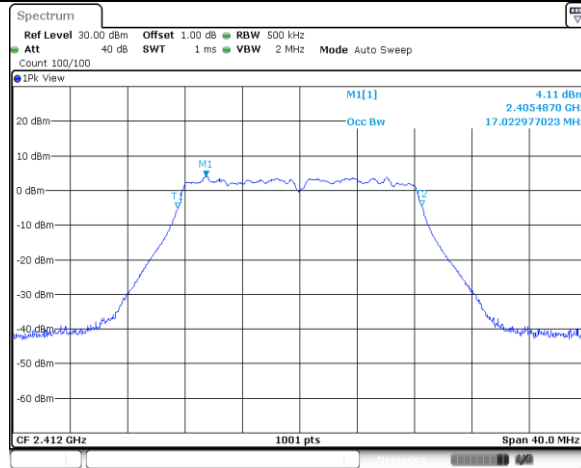


Date: 14.AUG.2023 10:57:45

11G_Ant1_2437

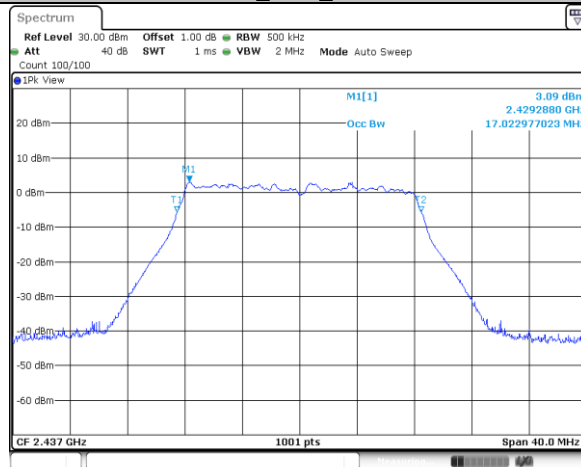


Date: 14.AUG.2023 10:59:39

11G_Ant1_2462

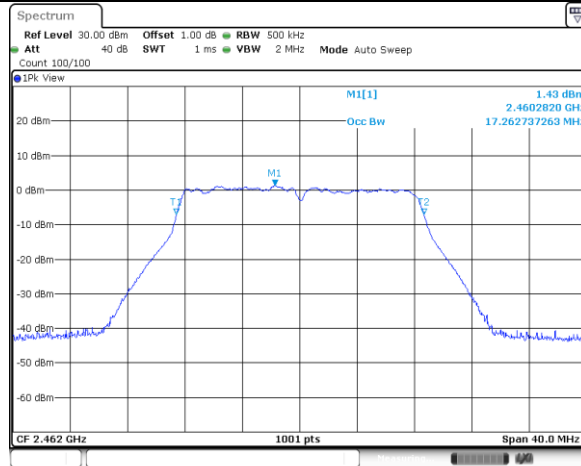


Date: 14.AUG.2023 11:01:15

11N20SISO_Ant1_2412

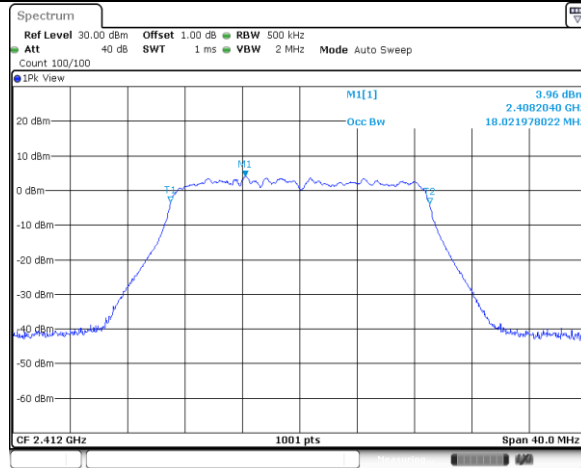


Date: 14.AUG.2023 11:03:39

11N20SISO_Ant1_2437

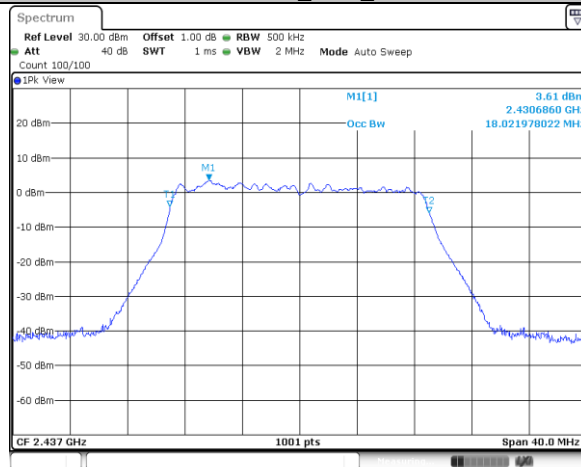


Date: 14.AUG.2023 11:05:33

11N20SISO_Ant1_2462

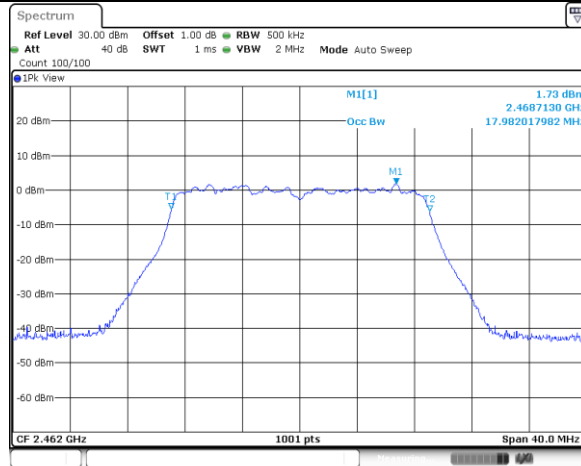


Date: 14.AUG.2023 11:07:14

11N40SISO_Ant1_2422

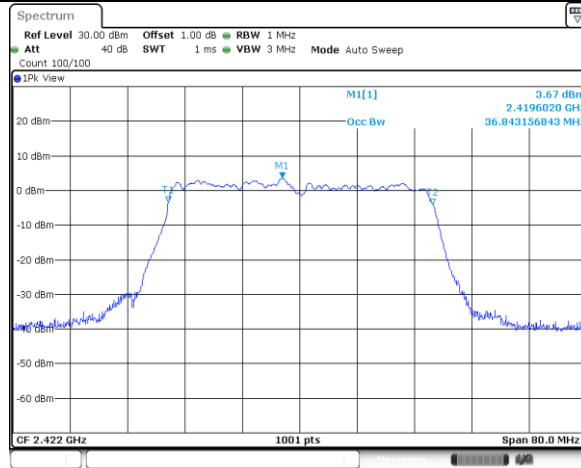


Date: 14.AUG.2023 11:09:18

11N40SISO_Ant1_2437

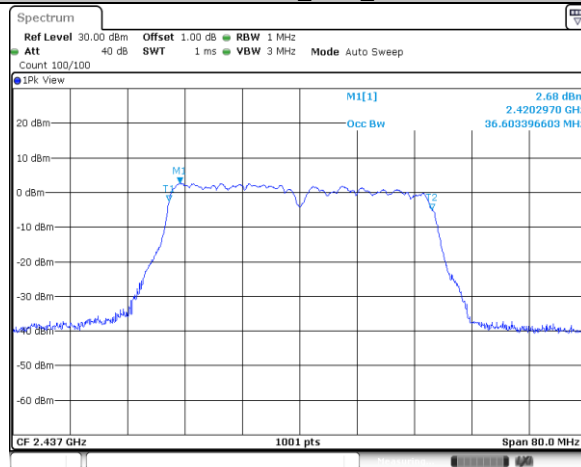

Date: 14.AUG.2023 11:12:08

11N40SISO_Ant1_2452

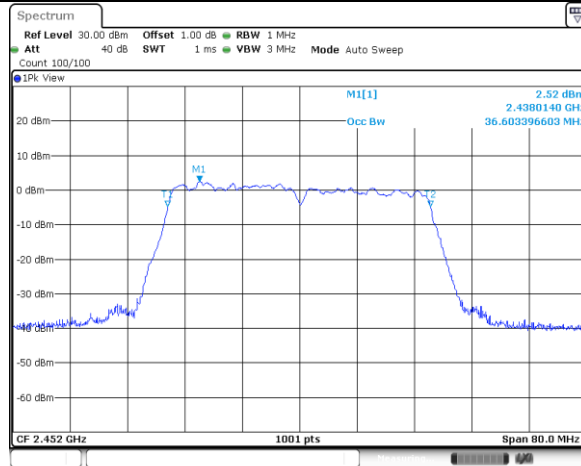

Date: 14.AUG.2023 11:13:47

9.3 Power Spectral Density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3KHz]
≤8

802.11b modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2412MHz	-11.95	8	Pass
Middle channel 2437MHz	-12.34	8	Pass
High channel 2462MHz	-13.19	8	Pass

802.11g modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2412MHz	-14.09	8	Pass
Middle channel 2437MHz	-16.67	8	Pass
High channel 2462MHz	-18.13	8	Pass


802.11n-HT20 modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2412MHz	-14.48	8	Pass
Middle channel 2437MHz	-17.56	8	Pass
High channel 2462MHz	-19.09	8	Pass

802.11n-HT40 modulation Test Result


Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2422MHz	-19.77	8	Pass
Middle channel 2437MHz	-19.92	8	Pass
High channel 2452MHz	-19.82	8	Pass

11B_Ant1_2412

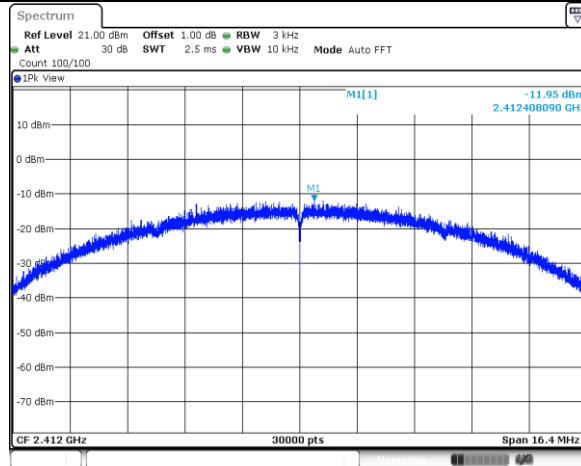


Date: 14.AUG 2023 10:51:25

11B_Ant1_2437

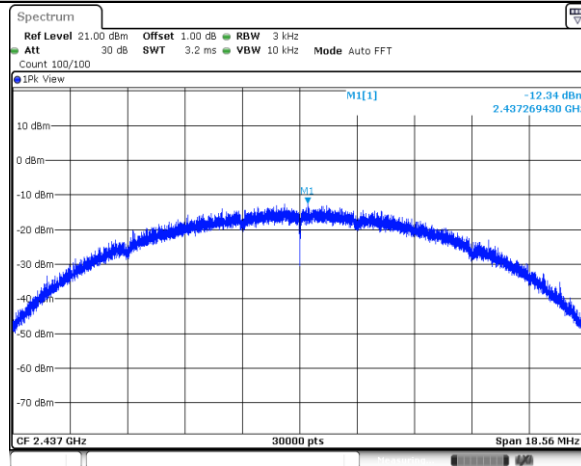


Date: 14.AUG 2023 10:53:15

11B_Ant1_2462

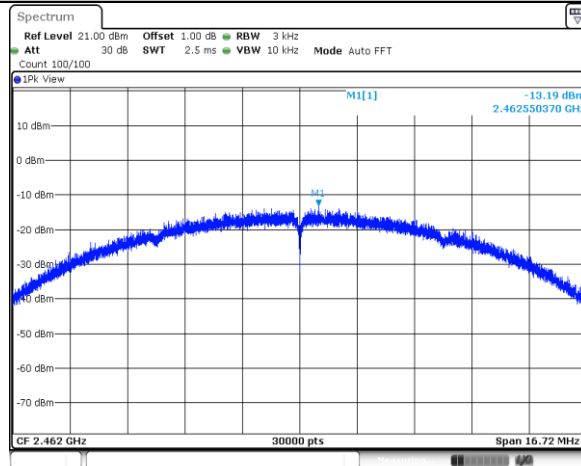


Date: 14.AUG 2023 10:55:01

11G_Ant1_2412

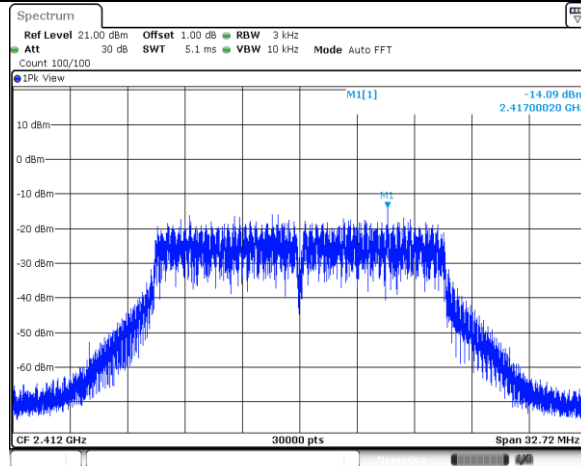


Date: 14.AUG.2023 10:57:57

11G_Ant1_2437

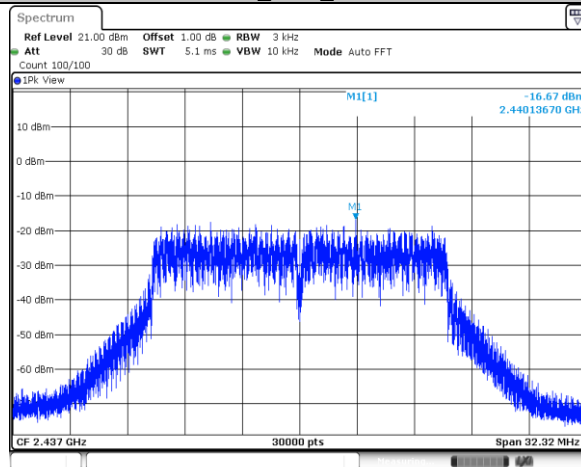


Date: 14.AUG.2023 10:59:51

11G_Ant1_2462

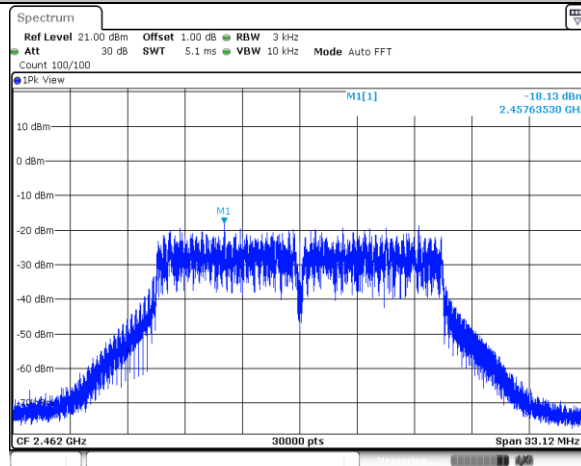


Date: 14.AUG.2023 11:01:27

11N20SISO_Ant1_2412

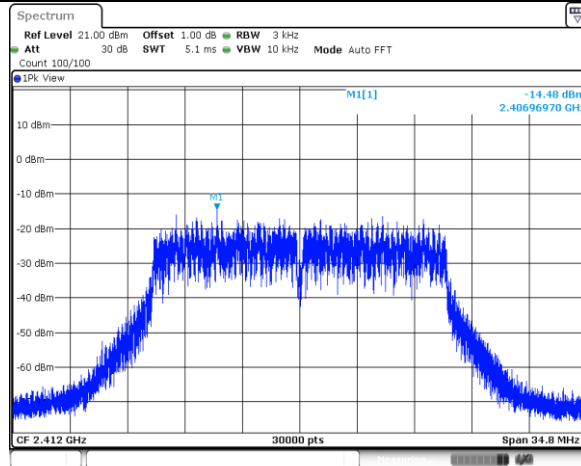


Date: 14.AUG.2023 11:03:50

11N20SISO_Ant1_2437

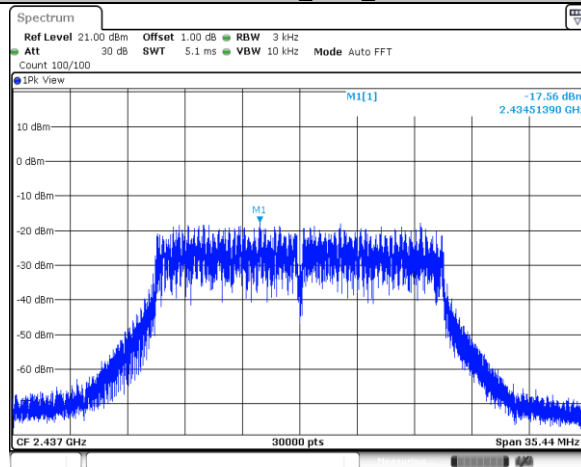


Date: 14.AUG.2023 11:05:44

11N20SISO_Ant1_2462

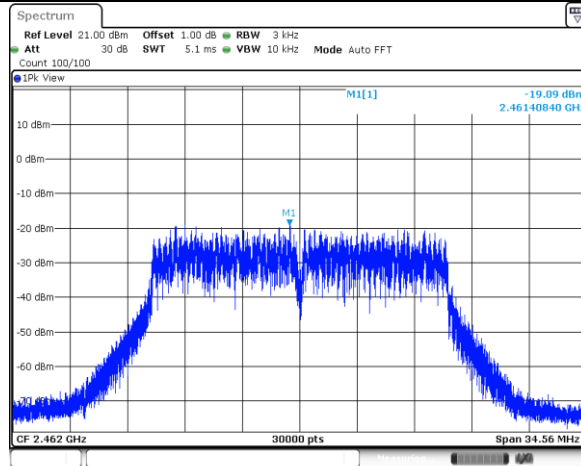


Date: 14.AUG.2023 11:07:25

11N40SISO_Ant1_2422

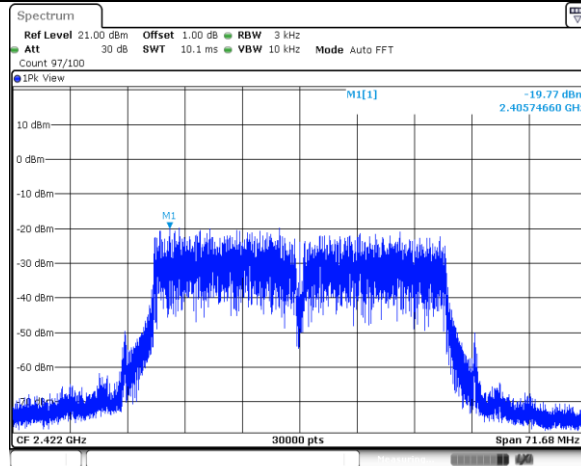


Date: 14.AUG.2023 11:09:30

11N40SISO_Ant1_2437

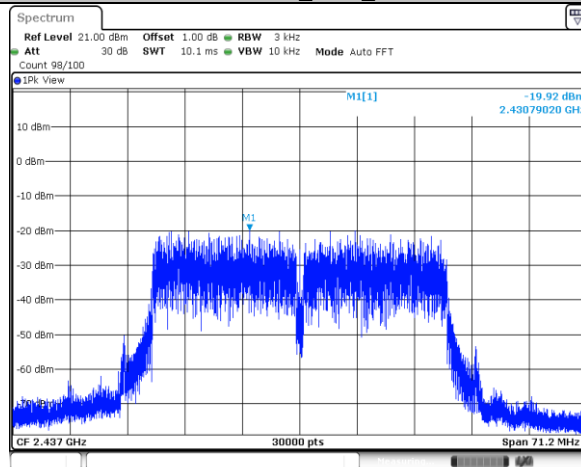

Date: 14.AUG.2023 11:12:20

11N40SISO_Ant1_2452

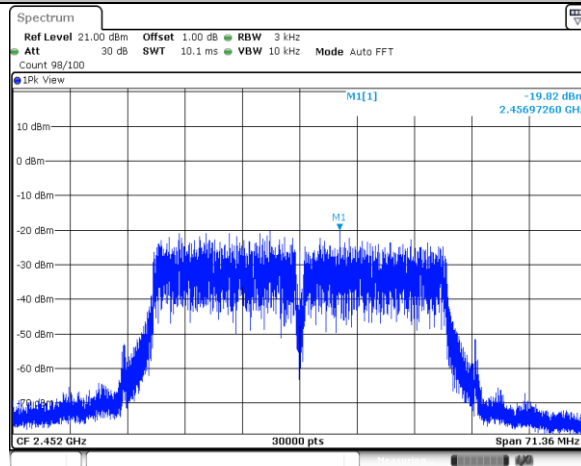

Date: 14.AUG.2023 11:13:58

9.4 Spurious RF Conducted Emissions

Test Method




1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
 Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
 RBW = 100 kHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Test Mode	Antenna	Channel	Freq. Range (MHZ)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	2412	Reference	2.86	---	PASS
			30~1000	-68.15	<=-17.14	PASS
			1000~26500	-32.25	<=-17.14	PASS
		2437	Reference	1.95	---	PASS
			30~1000	-67.81	<=-18.05	PASS
			1000~26500	-34.03	<=-18.05	PASS
		2462	Reference	0.56	---	PASS
			30~1000	-68.2	<=-19.44	PASS
			1000~26500	-47.16	<=-19.44	PASS
11G	Ant1	2412	Reference	-1.18	---	PASS
			30~1000	-68.46	<=-21.18	PASS
			1000~26500	-40.54	<=-21.18	PASS
		2437	Reference	-1.87	---	PASS
			30~1000	-67.92	<=-21.87	PASS
			1000~26500	-47.92	<=-21.87	PASS
		2462	Reference	-3.24	---	PASS
			30~1000	-68.3	<=-23.24	PASS
			1000~26500	-48.45	<=-23.24	PASS
11N20SISO	Ant1	2412	Reference	-1.00	---	PASS
			30~1000	-67.27	<=-21	PASS
			1000~26500	-43.51	<=-21	PASS
		2437	Reference	-1.82	---	PASS
			30~1000	-68.67	<=-21.82	PASS
			1000~26500	-46.29	<=-21.82	PASS
		2462	Reference	-3.24	---	PASS
			30~1000	-68.57	<=-23.24	PASS
			1000~26500	-49.11	<=-23.24	PASS
11N40SISO	Ant1	2422	Reference	-4.68	---	PASS
			30~1000	-68.24	<=-24.68	PASS
			1000~26500	-36.9	<=-24.68	PASS
		2437	Reference	-5.47	---	PASS
			30~1000	-68.73	<=-25.47	PASS
			1000~26500	-48.14	<=-25.47	PASS
		2452	Reference	-6.51	---	PASS
			30~1000	-67.34	<=-26.51	PASS
			1000~26500	-49.36	<=-26.51	PASS

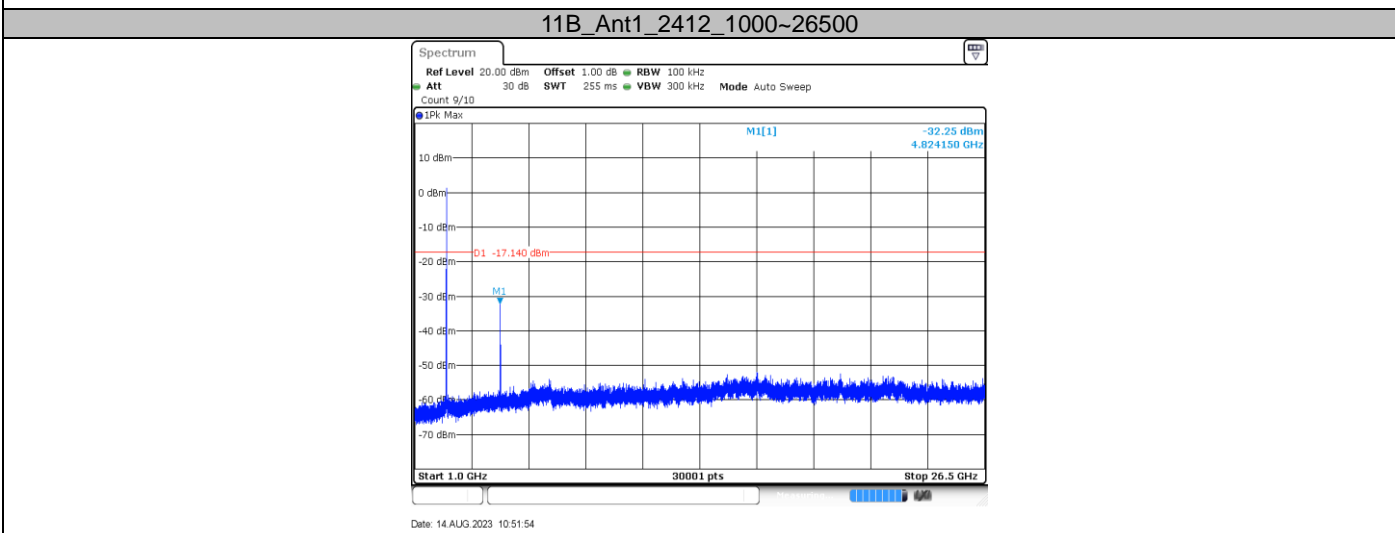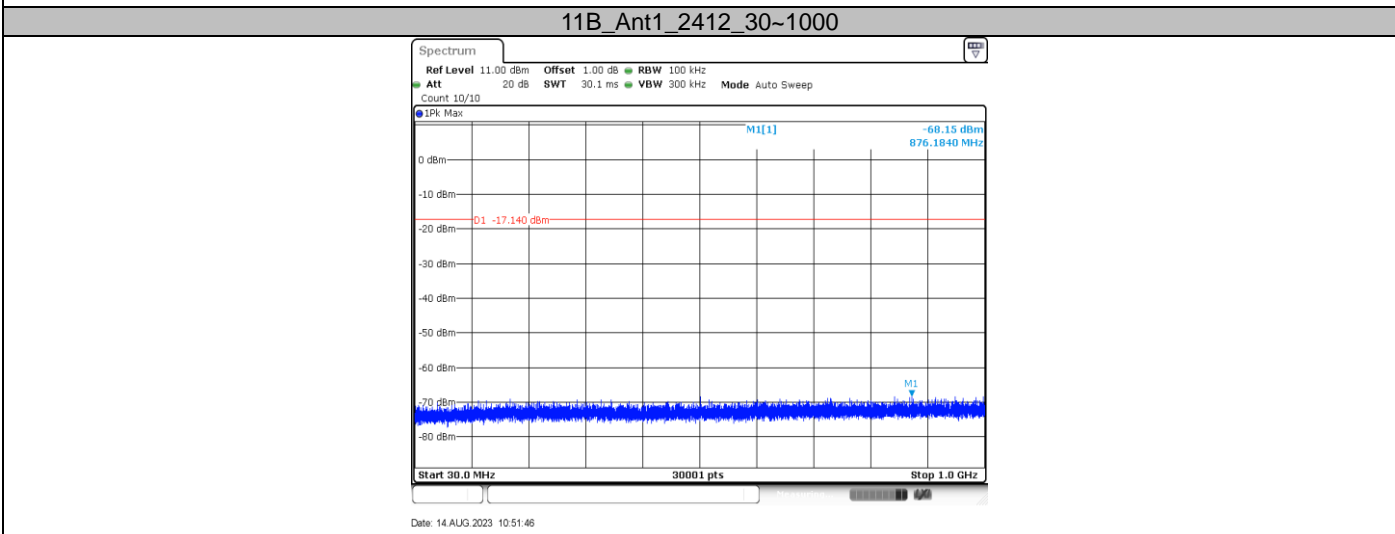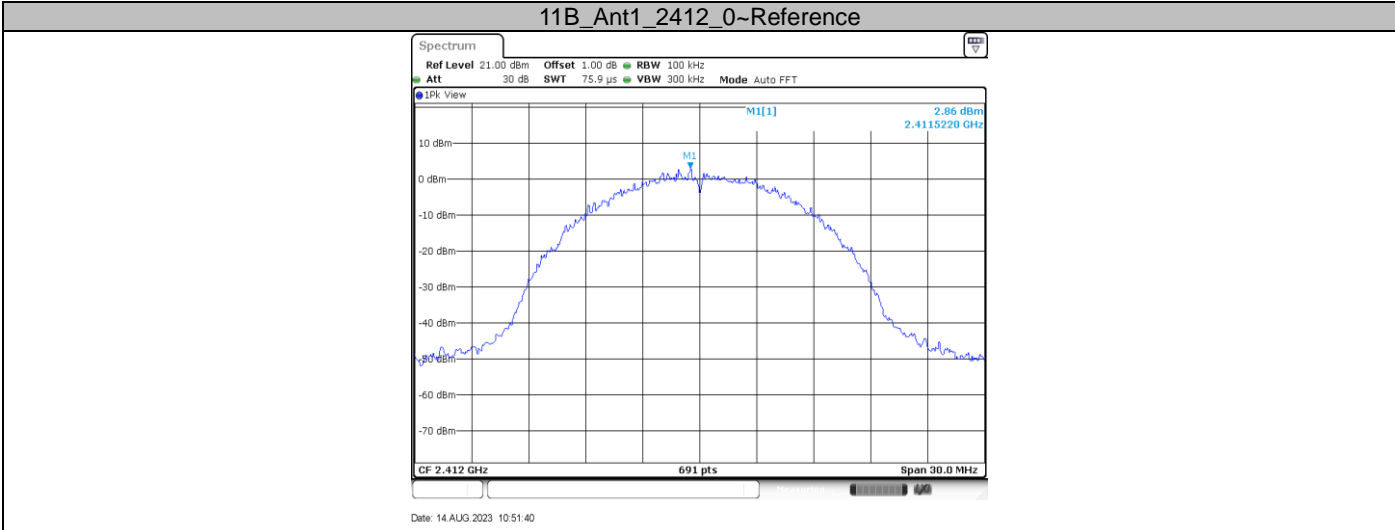


11B_Ant1_2437_0~Reference

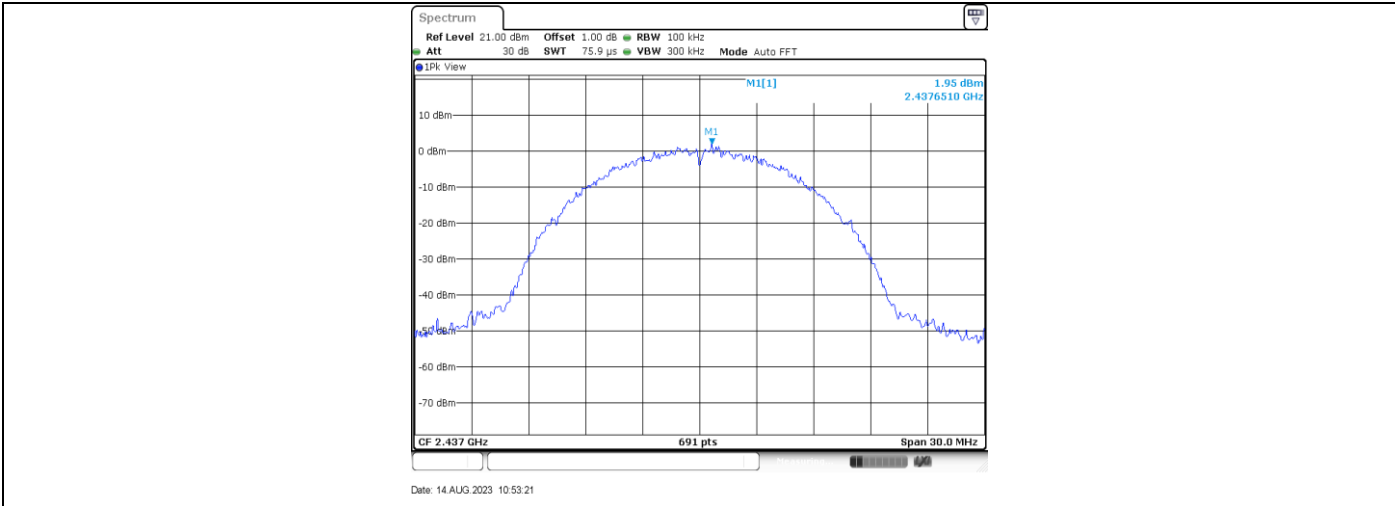


11B_Ant1_2437_30~1000

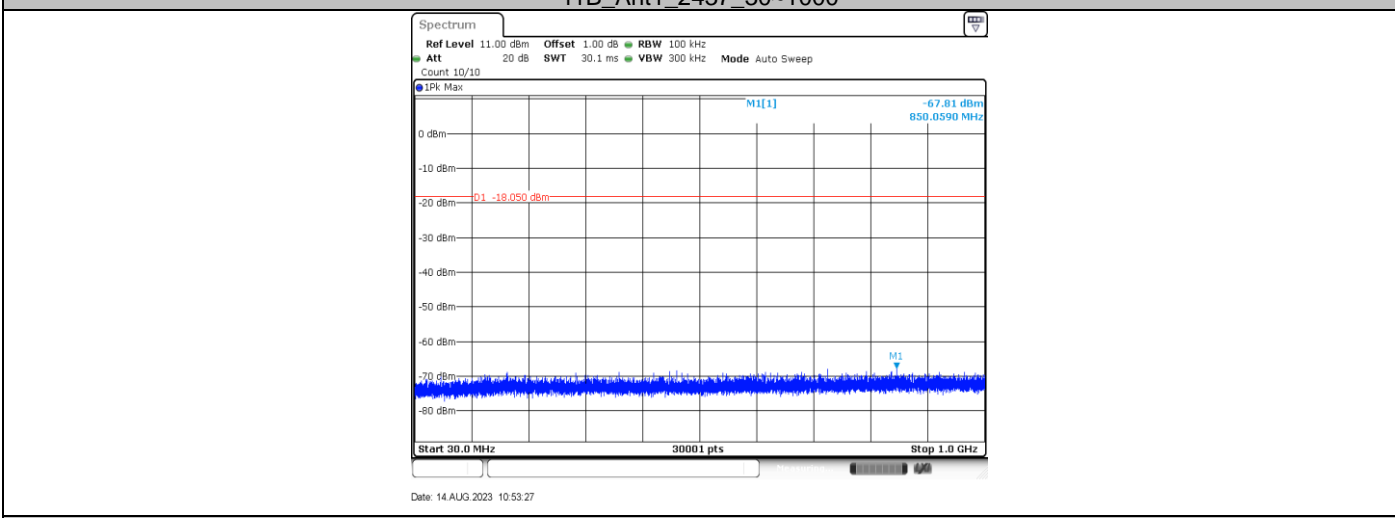


11B_Ant1_2437_1000~26500

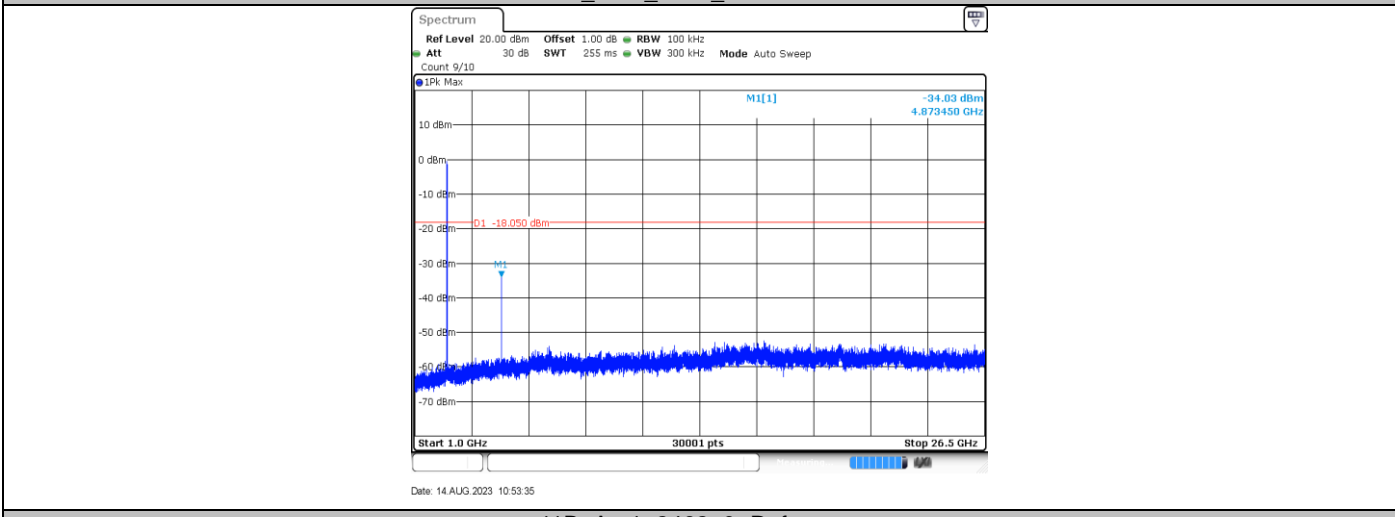


11B_Ant1_2462_0~Reference

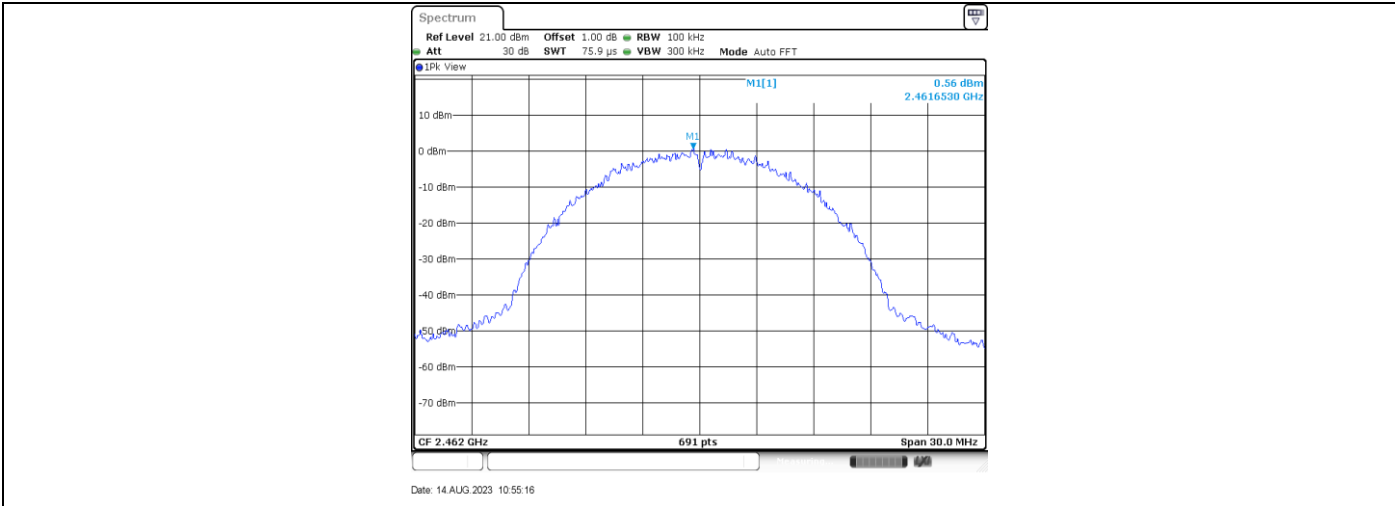


11B_Ant1_2462_30~1000

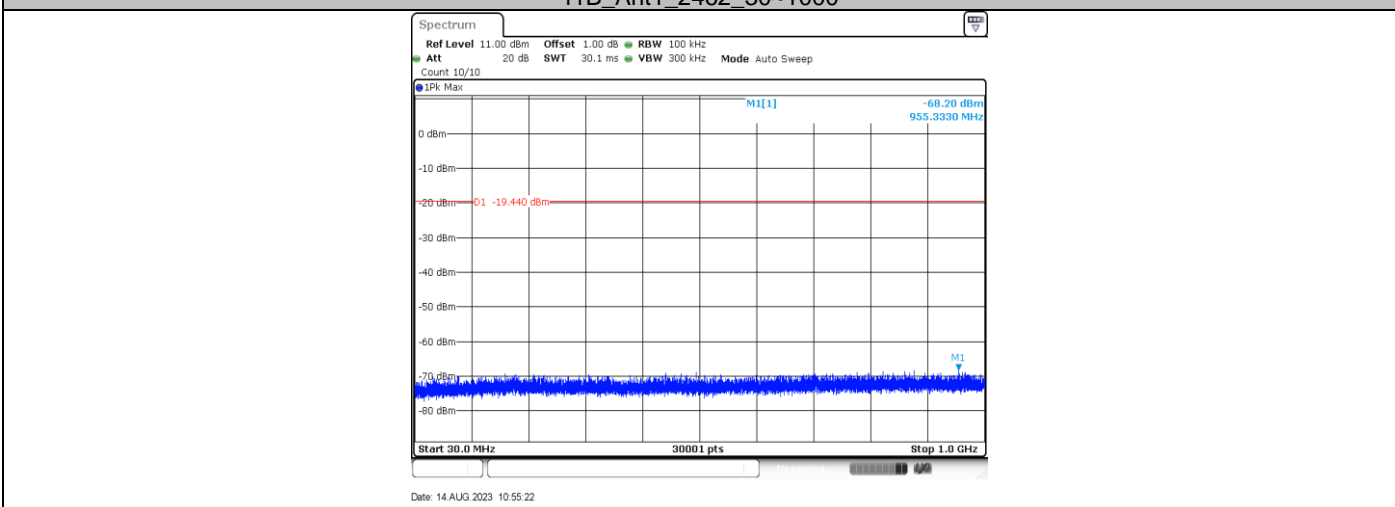


11B_Ant1_2462_1000~26500

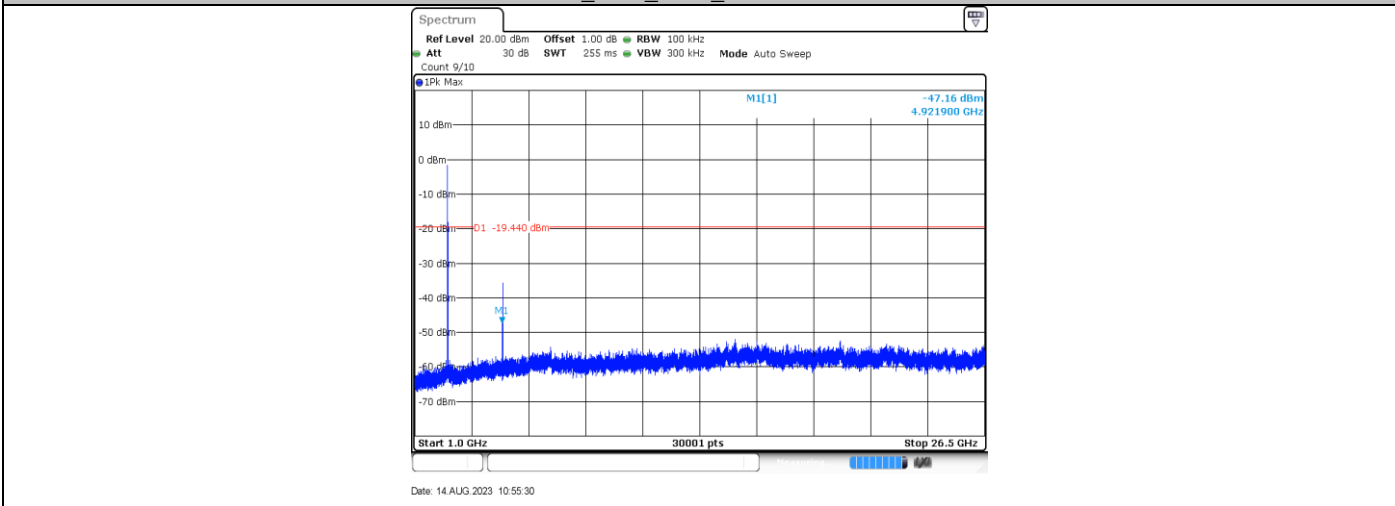


11G_Ant1_2412_0~Reference

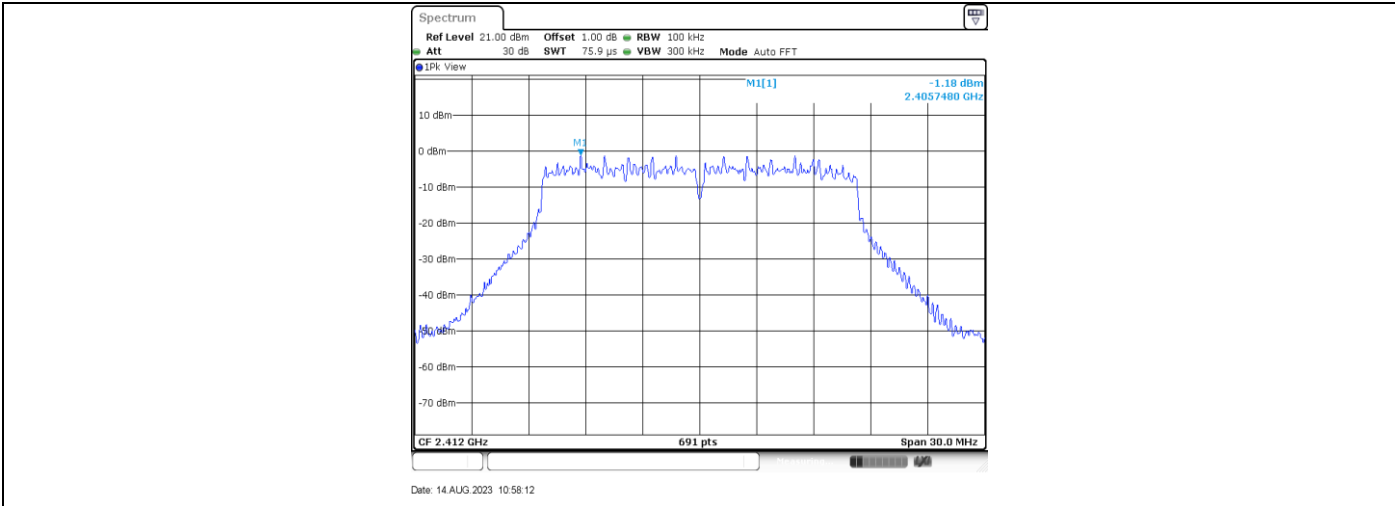


11G_Ant1_2412_30~1000

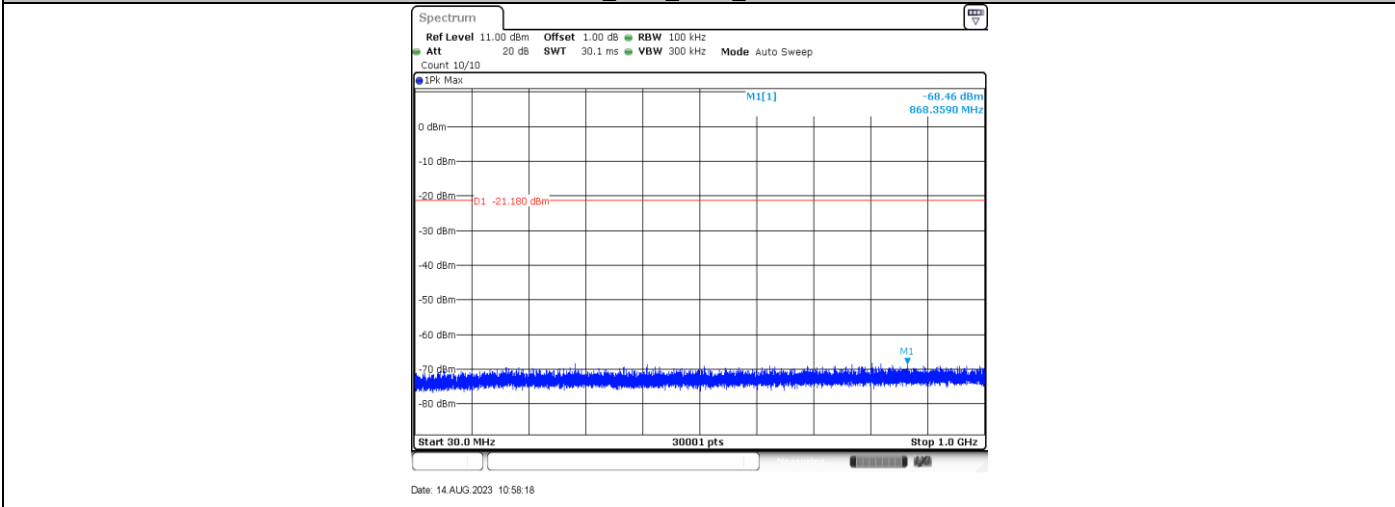


11G_Ant1_2412_1000~26500

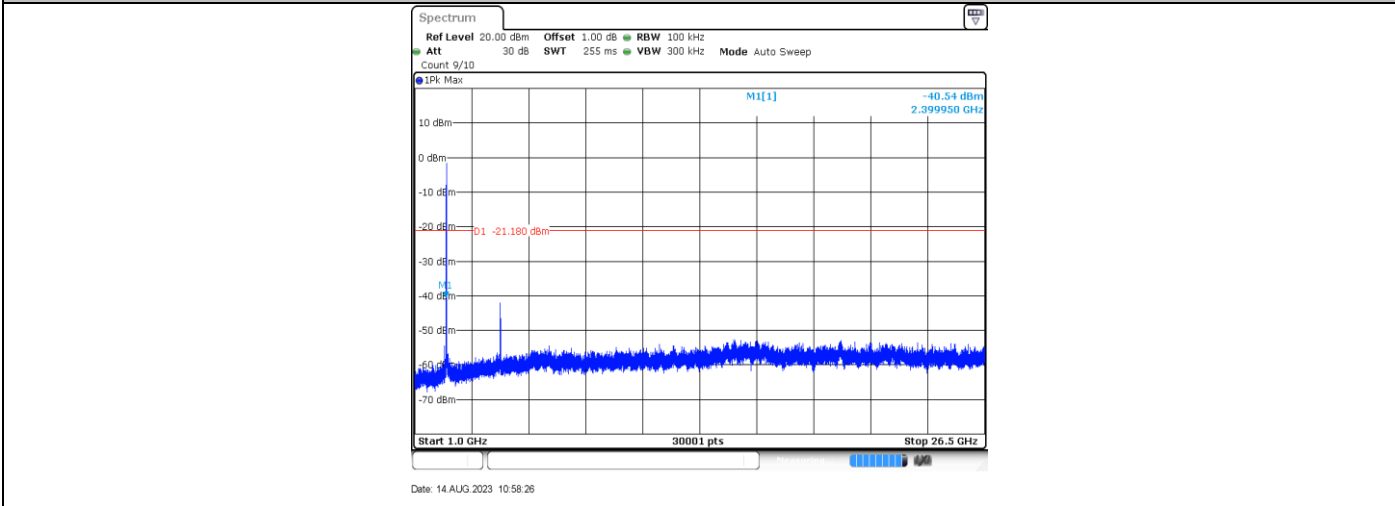


11G_Ant1_2437_0~Reference

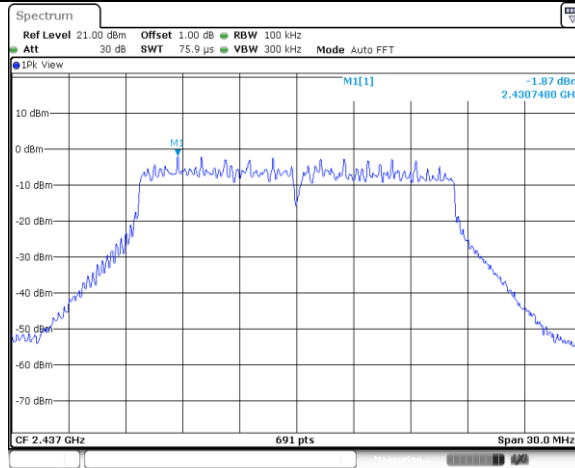


11G_Ant1_2437_30~1000

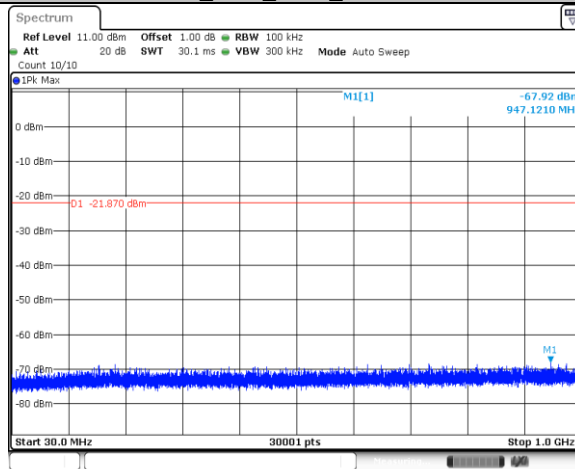


11G_Ant1_2437_1000~26500

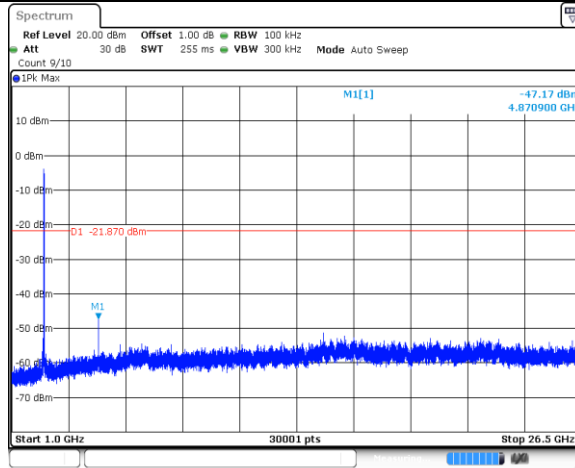


11G_Ant1_2462_0~Reference

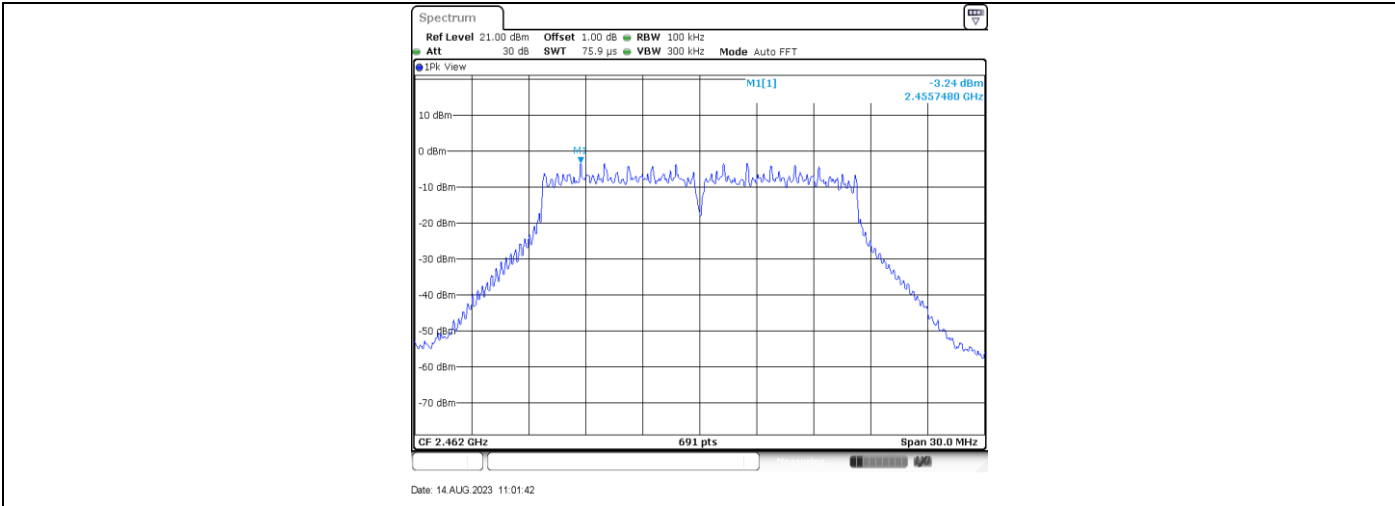


11G_Ant1_2462_30~1000

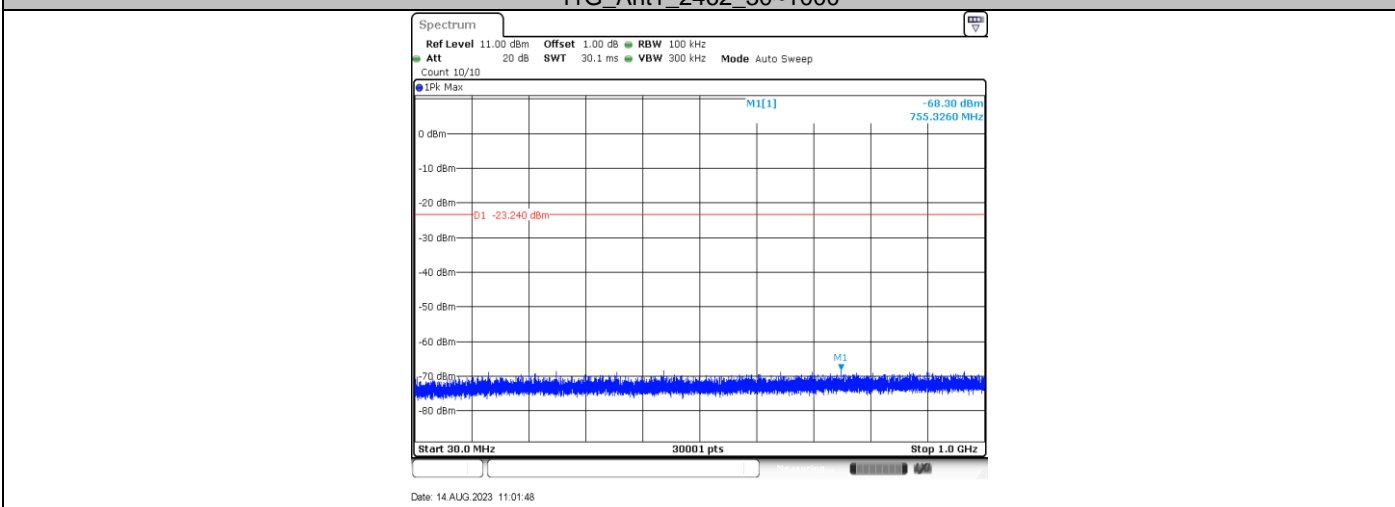


11G_Ant1_2462_1000~26500

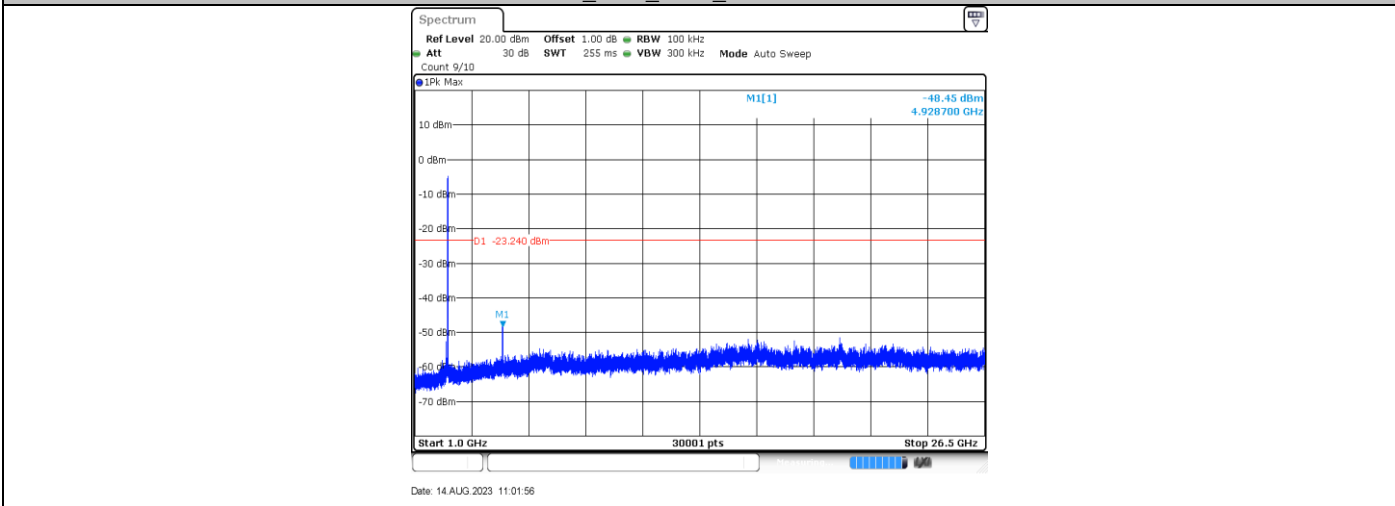


11N20SISO_Ant1_2412_0~Reference

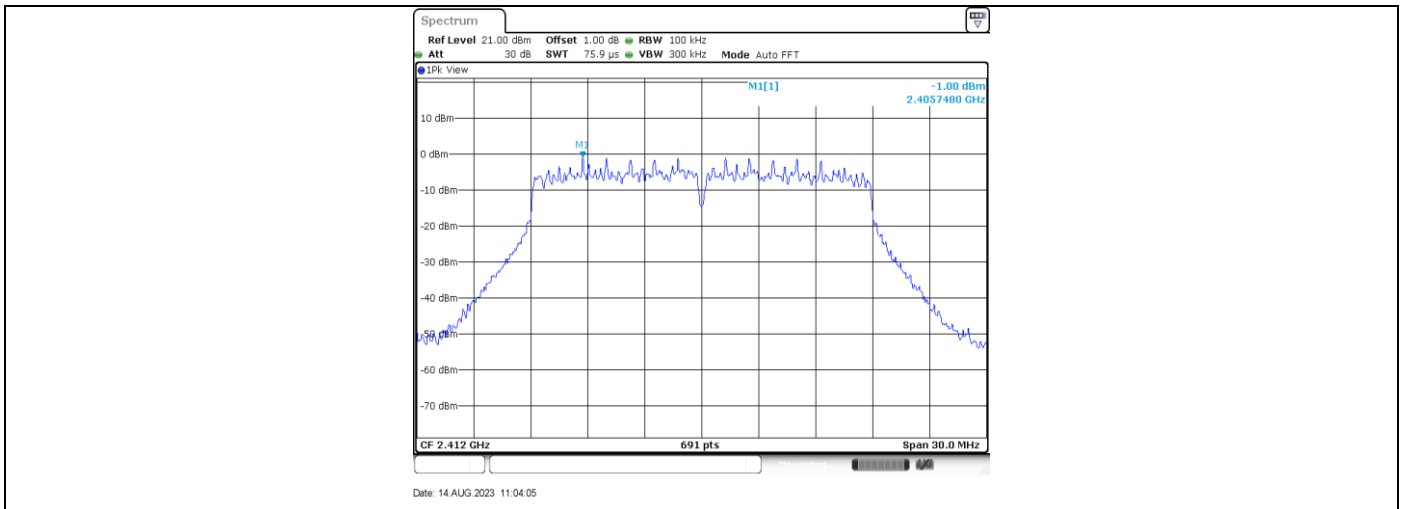


11N20SISO_Ant1_2412_30~1000

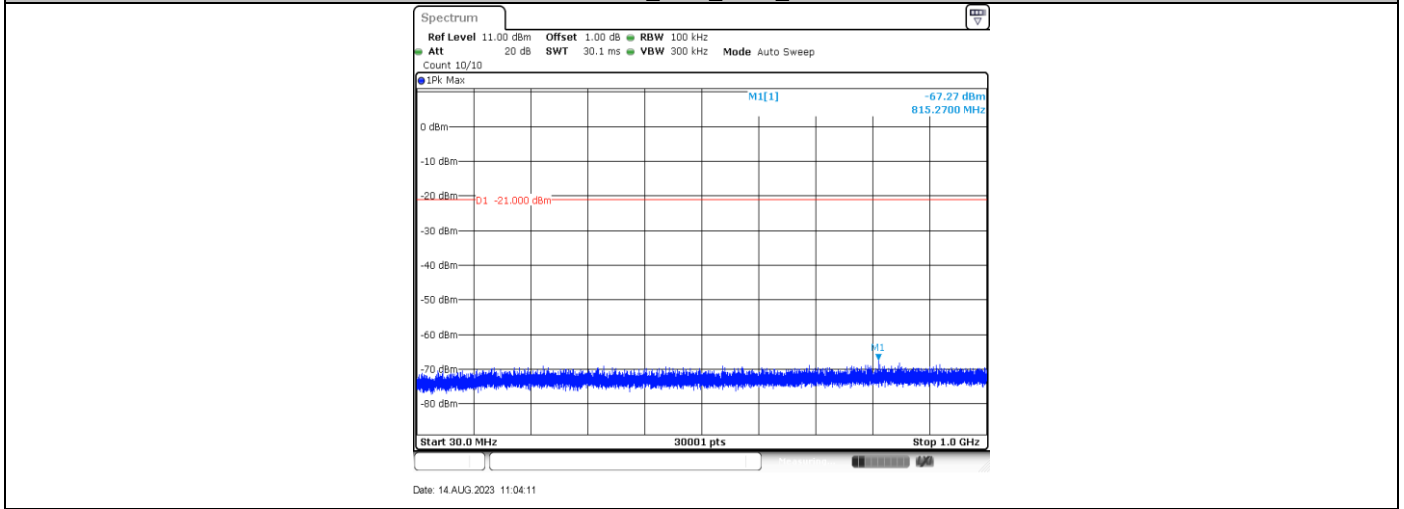

11N20SISO_Ant1_2412_1000~26500

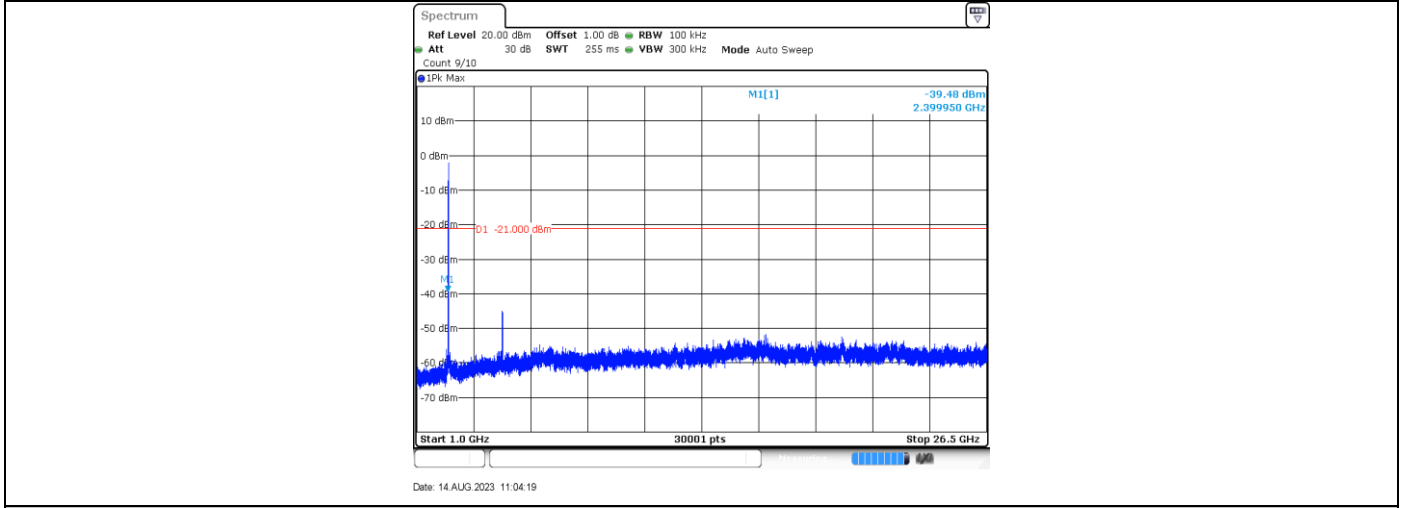


11N20SISO_Ant1_2437_0~Reference

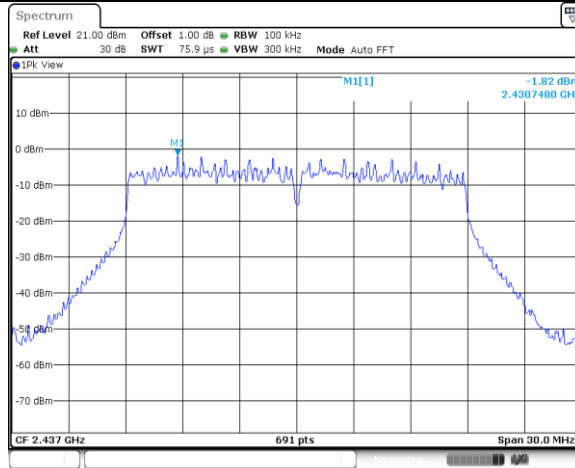


Date: 14.AUG.2023 11:05:50

11N20SISO_Ant1_2437_30~1000

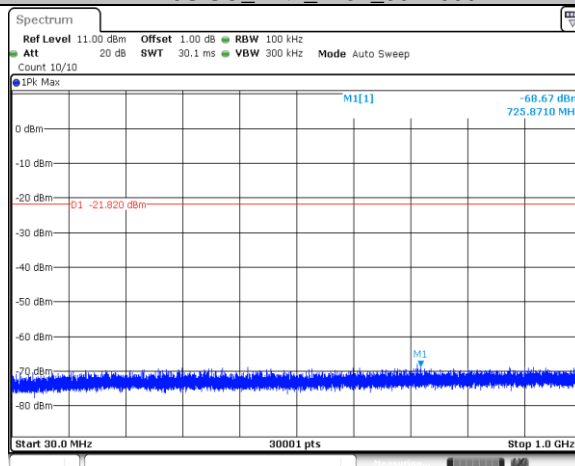


Date: 14.AUG.2023 11:05:56

11N20SISO_Ant1_2437_1000~26500

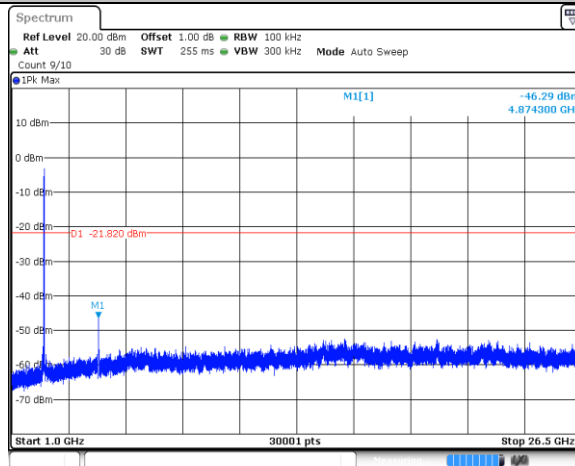


Date: 14.AUG.2023 11:06:04

11N20SISO_Ant1_2462_0~Reference

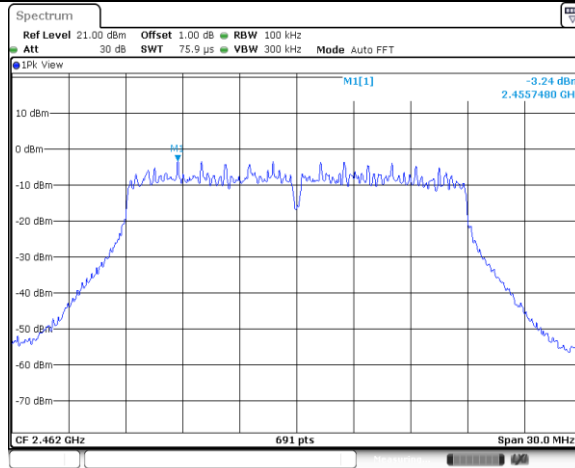


Date: 14.AUG.2023 11:07:40

11N20SISO_Ant1_2462_30~1000

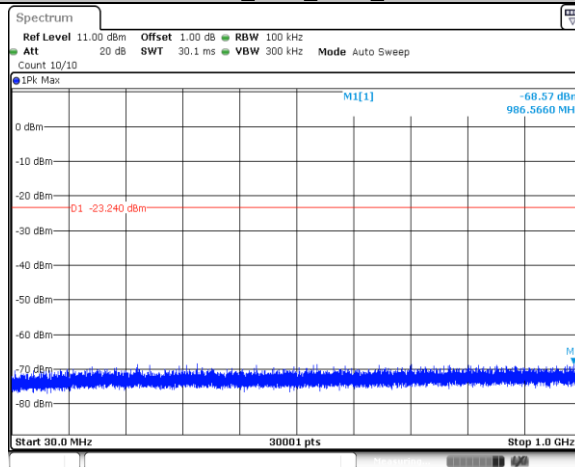


Date: 14.AUG.2023 11:07:46

11N20SISO_Ant1_2462_1000~26500

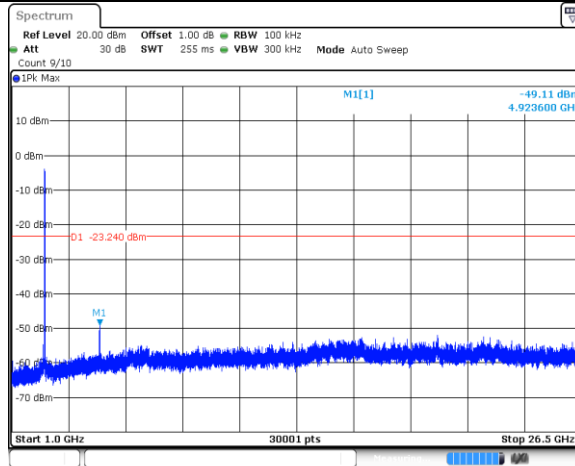


Date: 14.AUG.2023 11:07:54


11N40SISO_Ant1_2422_0~Reference

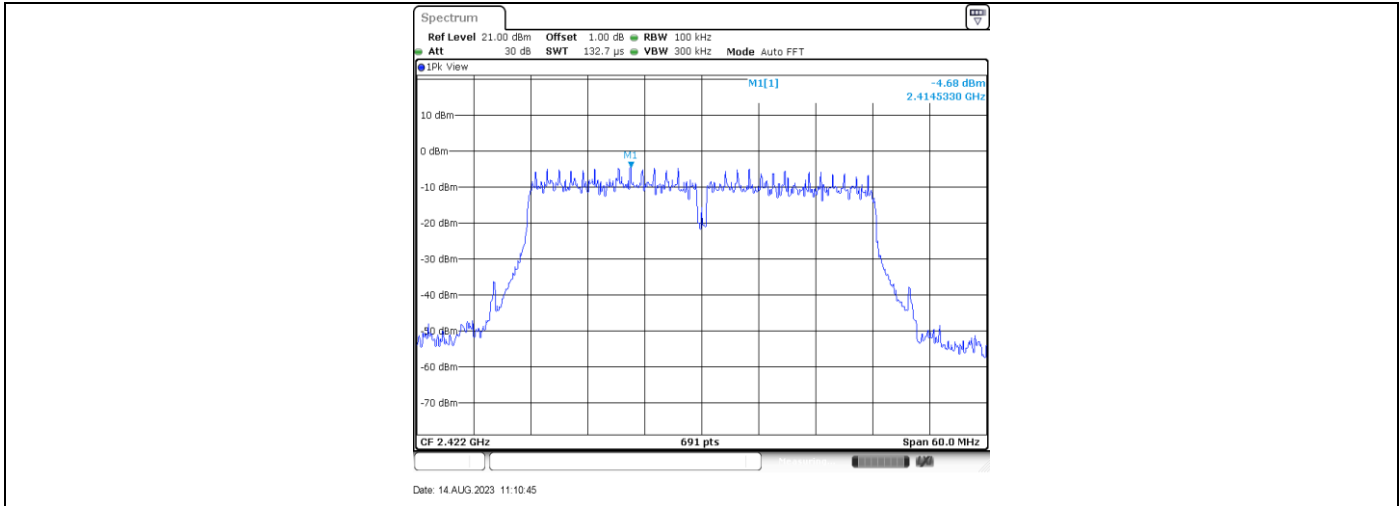


11N40SISO_Ant1_2422_30~1000

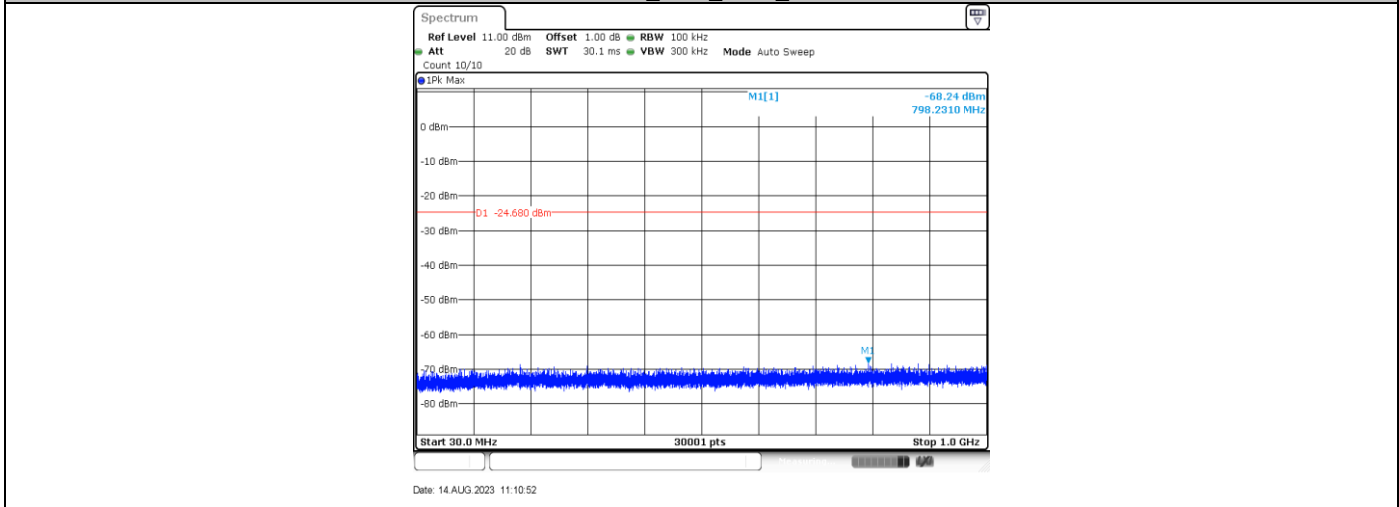


11N40SISO_Ant1_2422_1000~26500

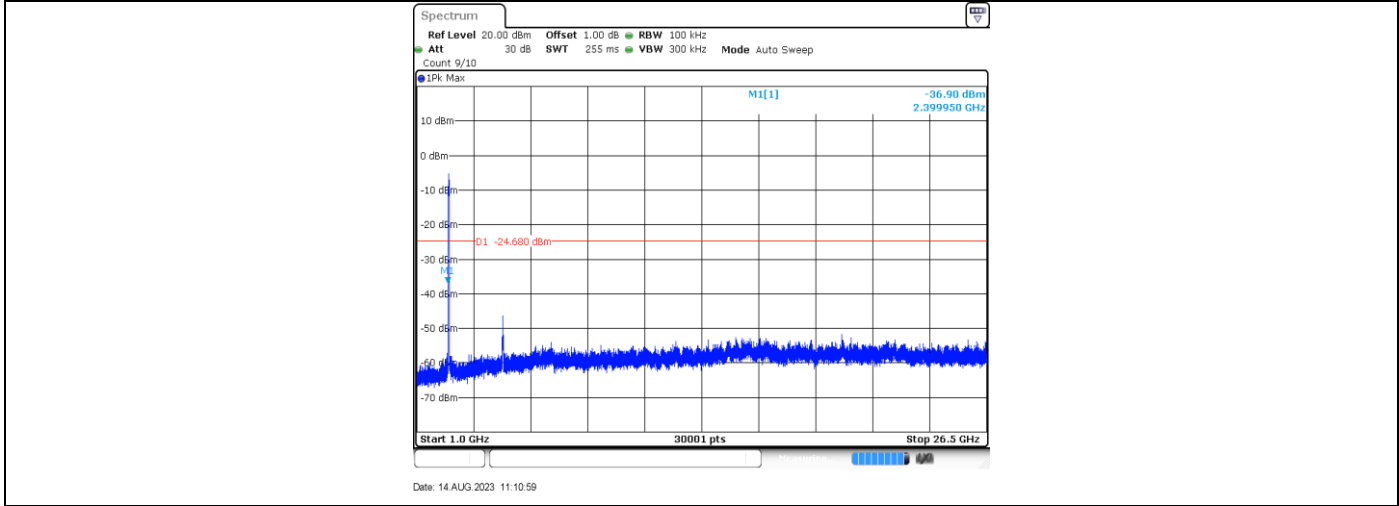


11N40SISO_Ant1_2437_0~Reference

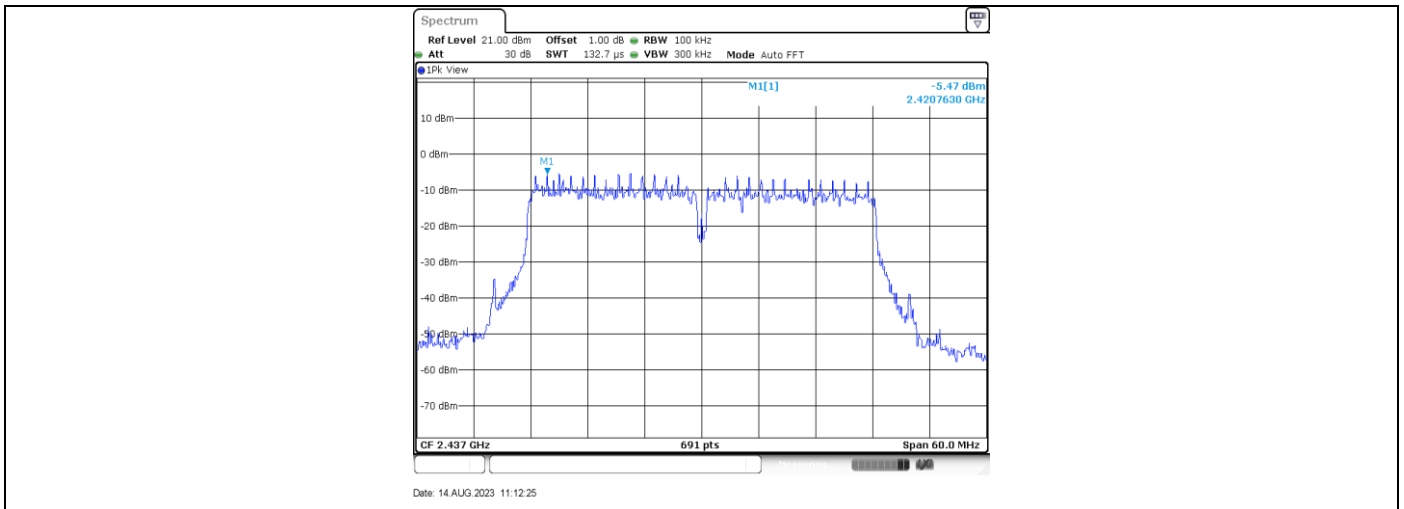


11N40SISO_Ant1_2437_30~1000

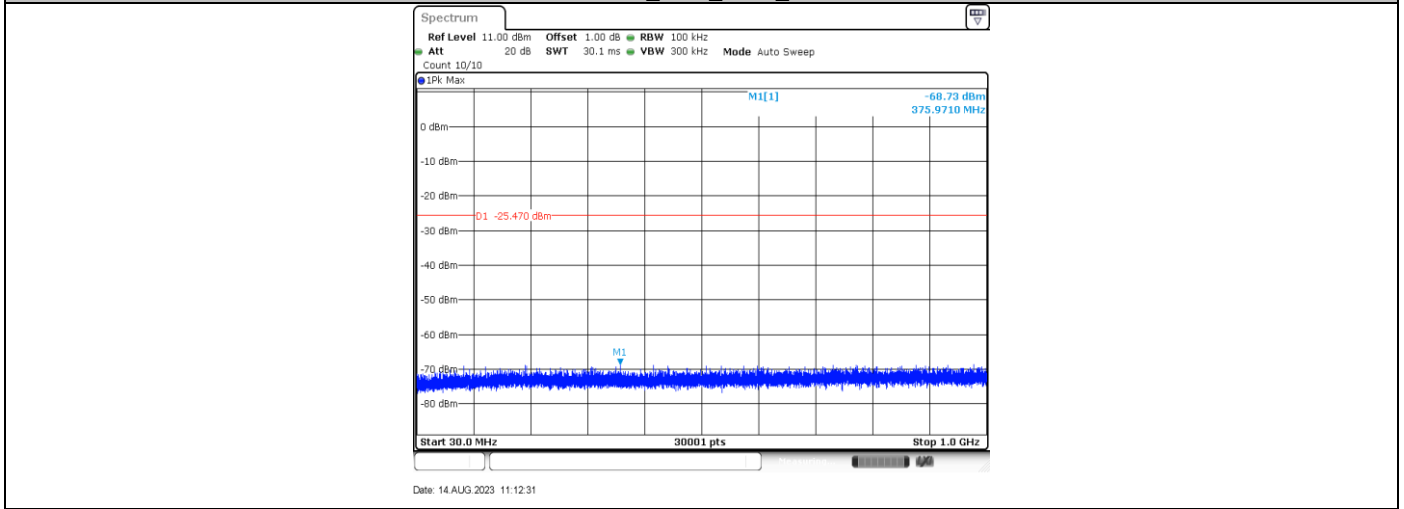

11N40SISO_Ant1_2437_1000~26500

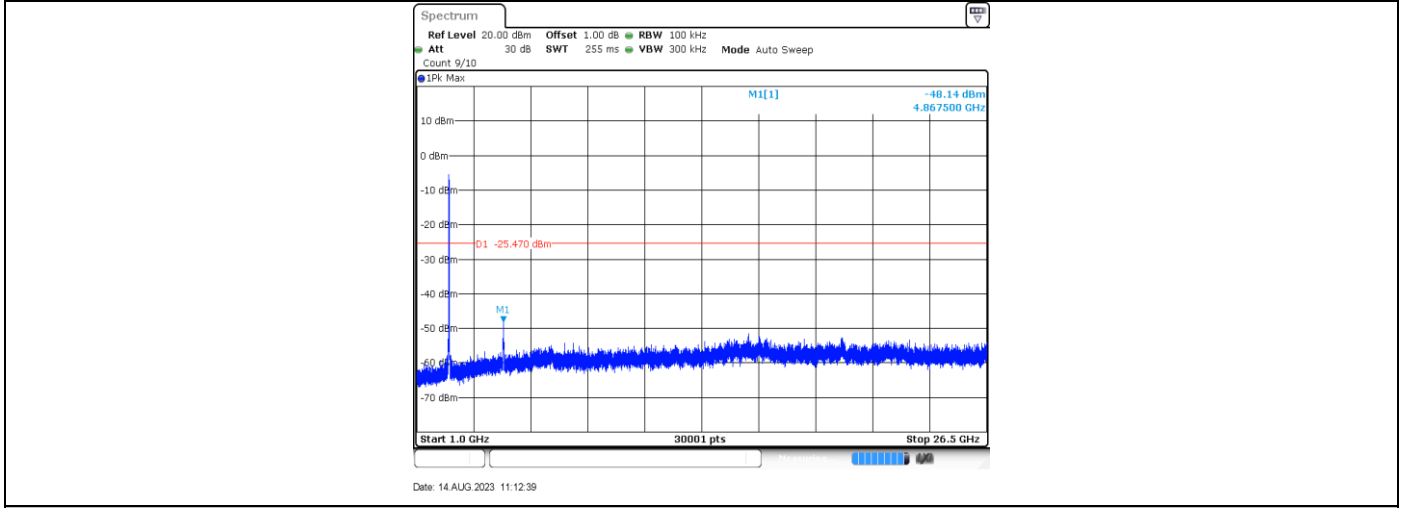


11N40SISO_Ant1_2452_0~Reference

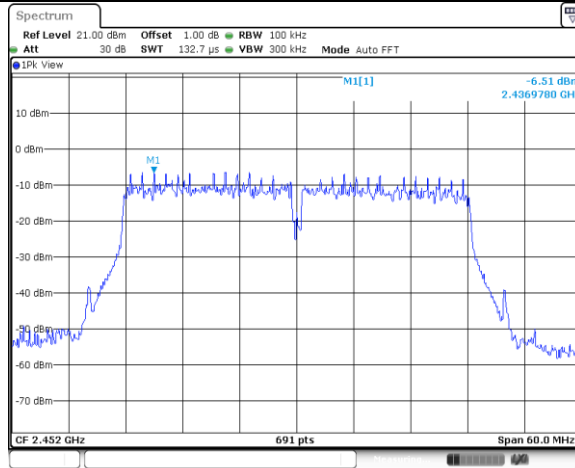


Date: 14.AUG.2023 11:14:13

11N40SISO_Ant1_2452_30~1000

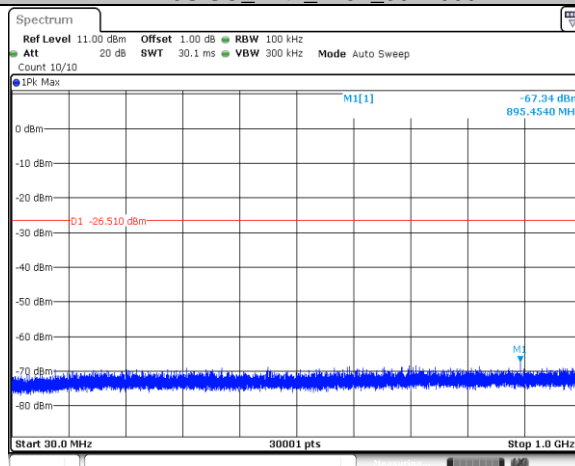

Date: 14.AUG.2023 11:14:19

11N40SISO_Ant1_2452_1000~26500

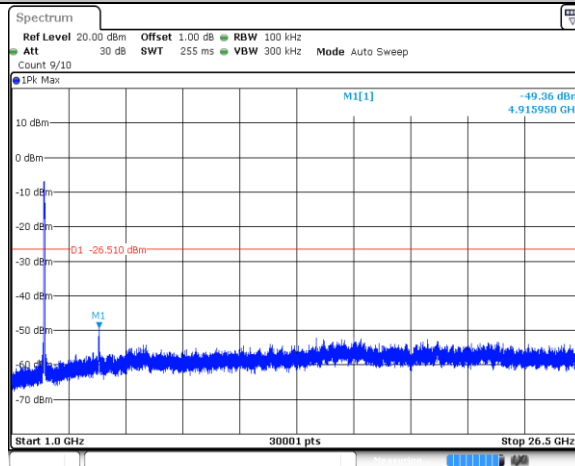

Date: 14.AUG.2023 11:14:26

9.5 Band Edge Testing

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20

Band edge testing


Test Mode	Antenna	Channel Name	Channel (MHz)	Reference Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	Low	2412	1.99	-47.13	<=-18.01	PASS
		High	2462	-0.14	-58.81	<=-20.14	PASS
11G	Ant1	Low	2412	-1.00	-44.15	<=-21.00	PASS
		High	2462	-3.08	-57.3	<=-23.08	PASS
11N20SISO	Ant1	Low	2412	-1.04	-41.19	<=-21.04	PASS
		High	2462	-3.23	-57.57	<=-23.23	PASS
11N40SISO	Ant1	Low	2422	-4.98	-40.51	<=-24.98	PASS
		High	2452	-6.55	-56.88	<=-26.55	PASS

11B_Ant1_Low_2412

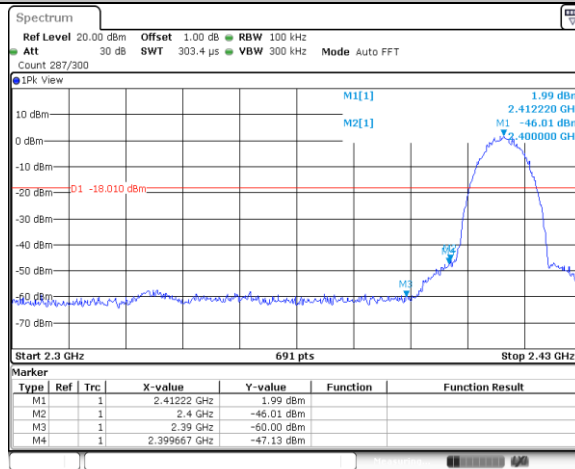


Date: 14.AUG.2023 10:51:34

11B_Ant1_High_2462

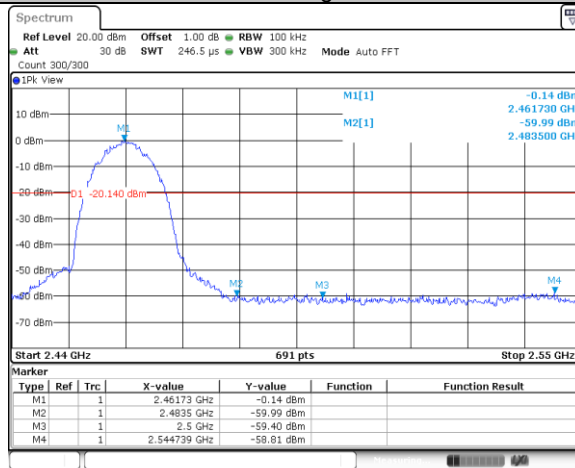


Date: 14.AUG.2023 10:55:10

11G_Ant1_Low_2412

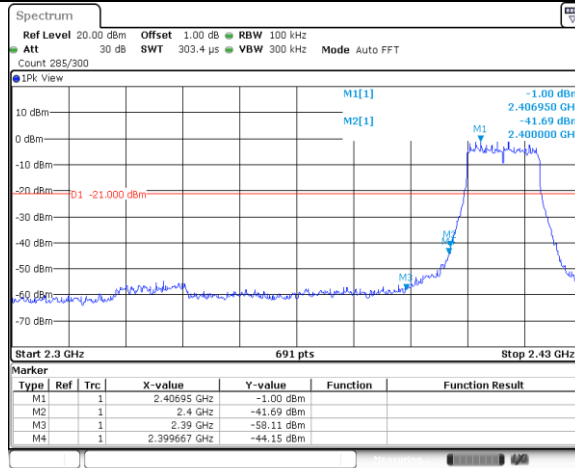


Date: 14.AUG.2023 10:58:06

11G_Ant1_High_2462

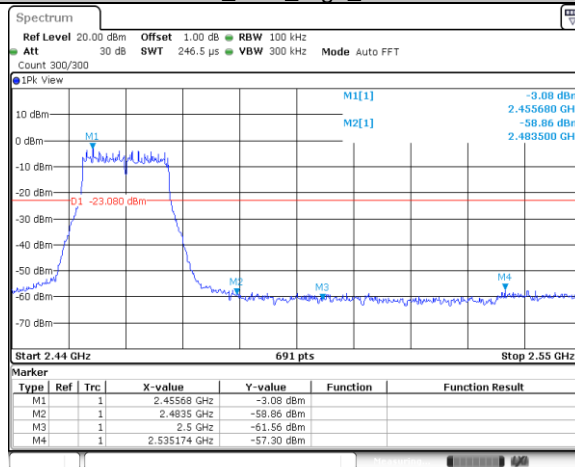


Date: 14.AUG.2023 11:01:36

11N20SISO_Ant1_Low_2412

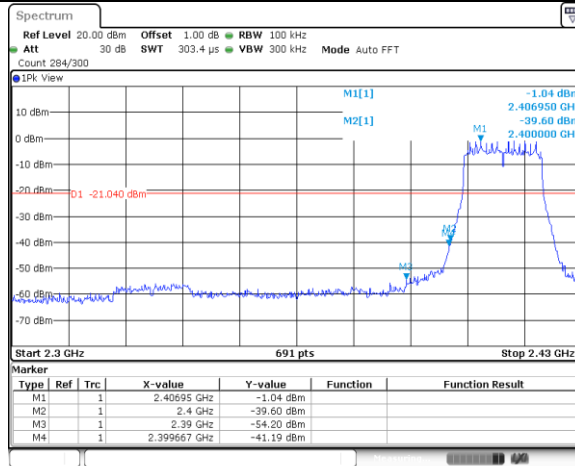


Date: 14.AUG.2023 11:03:59

11N20SISO_Ant1_High_2462

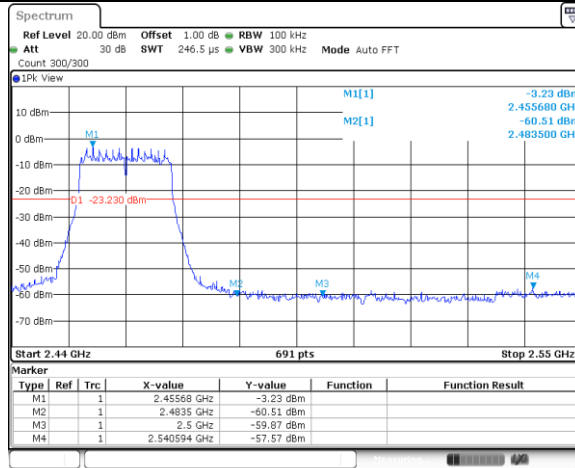


Date: 14.AUG.2023 11:07:34

11N40SISO_Ant1_Low_2422

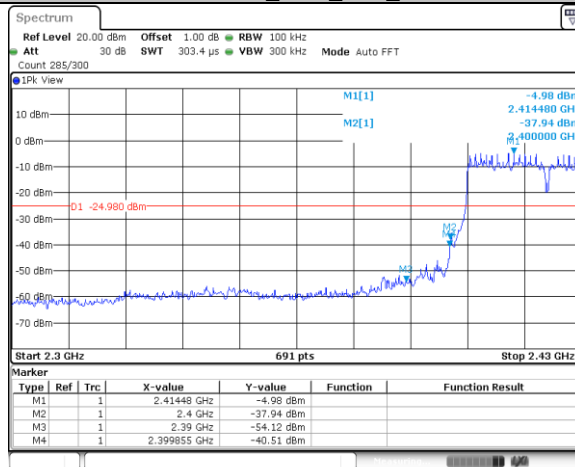

Date: 14.AUG.2023 11:09:39

11N40SISO_Ant1_High_2452

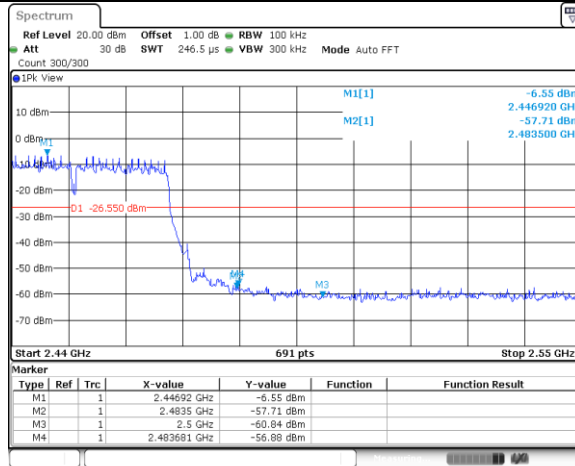

Date: 14.AUG.2023 11:14:07

9.6 Spurious Radiated Emissions for Transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 kHz to 120kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V}/\text{m}$	Field Strength $\text{dB}\mu\text{V}/\text{m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)

Note 2: Limit $3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)

Spurious Radiated Emissions for Transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Data of measurement within frequency range 9kHz-30MHz is the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.

Transmitting spurious emission test result as below:


30MHz – 1000MHz:

11b_2412MHz

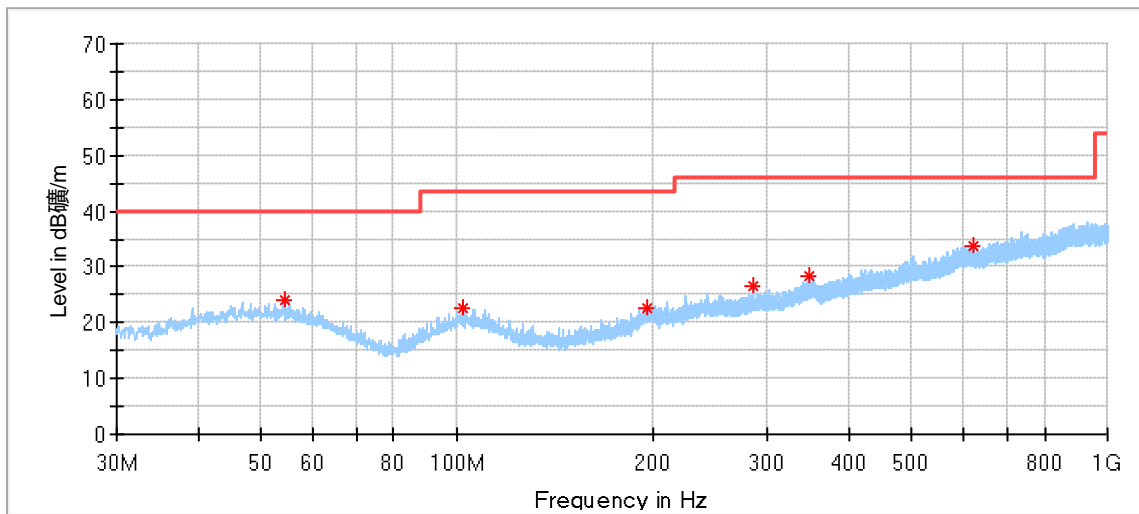


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.357778	23.98	40.00	16.02	200.0	H	19.0	17.84
102.049444	22.60	43.50	20.90	100.0	H	129.0	16.49
196.624444	22.74	43.50	20.76	200.0	H	313.0	16.72
284.571111	26.43	46.00	19.57	100.0	H	349.0	18.46
348.752778	28.34	46.00	17.66	200.0	H	97.0	20.69
623.155000	33.84	46.00	12.16	100.0	H	237.0	25.70

11b_2412MHz

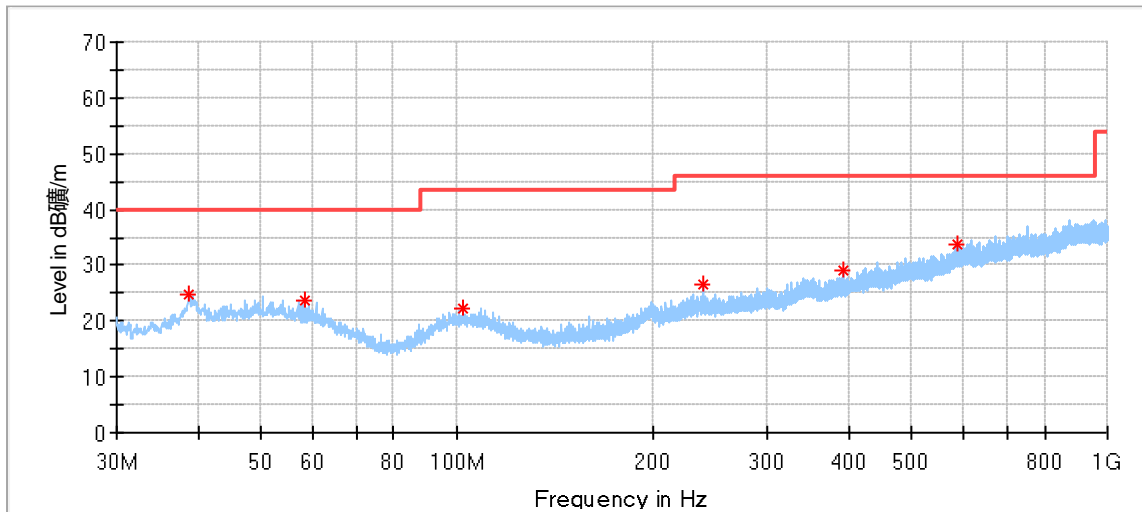

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
38.783889	24.76	40.00	15.24	100.0	V	155.0	16.15
58.345556	23.64	40.00	16.36	100.0	V	200.0	17.23
102.372778	22.22	43.50	21.28	100.0	V	290.0	16.46
239.088889	26.45	46.00	19.55	100.0	V	282.0	17.46
392.618333	29.13	46.00	16.87	200.0	V	255.0	21.26
589.797778	33.76	46.00	12.24	200.0	V	164.0	25.34

1GHz -18GHz:
11b_2412MHz_Ant1:

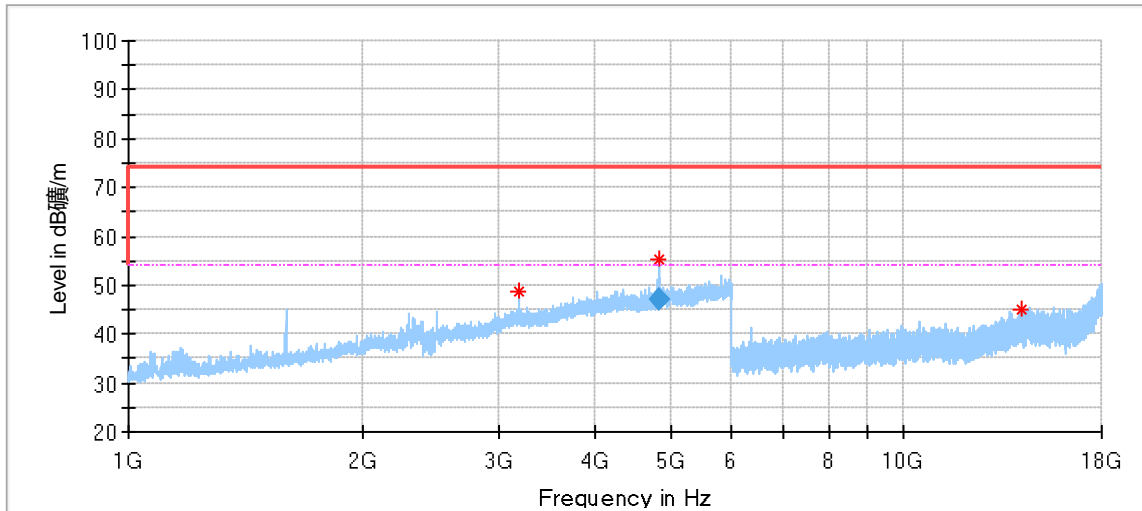


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3188.500000	48.80	74.00	25.20	150.0	H	160.0	-0.21
4824.000000	55.24	74.00	18.76	150.0	H	252.0	5.24
14177.000000	45.15	74.00	28.85	150.0	H	185.0	16.13

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	46.92	54.00	7.08	150.0	H	252.0	5.24

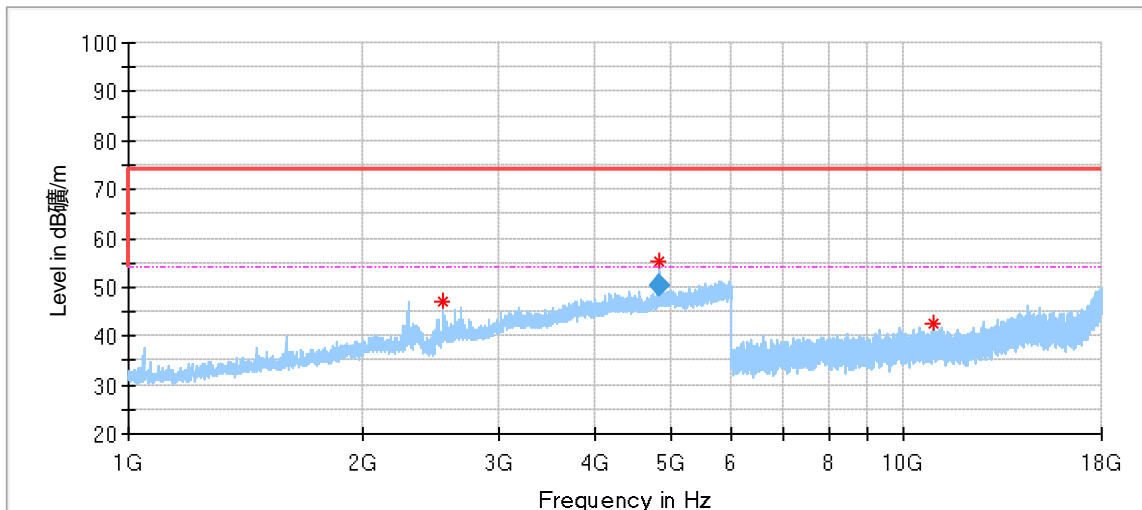


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2548.500000	46.89	74.00	27.11	150.0	V	179.0	-3.81
4824.000000	55.36	74.00	18.64	150.0	V	75.0	5.24
10926.000000	42.73	74.00	31.27	150.0	V	288.0	12.12

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	50.34	54.00	3.66	150.0	V	75.0	5.24

11b_2437MHz_Ant1:

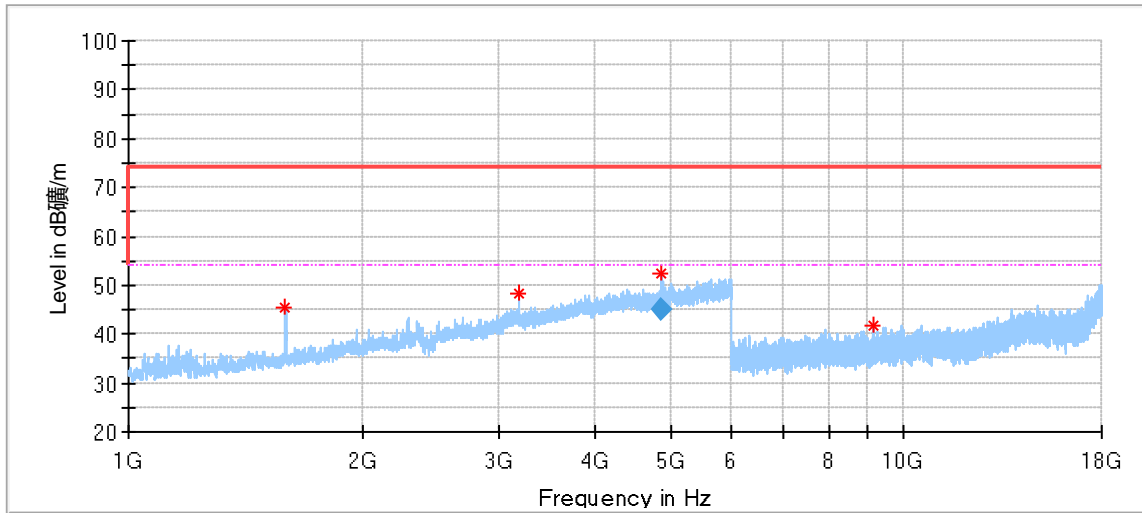


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1594.000000	45.48	74.00	28.52	150.0	H	126.0	-9.28
3194.000000	48.14	74.00	25.86	150.0	H	225.0	-0.21
4874.000000	52.49	74.00	21.51	150.0	H	85.0	5.59
9111.000000	41.94	74.00	32.06	150.0	H	268.0	10.25

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	44.96	54.00	9.04	150.0	H	85.0	5.59

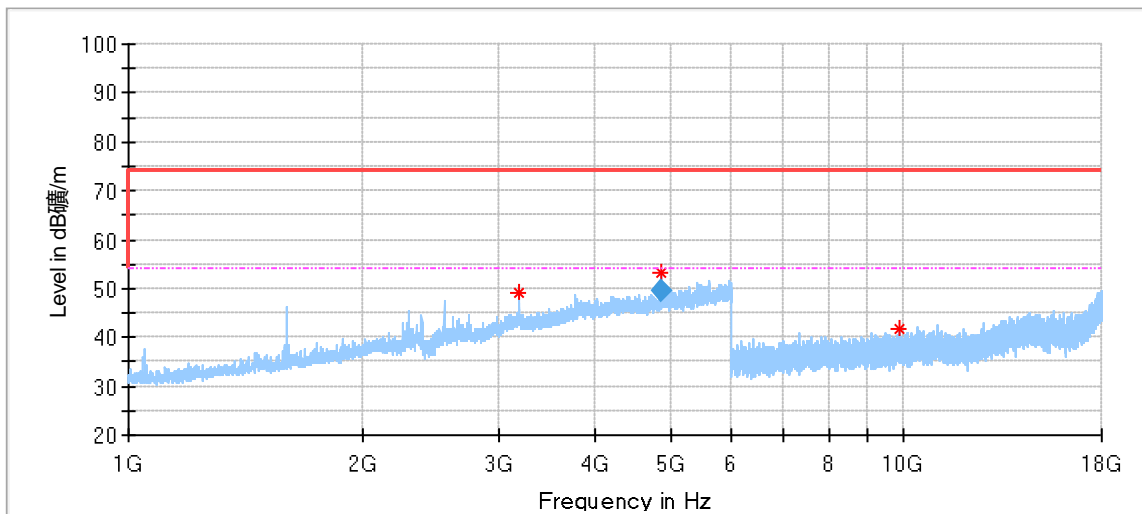


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3193.500000	49.07	74.00	24.93	150.0	V	160.0	-0.21
4874.000000	53.19	74.00	20.81	150.0	V	170.0	5.61
9871.000000	41.62	74.00	32.38	150.0	V	309.0	11.39

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	49.34	54.00	4.66	150.0	V	170.0	5.61

11b_2462MHz_Ant1:

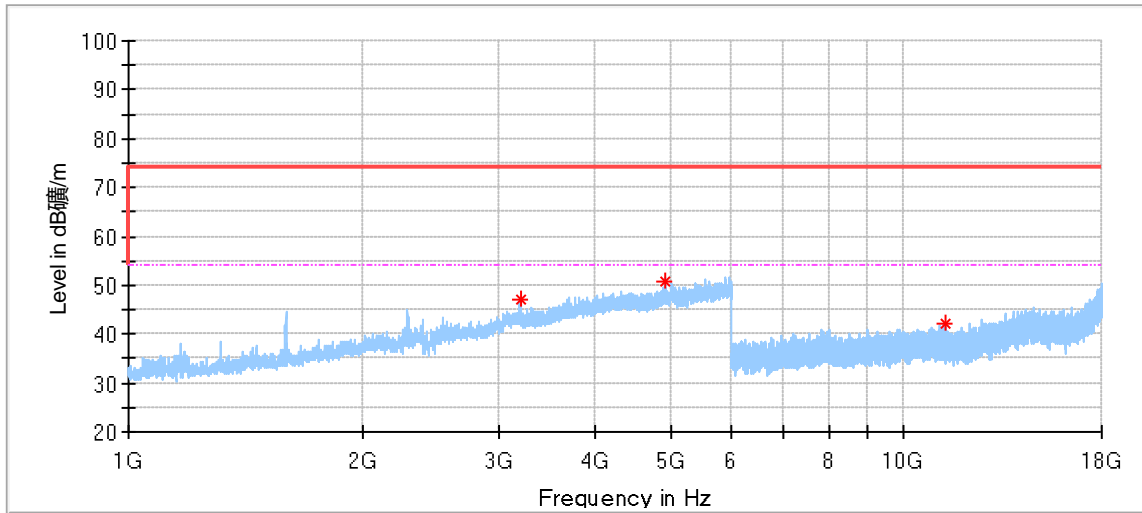


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3199.500000	47.11	74.00	26.89	150.0	H	207.0	-0.22
4924.500000	50.95	74.00	23.05	150.0	H	44.0	5.80
11312.000000	42.22	74.00	31.78	150.0	H	64.0	12.20

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

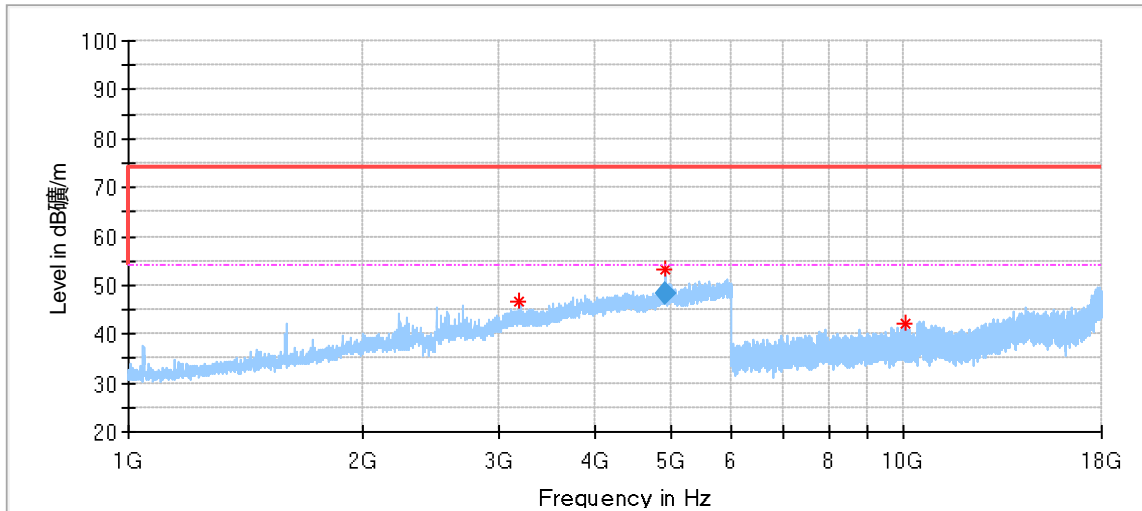


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3196.500000	46.79	74.00	27.21	150.0	V	209.0	-0.22
4924.000000	53.30	74.00	20.70	150.0	V	13.0	5.80
10026.500000	42.11	74.00	31.89	150.0	V	266.0	11.38

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	48.51	54.00	5.49	150.0	V	13.0	5.80

11g_2412MHz_Ant1:

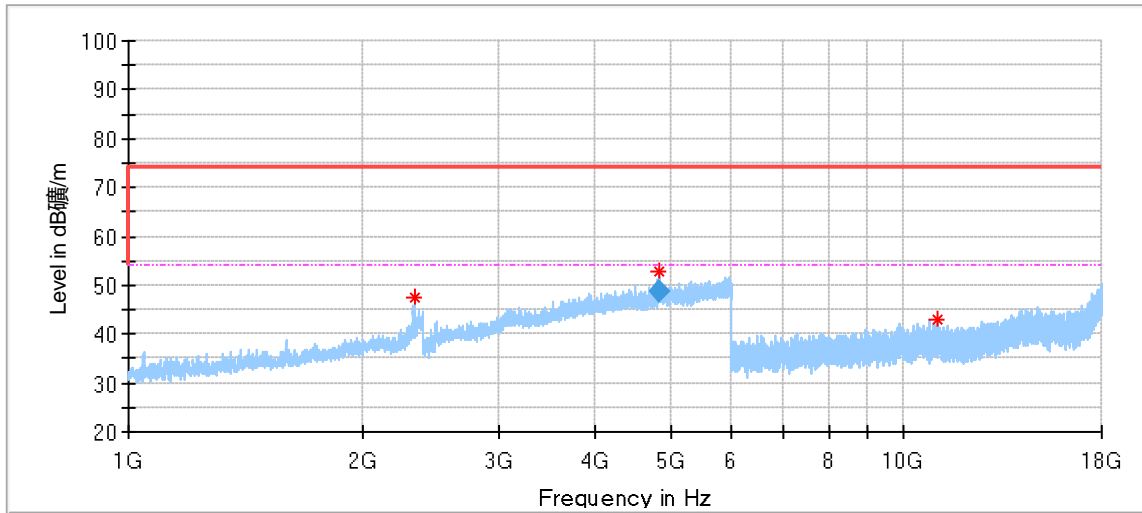


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2339.500000	47.47	74.00	26.53	150.0	H	359.0	-4.85
4824.000000	52.81	74.00	21.19	150.0	H	336.0	5.23
11037.000000	43.16	74.00	30.84	150.0	H	1.0	12.21

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	48.91	54.00	5.09	150.0	H	336.0	5.23

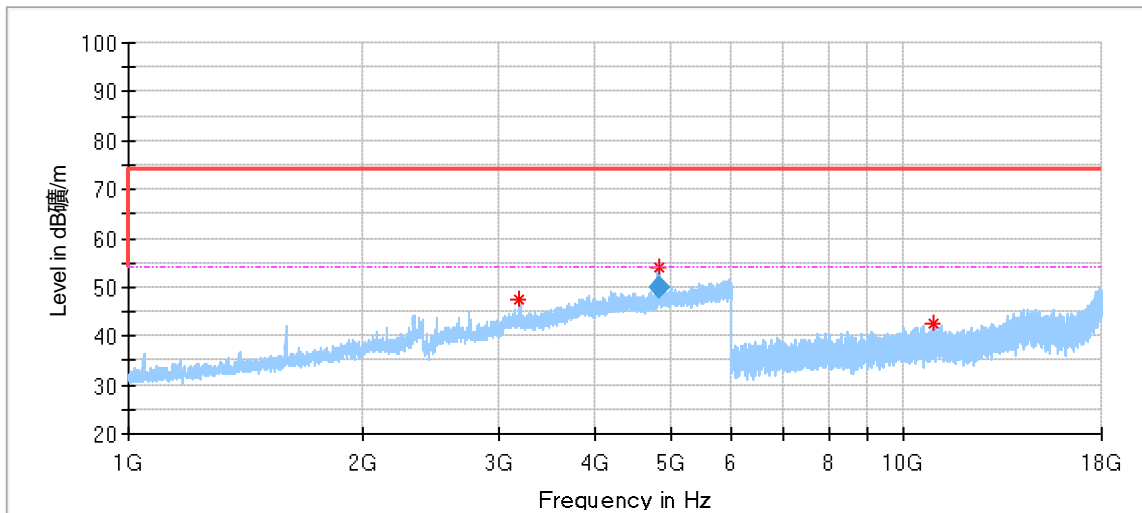


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3197.500000	47.52	74.00	26.48	150.0	V	132.0	-0.22
4824.000000	54.06	74.00	19.94	150.0	V	96.0	5.25
10896.000000	42.56	74.00	31.44	150.0	V	153.0	12.10

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	49.84	54.00	4.16	150.0	V	96.0	5.25

11g_2437MHz_Ant1:

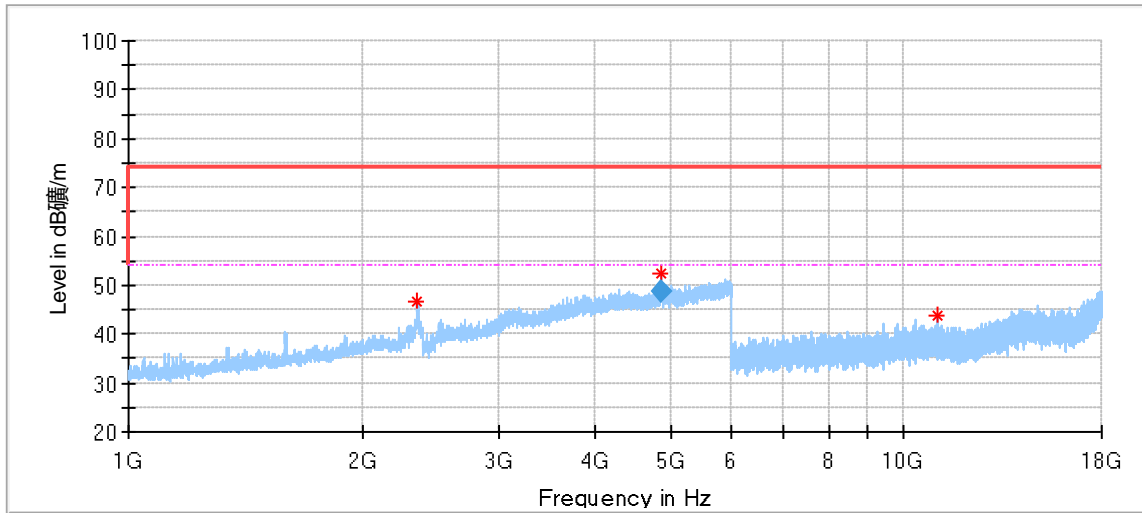


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2360.500000	46.85	74.00	27.15	150.0	H	9.0	-4.70
4874.000000	52.43	74.00	21.57	150.0	H	347.0	5.60
11029.500000	43.93	74.00	30.07	150.0	H	128.0	12.21

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	48.64	54.00	5.36	150.0	H	347.0	5.60

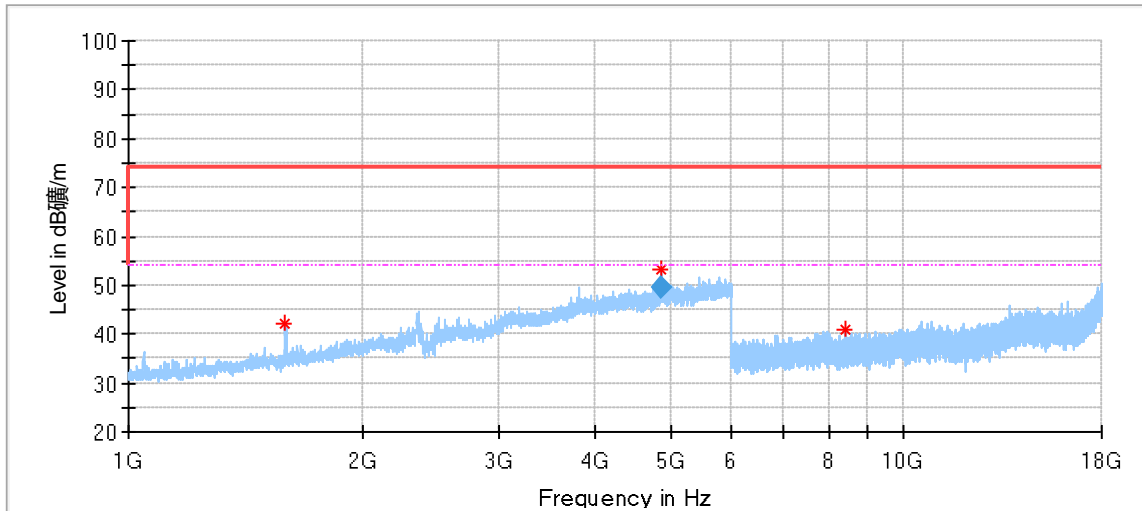


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1593.500000	42.32	74.00	31.68	150.0	V	228.0	-9.28
4874.000000	53.26	74.00	20.74	150.0	V	48.0	5.57
8396.000000	41.06	74.00	32.94	150.0	V	200.0	9.44

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	49.47	54.00	4.53	150.0	V	48.0	5.57

11g_2462MHz_Ant1:

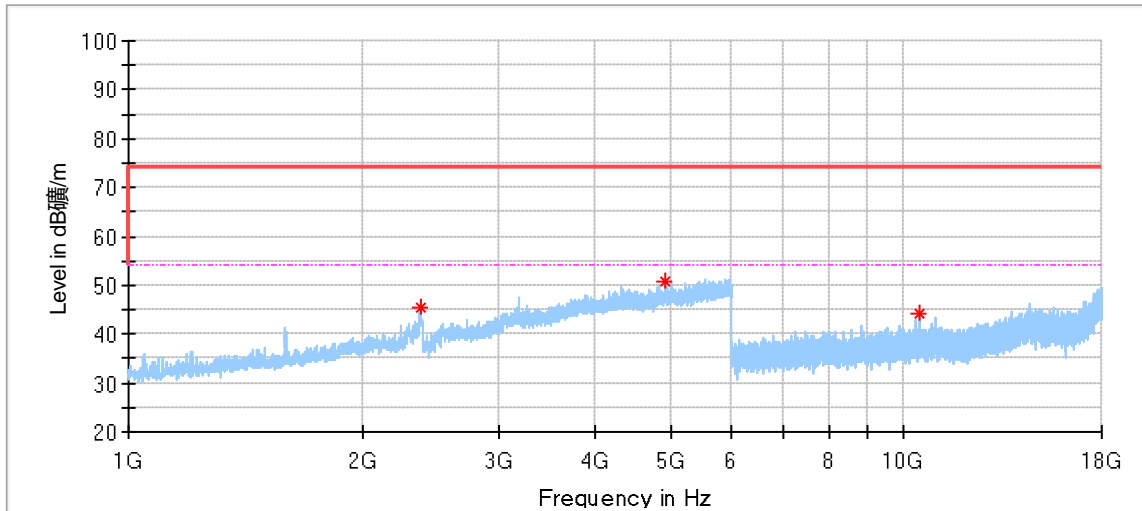


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.000000	45.33	74.00	28.67	150.0	H	1.0	-4.74
4917.000000	50.69	74.00	23.31	150.0	H	288.0	5.81
10450.000000	44.02	74.00	29.98	150.0	H	81.0	11.72

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

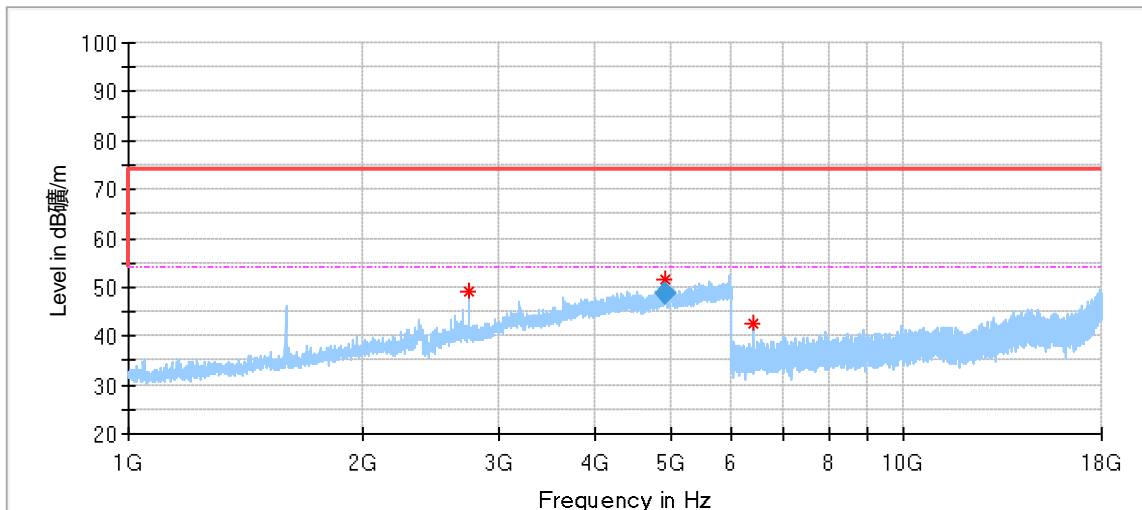


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2748.000000	49.09	74.00	24.91	150.0	V	132.0	-3.03
4924.000000	51.47	74.00	22.53	150.0	V	72.0	5.80
6380.000000	42.70	74.00	31.30	150.0	V	55.0	6.74

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	48.85	54.00	5.15	150.0	V	72.0	5.80

11n20_2412MHz_Ant1:

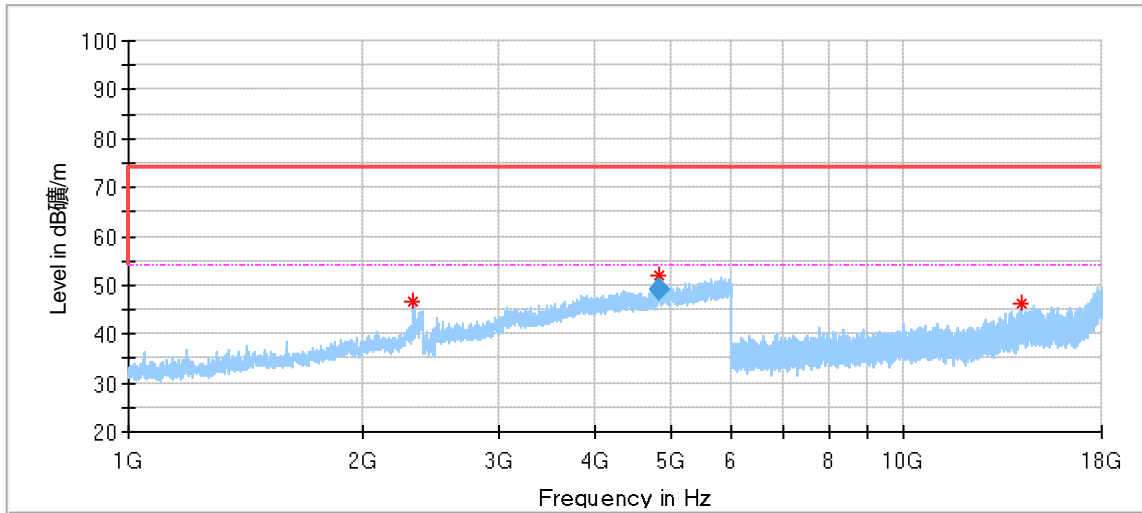


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2328.000000	46.63	74.00	27.37	150.0	H	11.0	-5.02
4824.000000	52.18	74.00	21.82	150.0	H	84.0	5.25
14151.000000	46.13	74.00	27.87	150.0	H	297.0	16.10

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	49.14	54.00	4.86	150.0	H	84.0	5.25

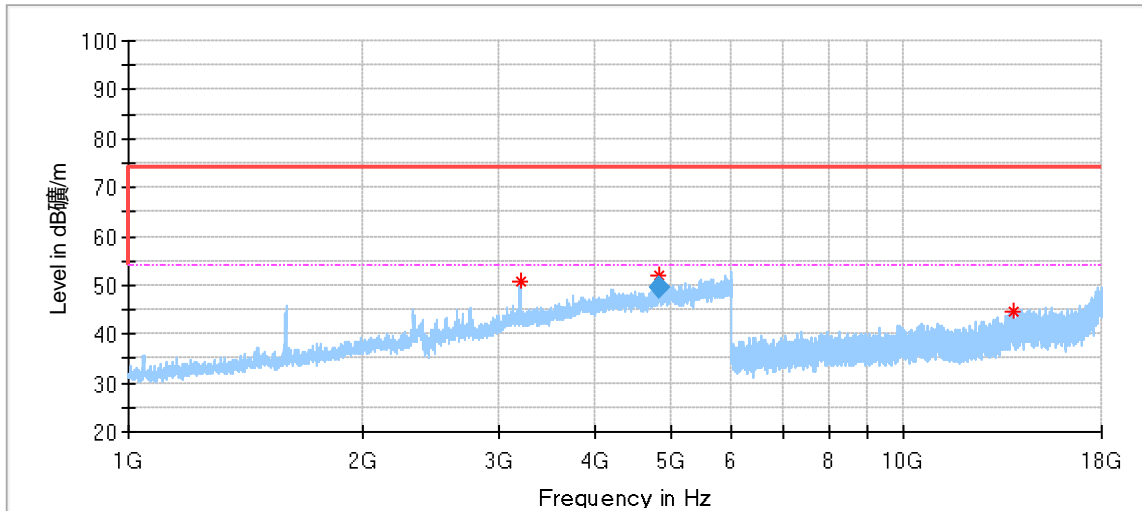


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3199.000000	50.63	74.00	23.37	150.0	V	131.0	-0.22
4824.000000	51.90	74.00	22.10	150.0	V	193.0	5.24
13872.000000	44.75	74.00	29.25	150.0	V	43.0	15.60

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	49.39	54.00	4.61	150.0	V	193.0	5.24

11n20_2437MHz_Ant1:

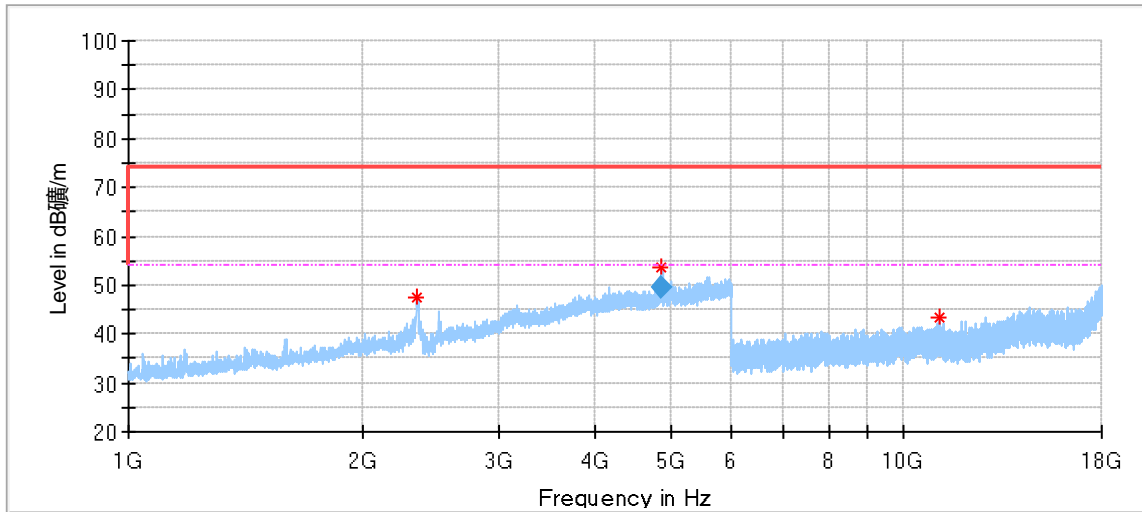


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2355.000000	47.36	74.00	26.64	150.0	H	0.0	-4.67
4874.000000	53.67	74.00	20.33	150.0	H	347.0	5.62
11145.500000	43.45	74.00	30.55	150.0	H	4.0	12.29

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	49.48	54.00	4.52	150.0	H	347.0	5.62

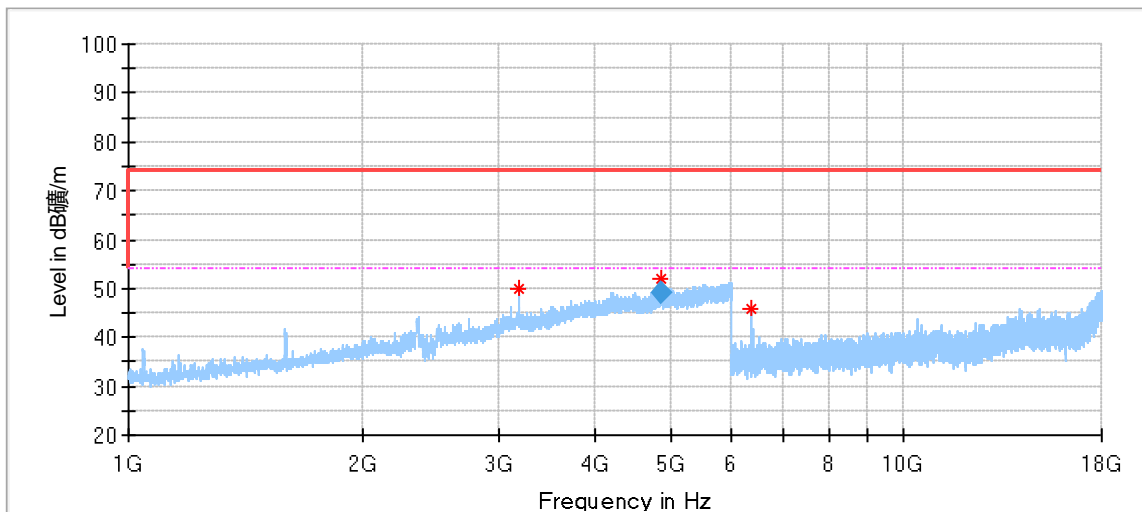


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3186.000000	50.12	74.00	23.88	150.0	V	168.0	-0.20
4874.000000	52.11	74.00	21.89	150.0	V	108.0	5.59
6373.000000	45.91	74.00	28.09	150.0	V	65.0	6.75

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	48.97	54.00	5.03	150.0	V	108.0	5.59

11n20_2462MHz_Ant1:

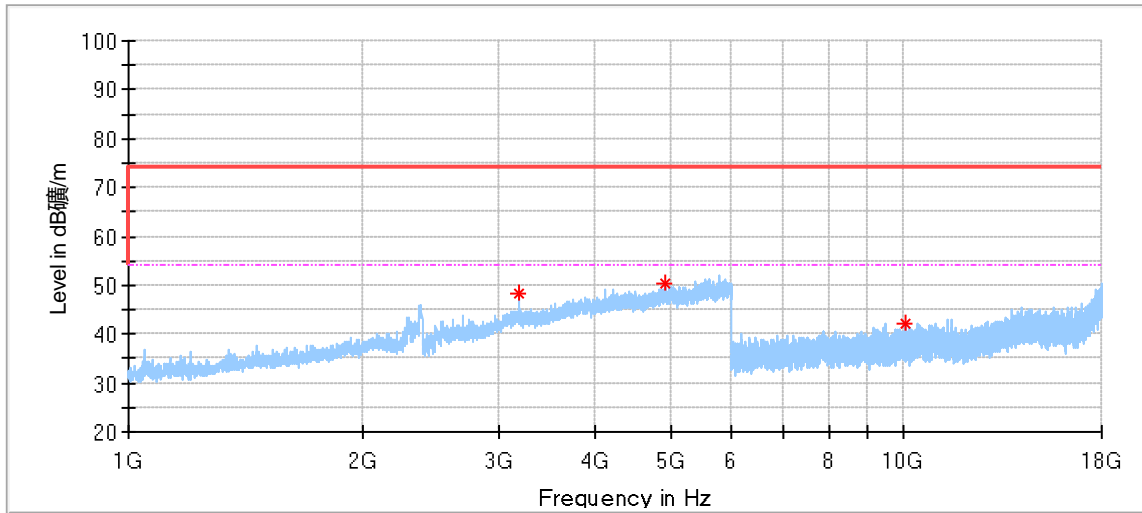


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3187.500000	48.19	74.00	25.81	150.0	H	117.0	-0.20
4934.500000	50.54	74.00	23.46	150.0	H	93.0	5.79
10049.000000	42.26	74.00	31.74	150.0	H	318.0	11.47

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

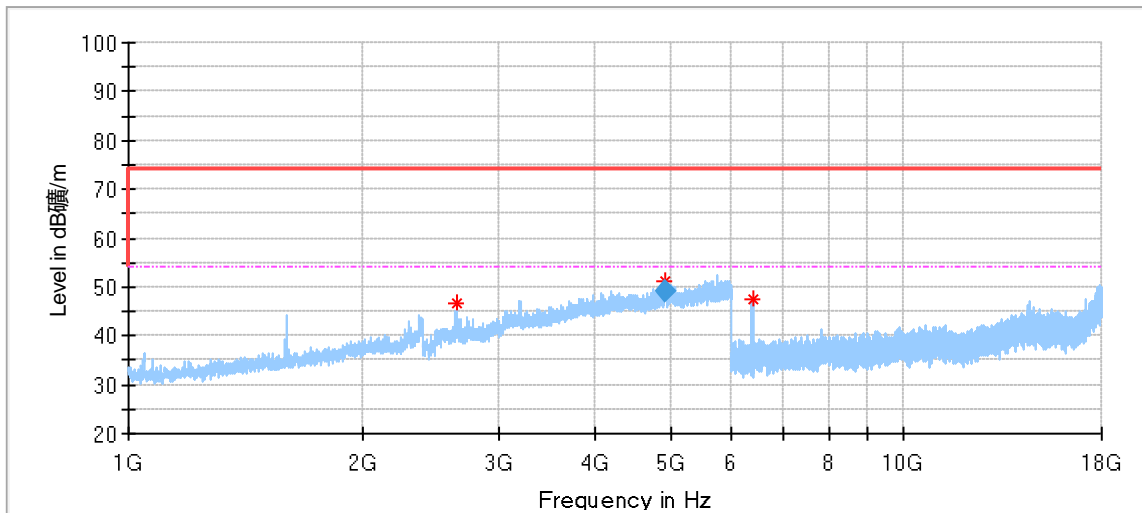


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2656.000000	46.82	74.00	27.18	150.0	V	129.0	-3.16
4924.000000	51.03	74.00	22.97	150.0	V	117.0	5.80
6396.000000	47.62	74.00	26.38	150.0	V	226.0	6.71

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	48.93	54.00	5.07	150.0	V	117.0	5.80

11n40_2422MHz_Ant1:

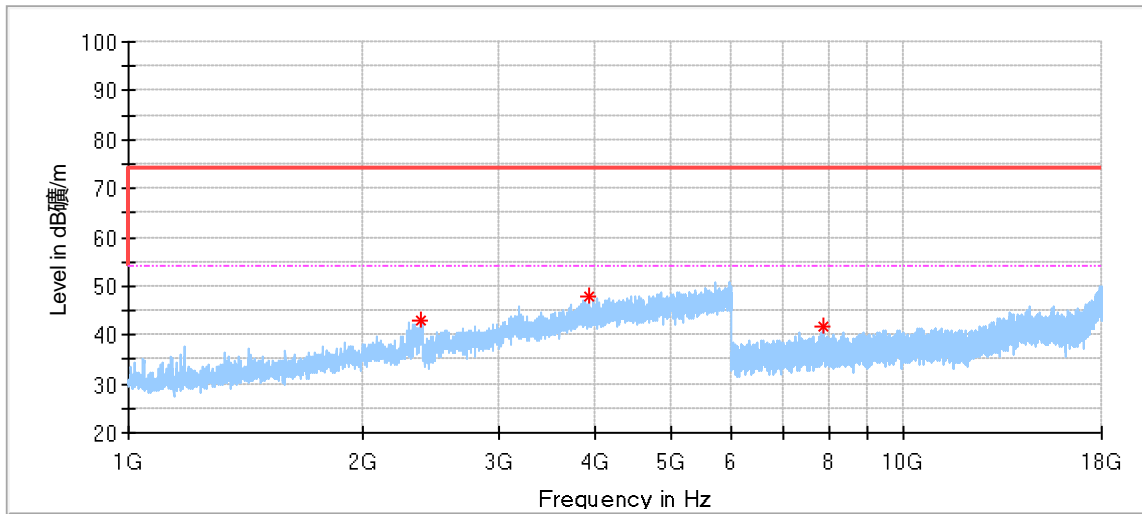


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2382.000000	43.17	74.00	30.83	150.0	H	258.0	-4.75	---
3930.500000	47.95	74.00	26.05	150.0	H	238.0	2.81	---
7874.500000	41.83	74.00	32.17	150.0	H	4.0	8.98	---

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
---	---	---	---	---		---	---	---

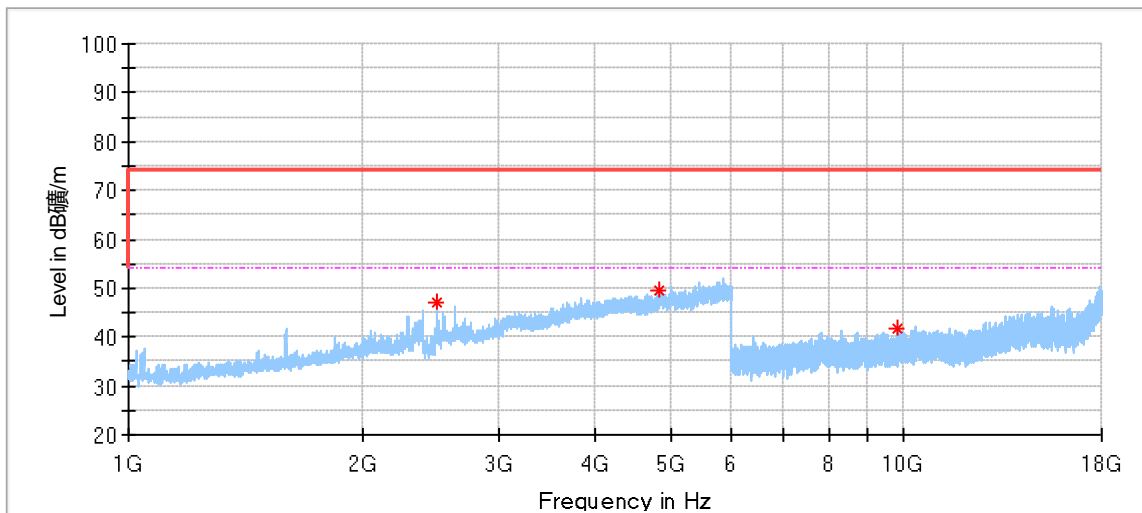


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
2496.500000	46.89	74.00	27.11	150.0	V	234.0	-4.27	---
4839.000000	49.73	74.00	24.27	150.0	V	265.0	5.38	---
9803.000000	41.66	74.00	32.34	150.0	V	91.0	11.34	---

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Corr. (dB)
---	---	---	---	---		---	---	---

11n40_2437MHz_Ant1:

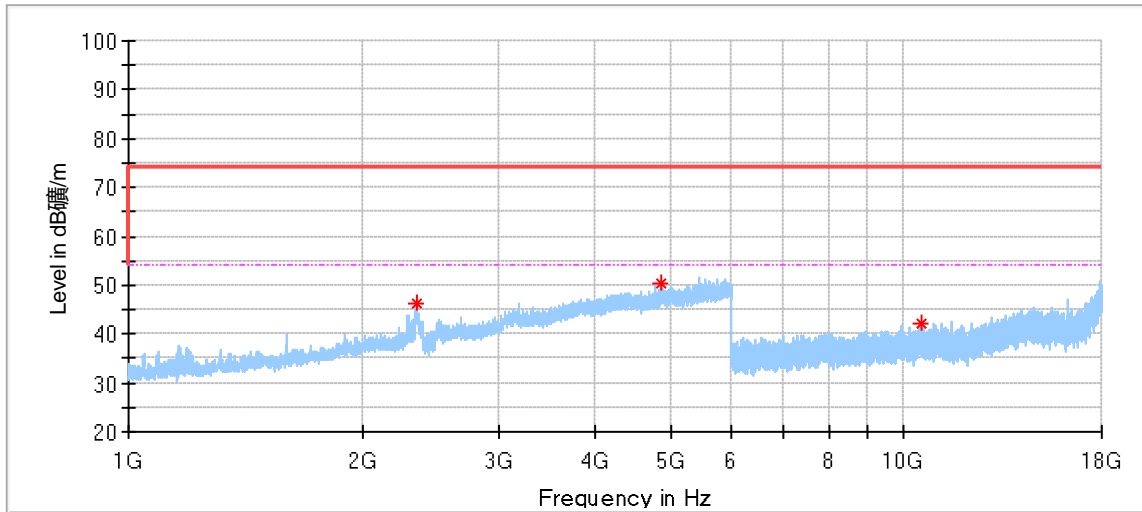


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.000000	46.12	74.00	27.88	150.0	H	68.0	-4.68
4871.000000	50.48	74.00	23.52	150.0	H	265.0	5.59
10534.500000	42.15	74.00	31.85	150.0	H	357.0	11.77

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

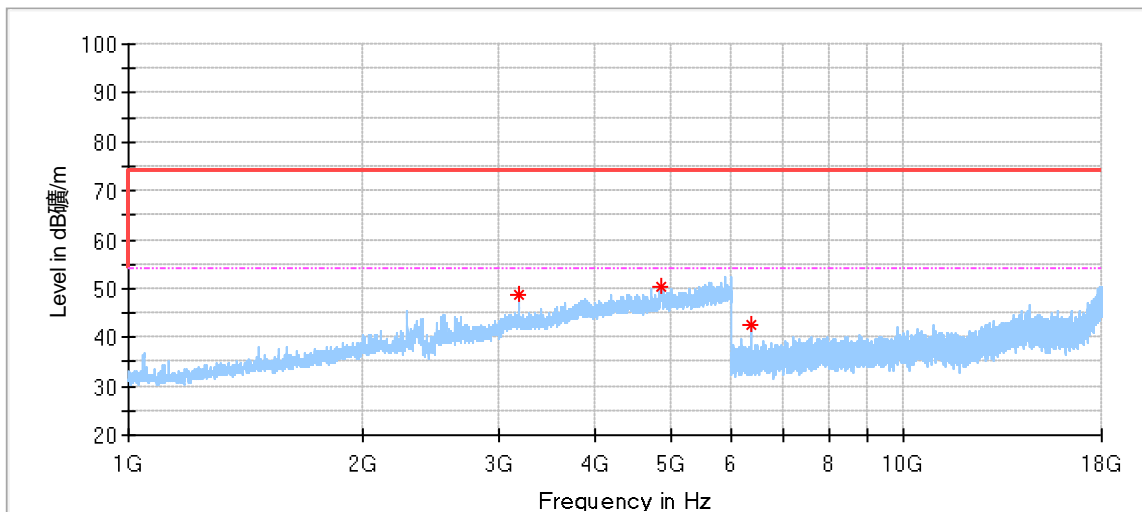


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3196.000000	48.73	74.00	25.27	150.0	V	192.0	-0.22
4875.500000	50.29	74.00	23.71	150.0	V	284.0	5.61
6372.500000	42.56	74.00	31.44	150.0	V	70.0	6.75

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

11n40_2452MHz_Ant1:

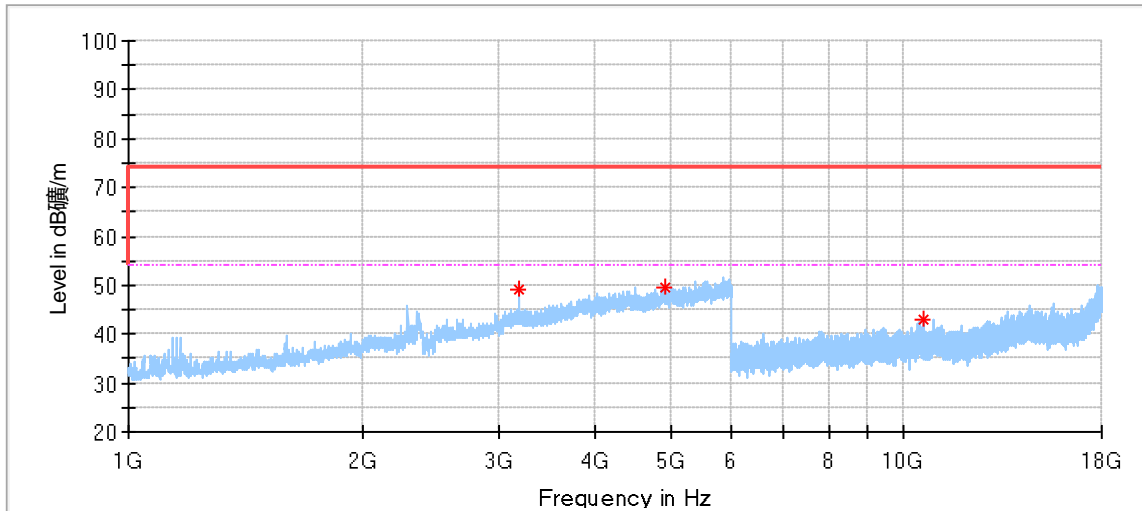


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3186.500000	49.18	74.00	24.82	150.0	H	170.0	-0.20
4914.000000	49.55	74.00	24.45	150.0	H	150.0	5.81
10605.500000	42.82	74.00	31.18	150.0	H	154.0	11.79

Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

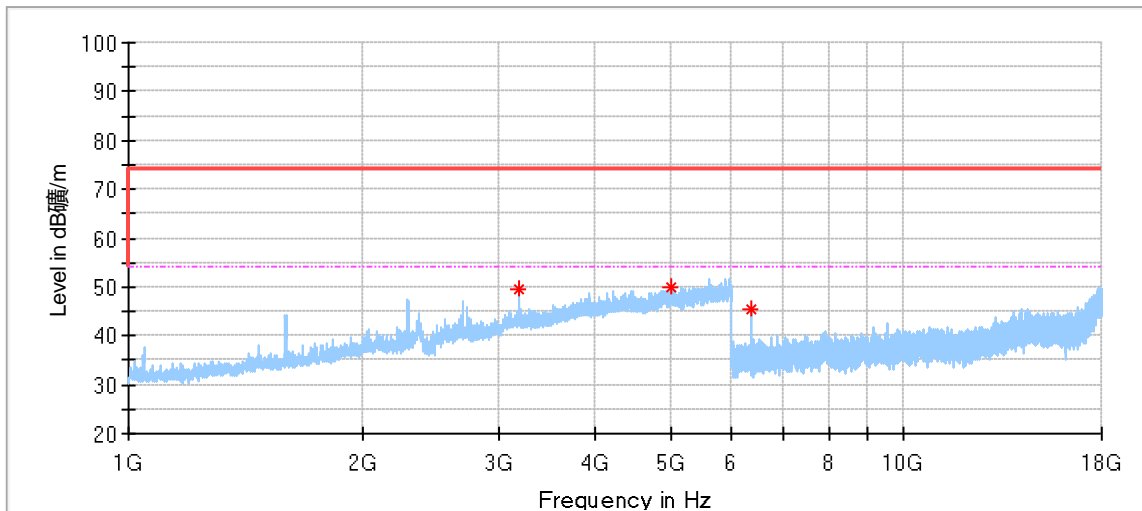


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3191.000000	49.52	74.00	24.48	150.0	V	193.0	-0.21
5016.000000	50.08	74.00	23.92	150.0	V	255.0	6.05
6374.000000	45.25	74.00	28.75	150.0	V	74.0	6.74


Final_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

18GHz -40GHz:
11b_2412MHz:

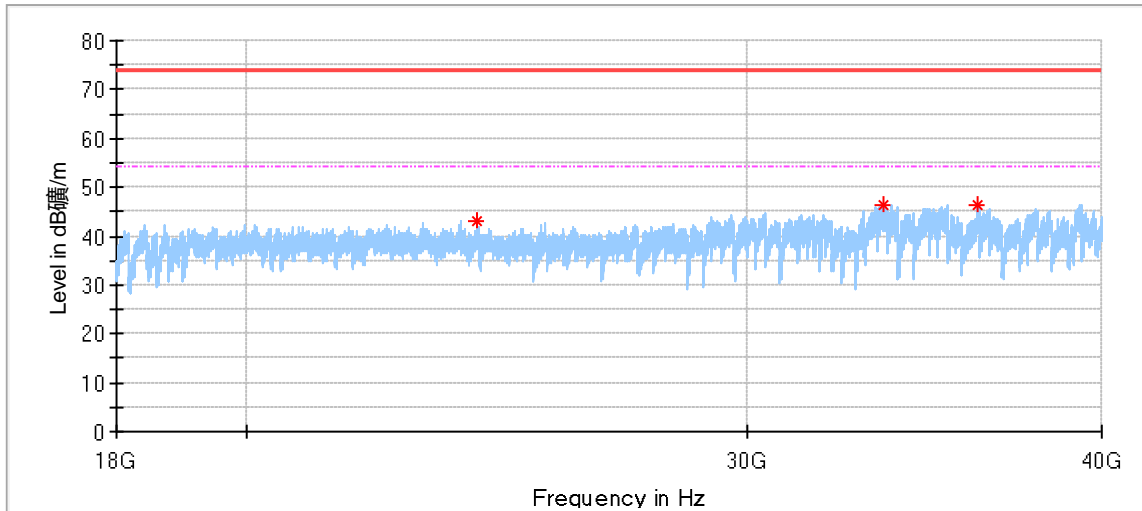


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24100.875000	43.12	74.00	30.88	150.0	H	36.0	1.59
33509.312500	46.37	74.00	27.63	150.0	H	0.0	4.41
36195.375000	46.36	74.00	27.64	150.0	H	176.0	5.56

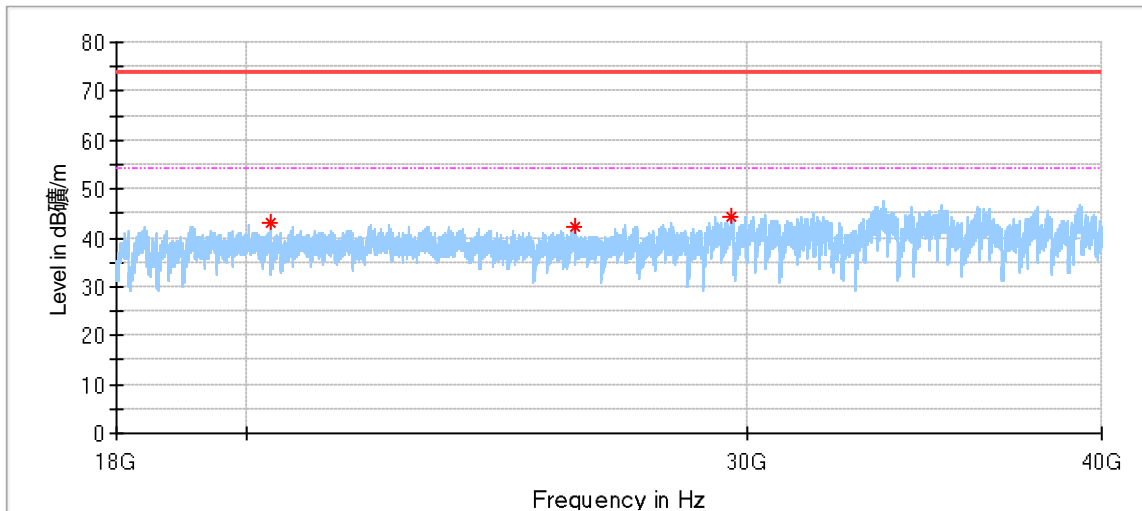


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20391.812500	43.10	74.00	30.90	150.0	V	0.0	-0.22
26100.812500	42.41	74.00	31.59	150.0	V	335.0	2.27
29645.562500	44.25	74.00	29.75	150.0	V	243.0	3.03

11b_2437MHz

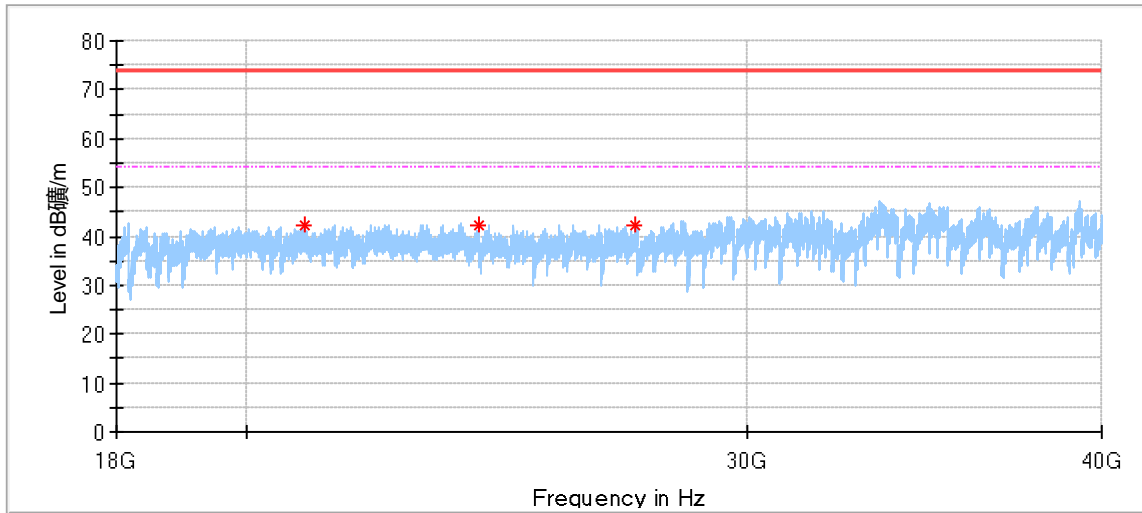


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20973.437500	42.18	74.00	31.82	150.0	H	195.0	0.48
24133.187500	42.32	74.00	31.68	150.0	H	180.0	1.56
27424.250000	42.19	74.00	31.81	150.0	H	349.0	2.47

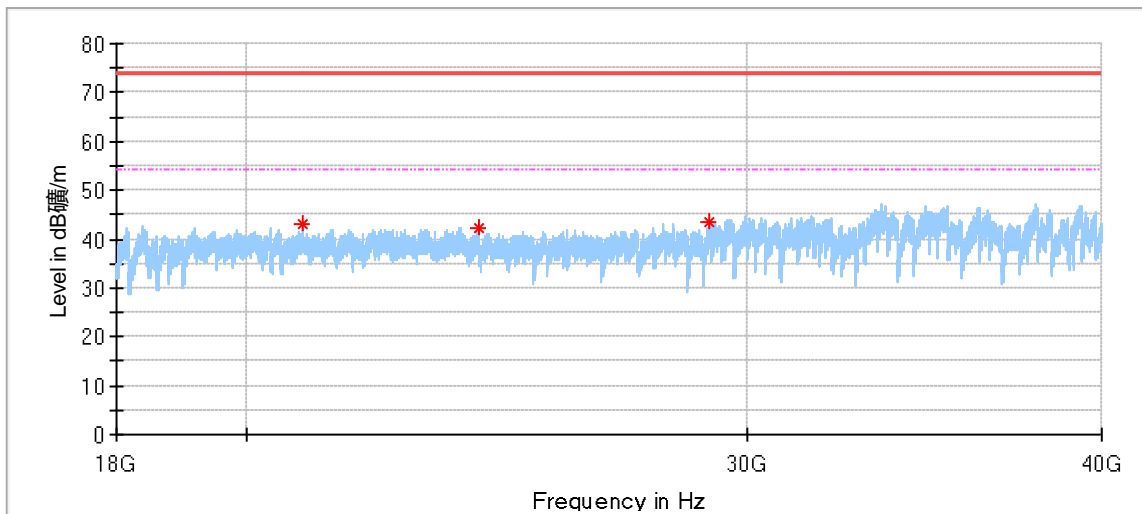


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20927.375000	43.17	74.00	30.83	150.0	V	56.0	0.41
24135.937500	42.06	74.00	31.94	150.0	V	56.0	1.56
29114.812500	43.61	74.00	30.39	150.0	V	180.0	2.33

11b_2462MHz

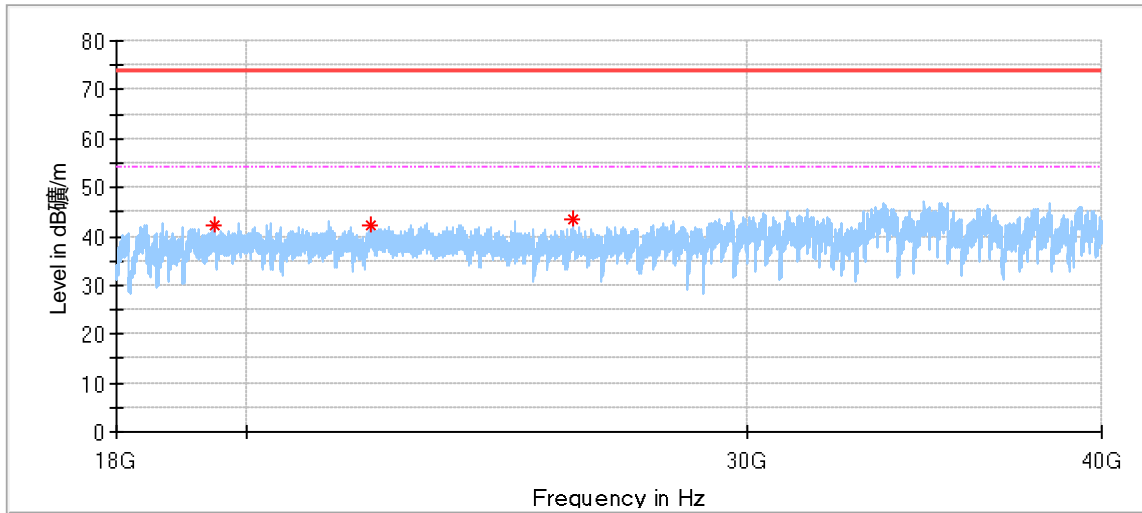

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19496.687500	42.33	74.00	31.67	150.0	H	3.0	-0.85
22112.625000	42.29	74.00	31.71	150.0	H	23.0	0.87
26047.875000	43.60	74.00	30.40	150.0	H	149.0	2.31

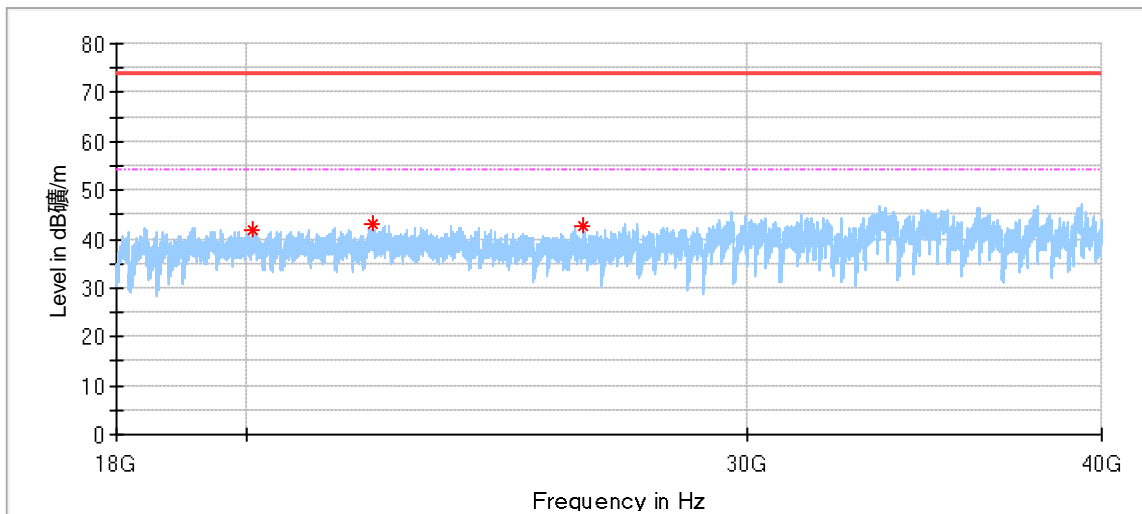

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20092.062500	42.04	74.00	31.96	150.0	V	243.0	-0.90
22140.812500	43.00	74.00	31.00	150.0	V	0.0	0.94
26264.437500	42.58	74.00	31.42	150.0	V	243.0	2.17

Remark:

- (1) Only the worst case data of mode 802.11b within frequency range 30MHz-1GHz and 18GHz-40GHz was put in this report.
- (2) Corrected Amplitude = Read level + Corrector factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss

10 Test Equipment List

Radiated Emission Test (9kHz – 1GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2024-3-5
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2024-8-7
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission 2# Test (30MHz – 40GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2024-4-26
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2024-5-19
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157W	68-4-93-14-003	101226/100929	1	2024-5-20
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	1	2024-5-20
10dB Attenuator	Weinschel	4M-10	68-4-81-14-003	43152	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-004	DNF-001	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-005	DNF-002	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-006	DNF-003	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-007	DNF-004	1	2024-5-19
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB;
Uncertainty for Radiated Emission 18000MHz-40000MHz	Horizontal: 4.52dB; Vertical: 4.51dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 ⁻⁸ or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

---THE END OF REPORT---