

## FCC/ISED - TEST REPORT

Report Number : **68.950.23.0700.01** Date of Issue: 2023-08-29

Model/HVIN : **S500**

Product Type : Dash Cam

Applicant : 70mai Co., Ltd.

Address : Room 2220, building 2, No. 588, Zixing road, MinHang District,  
Shanghai, CHINA

Manufacturer : 70mai Co., Ltd.

Address : Room 2220, building 2, No. 588, Zixing road, MinHang District,  
Shanghai, CHINA

Test Result :  **Positive**     Negative

Total pages including Appendices : **66**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.



# 1 Table of Contents

1	Table of Contents .....	2
2	Details about the Test Laboratory .....	3
3	Description of the Equipment Under Test .....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results .....	6
6	General Remarks .....	7
7	Test Setups .....	8
8	Systems Test Configuration .....	9
9	Technical Requirement .....	10
9.1	Conducted Output Power & EIRP .....	10
9.2	6dB Bandwidth and 99% Occupied Bandwidth.....	12
9.3	Power Spectral Density .....	22
9.4	Spurious RF Conducted Emissions .....	27
9.5	Band Edge Testing.....	41
9.6	Spurious Radiated Emissions for Transmitter.....	45
10	Test Equipment List.....	65
11	System Measurement Uncertainty .....	66

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu,  
Nantou, Nanshan District,  
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

IC Registration No.: 10320A

### 3 Description of the Equipment Under Test

Product:	Dash Cam
Model no.:	S500
Hardware Version Identification No. (HVIN)	S500
Product Marketing Name (PMN)	S500
Brand name:	70mai
FCC ID:	2AOK9-S500
IC:	28033-S500
Options and accessories:	Car charger
Rating:	5VDC, 2.4A powered by car charger
RF Transmission Frequency:	2412MHz-2462MHz for 802.11b/g/n20/n40 (Wi-Fi)
No. of Operated Channel:	11 for 802.11b/g/n20 (Wi-Fi) 7 for 802.11n40 (Wi-Fi)
Modulation:	DSSS, OFDM
Antenna Type:	FPC Antenna
Antenna 1	2.83dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Dash Cam which supports Wi-Fi technology and operated at 2.4GHz. Only 2.4GHz Wi-Fi included in this report.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2021 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators
RSS-Gen Issue 5 April 2018 + Amendment 1 March 2019 + Amendment 2 February 2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2 February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and License-Exempt Local Area Network (LE-LAN) Devices

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements					
FCC Part 15 Subpart C/ RSS-247 Issue 2/RSS-Gen Issue 5					
Test Condition		Test Site	Test Result		
			Pass	Fail	N/A
§15.207 & RSS-GEN 8.8	Conducted emission AC power port	N/A	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247 (b) (3) & RSS-247 5.4(d)	Conducted peak output power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RSS-247 5.4(d)	Equivalent Isotropic Radiated Power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(2) & RSS-247 5.2(a) & RSS-GEN 6.7	6dB bandwidth and 99% Occupied Bandwidth	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e) & RSS-247 5.2(b)	Power spectral density	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Spurious RF conducted emissions	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & RSS-247 5.5	Band edge	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d) & §15.209 & §15.205 & RSS-247 5.5 & RSS-Gen 6.13	Spurious radiated emissions for transmitter	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203 & RSS-Gen 6.8	Antenna requirement	See note 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a FPC antenna, which gain are 2.83dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AOK9-S500, IC: 28033-S500, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules and RSS-247, RSS-GEN.

### SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-08-08

Testing Start Date: 2023-08-08


Testing End Date: 2023-08-15

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch


Reviewed by:

Prepared by:

Tested by:



John Zhi  
Section Manager



Sanvin Zheng  
Project Engineer




Carry Cai  
Test Engineer


## 7 Test Setups

### 7.1 Radiated test setups


#### 9KHz - 30MHz

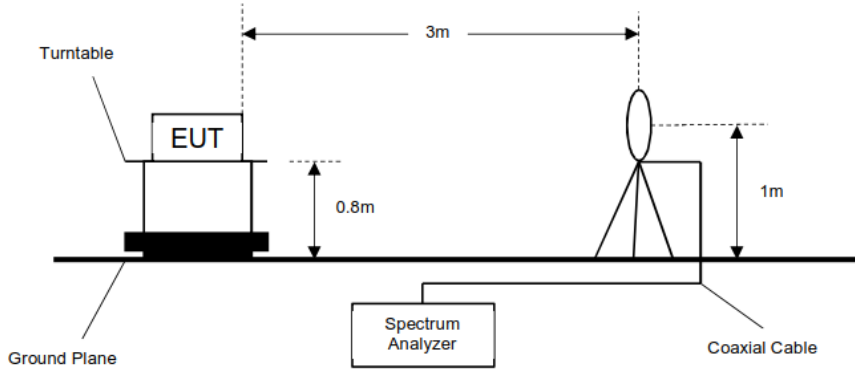


#### 30MHz - 1GHz

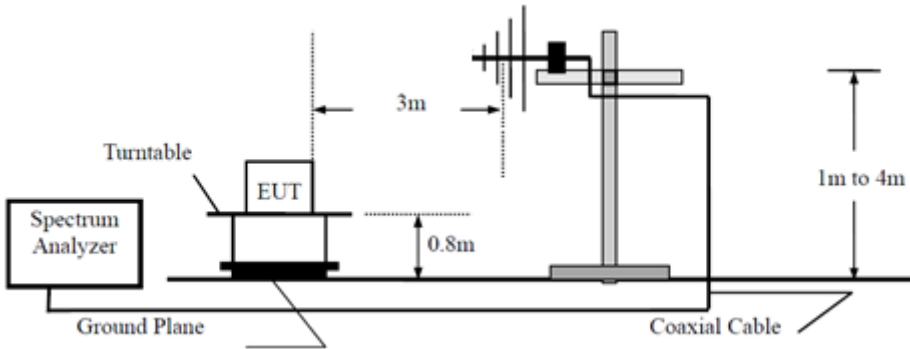

#### Above 1GHz

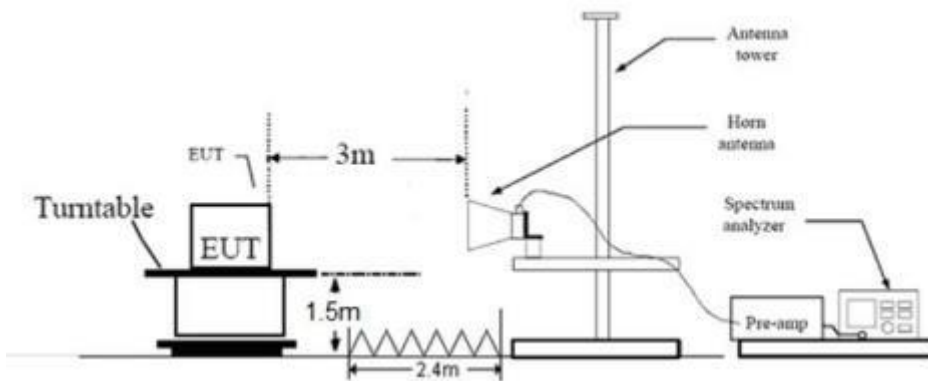

### 7.2 Conducted RF test setups





## 8 Systems Test Configuration

### Auxiliary Equipment Used during Test:

Description	Manufacturer	Model NO.	S/N
Car charger	70mai	Midrive CC01	Input: DC 12V-24V, 1A Output: DC 5V, 2.4A, DC 5V, 1A
Notebook	LENOVO	X220	---

### Cables Used During Test:

Cable	Length	Shielded/unshielded	With / without ferrite
USB power cable	350cm	shield	---

### Test software information:

Test Software Version	sscom5.13.1	
Mode	Setting TX Power	Packet Type
802.11b	30	DSSS
802.11g	38	OFDM
802.11n20	38	OFDM
802.11n40	36	OFDM

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.


Through pre-scan all kind of modulation and all kind of rates, find the 11Mbps of rate is the worst case of 802.11b; the 54Mbps of rate is the worst case of 802.11g; the 65Mbps of rate is the worst case of 802.11n20 & 802.11n40, only the worst case transmitter rate data mode in recorded in the report.

## 9 Technical Requirement

### 9.1 Conducted Output Power & EIRP

#### Test Method

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 4) Measure the peak power of the transmitter. This measurement is a peak over both the ON and OFF periods of the transmitter.

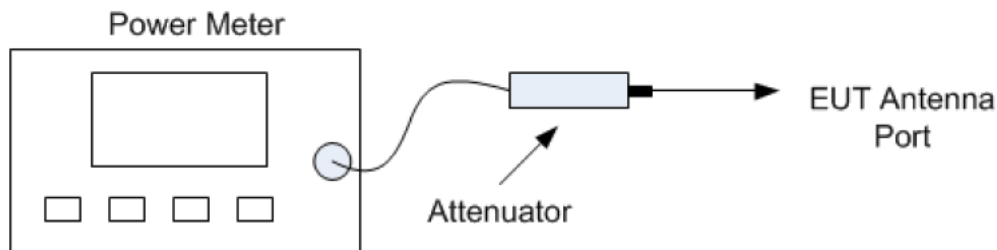

**Power meter conducted test setup**

#### Limits

According to §15.247 (b) (3) & RSS-247 5.4(d), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

According to & RSS-247 5.4(d), EIRP limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤4	≤36

Test result as below table

802.11b modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	10.7	2.83	13.53	Pass
Middle channel 2437MHz	10.7	2.83	13.53	Pass
High channel 2462MHz	10.7	2.83	13.53	Pass

## 802.11g modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	9.5	2.83	12.33	Pass
Middle channel 2437MHz	9.7	2.83	12.53	Pass
High channel 2462MHz	9.1	2.83	11.93	Pass

## 802.11n20 modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2412MHz	9.4	2.83	12.23	Pass
Middle channel 2437MHz	9.6	2.83	12.43	Pass
High channel 2462MHz	9.0	2.83	11.83	Pass

## 802.11n40 modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Result
Low channel 2422MHz	8.9	2.83	11.73	Pass
Middle channel 2437MHz	8.8	2.83	11.63	Pass
High channel 2452MHz	8.6	2.83	11.43	Pass

## 9.2 6dB Bandwidth and 99% Occupied Bandwidth

### Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW=100KHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

### Test Method for 99 % Bandwidth

1. Connect EUT test port to spectrum analyzer.  
Use the following spectrum analyzer settings:  
RBW=1% to 5% of the actual occupied, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the occupied bandwidth measurement capability of test receiver.
3. Allow the trace to stabilize, record the occupied bandwidth value.

### Limit

6dB bandwidth Limit [kHz]	99% bandwidth Limit [kHz]
≥500	--

#### 802.11b modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	7.680	13.387	0.5	Pass
Middle channel 2437MHz	8.680	13.427	0.5	Pass
High channel 2462MHz	7.600	13.387	0.5	Pass

#### 802.11g modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	16.480	17.103	0.5	Pass
Middle channel 2437MHz	16.520	17.063	0.5	Pass
High channel 2462MHz	16.440	17.143	0.5	Pass


#### 802.11n-HT20 modulation Test Result


Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2412MHz	17.720	18.102	0.5	Pass
Middle channel 2437MHz	17.640	18.022	0.5	Pass
High channel 2462MHz	17.400	17.862	0.5	Pass

802.11n-HT40 modulation Test Result

Frequency (MHz)	6dB bandwidth (MHz)	99% bandwidth (MHz)	Limit (MHz)	Result
Low channel 2422MHz	35.840	36.523	0.5	Pass
Middle channel 2437MHz	36.160	36.843	0.5	Pass
High channel 2452MHz	36.480	36.603	0.5	Pass


6 dB Bandwidth

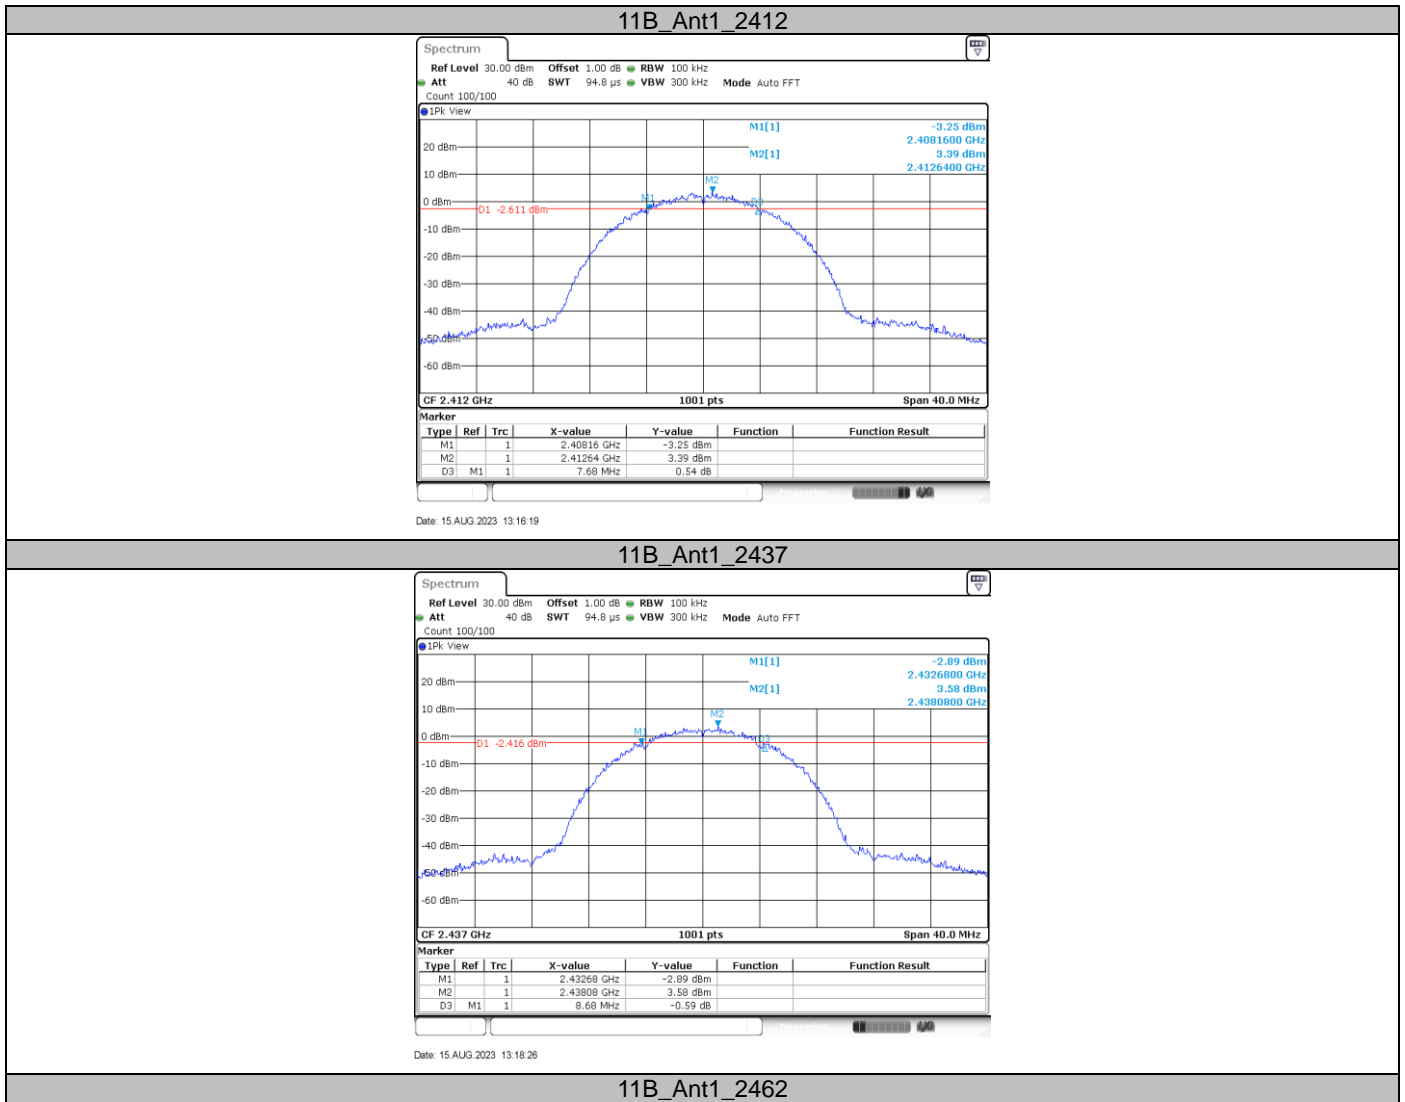

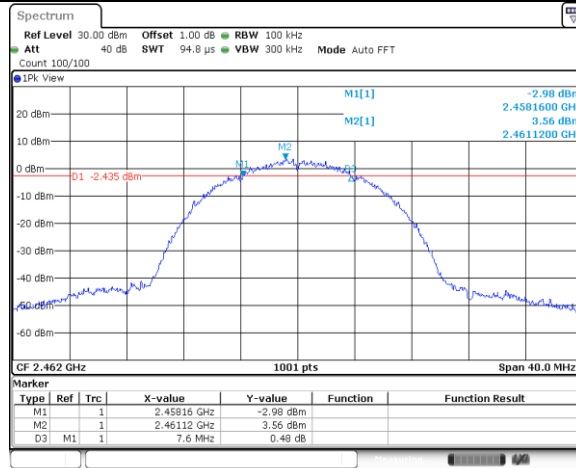


Date: 15.AUG.2023 13:20:22

11G\_Ant1\_2412

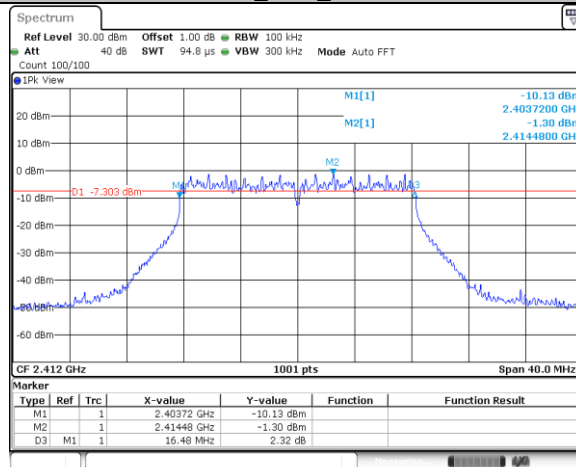


Date: 15.AUG.2023 13:22:22

11G\_Ant1\_2437

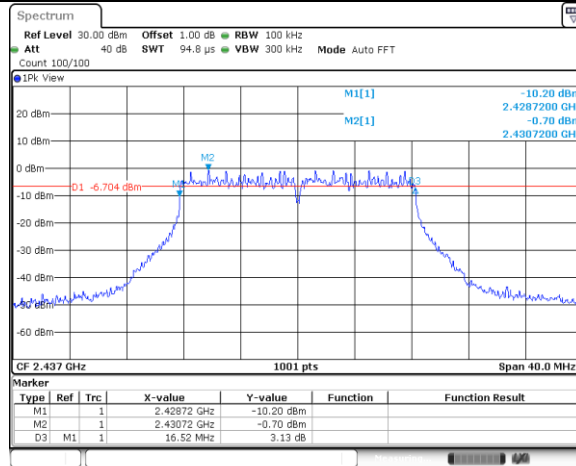


Date: 15.AUG.2023 13:45:34

11G\_Ant1\_2462

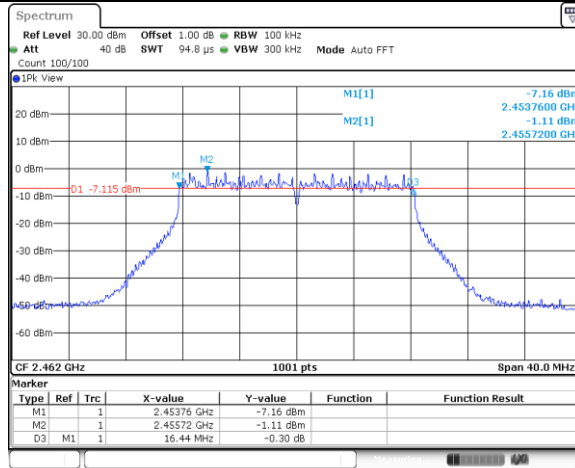


Date: 15.AUG.2023 13:47:39

11N20SISO\_Ant1\_2412

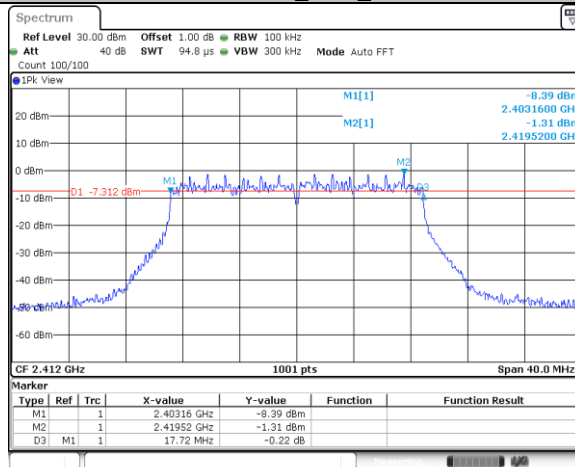


Date: 15.AUG.2023 14:48:39

11N20SISO\_Ant1\_2437

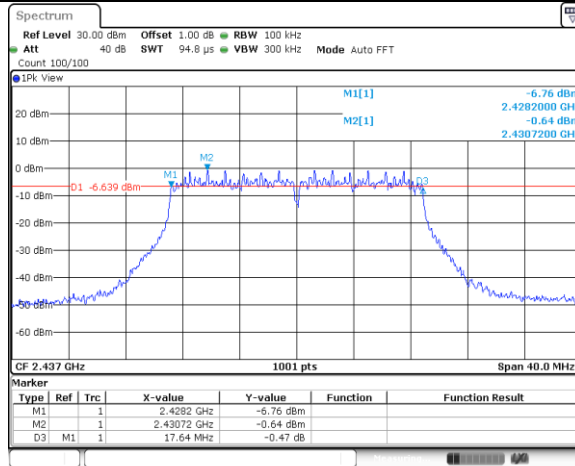


Date: 15.AUG.2023 14:50:35

11N20SISO\_Ant1\_2462

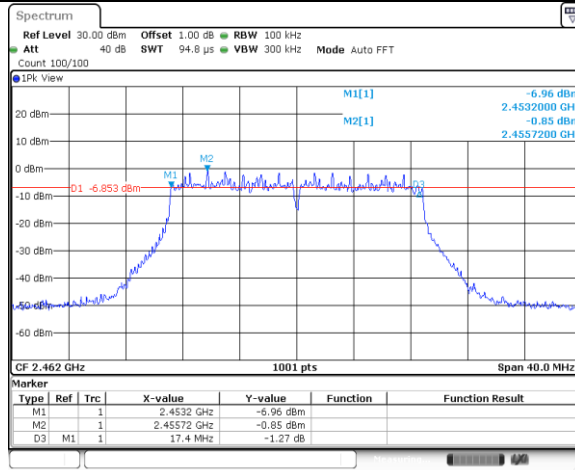


Date: 15.AUG.2023 14:52:18

11N40SISO\_Ant1\_2422

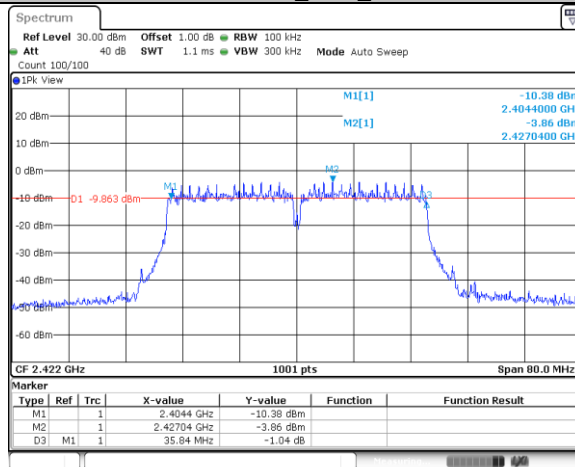

Date: 15.AUG.2023 14:54:22


11N40SISO\_Ant1\_2437

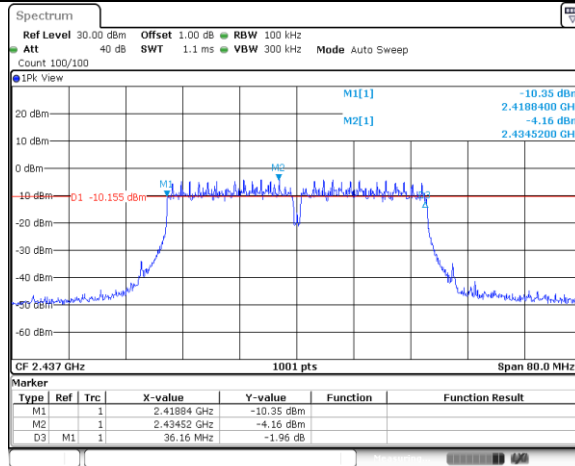

Date: 15.AUG.2023 14:56:12


11N40SISO\_Ant1\_2452



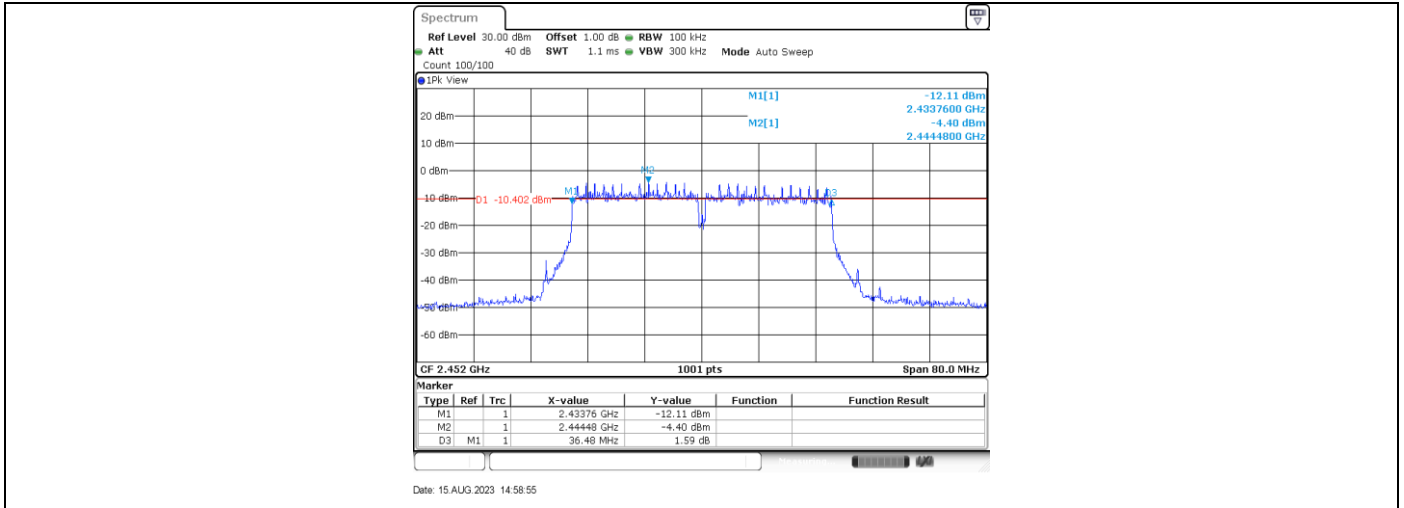


99% Bandwidth

11B\_Ant1\_2412

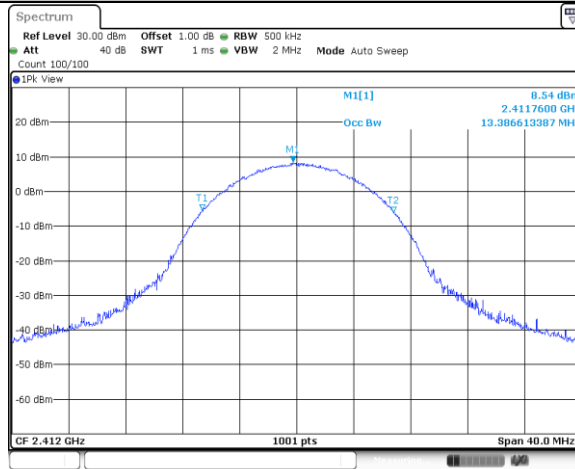


Date: 15.AUG.2023 13:16:30

11B\_Ant1\_2437

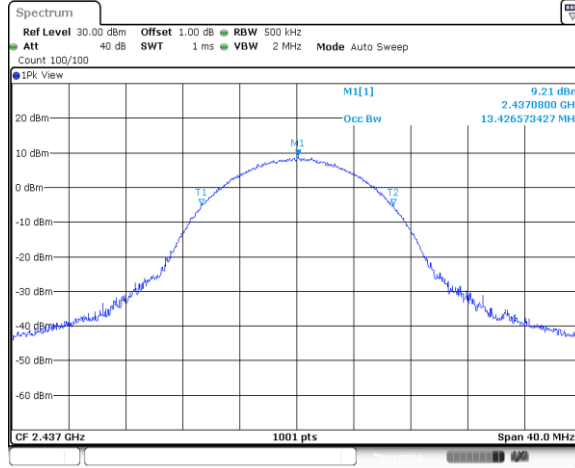


Date: 15.AUG.2023 13:18:37

11B\_Ant1\_2462

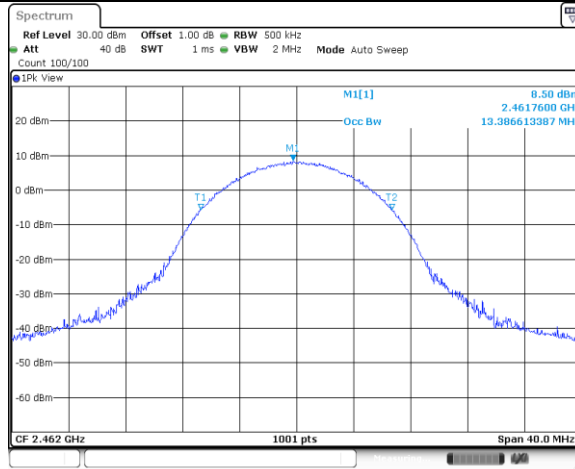


Date: 15.AUG.2023 13:20:33

11G\_Ant1\_2412

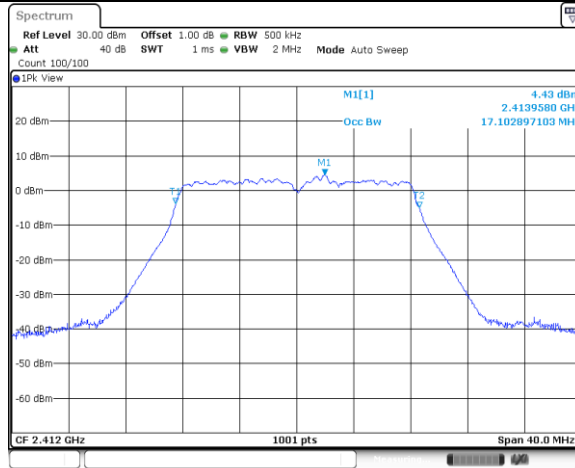


Date: 15.AUG.2023 13:22:33

11G\_Ant1\_2437

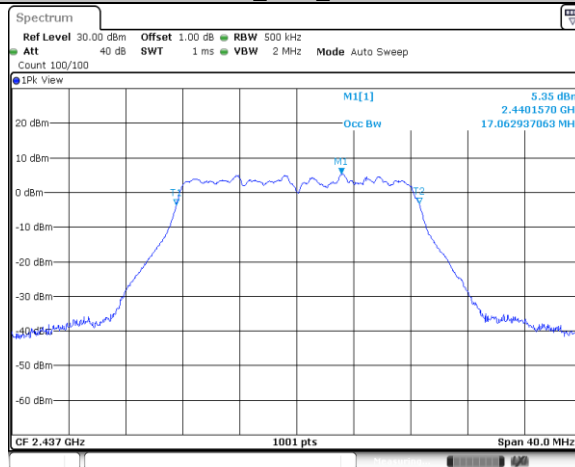


Date: 15.AUG.2023 13:45:45

11G\_Ant1\_2462

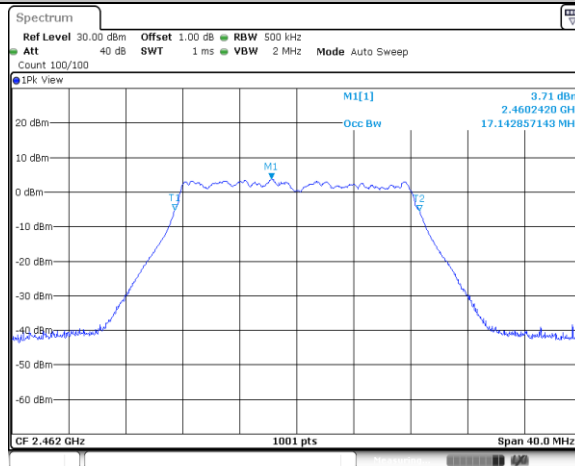


Date: 15.AUG.2023 13:47:50

11N20SISO\_Ant1\_2412

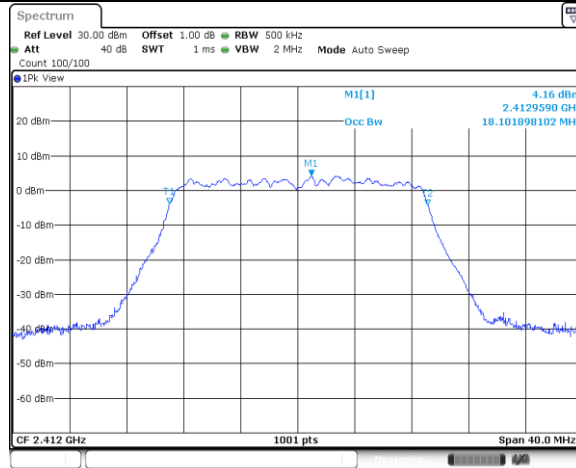


Date: 15.AUG.2023 14:48:50

11N20SISO\_Ant1\_2437

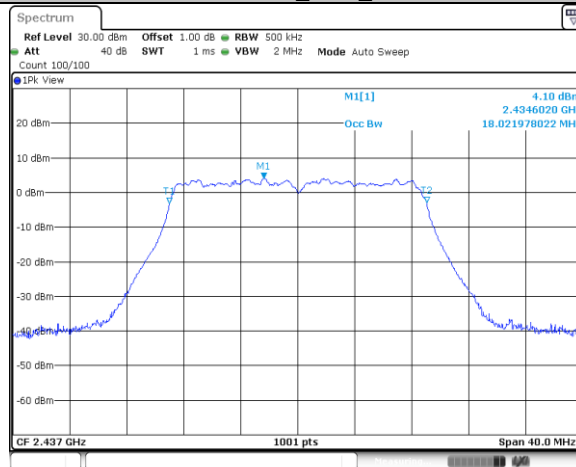


Date: 15.AUG.2023 14:50:46

11N20SISO\_Ant1\_2462

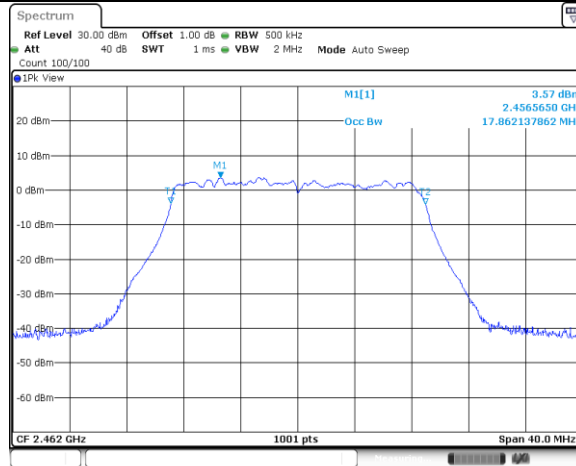


Date: 15.AUG.2023 14:52:29

11N40SISO\_Ant1\_2422

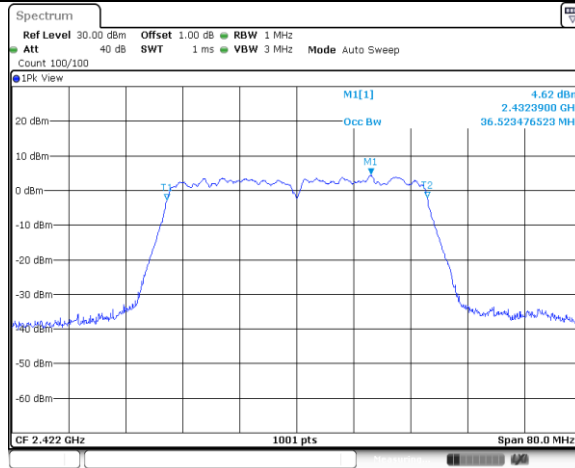


Date: 15.AUG.2023 14:54:33

11N40SISO\_Ant1\_2437

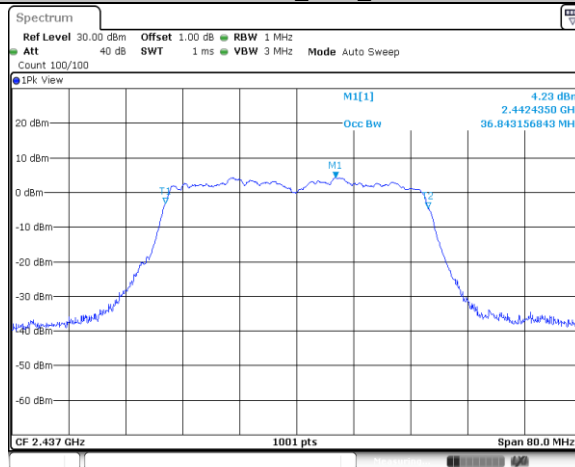

Date: 15.AUG.2023 14:56:23

11N40SISO\_Ant1\_2452

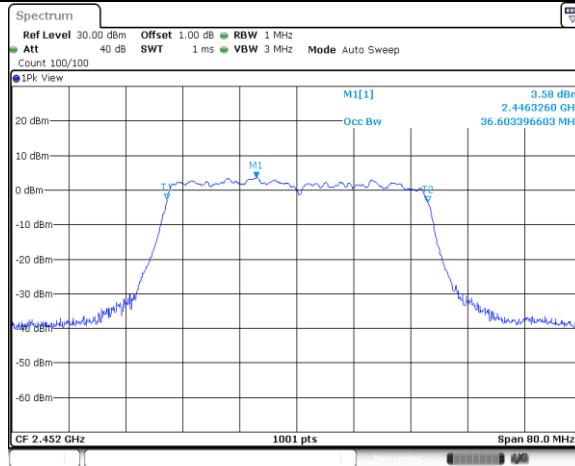

Date: 15.AUG.2023 14:59:06

### 9.3 Power Spectral Density

#### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

#### Limit

Limit [dBm/3KHz]  
≤8

#### 802.11b modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2412MHz	-10.50	8	Pass
Middle channel 2437MHz	-10.49	8	Pass
High channel 2462MHz	-10.42	8	Pass

#### 802.11g modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2412MHz	-16.74	8	Pass
Middle channel 2437MHz	-15.77	8	Pass
High channel 2462MHz	-16.48	8	Pass


#### 802.11n-HT20 modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2412MHz	-15.80	8	Pass
Middle channel 2437MHz	-15.01	8	Pass
High channel 2462MHz	-17.13	8	Pass

#### 802.11n-HT40 modulation Test Result


Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3kHz)	Result
Low channel 2422MHz	-18.87	8	Pass
Middle channel 2437MHz	-17.54	8	Pass
High channel 2452MHz	-18.80	8	Pass

11B\_Ant1\_2412

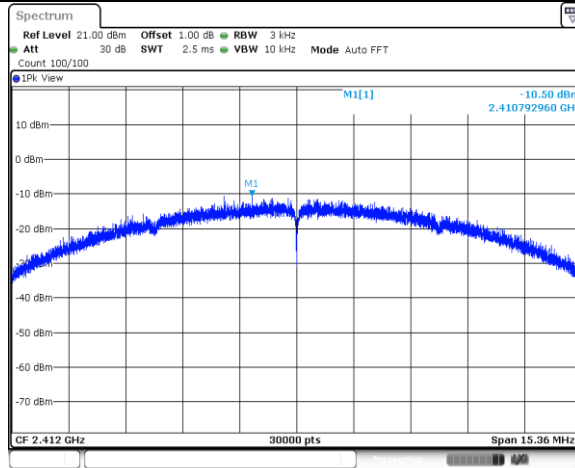


Date: 15.AUG.2023 13:16:42

11B\_Ant1\_2437

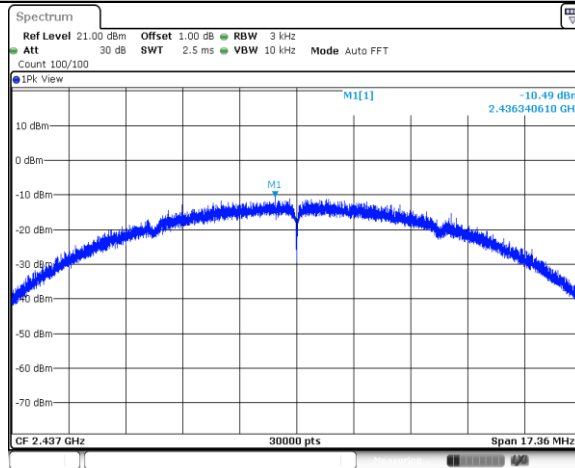


Date: 15.AUG.2023 13:18:48

11B\_Ant1\_2462

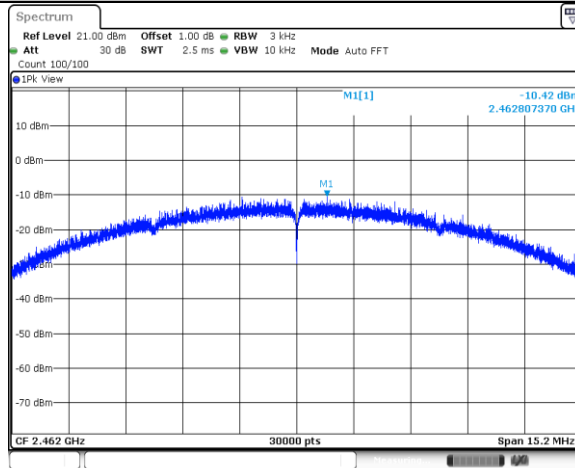


Date: 15.AUG.2023 13:20:45

11G\_Ant1\_2412

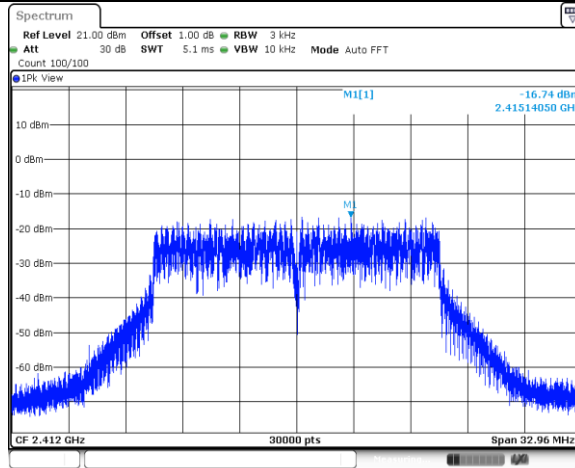


Date: 15.AUG.2023 13:22:44

11G\_Ant1\_2437

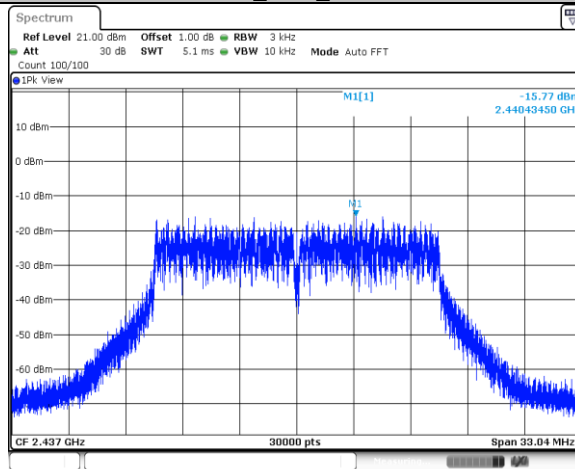

Date: 15.AUG.2023 13:45:56


11G\_Ant1\_2462

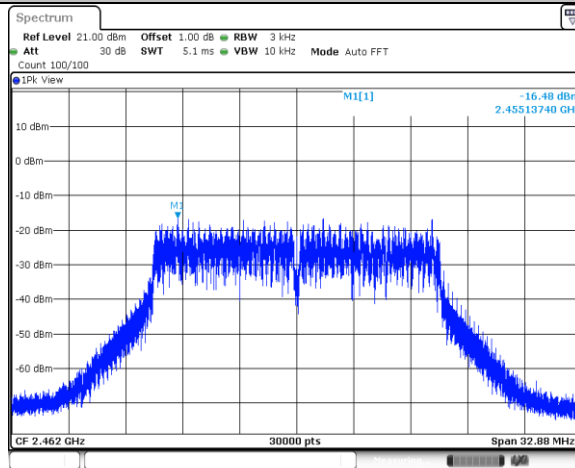


Date: 15.AUG.2023 13:48:02

11N20SISO\_Ant1\_2412




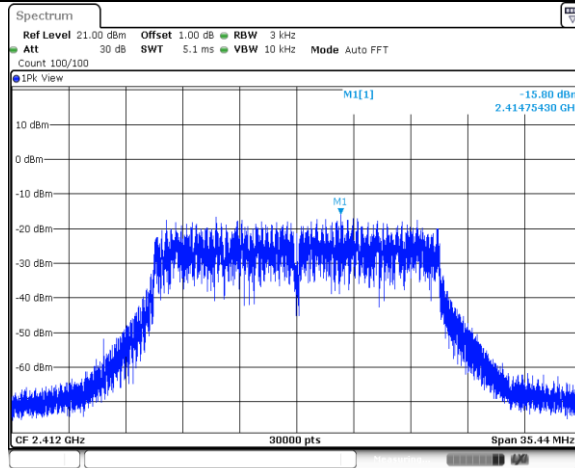


11N20SISO\_Ant1\_2437

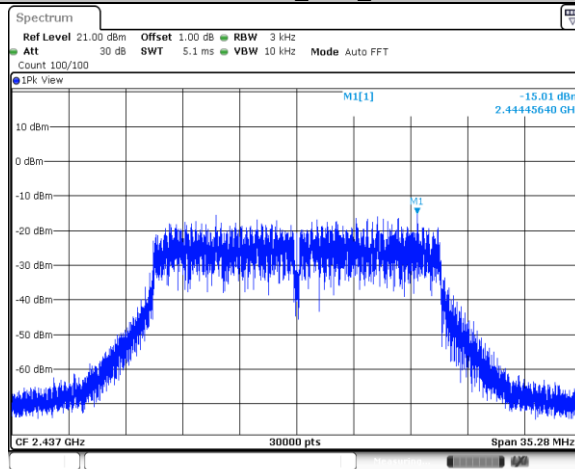


11N20SISO\_Ant1\_2462

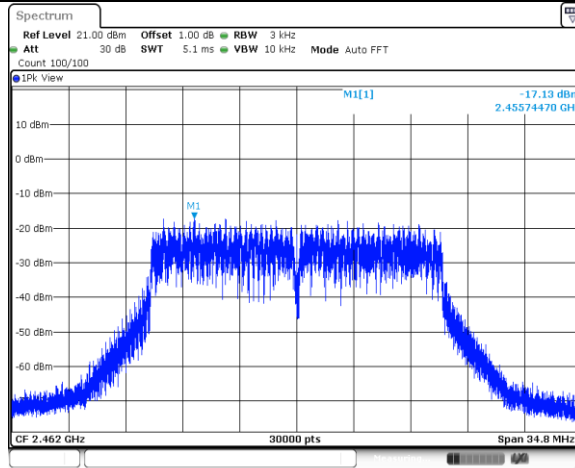


11N40SISO\_Ant1\_2422

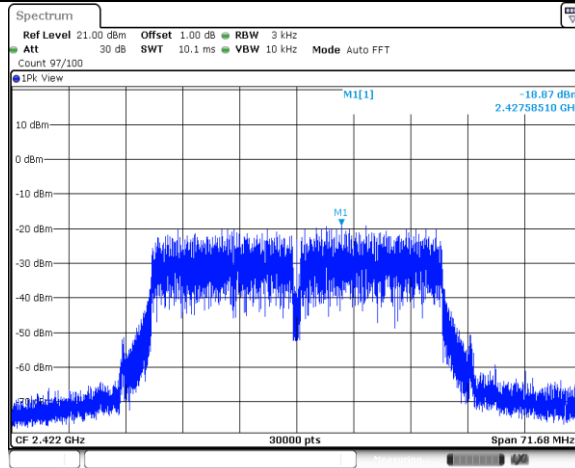

11N40SISO\_Ant1\_2437

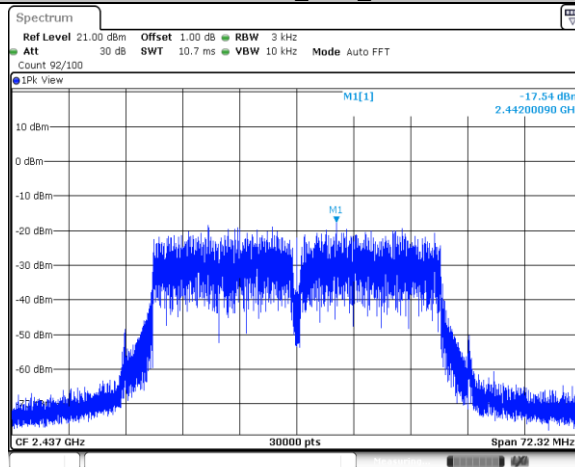

11N40SISO\_Ant1\_2452

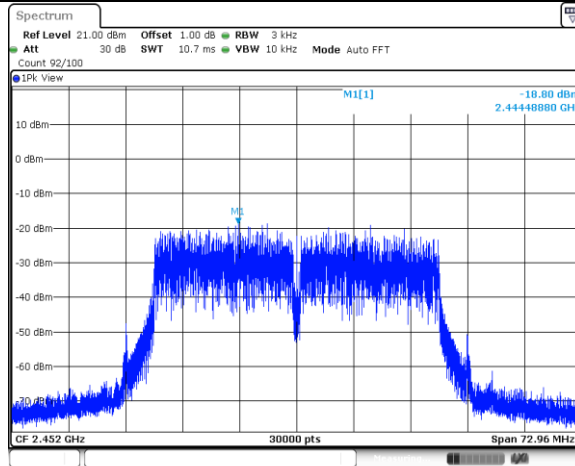

## 9.4 Spurious RF Conducted Emissions

### Test Method




1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

### Limit


Frequency Range MHz	Limit (dBc)
30-25000	-20

## Spurious RF conducted emissions

Test Mode	Antenna	Channel	Freq. Range (MHZ)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	2412	Reference	2.15	---	PASS
			30~1000	-63.51	<=-17.85	PASS
			1000~26500	-43.07	<=-17.85	PASS
		2437	Reference	3.85	---	PASS
			30~1000	-62.96	<=-16.15	PASS
			1000~26500	-51.02	<=-16.15	PASS
		2462	Reference	3.25	---	PASS
			30~1000	-62.17	<=-16.75	PASS
			1000~26500	-51.69	<=-16.75	PASS
11G	Ant1	2412	Reference	-1.37	---	PASS
			30~1000	-62.75	<=-21.37	PASS
			1000~26500	-43.22	<=-21.37	PASS
		2437	Reference	-0.64	---	PASS
			30~1000	-63.26	<=-20.64	PASS
			1000~26500	-51.39	<=-20.64	PASS
		2462	Reference	-1.23	---	PASS
			30~1000	-62.15	<=-21.23	PASS
			1000~26500	-53.15	<=-21.23	PASS
11N20SISO	Ant1	2412	Reference	-1.34	---	PASS
			30~1000	-62.06	<=-21.34	PASS
			1000~26500	-40.49	<=-21.34	PASS
		2437	Reference	-0.60	---	PASS
			30~1000	-63.25	<=-20.6	PASS
			1000~26500	-52.22	<=-20.6	PASS
		2462	Reference	-1.27	---	PASS
			30~1000	-63.15	<=-21.27	PASS
			1000~26500	-51.17	<=-21.27	PASS
11N40SISO	Ant1	2422	Reference	-4.22	---	PASS
			30~1000	-62.61	<=-24.22	PASS
			1000~26500	-37.71	<=-24.22	PASS
		2437	Reference	-4.28	---	PASS
			30~1000	-62.57	<=-24.28	PASS
			1000~26500	-52.22	<=-24.28	PASS
		2452	Reference	-4.50	---	PASS
			30~1000	-62.37	<=-24.5	PASS
			1000~26500	-51.9	<=-24.5	PASS

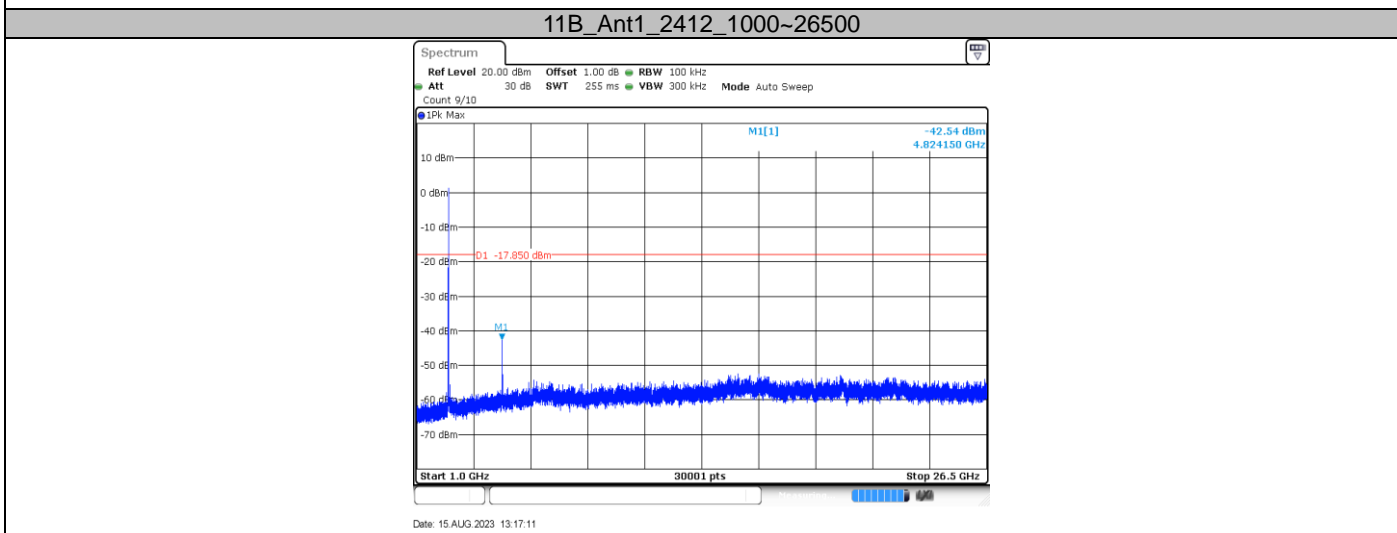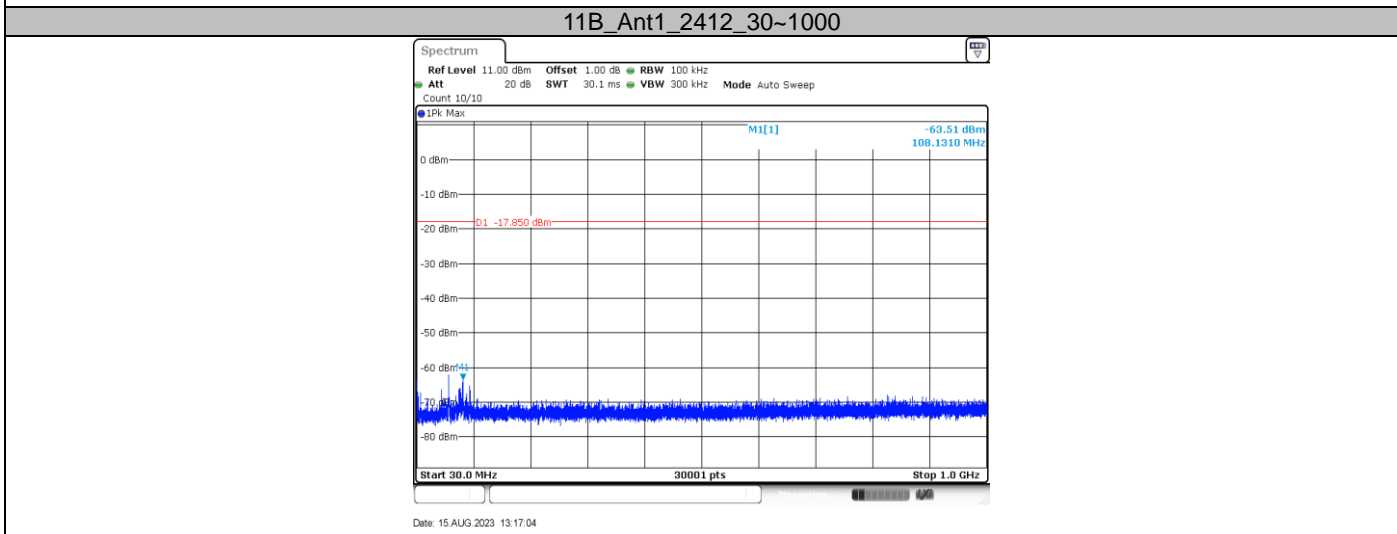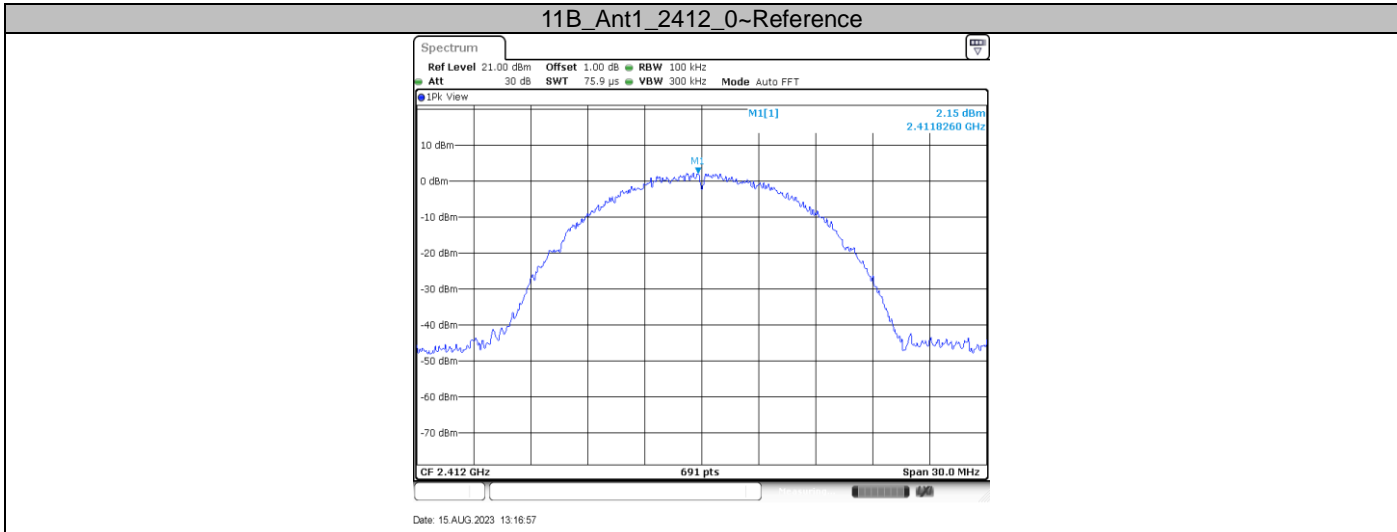


### 11B\_Ant1\_2437\_0~Reference

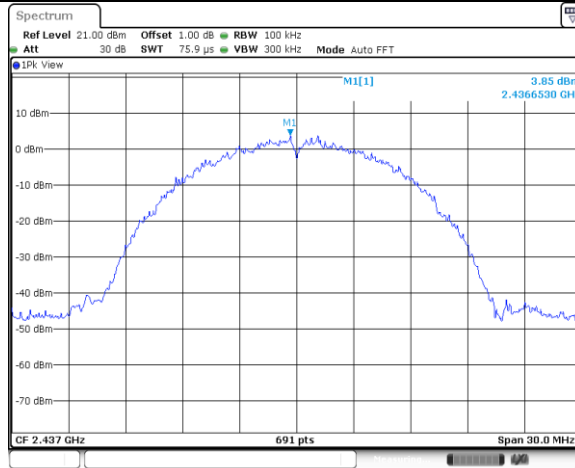


Date: 15.AUG.2023 13:18:54

11B\_Ant1\_2437\_30~1000

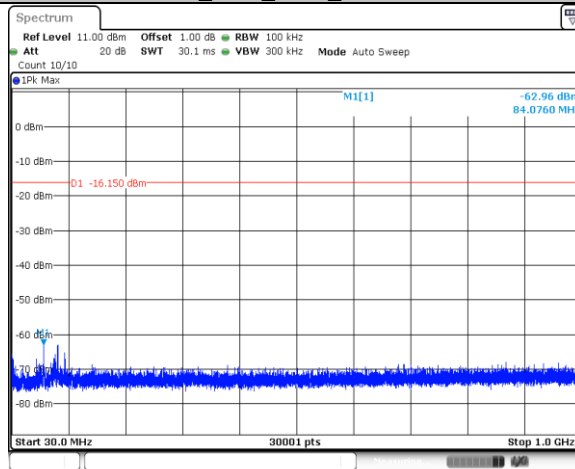


Date: 15.AUG.2023 13:19:00

11B\_Ant1\_2437\_1000~26500

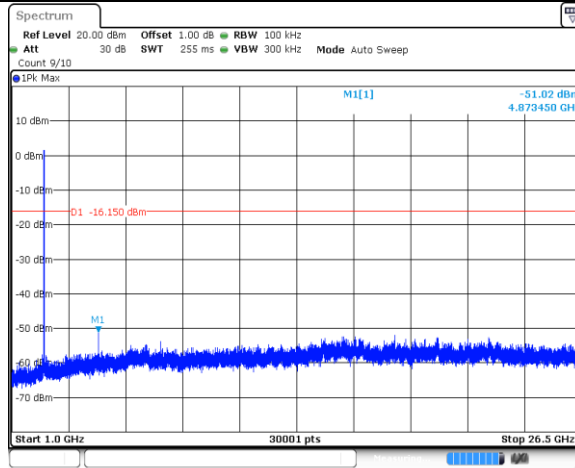


Date: 15.AUG.2023 13:19:08


11B\_Ant1\_2462\_0~Reference

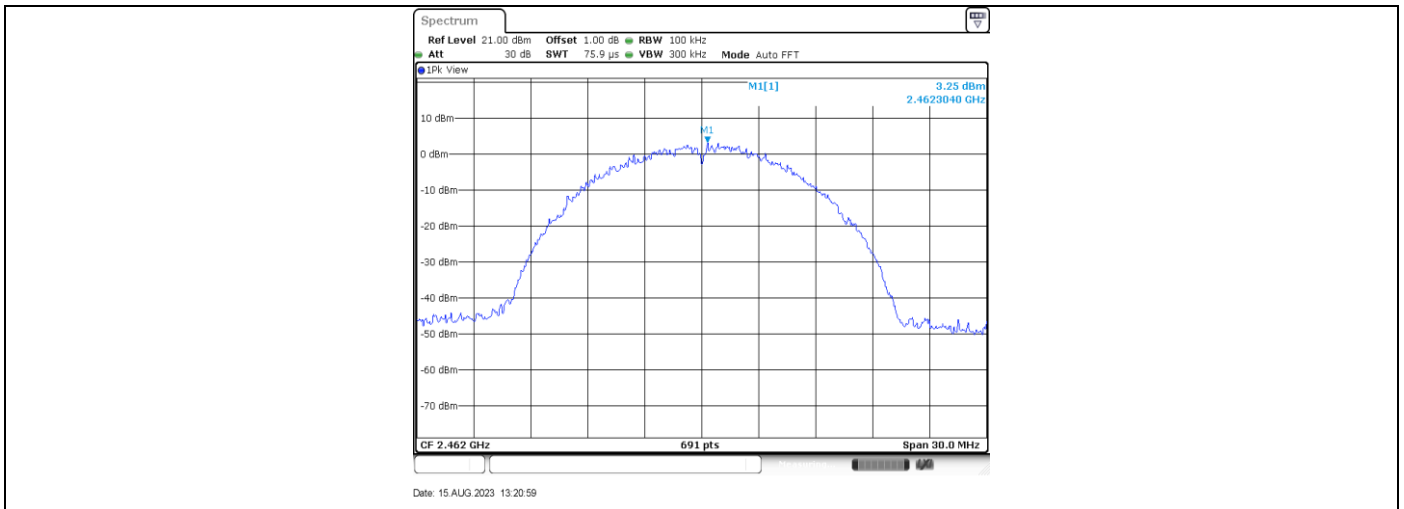


11B\_Ant1\_2462\_30~1000

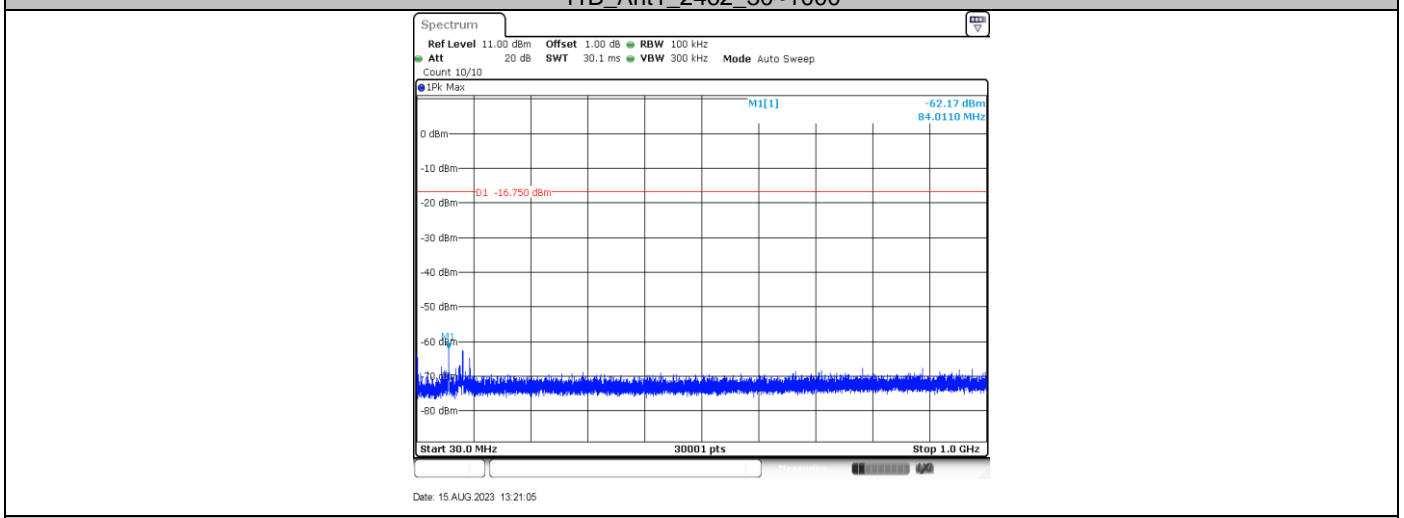


11B\_Ant1\_2462\_1000~26500

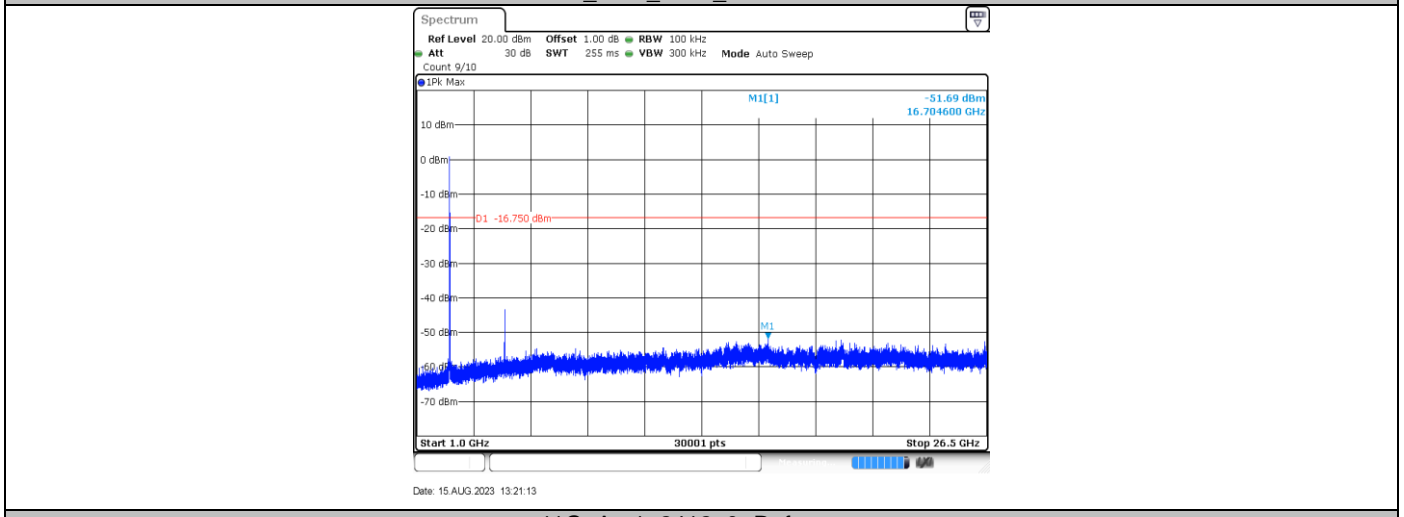


11G\_Ant1\_2412\_0~Reference

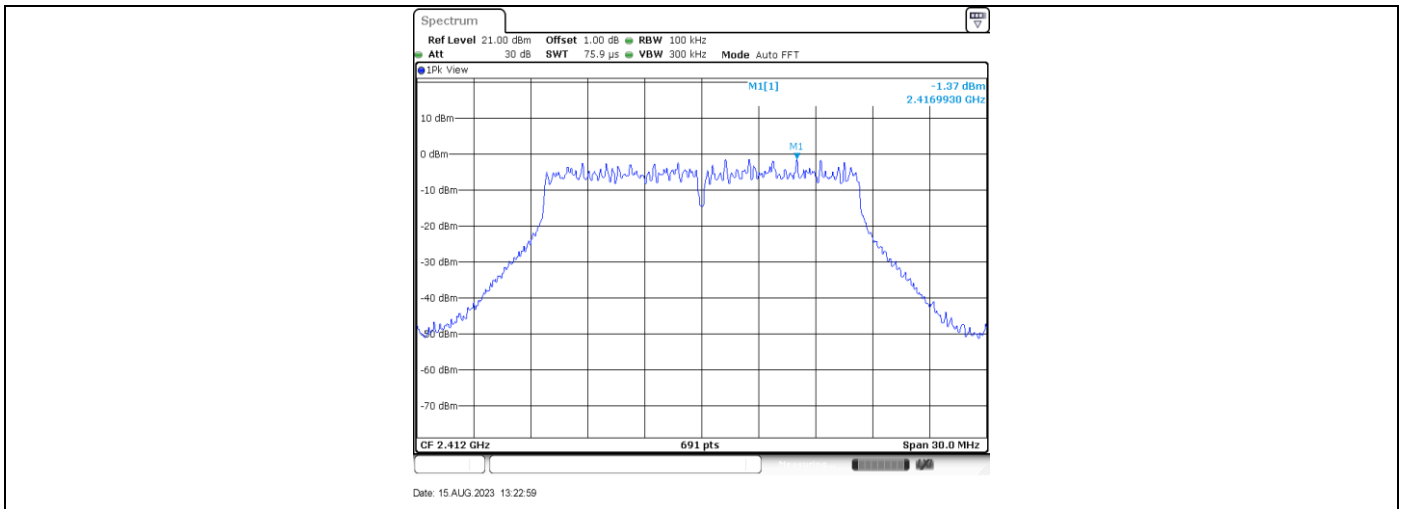

11G\_Ant1\_2412\_30~1000

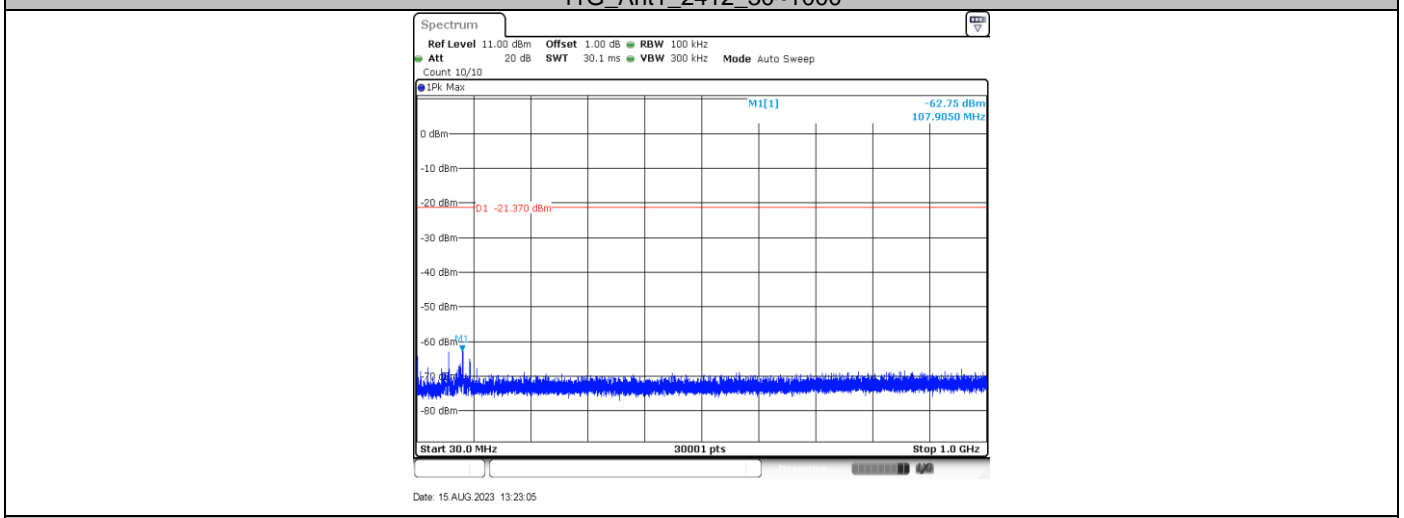


11G\_Ant1\_2412\_1000~26500

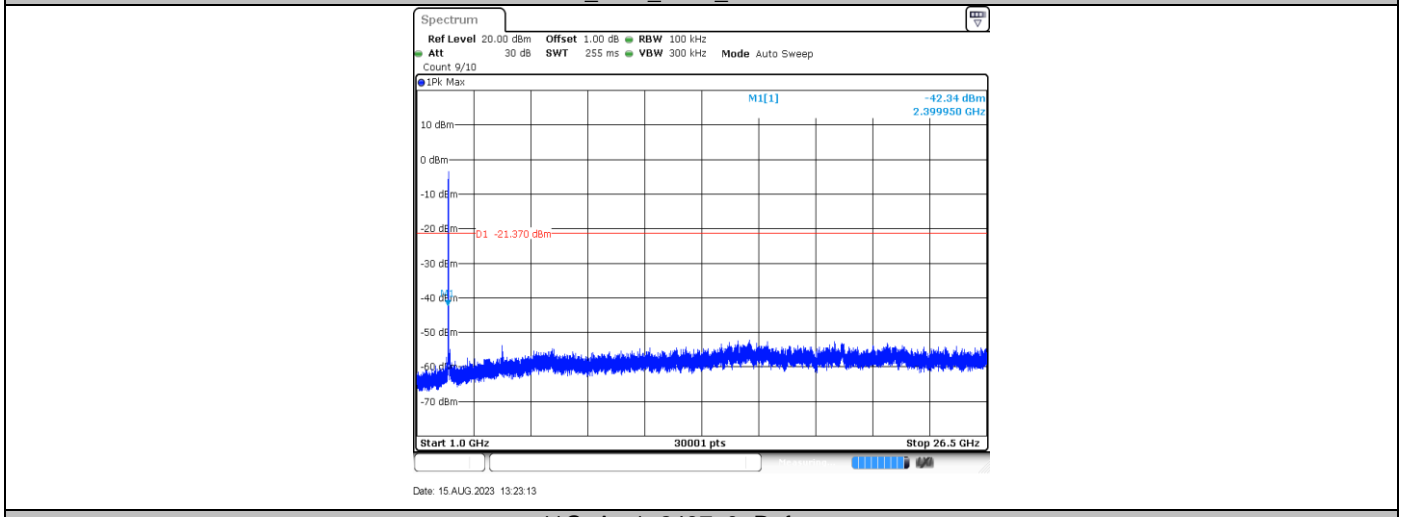


11G\_Ant1\_2437\_0~Reference



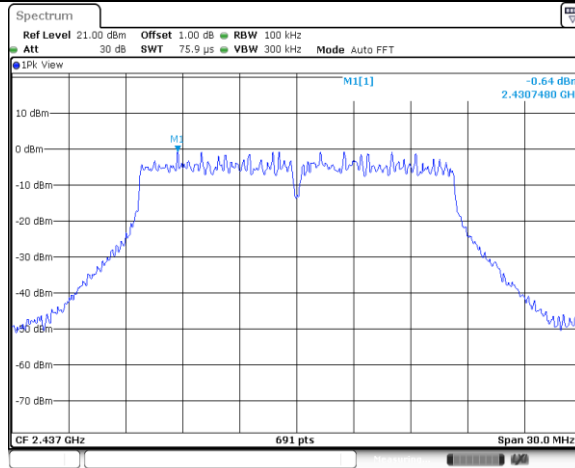


Date: 15.AUG.2023 13:46:02

11G\_Ant1\_2437\_30~1000

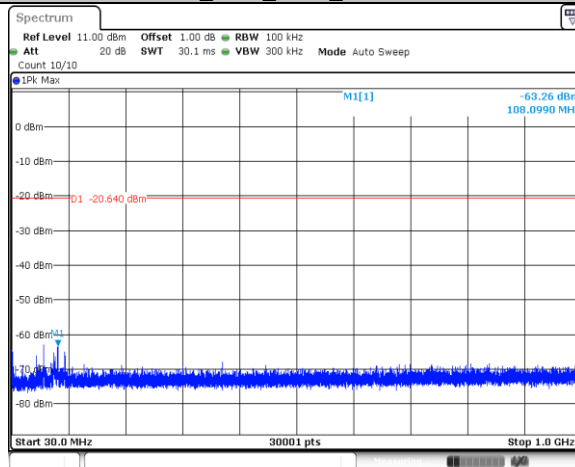


Date: 15.AUG.2023 13:46:08

11G\_Ant1\_2437\_1000~26500

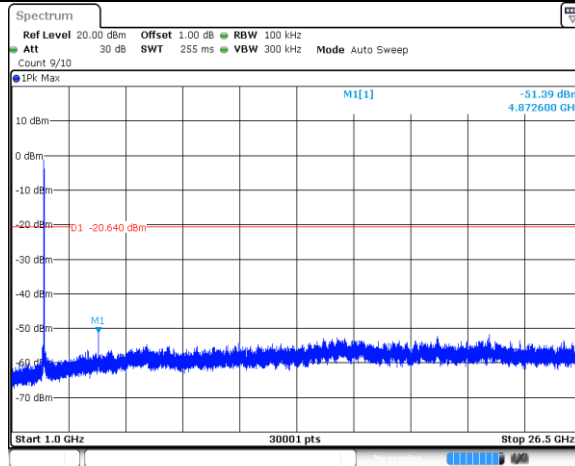


Date: 15.AUG.2023 13:46:16


11G\_Ant1\_2462\_0~Reference

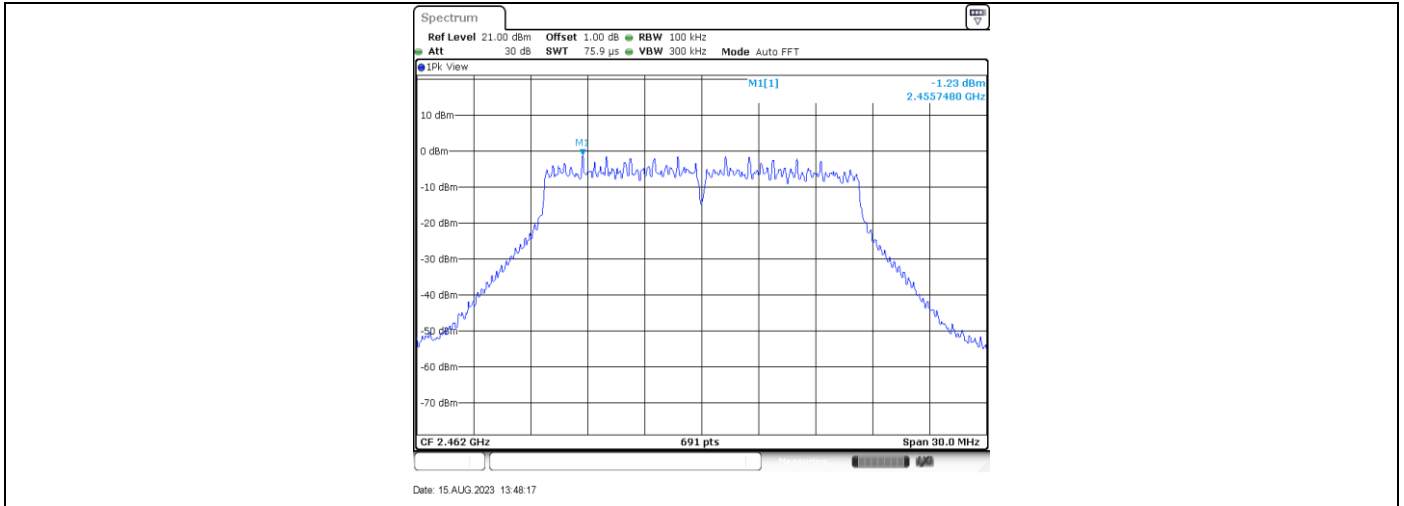


11G\_Ant1\_2462\_30~1000

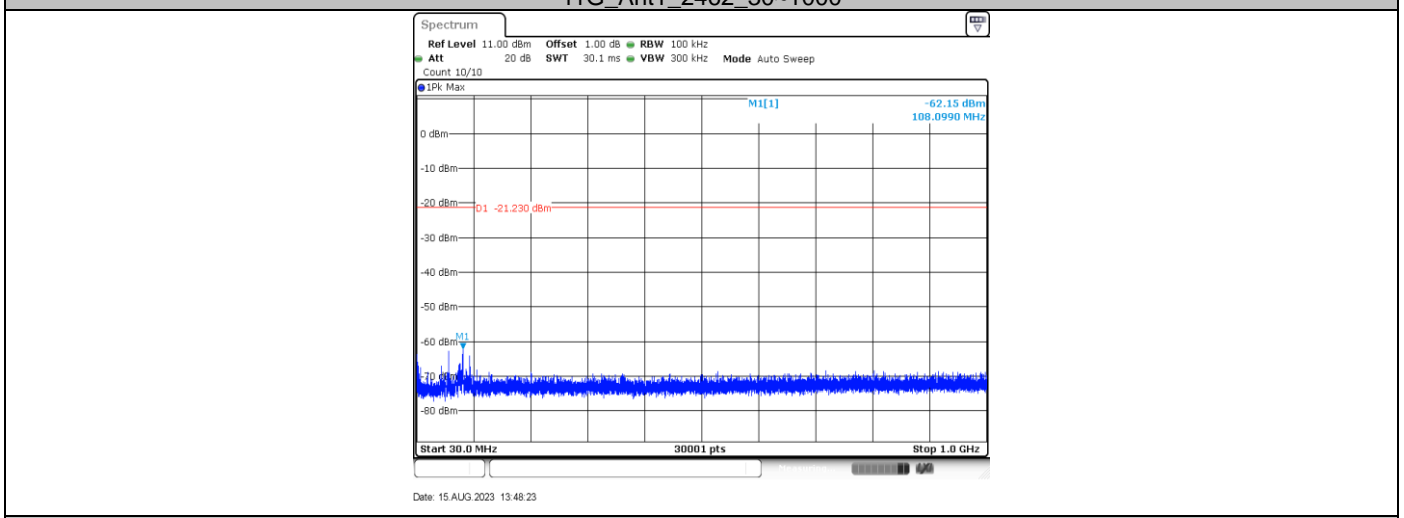


11G\_Ant1\_2462\_1000~26500

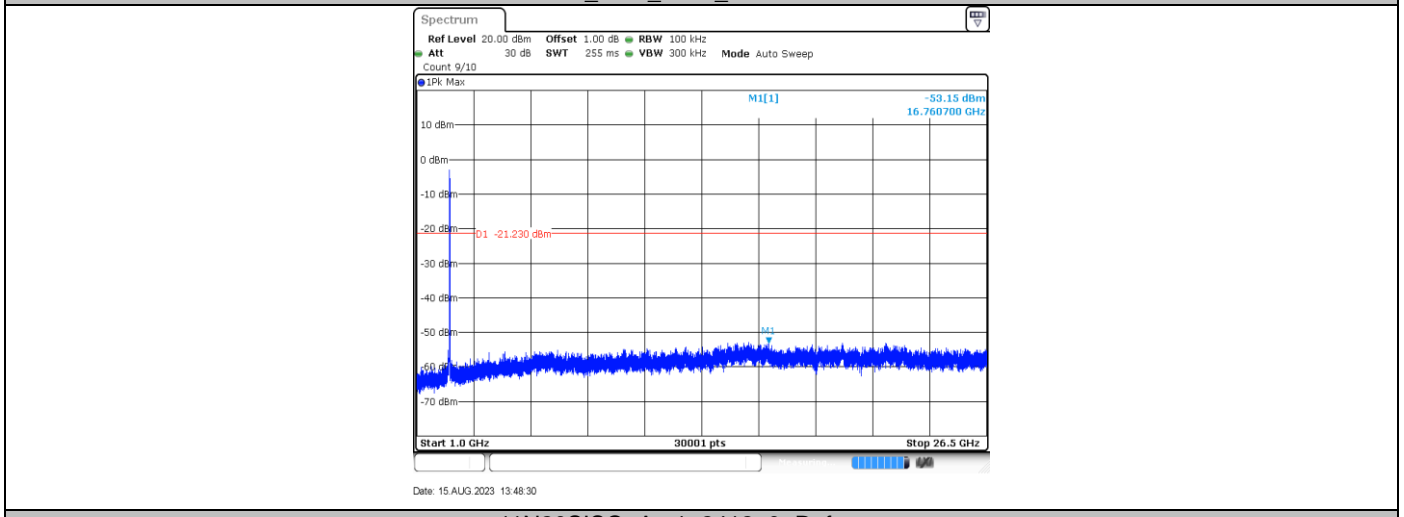


11N20SISO\_Ant1\_2412\_0~Reference

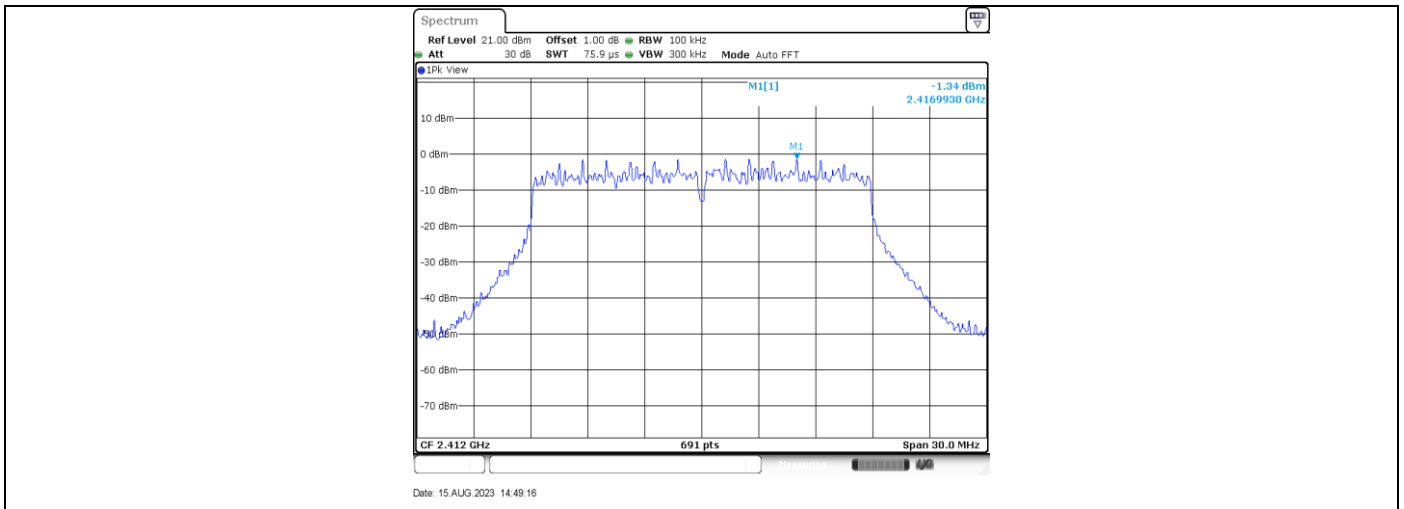


11N20SISO\_Ant1\_2412\_30~1000

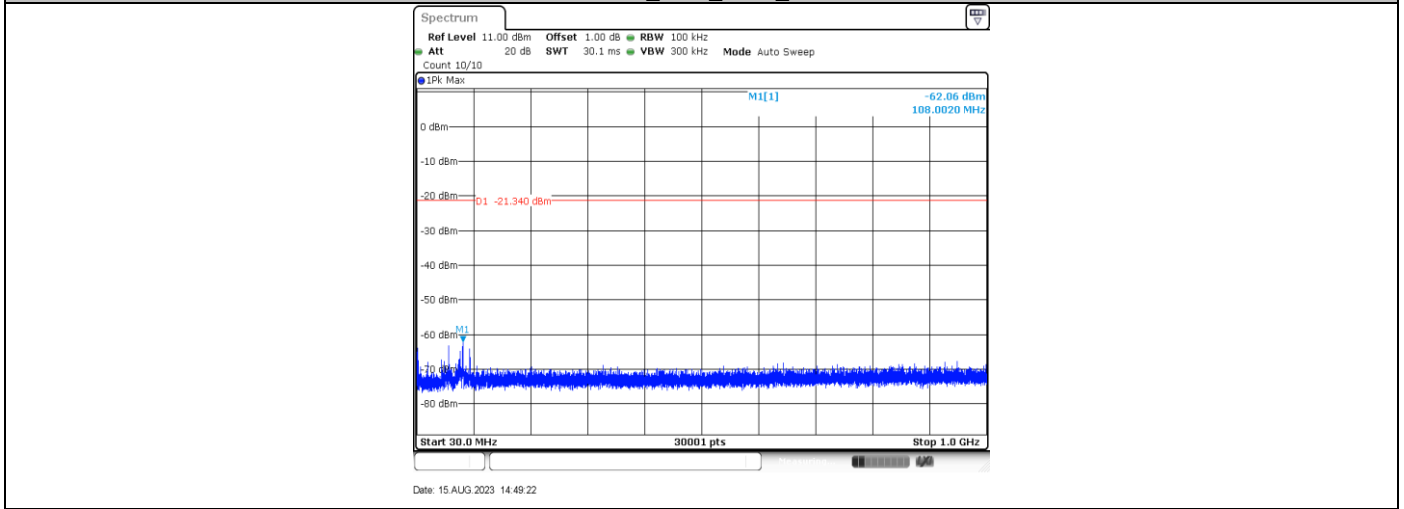

11N20SISO\_Ant1\_2412\_1000~26500

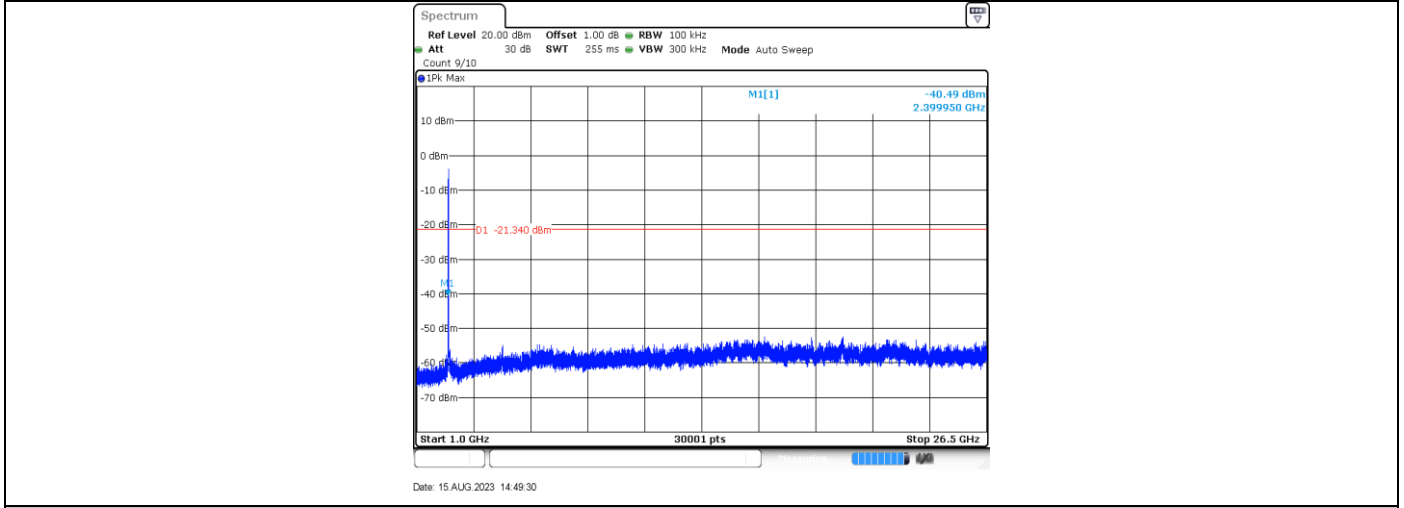


11N20SISO\_Ant1\_2437\_0~Reference

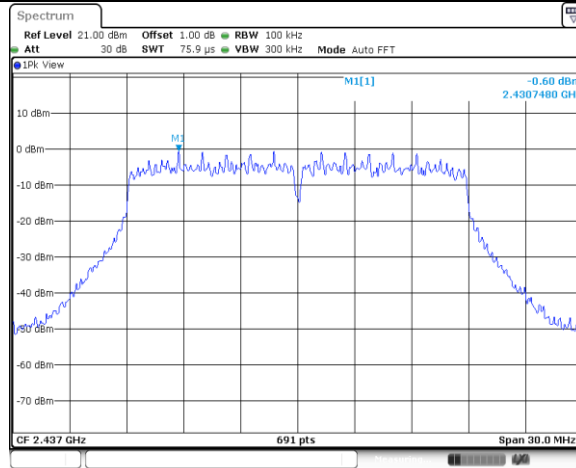


Date: 15.AUG.2023 14:51:03

11N20SISO\_Ant1\_2437\_30~1000

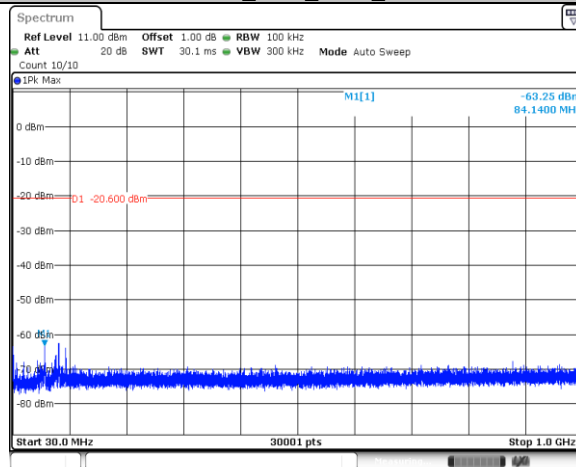


Date: 15.AUG.2023 14:51:09

11N20SISO\_Ant1\_2437\_1000~26500

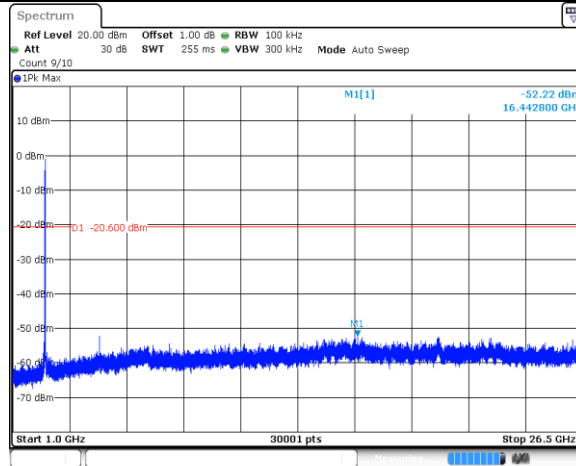


Date: 15.AUG.2023 14:51:17


11N20SISO\_Ant1\_2462\_0~Reference

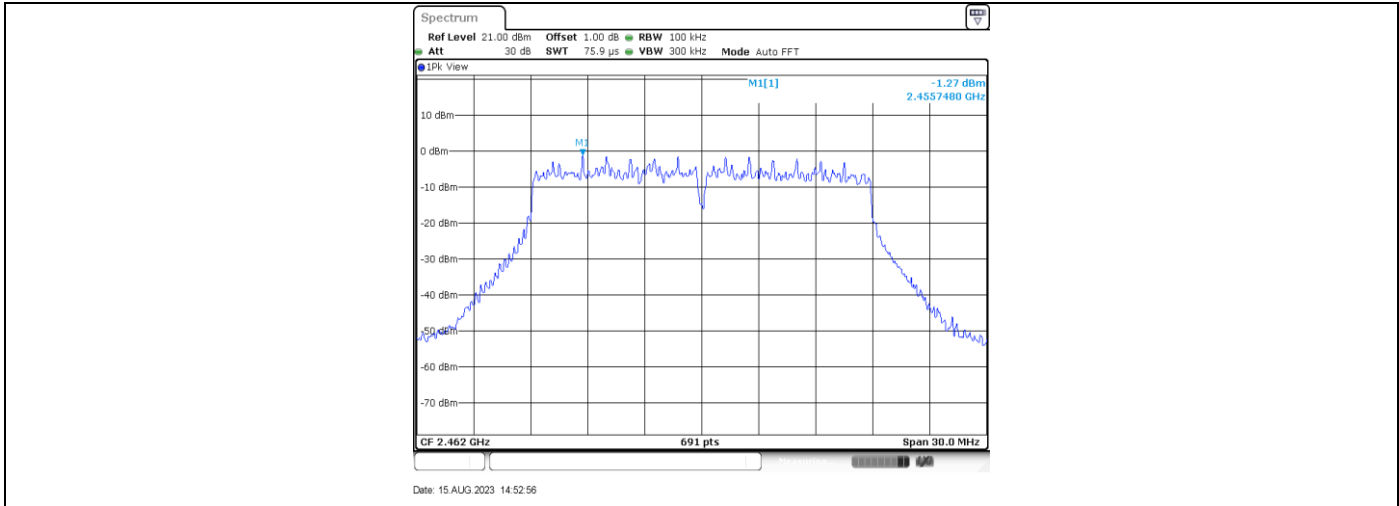


11N20SISO\_Ant1\_2462\_30~1000

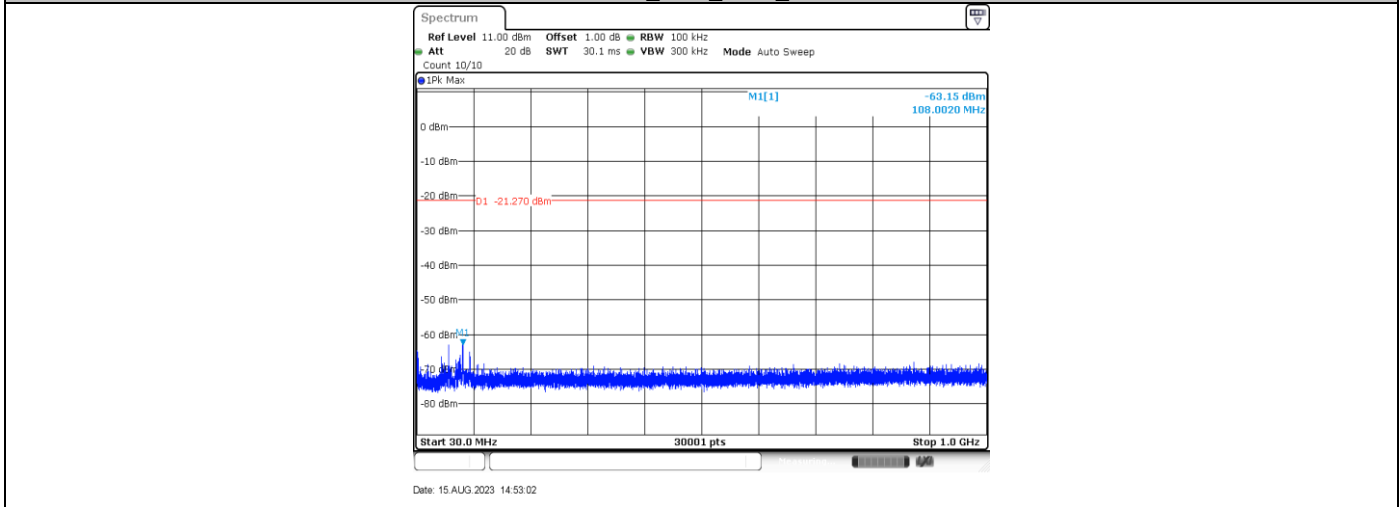


11N20SISO\_Ant1\_2462\_1000~26500

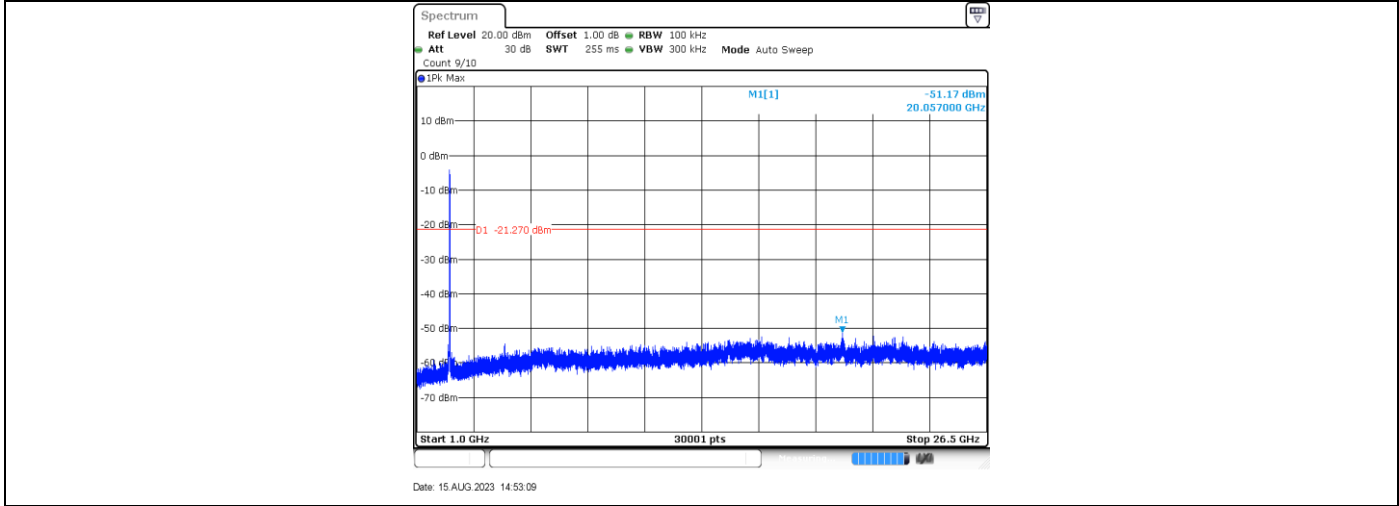


11N40SISO\_Ant1\_2422\_0~Reference

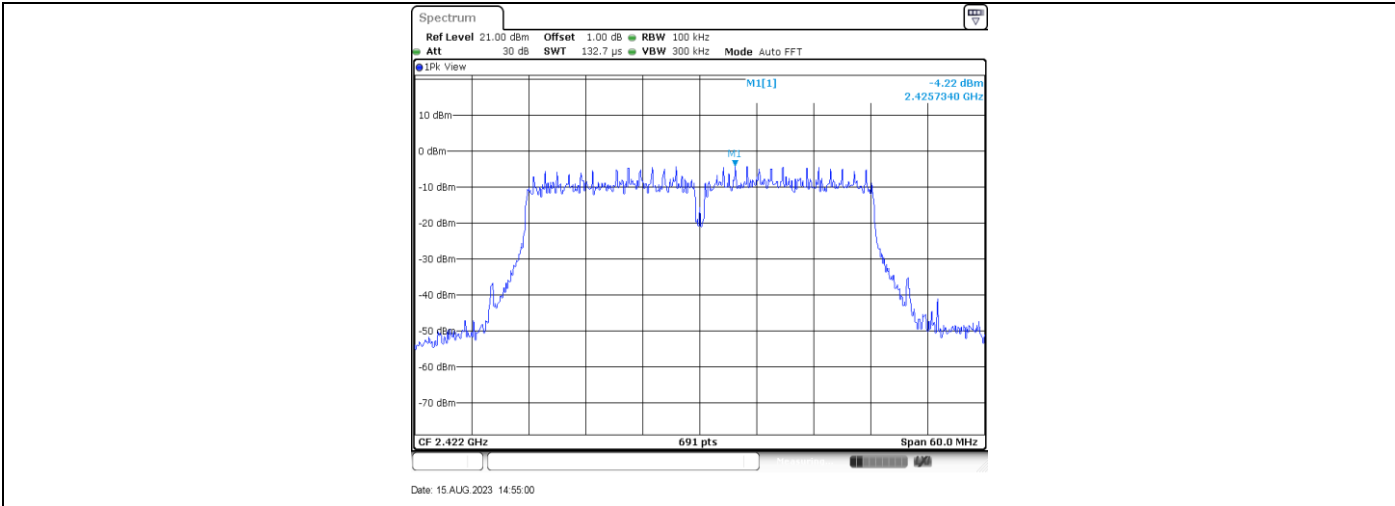


11N40SISO\_Ant1\_2422\_30~1000

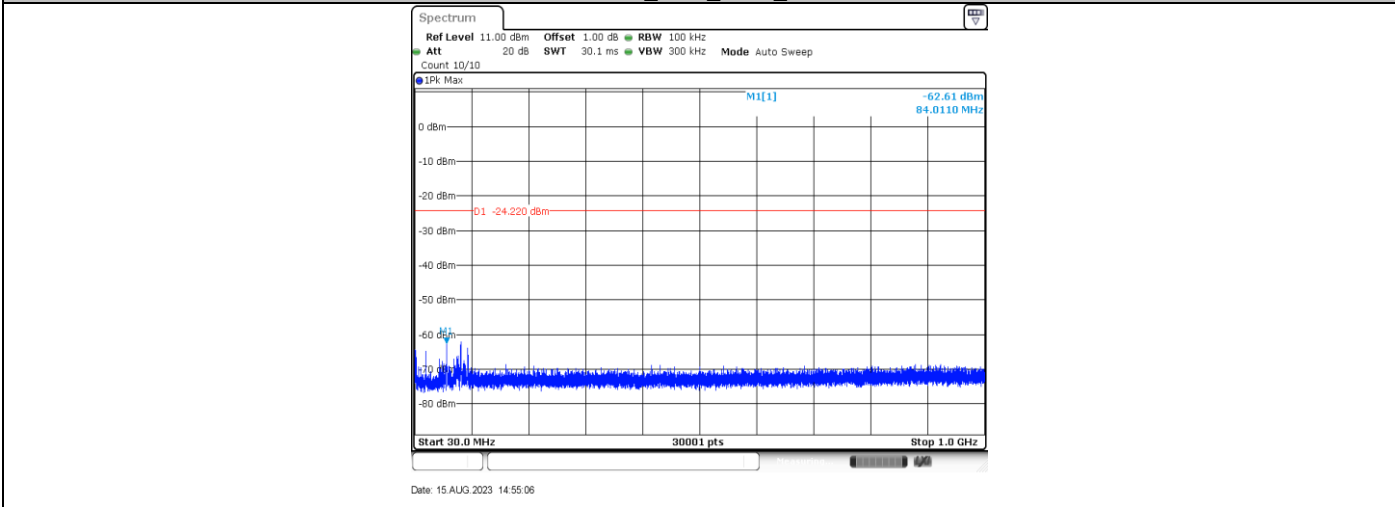


11N40SISO\_Ant1\_2422\_1000~26500

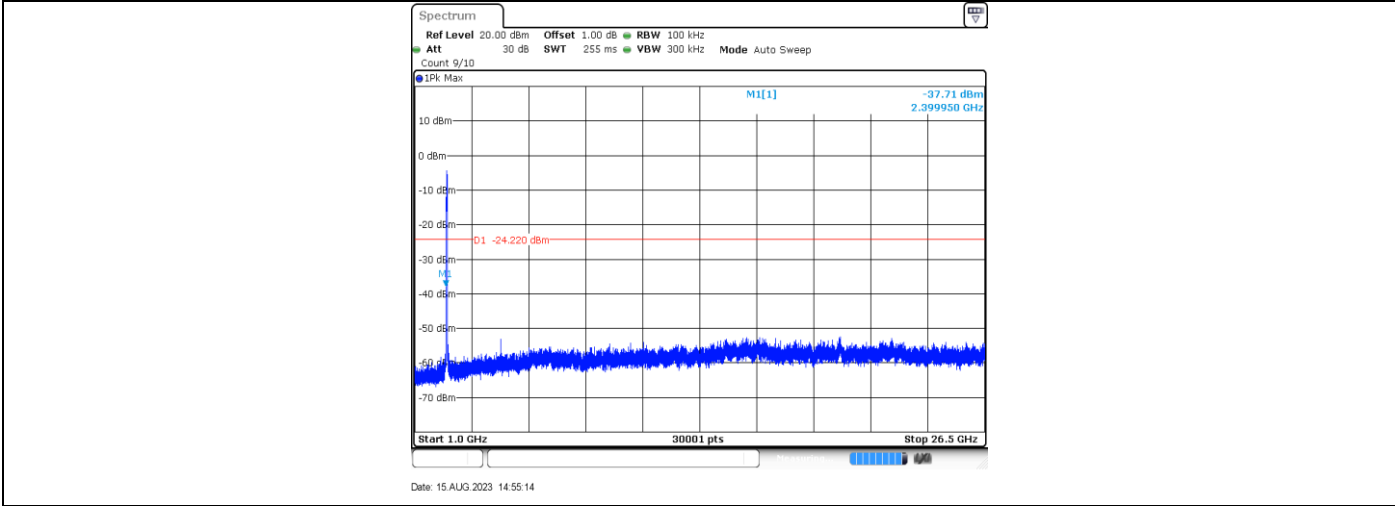


11N40SISO\_Ant1\_2437\_0~Reference

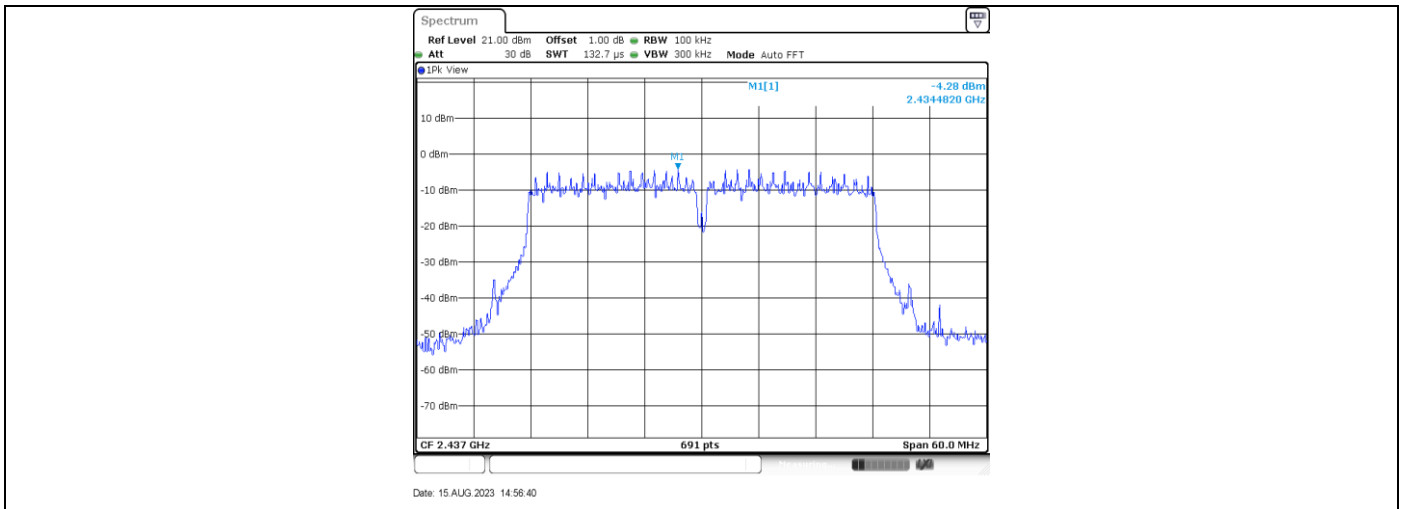


11N40SISO\_Ant1\_2437\_30~1000

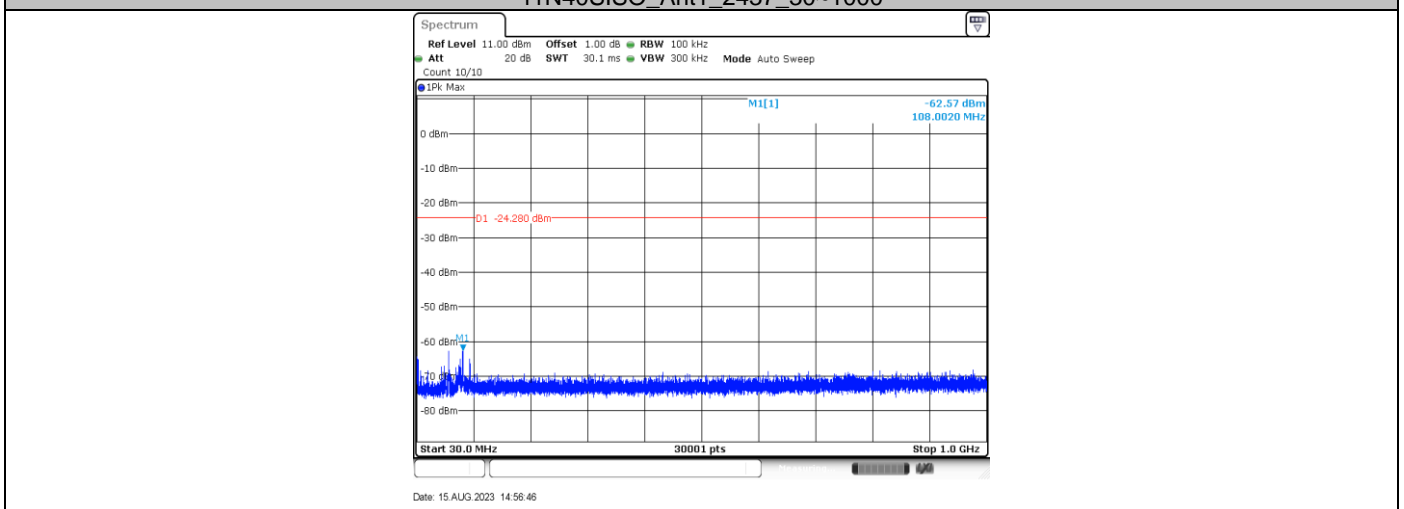


11N40SISO\_Ant1\_2437\_1000~26500

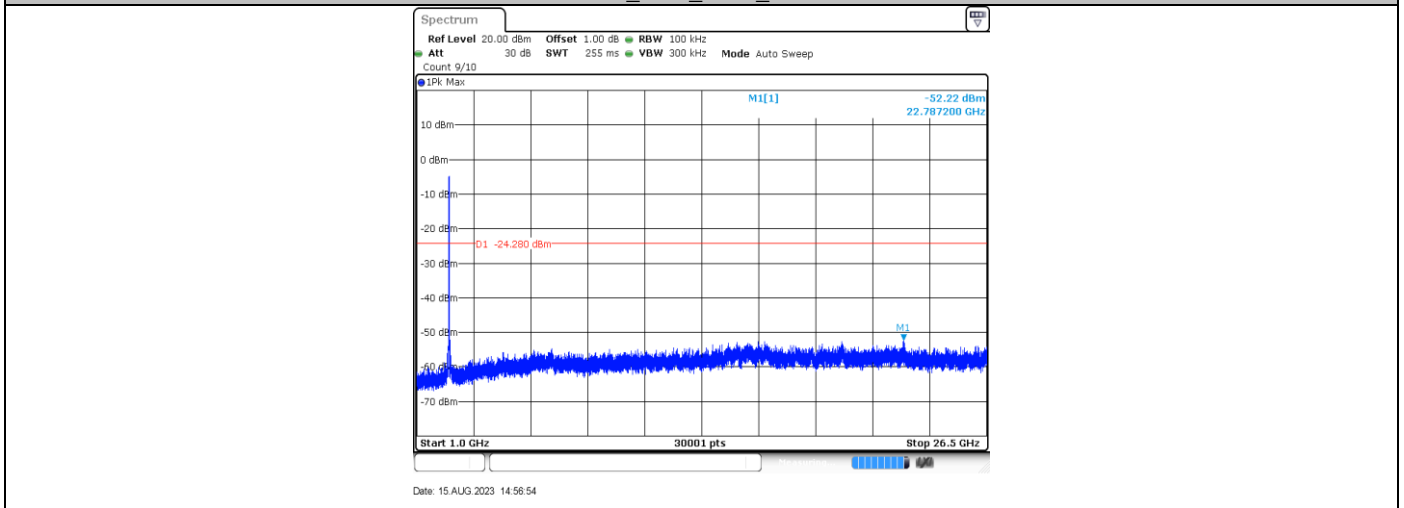


11N40SISO\_Ant1\_2452\_0~Reference

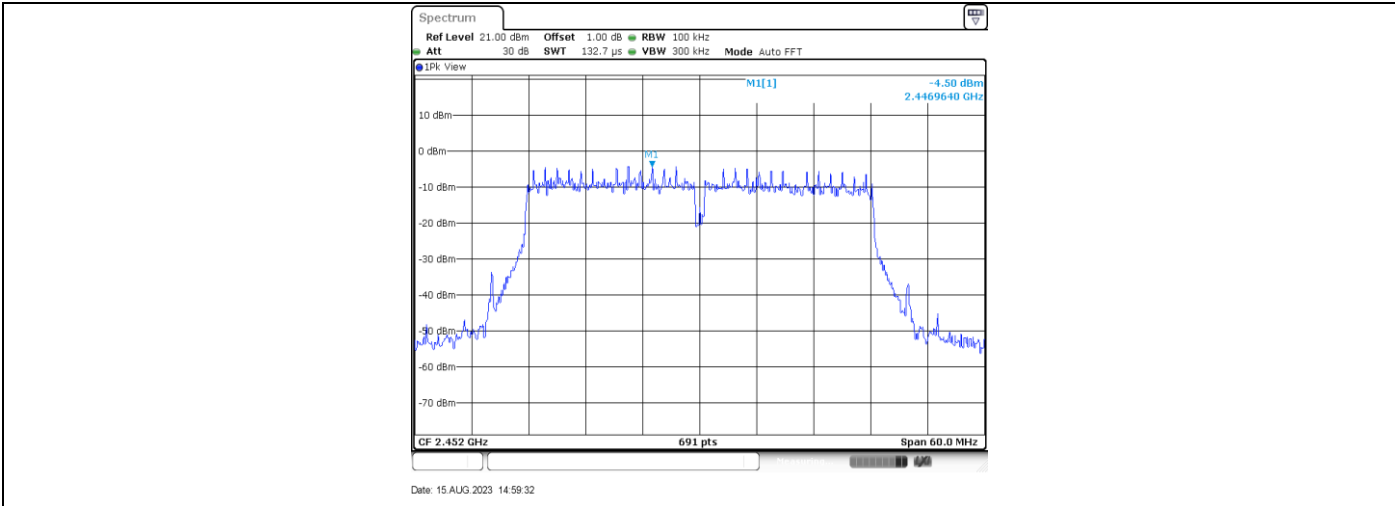

11N40SISO\_Ant1\_2452\_30~1000

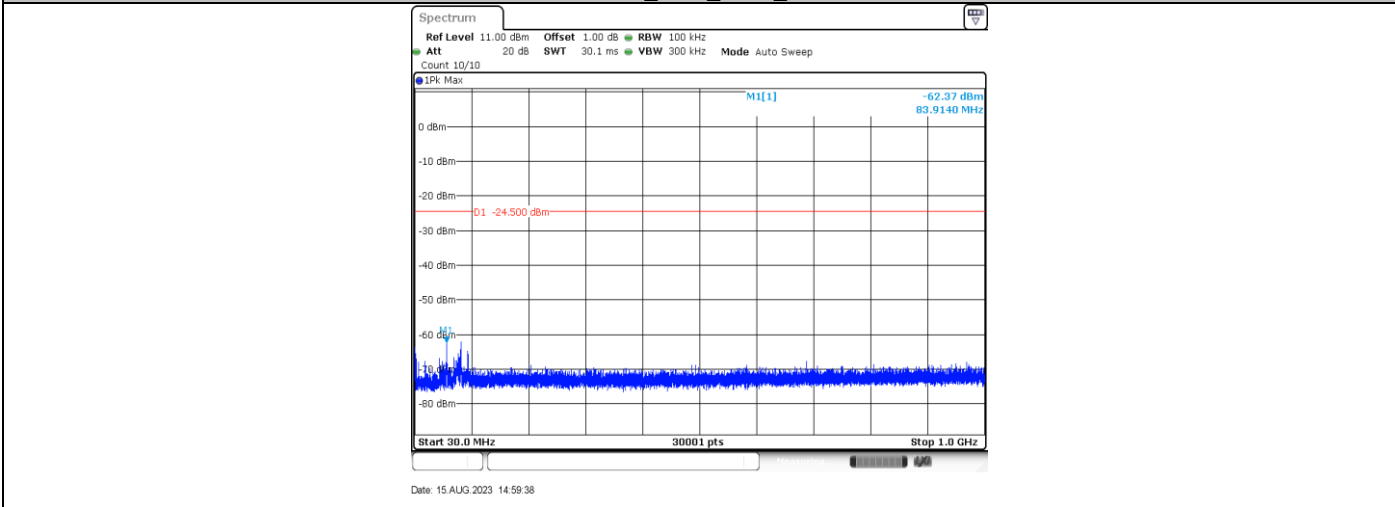

11N40SISO\_Ant1\_2452\_1000~26500

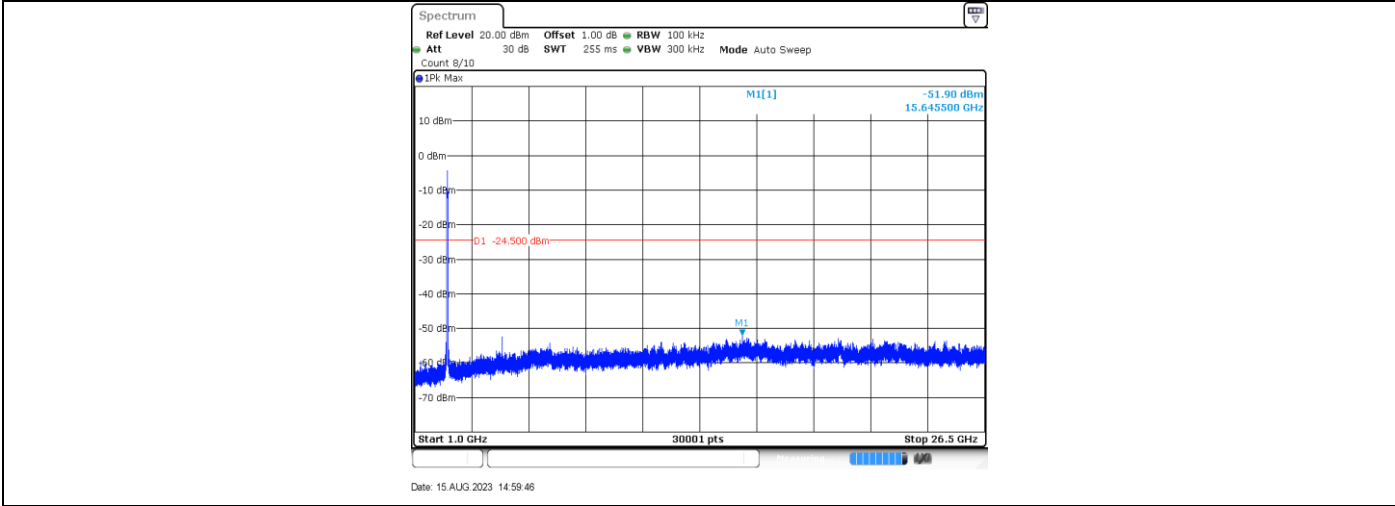



## 9.5 Band Edge Testing

### Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

### Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20

### Band edge testing


Test Mode	Antenna	Channel Name	Channel (MHz)	Reference Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	Low	2412	2.60	-45.70	<=-17.40	PASS
		High	2462	3.07	-56.89	<=-16.93	PASS
11G	Ant1	Low	2412	-1.32	-42.13	<=-21.32	PASS
		High	2462	-1.33	-56.16	<=-21.33	PASS
11N20SISO	Ant1	Low	2412	-1.81	-44.01	<=-21.81	PASS
		High	2462	-1.36	-55.94	<=-21.36	PASS
11N40SISO	Ant1	Low	2422	-4.30	-43.26	<=-24.30	PASS
		High	2452	-4.47	-51.97	<=-24.47	PASS

11B\_Ant1\_Low\_2412

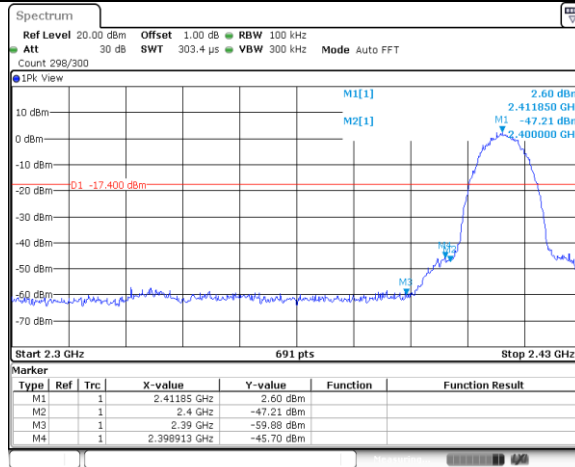


Date: 15.AUG.2023 13:16:51

11B\_Ant1\_High\_2462

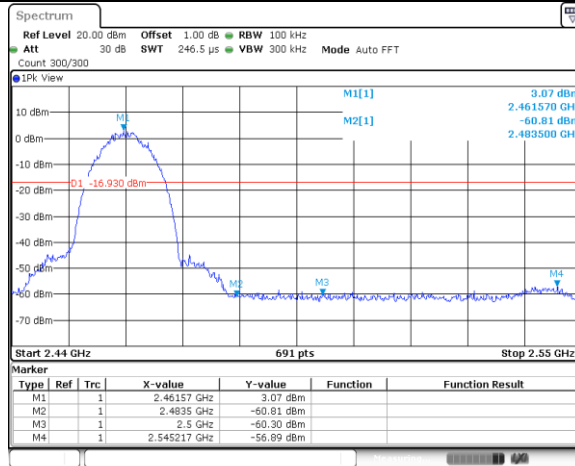


Date: 15.AUG.2023 13:20:54

11G\_Ant1\_Low\_2412

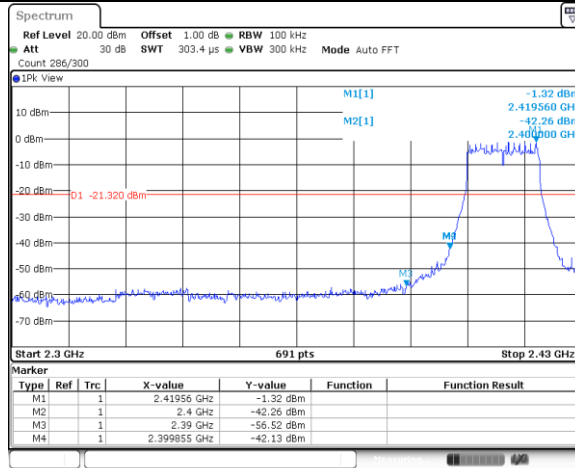


Date: 15.AUG.2023 13:22:53

11G\_Ant1\_High\_2462

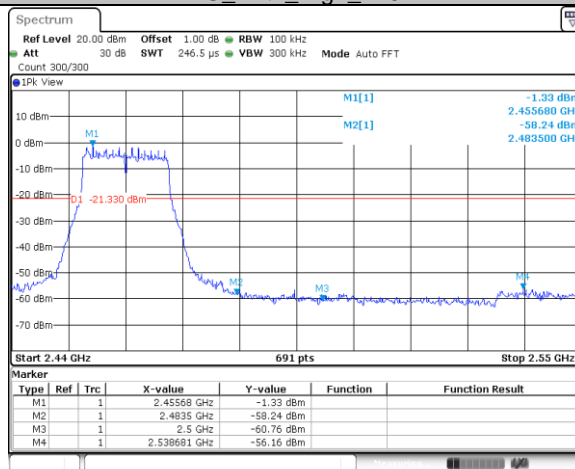


Date: 15.AUG.2023 13:48:11

11N20SISO\_Ant1\_Low\_2412

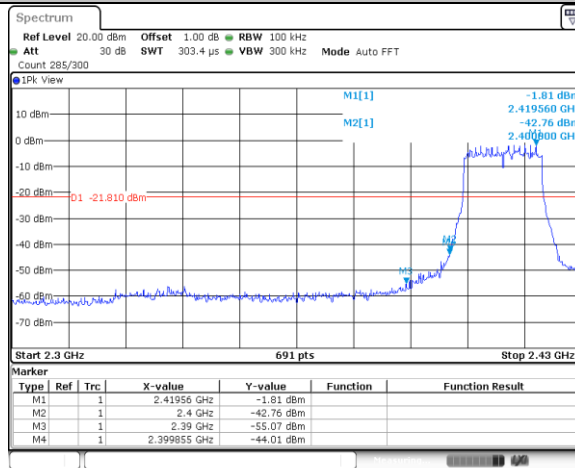


Date: 15.AUG.2023 14:49:10

11N20SISO\_Ant1\_High\_2462

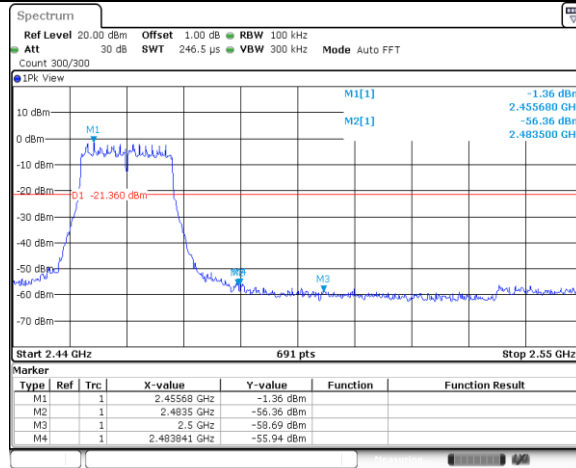


Date: 15.AUG.2023 14:52:50

11N40SISO\_Ant1\_Low\_2422

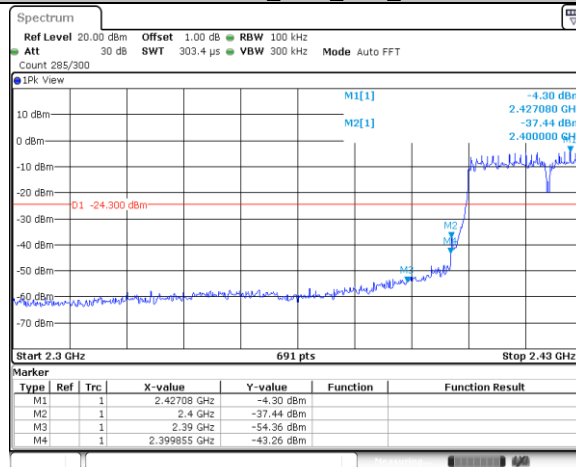

Date: 15.AUG.2023 14:54:54

11N40SISO\_Ant1\_High\_2452

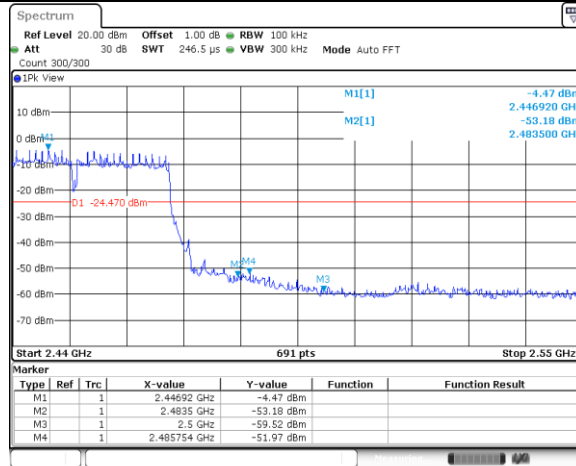

Date: 15.AUG.2023 14:59:27

## 9.6 Spurious Radiated Emissions for Transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

#### For Below 1GHz

Use the following test receiver settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 100 kHz to 120kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

#### For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

## Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

Frequency MHz	Field Strength $\mu\text{V}/\text{m}$	Field Strength $\text{dB}\mu\text{V}/\text{m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit  $3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(300\text{m}/3\text{m})$  (Below 30MHz)

Note 2: Limit  $3\text{m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$  (Below 30MHz)

## Spurious Radiated Emissions for Transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Data of measurement within frequency range 9kHz-30MHz is the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.

### Transmitting spurious emission test result as below:


30MHz – 1000MHz:

11b\_2412MHz

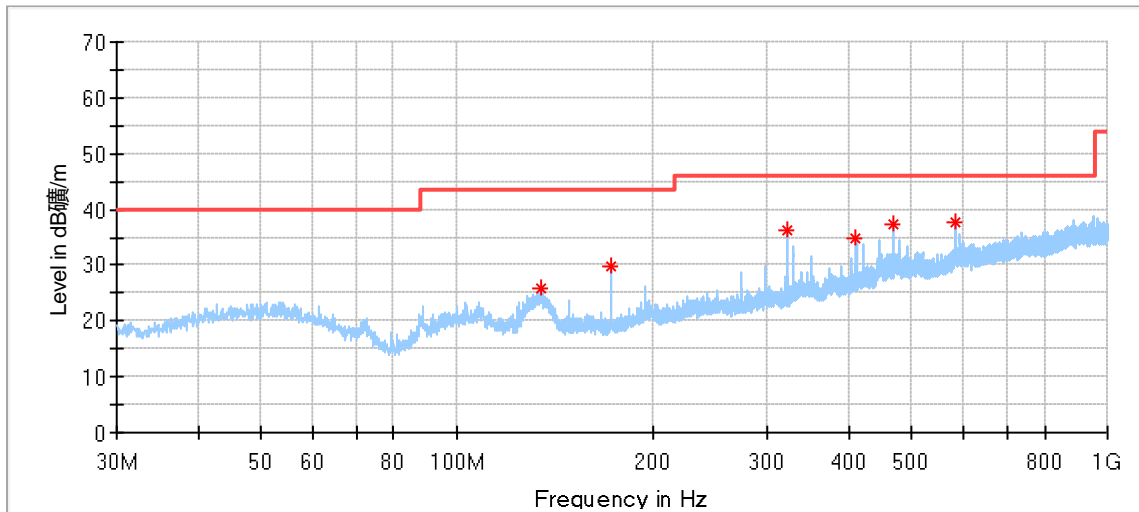

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
135.137222	25.94	43.50	17.56	200.0	H	304.0	12.68
172.482222	29.77	43.50	13.73	200.0	H	207.0	13.78
321.000000	36.18	46.00	9.82	100.0	H	175.0	19.28
411.048333	35.00	46.00	11.00	200.0	H	171.0	21.71
469.517778	37.30	46.00	8.70	100.0	H	25.0	22.42
583.492778	37.65	46.00	8.35	100.0	H	138.0	25.02

11b\_2412MHz

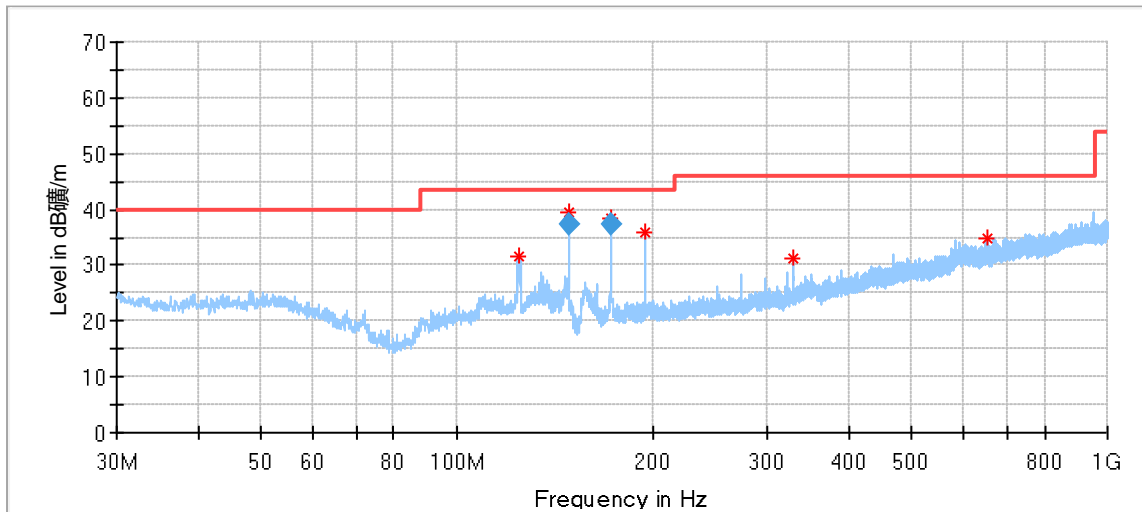

**Critical Freqs**


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
124.736667	31.76	43.50	11.74	100.0	V	123.0	13.36
148.503534	39.31	43.50	4.19	100.0	V	1.0	12.58
172.509755	38.44	43.50	5.06	100.0	V	0.0	13.78
194.468889	35.82	43.50	7.68	100.0	V	275.0	16.40
329.083333	31.12	46.00	14.88	100.0	V	320.0	19.63
655.757778	34.81	46.00	11.19	200.0	V	12.0	25.92

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
148.503534	37.31	43.50	6.19	100.0	V	1.0	12.58
172.509755	37.51	43.50	5.99	100.0	V	0.0	13.78



1GHz -18GHz:  
11b\_2412MHz\_Ant1:

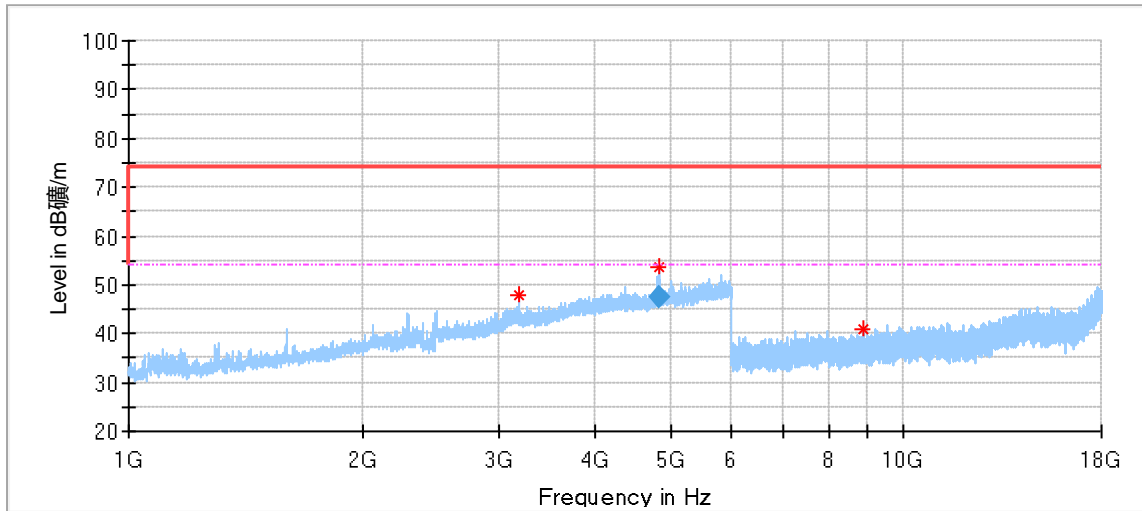


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3189.000000	47.96	74.00	26.04	150.0	H	201.0	-0.21
4824.000000	53.47	74.00	20.53	150.0	H	0.0	5.24
8845.500000	41.04	74.00	32.96	150.0	H	123.0	10.45

### Final\_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	47.68	54.00	6.32	150.0	H	0.0	5.24

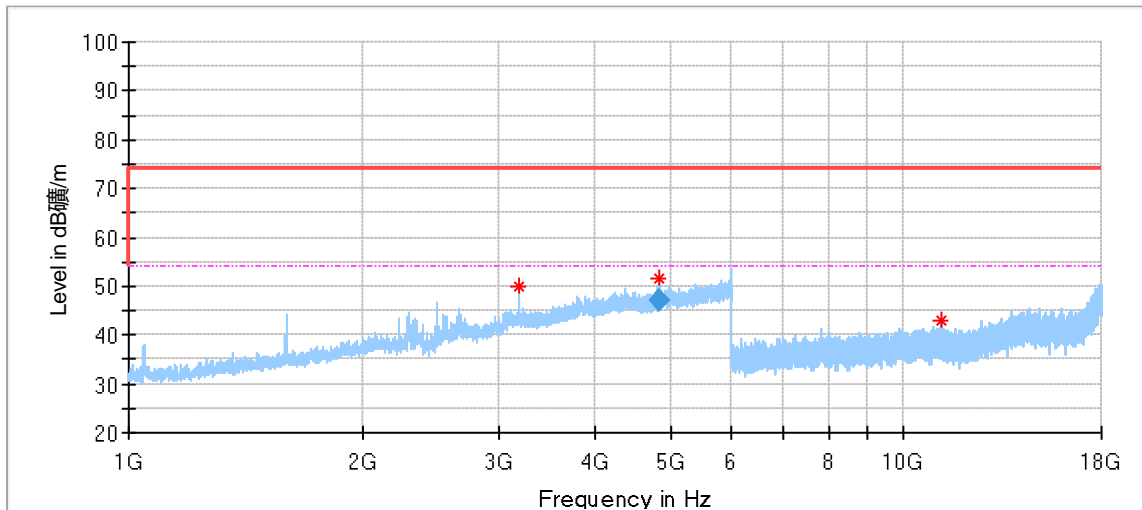


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3194.500000	50.05	74.00	23.95	150.0	V	209.0	-0.21
4824.000000	51.50	74.00	22.50	150.0	V	85.0	5.24
11186.500000	42.82	74.00	31.18	150.0	V	247.0	12.33

### Final\_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4824.000000	46.89	54.00	7.11	150.0	V	85.0	5.24

11b\_2437MHz\_Ant1:

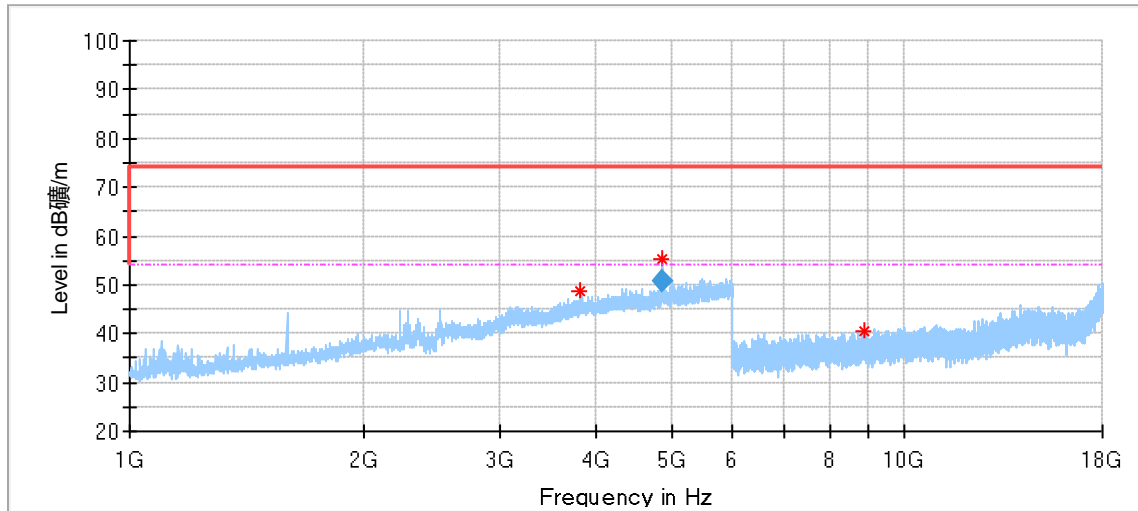


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3823.000000	48.77	74.00	25.23	150.0	H	40.0	2.68
4874.000000	55.39	74.00	18.61	150.0	H	284.0	5.61
8851.500000	40.70	74.00	33.30	150.0	H	4.0	10.45

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	50.79	54.00	3.21	150.0	H	284.0	5.61

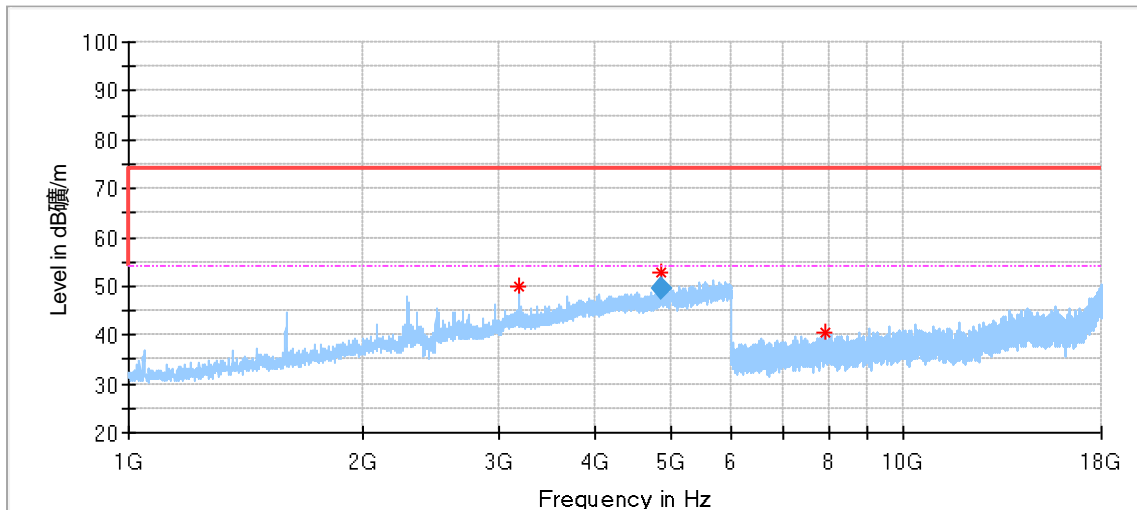


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3194.000000	50.01	74.00	23.99	150.0	V	146.0	-0.21
4874.000000	52.76	74.00	21.24	150.0	V	167.0	5.61
7899.500000	40.36	74.00	33.64	150.0	V	40.0	8.98

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	49.63	54.00	4.37	150.0	V	167.0	5.61

11b\_2462MHz\_Ant1:

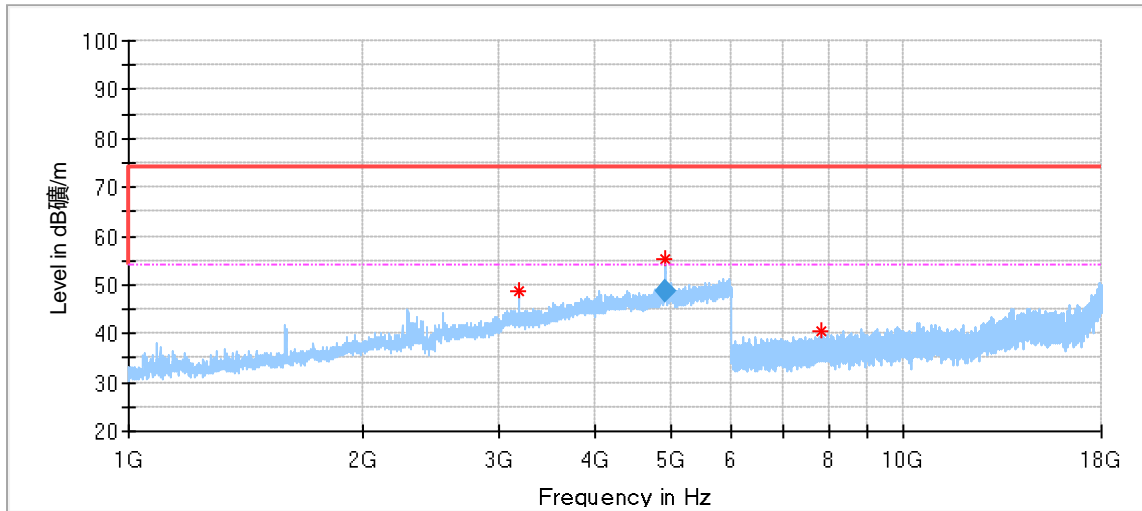


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3188.000000	48.69	74.00	25.31	150.0	H	231.0	-0.20
4924.000000	55.22	74.00	18.78	150.0	H	313.0	5.80
7845.000000	40.70	74.00	33.30	150.0	H	247.0	9.00

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	48.73	54.00	5.27	150.0	H	313.0	5.80

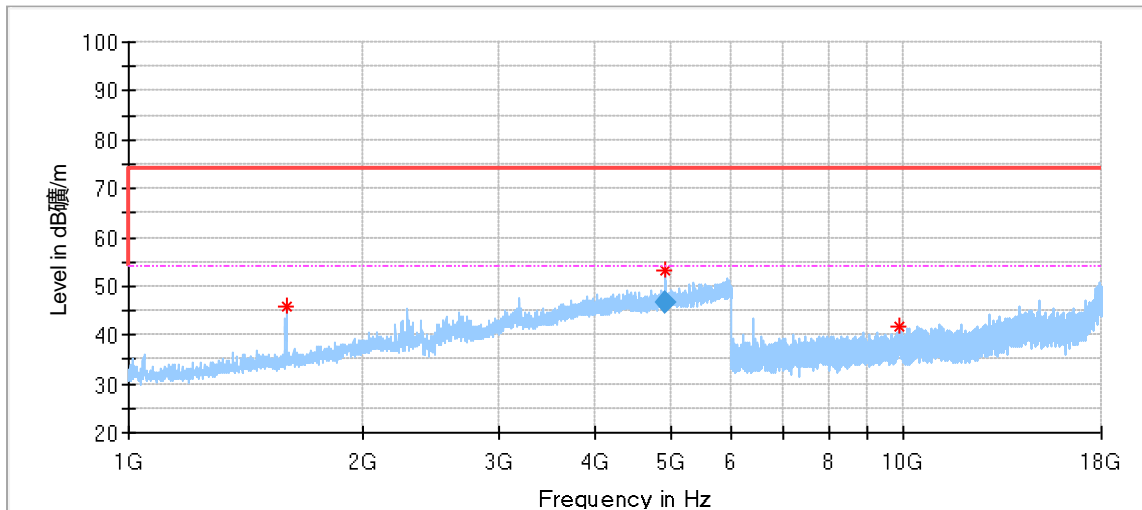


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1597.000000	46.01	74.00	27.99	150.0	V	136.0	-9.26
4924.000000	53.43	74.00	20.57	150.0	V	157.0	5.80
9890.000000	41.67	74.00	32.33	150.0	V	328.0	11.35

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	46.83	54.00	7.17	150.0	V	157.0	5.80

11g\_2412MHz\_Ant1:

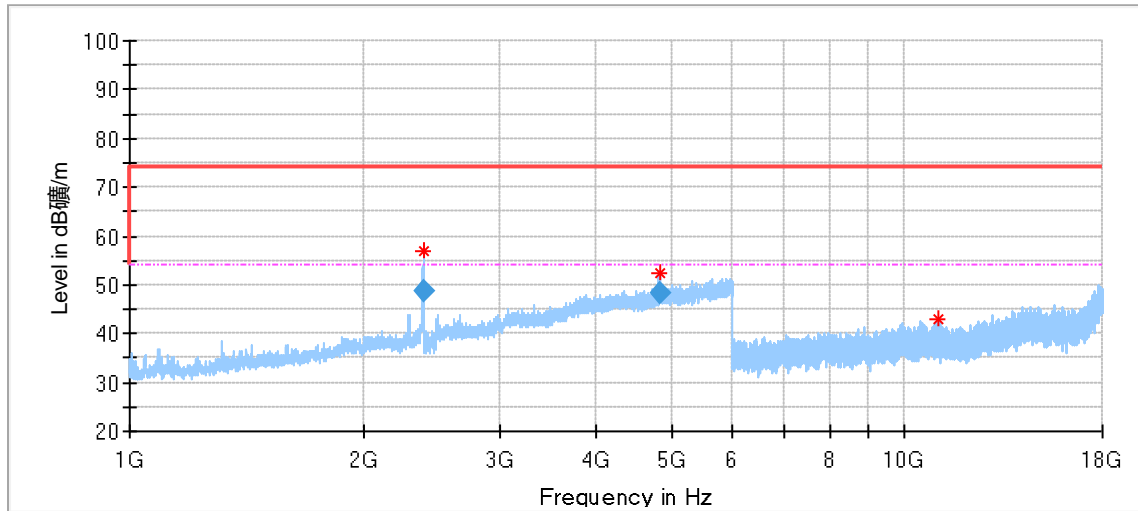


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2393.500000	56.95	74.00	17.05	150.0	H	240.0	-4.70
4824.500000	52.49	74.00	21.51	150.0	H	288.0	5.27
11085.500000	42.92	74.00	31.08	150.0	H	134.0	12.24

**Final Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2393.500000	48.60	54.00	5.40	150.0	H	240.0	-4.70
4824.500000	48.23	54.00	5.77	150.0	H	288.0	5.27

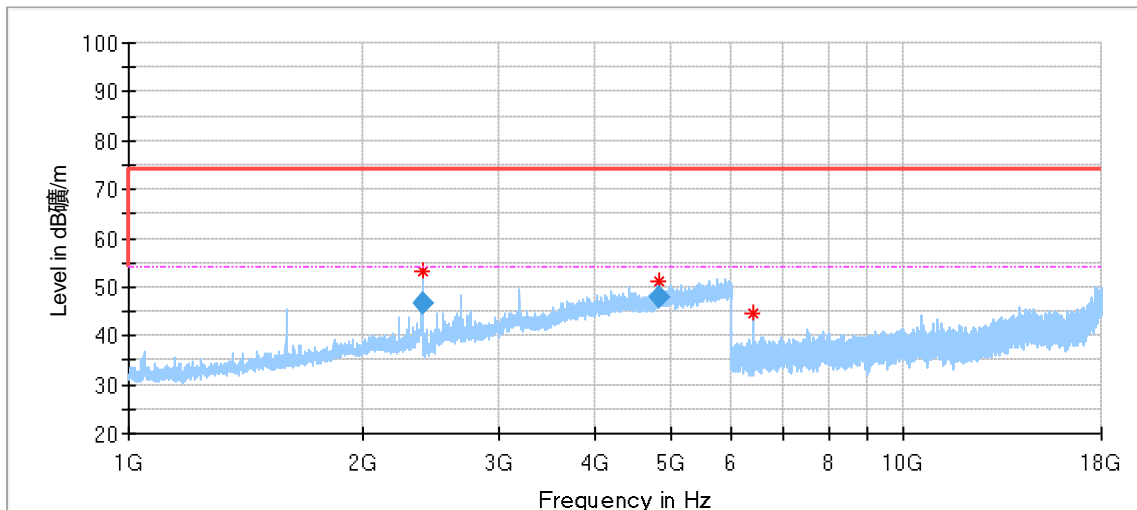


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2393.000000	53.09	74.00	20.91	150.0	V	183.0	-4.71
4830.500000	51.22	74.00	22.78	150.0	V	195.0	5.30
6385.000000	44.76	74.00	29.24	150.0	V	304.0	6.73

**Final Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2393.000000	46.63	54.00	7.37	150.0	V	183.0	-4.71
4830.500000	47.95	54.00	6.05	150.0	V	195.0	5.30

11g\_2437MHz\_Ant1:

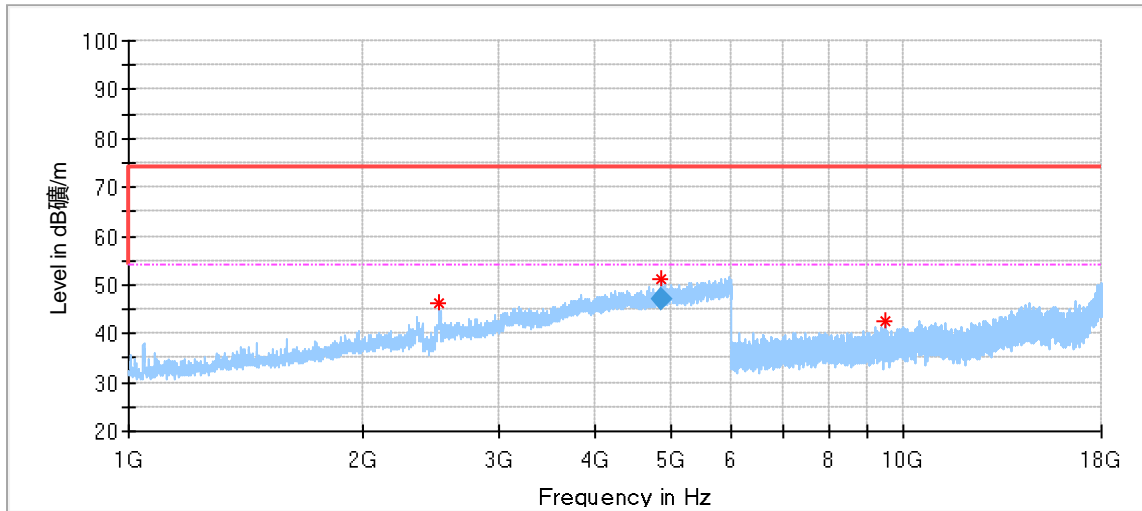


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2514.000000	46.29	74.00	27.71	150.0	H	228.0	-4.15
4864.500000	51.09	74.00	22.91	150.0	H	276.0	5.56
9455.500000	42.65	74.00	31.35	150.0	H	279.0	11.01

**Final Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4864.500000	47.12	54.00	6.88	150.0	H	276.0	5.56

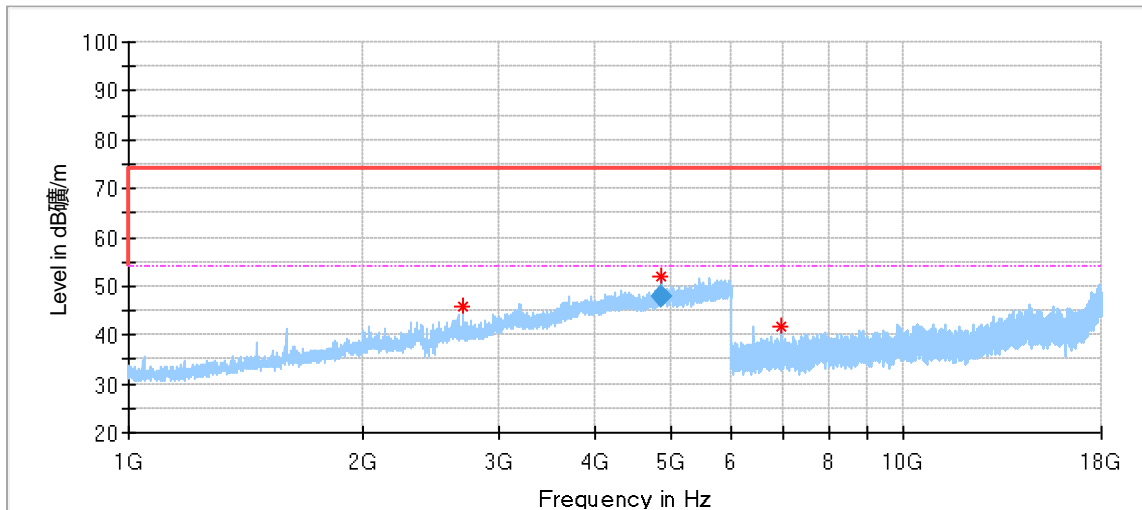


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2695.000000	45.80	74.00	28.20	150.0	V	264.0	-3.17
4875.500000	52.00	74.00	22.00	150.0	V	192.0	5.61
6968.000000	41.72	74.00	32.28	150.0	V	255.0	7.37

**Final Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4875.500000	48.02	54.00	5.98	150.0	V	192.0	5.61

11g\_2462MHz\_Ant1:

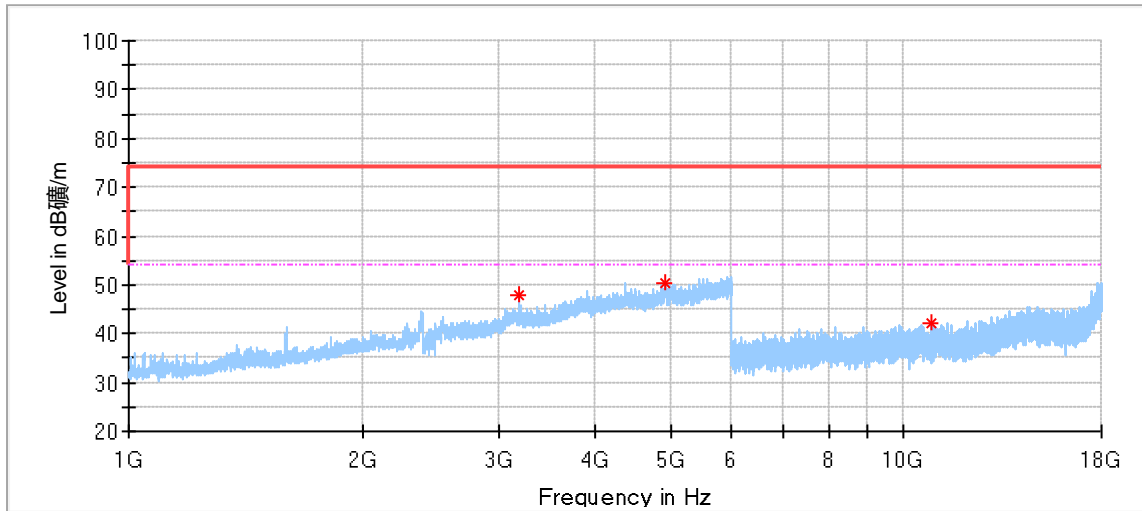


**Critical\_Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3194.500000	47.91	74.00	26.09	150.0	H	243.0	-0.21
4913.000000	50.32	74.00	23.68	150.0	H	216.0	5.80
10884.000000	42.20	74.00	31.80	150.0	H	110.0	12.06

**Final\_Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

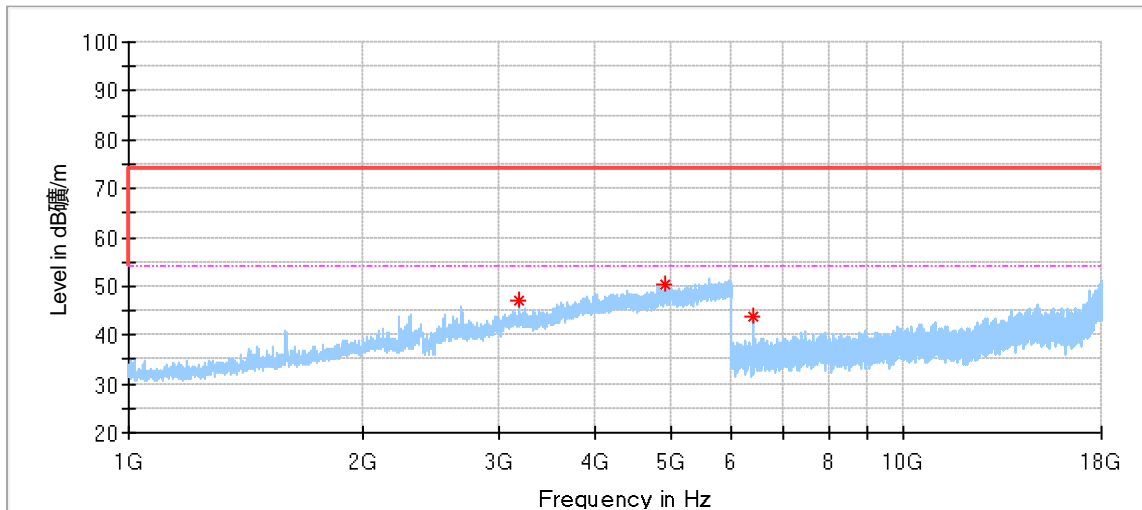


**Critical\_Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3194.000000	47.23	74.00	26.77	150.0	V	288.0	-0.21
4919.500000	50.55	74.00	23.45	150.0	V	192.0	5.80
6387.500000	43.65	74.00	30.35	150.0	V	329.0	6.72

**Final\_Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11n20\_2412MHz\_Ant1:

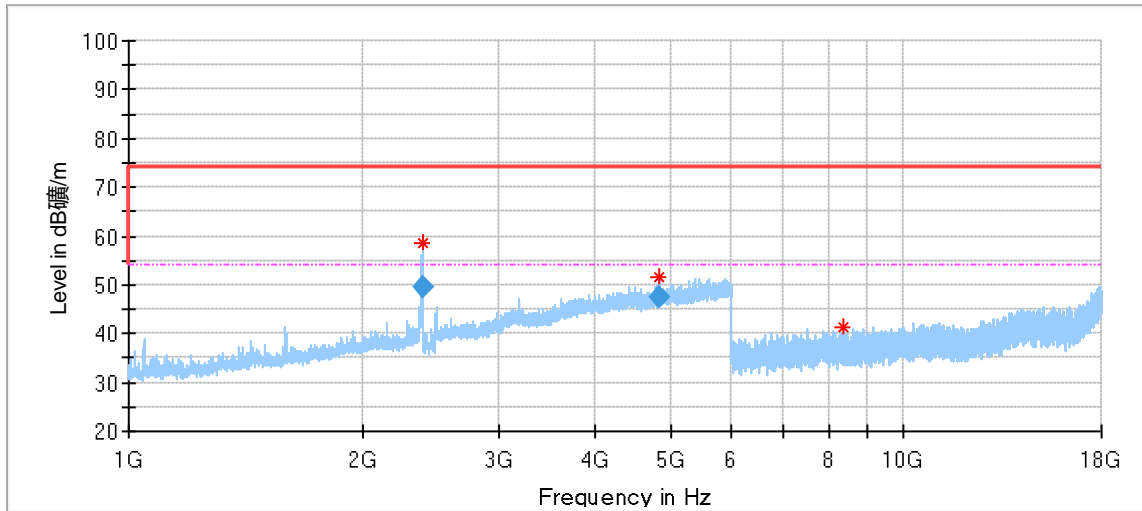


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.000000	58.54	74.00	15.46	150.0	H	356.0	-4.71
4824.000000	51.39	74.00	22.61	150.0	H	302.0	5.24
8335.000000	41.53	74.00	32.47	150.0	H	81.0	9.57

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.000000	49.37	54.00	4.63	150.0	H	356.0	-4.71
4824.000000	47.36	54.00	6.64	150.0	H	302.0	5.24

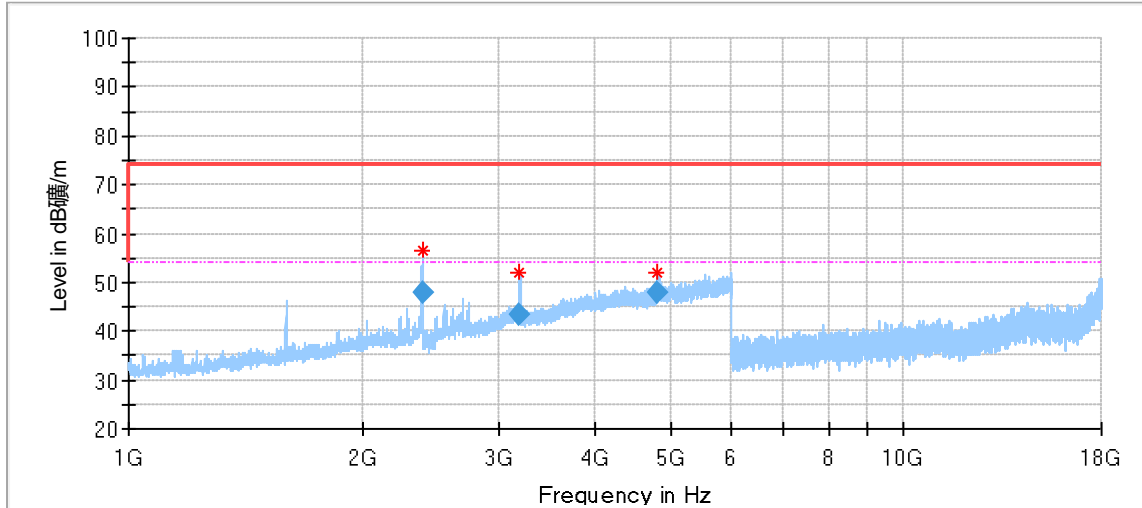

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.000000	56.32	74.00	17.68	150.0	V	75.0	-4.71
3197.000000	51.98	74.00	22.02	150.0	V	279.0	-0.22
4824.500000	51.89	74.00	22.11	150.0	V	219.0	5.21

### Final\_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.000000	47.92	54.00	6.08	150.0	V	75.0	-4.71
3197.000000	43.56	54.00	10.44	150.0	V	279.0	-0.22
4824.500000	47.78	54.00	6.22	150.0	V	219.0	5.21



11n20\_2437MHz\_Ant1:

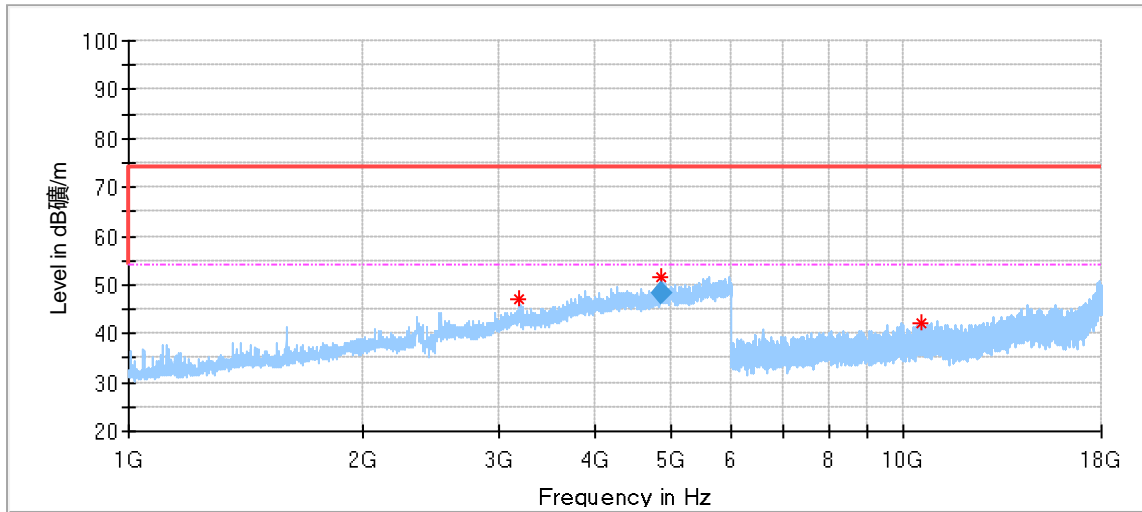


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3197.500000	47.12	74.00	26.88	150.0	H	298.0	-0.22
4874.000000	51.76	74.00	22.24	150.0	H	201.0	5.60
10545.500000	42.16	74.00	31.84	150.0	H	233.0	11.77

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	48.15	54.00	5.85	150.0	H	201.0	5.60

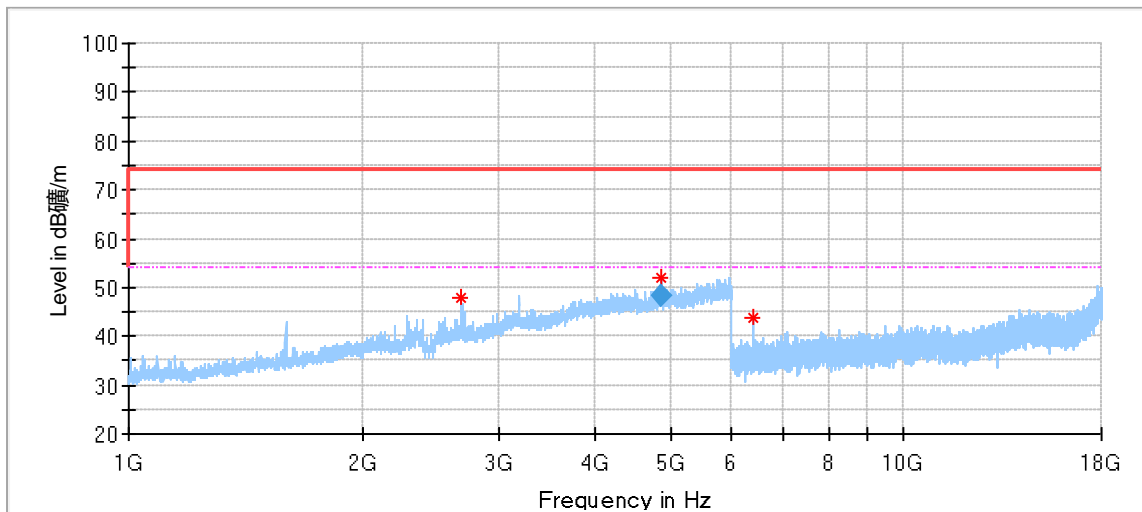


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2691.000000	48.08	74.00	25.92	150.0	V	312.0	-3.17
4874.000000	51.81	74.00	22.19	150.0	V	203.0	5.61
6388.500000	43.81	74.00	30.19	150.0	V	351.0	6.72

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	48.42	54.00	5.58	150.0	V	203.0	5.61

11n20\_2462MHz\_Ant1:

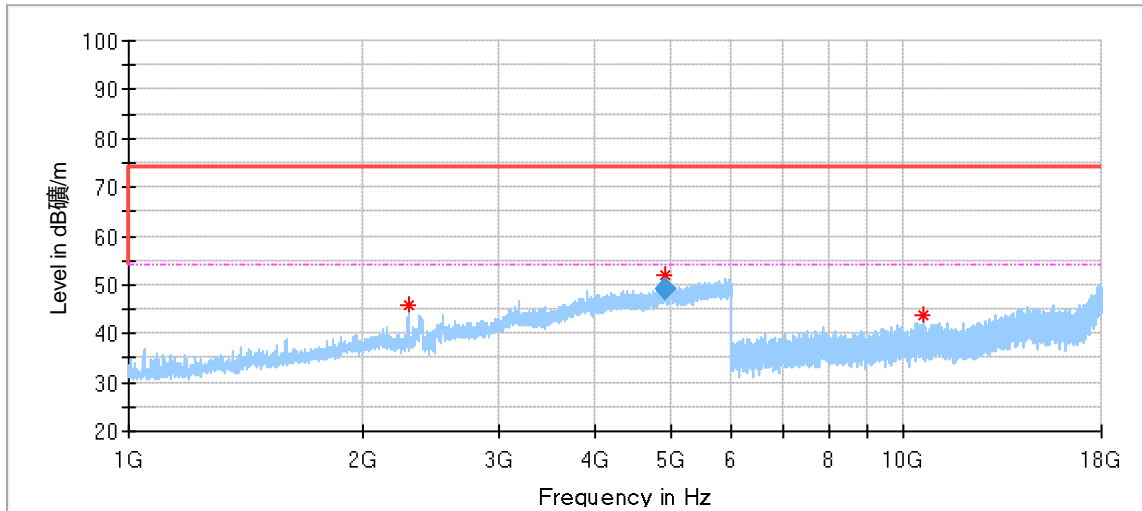


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2294.000000	45.90	74.00	28.10	150.0	H	262.0	-5.32
4928.000000	51.98	74.00	22.02	150.0	H	226.0	5.80
10600.500000	43.97	74.00	30.03	150.0	H	352.0	11.79

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4928.000000	49.26	54.00	4.74	150.0	H	226.0	5.80

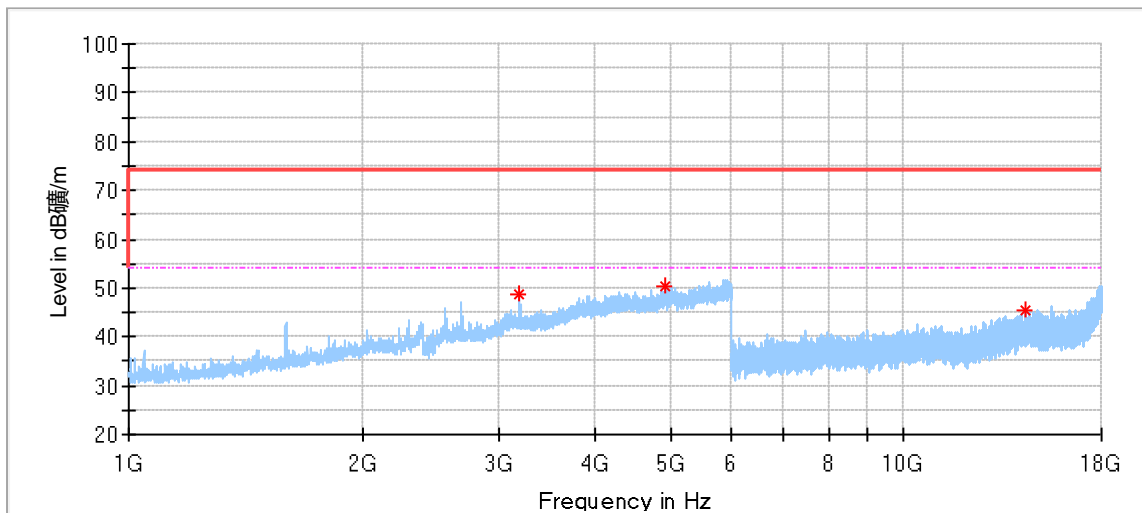


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3197.000000	48.59	74.00	25.41	150.0	V	250.0	-0.22
4924.500000	50.53	74.00	23.47	150.0	V	238.0	5.80
14380.500000	45.55	74.00	28.45	150.0	V	4.0	16.38

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11n40\_2422MHz\_Ant1:

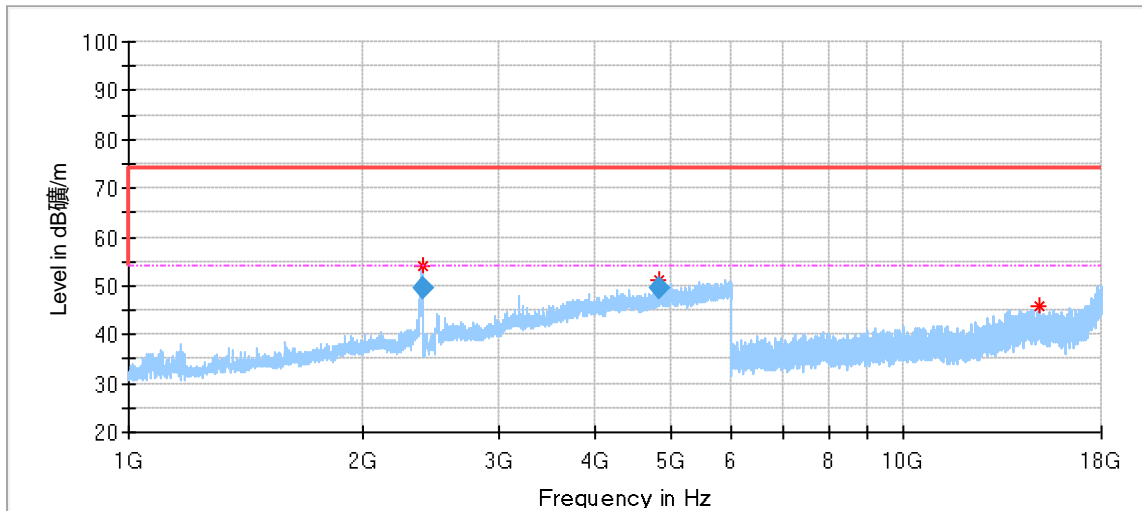


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.500000	54.21	74.00	19.79	150.0	H	259.0	-4.71
4845.500000	51.22	74.00	22.78	150.0	H	280.0	5.44
14935.500000	45.89	74.00	28.11	150.0	H	84.0	17.07

### Final\_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2392.500000	49.68	54.00	4.32	150.0	H	259.0	-4.71
4845.500000	49.35	54.00	4.65	150.0	H	280.0	5.44

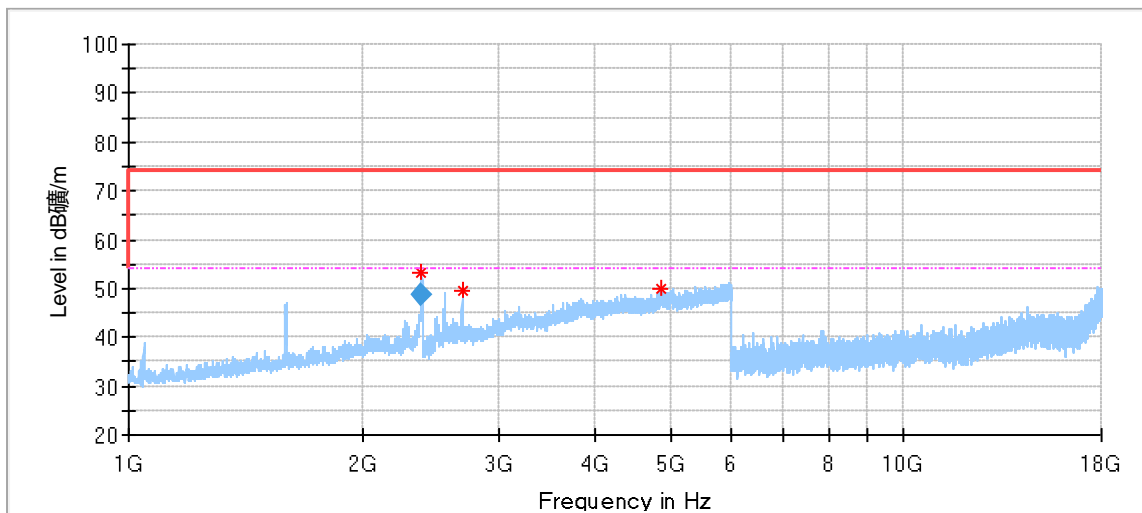


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2385.000000	53.42	74.00	20.58	150.0	V	97.0	-4.74
2693.500000	49.44	74.00	24.56	150.0	V	169.0	-3.17
4871.000000	49.95	74.00	24.05	150.0	V	210.0	5.59

### Final\_Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2385.000000	48.64	54.00	5.36	150.0	V	97.0	-4.74

11n40\_2437MHz\_Ant1:

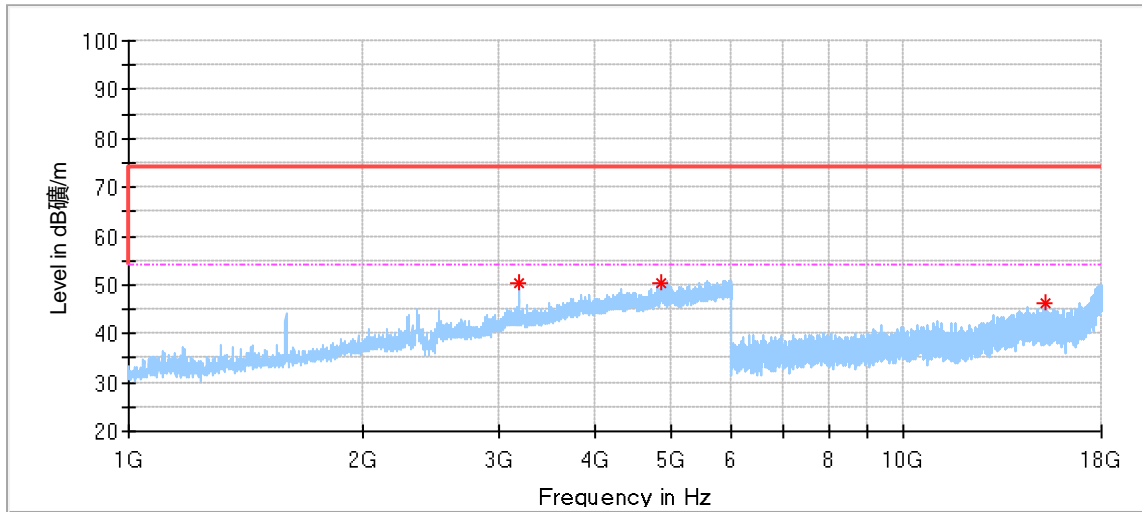


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3196.000000	50.48	74.00	23.52	150.0	H	160.0	-0.22
4875.500000	50.25	74.00	23.75	150.0	H	263.0	5.61
15272.500000	46.38	74.00	27.62	150.0	H	102.0	17.55

**Final Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

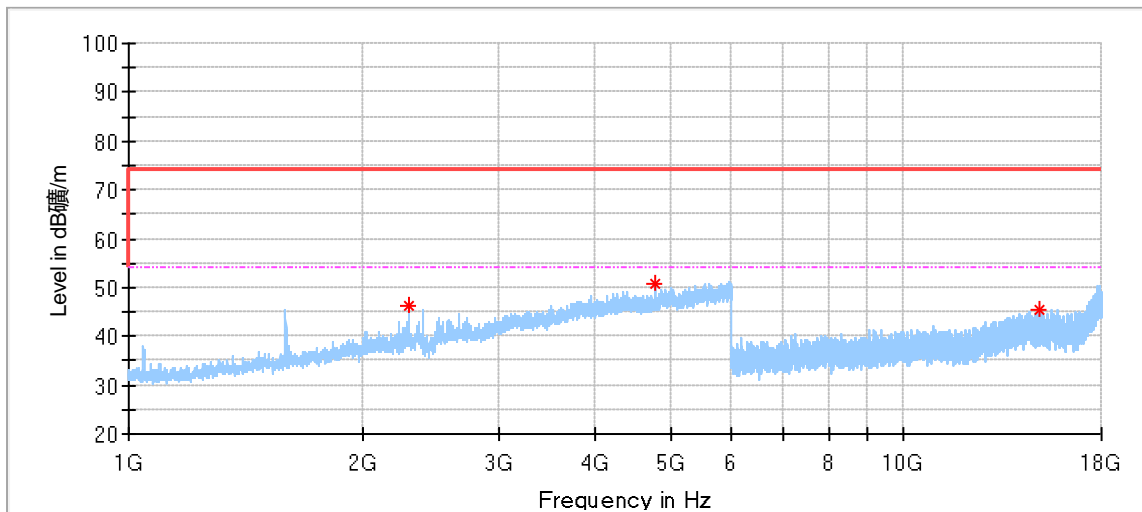


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2295.500000	46.20	74.00	27.80	150.0	V	157.0	-5.31
4779.000000	50.72	74.00	23.28	150.0	V	187.0	4.90
14964.000000	45.60	74.00	28.40	150.0	V	44.0	17.05

**Final Result**

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

11n40\_2452MHz\_Ant1:

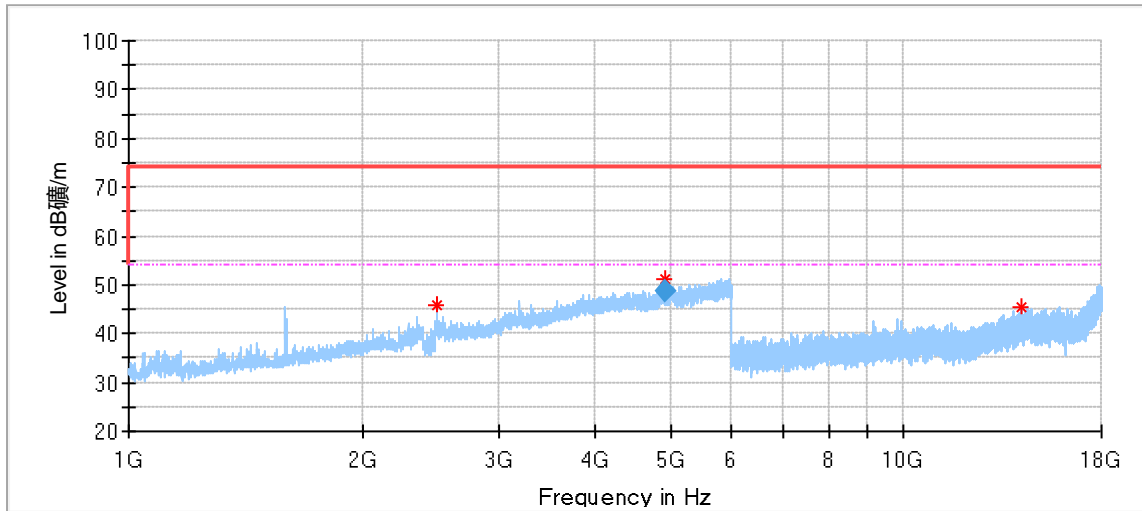


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2495.000000	45.96	74.00	28.04	150.0	H	354.0	-4.27
4916.000000	51.18	74.00	22.82	150.0	H	201.0	5.81
14161.500000	45.56	74.00	28.44	150.0	H	356.0	16.11

### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4916.000000	48.76	54.00	5.24	150.0	H	201.0	5.81

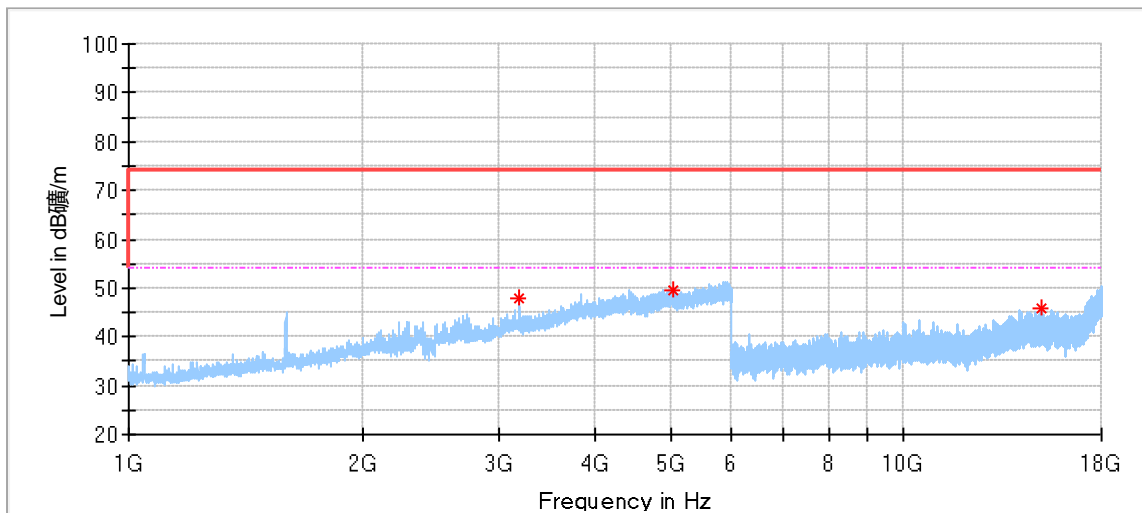


### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3197.500000	47.83	74.00	26.17	150.0	V	148.0	-0.22
5044.000000	49.57	74.00	24.43	150.0	V	13.0	5.83
15029.500000	45.71	74.00	28.29	150.0	V	44.0	17.04


### Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

18GHz -40GHz:  
11b\_2412MHz:

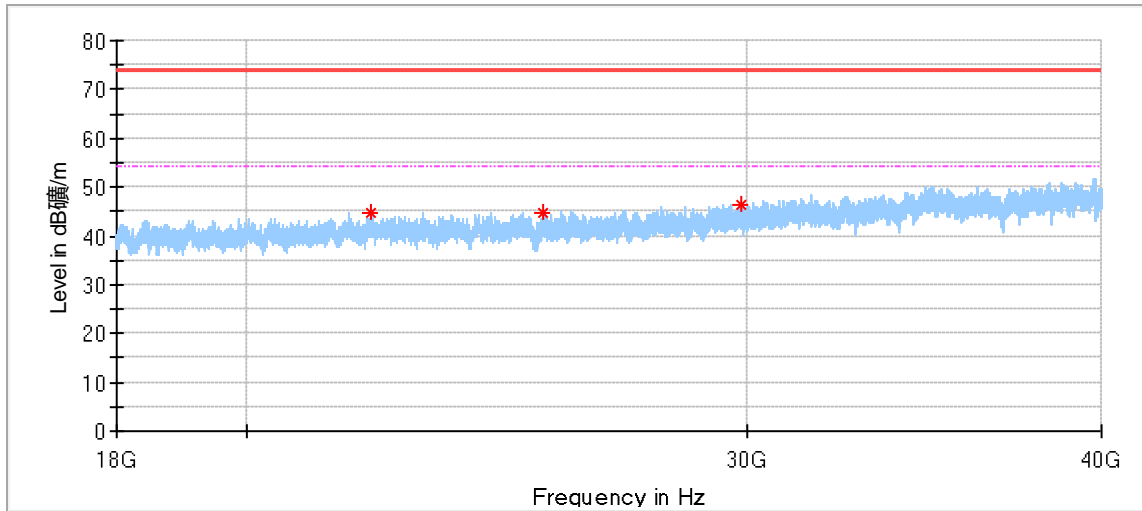


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22119.500000	44.53	74.00	29.47	150.0	H	185.0	2.0
25451.125000	44.89	74.00	29.11	150.0	H	14.0	3.5
29862.812500	46.29	74.00	27.71	150.0	H	107.0	3.7

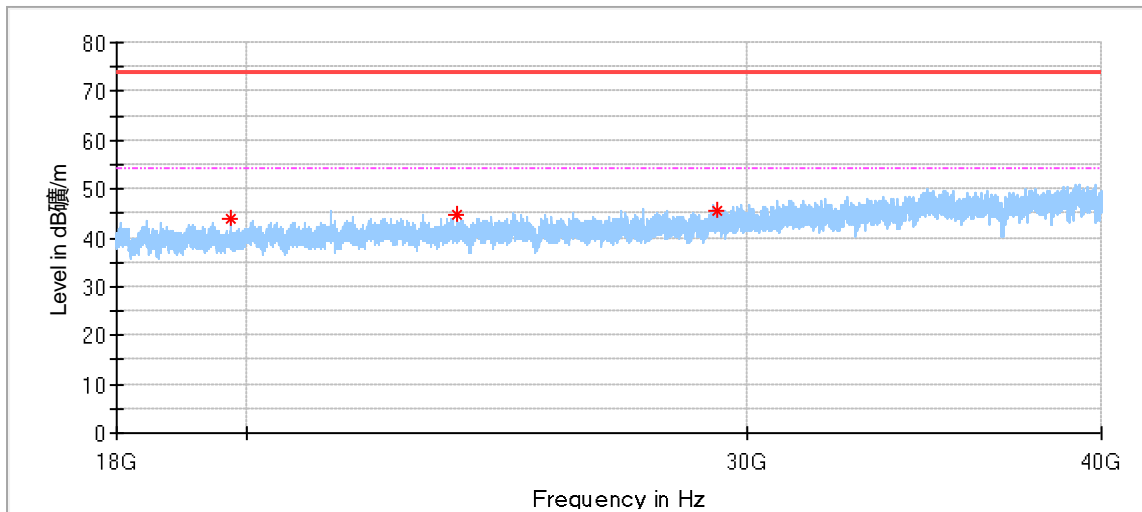


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19746.937500	43.92	74.00	30.08	150.0	V	0.0	-0.6
23718.625000	44.64	74.00	29.36	150.0	V	65.0	2.4
29280.500000	45.56	74.00	28.44	150.0	V	215.0	3.8

11b\_2437MHz

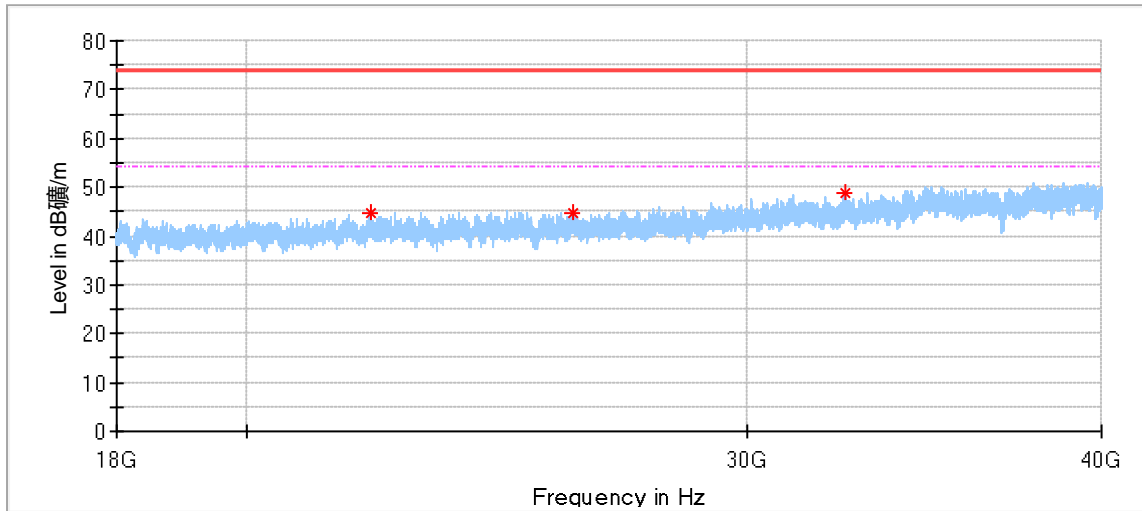


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22127.062500	44.90	74.00	29.10	150.0	H	63.0	2.0
26045.125000	44.76	74.00	29.24	150.0	H	78.0	3.5
32495.937500	48.63	74.00	25.37	150.0	H	295.0	5.3

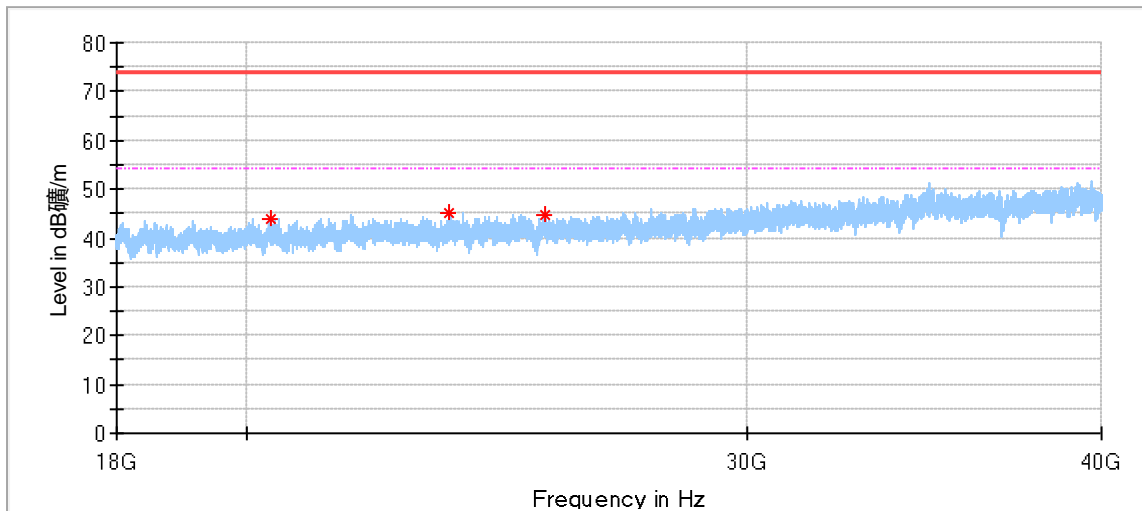


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20395.250000	43.74	74.00	30.26	150.0	V	207.0	0.1
23574.250000	45.11	74.00	28.89	150.0	V	207.0	2.2
25475.875000	44.89	74.00	29.11	150.0	V	31.0	3.5

11b\_2462MHz

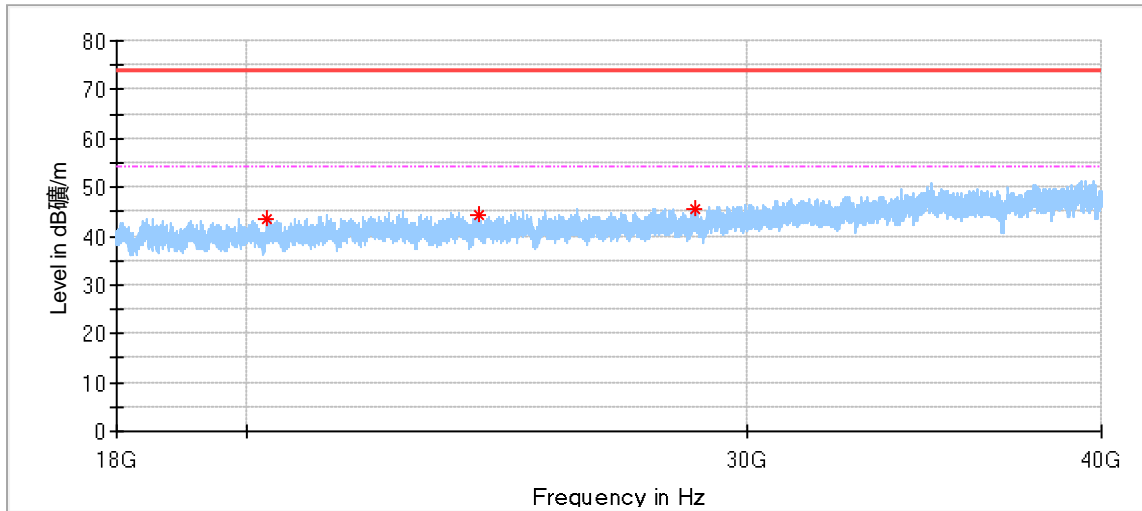

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20332.000000	43.30	74.00	30.70	150.0	H	93.0	0.0
24133.187500	44.33	74.00	29.67	150.0	H	170.0	2.6
28776.562500	45.53	74.00	28.47	150.0	H	246.0	3.8

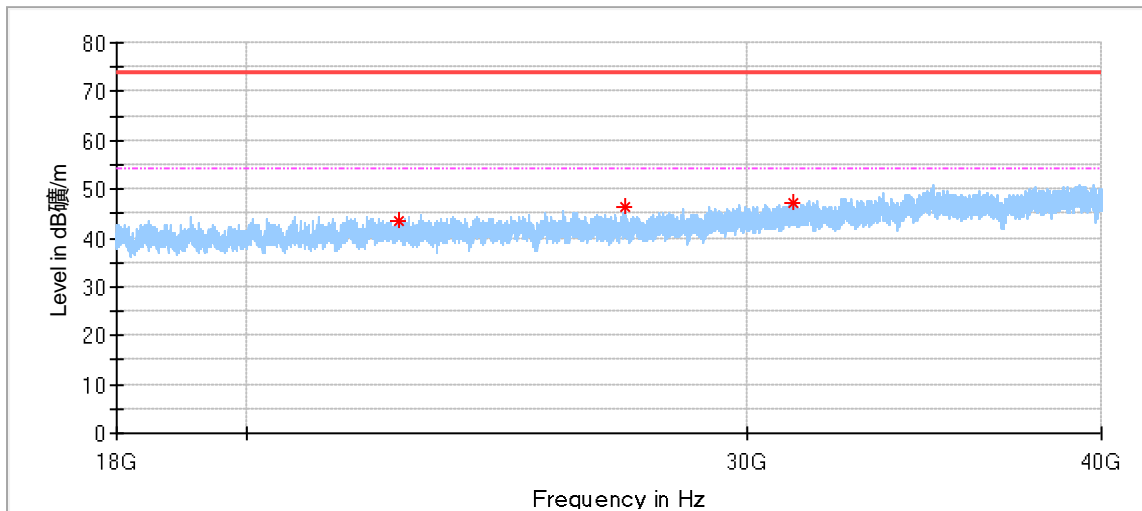

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22614.500000	43.34	74.00	30.66	150.0	V	99.0	2.3
27166.437500	46.24	74.00	27.76	150.0	V	347.0	3.9
31147.062500	47.09	74.00	26.91	150.0	V	254.0	4.0

Remark:

- (1) Only the worst case data of mode 802.11b within frequency range 30MHz-1GHz and 18GHz-40GHz was put in this report.
- (2) Corrected Amplitude = Read level + Corrector factor  
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain  
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss



## 10 Test Equipment List

### Radiated Emission Test (9kHz – 1GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2024-3-5
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2024-8-7
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

### Radiated Emission 2# Test (1GHz – 40GHz)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2024-4-26
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2024-7-11
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2024-8-1
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

### Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2024-5-19
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157W	68-4-93-14-003	101226/100929	1	2024-5-20
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	1	2024-5-20
10dB Attenuator	Weinschel	4M-10	68-4-81-14-003	43152	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-004	DNF-001	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-005	DNF-002	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-006	DNF-003	1	2024-5-19
10dB Attenuator	R&S	DNF	68-4-81-14-007	DNF-004	1	2024-5-19
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.59dB; Vertical: 4.75dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.08dB; Vertical: 5.09dB;
Uncertainty for Radiated Emission 18000MHz-40000MHz	Horizontal: 4.52dB; Vertical: 4.51dB
Uncertainty for Conducted RF test	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 <sup>-8</sup> or 1%

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2021, clause 4.4.3 and 4.5.1.

---THE END OF REPORT---