

RF EXPOSURE REPORT FOR CERTIFICATION
On Behalf of

Anker Innovations Limited

Anker MagGo Power Bank (6,600mAh, 15W)

Model Number: A1643

FCC ID: 2AOKB-A1643




Applicant:	Anker Innovations Limited
Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok,
	Kowloon, Hong Kong
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2308243
Date of Test:	Aug. 02~18, 2023
Date of Report:	Aug. 21, 2023

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. SUMMARY OF TEST	4
1.1. Summary of test result.....	4
1.2. Test Mode.....	4
1.3. Test Equipment List	4
2. MAXIMUM PERMISSIBLE EXPOSURE	5
2.1. Limit	5
2.2. Test Setup A	5
2.3. Test Setup B	6
2.4. Test Procedure	6
2.5. Equipment Approval Considerations	7
2.6. Test Result for Test setup A:	8
2.7. Test Result for Test setup B:	9
3. TEST SETUP PHOTO.....	10

EST Technology Co., Ltd.

Applicant:	Anker Innovations Limited		
Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong		
Manufacturer:	Anker Innovations Limited		
Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong		
E.U.T:	Anker MagGo Power Bank (6,600mAh, 15W)		
Model Number:	A1643		
Power Supply:	Total Capacity: 6600mAh Cell:3300mAh*2pcs Battery Capacity: 3300mAh 7.7VDC/ 25.41Wh Rating voltage: 5VDC USB-C Input: 5V===3A/ 9V===2.22A USB-C Output:5V===3A/ 9V===2.22A Wireless Output:15W Max Total Output:5V===3.6A Max		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Aug. 02, 2023	Date of Test:	Aug. 02~18, 2023
Test Specification:	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
		Date: Aug. 21, 2023	
Prepared by:	Reviewed by:	Approved by:	
 _____ Ring Yang / Assistant	 _____ Seven Wang / Engineer	 _____ Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. SUMMARY OF TEST

1.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with Empty Load
	Wireless Charging with Half Load
	Wireless Charging with Full Load
Note: The worst Full Load status is recorded in the report	

1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	June 12,23	1 Year
Simulated load	/	/	EST-306	N/A	N/A
Simulated load	/	/	EST-307	N/A	N/A
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit


Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30


Note:

- f = frequency in MHz * = Plane-wave equivalent power density.
- For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

2.2. Test Setup A

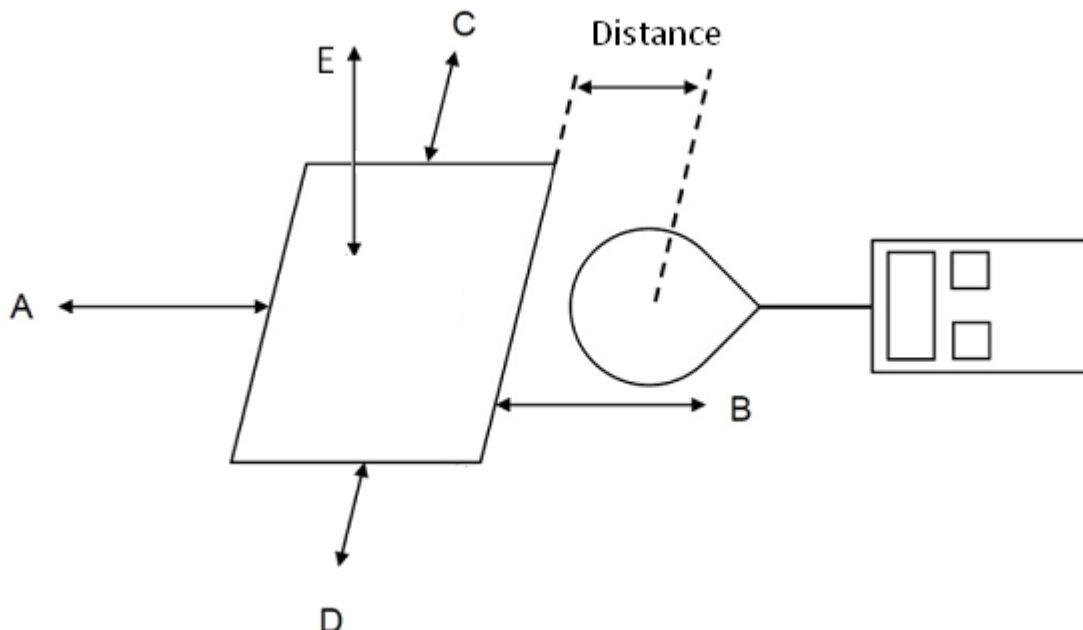

2.3. Test Setup B

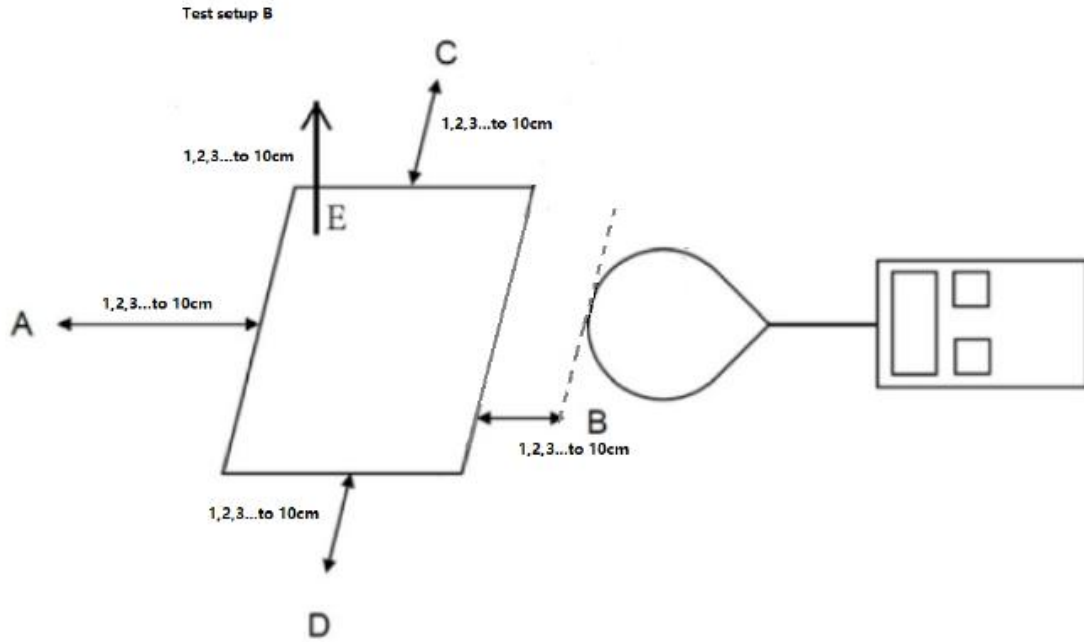

2.4. Test Procedure

- a. The test was performed on 360 degree turn table in anechoic chamber.
- b. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe, for test setup A.
- c. Measure magnetic and electrical field strength at a distance 10cm to 1cm at 1cm iteration, Which is between the edge of the charger and the edge of of probe, for test setup B.
- d. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.

2.5. Equipment Approval Considerations

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance.

1	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 111-360KHz.
2	Output power from each primary coil is less than or equal to 15 watts.
	YES; the maximum output power of the primary coil is 15W.
3	The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.
	YES; the transfer system includes only single primary and secondary coils.
4	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
5	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	No.
6	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

2.6. Test Result for Test setup A:

E-field strength			
Frequency range (KHz)	111-360kHz		
Test Mode	Full Load	Half Load	Empty Load
Position A(V/m)	0.481	0.405	0.367
Position B(V/m)	0.528	0.454	0.308
Position C(V/m)	0.682	0.532	0.328
Position D(V/m)	0.669	0.512	0.337
Position E(V/m)	0.552	0.425	0.335
Limits (V/m)	614		
50% Limits(V/m)	307		
H-field strength			
Frequency range (KHz)	111-360kHz		
Test Mode	Full Load	Half Load	Empty Load
Position A(A/m)	0.047	0.045	0.046
Position B(A/m)	0.048	0.046	0.042
Position C(A/m)	0.042	0.043	0.041
Position D(A/m)	0.045	0.041	0.036
Position E(A/m)	0.048	0.042	0.040
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

Note: The product has AC Power in mode and internal battery mode, all mode have been tested, only worst case internal battery mode is recorded.

2.7. Test Result for Test setup B:

E-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (V/m)

Test distance (cm)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	Limits (V/m)
1	14.426	13.396	8.192	9.406	18.097	614
2	7.350	9.322	5.473	6.408	12.120	614
3	5.162	6.882	3.342	4.711	9.196	614
4	3.720	4.367	2.294	3.473	6.688	614
5	2.562	3.269	1.681	2.725	5.108	614
6	1.889	2.261	1.194	2.149	3.895	614
7	1.501	1.691	1.050	1.484	2.841	614
8	1.083	1.253	0.841	1.050	2.349	614
9	0.991	0.965	0.632	0.942	1.809	614
10	0.566	0.818	0.485	0.700	1.384	614

H-Filed Strength at (distance 10cm to 1cm at 1cm iteration, i.e. at a distance of 10cm, 9cm, 8cm, 1cm, Which is between the edge of the charger and the edge of of probe,) surrounding the EUT (A/m)

Test distance (cm)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	Limits (A/m)
1	0.042	0.052	0.047	0.046	0.046	1.63
2	0.053	0.045	0.046	0.045	0.037	1.63
3	0.048	0.042	0.045	0.050	0.039	1.63
4	0.046	0.050	0.053	0.047	0.042	1.63
5	0.051	0.042	0.050	0.039	0.048	1.63
6	0.046	0.043	0.048	0.045	0.050	1.63
7	0.047	0.047	0.040	0.042	0.046	1.63
8	0.051	0.044	0.047	0.048	0.044	1.63
9	0.043	0.046	0.049	0.044	0.050	1.63
10	0.047	0.043	0.051	0.050	0.048	1.63

Note: Only internal battery mode.

3. TEST SETUP PHOTO

Refer to report no. ESTE-R2308244 (Appendix A)

End of Test Report