

# FCC TEST REPORT

For

**Anker SOLIX Home Power Panel**

**Model Number: A17B1**

**FCC ID: 2AOKB-A17B1**

**Report Number : WT238001947**

Test Laboratory : Shenzhen Academy of Metrology and Quality  
Inspection  
Site Location : No.4, Tongfa Road, Xili Street, Nanshan District,  
Shenzhen, Guangdong, China  
Tel : 0086-755-86928965  
Fax : 0086-755-86009898-31396  
Web : [www.smq.com.cn](http://www.smq.com.cn)  
E-mail : [emcrf@smq.com.cn](mailto:emcrf@smq.com.cn)

## Revision History

No	Date	Remark
V1.0	2023.12.29	Initial issue

## TEST REPORT DECLARATION

Applicant : Anker Innovations Limited  
Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road,  
Mongkok, Kowloon, HONG KONG  
Manufacturer : Anker Innovations Limited  
Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road,  
Mongkok, Kowloon, HONG KONG  
EUT Description : Anker SOLIX Home Power Panel  
Model No. : A17B1  
Trade mark : Anker  
FCC ID : 2AOKB-A17B1

Test Standards:

### FCC Part 15 Subpart C

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.207, 15.209, 15.247.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer: 陈司林 Date: Dec.29, 2023  
(Chen Silin 陈司林)  
Checked by: 万晓婧 Date: Dec.29, 2023  
(Wan Xiaojing 万晓婧)  
Approved by: 林奕翔 Date: Dec.29, 2023  
(Lin Yixiang 林奕翔)

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION .....</b>	<b>3</b>
<b>1. TEST RESULTS SUMMARY .....</b>	<b>6</b>
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. Report information.....	7
2.2. Laboratory Accreditation and Relationship to Customer .....	7
2.3. Measurement Uncertainty .....	8
<b>3. PRODUCT DESCRIPTION.....</b>	<b>9</b>
3.1. EUT Description.....	9
3.2. Related Submittal(s) / Grant (s) .....	9
3.3. Block Diagram of EUT Configuration .....	10
3.4. Operating Condition of EUT .....	10
3.5. Directional Antenna Gain .....	10
3.6. Support Equipment List .....	10
3.7. Test Conditions.....	10
3.8. Special Accessories.....	10
3.9. Equipment Modifications .....	10
<b>4. TEST EQUIPMENT USED .....</b>	<b>11</b>
<b>5. DUTY CYCLE .....</b>	<b>12</b>
5.1. LIMITS OF DUTY CYCLE.....	12
5.2. TEST PROCEDURE.....	12
5.3. TEST SETUP .....	12
5.4. TEST DATA.....	12
<b>6. 6DB BANDWIDTH MEASUREMENT.....</b>	<b>15</b>
6.1. LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	15
6.2. TEST PROCEDURE.....	15
6.3. TEST SETUP.....	15
6.4. Test Data .....	15
<b>7. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....</b>	<b>21</b>
7.1. LIMITS OF Maximum Conducted Output Power Measurement.....	21
7.2. TEST PROCEDURE.....	21
7.3. TEST SETUP .....	21
7.4. TEST DATA.....	21
<b>8. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT .....</b>	<b>27</b>
8.1. LIMITS OF Maximum Power Spectral Density Level Measurement.....	27
8.2. TEST PROCEDURE.....	27
8.3. TEST DATA.....	27
<b>9. CONDUCTED BANDEDGE AND SPURIOUS MEASUREMENT.....</b>	<b>32</b>
9.1. LIMITS OF Conducted Bandedge and Spurious Measurement.....	32
9.2. TEST PROCEDURE.....	32
9.3. TEST DATA.....	32
<b>10. RADIATED BANDEDGE AND SPURIOUS MEASUREMENT .....</b>	<b>49</b>
10.1. LIMITS OF Radiated Bandedge and Spurious Measurement .....	49
10.2. TEST PROCEDURE.....	49

10.3.	TEST DATA.....	50
<b>11.</b>	<b>CONDUCTED EMISSION TEST FOR AC POWER PORT MEASUREMENT .....</b>	<b>81</b>
11.1.	Test Standard and Limit .....	81
11.2.	Test Procedure .....	81
11.3.	Test Arrangement.....	81
11.4.	Test Data .....	81
<b>12.</b>	<b>ANTENNA REQUIREMENTS.....</b>	<b>85</b>
12.1.	Antenna Connector .....	85
12.2.	Antenna Gain .....	85

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
6dB DTS bandwidth measurement	15.247 (a) (2)	Pass
Maximum Peak Conducted Power	15.247 (b) (3)	Pass
Maximum Power Spectral Density Level	15.247 (e)	Pass
Conducted Bandedge and Spurious	15.247 (d)	Pass
Radiated Bandedge and Spurious	15.247 (d) 15.209 15.205	Pass
Conducted emission test for AC power port	15.207	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

## **2. GENERAL INFORMATION**

### **2.1. Report information**

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

### **2.2. Laboratory Accreditation and Relationship to Customer**

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for

Laboratory Accreditation (A2LA) and certificate number is 3292.01.

### **2.3. Measurement Uncertainty**

Conducted Emission

9 kHz~150 kHz U=3.7dB k=2

150 kHz~30MHz U=3.3dB k=2

Radiated Emission

30MHz~1000MHz U=4.3dB k=2

1GHz~6GHz U=4.6 dB k=2

6GHz~40GHz U=5.1dB k=2



### 3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.

#### 3.1. EUT Description

Description : Anker SOLIX Home Power Panel  
 Manufacturer : Anker Innovations Limited  
 Model Number : A17B1  
 Operate Frequency : 2.412GHz~2.462GHz  
 Antenna Designation : 2.4G rubber stick double copper tube antenna: 4.24dBi  
 Operating voltage : 120/ 240Vac 60Hz  
 Remark: /

WLAN:

Table 2 Working Frequencies Lists (802.11b, 802.11g, 802.11n HT20)

Channel	Frequency	Channel	Frequency
1	2412MHz	8	2447MHz
2	2417MHz	9	2452MHz
3	2422MHz	10	2457MHz
4	2427MHz	11	2462MHz
5	2432MHz	---	---
6	2437MHz	---	---
7	2442MHz	---	---


Table 3 Working Frequencies Lists (802.11n HT40)

Channel	Frequency	Channel	Frequency
3	2422MHz	8	2447MHz
4	2427MHz	9	2452MHz
5	2432MHz	---	---
6	2437MHz	---	---
7	2442MHz	---	---

#### 3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A17B1** filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

### 3.3. Block Diagram of EUT Configuration

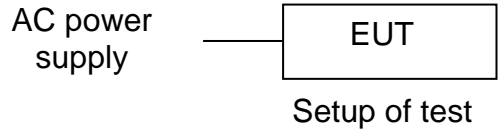

### 3.4. Operating Condition of EUT

The Radiated spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

### 3.5. Directional Antenna Gain

Not available for this EUT intended for grant.

### 3.6. Support Equipment List

Table 4 Support Equipment List

Name	Model No.	S/N	Manufacturer
Notebook	HSN-Q15C	5CD9361KR6	HP

### 3.7. Test Conditions

Date of test: Nov.27, 2023- Dec.21, 2023

Date of EUT Receive: Nov.09, 2023

Temperature: 21°C-26°C

Relative Humidity: 40%-50%

### 3.8. Special Accessories

Not available for this EUT intended for grant.

### 3.9. Equipment Modifications

Not available for this EUT intended for grant.

#### 4. TEST EQUIPMENT USED

Table 5 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB16469	EMI Test Receiver	R&S	ESR7	Aug.17,2023	1 Year
SB8501/05	LISN	R&S	NNLK 8130	Jan.17,2023	1 Year
SB18867	Test Receiver	R&S	ESR26	Feb.01,2023	1 Year
SB3345	Loop Antenna	Schwarzbeck	FMZB1516-113	Jan.19, 2023	1 Year
SB18826	Broadband Antenna	SCHWARZBECK	VULB9163	Mar.09,2023	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Jan.19, 2023	1 Year
SB3435	Horn Antenna	R&S	HF906	Nov.21, 2023	1 Year
SB9058/03	Pre-Amplifier	R&S	SCU 18	Jan.19, 2023	1 Year
SB8501/11	Antenna	R&S	3160-09	Feb.22, 2023	3 Years
SB8501/12	Antenna	R&S	3160-10	Feb.22, 2023	3 Years
SB8501/16	Pre-Amplifier	R&S	SCU-26	Jan.19, 2023	1 Year
SB9555/02	Fully Anechoic Chamber	Albatross	10.0×5.2×5.4(m)	Aug.15, 2023	1 Year
SB20321/01	Spectrum Analyzer	R&S	FSV3044	Apr.24, 2023	1 Year

Table 6 Test software

Name	Manufacturer	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscond co.,ltd	3.2.22

## 5. DUTY CYCLE

### 5.1. LIMITS OF DUTY CYCLE

None; for reporting purposes only

### 5.2. TEST PROCEDURE

1. Set span = Zero
2. RBW = 10MHz
3. VBW = 10MHz,
4. Detector = Peak

### 5.3. TEST SETUP




### 5.4. TEST DATA

Table 7 Duty Cycle Test Data


Test Mode	On Time (ms)	Duty Cycle (%)	Duty Factor	1/T Minimum VBW (kHz)
802.11b	1.01	92.66	0.33	0.01
802.11g	0.62	95.38	0.21	0.01
802.11n HT20	0.61	95.31	0.21	0.01
802.11n HT40	0.62	95.38	0.21	0.01

11B\_2437

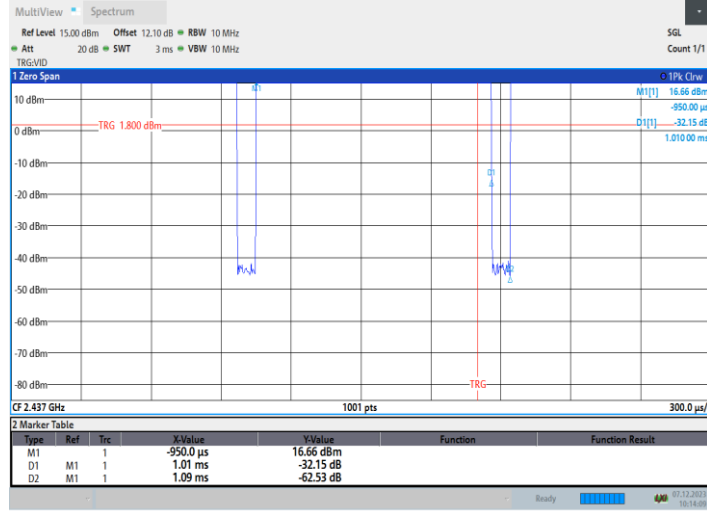


10:14:11 07.12.2023

11G\_2437

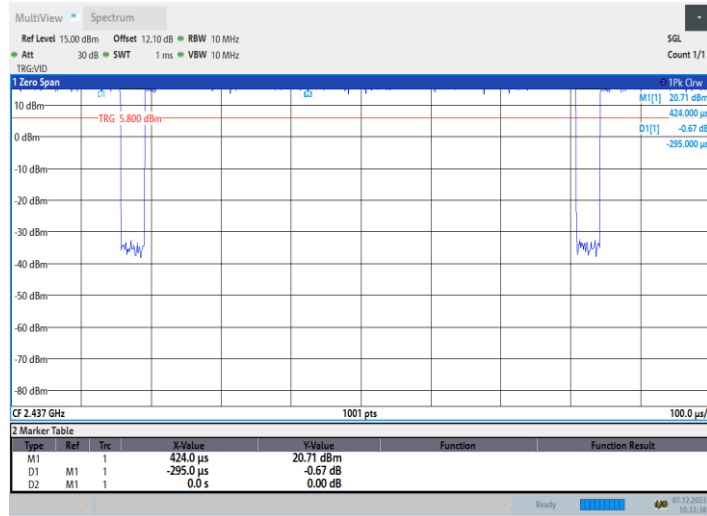


10:32:38 07.12.2023

11N20\_2437

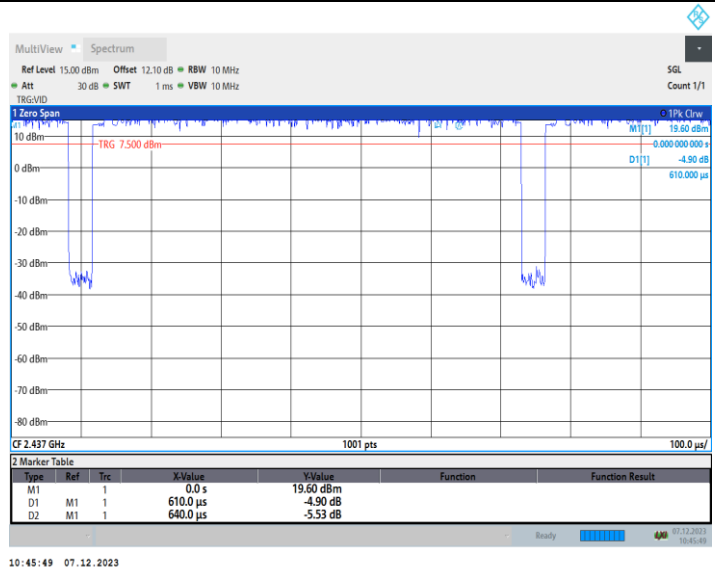

11N40\_2437

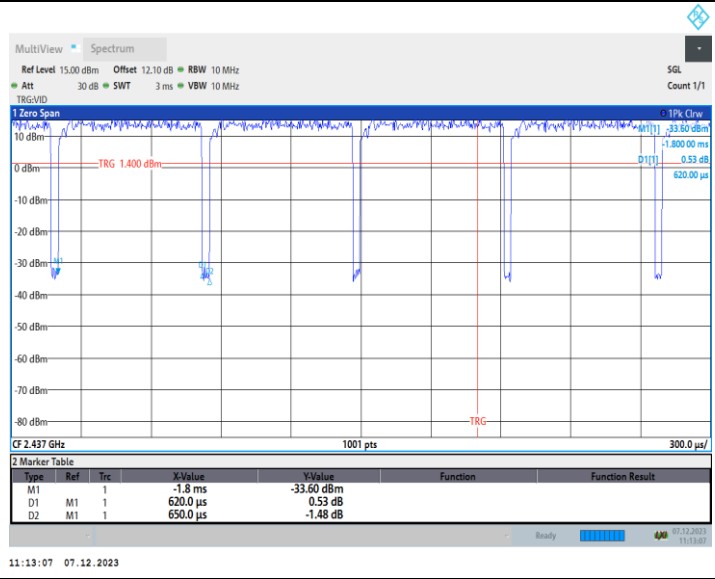

## 6. 6DB BANDWIDTH MEASUREMENT

### 6.1. LIMITS OF 6dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (2)

### 6.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 11.8

The transmitter output was connected to the spectrum analyzer.

- a) Set RBW = 100 kHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission


### 6.3. TEST SETUP




### 6.4. Test Data

# 6dB Bandwidth Test Data

11B\_Ant1\_2412

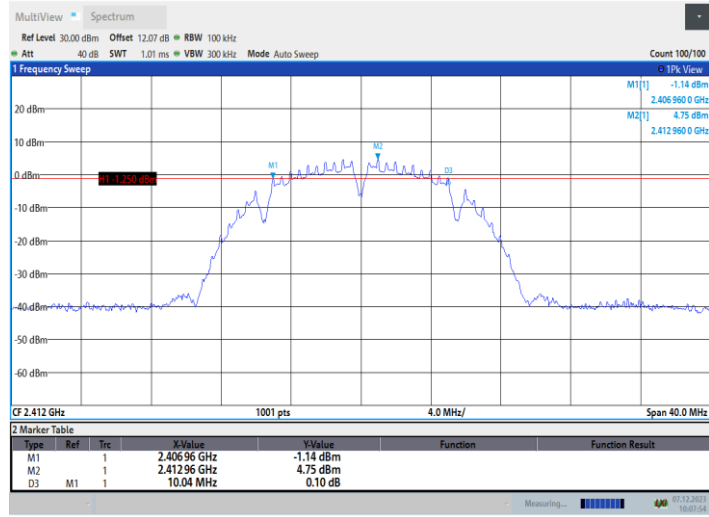


11B\_Ant1\_2437

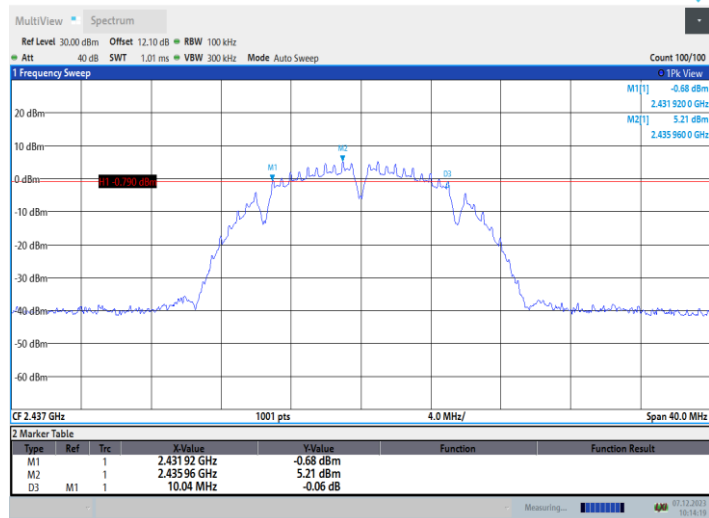


11B\_Ant1\_2462




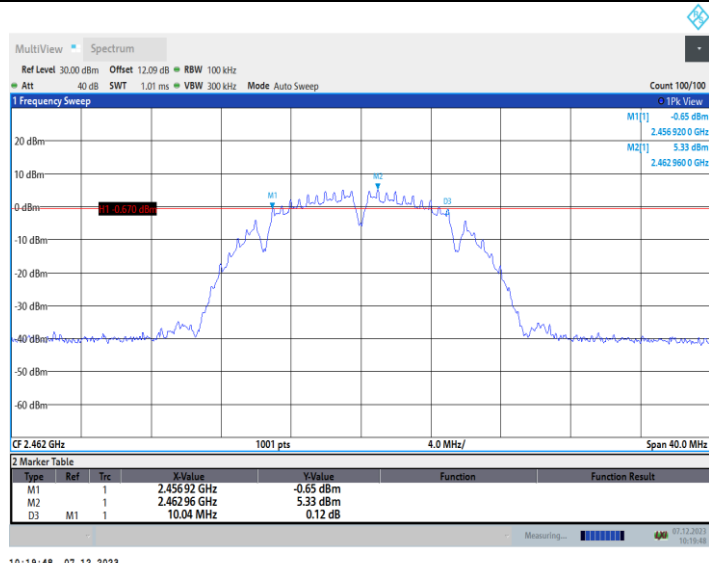


11G\_Ant1\_2412

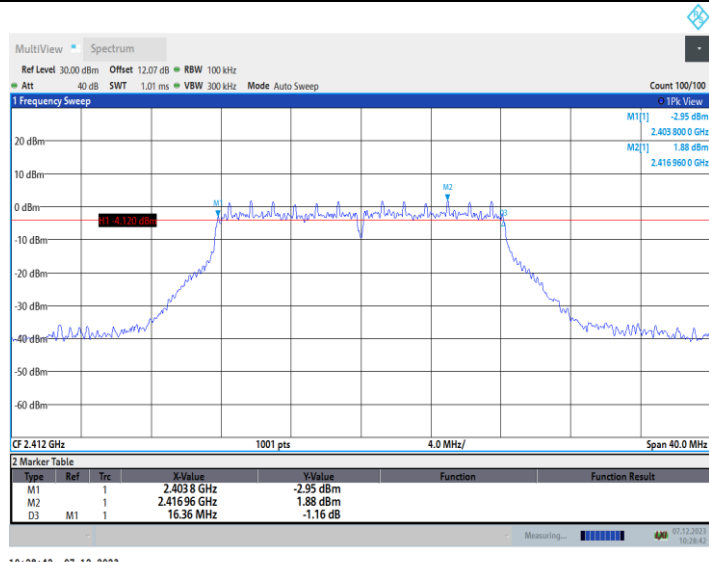

11G\_Ant1\_2437

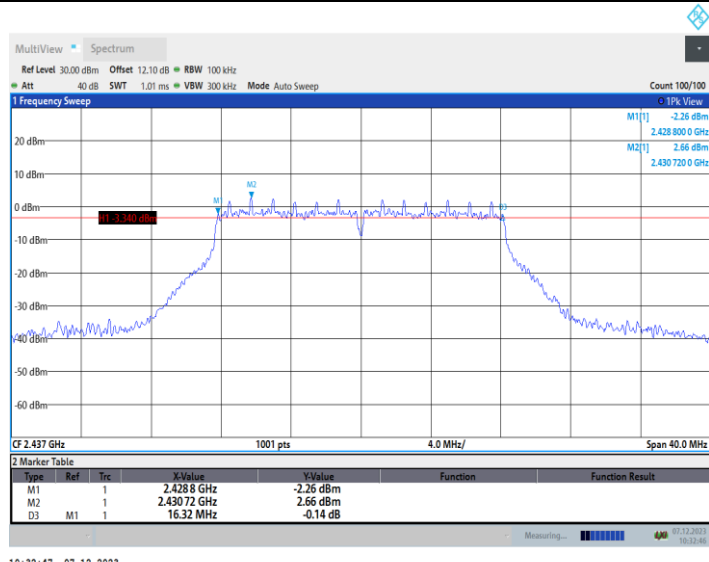


11G\_Ant1\_2462

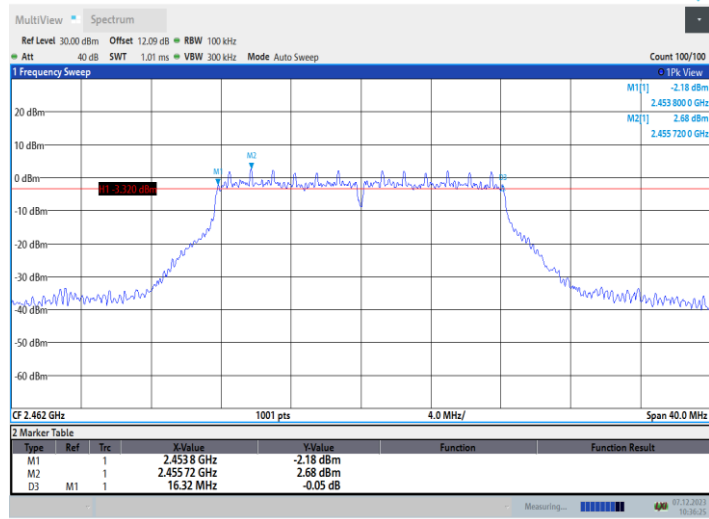


10:36:26 07.12.2023

11N20SISO\_Ant1\_2412

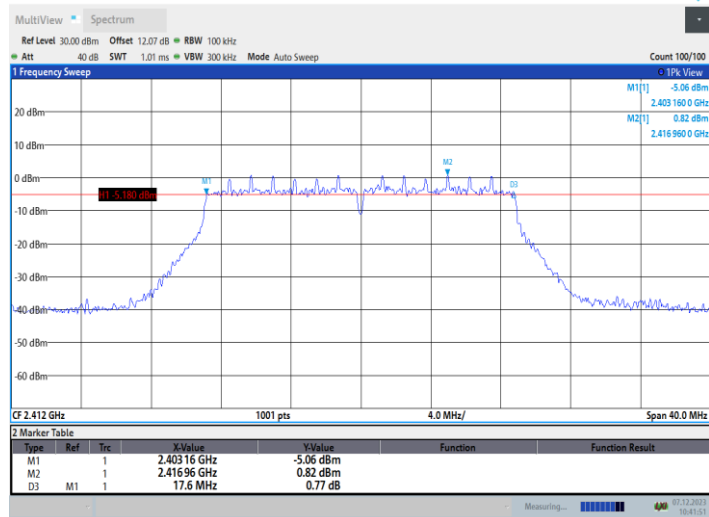


10:41:52 07.12.2023

11N20SISO\_Ant1\_2437

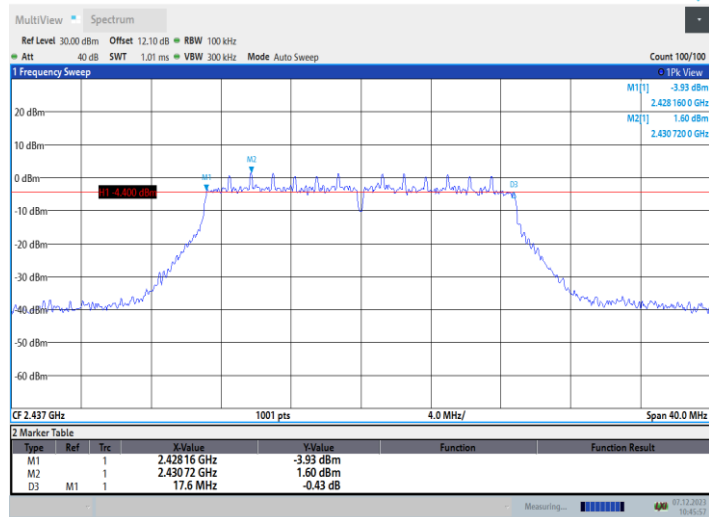


10:45:57 07.12.2023

11N20SISO\_Ant1\_2462

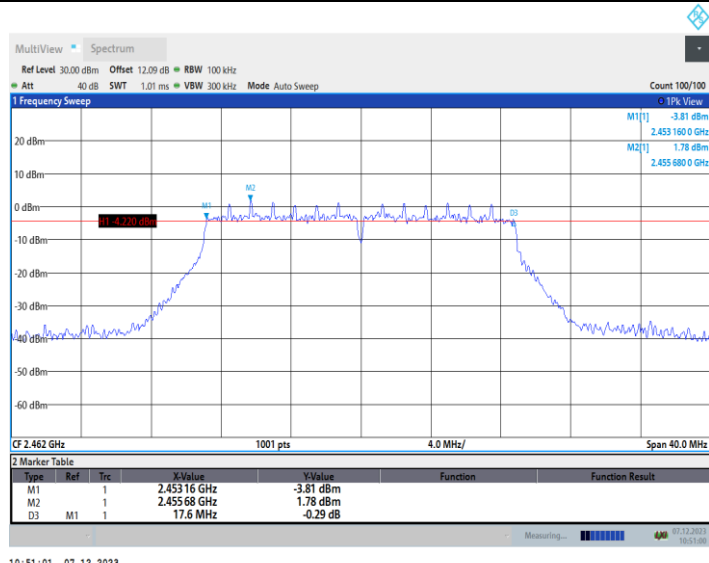


10:51:01 07.12.2023

11N40SISO\_Ant1\_2422

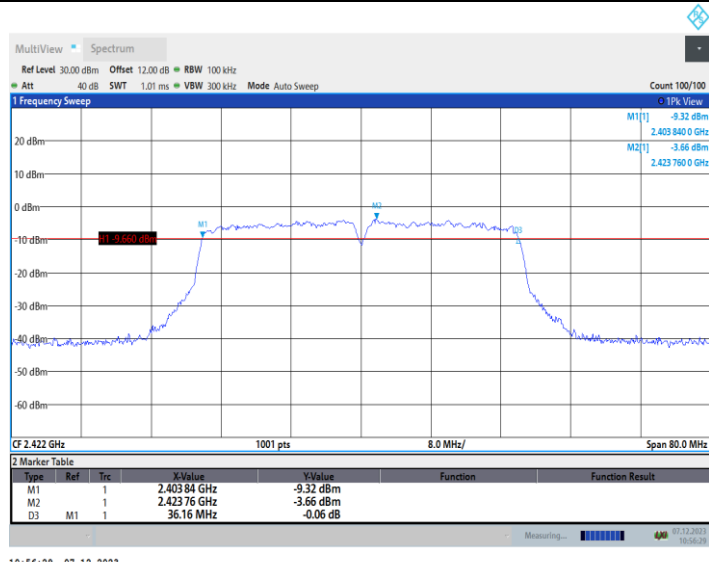


10:56:29 07.12.2023

11N40SISO\_Ant1\_2437

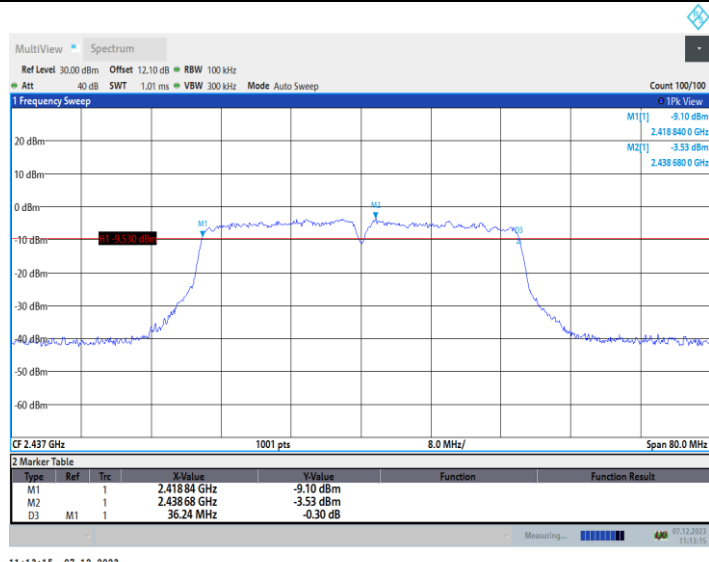

11:13:15 07.12.2023

11N40SISO\_Ant1\_2452

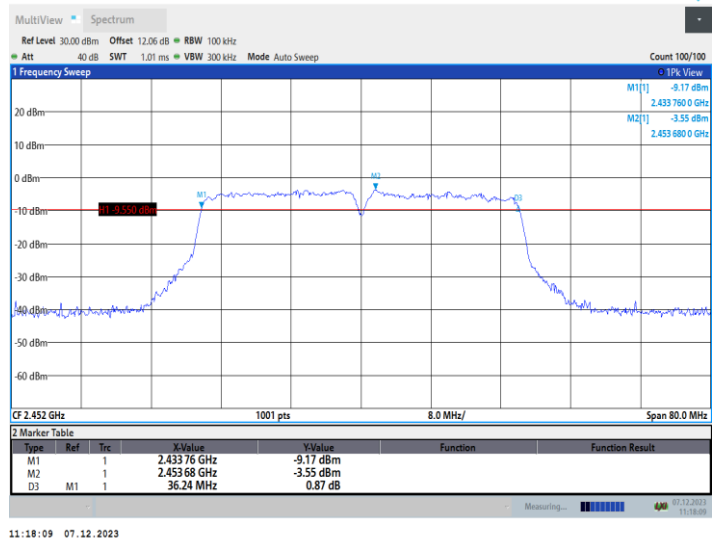

11:18:09 07.12.2023

## 7. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

### 7.1. LIMITS OF Maximum Conducted Output Power Measurement

CFR 47 (FCC) part 15.247 (b) (3)

### 7.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 11.9

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth:

DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set the span  $\geq [1.5 \times \text{DTS bandwidth}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.



### 7.3. TEST SETUP




### 7.4. TEST DATA


### Maximum Conducted Output Power

TestMode	Antenna	Frequency [MHz]	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	16.80	≤30.00	21.04	≤36.00	PASS
		2437	17.24	≤30.00	23.24	≤36.00	PASS
		2462	17.66	≤30.00	23.66	≤36.00	PASS
11G	Ant1	2412	21.01	≤30.00	27.01	≤36.00	PASS
		2437	21.16	≤30.00	27.16	≤36.00	PASS
		2462	21.55	≤30.00	27.55	≤36.00	PASS
11N20SISO	Ant1	2412	20.09	≤30.00	26.09	≤36.00	PASS
		2437	20.47	≤30.00	26.47	≤36.00	PASS
		2462	20.47	≤30.00	24.71	≤36.00	PASS
11N40SISO	Ant1	2422	19.60	≤30.00	25.60	≤36.00	PASS
		2437	19.82	≤30.00	25.82	≤36.00	PASS
		2452	19.70	≤30.00	25.70	≤36.00	PASS

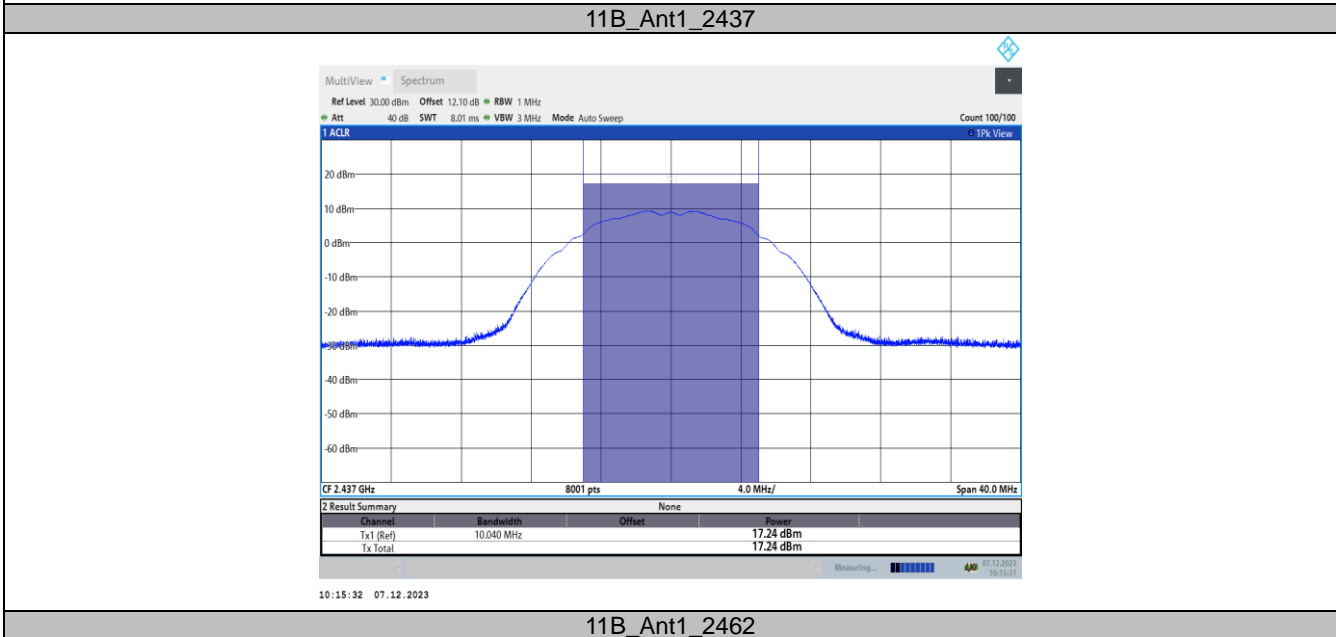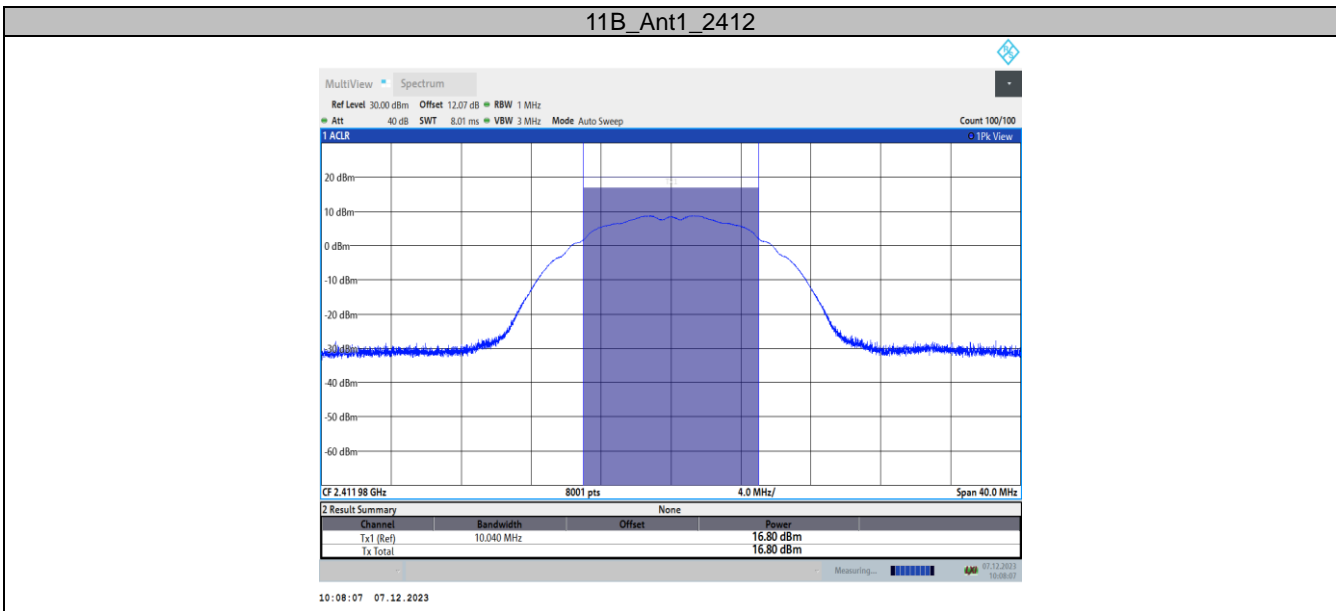


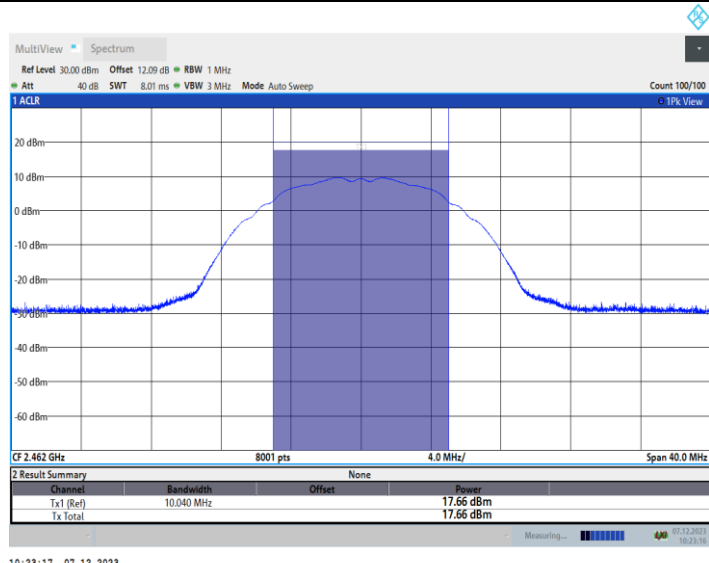


11G\_Ant1\_2412

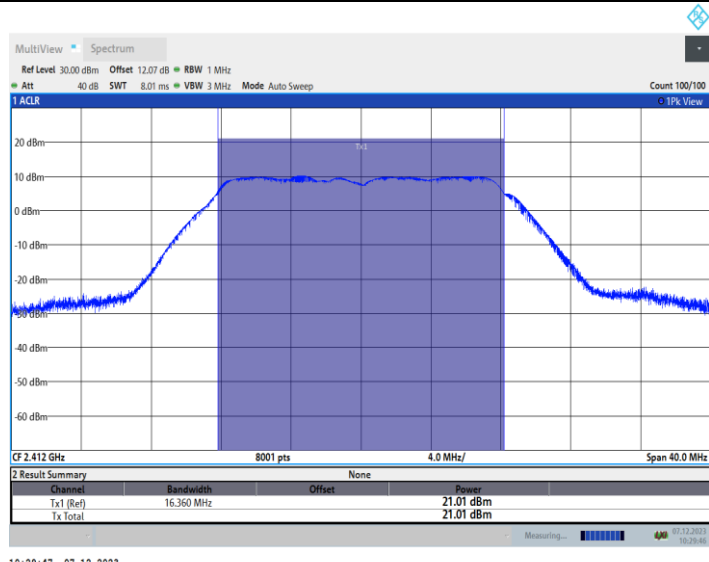


11G\_Ant1\_2437

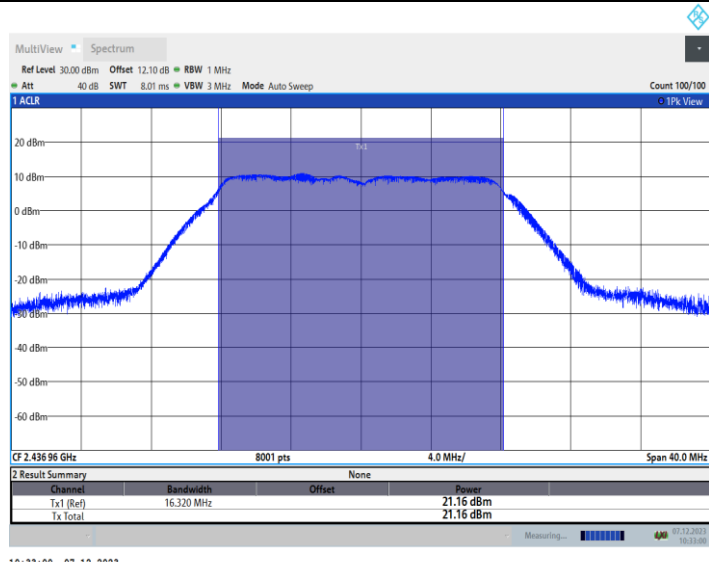


11G\_Ant1\_2462

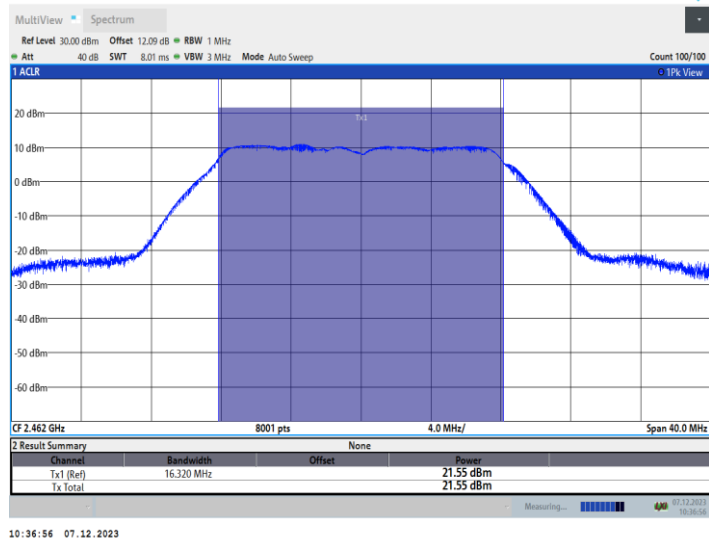

11N20SISO\_Ant1\_2412

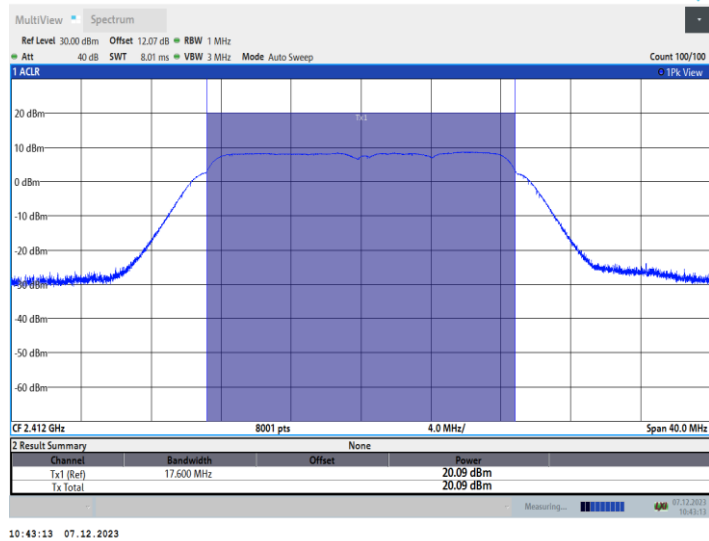


11N20SISO\_Ant1\_2437

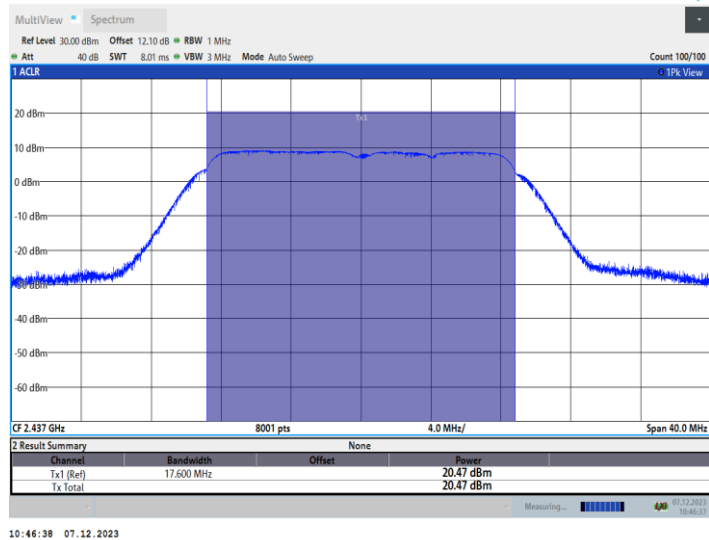


11N20SISO\_Ant1\_2462



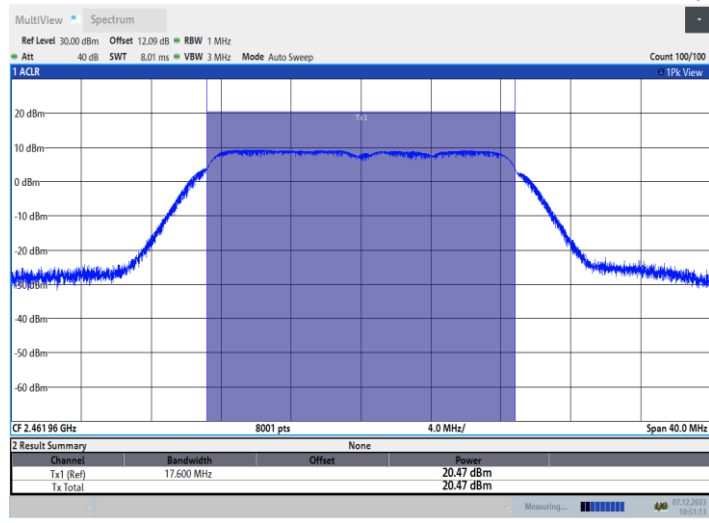


10:51:14 07.12.2023

11N40SISO\_Ant1\_2422

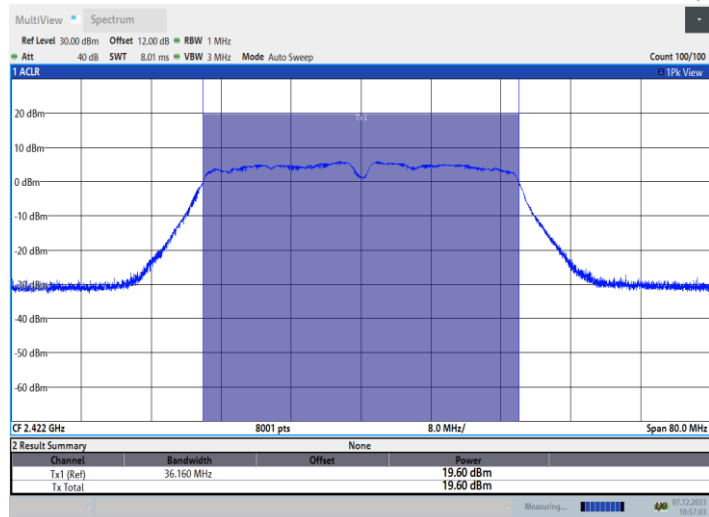


10:57:03 07.12.2023

11N40SISO\_Ant1\_2437

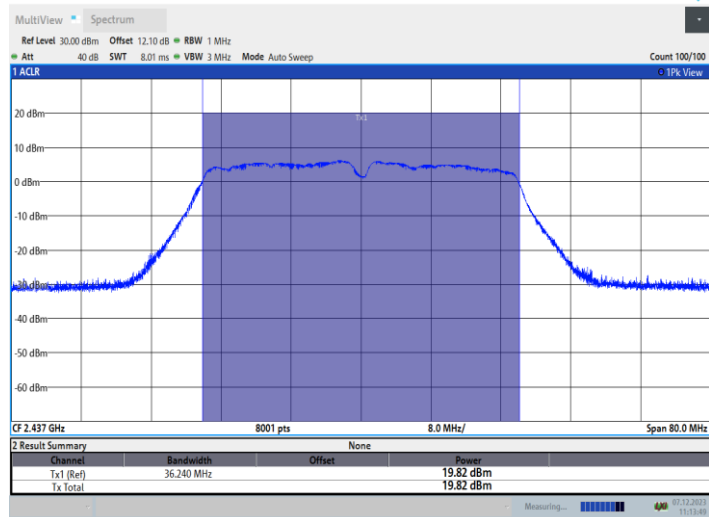

11:13:49 07.12.2023

11N40SISO\_Ant1\_2452

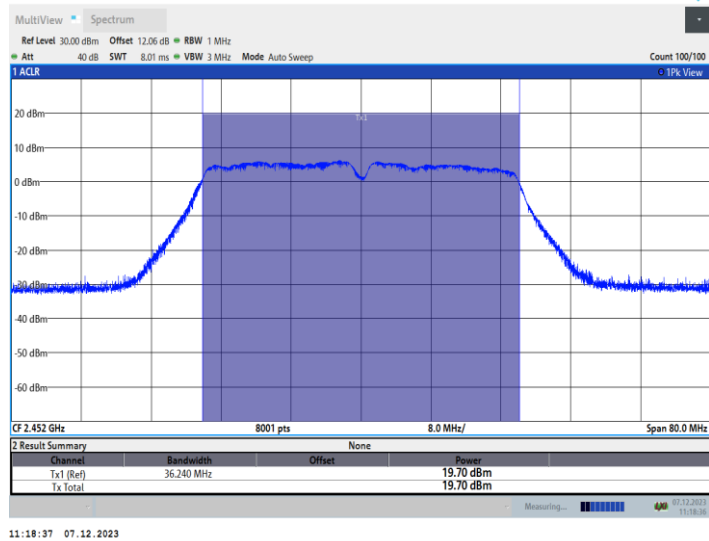

## 8. MAXIMUM POWER SPECTRAL DENSITY LEVEL MEASUREMENT

### 8.1. LIMITS OF Maximum Power Spectral Density Level Measurement

CFR 47 (FCC) part 15.247 (e)

### 8.2. TEST PROCEDURE

ANSI C63.10-2013 Clause 11.10

The transmitter output was connected to the spectrum analyzer.


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 8.3. TEST DATA


Maximum Power Spectral Density Level

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.97	$\leq 8.00$	PASS
		2437	-9.54	$\leq 8.00$	PASS
		2462	-9.15	$\leq 8.00$	PASS
11G	Ant1	2412	-12.97	$\leq 8.00$	PASS
		2437	-12.56	$\leq 8.00$	PASS
		2462	-12.18	$\leq 8.00$	PASS
11N20SISO	Ant1	2412	-13.4	$\leq 8.00$	PASS
		2437	-13.03	$\leq 8.00$	PASS
		2462	-12.79	$\leq 8.00$	PASS
11N40SISO	Ant1	2422	-15.1	$\leq 8.00$	PASS
		2437	-14.96	$\leq 8.00$	PASS
		2452	-14.98	$\leq 8.00$	PASS


11B\_Ant1\_2412

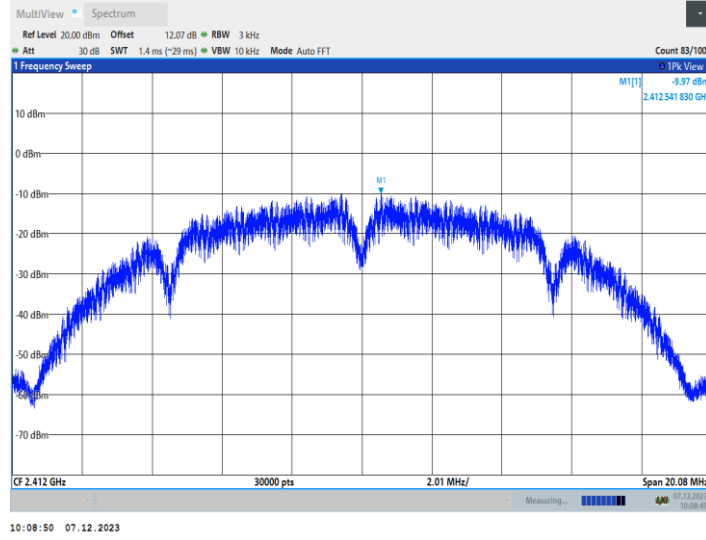


11B\_Ant1\_2437

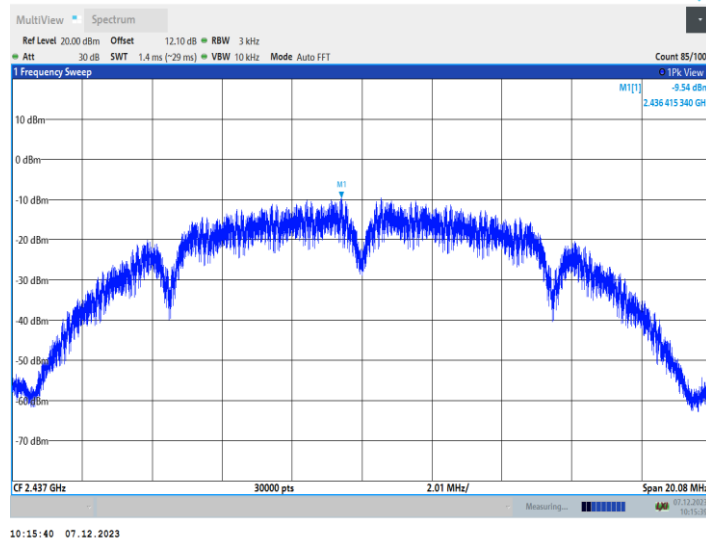


11B\_Ant1\_2462

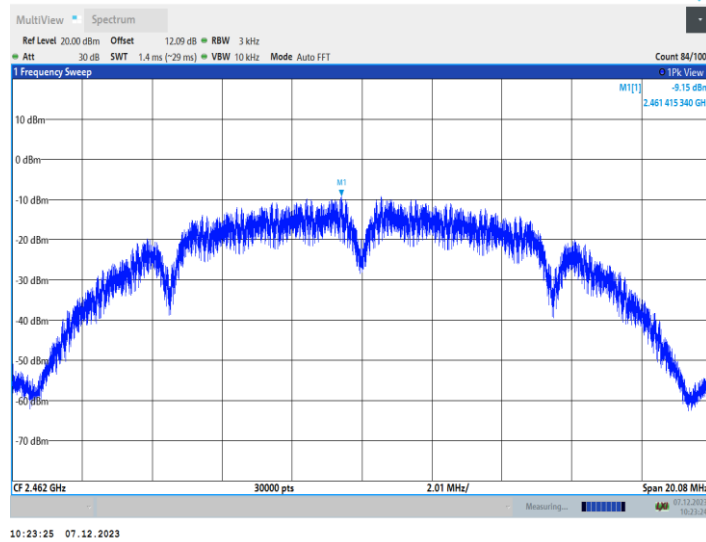


11G\_Ant1\_2412

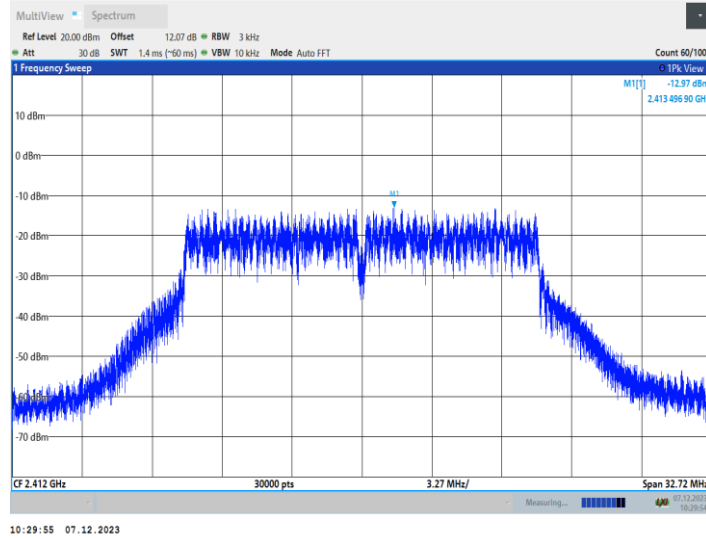


11G\_Ant1\_2437

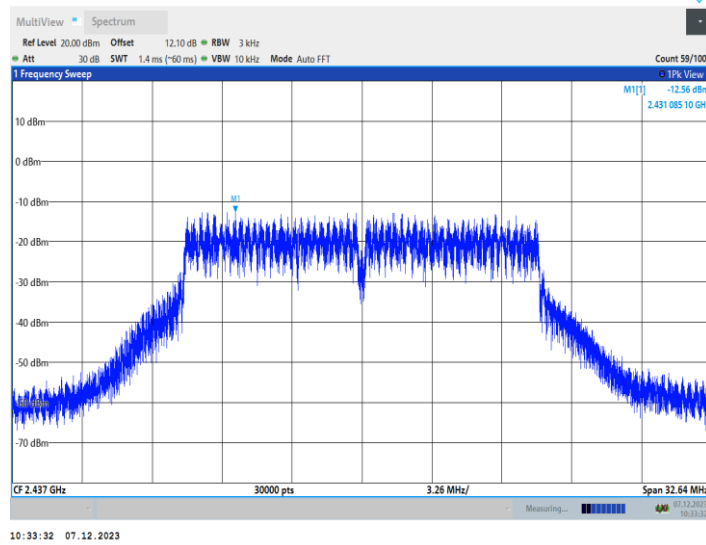


11G\_Ant1\_2462

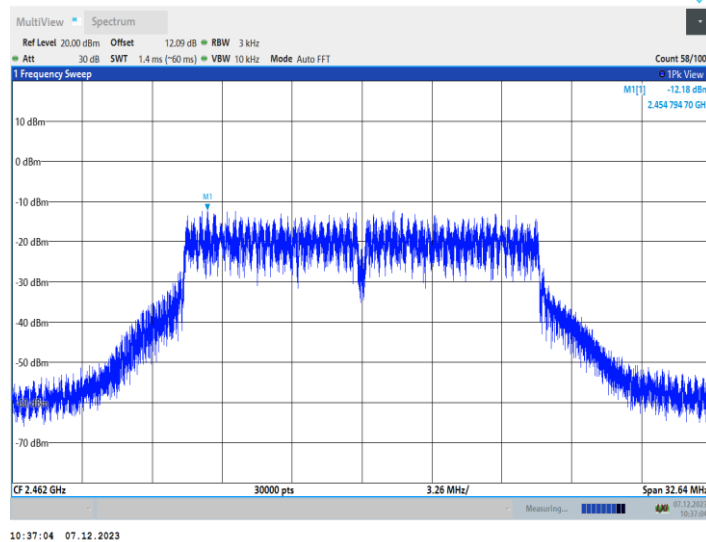


11N20SISO\_Ant1\_2412

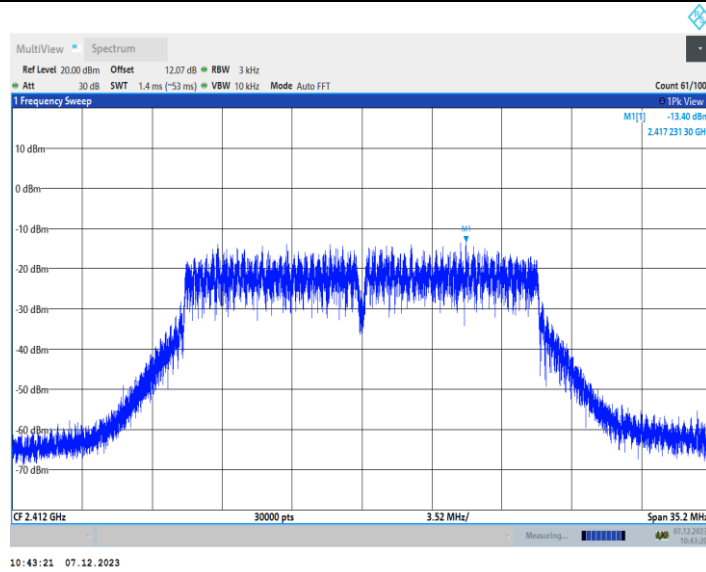


11N20SISO\_Ant1\_2437

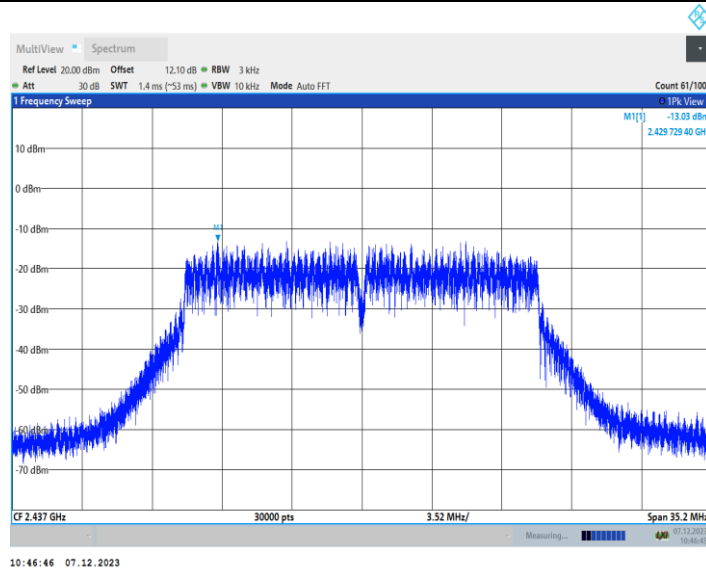


11N20SISO\_Ant1\_2462

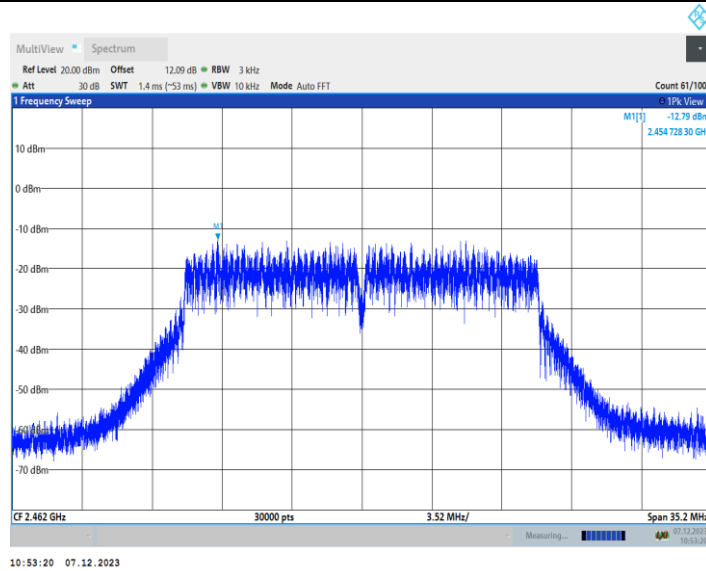


11N40SISO\_Ant1\_2422

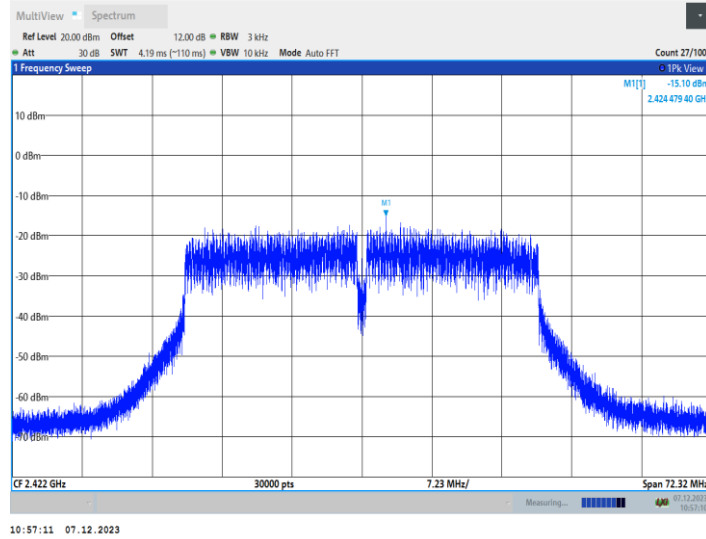

11N40SISO\_Ant1\_2437

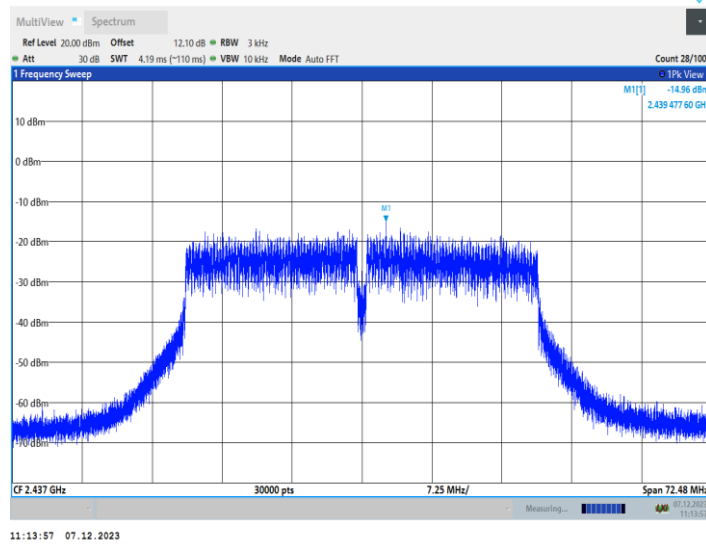

11N40SISO\_Ant1\_2452

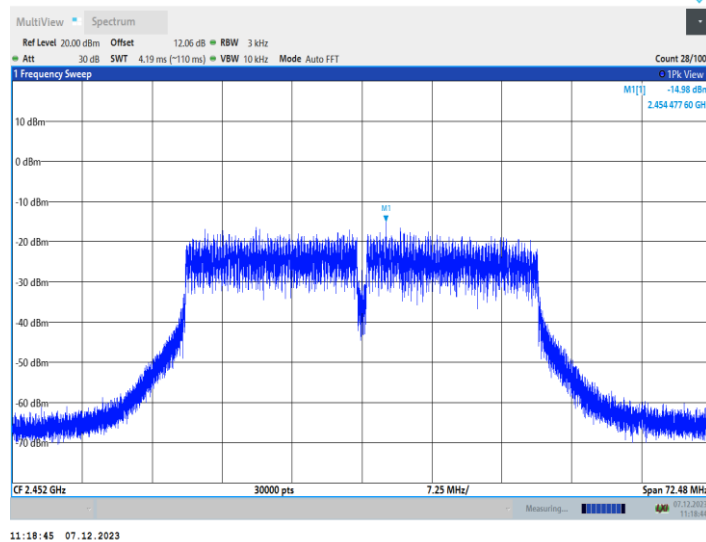

## 9. CONDUCTED BANDEGE AND SPURIOUS MEASUREMENT

### 9.1.LIMITS OF Conducted Bandedge and Spurious Measurement

CFR 47 (FCC) part 15.247 (d)

### 9.2.TEST PROCEDURE

ANSI C63.10-2013 Clause 11.11

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- a)Set instrument center frequency to DTS channel center frequency.
  - b)Set the span to  $\geq 1.5$  times the DTS bandwidth.
  - c)Set the RBW = 100 kHz.
  - d)Set the VBW  $\geq 3 \times$  RBW.
  - e)Detector = peak.
  - f)Sweep time = auto couple.
  - g)Trace mode = max hold.
  - h)Allow trace to fully stabilize.
  - i)Use the peak marker function to determine the maximum PSD level.
- Emission level measurement
- a)Set the center frequency and span to encompass frequency range to be measured.
  - b)Set the RBW = 100 kHz.
  - c)Set the VBW  $\geq 3 \times$  RBW.
  - d)Detector = peak.
  - e)Sweep time = auto couple.
  - f)Trace mode = max hold.
  - g)Allow trace to fully stabilize.
  - h)Use the peak marker function to determine the maximum amplitude level.

**Test Result : All emission outside of 2400-2483.5 are lower at least 20dB than fundamental frequency.**


### 9.3.TEST DATA


Conducted Bandedge and Spurious

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	0.53	0.53	---	PASS
			30~1000	0.53	-47.19	$\leq -19.47$	PASS
			1000~26500	0.53	-41.37	$\leq -19.47$	PASS
		2437	Reference	0.46	0.46	---	PASS
			30~1000	0.46	-47.23	$\leq -19.54$	PASS
			1000~26500	0.46	-41.96	$\leq -19.54$	PASS
		2462	Reference	-1.00	-1.00	---	PASS
			30~1000	-1.00	-47.21	$\leq -21$	PASS
			1000~26500	-1.00	-40.67	$\leq -21$	PASS
11G	Ant1	2412	Reference	-1.53	-1.53	---	PASS
			30~1000	-1.53	-46.76	$\leq -21.53$	PASS
			1000~26500	-1.53	-41.17	$\leq -21.53$	PASS
		2437	Reference	-1.80	-1.80	---	PASS
			30~1000	-1.80	-47.67	$\leq -21.8$	PASS




			1000~26500	-1.80	-41.24	$\leq -21.8$	PASS
		2462	Reference	-2.84	-2.84	---	PASS
			30~1000	-2.84	-47.69	$\leq -22.84$	PASS
			1000~26500	-2.84	-42.17	$\leq -22.84$	PASS
11N20SISO	Ant1	2412	Reference	-2.51	-2.51	---	PASS
			30~1000	-2.51	-46.92	$\leq -22.51$	PASS
			1000~26500	-2.51	-41.33	$\leq -22.51$	PASS
		2437	Reference	-2.65	-2.65	---	PASS
			30~1000	-2.65	-47.32	$\leq -22.65$	PASS
			1000~26500	-2.65	-41.2	$\leq -22.65$	PASS
		2462	Reference	-3.72	-3.72	---	PASS
			30~1000	-3.72	-47.2	$\leq -23.72$	PASS
			1000~26500	-3.72	-41.44	$\leq -23.72$	PASS
11N40SISO	Ant1	2422	Reference	-3.00	-3.00	---	PASS
			30~1000	-3.00	-46.89	$\leq -23$	PASS
			1000~26500	-3.00	-41.15	$\leq -23$	PASS
		2437	Reference	-2.69	-2.69	---	PASS
			30~1000	-2.69	-46.94	$\leq -22.69$	PASS
			1000~26500	-2.69	-41.56	$\leq -22.69$	PASS
		2452	Reference	-3.04	-3.04	---	PASS
			30~1000	-3.04	-47.26	$\leq -23.04$	PASS
			1000~26500	-3.04	-41.33	$\leq -23.04$	PASS

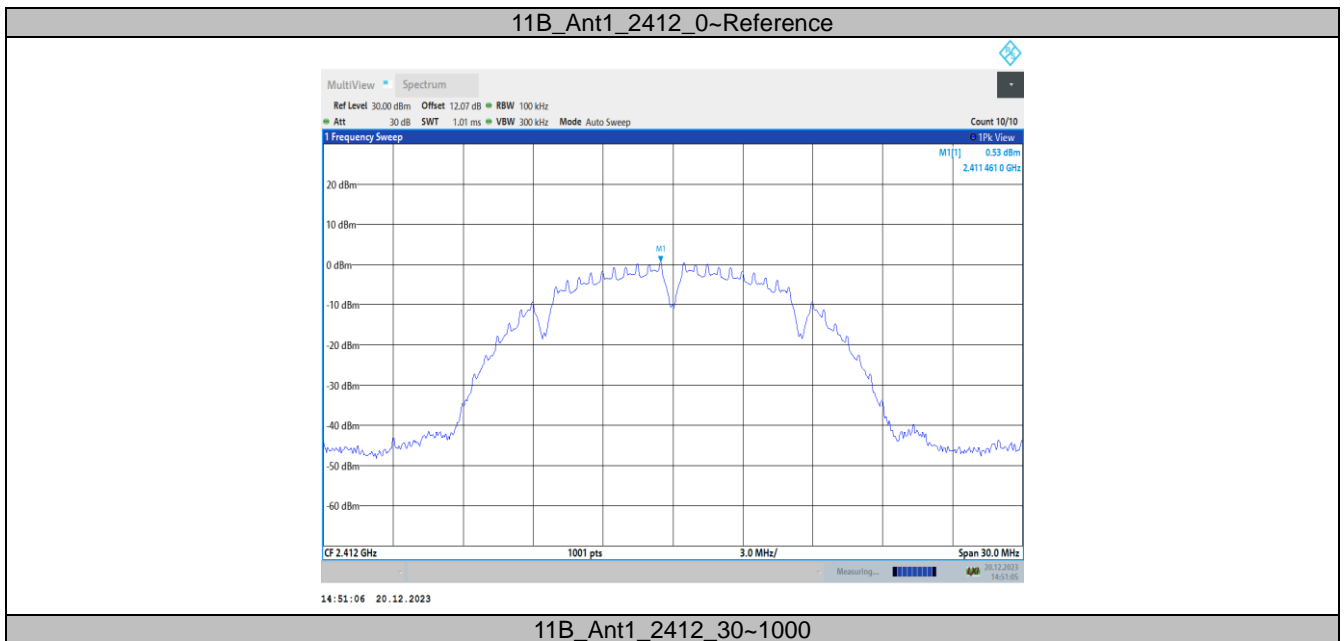


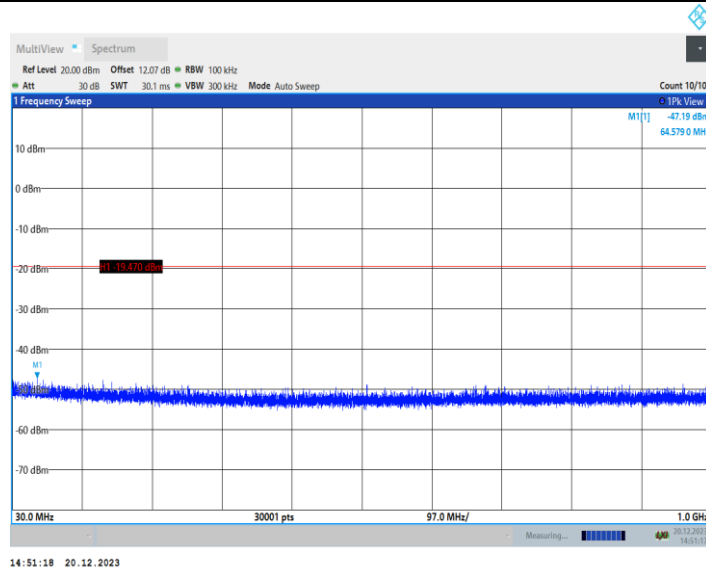


11B\_Ant1\_2412\_1000~26500

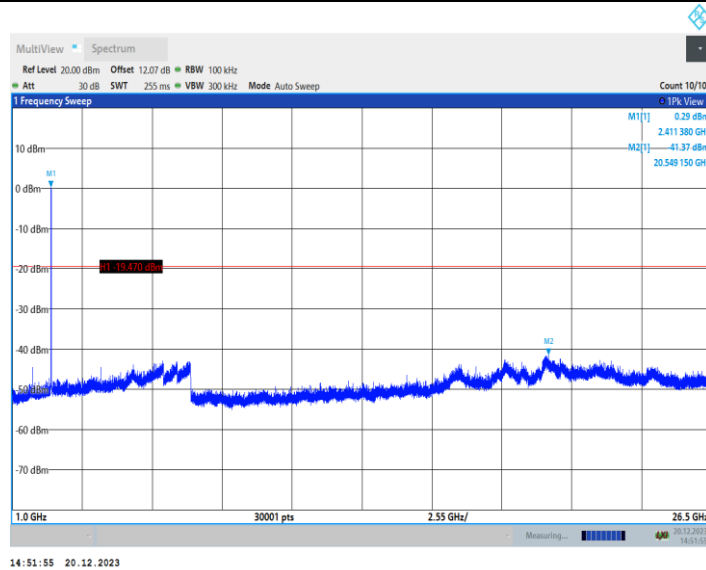


11B\_Ant1\_2437\_0~Reference

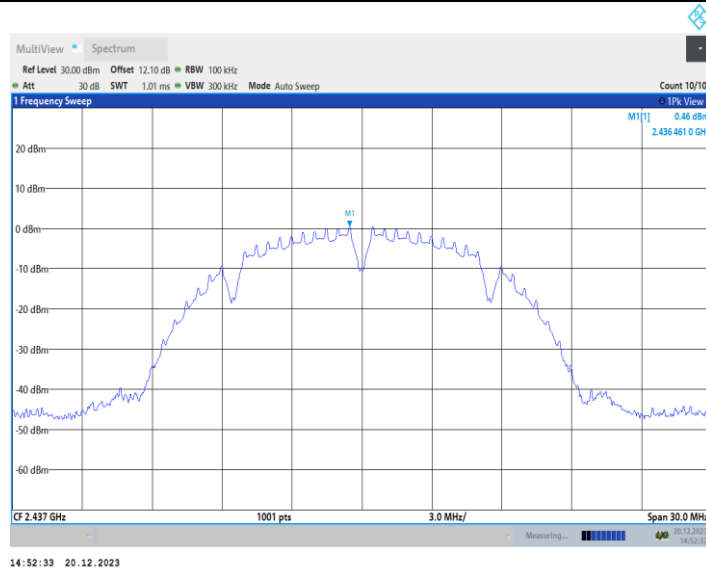


11B\_Ant1\_2437\_30~1000

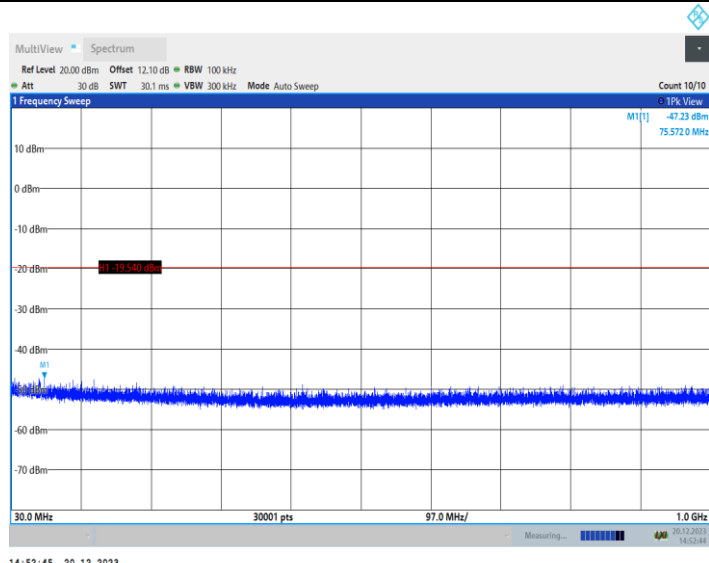


11B\_Ant1\_2437\_1000~26500

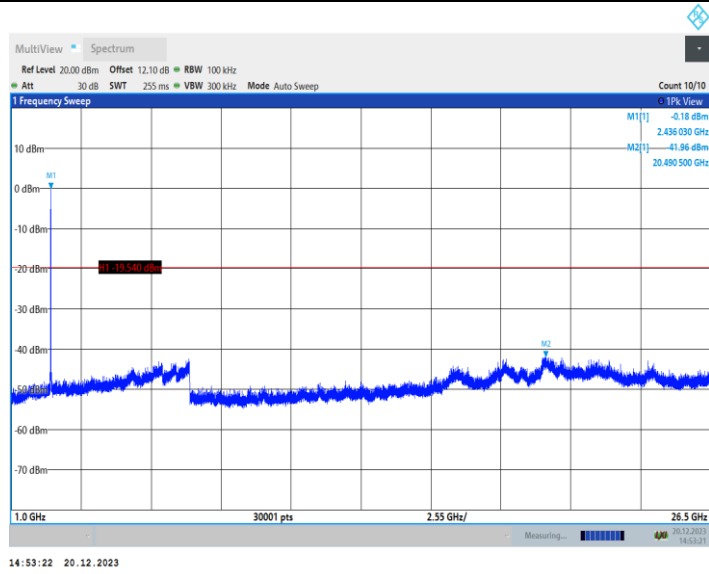


11B\_Ant1\_2462\_0~Reference

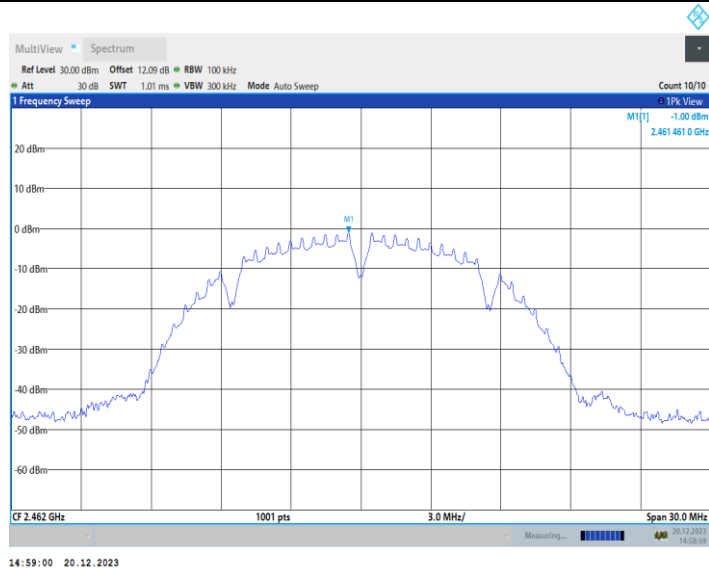


11B\_Ant1\_2462\_30~1000

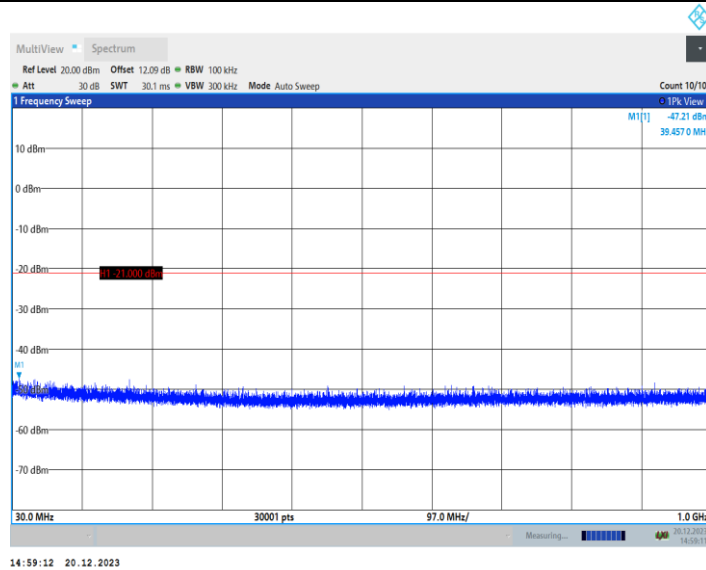


11B\_Ant1\_2462\_1000-26500

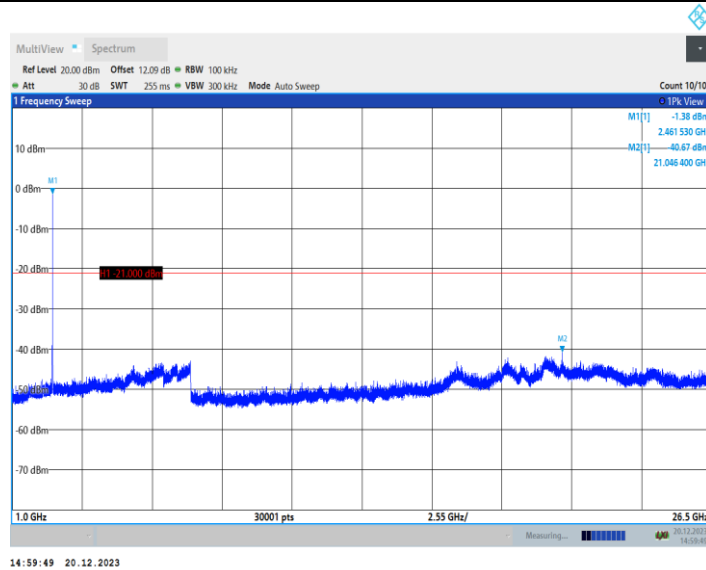


11G\_Ant1\_2412\_0-Reference

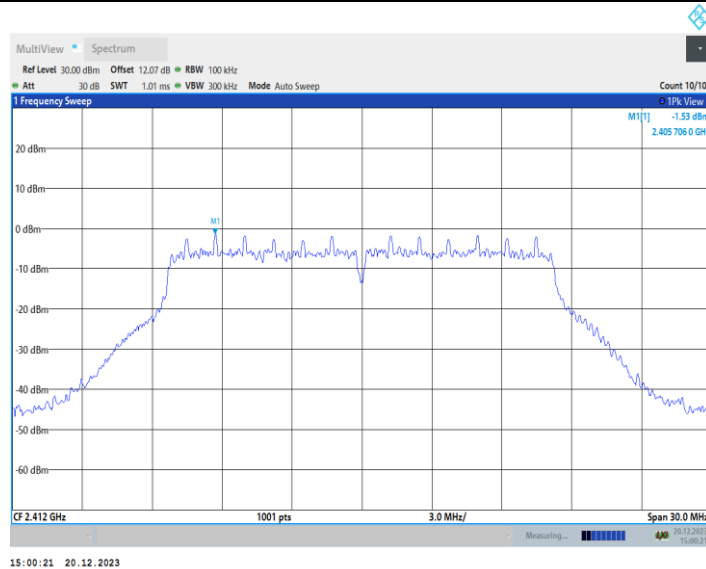


11G\_Ant1\_2412\_30-1000

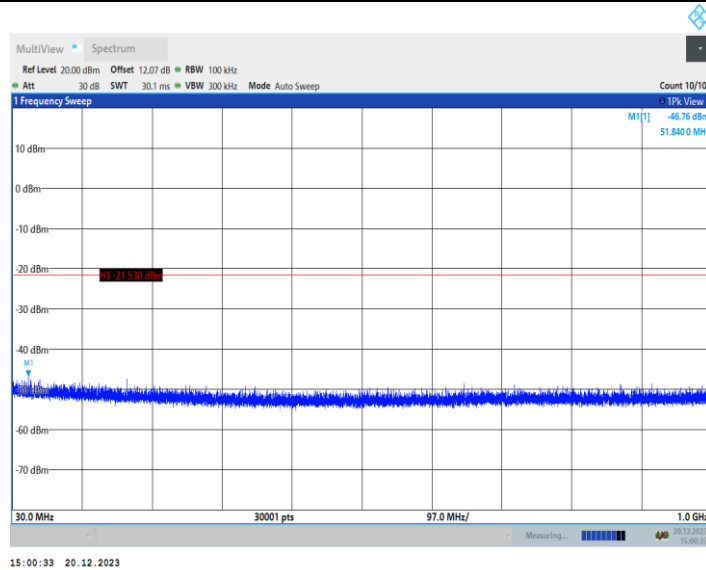


11G\_Ant1\_2412\_1000~26500

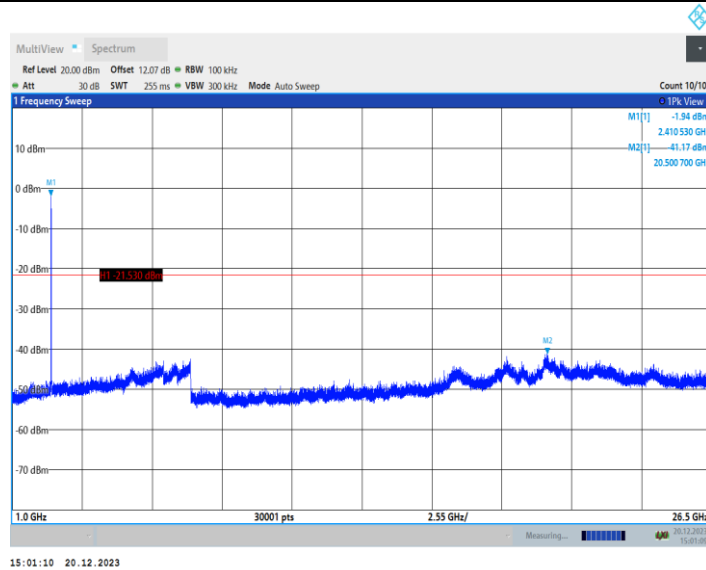


11G\_Ant1\_2437\_0~Reference

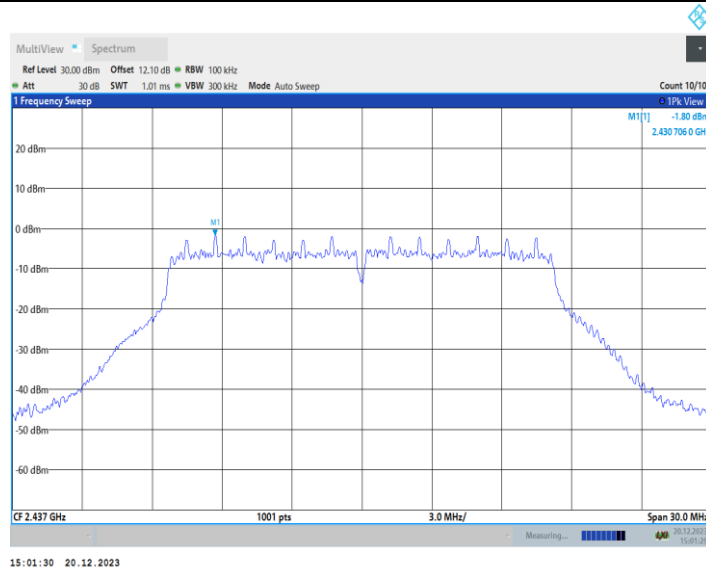


11G\_Ant1\_2437\_30~1000

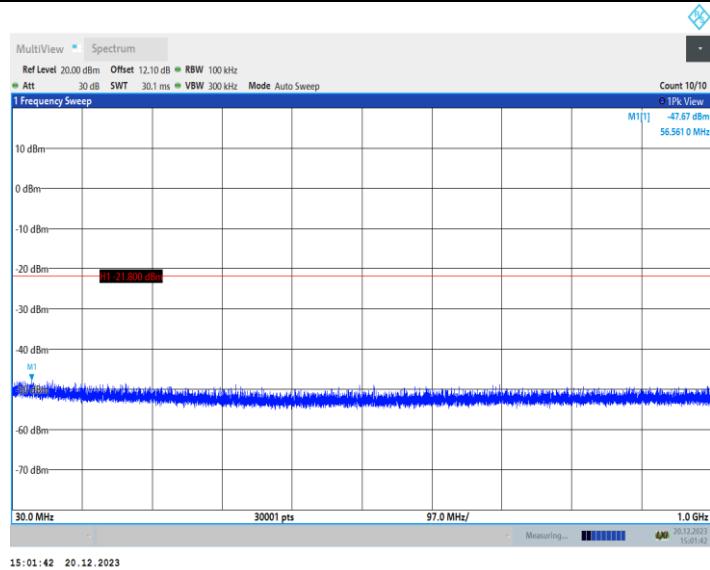


11G\_Ant1\_2437\_1000~26500

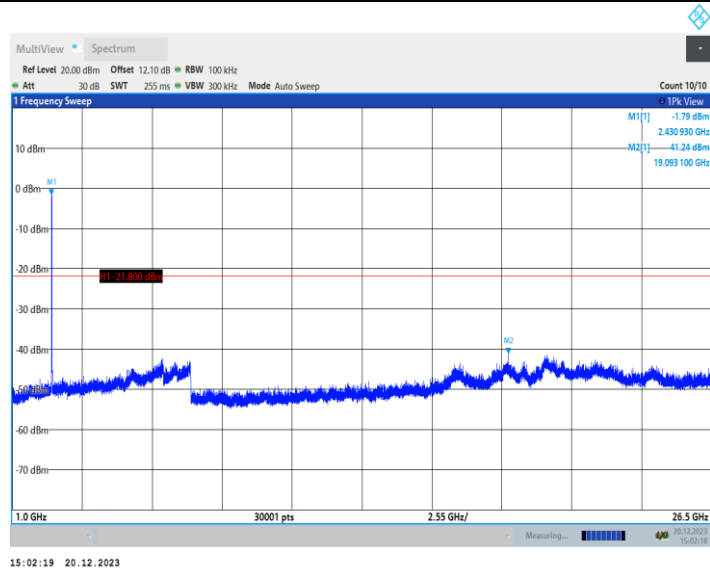


11G\_Ant1\_2462\_0~Reference

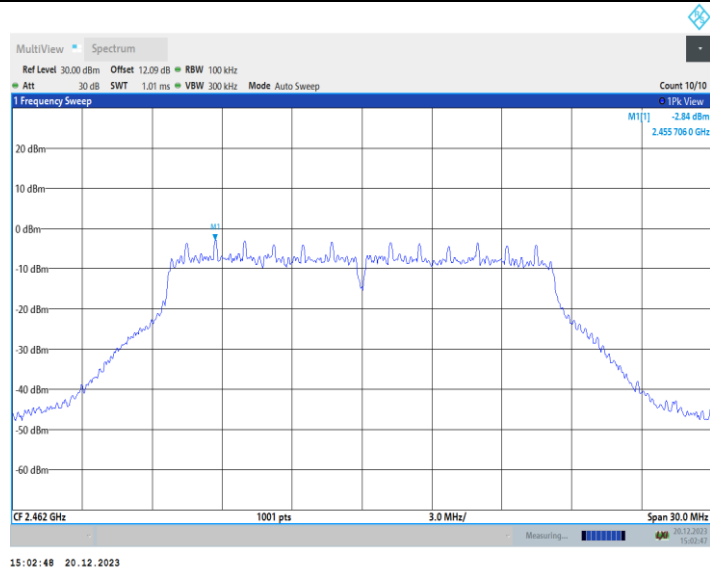


11G\_Ant1\_2462\_30~1000

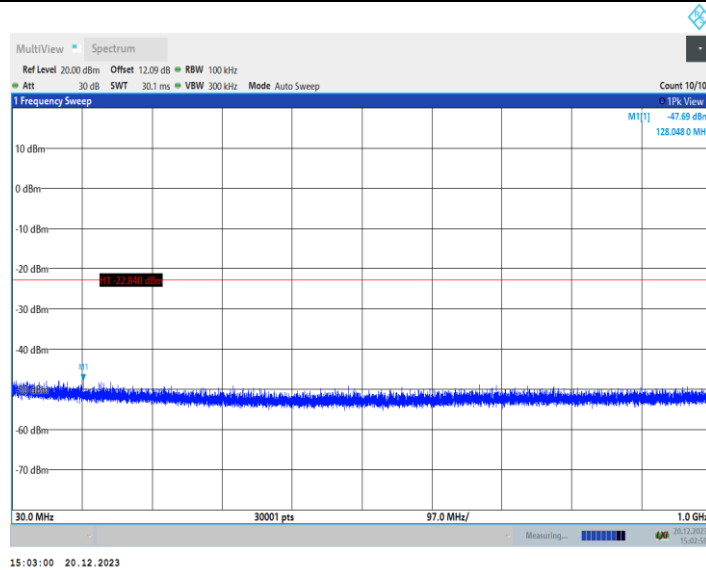


11G\_Ant1\_2462\_1000~26500

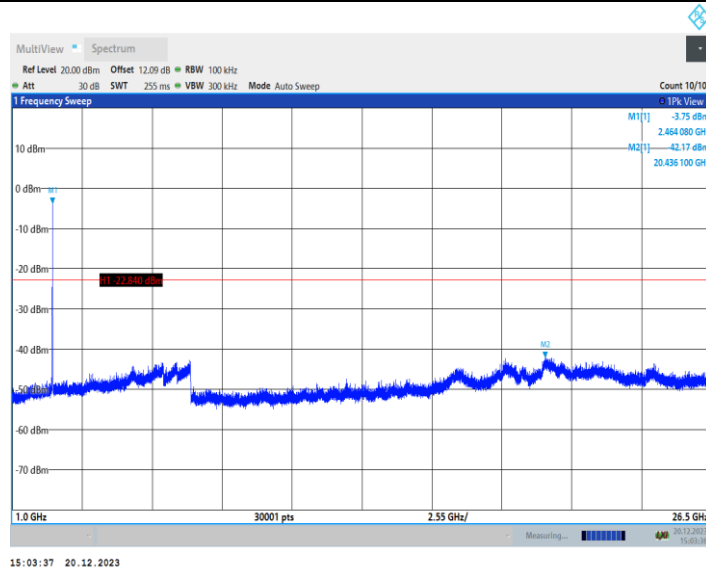


11N20SISO\_Ant1\_2412\_0~Reference

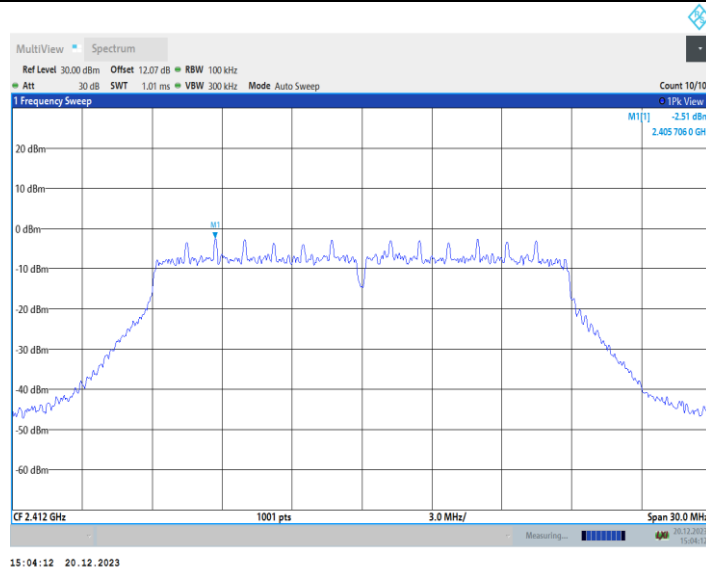


11N20SISO\_Ant1\_2412\_30~1000

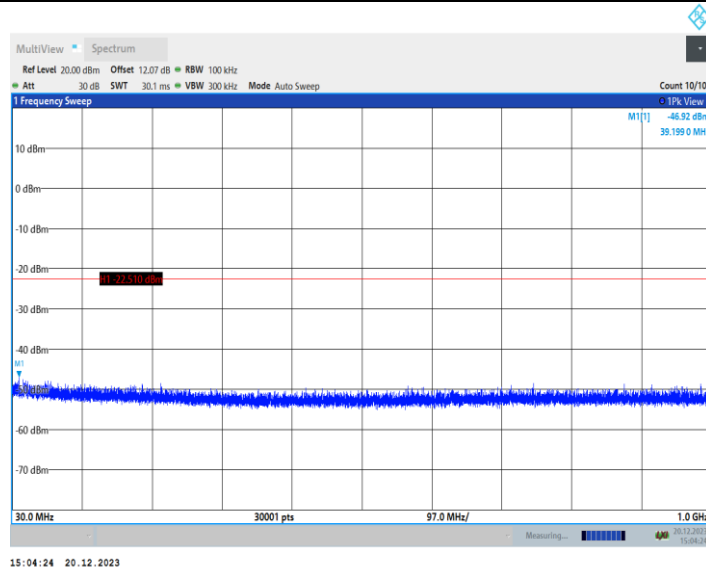

11N20SISO\_Ant1\_2412\_1000~26500

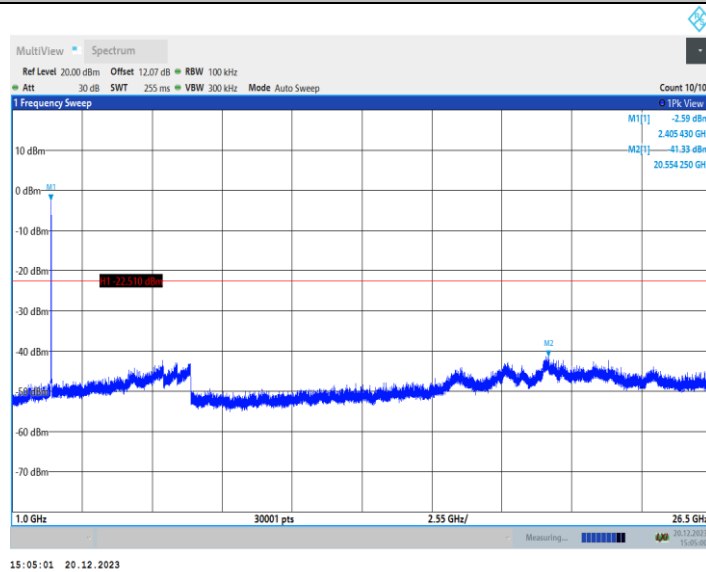


11N20SISO\_Ant1\_2437\_0~Reference

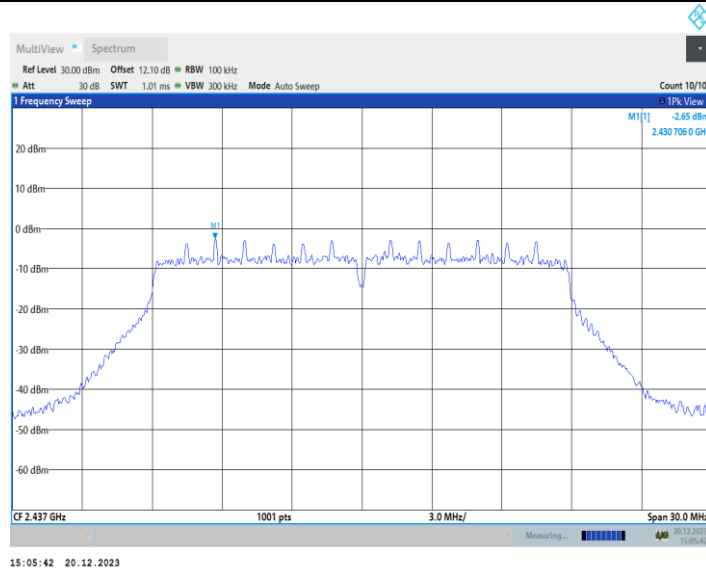


11N20SISO\_Ant1\_2437\_30~1000




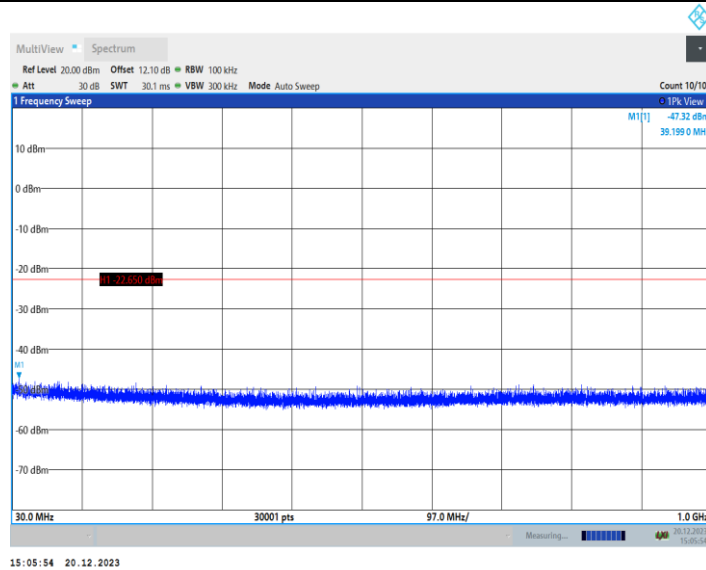


11N20SISO\_Ant1\_2437\_1000~26500

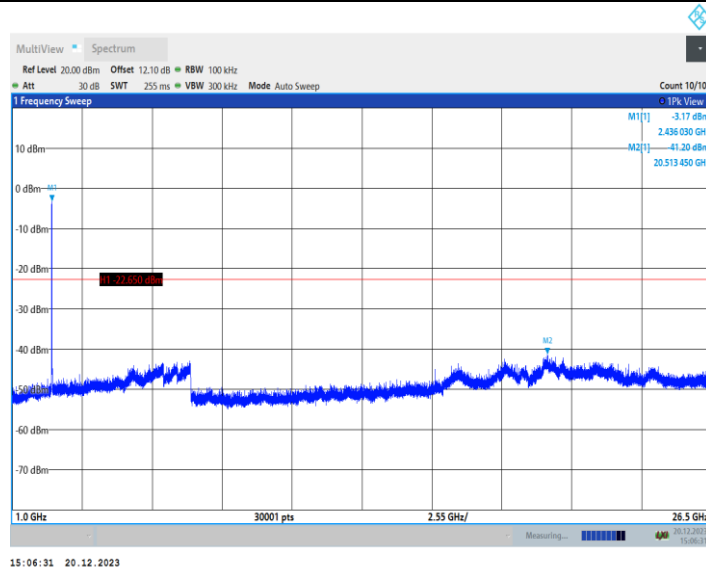


11N20SISO\_Ant1\_2462\_0~Reference

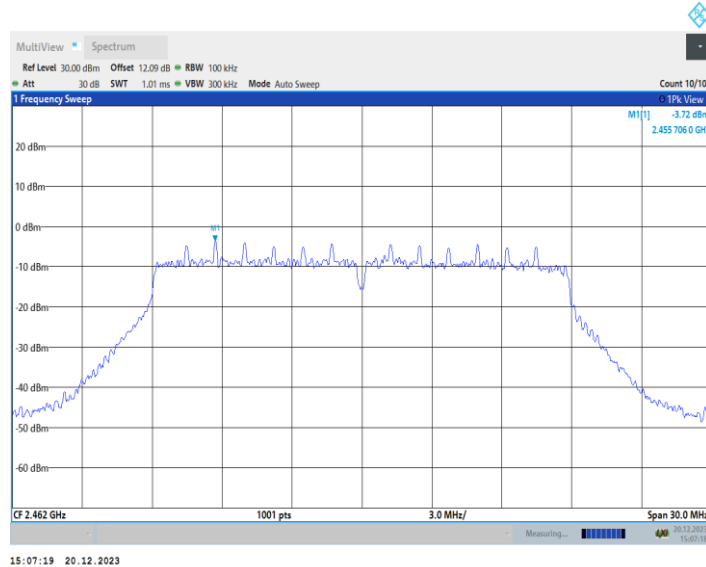


11N20SISO\_Ant1\_2462\_30~1000

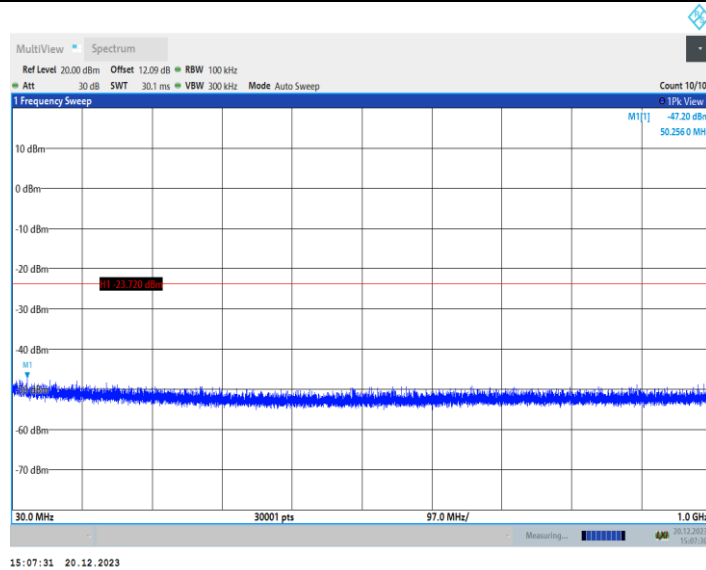


11N20SISO\_Ant1\_2462\_1000~26500

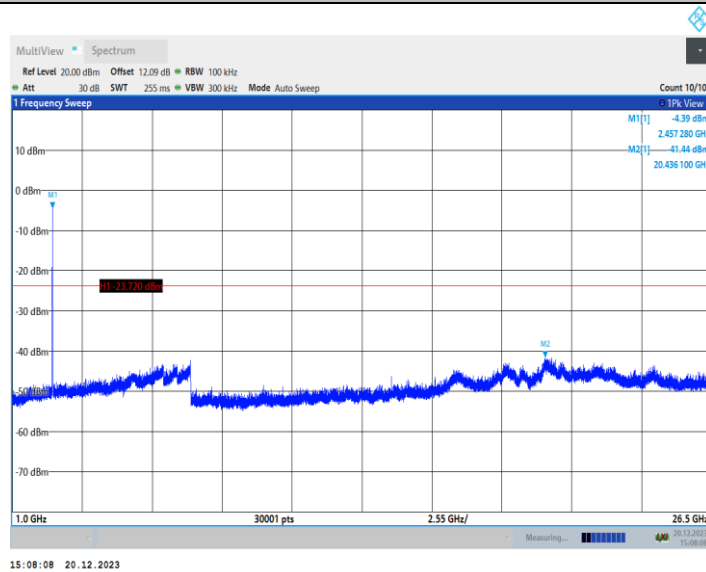


11N40SISO\_Ant1\_2422\_0~Reference

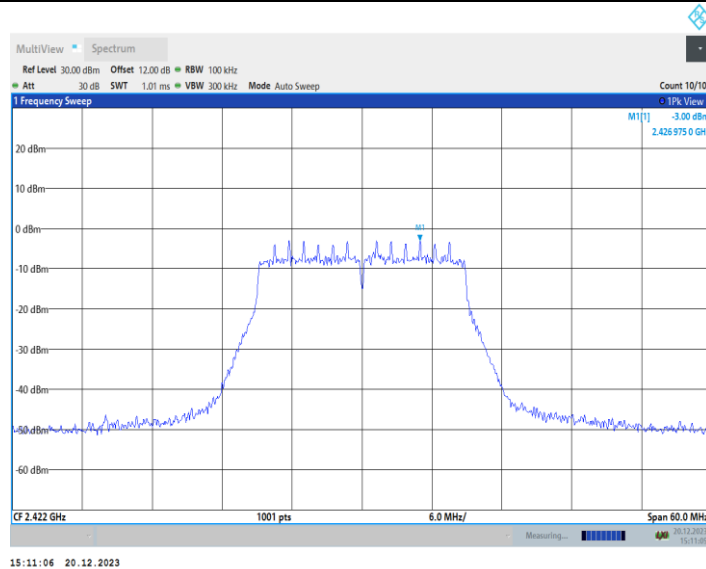


11N40SISO\_Ant1\_2422\_30~1000

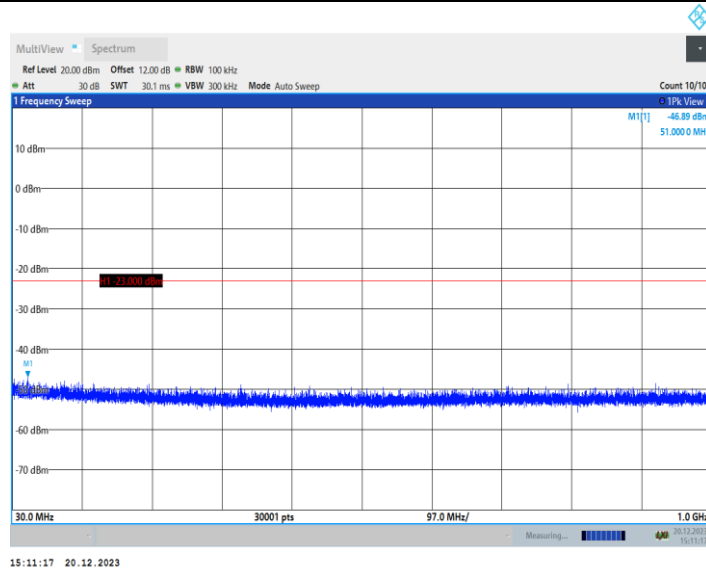


11N40SISO\_Ant1\_2422\_1000~26500

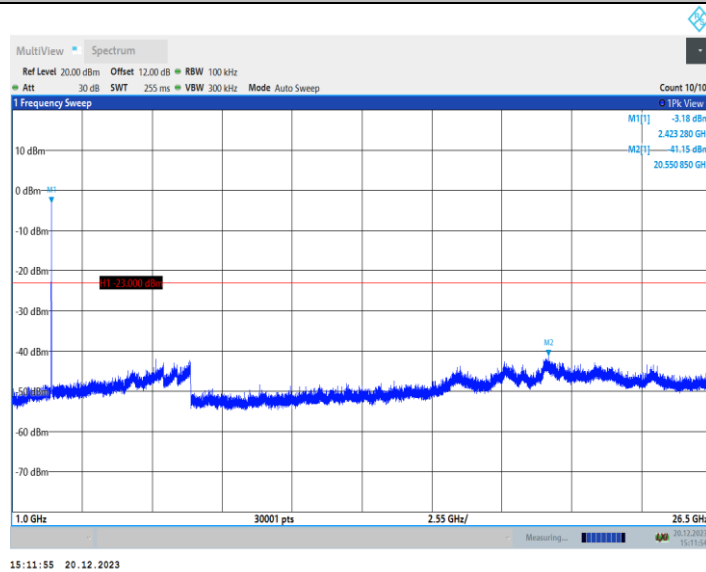


11N40SISO\_Ant1\_2437\_0~Reference

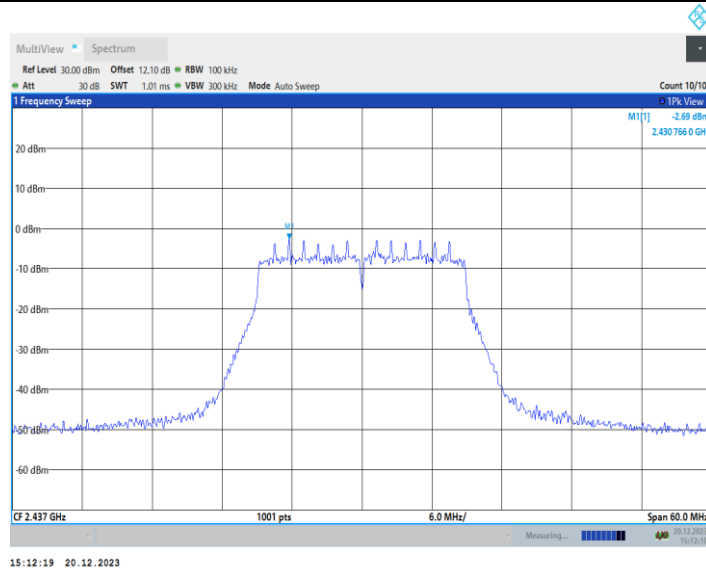


11N40SISO\_Ant1\_2437\_30~1000

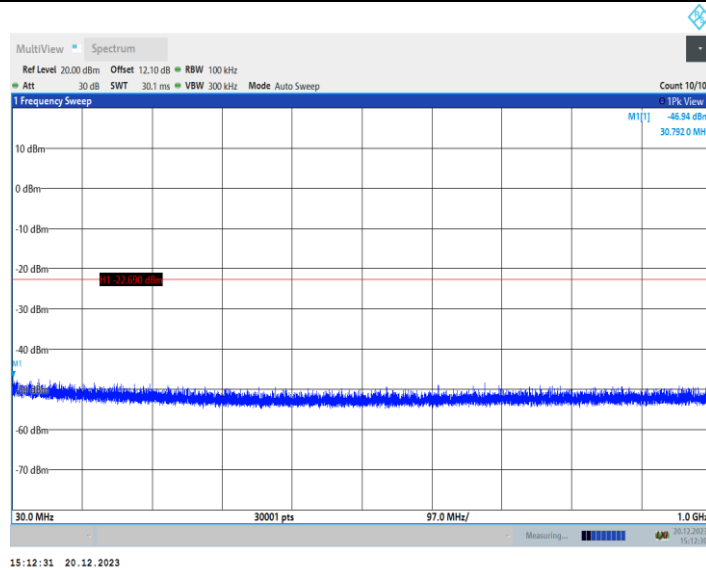


11N40SISO\_Ant1\_2437\_1000~26500

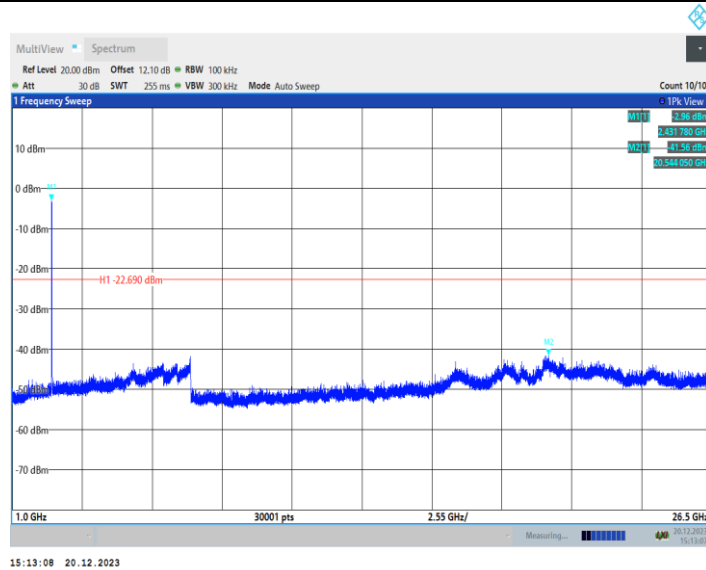


11N40SISO\_Ant1\_2452\_0~Reference

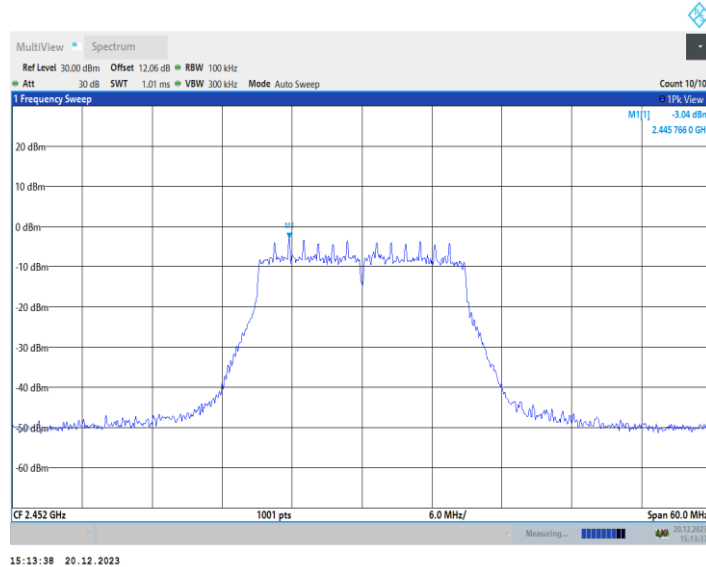

11N40SISO\_Ant1\_2452\_30~1000

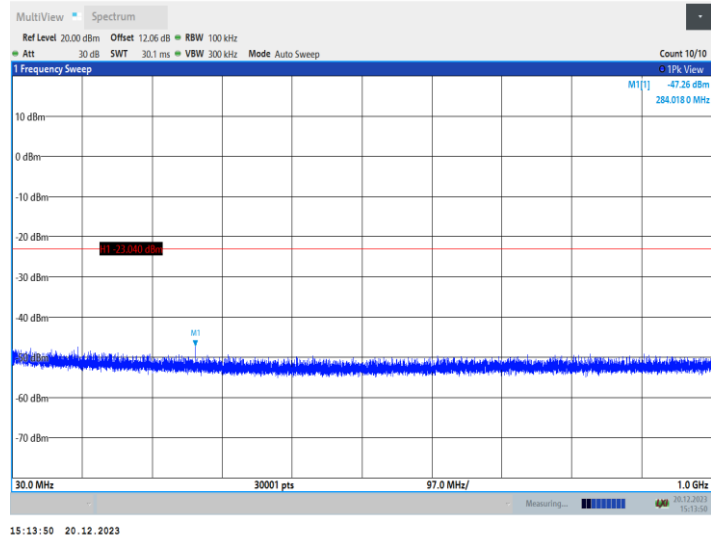


11N40SISO\_Ant1\_2452\_1000~26500

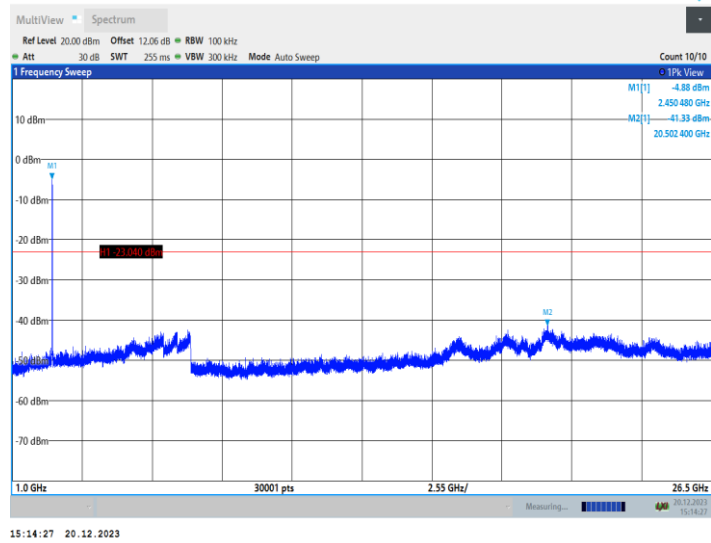

## Band Edge


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	0.53	-43.78	≤-19.47	PASS
		High	2462	-0.99	-47.84	≤-20.99	PASS
11G	Ant1	Low	2412	-1.48	-38.61	≤-21.48	PASS
		High	2462	-2.85	-47.65	≤-22.85	PASS
11N20SISO	Ant1	Low	2412	-2.48	-39.51	≤-22.48	PASS
		High	2462	-3.71	-47.34	≤-23.71	PASS
11N40SISO	Ant1	Low	2422	-2.93	-46.49	≤-22.93	PASS
		High	2452	-2.97	-48.51	≤-22.97	PASS

11B\_Ant1\_Low\_2412

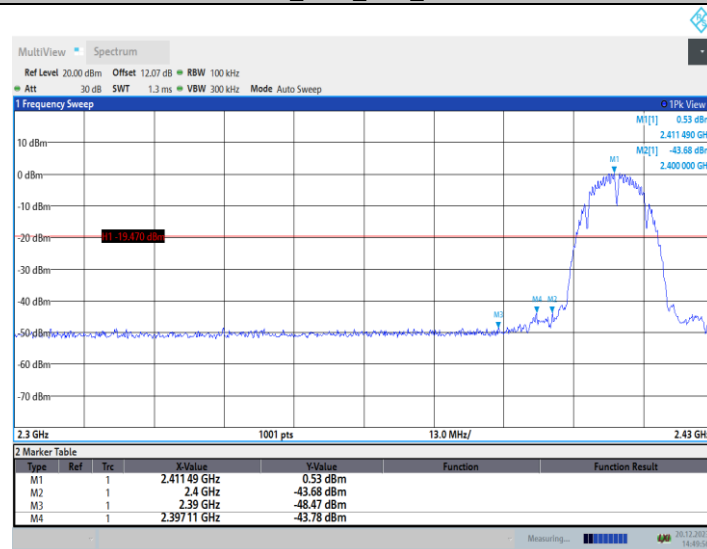

14:49:57 20.12.2023

11B\_Ant1\_High\_2462

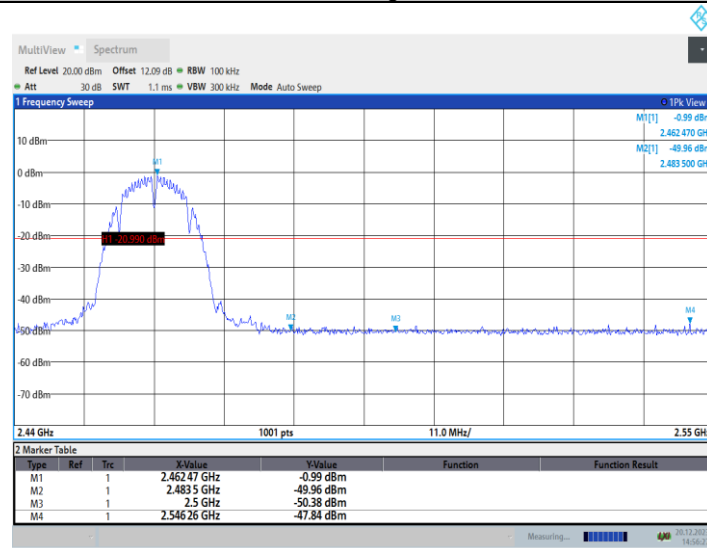


14:56:28 20.12.2023


11G\_Ant1\_Low\_2412



11G\_Ant1\_High\_2462

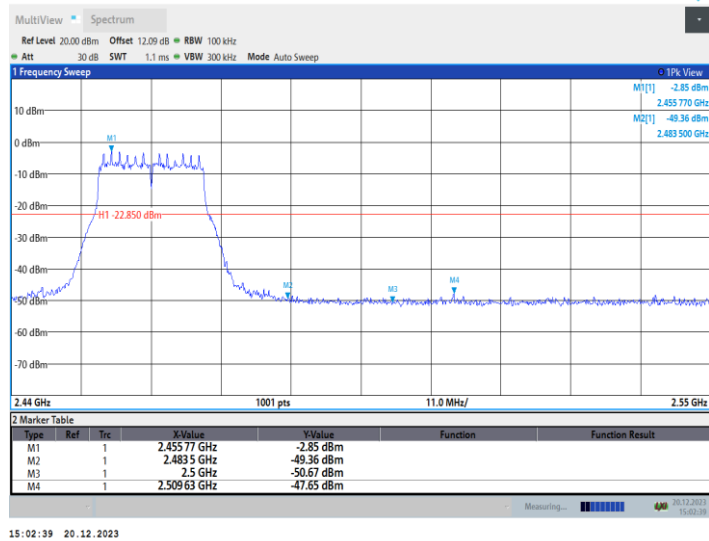

11N20SISO\_Ant1\_Low\_2412

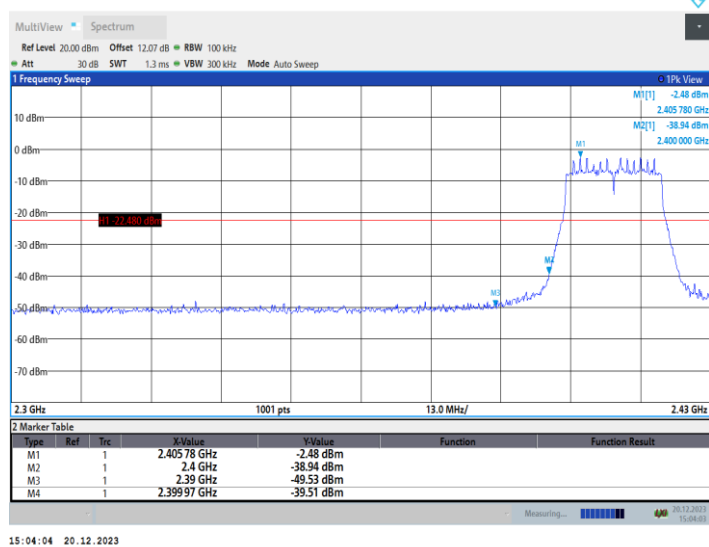

11N20SISO\_Ant1\_High\_2462