



HUNAN GIANTSUN POWER ELECTRONICS CO., LTD

Building 16 and 17, Taiwan Industrial Park, Chenzhou Nonferrous Metals Industrial Park, Hunan Province

TEL: 0735-2668666

FAX: 0735-2668000

Total 5 Page

Specification For Approval

An old (invalid) letter of admission	
GSP part number	
Version	
Date	

REV: _____

Case No.: _____

GSP Parts No.: 10801-0045

Model: A11 Single coil transmitting module

Components Spec.: A11 Single coil transmitting module

Manufacturer: Ju Yuan

Supplier: Ju Yuan

No. of Approved: _____

Date of Approved: _____

Issuing department (Cultural and administrative center)	Admission department				
	Supervisor approval	Audit			
Environmental ☐		Safety ☐	Electronic ☐	Organization ☐	
	Condition				
	Receipton ☐				
	Receipton ☐				
1. If there is any change, it must be contacted in advance and approved before the change; 2. The relevant units need to file and save, and see the inspection report before receiving the conditions; 3. If there are no special instructions, all internal and supplier acknowledgement numbers must be withdrawn when accepting the previous version.					

NO.: GSP-3GC-163-001 A/21



Change The Detail



part 1 of 5

[illegible]



Model Number:	A11 Single coil transmitting module	Customer P / N :	10801-0045
		Supplier P / N :	18.00540


— Appearance Size: (Unit:mm)

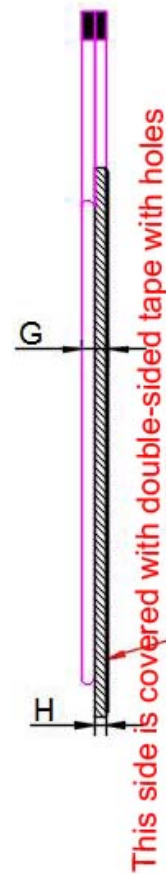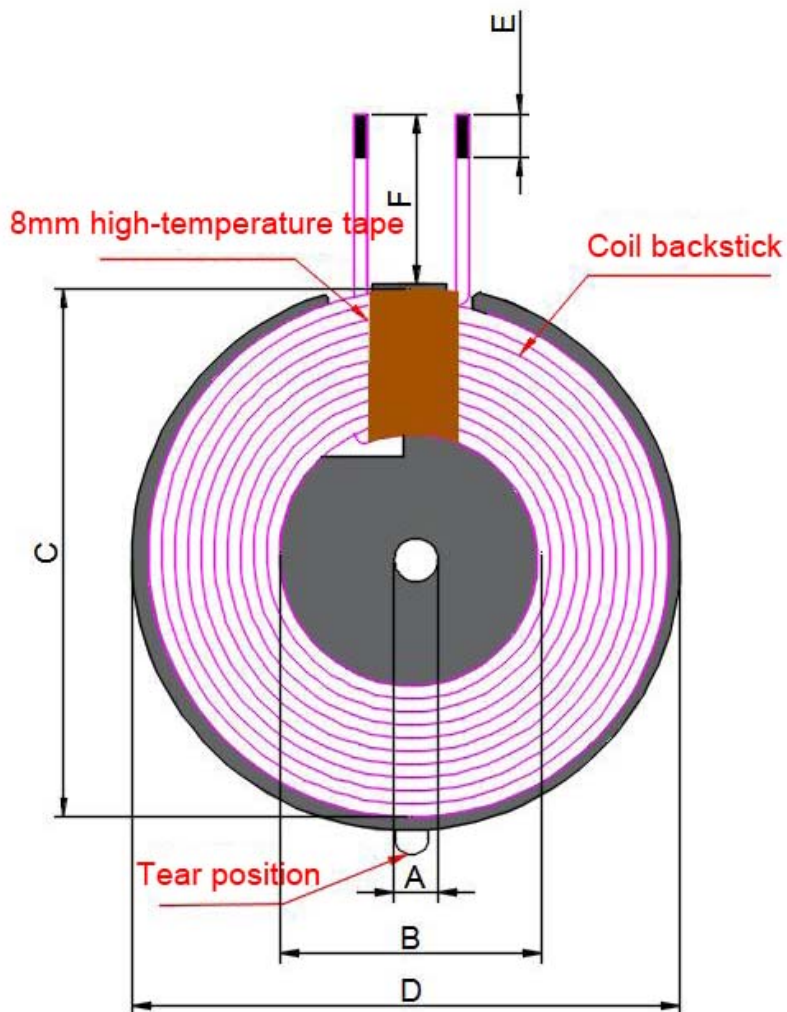

A	5.3±0.3
B	20.5±0.5
C	43MAX
D	44±1
E	3.5±1.5
F	10±2
G	2.6MAX Coating position
H	0.8±0.2
I	
J	
K	
L	
M	
N	
O	
P	
Q	
R	
S	
T	
U	
V	
W	
X	
Y	
Z	



二. Schematic Diagram:

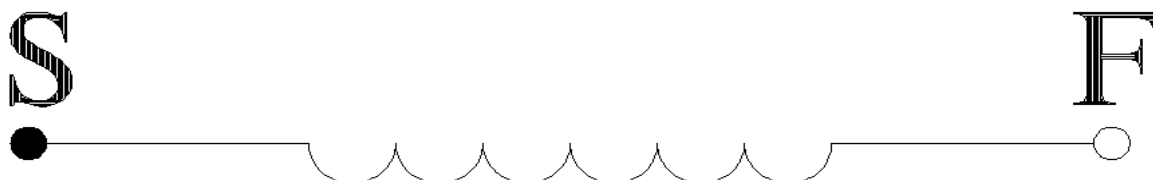

三. Winding Parameters:

Winding	Start	Finish	Turns	Line Diameter	Winding Way	Winding Direction	Layer&Circle
	S	F	10TS	0.08*105P	Single layer close wound	anticlockwise	1 层/10TS

四. Electrical Characteristics:

Item	Terminal	Test Conditions	Test Instrument	Parameter	Unit	Numerical Value
inductance	S-F	100KHz/1.00V/100Ω	1062 bridge	Inductance @100KHz/1V	μH	6.3μH±10%
resistance	S-F	100KHz/1.00V/100Ω	1062 bridge	RS@100KHz/1V	mΩ	60MAX
Q value	S-F	100KHz/1.00V/100Ω	1062 bridge	Q@100KHz/1V		70MIN






Encasement

The packing way

Version1.0.0

part 4 of 5

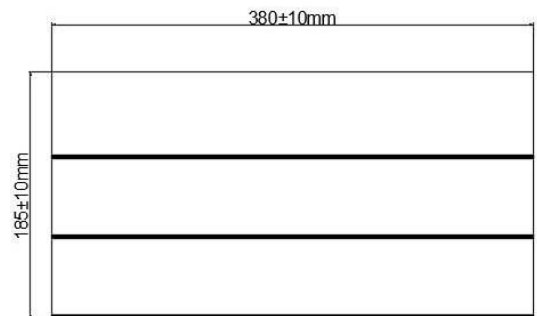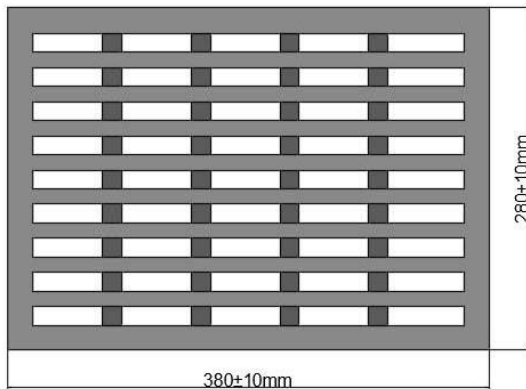

Each box is packed with 3 layers of pearl cotton, separated directly by cardboard

Pearl cotton size is

Each pearl cotton 45 boxes, each box containing 6pcs, a total of 270pcs products



- 1、 Each layer of pearl cotton can hold 270pcs of products;
- 2、 Each box can hold 3 layers of pearl cotton, can hold 810 products

Product	Single layer quantity	Layer/Box	Total/Box	Weigh
A11-G44	270pcs	3 layer	810pcs	

Material List				
Customer P / N		10801-0045	Supplier P / N	18.00540
No.	Material Name	Material Specification	Material Code	Manufacturer
1	Self-adhesive silk-covered wire	0.08*105P	01.00139	
2	Lead-free tin strip	high-temperature	05.00058	
3	Glue	resin adhesive	05.00001	
4	High-temperature tape	w i d t h 8mm	05.00023	
5	Double slot hard disk with holes	G44*5.3*0.8mm	02.00003	
6	Double-side tape	43*5*0.08mm	05.00020	
7	Paperboard	378*270mm	04.00020	
8	Packing box	390*280*47mm	04.00029	
9	Carton	400*300*190mm	04.00008	
10				
11				
12				
13				
14				