




VSWR(S11) parameter:

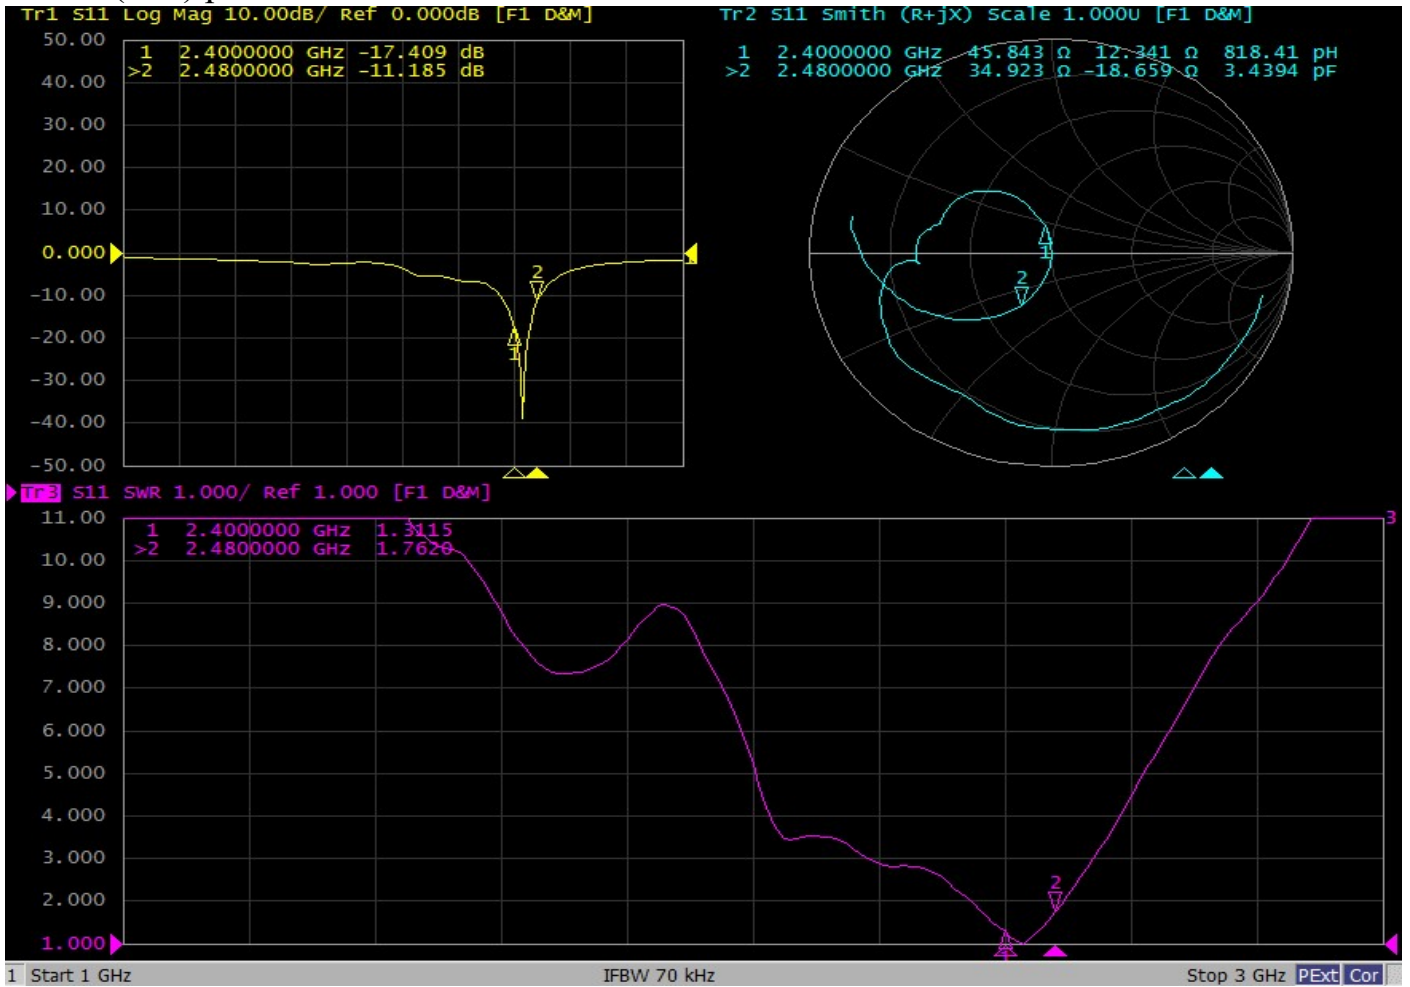


Efficiency:

2400-2480 MHz			
Frequency (MHz)	Efficiency	Efficiency (dB)	Gain (dBi)
2400	48.7%	-3.1	2.9
2410	49.2%	-3.1	2.9
2420	49.7%	-3.0	3.1
2430	47.8%	-3.2	2.8
2440	45.5%	-3.4	2.6
2450	45.5%	-3.4	2.7
2460	43.0%	-3.7	2.5
2470	44.4%	-3.5	2.5
2480	45.1%	-3.5	2.5
Average value	46.55%	-3.33	2.73




Antenna radiation pattern:

Theta=90.00deg

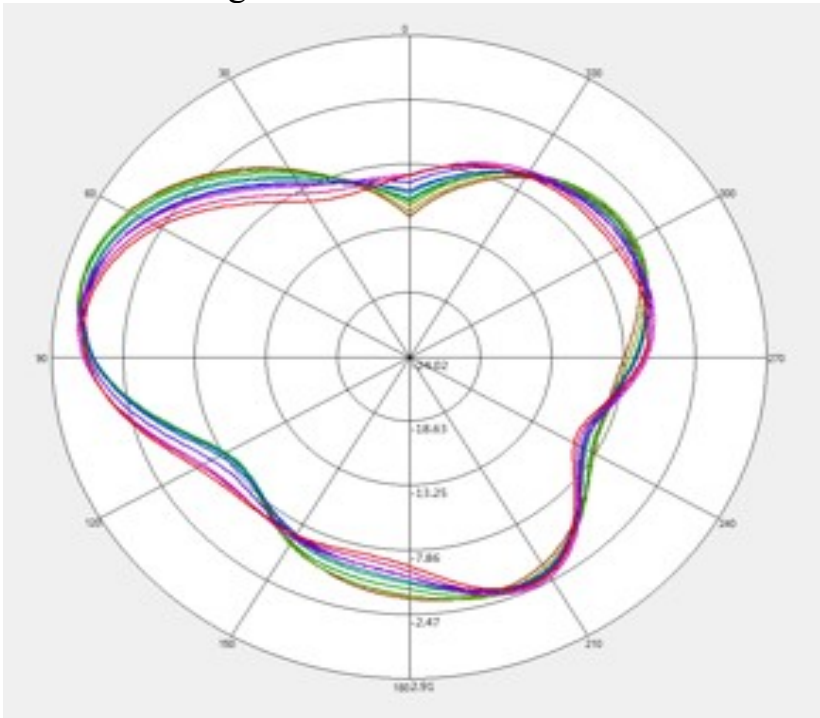


Phi=90.00deg

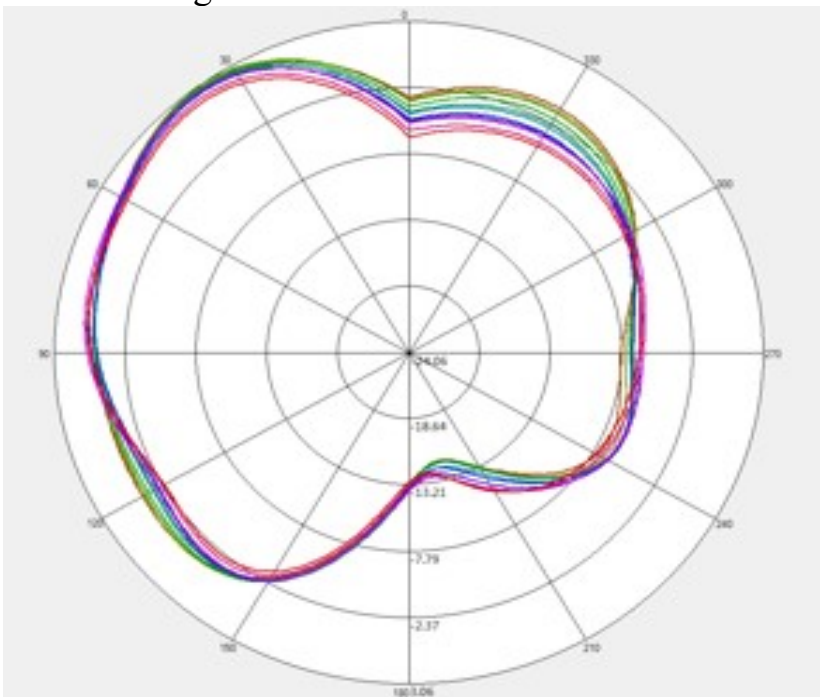



Phi=0.00deg

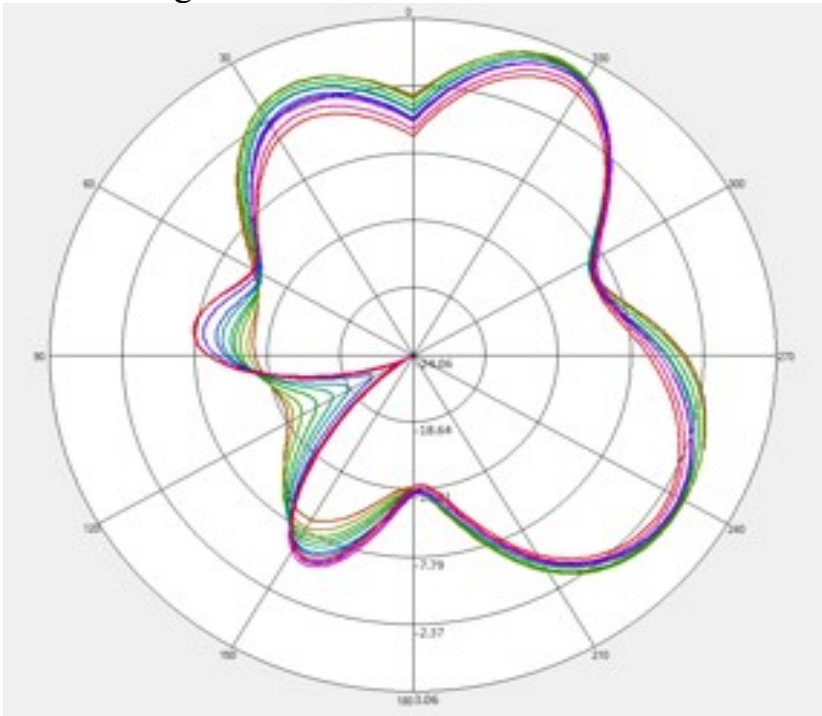

III: 3D Active test report of antenna

FS	OTA	Channel	TRP (dBm)	TIS (dBm)
BT		CH 0	11.0	-91.1
		CH 39	11.0	-91.9
		CH 78	10.9	-90.9



OTA Standard Chamber



V: Structure file

