



3、成品图（Product drawing）：

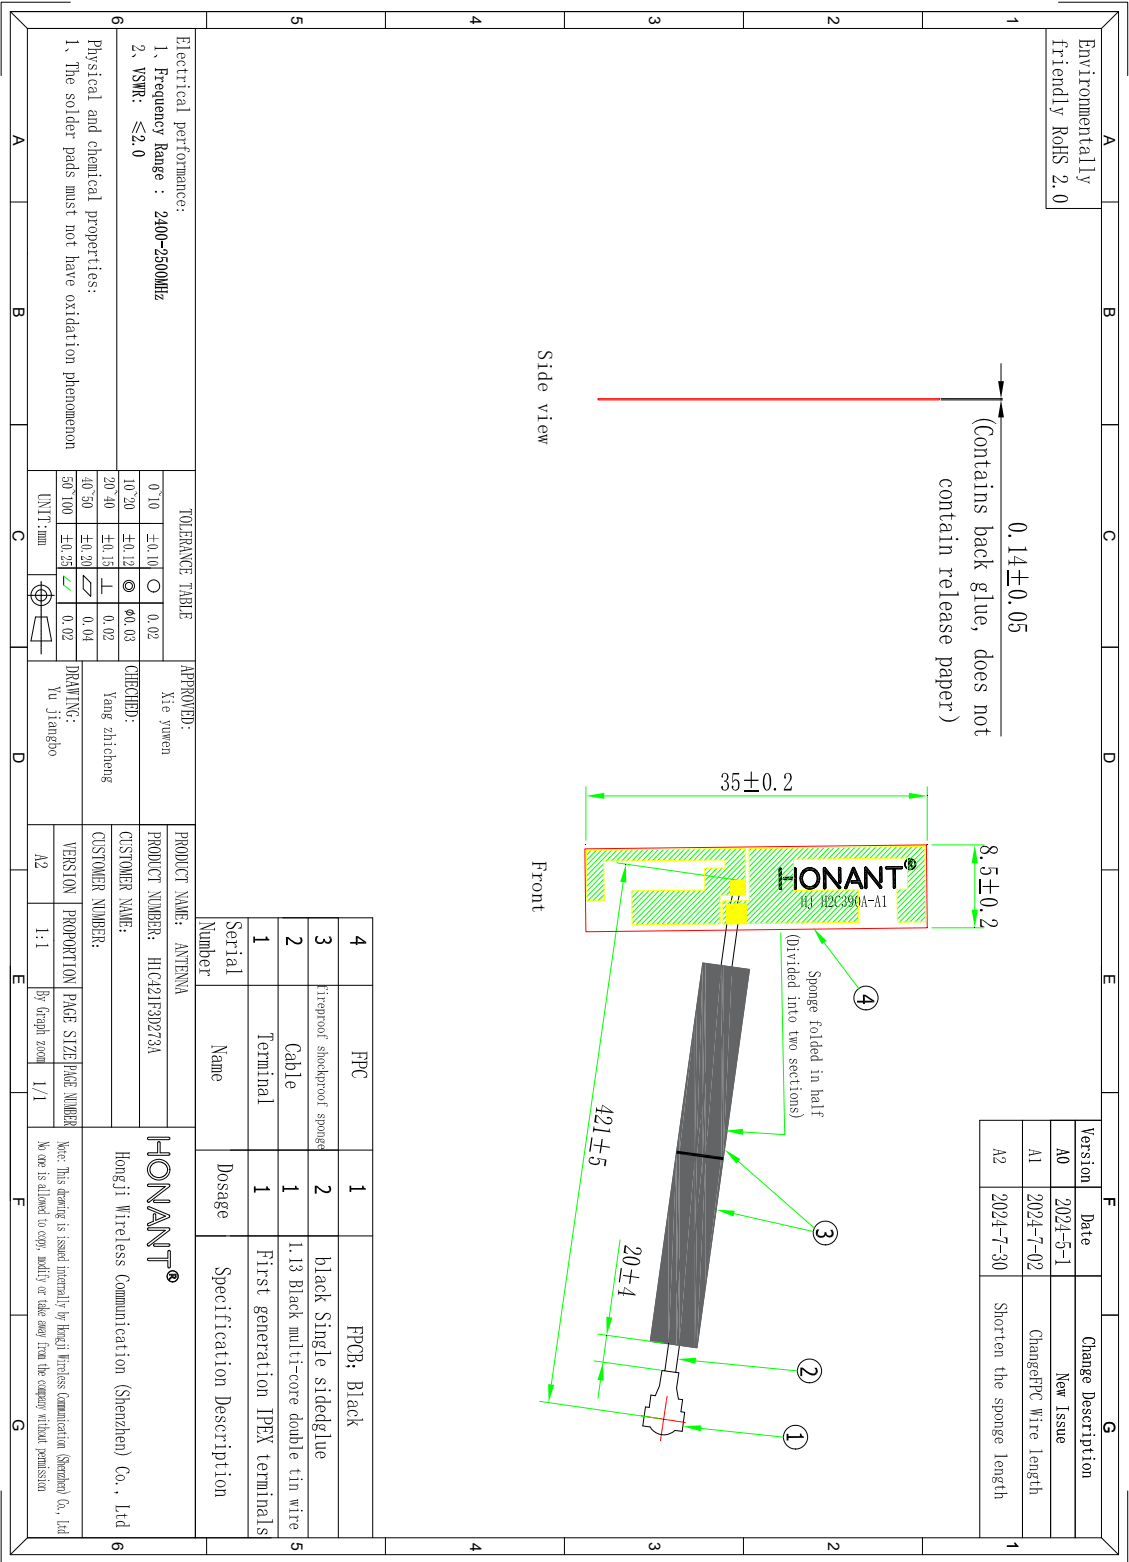


4、包装规范（Packaging specifications）：

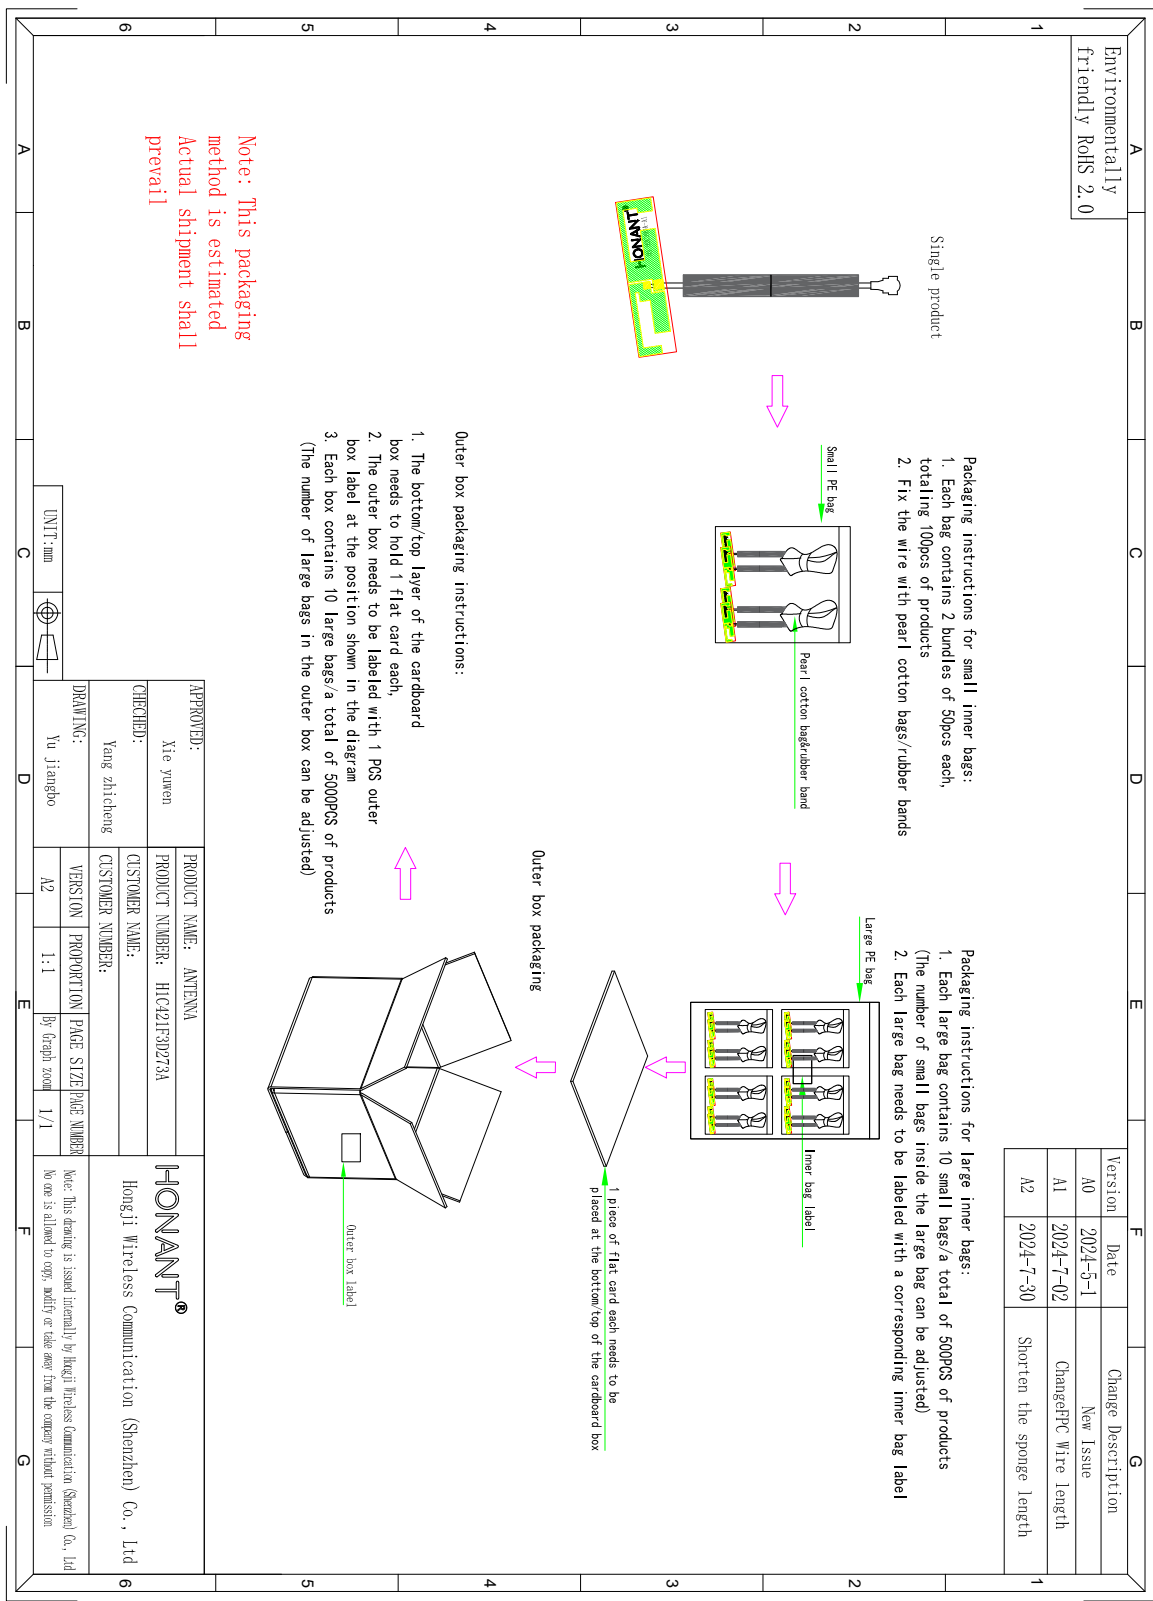


5、测试报告 (Test report) :

5.1: S11

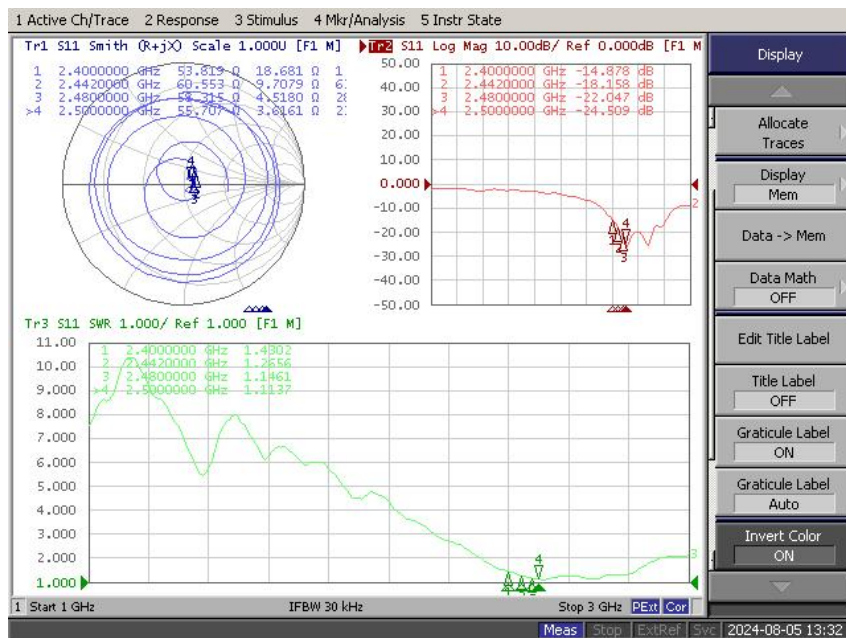

5.2: 2D、3DRaditation Pattern


MAX: 4.31dBi
MIN: -22.25dBi

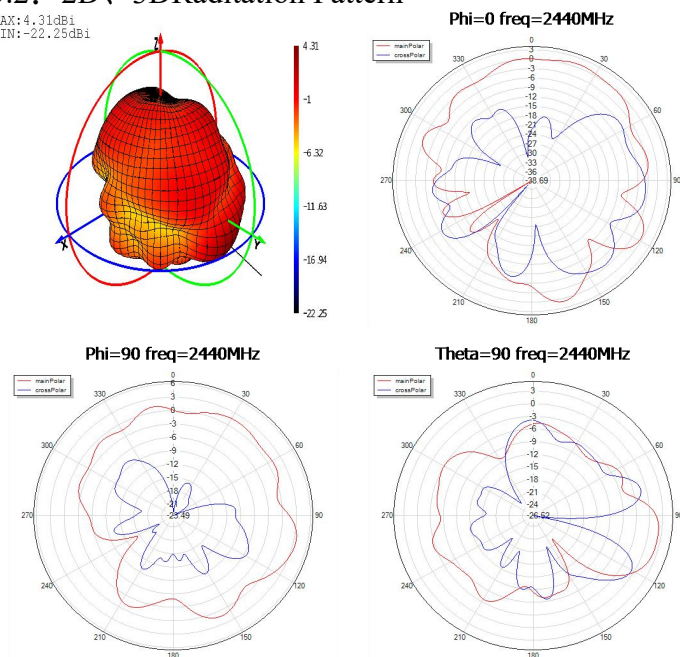

5.3: Antenna gain and efficiency

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	3.97	-2.58	55.19
2410	3.67	-2.70	53.72
2420	3.56	-2.72	53.45
2430	3.60	-2.83	52.15
2440	4.31	-3.04	49.63
2450	4.12	-2.99	50.25
2460	4.23	-2.84	51.98
2470	4.24	-2.74	53.16
2480	4.29	-2.56	55.41
2490	3.92	-2.36	58.13
2500	3.53	-2.28	59.18

5.4: Matching circuit

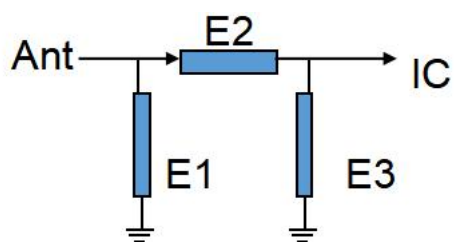

Element	Value
E1	N/C
E2	0Ω
E3	N/C