



# TEST REPORT

**APPLICANT** : Anker Innovations Limited

**PRODUCT NAME** : Nebula Cosmos Max

**MODEL NAME** : D2150

**BRAND NAME** : NEBULA

**FCC ID** : 2AOKB-D2150

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2020-04-28

**TEST DATE** : 2020-05-11 to 2020-07-06

**ISSUE DATE** : 2020-07-20

Edited by: Chen Bilian  
Chen Bilian (Rapporteur)

Approved by: Peng Huarui  
Peng Huarui ( Supervisor )

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Modulation Type and Test Mode of EUT ..... 5**
- 1.4. The Channel Number and Frequency ..... 6**
- 1.5. Test Standards and Results ..... 7**
- 1.6. Environmental Conditions ..... 8**
- 2. 47 CFR Part 15C Requirements ..... 9**
- 2.1. Antenna Requirement ..... 9**
- 2.2. Duty Cycle of Test Signal ..... 10**
- 2.3. Maximum Peak and Average Conducted Output Power ..... 13**
- 2.4. Bandwidth ..... 16**
- 2.5. Conducted Spurious Emissions and Band Edge ..... 23**
- 2.6. Power Spectral Density (PSD) ..... 33**
- 2.7. Conducted Emission ..... 40**
- 2.8. Restricted Frequency Bands ..... 44**
- 2.9. Radiated Emission ..... 54**
- Annex A Test Uncertainty ..... 67**
- Annex B Testing Laboratory Information ..... 68**

Change History		
Version	Date	Reason for change
1.0	2020-07-20	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Anker Innovations Limited
<b>Applicant Address:</b>	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
<b>Manufacturer:</b>	Anker Innovations Limited
<b>Manufacturer Address:</b>	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Nebula Cosmos Max	
<b>Serial No:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	A435C V3.0	
<b>Software Version:</b>	ATV9.0.2	
<b>Equipment Type:</b>	WLAN2.4G	
<b>Modulation Type:</b>	DSSS, OFDM	
<b>Operating Frequency Range:</b>	802.11b/g/ n(HT20): 2.412GHz - 2.462GHz	
<b>Antenna Type:</b>	FPC Antenna	
<b>Antenna Gain:</b>	ANT 1: 3.7dBi; ANT 2: 3.1dBi	
<b>Directional Gain:</b>	6.71dBi <small>Note 3</small>	
<b>Accessory Information:</b>	Adapter	
	<b>Brand Name:</b>	N/A
	<b>Model No.:</b>	HKA18019095-6C
	<b>Serial No.:</b>	(N/A, marked #1 by test site)
	<b>Rated Output:</b>	19V=9.47A
	<b>Rated Input:</b>	100-240V~2.5A 50/60Hz



**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** The EUT has two antennas, only 802.11n modulation mode supports a MIMO function.

Modulation Mode:	TX Function	Relationship between the two output signals
802.11b	1TX	Uncorrelated
802.11g	1TX	Uncorrelated
802.11n	2TX	Correlated

**Note 3:** According to KDB 662911 D01, the directional gain =  $G_{ANT} + 10\log(N_{ANT})$  dBi, where  $G_{ANT}$  is the maximum antenna gain in dBi,  $N_{ANT}$  is the number of outputs.

**Note 4:** For conducted test item Peak Power and Power spectral density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result(ANT 1) in this report.

**Note 5:** All radiation test items for 802.11n modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT 1) in this report.

**Note 6:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Modulation Type and Test Mode of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) <sup>Note1</sup>
DSSS (802.11b)	DBPSK	<b>1</b>
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	<b>6 / 9</b>
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	<b>6.5</b>
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

**Note1:** The worst-case mode(bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



## 1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/ n(HT20)	<b>1</b>	<b>2412</b>	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	<b>11</b>	<b>2462</b>
	5	2432		
	<b>6</b>	<b>2437</b>		
	7	2442		

**Note 1:** The black bold channels were selected for test.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle Of Test Signal	Jun 29, 2020	Tu Yanan	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Jul 06, 2020	Tu Yanan	PASS	No deviation
4	15.247(a)	Bandwidth	Jun 30, 2020	Tu Yanan	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Jun 29& Jul 06, 2020	Tu Yanan	PASS	No deviation
6	15.247(e)	Power spectral density (PSD)	Jun 29, 2020	Tu Yanan	PASS	No deviation
7	15.207	Conducted Emission	May 19, 2020	Huang Zhiye	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	May 14, 2020	Peng Xuewei	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	May 11, 2020	Peng Xuewei	PASS	No deviation

**Note1:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02 and KDB662911 D01 v02r01.

**Note2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method



determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

## 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106





## 2.47 CFR Part 15C Requirements

### 2.1. Antenna Requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

## 2.2. Duty Cycle of Test Signal


### 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

#### Test Setup:

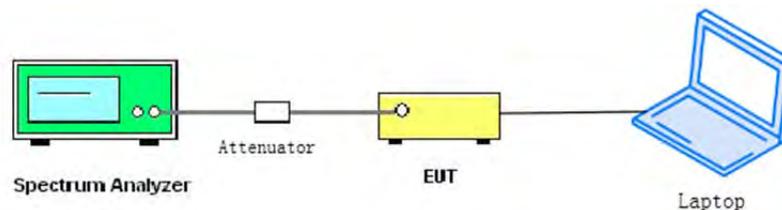

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.



2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor ( $10 \cdot \lg[1/D]$ )
802.11b	100.00	0.00
802.11g	96.67	0.15
802.11n(HT20)	97.03	0.13


B. Test Plots



(Channel 1, 2412MHz, 802.11b)

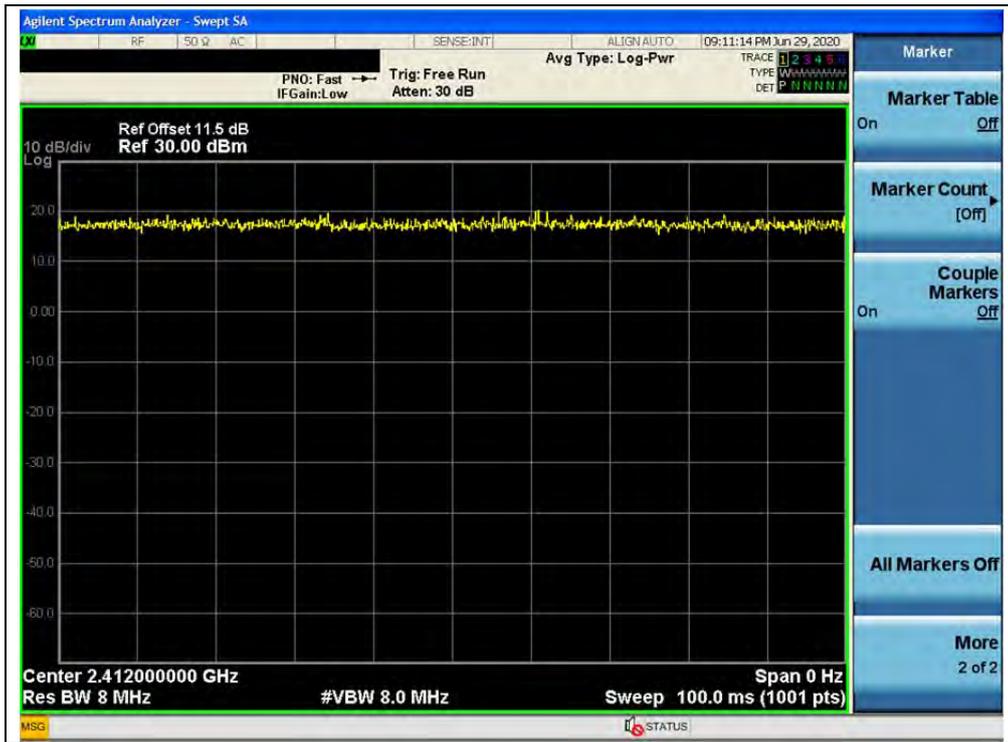

(Channel 1, 2412MHz, 802.11g)

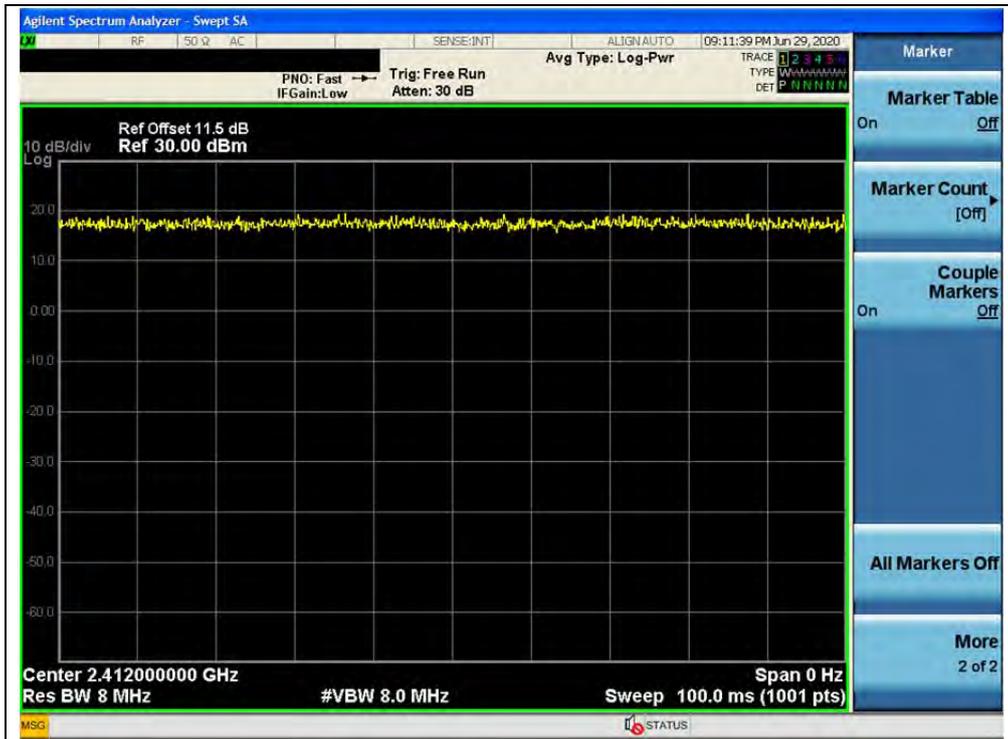

(Channel 1, 2412MHz, 802.11n(HT20))

## 2.3. Maximum Peak and Average Conducted Output Power


### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

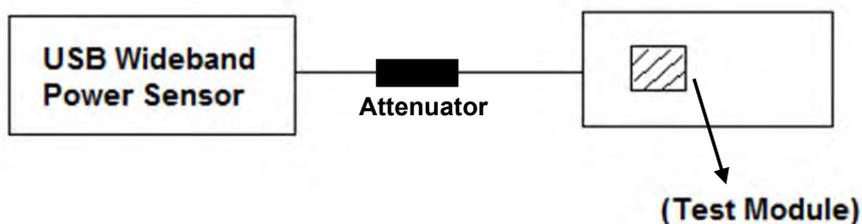

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.3.3. Test Result

Maximum Peak Conducted Output Power

802.11b Test Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit (dBm)		Verdict
		ANT 1		ANT 2		dBm	W	
		dBm	W	dBm	W			
1	2412	17.48	0.056	17.09	0.051	30	1	PASS
6	2437	18.33	0.068	17.51	0.056			PASS
11	2462	18.22	0.066	17.80	0.060			PASS

802.11g Test Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit (dBm)		Verdict
		ANT 1		ANT 2		dBm	W	
		dBm	W	dBm	W			
1	2412	20.46	0.111	20.29	0.107	30	1	PASS
6	2437	20.82	0.121	20.67	0.117			PASS
11	2462	<b>21.11</b>	0.129	20.98	0.125			PASS

802.11n(HT20) Test Mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (W)	Total Power (dBm)	Limit		Verdict
		ANT 1	ANT 2			dBm	W	
1	2412	20.62	20.26	0.222	23.46	29.29	0.849	PASS
6	2437	20.75	20.67	0.236	23.73			PASS
11	2462	21.05	20.86	<b>0.249</b>	<b>23.96</b>			PASS

**Note:** Directional gain = 3.7dBi +10log(2) =6.71dBi>6dBi, so the power limit is 0.849W(29.29dBm).



**Maximum Average Conducted Output Power**

**802.11b Test Mode**

Frequency (MHz)	Average Power						Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated						
	ANT1	ANT2		ANT1		ANT2				
	dBm	dBm		dBm	W	dBm	W	dBm		W
2412	14.24	13.98	0.00	14.24	0.027	13.98	0.025	30	1	PASS
2437	14.81	14.35		14.81	0.030	14.35	0.027			PASS
2462	<b>15.02</b>	<b>14.78</b>		<b>15.02</b>	0.032	<b>14.78</b>	0.030			PASS

**802.11g Test Mode**

Frequency (MHz)	Average Power						Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated						
	ANT1	ANT2		ANT1		ANT2				
	dBm	dBm		dBm	W	dBm	W	dBm		W
2412	14.48	13.91	0.15	14.63	0.029	14.06	0.025	30	1	PASS
2437	14.83	14.37		14.98	0.031	14.52	0.028			PASS
2462	14.98	14.66		15.13	0.033	14.81	0.030			PASS

**802.11 n(HT20) Test Mode**

Frequency (MHz)	Average Power				Limit		Verdict	
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT1	ANT2						
	dBm	dBm		dBm	W	dBm		W
2412	14.53	13.93	0.13	17.40	0.055	29.29	0.849	PASS
2437	14.80	14.31		17.71	0.059			PASS
2462	14.99	14.60		<b>17.92</b>	<b>0.062</b>			PASS

**Note:** Directional gain = 3.7dBi + 10log(2) = 6.71dBi > 6dBi, so the power limit is 0.849W(29.29dBm).


## 2.4. Bandwidth

### 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:

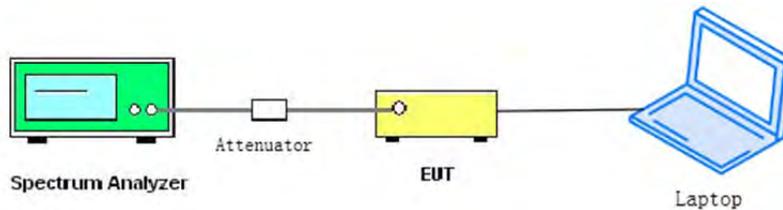

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.






2.4.4. Test Result

802.11b Test Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.17	≥500	PASS
6	2437	8.11	≥500	PASS
11	2462	8.04	≥500	PASS

B. Test Plots

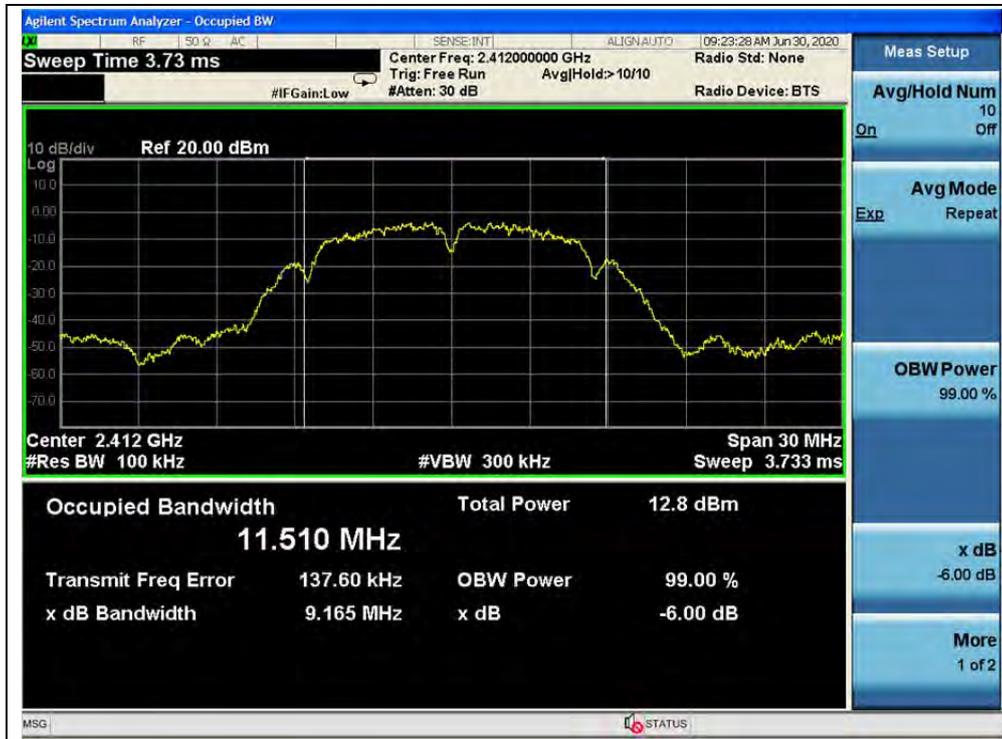

(Channel 1, 802.11b)



(Channel 6, 802.11b)



(Channel 11, 802.11b)



**802.11g Test Mode**


**A. Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.77	≥500	PASS
6	2437	17.75	≥500	PASS
11	2462	17.75	≥500	PASS


**B. Test Plots:**



(Channel 1, 802.11g)

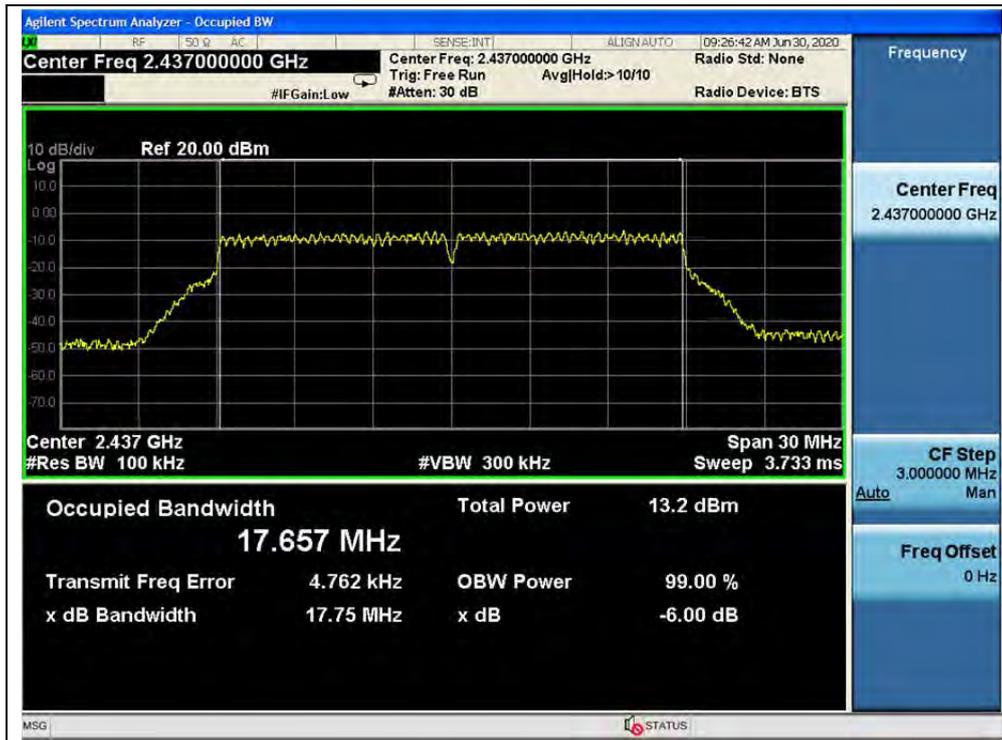

(Channel 6, 802.11g)

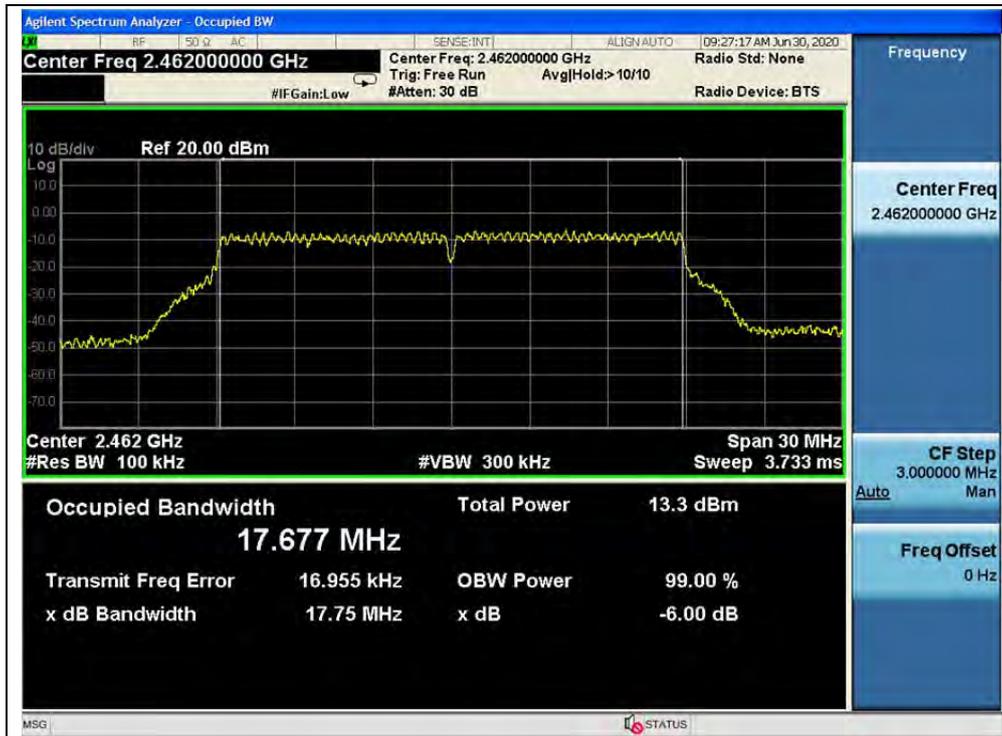

(Channel 11, 802.11g)




802.11n(HT20) Test Mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.77	≥500	PASS
6	2437	17.78	≥500	PASS
11	2462	17.80	≥500	PASS


B. Test Plots:

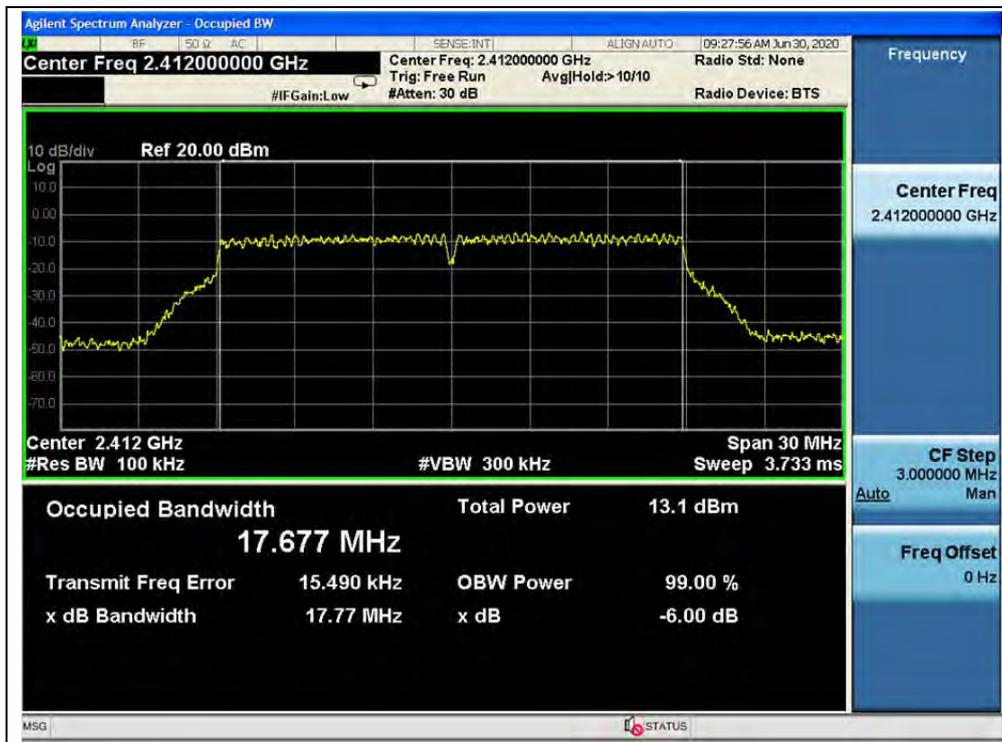

(Channel 1, 802.11n(HT20))

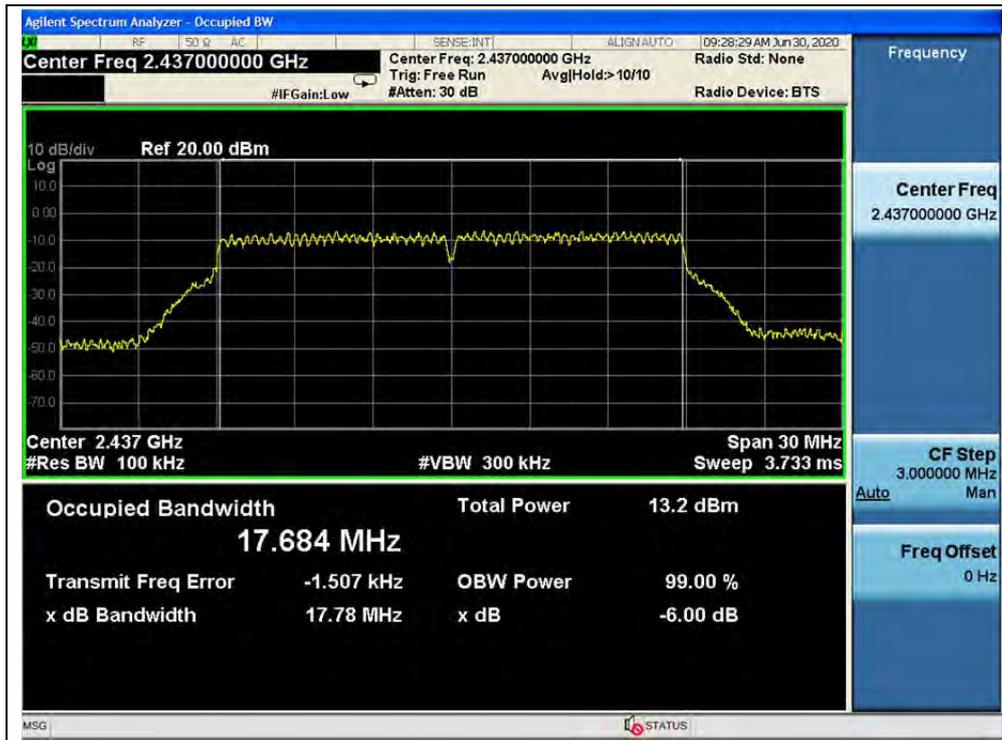

(Channel 6, 802.11n(HT20))

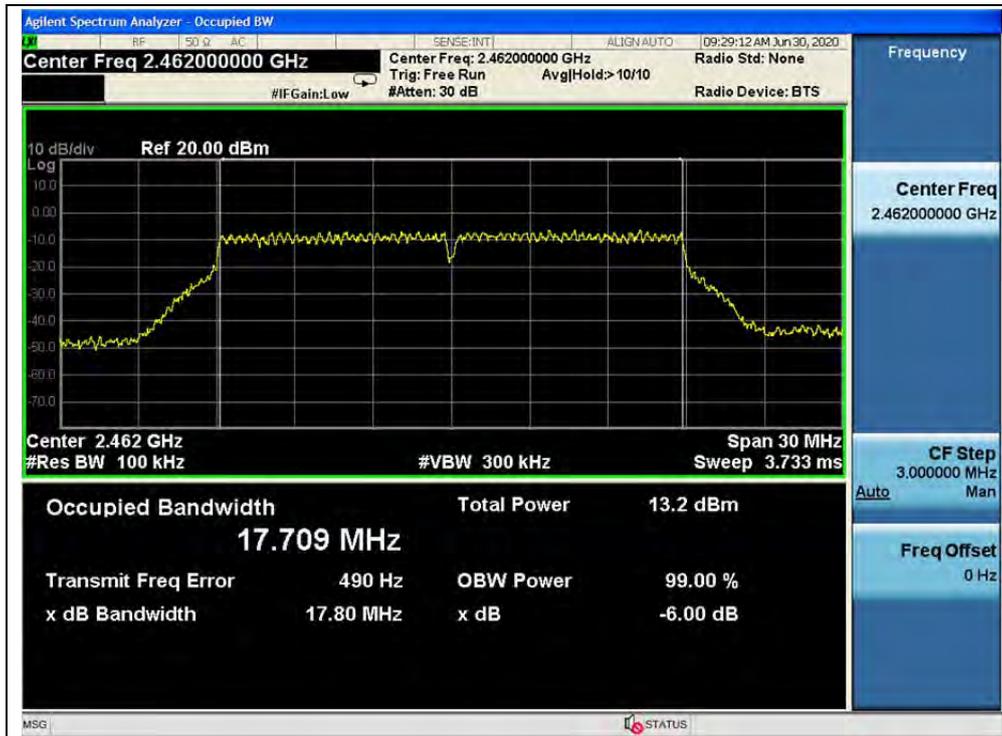

(Channel 11, 802.11n(HT20))


## 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:

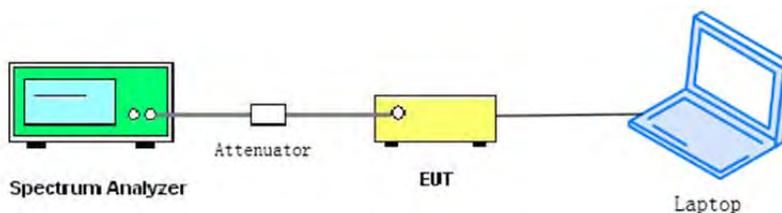

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.




2.5.4. Test Result

802.11b Test Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-50.82	2.27	-17.73	PASS
6	2437	-51.76	3.43	-16.57	PASS
11	2462	-51.31	4.46	-15.54	PASS

B. Test Plots:

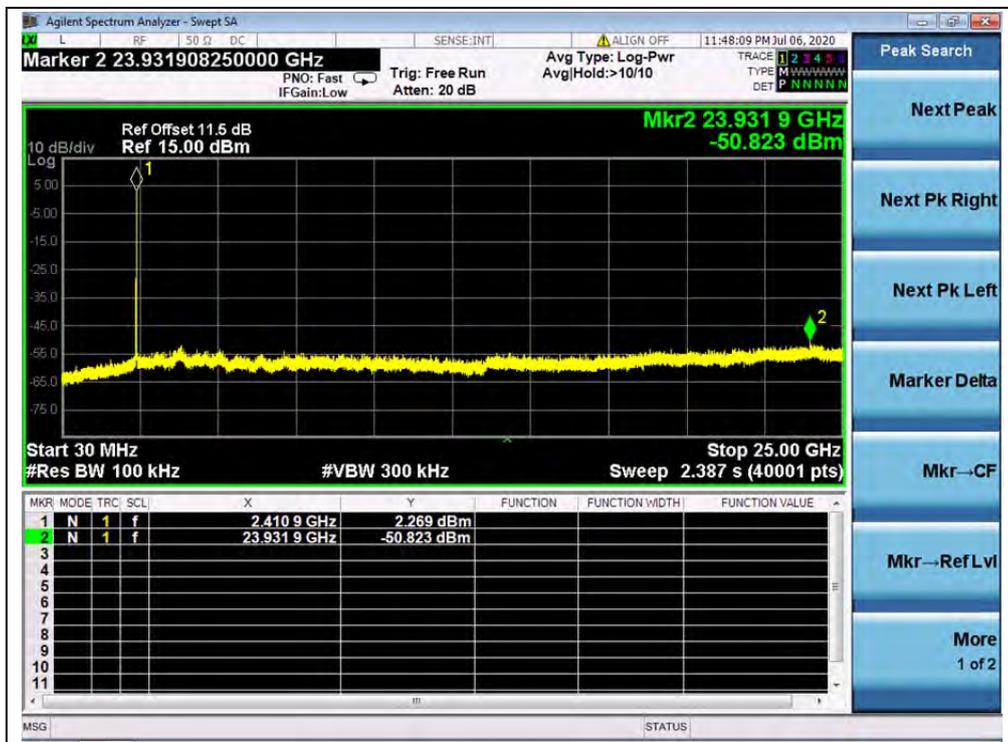


(Channel = 1, 30MHz to 25GHz)



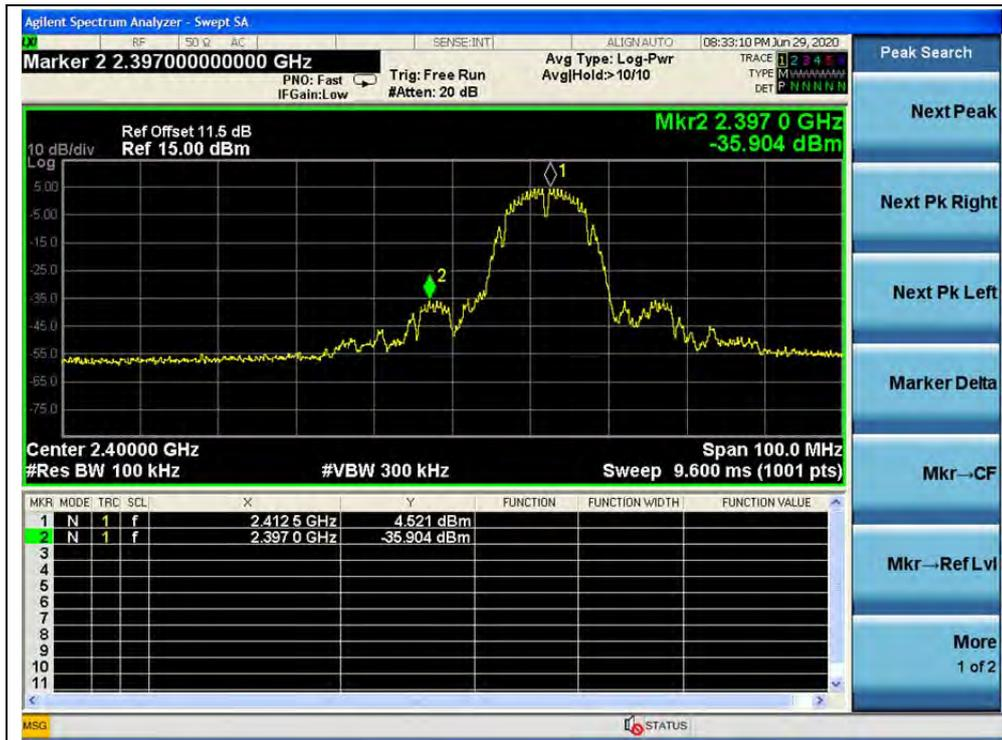

(Band Edge, Channel = 1)

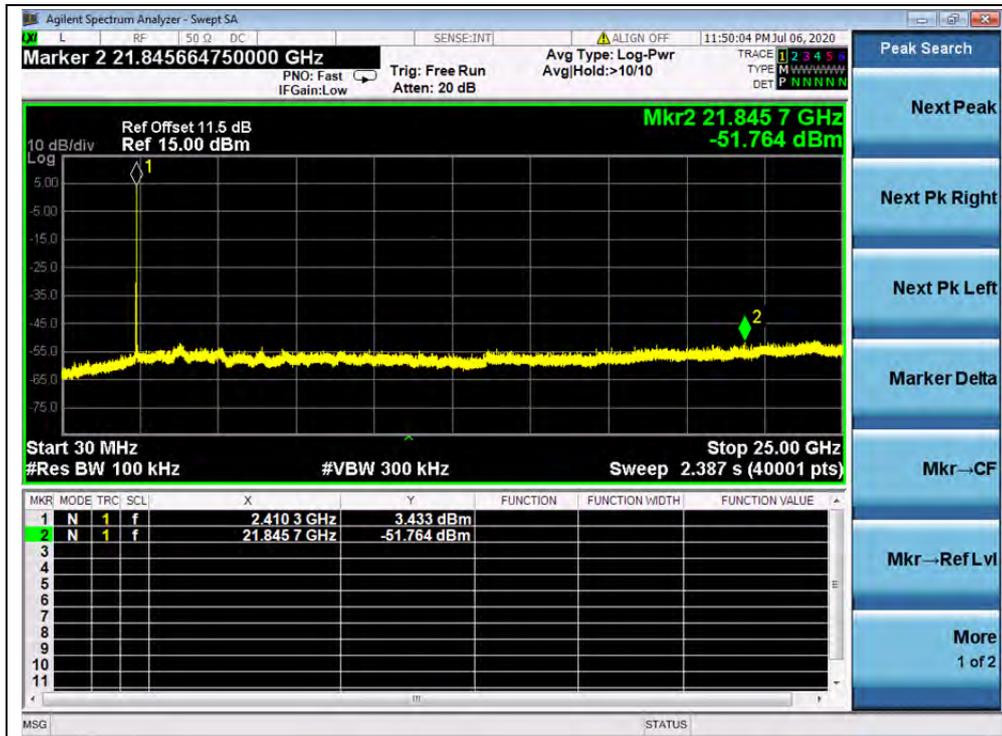

(Channel = 6, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)




802.11g Test Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-43.12	0.68	-19.32	PASS
6	2437	-43.06	-1.44	-21.44	PASS
11	2462	-42.99	0.29	-19.71	PASS


B. Test Plots:

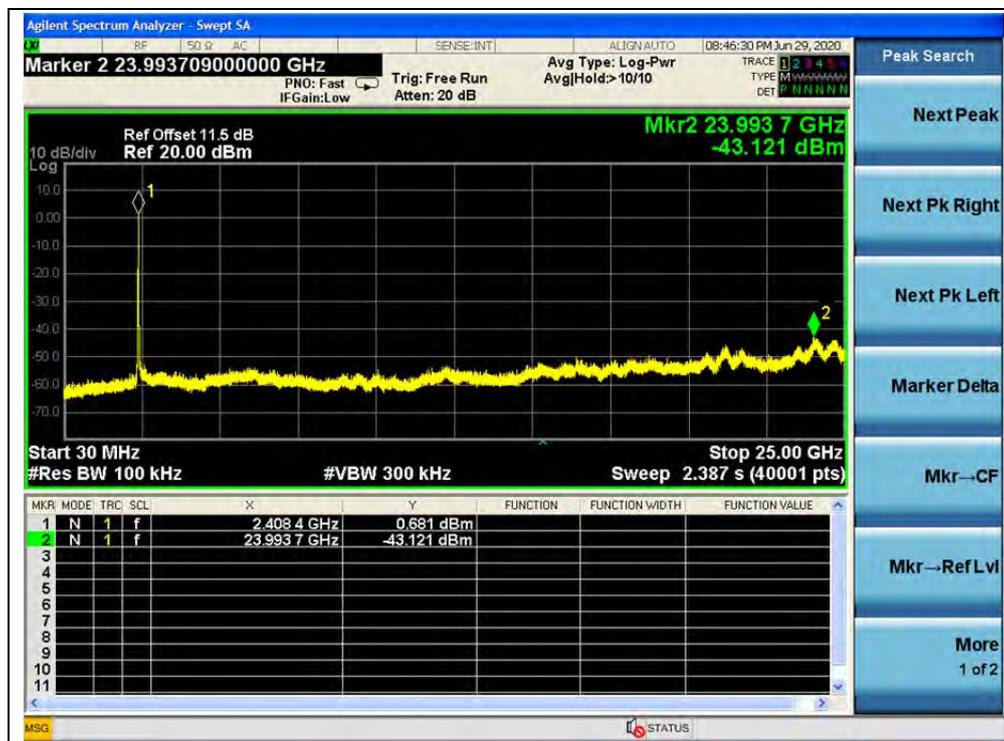

(Channel = 1, 30MHz to 25GHz)

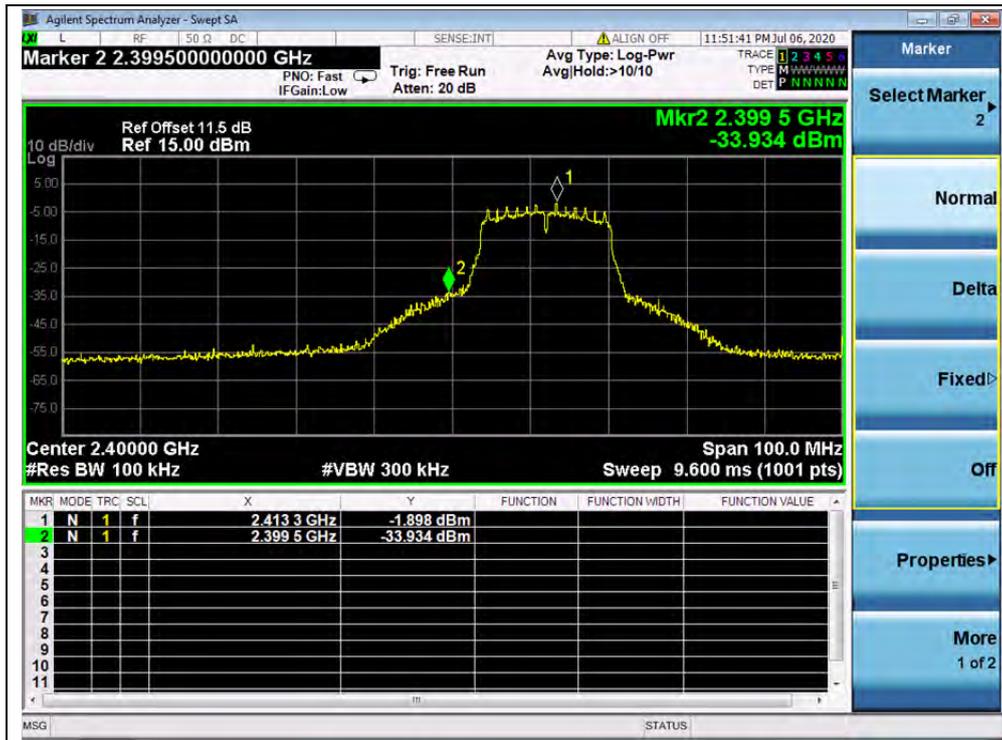


(Band Edge, Channel = 1)

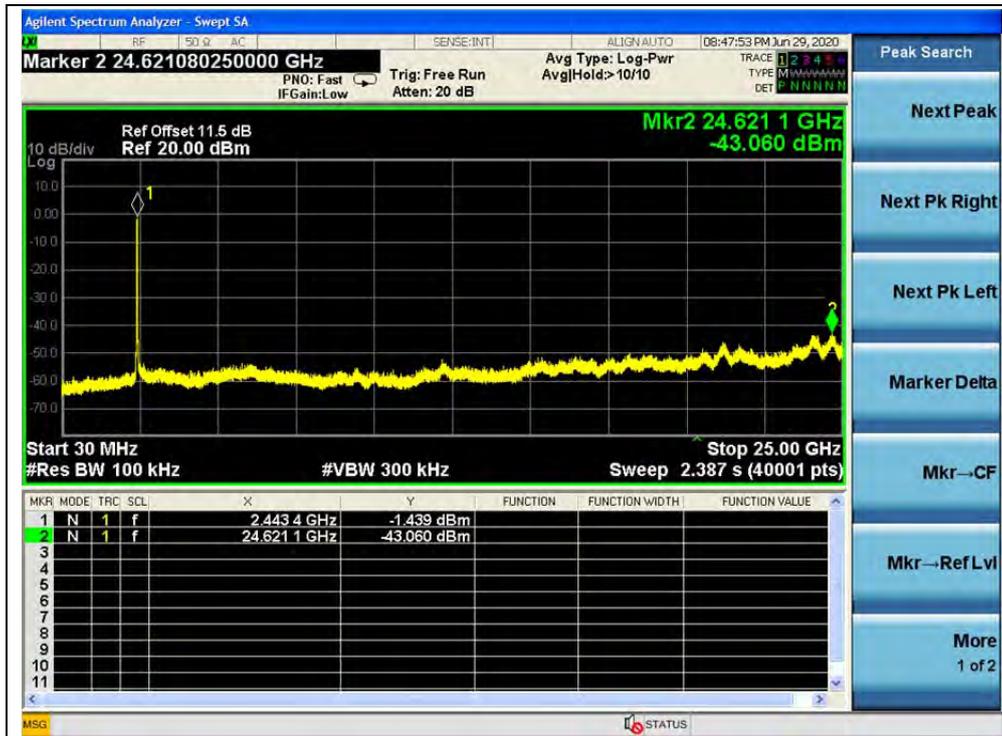

(Channel = 6, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)

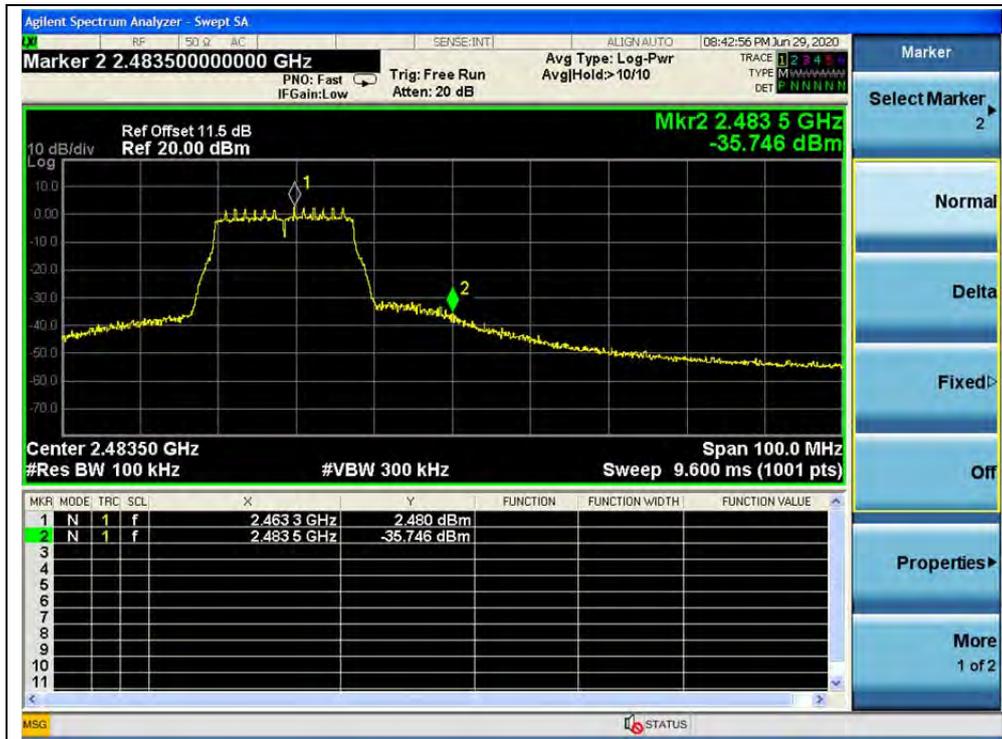

(Band Edge, Channel = 11)




802.11n(HT20) Test Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.54	2.38	-17.62	PASS
6	2437	-42.55	0.83	-19.17	PASS
11	2462	-42.88	2.30	-17.7	PASS

B. Test Plots:

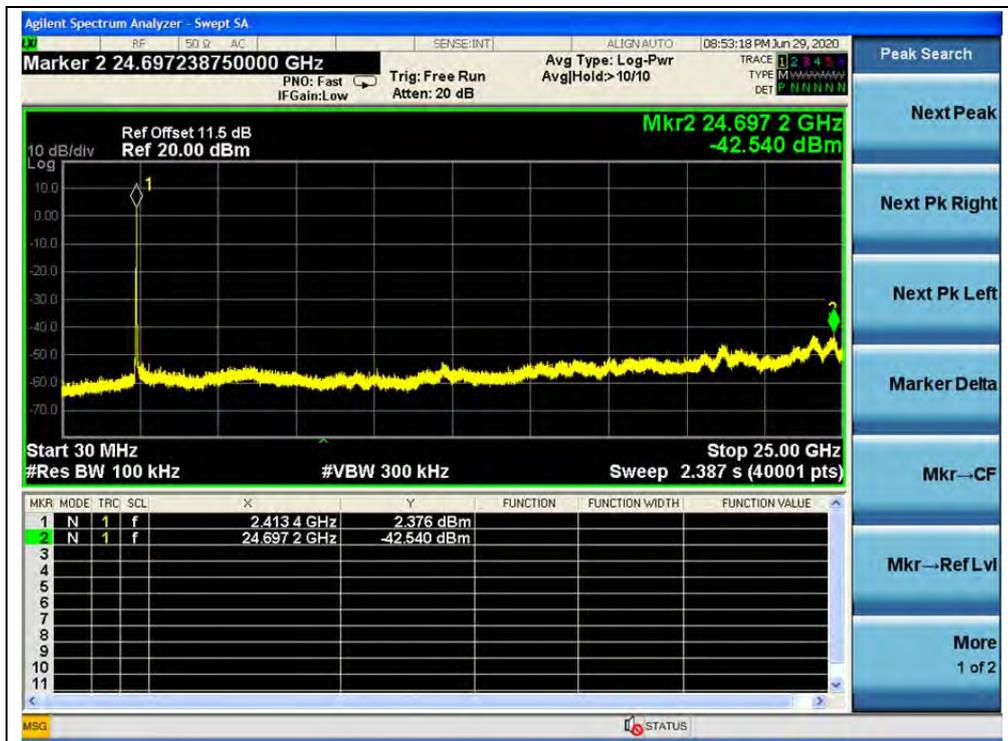


(Channel = 1, 30MHz to 25GHz)

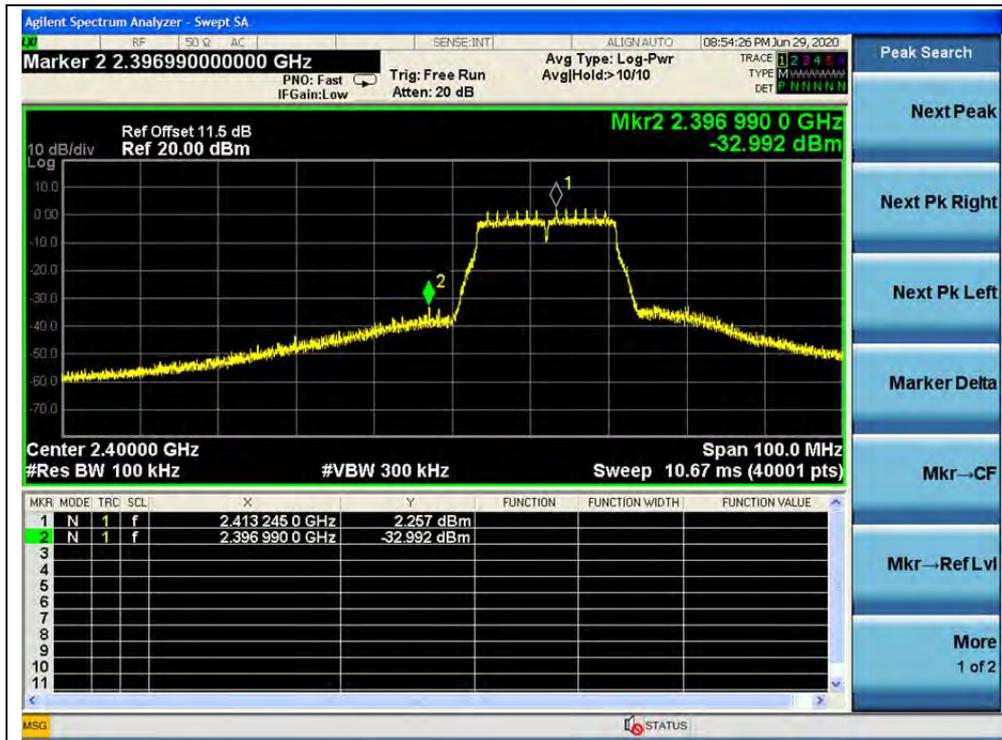


(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)

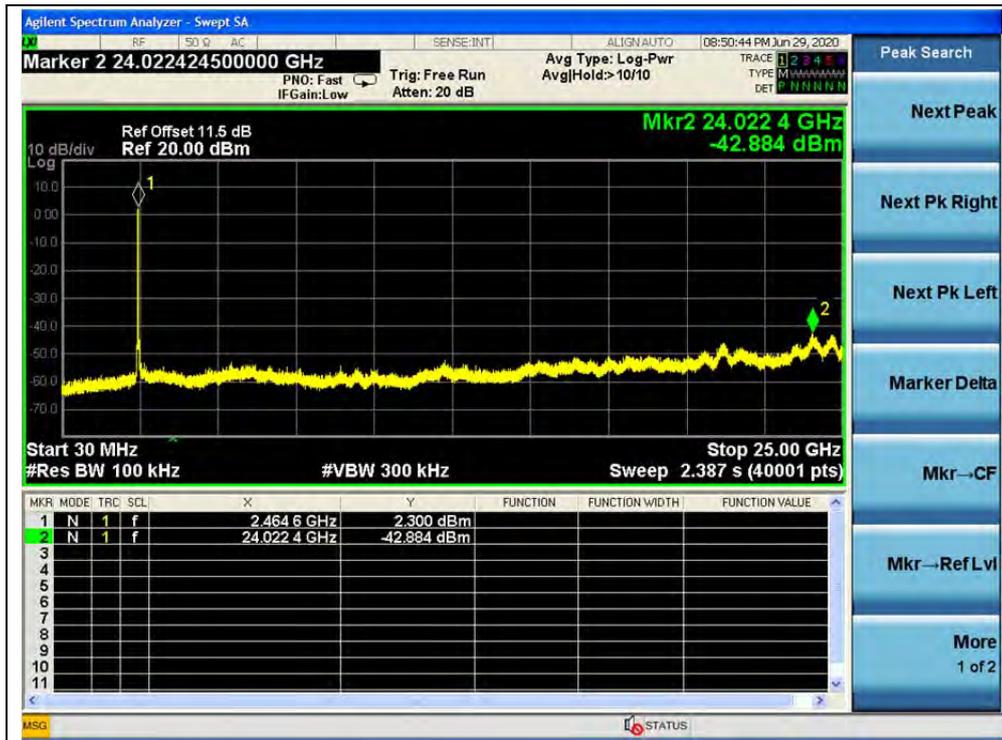

(Channel = 11, 30MHz to 25GHz)

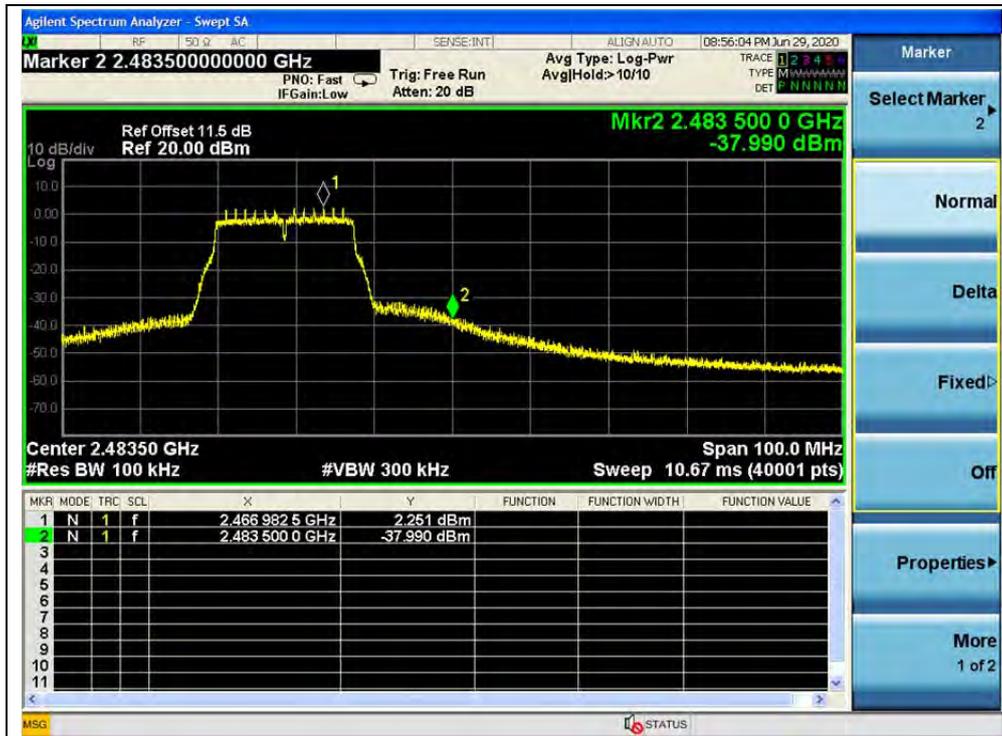

(Band Edge, Channel = 11)




## 2.6. Power Spectral Density (PSD)

### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.6.2. Test Description

#### Test Setup:

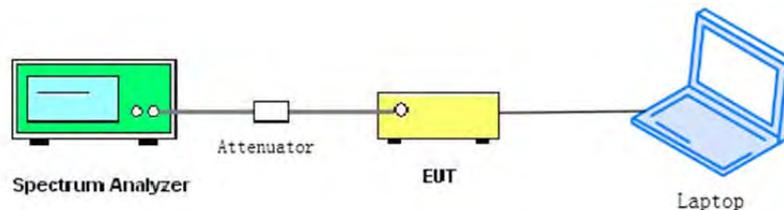

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



2.6.4. Test Result

802.11b Test Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 1	ANT 2		
1	2412	-9.90	-10.34	8	PASS
6	2437	-9.21	-8.61	8	PASS
11	2462	-9.05	-9.96	8	PASS

B. Test Plots:



(Channel = 1, 802.11b, ANT 1)



(Channel = 6, 802.11b, ANT 2)



(Channel = 11, 802.11b, ANT 2)



**802.11g Test Mode**

**A. Test Verdict:**

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 1	ANT 2		
1	2412	-12.69	-11.86	8	PASS
6	2437	-11.48	-12.42	8	PASS
11	2462	-11.71	-10.49	8	PASS

**B. Test Plots:**



(Channel = 1, 802.11g, ANT 1)





**802.11n(HT20) Test Mode**

**A. Test Verdict:**

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
		ANT 1	ANT 2			
1	2412	-12.35	-11.73	-9.02	7.29	PASS
6	2437	-12.14	-12.18	-9.15	7.29	PASS
11	2462	-10.96	-11.42	-8.17	7.29	PASS

**Note:** Directional gain = 3.7dBi +10log(2) =6.71dBi>6dBi, so the power limit is 7.29 dBm/3kHz.

**B. Test Plots:**



(Channel = 1, 802.11n(HT20), ANT1)



(Channel = 6, 802.11n(HT20), ANT1)



(Channel = 11, 802.11n(HT20), ANT1)

## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**NOTE:**

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

**Test Setup:**

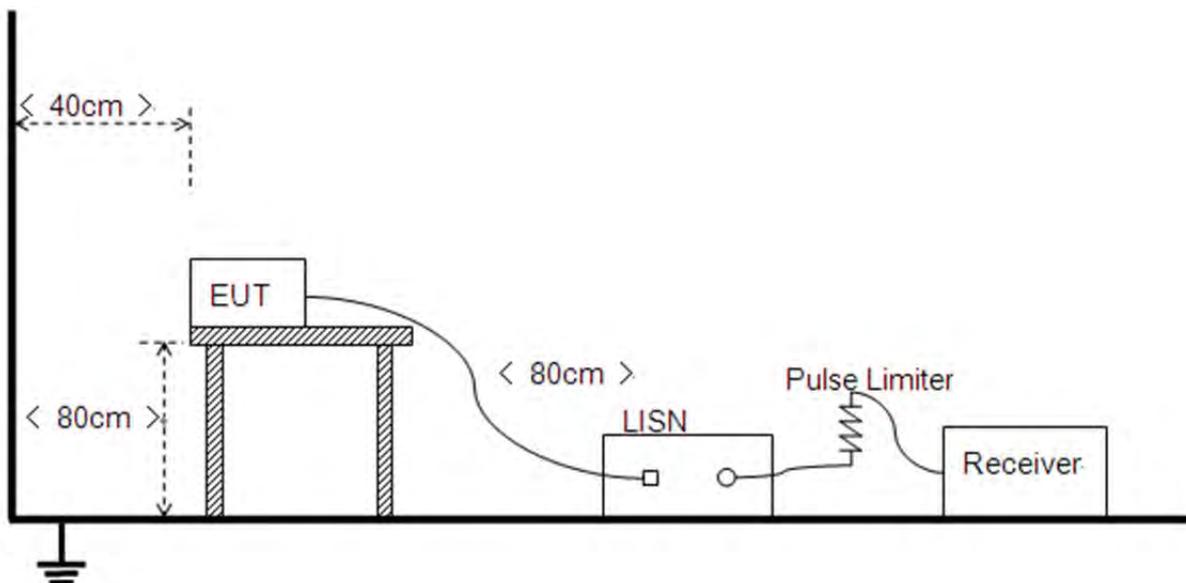

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.





### 2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT+ADAPTER+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN

**B. Test Plots:**

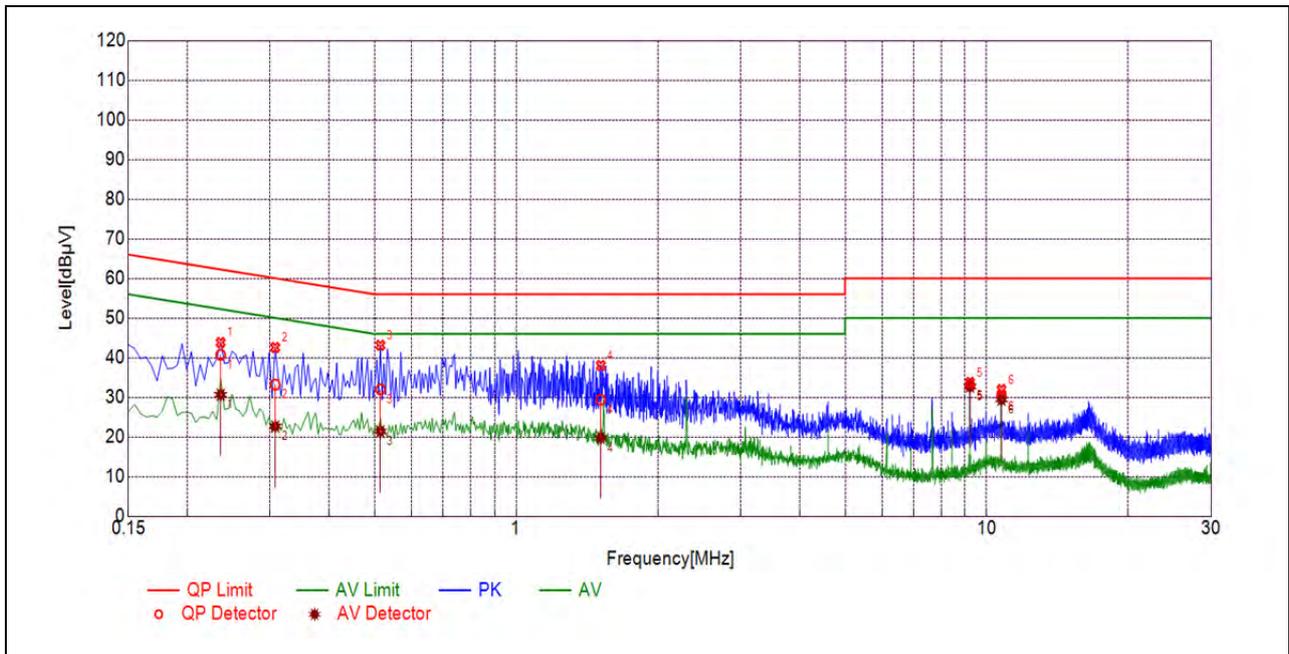

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2355	40.73	30.66	62.25	52.25	Line	PASS
2	0.3077	33.23	22.67	60.03	50.03		PASS
3	0.5146	32.00	21.41	56.00	46.00		PASS
4	1.5126	29.40	19.77	56.00	46.00		PASS
5	9.2157	32.97	32.73	60.00	50.00		PASS
6	10.7508	30.28	29.42	60.00	50.00		PASS

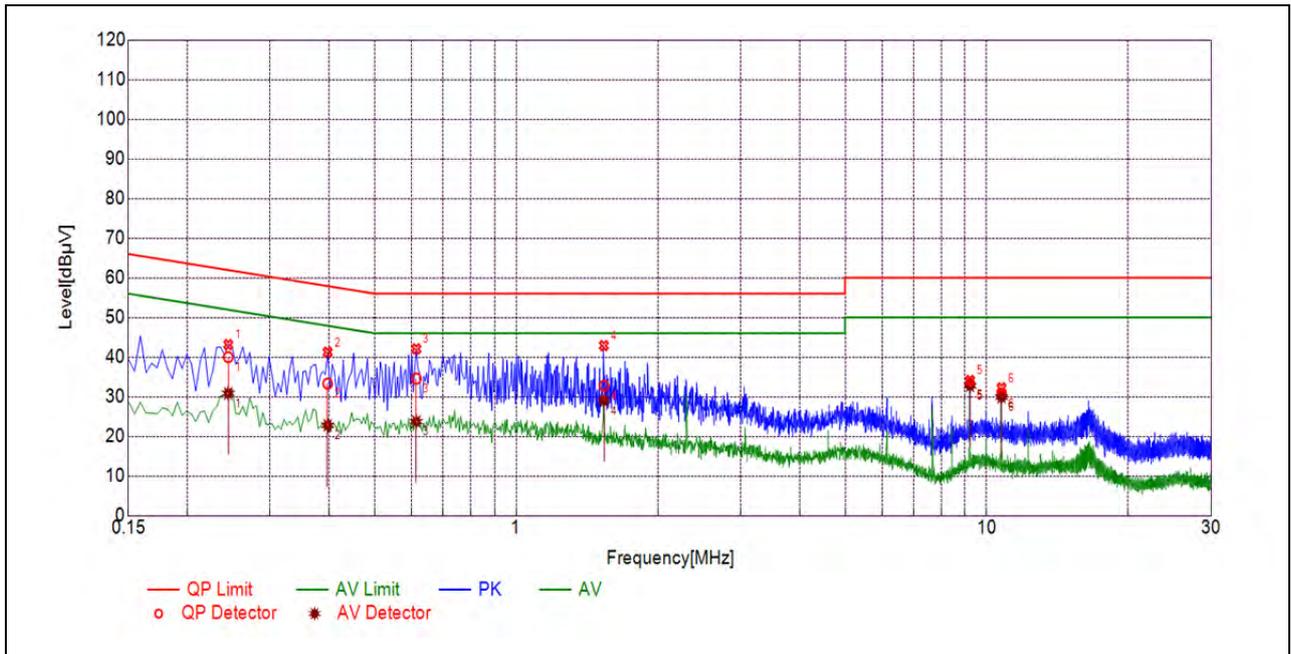

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2443	39.99	30.84	61.95	51.95	Neutral	PASS
2	0.3975	33.32	22.80	57.91	47.91		PASS
3	0.6135	34.57	23.73	56.00	46.00		PASS
4	1.5370	32.79	29.02	56.00	46.00		PASS
5	9.2160	33.17	32.75	60.00	50.00		PASS
6	10.7520	30.65	29.90	60.00	50.00		PASS


## 2.8. Restricted Frequency Bands

### 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.8.2. Test Description

#### Test Setup

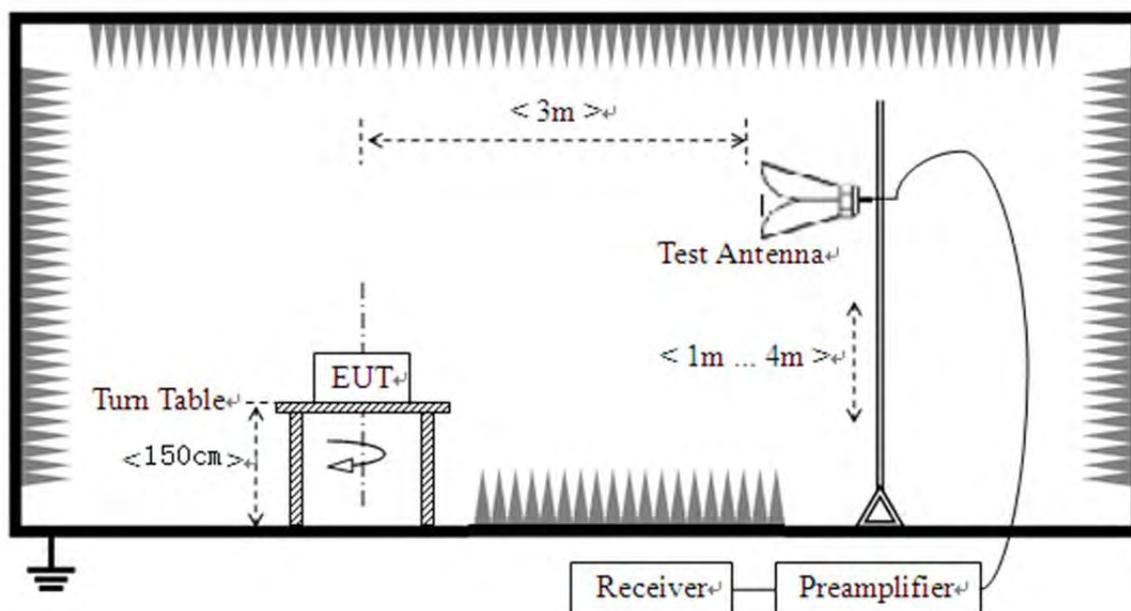

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



### 2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

### 2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


### 802.11b Test Mode

#### A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	46.40	-29.67	32.56	49.29	74	PASS
1	2390.00	AV	43.91	-29.67	32.56	46.80	54	PASS
11	2485.87	PK	46.48	-29.67	32.56	49.37	74	PASS
11	2485.08	AV	44.91	-29.67	32.56	47.80	54	PASS



B. Test Plots:

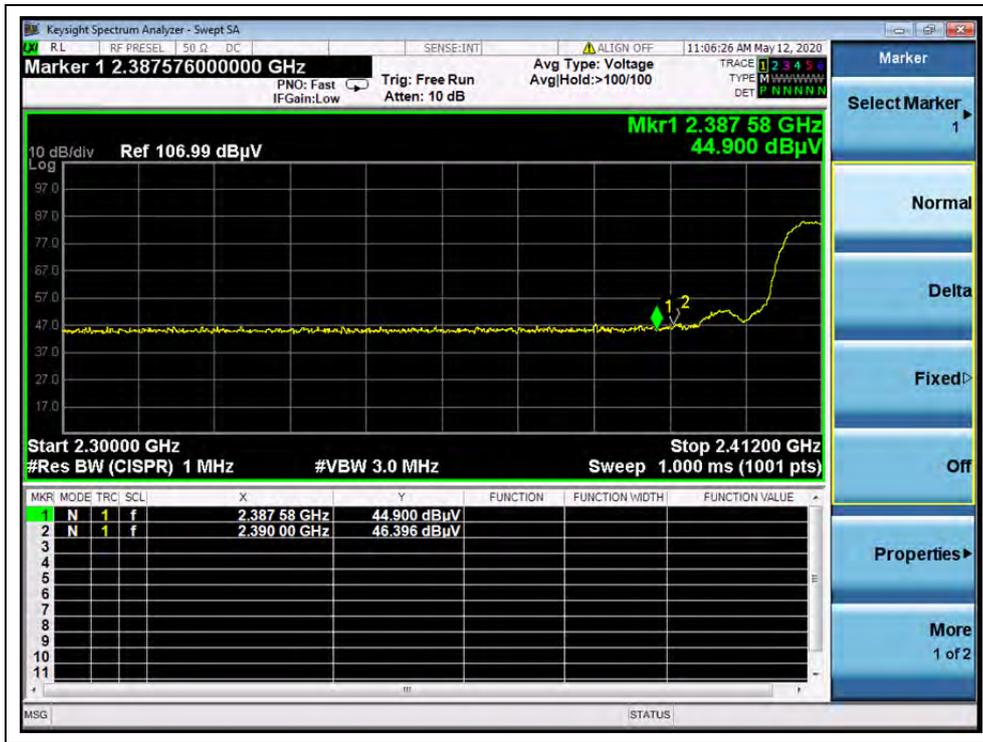


(PEAK, Channel = 1, 802.11b)

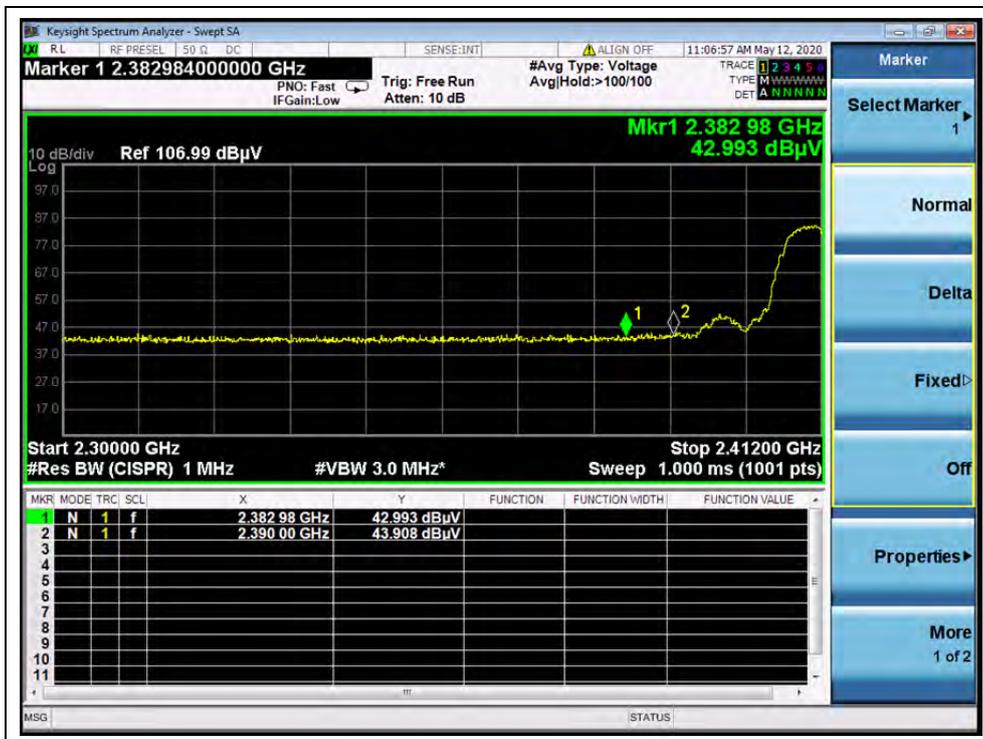

(AVG, Channel = 1 802.11b)



(PEAK, Channel = 11 802.11b)

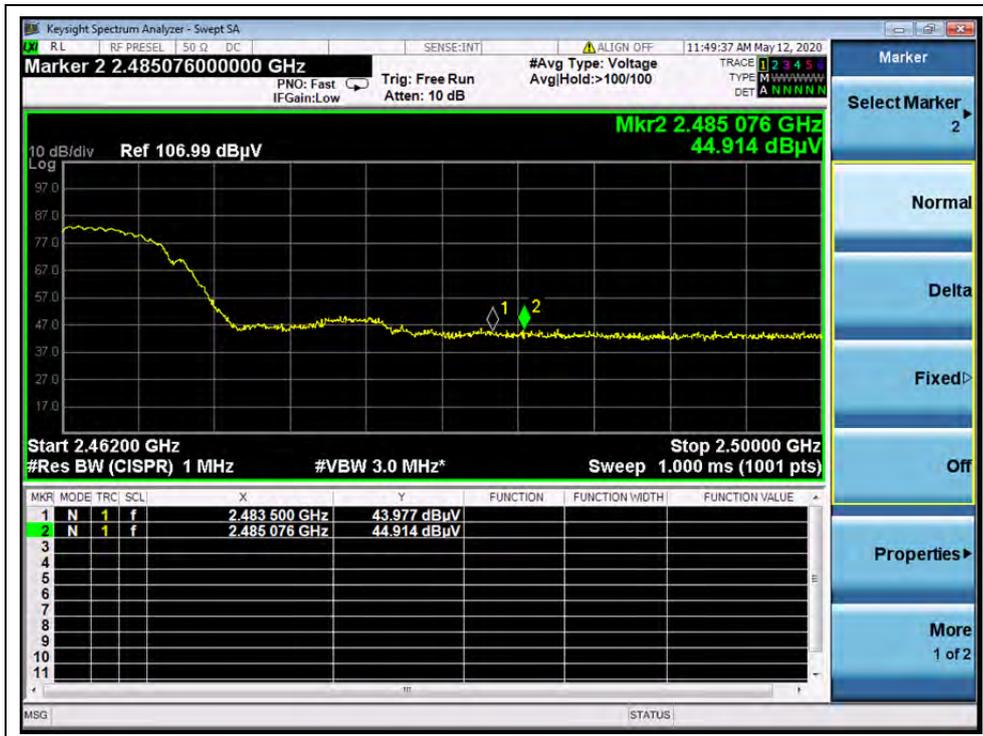

(AVG, Channel = 11 802.11b)



**802.11g Test Mode**

**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2388.14	PK	54.87	-29.67	32.56	57.76	74	PASS
1	2390.00	AV	43.15	-29.67	32.56	46.04	54	PASS
11	2483.50	PK	60.10	-29.67	32.56	62.99	74	PASS
11	2483.50	AV	45.27	-29.67	32.56	48.16	54	PASS

**B. Test Plots:**



(PEAK, Channel = 1 802.11g)





(AVG, Channel = 1 802.11g)



(PEAK, Channel = 11, 802.11g)



(AVG, Channel = 11, 802.11g)



**802.11 n(HT20) Test Mode**

**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBuV)					
1	2390.00	PK	54.32	-29.67	32.56	57.21	74	PASS
1	2390.00	AV	42.51	-29.67	32.56	45.40	54	PASS
11	2483.78	PK	58.98	-29.67	32.56	61.87	74	PASS
11	2483.50	AV	45.28	-29.67	32.56	48.17	54	PASS

**B. Test Plots:**



(PEAK, Channel = 1, 802.11n(HT20))



(AVG, Channel = 1, 802.11n(HT20))



(PEAK, Channel = 11, 802.11n(HT20))



(AVG, Channel = 11, 802.11n(HT20))



## 2.9. Radiated Emission

### 2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


**Note1:** For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:** For above 1000MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}@3\text{m}$  (AV) and 74dB $\mu\text{V}/\text{m}@3\text{m}$  (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

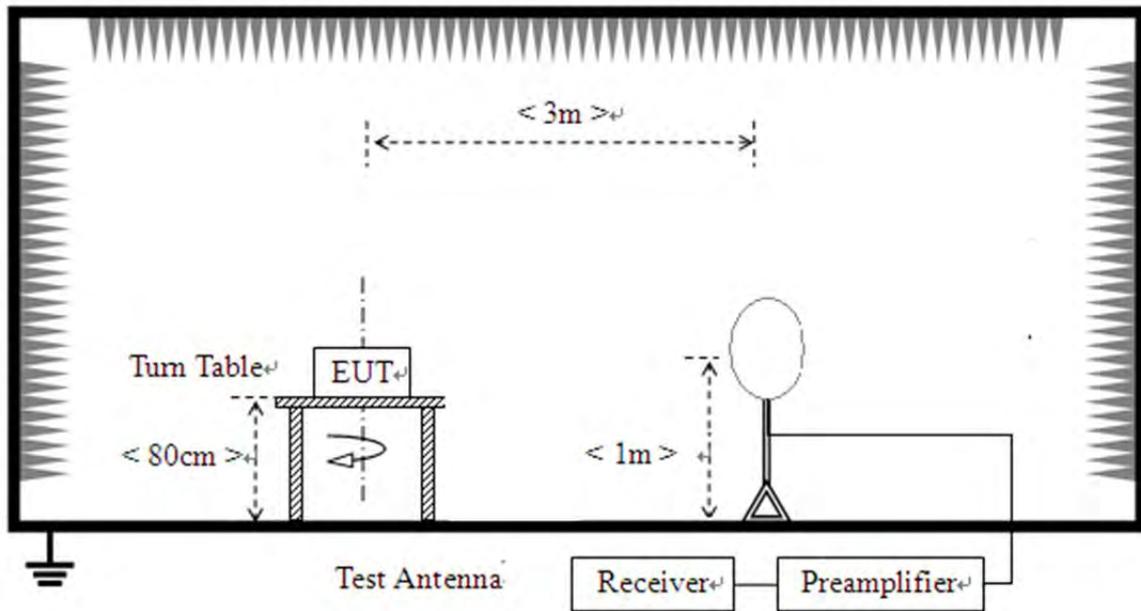

- 2) For radiated emissions from 30MHz to 1GHz

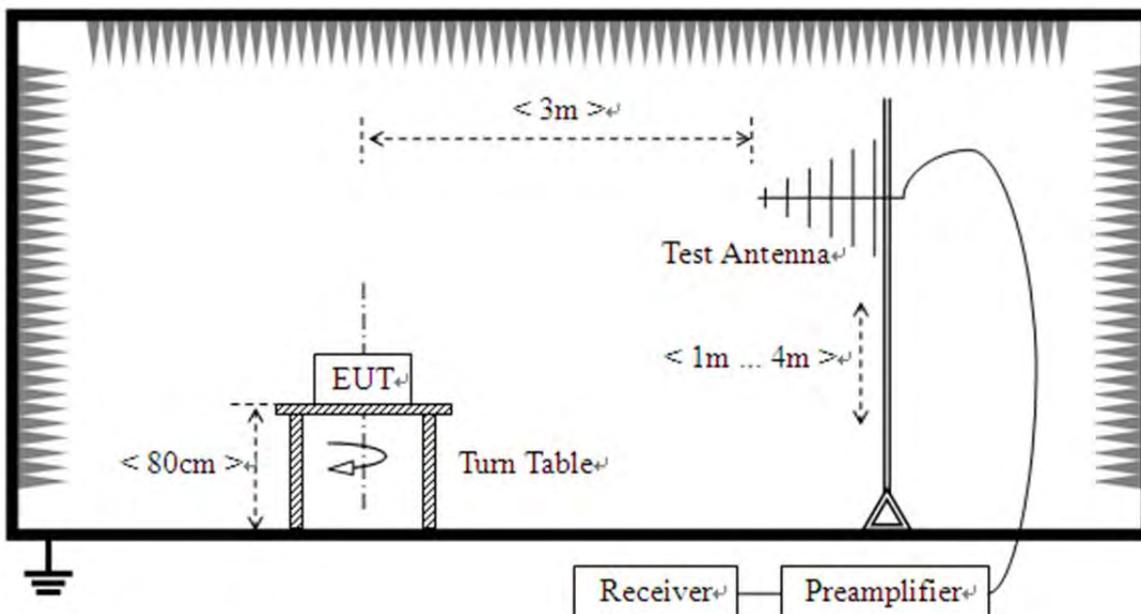

3) For radiated emissions above 1GHz

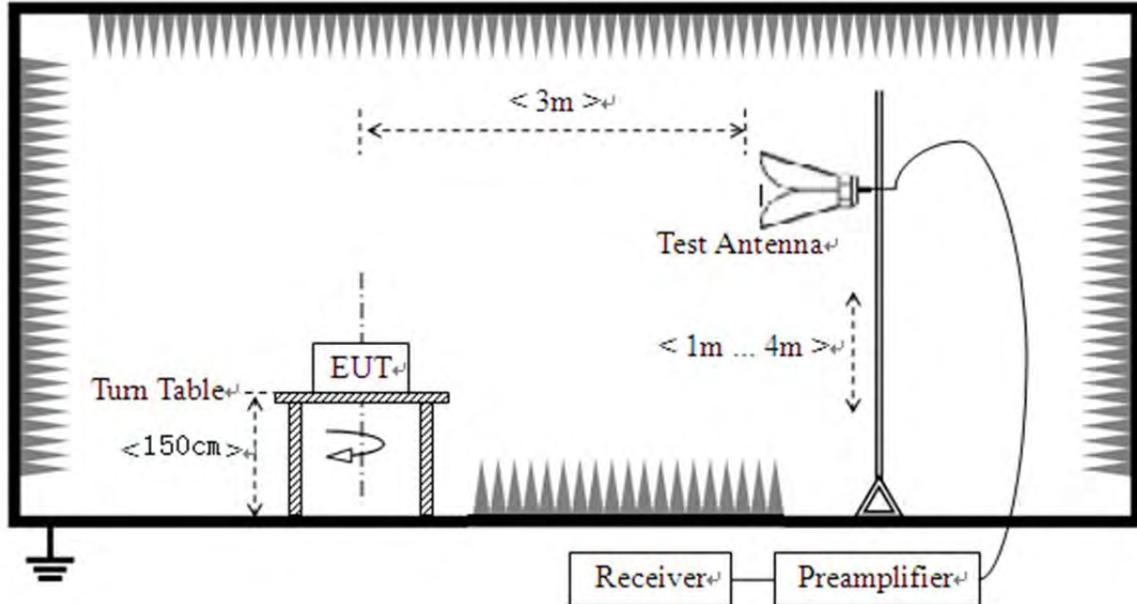

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading





For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

### 2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**802.11b Test Mode**

Plots for Channel = 1

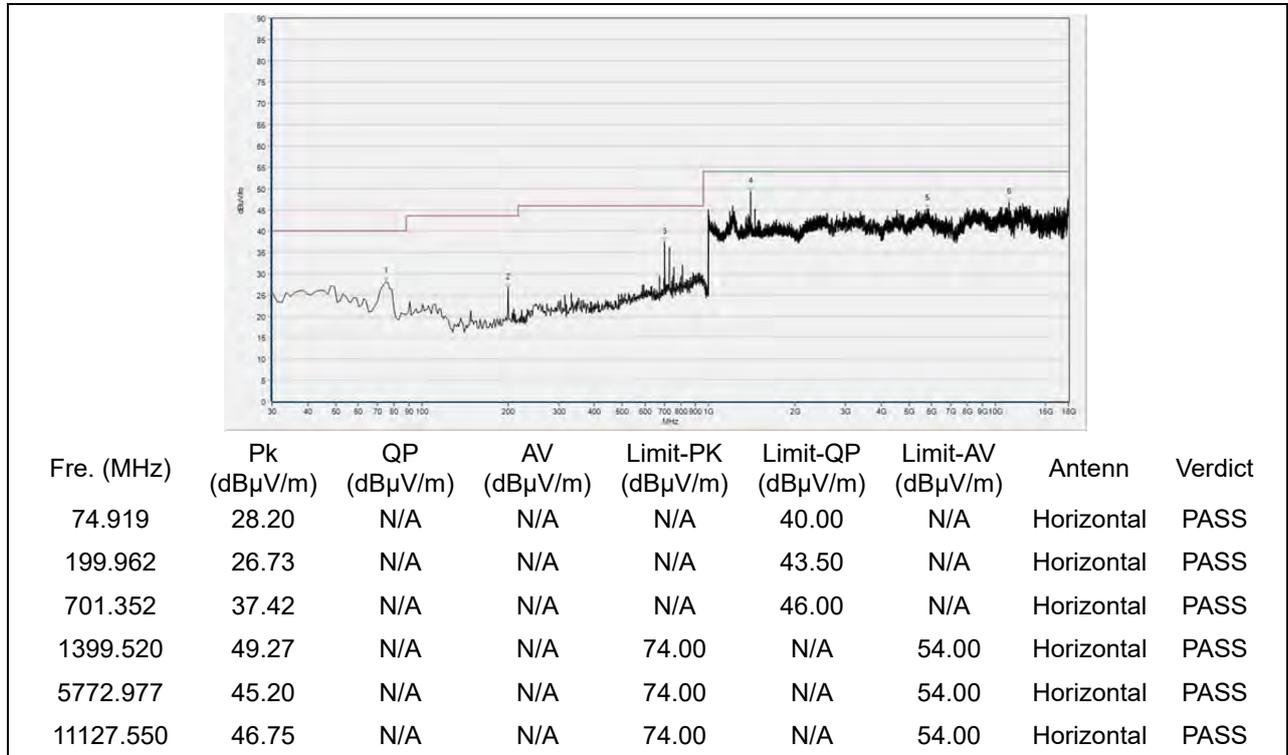


(Antenna Horizontal, 30MHz to 18GHz)

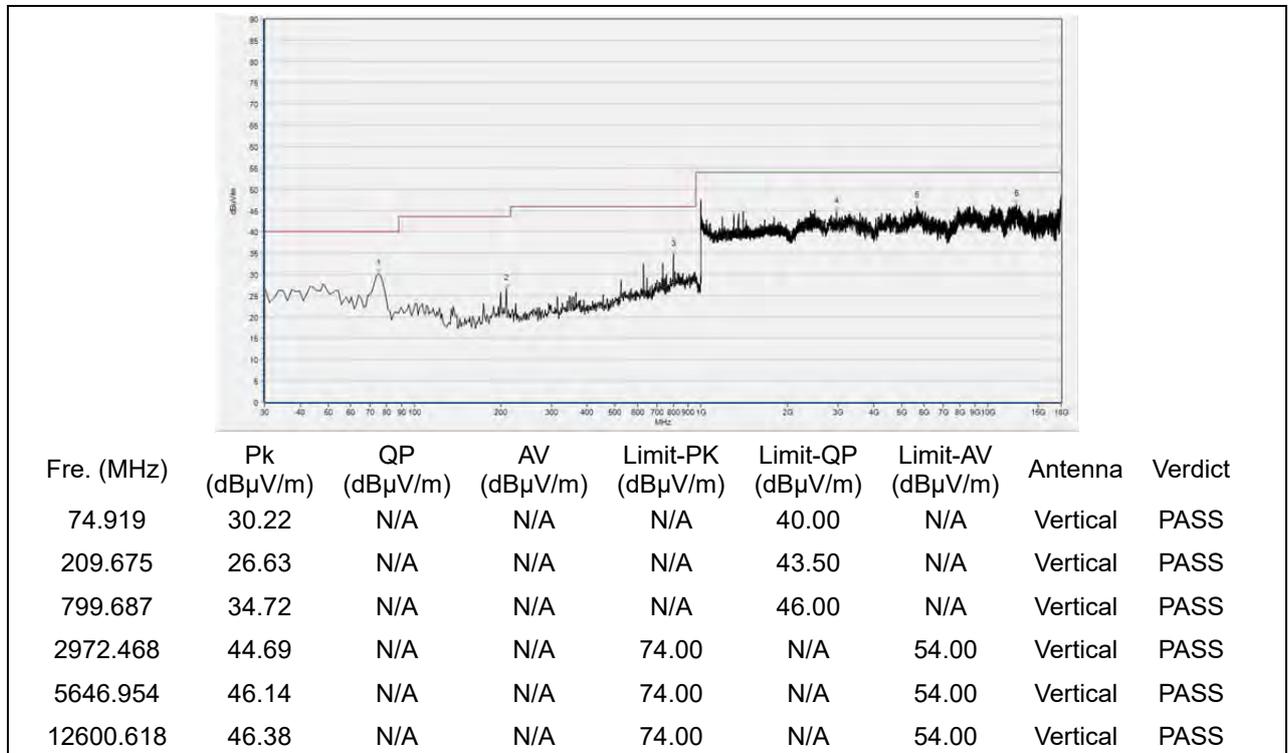


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 6

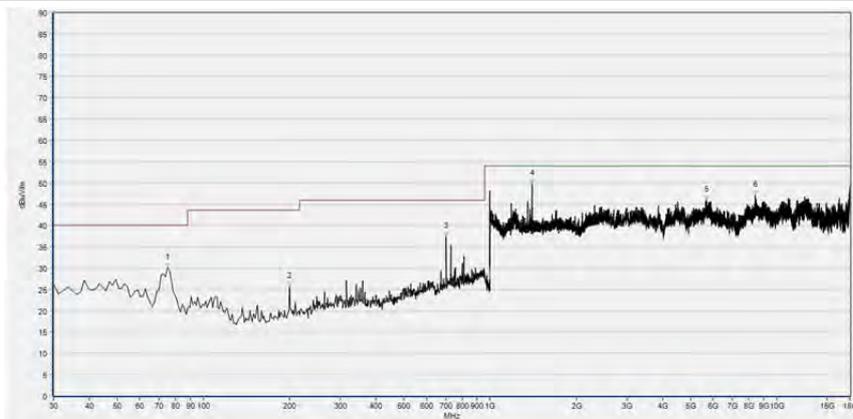

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	29.93	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.962	25.64	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.352	37.35	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1400.160	49.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5672.159	45.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8419.458	47.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

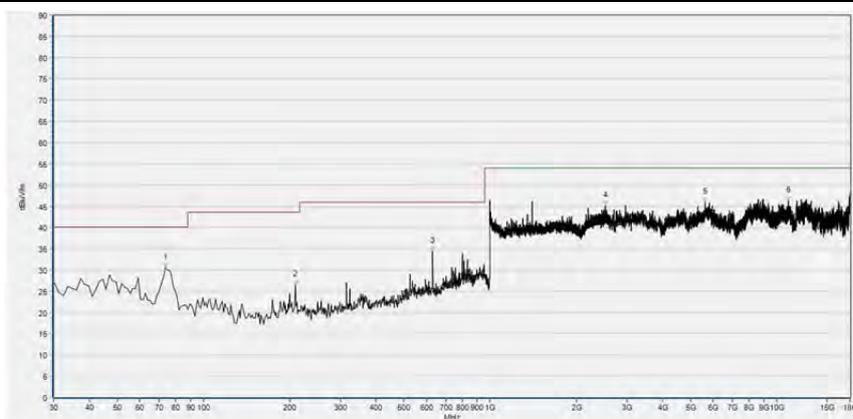

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
73.705	30.48	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
209.675	26.47	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
629.725	34.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2519.968	45.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5621.749	45.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10959.520	46.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 11

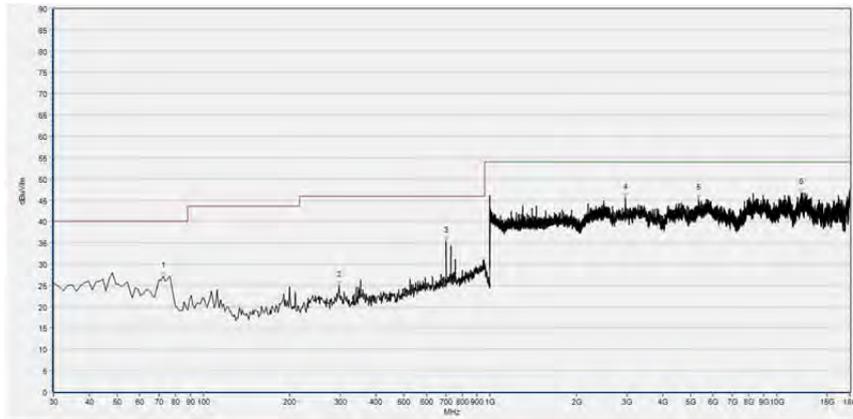

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.491	27.18	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
297.084	24.92	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.352	35.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2969.667	45.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5338.898	45.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12149.736	46.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

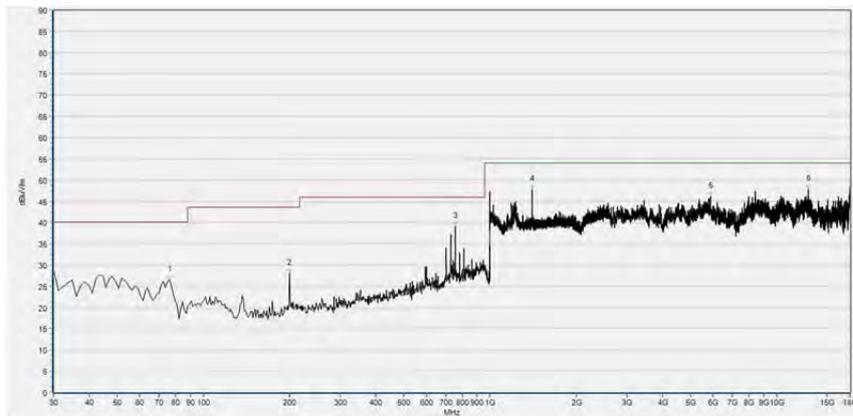


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	A tenna	Verdict
76.133	26.50	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.962	27.94	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
755.982	39.02	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1400.160	47.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5868.194	46.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12905.874	47.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11g Test Mode**

Plots for Channel = 1

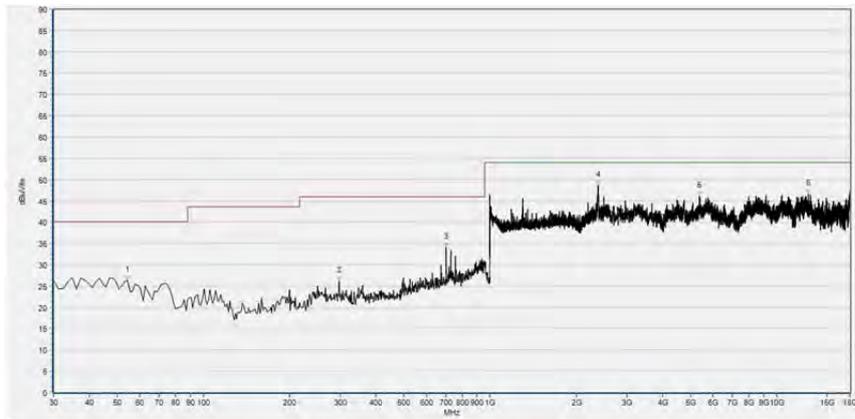

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
54.280	26.28	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
297.084	26.21	N/A	N/A <td N/A	46.00	N/A	Horizontal	PASS	
701.352	34.08	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2382.313	48.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5380.906	46.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12877.869	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

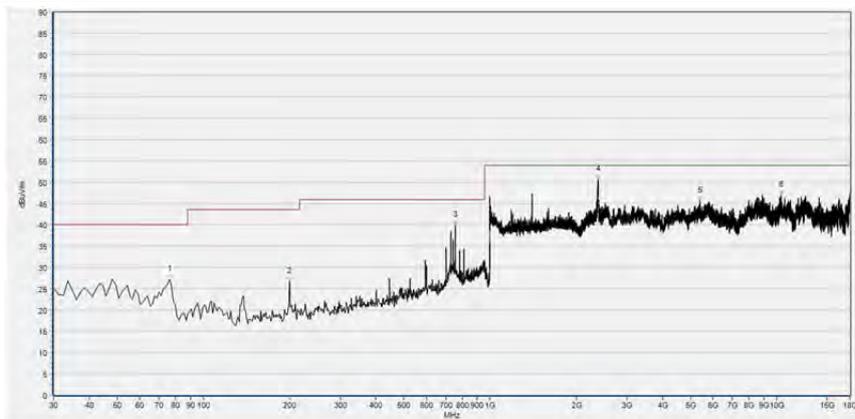

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
76.133	27.11	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.962	26.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
755.982	39.86	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2384.234	50.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5386.507	45.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10360.211	46.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 6

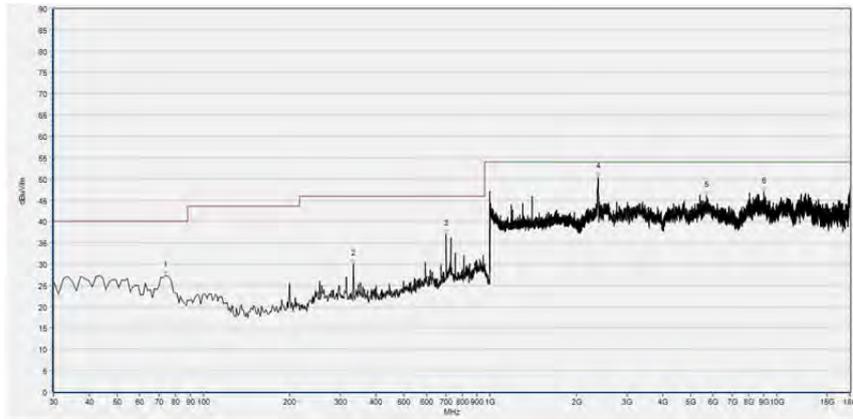

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
73.705	27.37	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
333.504	29.94	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.352	37.12	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2384.234	50.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5697.363	46.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9010.366	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

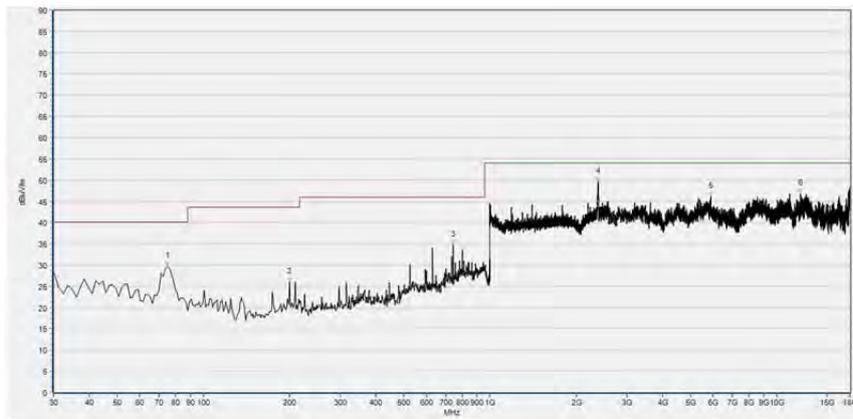

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	29.66	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.962	25.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
742.628	34.66	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2384.234	49.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5896.199	46.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12121.731	46.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 11

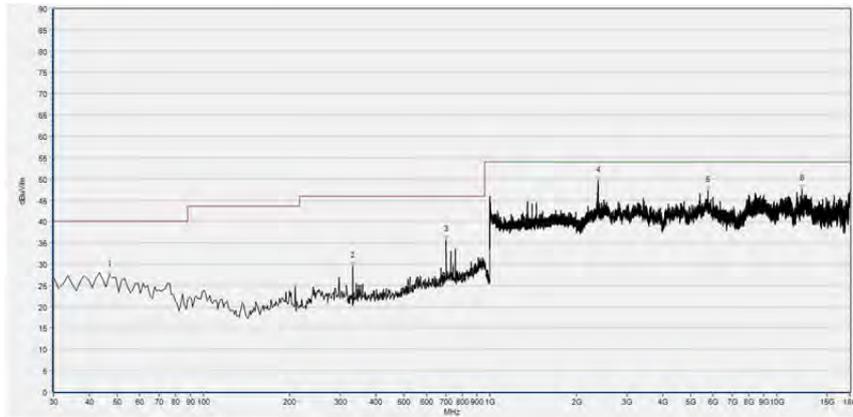

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
46.996	27.47	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.290	29.53	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.352	35.67	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2381.032	49.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5758.974	47.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12211.348	47.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

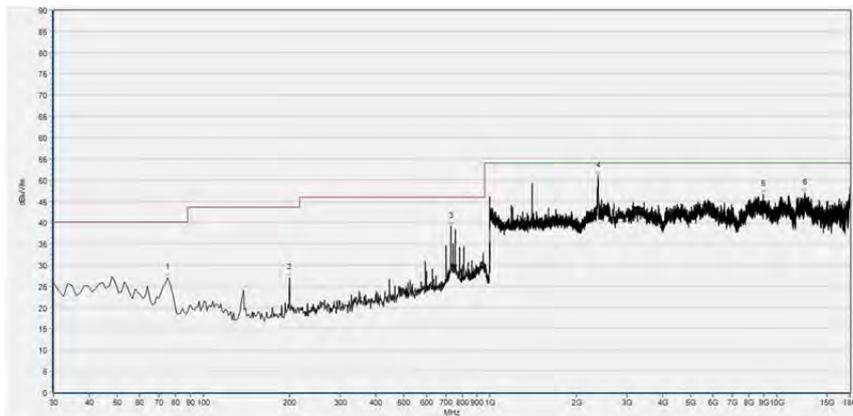


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	27.04	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.962	26.91	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
729.274	39.12	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2379.112	50.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8987.961	46.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12536.207	46.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n(HT20) Test Mode**

Plots for Channel = 1

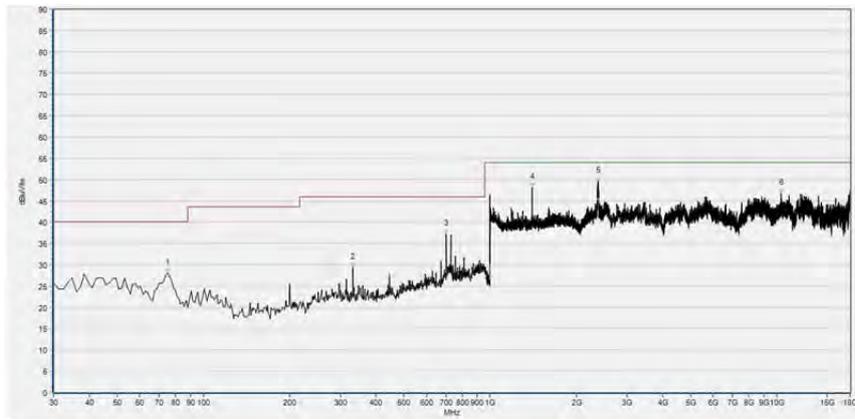

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	27.94	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.290	29.37	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.352	37.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1399.520	48.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2379.752	49.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10346.208	46.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

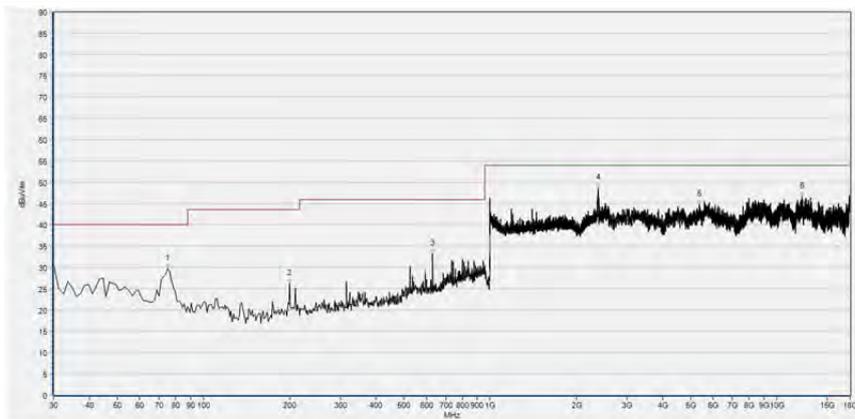


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	29.68	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.962	26.20	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
629.725	33.25	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2384.234	48.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5361.302	44.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12208.547	46.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel = 6

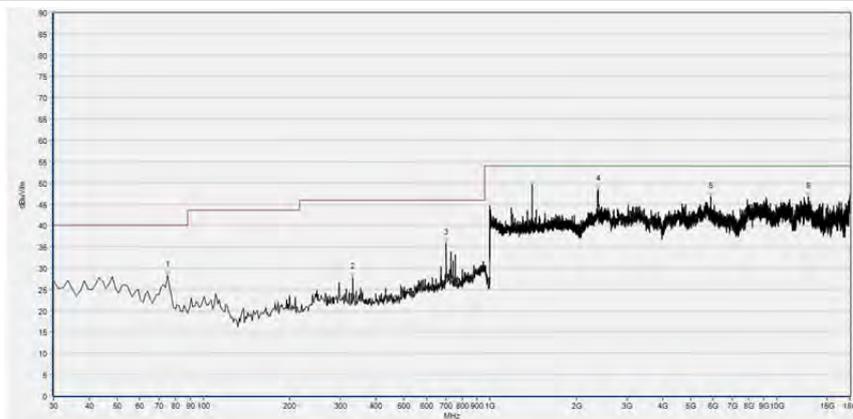

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	28.30	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.290	27.81	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.352	35.92	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2378.471	48.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5870.995	46.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12900.273	46.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

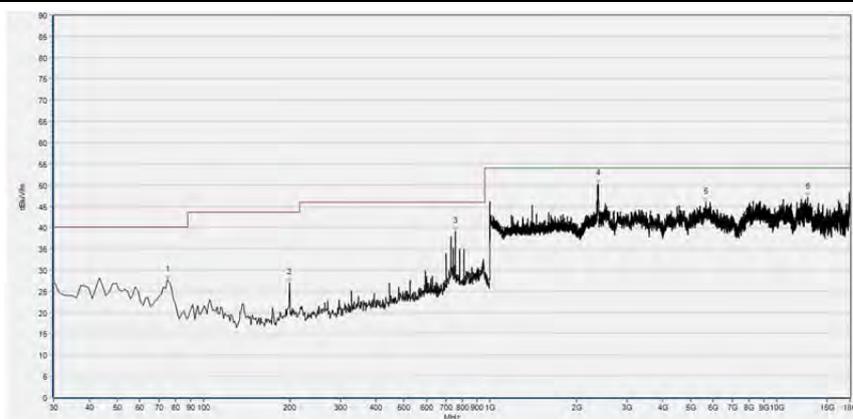

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.919	27.63	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.962	26.95	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
755.982	39.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2384.874	50.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5666.558	45.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12779.851	47.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 11

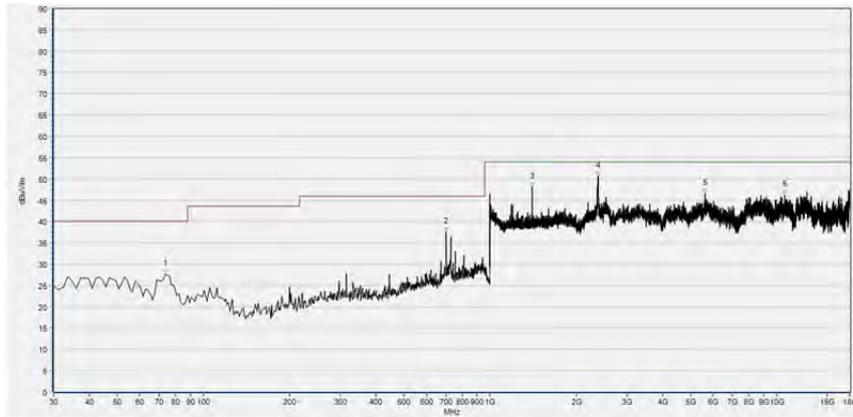

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
73.705	27.61	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
701.352	37.56	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1399.520	48.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2379.112	50.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5610.547	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10654.264	46.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

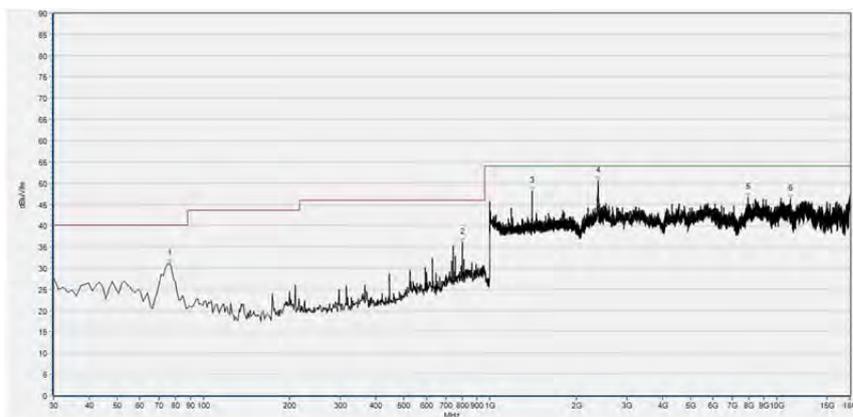

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
76.133	31.06	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
799.687	36.01	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1399.520	48.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2384.874	50.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7920.967	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11152.755	46.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Attenuator 1	(N/A.)	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

##### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2019.08.13	2020.08.12
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

##### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2019.07.29	2020.07.28
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2019.07.29	2020.07.28
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2019.07.29	2020.07.28
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————