



TEST REPORT

APPLICANT : Anker Innovations Limited
PRODUCT NAME : Nebula Cosmos Max
MODEL NAME : D2150
BRAND NAME : NEBULA
FCC ID : 2AOKB-D2150
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2020-04-28
TEST DATE : 2020-05-05 to 2020-06-30
ISSUE DATE : 2020-07-20

Edited by: Chen Bilian
Chen Bilian (Rapporteur)
Approved by: Peng Huarui
Peng Huarui(Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3
 - 1.1. Applicant and Manufacturer Information 3
 - 1.2. Equipment Under Test (EUT) Description 3
 - 1.3. Modulation Type and Data Rate of EUT 5
 - 1.4. The Channel Number and Frequency 6
 - 1.5. Test Standards and Results 7
 - 1.6. Environmental Conditions 8
- 2. 47 CFR Part 15E Requirements 9
 - 2.1. Antenna Requirement 9
 - 2.2. Duty Cycle of the Test Signal 10
 - 2.3. Maximum Conducted Output Power 15
 - 2.4. Emission Bandwidth 19
 - 2.5. Peak Power spectral density 40
 - 2.6. Frequency Stability 61
 - 2.7. Conducted Emission 63
 - 2.8. Restricted Frequency Bands 67
 - 2.9. Radiated Emission 90
- Annex A Test Uncertainty 123
- Annex B Testing Laboratory Information 124

Change History		
Version	Date	Reason for change
1.0	2020-07-20	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited
Applicant Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer:	Anker Innovations Limited
Manufacturer Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

1.2. Equipment Under Test (EUT) Description

Product Name:	Nebula Cosmos Max	
Serial No:	(N/A, marked #1 by test site)	
Hardware Version:	A435C V3.0	
Software Version:	ATV9.0.2	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n(HT20), 802.11n(HT40) 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80),	
Operating Frequency Range:	5.180 GHz- 5.240GHz;5.745GHz- 5.825GHz	
Channel Number:	Refer to 1.4	
Antenna Type:	FPC Antenna	
Antenna Gain:	ANT 1: 3.5dBi; ANT 2: 2.3dBi	
Directional Gain:	6.51dBi _{Note 3}	
Accessory Information:	Adapter	
	Brand Name:	N/A
	Model No.:	HKA18019095-6C
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	19V \Rightarrow 9.47A
	Rated Input:	100-240V \sim 2.5A 50/60Hz



Note 1: The EUT has two antennas and supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n, 802.11ac modulation mode.

Modulation Mode:	TX Function
802.11n	2TX
802.11ac	2TX

Note 2: According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the maximum antenna gain in dBi, N_{ANT} is the number of outputs.

Note 3: For conducted test item Maximum conducted output Power and Peak Power spectral density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result(ANT 1) in this report.

Note 4: All radiation test items for 802.11n and 802.11ac modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT1) in this report.

Note5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate
802.11a/n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7
			QPSK	
			16QAM	
			64QAM	
802.11ac	20/40/80 (VHT20/40/80)	OFDM	BPSK	MCS0~MCS9
			QPSK	
			16QAM	
			64QAM	
			256QAM	

Note1: The worst-case mode(black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



1.4. The Channel Number and Frequency

Frequency Range: 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
Frequency Range: 5745-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the test signal	Jun 30, 2020	Tu Yanan	PASS	No deviation
3	15.407(a)	Maximum conducted output Power	May 19, 2020	Tu Yanan	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Jun 30, 2020	Tu Yanan	PASS	No deviation
5	15.407(a)	Maximum Power spectral density	Jun 30, 2020	Tu Yanan	PASS	No deviation
6	15.407(g)	Frequency Stability	May 5, 2020	Tu Yanan	PASS	No deviation
7	15.207	Conducted Emission	May 19, 2020	Huang Zhiye	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	May 13 & May 14, 2020	Peng Xuwei	PASS	No deviation
9	15.407(b)	Radiated Emission	May 14, 2020	Peng Xuwei	PASS	No deviation

Note1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

Note2: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.

Note3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12.5dB contains two parts that cable loss 2.5dB and Attenuator 10dB.



Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

Inside of the EUT have PIFA antennas coupled with the I-PEX connector. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description


Test Setup:

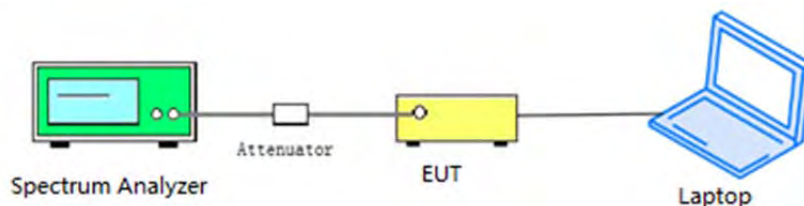


The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure


KDB 789033 Section B was used in order to prove compliance.

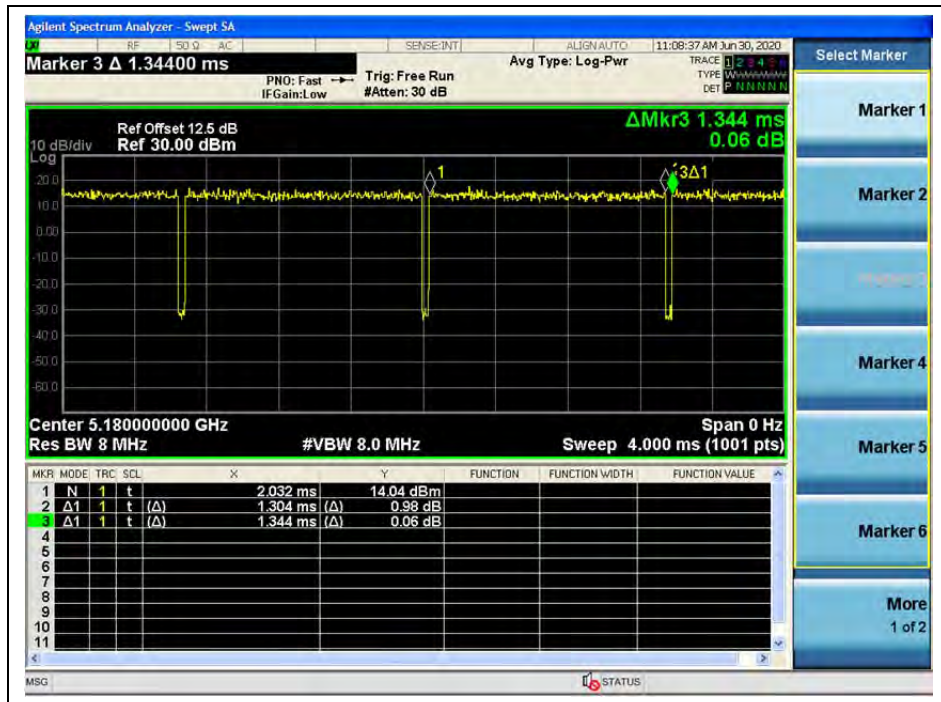


(CH36_5180MHz_802.11n(HT20))

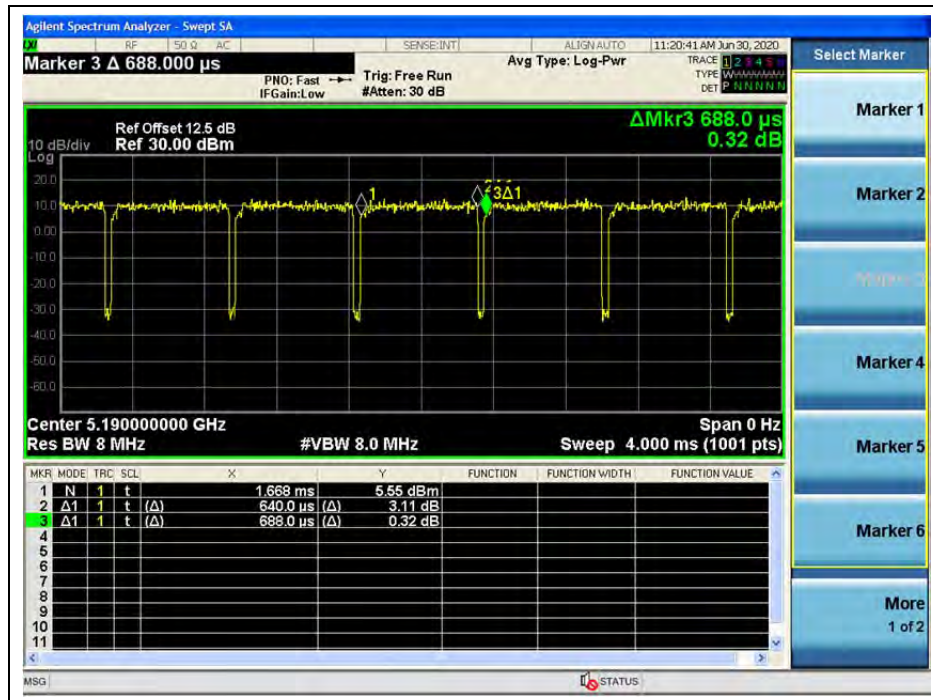


(CH38_5190MHz_802.11n(HT40))

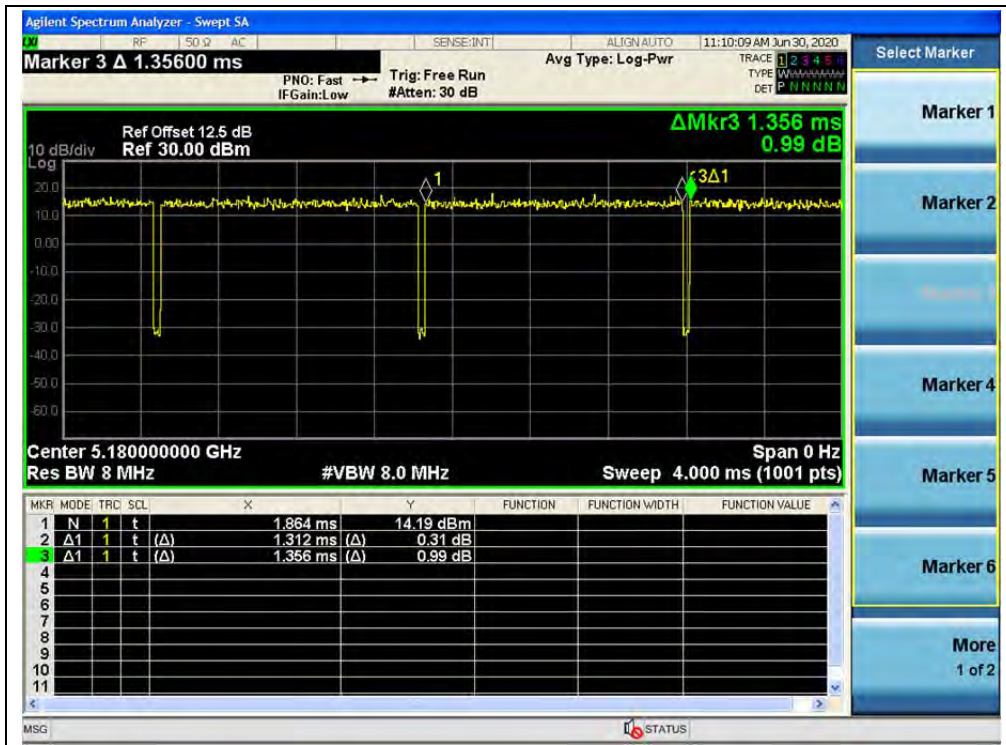

(CH36_5180MHz_802.11ac(VHT20))

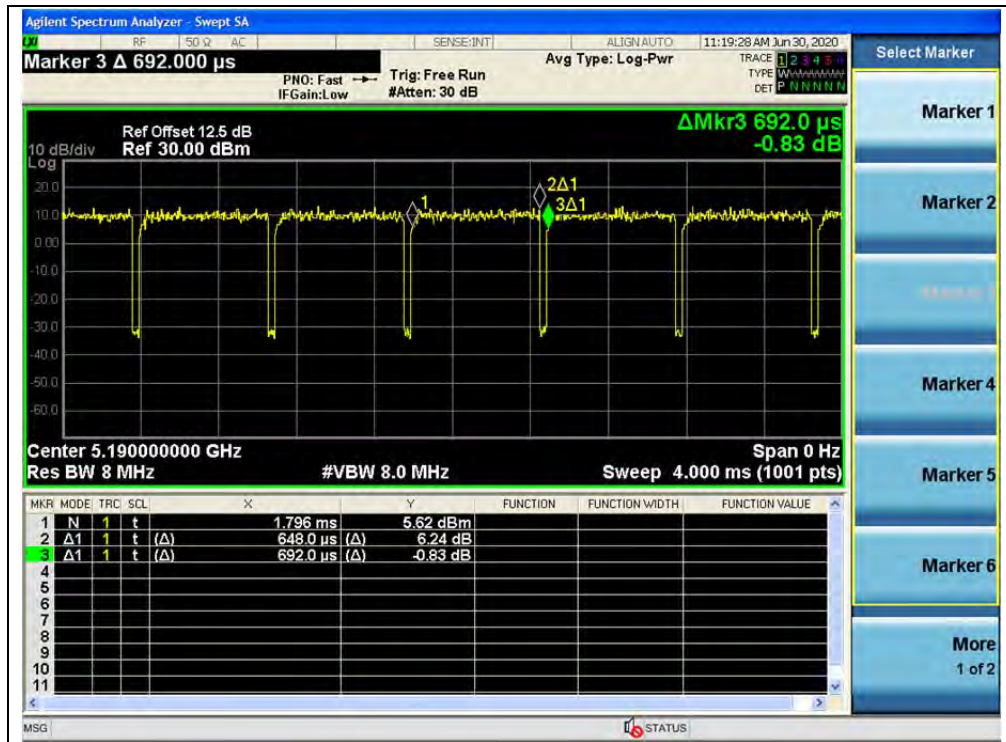

(CH38_5190MHz_802.11ac(VHT40))

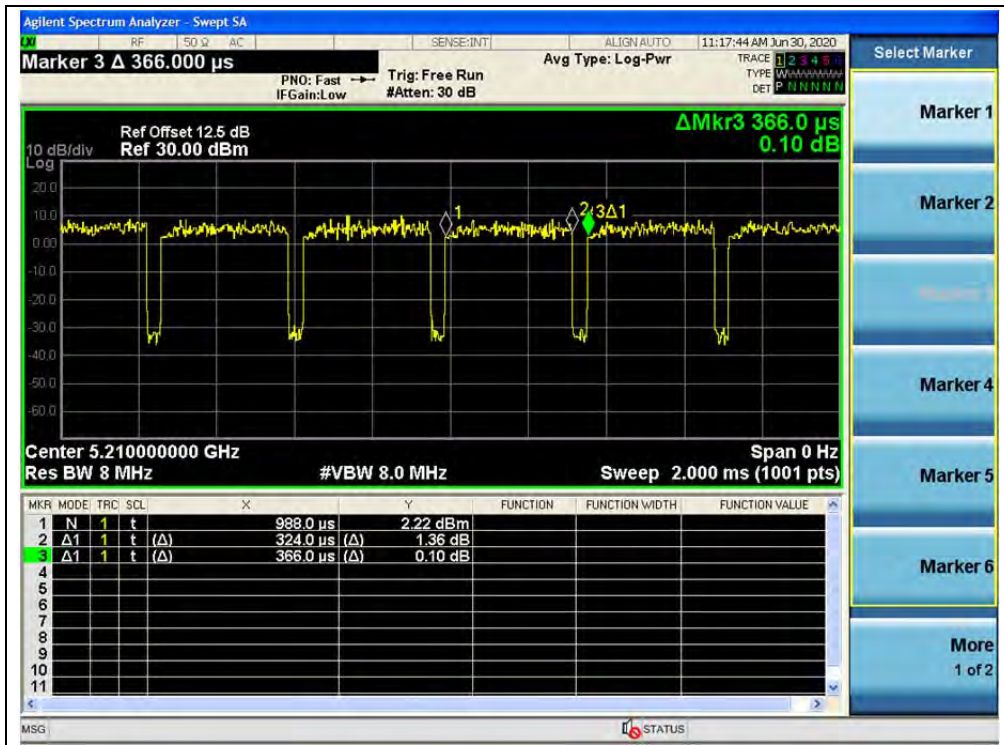

(CH42_5210MHz_802.11ac(VHT80))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10 \log(N_{\text{ANT}})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.3.2. Test Description

Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

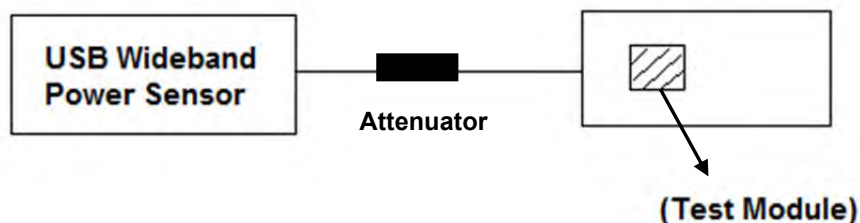

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.



2.3.3. Test Result

Maximum Average Conducted Output Power

802.11a Test mode

Frequency (MHz)	Average Power						Limit		Verdict
	Measured		Duty Factor	Duty factor Calculated					
	ANT1	ANT2		ANT1		ANT2			
	dBm	dBm		dBm	W	dBm	W	dBm	
5180	17.23	17.12	0.12	17.35	0.889	17.24	0.053	24	0.251
5200	17.31	17.08		17.43	0.054	17.2	0.052		
5240	17.25	17.05		17.37	0.055	17.17	0.052		
5745	17.15	17.04		17.27	0.055	17.16	0.052	30	1
5785	17.33	16.78		17.45	0.053	16.9	0.049		
5825	17.40	17.23		17.52	0.056	17.35	0.054		

802.11n (HT20) Test mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor			
	ANT1	ANT2		W	dBm	dBm	
5180	17.23	16.89	0.13	0.105	20.21	23.49	0.223
5200	17.36	17.09		0.109	20.37		
5240	17.35	16.92		0.107	20.29		
5745	16.56	16.22		0.090	19.54	29.49	0.889
5785	16.47	16.17		0.088	19.44		
5825	16.61	16.32		0.091	19.59		

Note: Directional gain = 3.5dBi + 10log(2) = 6.51dBi > 6dBi, so the power limit shall be 23.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.



802.11n (HT40) Test mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor			
	ANT1	ANT2		W	dBm	dBm	
5190	16.33	16.02	0.31	0.089	19.49	23.49	0.223
5230	16.41	16.11		0.091	19.59		
5755	16.28	16.08		0.089	19.49	29.49	0.889
5795	16.37	16.09		0.090	19.54		

Note: Directional gain = 3.5dBi +10log(2) =6.51dBi>6dBi, so the power limit shall be 23.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

802.11ac (VHT20) Test mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor			
	ANT1	ANT2		W	dBm	dBm	
5180	17.28	16.40	0.13	0.100	20.00	23.49	0.223
5200	17.33	16.64		0.103	20.13		
5240	17.42	16.73		0.106	20.25		
5745	17.18	16.88		0.104	20.17	29.49	0.889
5785	17.26	16.59		0.102	20.09		
5825	17.44	17.03		0.109	20.37		

Note: Directional gain = 3.5dBi +10log(2) =6.51dBi>6dBi, so the power limit shall be 23.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

802.11ac (VHT40) Test mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor			
	ANT1	ANT2		W	dBm	dBm	
5190	16.35	16.13	0.29	0.090	19.54	23.49	0.223
5230	16.41	16.08		0.090	19.54		
5755	16.11	15.82		0.084	19.24	29.49	0.889
5795	16.23	15.79		0.085	19.29		

Note: Directional gain = 3.5dBi +10log(2) =6.51dBi>6dBi, so the power limit shall be 23.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.



802.11ac (VHT80) Test mode

Frequency (MHz)	Average Power (dBm)					Limit (dBm)		Verdict
	Measured		Duty Factor	Total Power with Duty Factor		dBm	W	
	ANT1	ANT2		W	dBm			
	dBm	dBm						
5210	15.48	15.11	0.53	0.077	18.86	23.49	0.223	PASS
5775	15.32	15.04		0.075	18.75	29.49	0.889	

Note: Directional gain = 3.5dBi + 10log(2) = 6.51dBi > 6dBi, so the power limit shall be 23.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

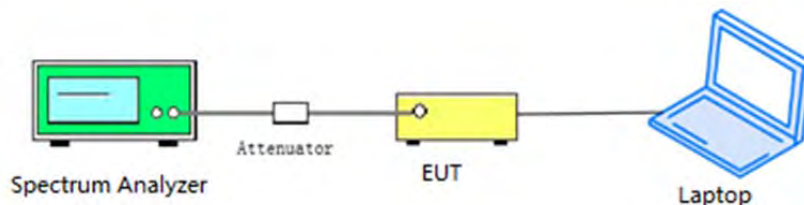

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.10
40	5200	20.90
48	5240	21.13
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	16.56
157	5785	16.56
165	5825	16.53



B. Test Plots



(Channel 36,5180MHz, 802.11a)



(Channel 40, 5200 MHz, 802.11a)



(Channel 48, 5240MHz, 802.11a)



(Channel 149, 5745MHz, 802.11a)



(Channel 157,5785MHz, 802.11a)



(Channel 165,5825MHz, 802.11a)



802.11n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.39
40	5200	21.09
48	5240	21.05
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.79
157	5785	17.77
165	5825	17.79

B. Test Plots




(Channel 36,5180MHz, 802.11n (HT20))

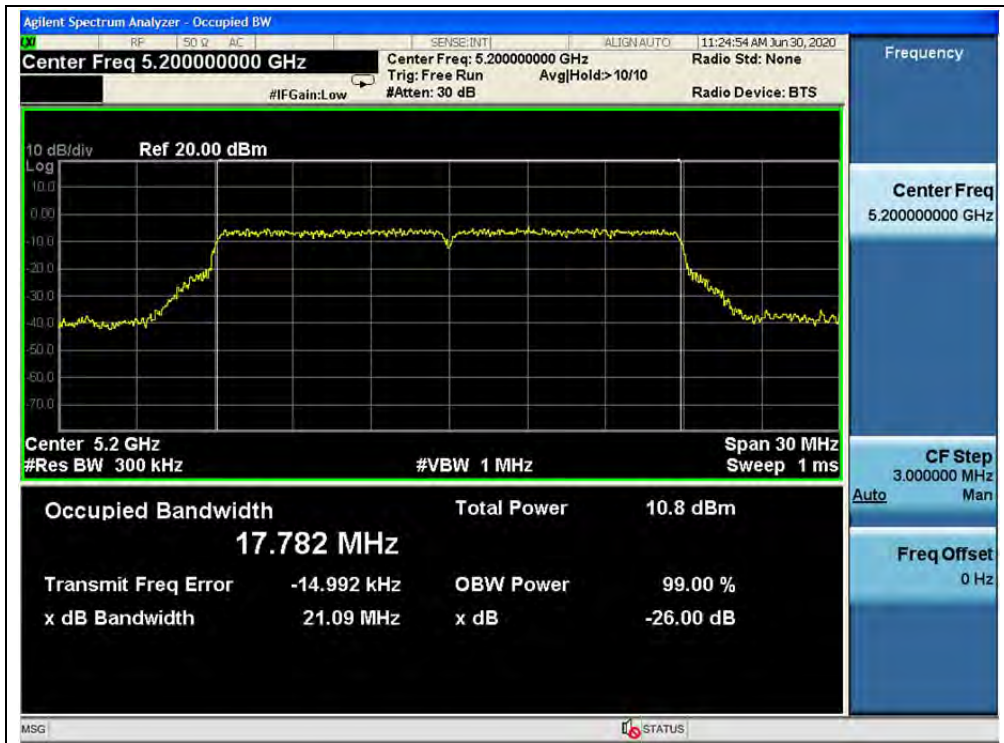

(Channel 40, 5200 MHz, 802.11n (HT20))




(Channel 48, 5240MHz, 802.11n (HT20))

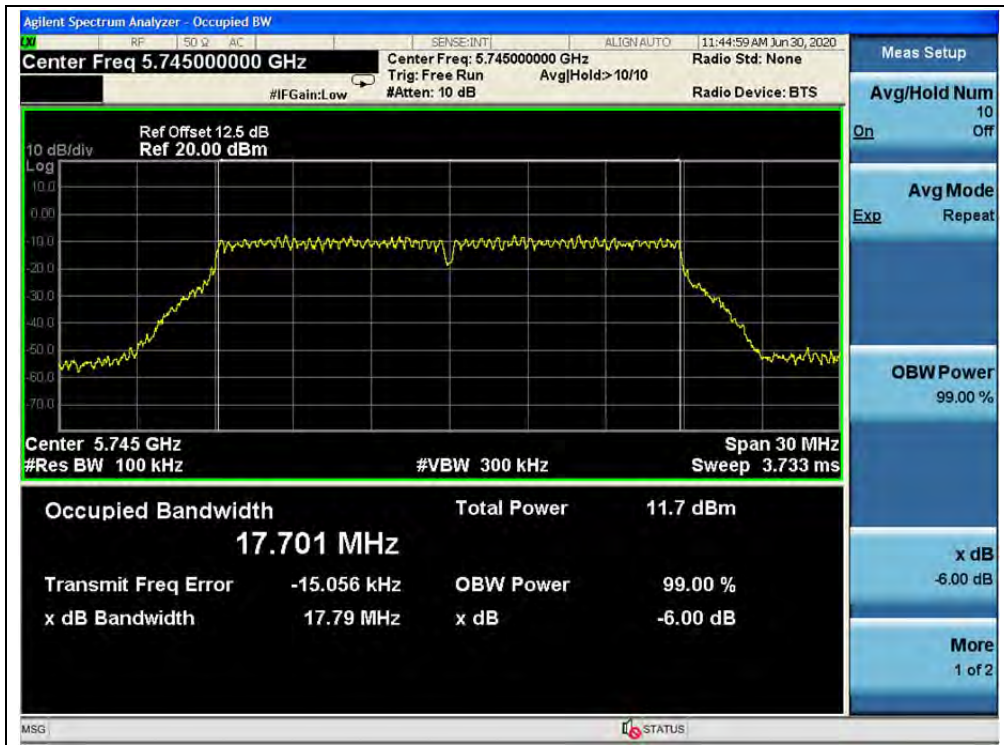

(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))

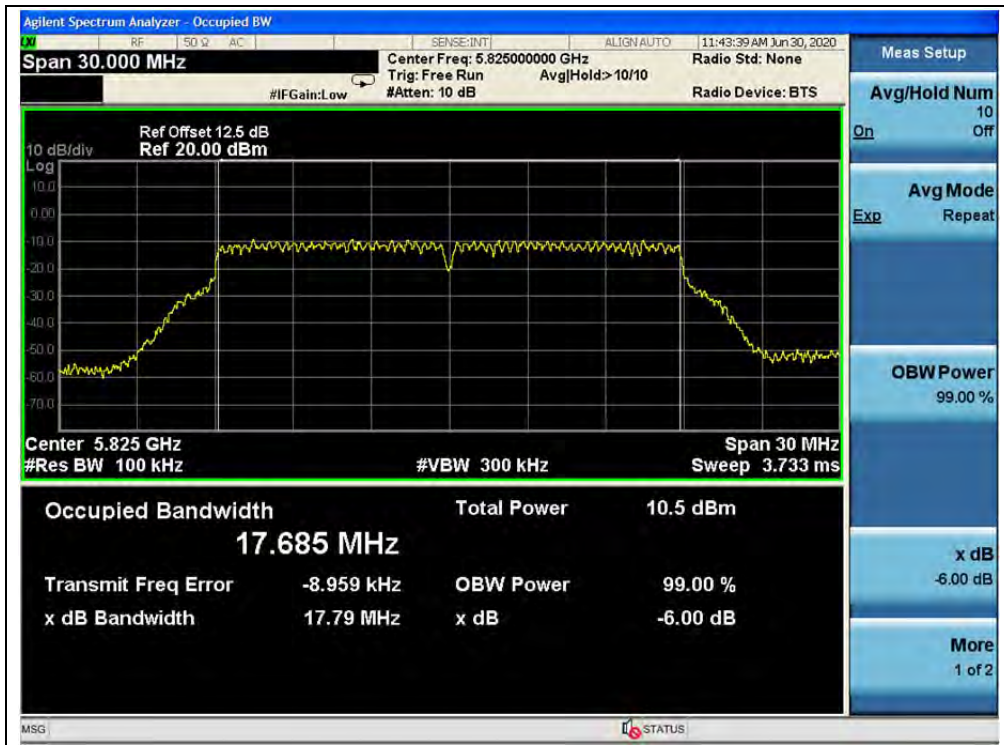

(Channel 165,5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	38.97
46	5230	39.20
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	36.52
159	5795	36.51


B. Test Plots




(Channel 38,5190MHz, 802.11n(HT40))

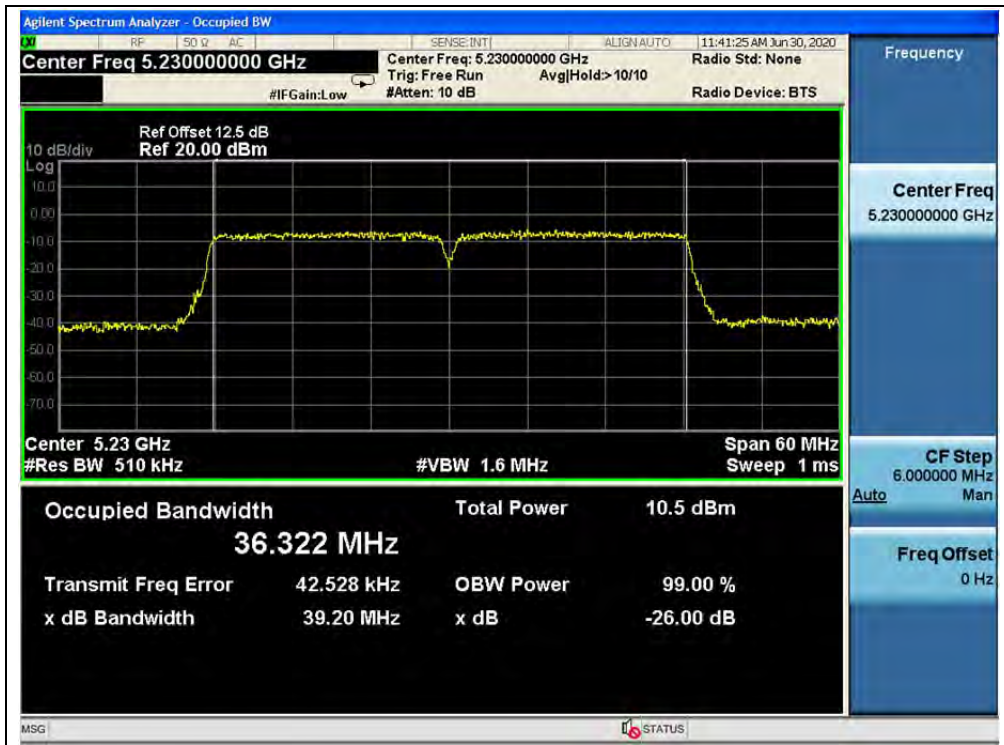

(Channel 46, 5230 MHz, 802.11n(HT40))

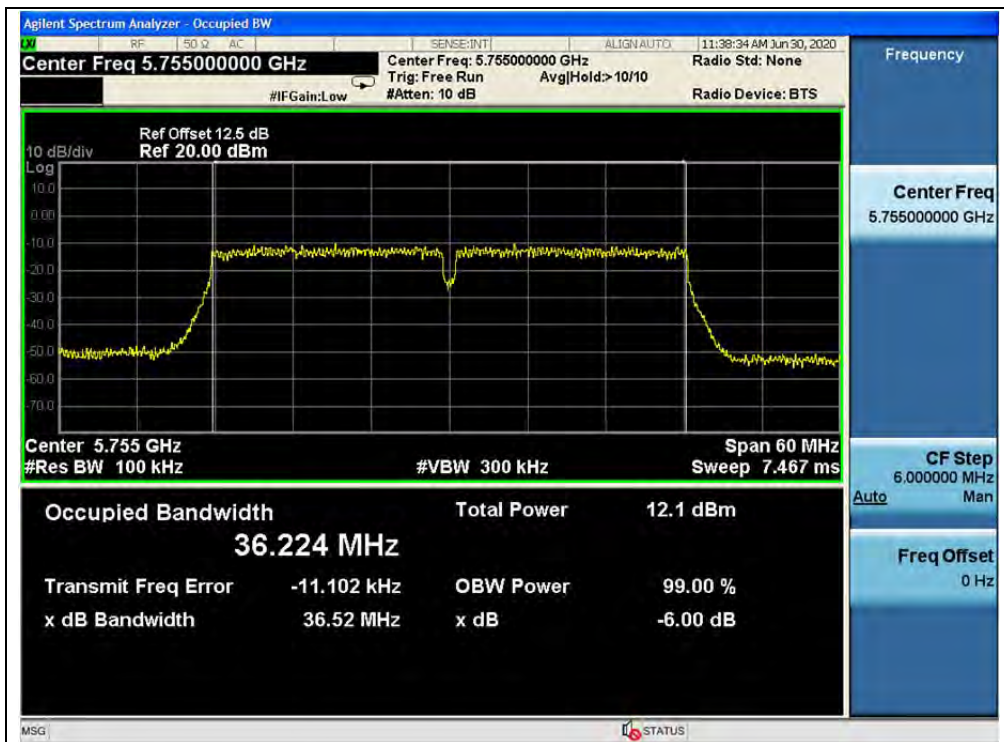

(Channel 151, 5755 MHz, 802.11n (HT40))

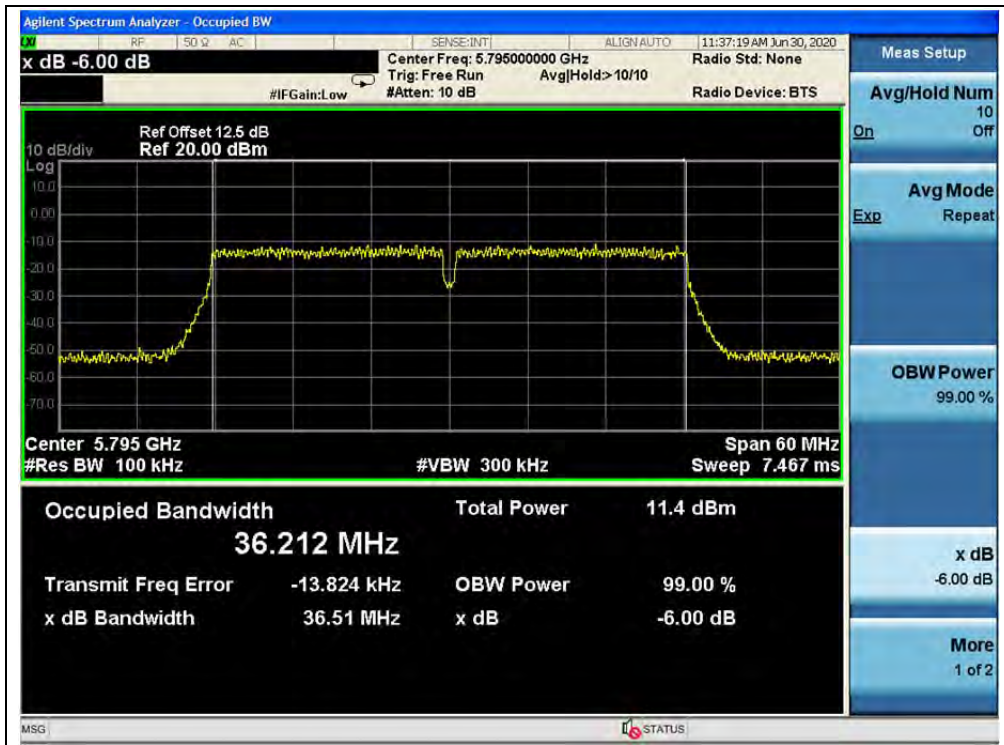

(Channel 159,5795MHz,802.11n(HT40))




802.11ac (VHT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	21.20
40	5200	21.34
48	5240	21.37
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	17.75
157	5785	17.76
165	5825	17.78

B. Test Plots

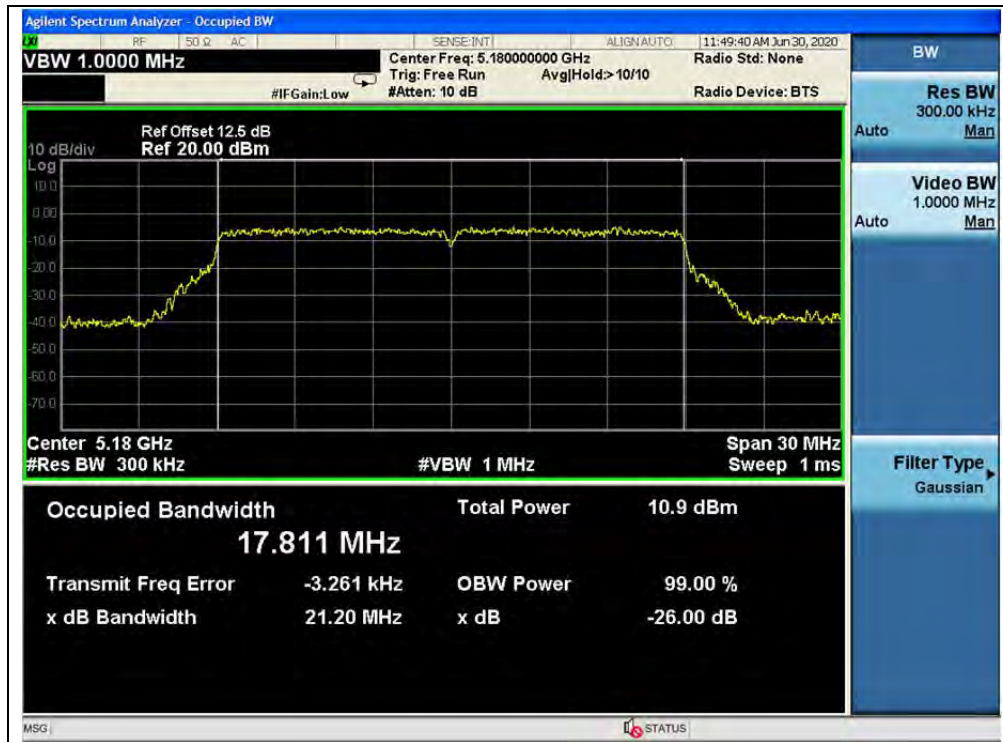


(Channel 36,5180MHz, 802.11ac (VHT20))



(Channel 40, 5200 MHz, 802.11ac (VHT20))



(Channel 48, 5240MHz, 802.11ac (VHT20))

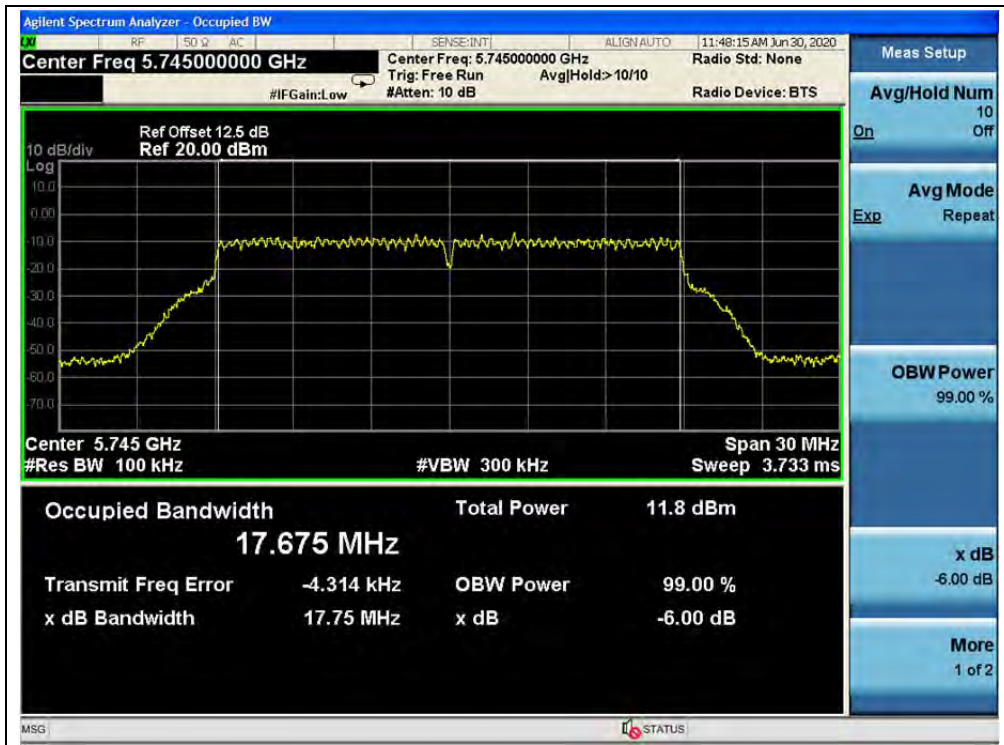

(Channel 149,5745MHz, 802.11 ac (VHT20))



(Channel 157,5785MHz, 802.11 ac (VHT20))



(Channel 165,5825MHz, 802.11 ac (VHT20))




802.11ac (VHT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	39.01
46	5230	39.21
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
151	5755	36.53
159	5795	36.48


B. Test Plots

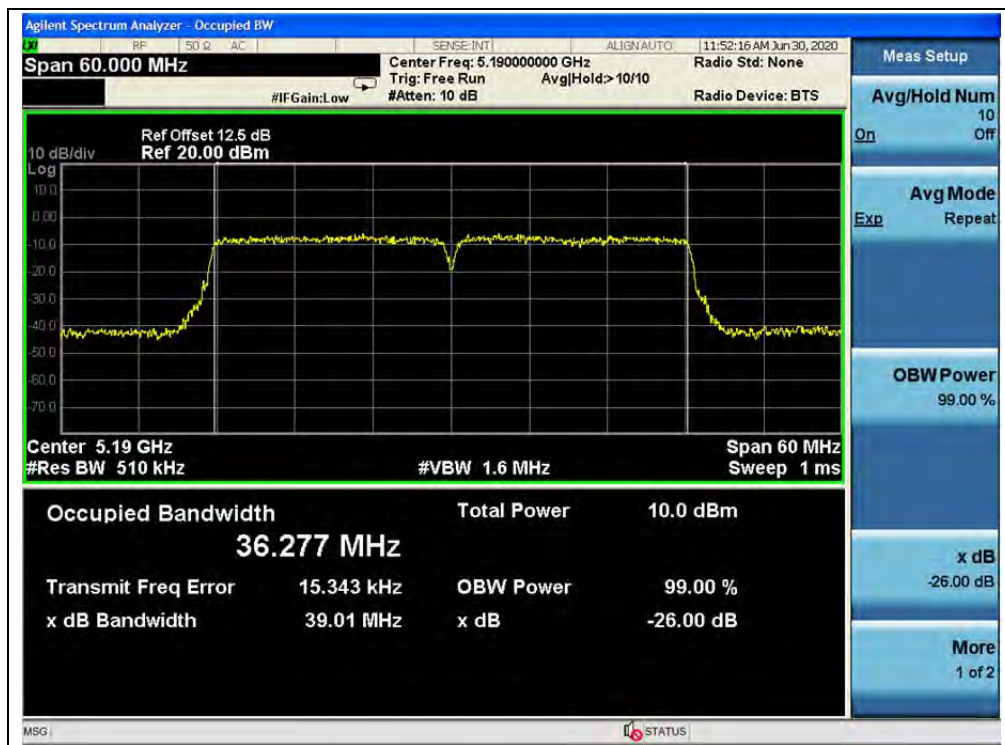


(Channel 38,5190MHz, 802.11ac (VHT40))

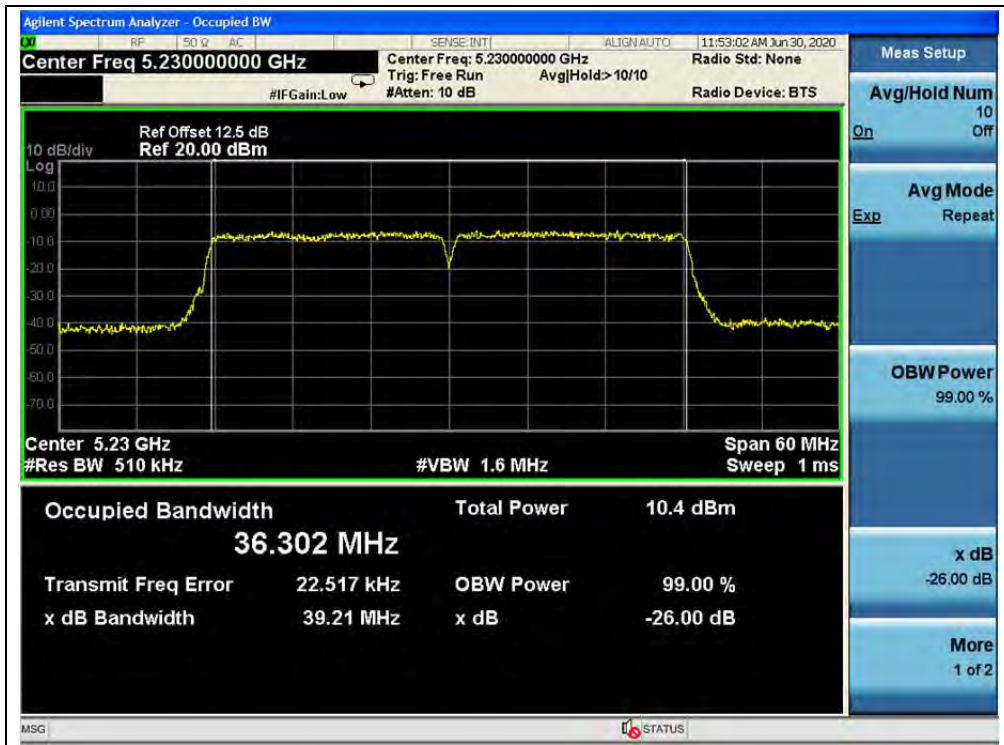

(Channel 46, 5230 MHz, 802.11ac (VHT40))

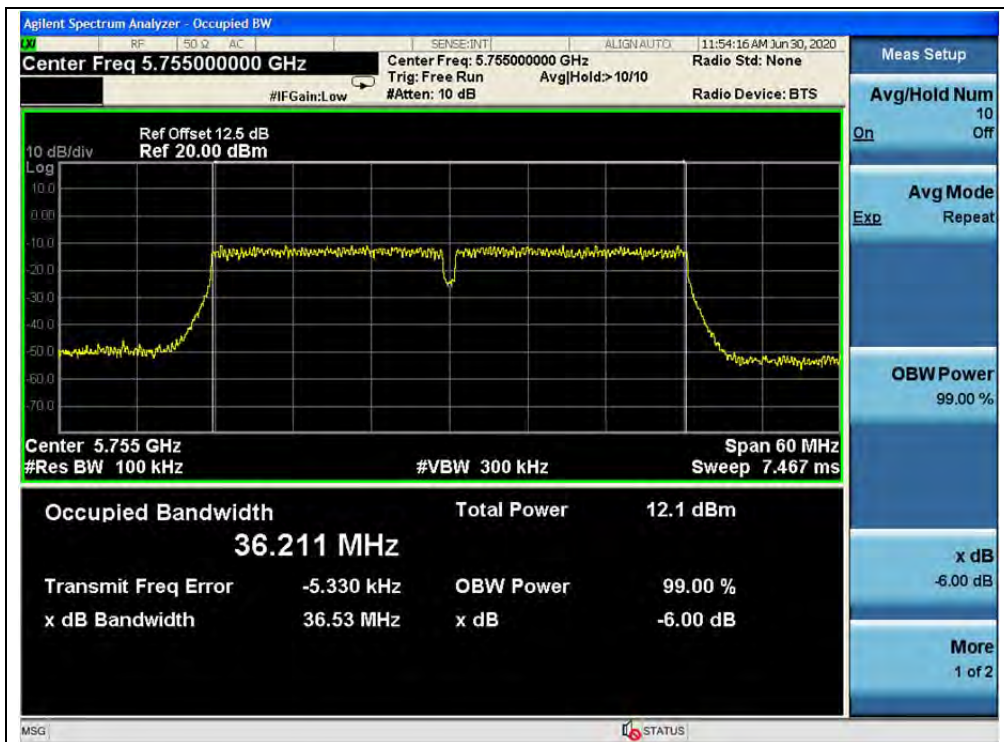

(Channel 151, 5755 MHz, 802.11ac (VHT40))

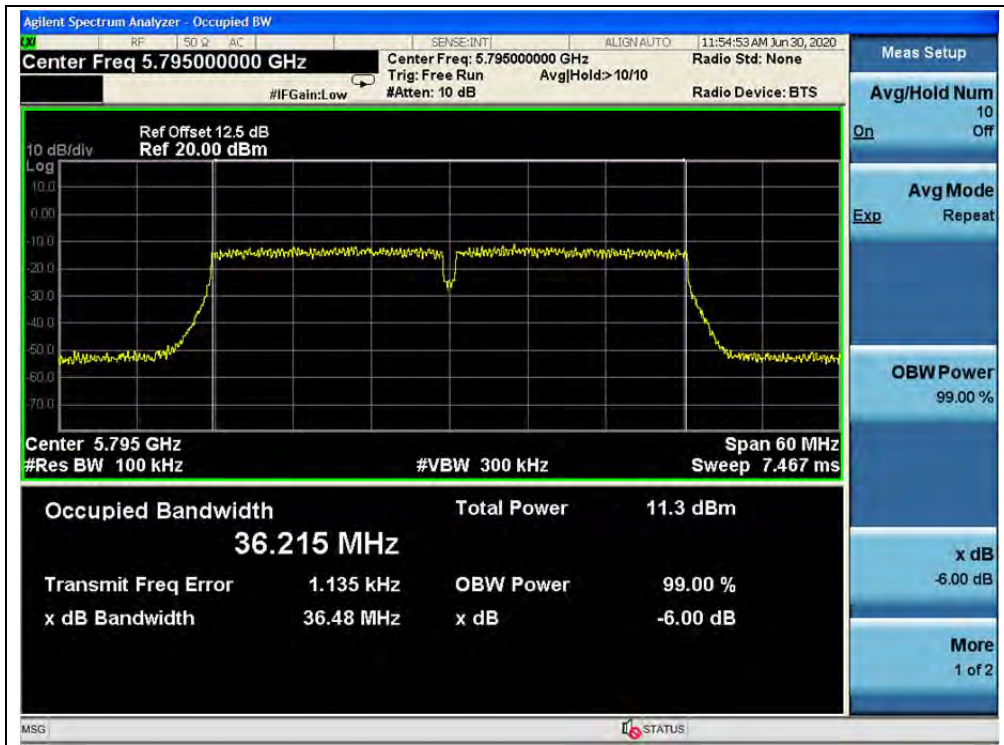

(Channel 159,5795MHz,802.11ac (VHT40))




802.11ac (VHT80) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	80.15
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
155	5775	76.48

B. Test Plots

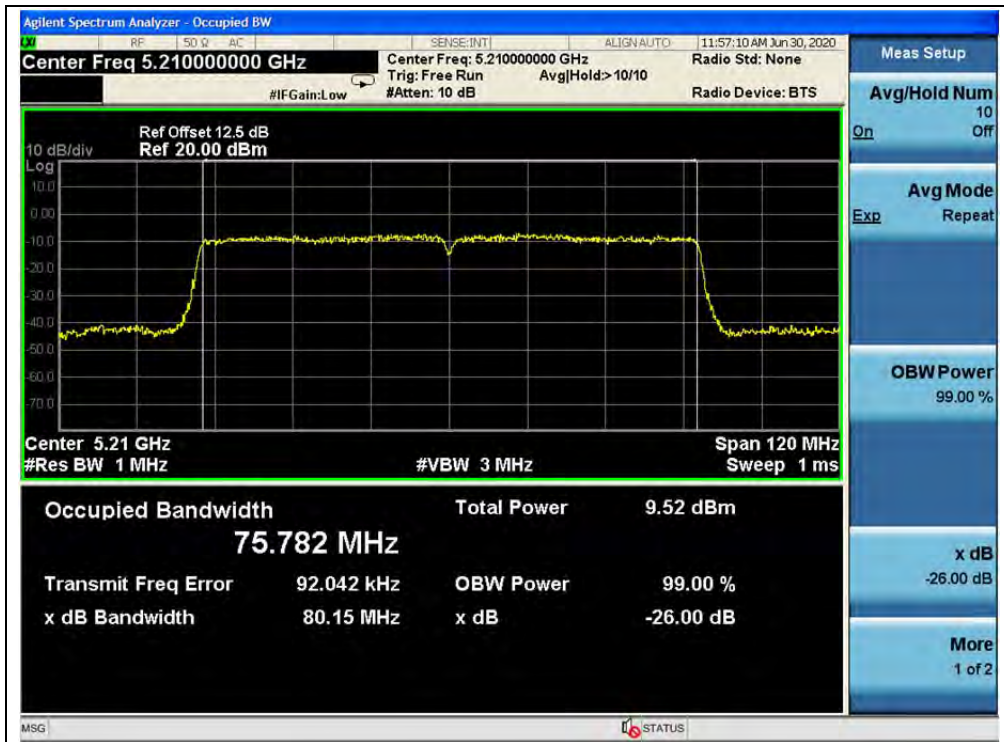

(Channel 42,5210MHz, 802.11ac (VHT80))

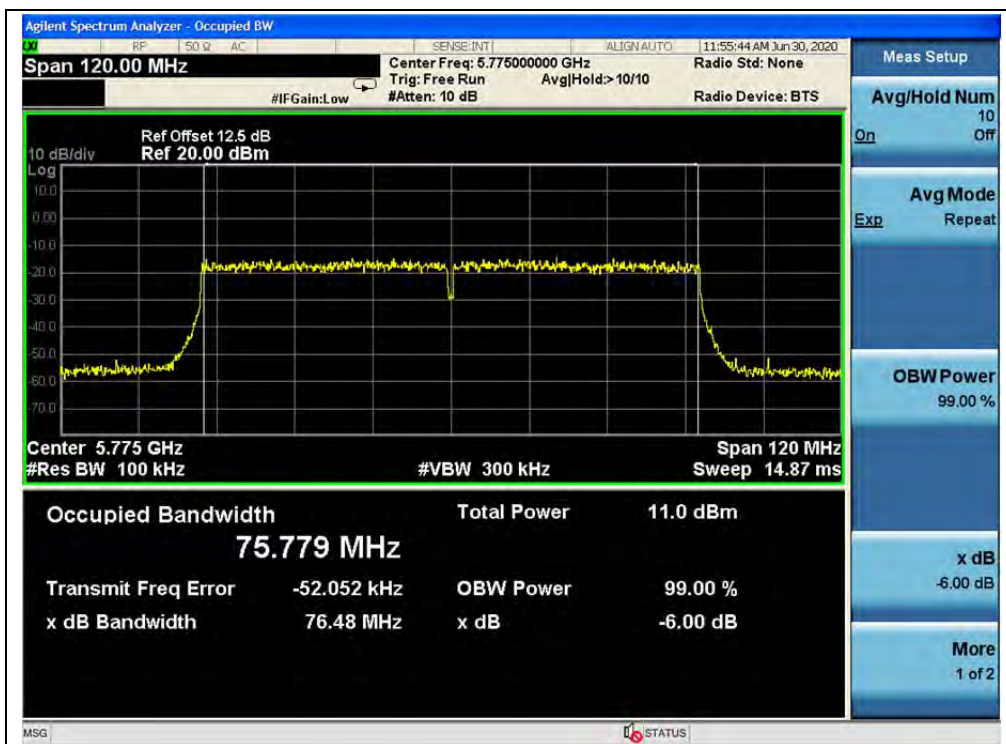

(Channel 155, 5775 MHz, 802.11ac (VHT80))

2.5. Peak Power spectral density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500KHz band.


If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

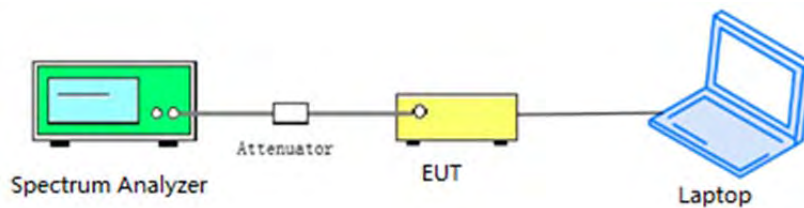

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.



2.5.3. Test Procedure

KDB 789033 Section F)Maximum Power Spectral Density (PSD) Method SA-1 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1 MHz. Set VBW ≥ 3 MHz.
- 3) Number of points in sweep ≥ 2 Span / RBW. Sweep time = auto.
- 4) Detector = Peak
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result

802.11a Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Corrected PPSD (dBm/MHz)		Limit (dBm/MHz)	Verdict
		ANT 1	ANT 2		ANT 1	ANT 2		
36	5180	0.95	0.21	0.12	1.07	0.33	11	PASS
40	5200	1.07	0.19		1.19	0.31		
48	5240	1.47	0.83		1.59	0.95		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Corrected PPSD (dBm/500KHz)		Limit (dBm/500KHz)	Verdict
		ANT 1	ANT 2		ANT 1	ANT 2		
149	5745	-0.96	-1.69	0.12	-0.84	-1.57	30	PASS
157	5785	-1.34	-2.57		-1.22	-2.45		
165	5825	-1.52	-3.05		-1.4	-2.93		



B. Test Plots




(Channel 36,5180MHz, 802.11a, ANT 1)



(Channel 40, 5200 MHz, 802.11a, ANT 1)



(Channel 48, 5240MHz, 802.11a, ANT 1)

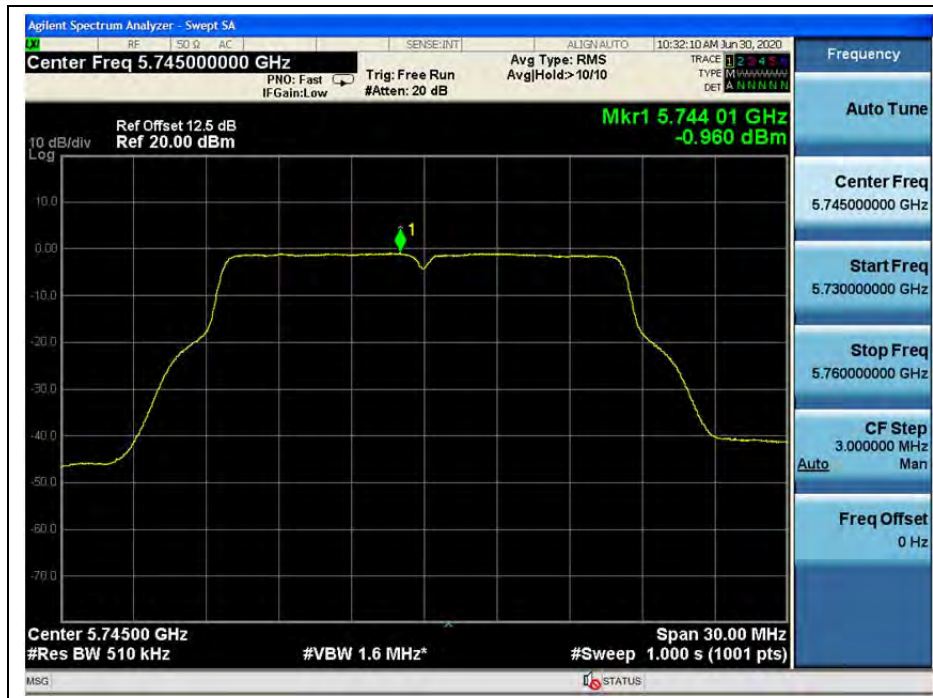

(Channel 149, 5745MHz, 802.11a, ANT 1)



(Channel 157,5785MHz, 802.11a, ANT 1)



(Channel 165,5825MHz, 802.11a, ANT 1)



802.11n (HT20) Test mode

C. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
		ANT 1	ANT 2				
36	5180	0.63	0.14	0.13	3.40	10.49	PASS
40	5200	0.70	0.11		3.43		
48	5240	1.39	0.70		4.07		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
		ANT 1	ANT 2				
149	5745	-1.12	-1.90	0.13	1.52	29.49	PASS
157	5785	-1.96	-3.08		0.53		
165	5825	-1.82	-3.38		0.48		

Note: Directional gain = 3.5dBi +10log(2) =6.51dBi >6dBi, so the power limit shall be 10.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

D. Test Plots



(Channel 36,5180MHz, 802.11n (HT20), ANT 1)



(Channel 40, 5200 MHz, 802.11n (HT20), ANT 1)



(Channel 48, 5240MHz, 802.11n (HT20), ANT 1)



(Channel 149,5745MHz, 802.11 n (HT20), ANT 1)



(Channel 157,5785MHz, 802.11 n (HT20), ANT 1)



(Channel 165,5825MHz, 802.11 n (HT20), ANT 1)



802.11n (HT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
		ANT 1	ANT 2				
38	5190	-3.21	-3.76	0.31	-0.47	10.49	PASS
46	5230	-2.60	-3.22		0.11		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
		ANT 1	ANT 2				
151	5755	-3.89	-4.50	0.31	-1.17	29.49	PASS
159	5795	-4.30	-5.62		-1.90		

Note: Directional gain = 3.5dBi + 10log(2) = 6.51dBi > 6dBi, so the power limit shall be 10.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

B. Test Plots



(Channel 38,5190MHz, 802.11n(HT40), ANT 1)



(Channel 46, 5230 MHz, 802.11n(HT40), ANT 1)



(Channel 151, 5755 MHz, 802.11n (HT40), ANT 1)



(Channel 159,5795MHz,802.11n(HT40), ANT 1)



802.11ac (VHT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
		ANT 1	ANT 2				
36	5180	0.69	0.15	0.14	3.44	10.49	PASS
40	5200	0.74	0.05		3.42		
48	5240	1.40	0.57		4.02		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
		ANT 1	ANT 2				
149	5745	-1.19	-1.84	0.14	1.51	29.49	PASS
157	5785	-2.11	-3.09		0.44		
165	5825	-1.95	-3.42		0.39		

Note: Directional gain = 3.5dBi +10log(2) =6.51dBi >6dBi, so the power limit shall be 10.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

B. Test Plots



(Channel 36, 5180 MHz, 802.11ac (VHT20), ANT 1)



(Channel 40, 5200 MHz, 802.11ac (VHT20), ANT 1)




(Channel 48, 5240MHz, 802.11ac (VHT20), ANT 1)



(Channel 149,5745MHz, 802.11ac (VHT20), ANT 1)



(Channel 157,5785MHz, 802.11ac (VHT20), ANT 1)

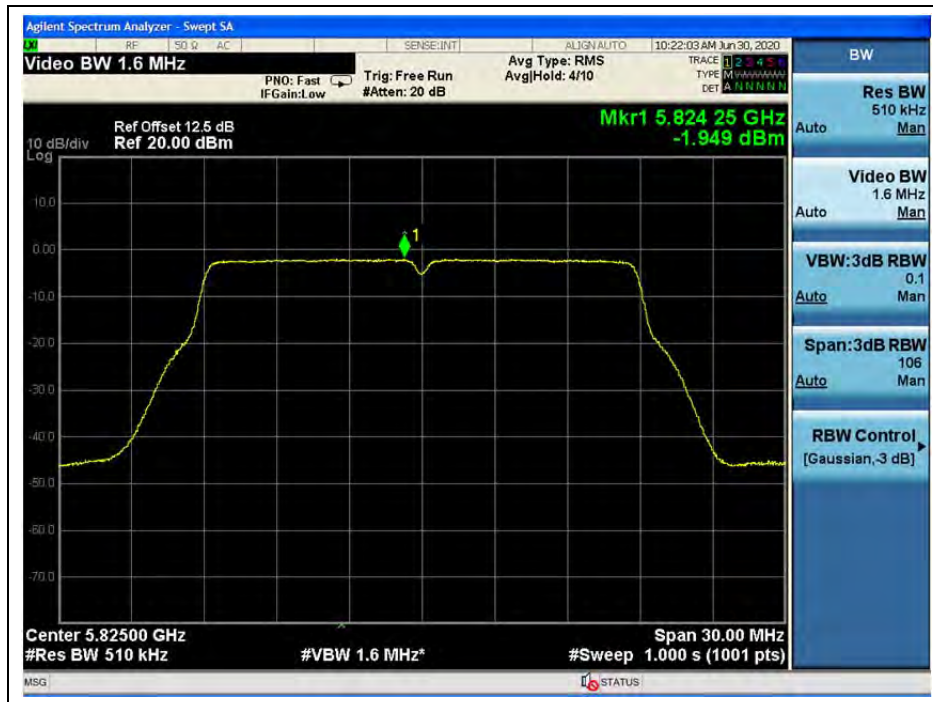

(Channel 165,5825MHz, 802.11ac (VHT20), ANT 1)



802.11ac (VHT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
		ANT 1	ANT 2				
38	5190	-3.08	-3.66	0.29	-0.35	10.49	PASS
46	5230	-2.81	-3.11		0.05		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
		ANT 1	ANT 2				
151	5755	-3.76	-4.66	0.29	-1.18	29.49	PASS
159	5795	-4.52	-5.41		-1.93		

Note: Directional gain = 3.5dBi + 10log(2) = 6.51dBi > 6dBi, so the power limit shall be 10.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

B. Test Plots



(Channel 38, 5190 MHz, 802.11ac (VHT40), ANT 1)



(Channel 46, 5230 MHz, 802.11ac (VHT40), ANT 1)



(Channel 151, 5755MHz, 802.11ac (VHT40), ANT 1)



(Channel 159, 5795MHz, 802.11ac (VHT40), ANT 1)



802.11ac (VHT80) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)		Duty Factor	Total PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
		ANT 1	ANT 2				
42	5210	-7.13	-7.59	0.53	-4.34	10.49	PASS
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)		Duty Factor	Total PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
		ANT 1	ANT 2				
155	5775	-7.72	-8.67	0.53	-5.16	29.49	PASS

Note: Directional gain = 3.5dBi + 10log(2) = 6.51dBi > 6dBi, so the power limit shall be 10.49dBm for 5.18-5.24 GHz and 29.49dBm for 5.745-5.825 GHz band.

B. Test Plots



(Channel 42, 5210MHz, 802.11ac(VHT80), ANT 1)



(Channel 155,5775MHz, 802.11ac(VHT80), ANT 1)



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Description

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Freq Dev. (kHz)	Deviation (ppm)
100%	19	+20(Ref)	19	3.668
100%		-30	21	4.054
100%		-20	20	3.861
100%		-10	20	3.861
100%		0	19	3.668
100%		+10	18	3.475
100%		+20	17	3.282
100%		+30	16	3.089
100%		+40	18	3.475
100%		+50	20	3.861
85%		16.15	+20	23
115%	21.85	+20	22	4.247



U-NII-3 (Ch. 149) 5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Freq Dev. (kHz)	Deviation (ppm)
100%	19	+20(Ref)	20	3.861
100%		-30	23	4.440
100%		-20	22	4.247
100%		-10	22	4.247
100%		0	18	3.475
100%		+10	21	4.054
100%		+20	19	3.668
100%		+30	22	4.247
100%		+40	23	4.440
100%		+50	25	4.826
85%		16.15	+20	21
115%	21.85	+20	21	4.054

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

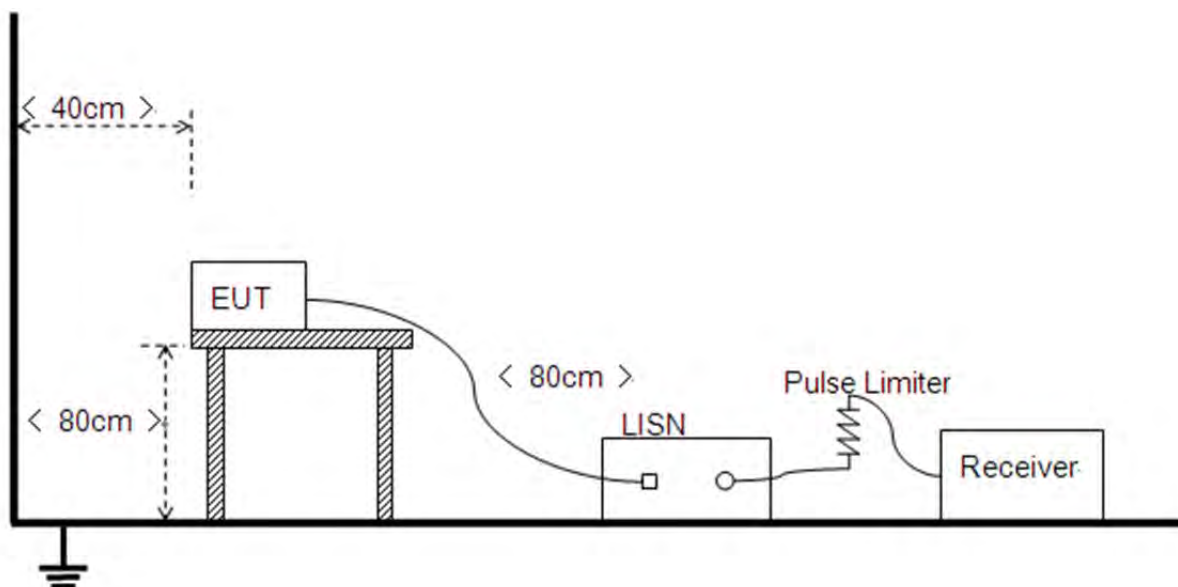

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + adapter + WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

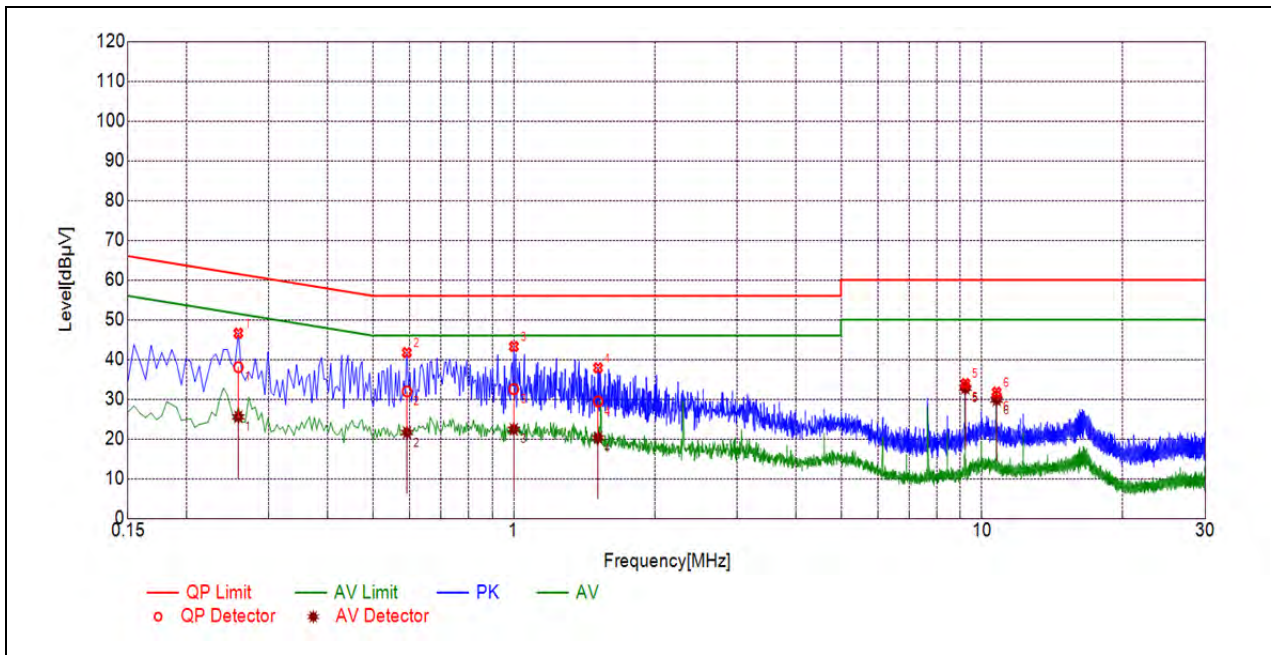

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2581	38.08	25.56	61.49	51.49	Line	PASS
2	0.5916	31.95	21.61	56.00	46.00		PASS
3	1.0000	32.54	22.43	56.00	46.00		PASS
4	1.5140	29.45	20.32	56.00	46.00		PASS
5	9.2163	33.01	32.78	60.00	50.00		PASS
6	10.7514	30.63	29.83	60.00	50.00		PASS

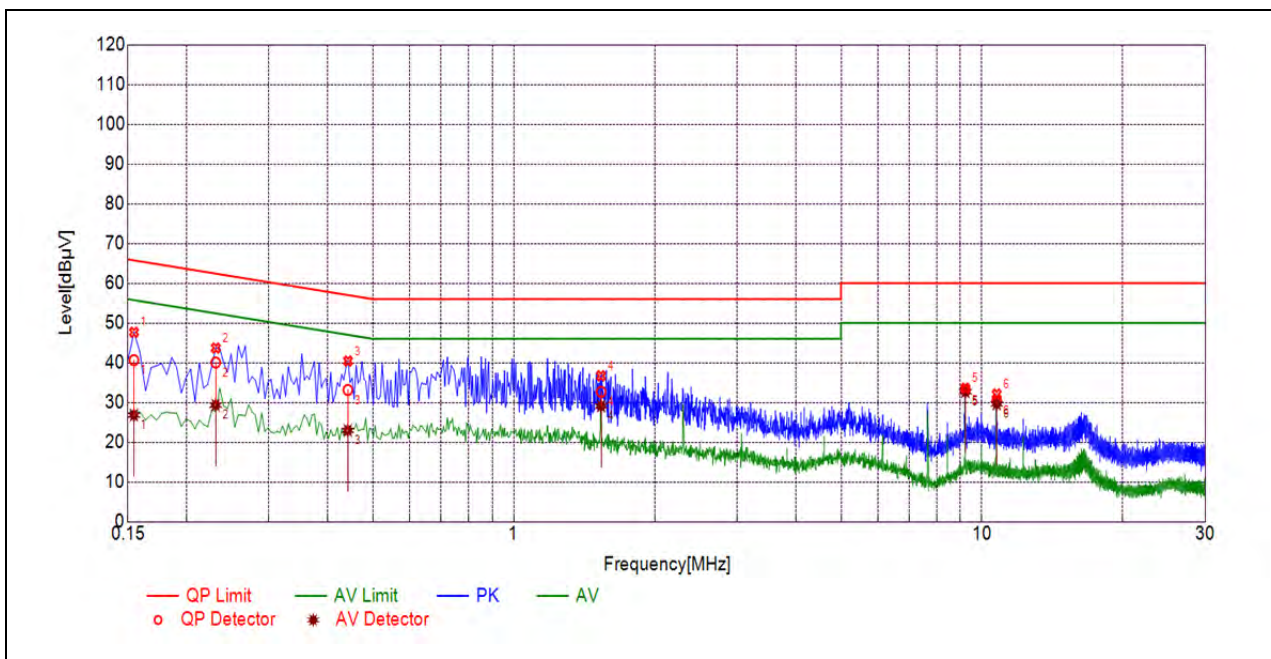

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1544	40.65	26.82	65.76	55.76	Neutral	PASS
2	0.2308	40.05	29.34	62.42	52.42		PASS
3	0.4421	33.16	22.97	57.02	47.02		PASS
4	1.5368	32.69	29.11	56.00	46.00		PASS
5	9.2166	33.10	32.68	60.00	50.00		PASS
6	10.7532	30.41	29.62	60.00	50.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.407(b)(7), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

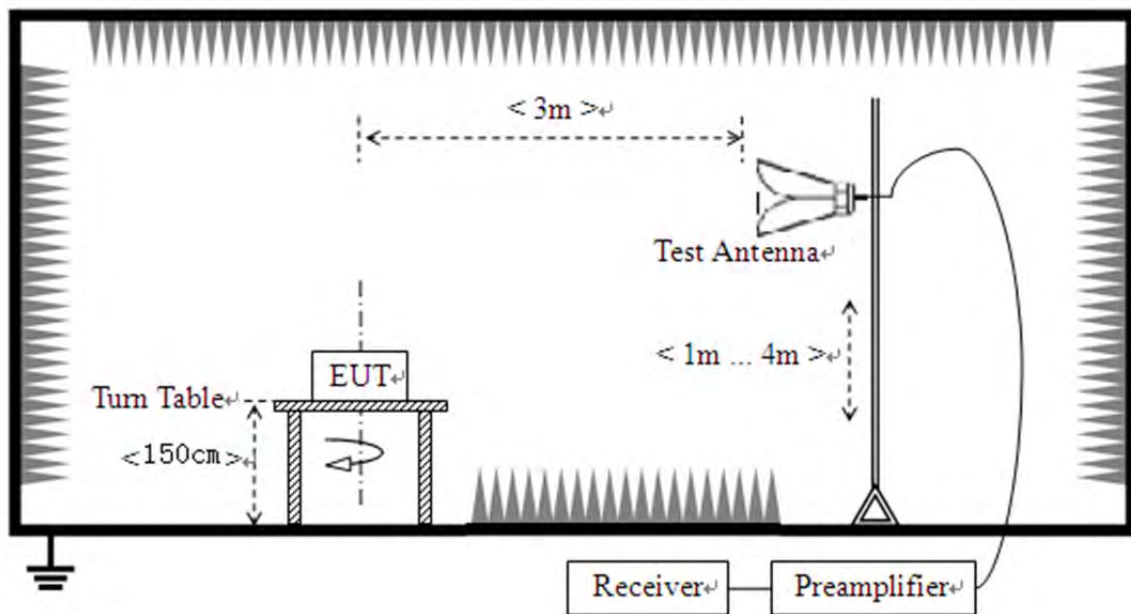

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11a Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dBuV)					
36	5150.00	PK	51.27	-26.92	32.2	56.55	74	PASS
36	5150.00	AV	38.55	-26.92	32.2	43.83	54	PASS
48	5358.98	PK	45.63	-26.92	32.2	50.91	74	PASS
48	5350.00	AV	33.70	-26.92	32.2	38.98	54	PASS
149	5725.00	PK	53.12	-26.23	32.2	59.09	122.23	PASS
165	5850.00	PK	37.20	-26.23	32.2	43.17	122.23	PASS


B. Test Plots:

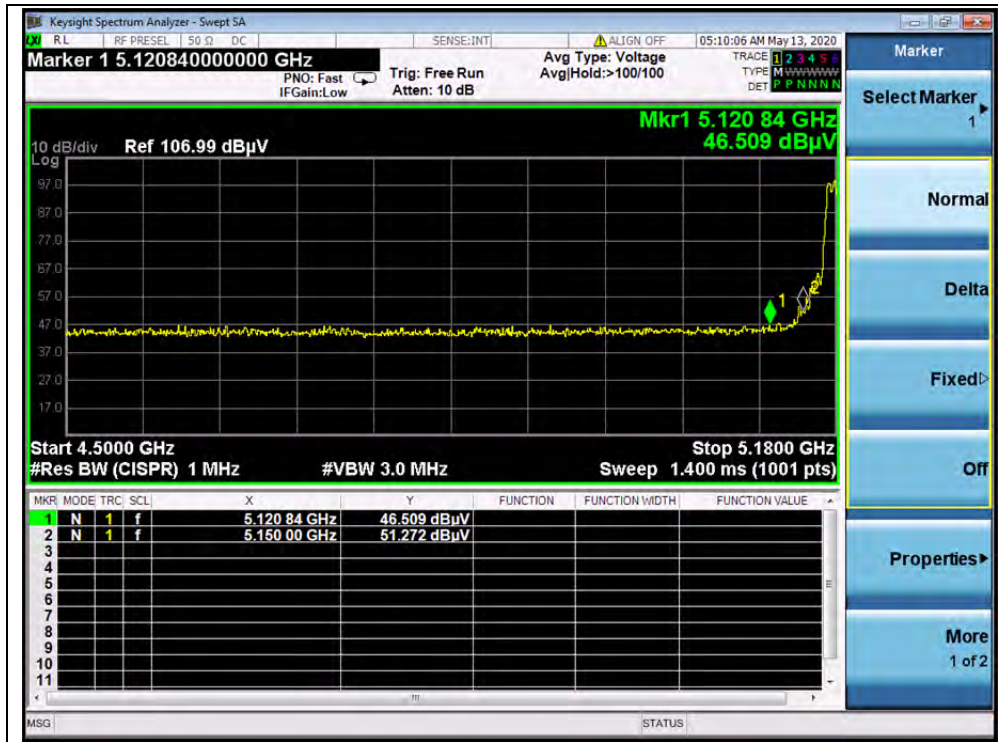

(PEAK, Channel 36, 802.11a)

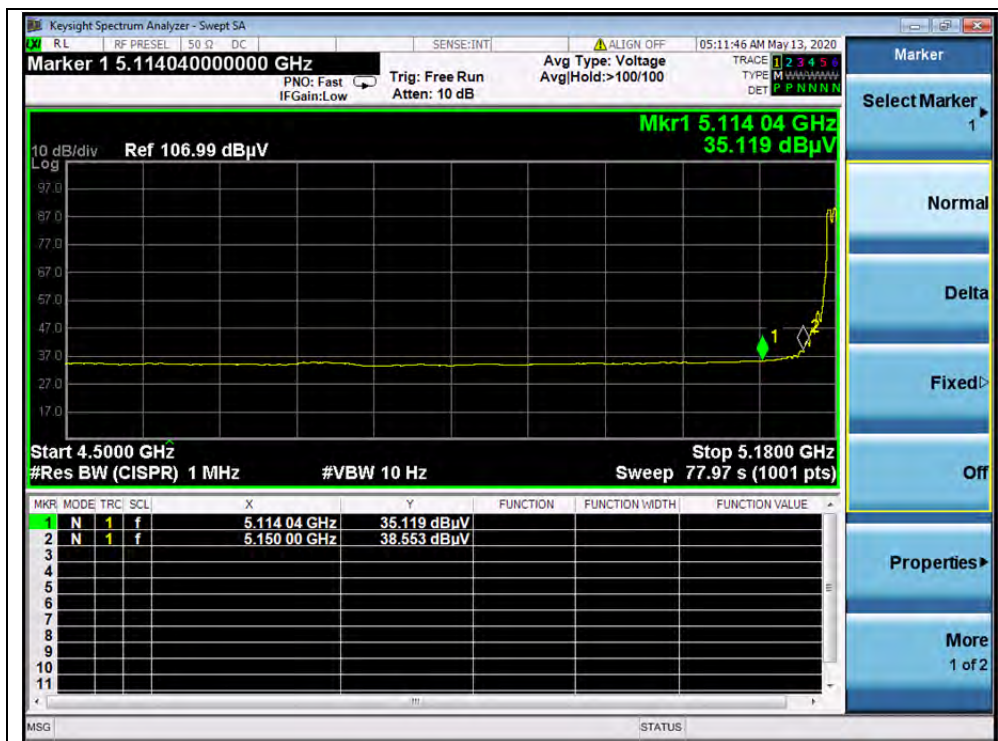


(AVG, Channel 36, 802.11a)

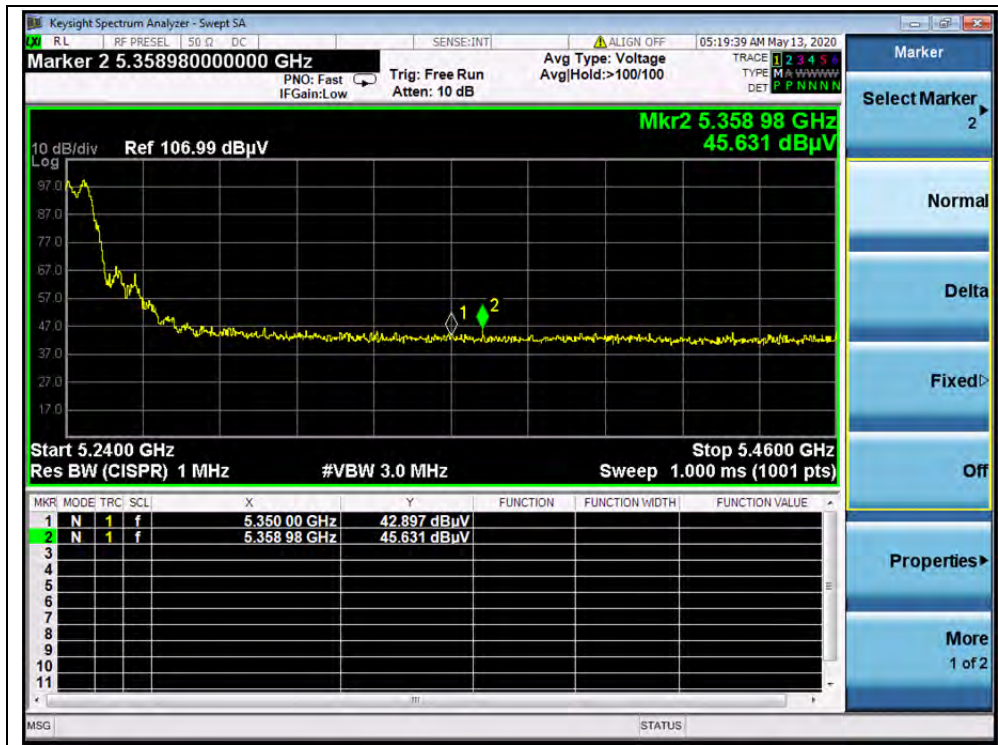


(PEAK, Channel 48, 802.11a)



(AVG, Channel 48, 802.11a)

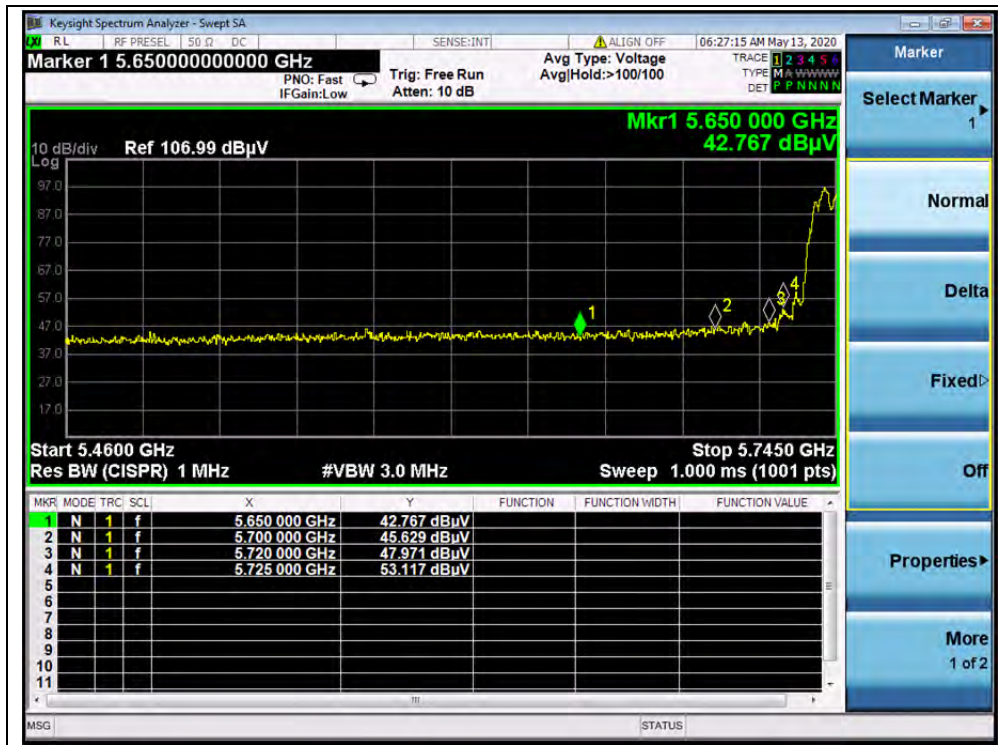

(PEAK, Channel 149, 802.11a)

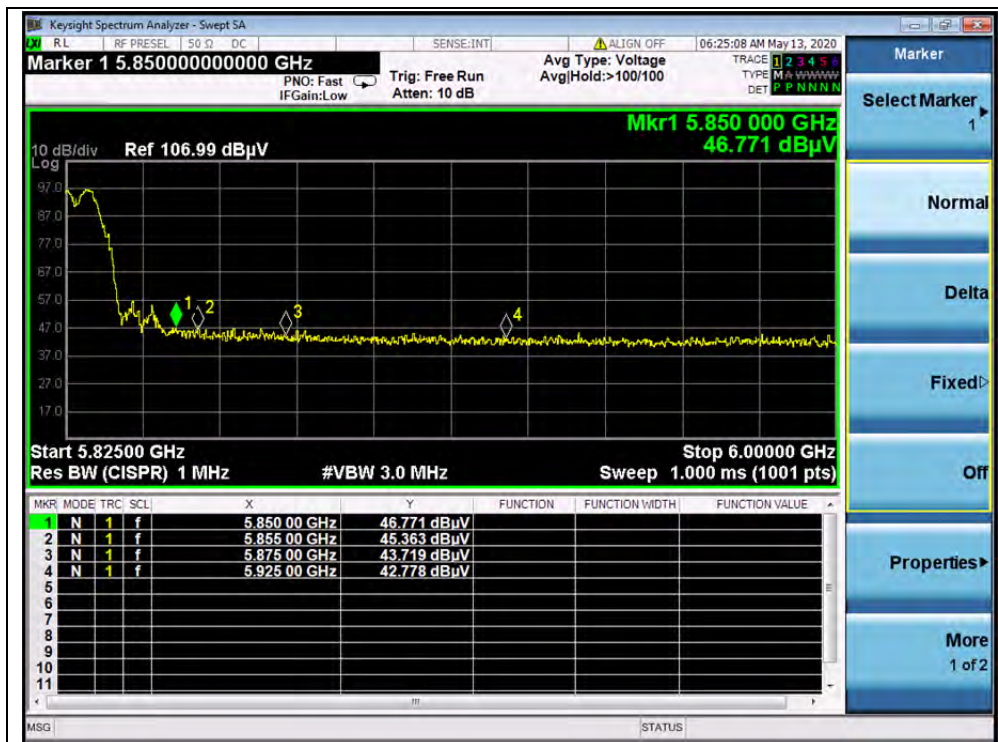

(PEAK, Channel 165, 802.11a)




802.11n (HT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
36	5146.68	PK	51.35	-26.92	32.2	56.63	74	PASS
36	5150.00	AV	41.00	-26.92	32.2	46.28	54	PASS
48	5370.02	PK	43.89	-26.92	32.2	49.17	74	PASS
48	5350.00	AV	33.57	-26.92	32.2	38.85	54	PASS
149	5725.00	PK	50.77	-26.23	32.2	56.74	122.23	PASS
165	5850.00	PK	45.92	-26.23	32.2	51.89	122.23	PASS


B. Test Plots:

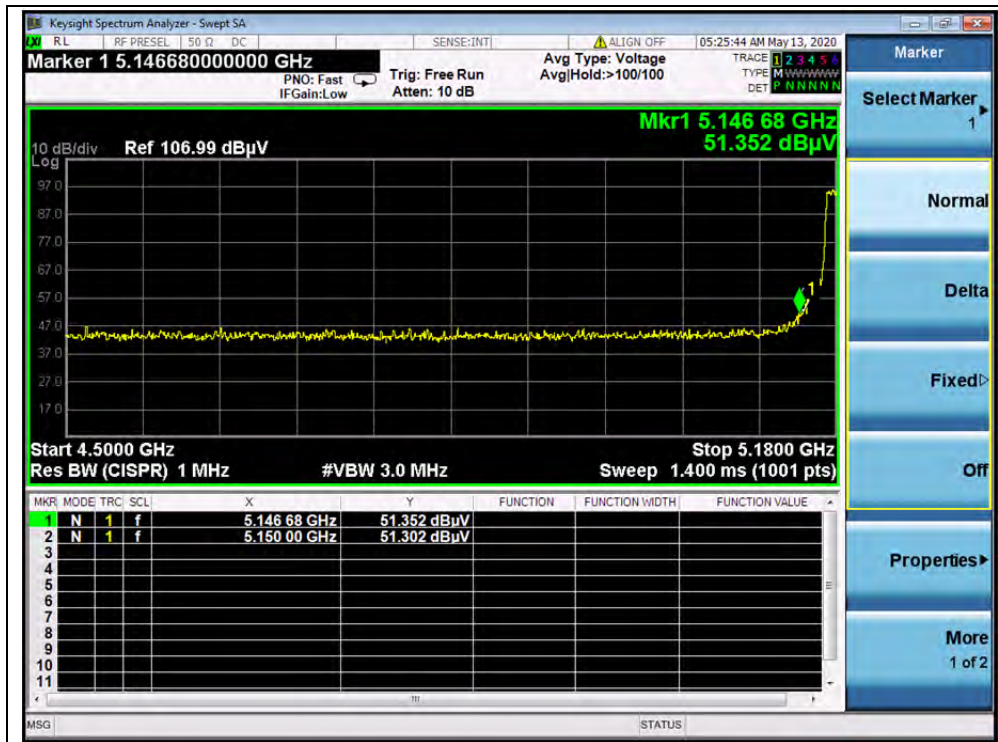


(PEAK, Channel 36,802.11n (HT20))

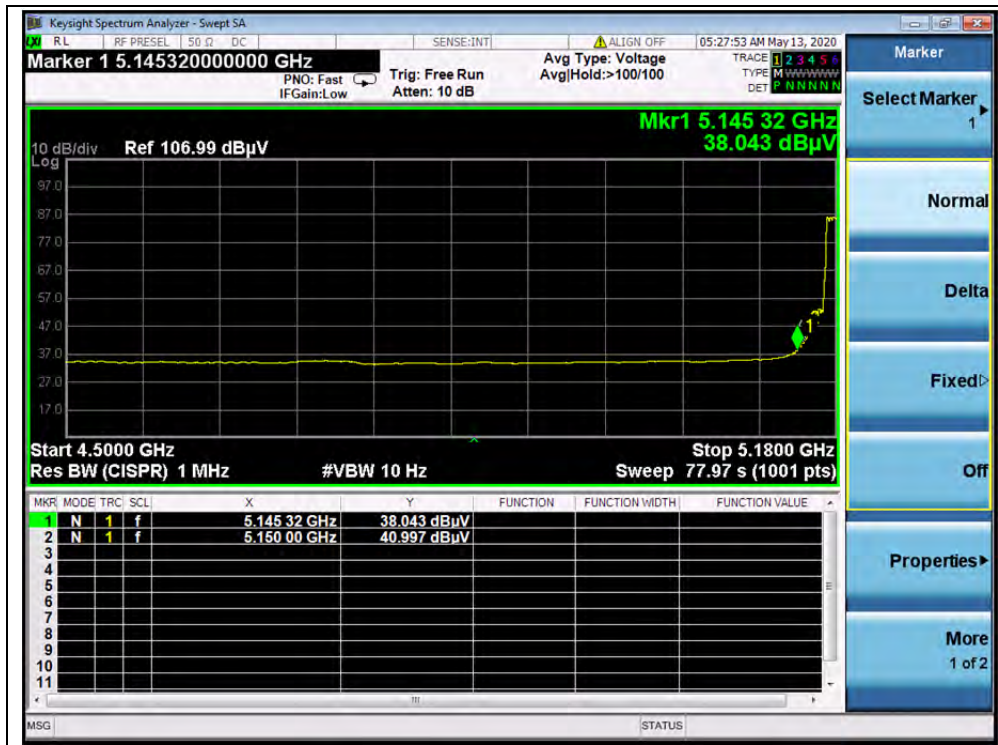


(AVG, Channel 36,802.11n (HT20))

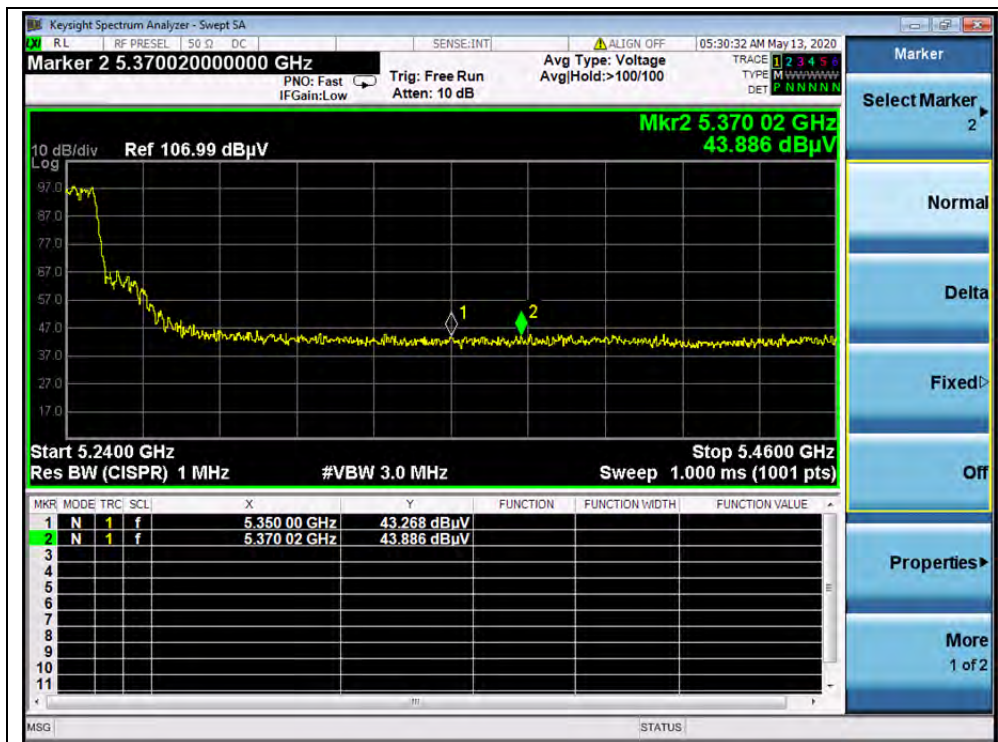

(PEAK, Channel 48, 802.11n (HT20))

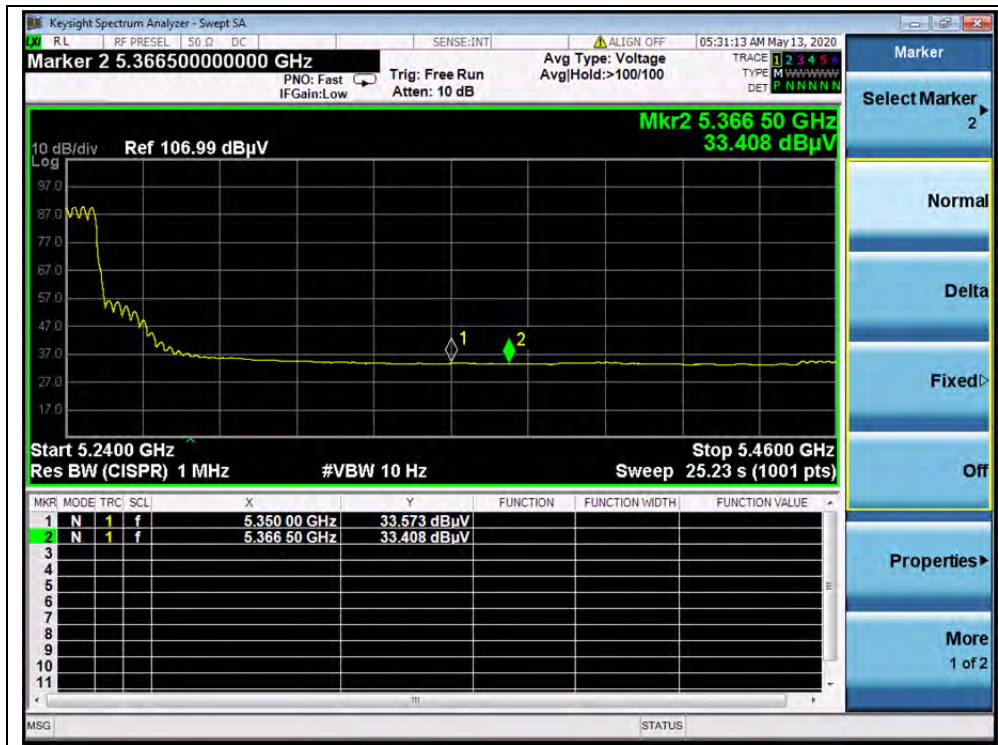

(AVG, Channel 48,802.11n (HT20))

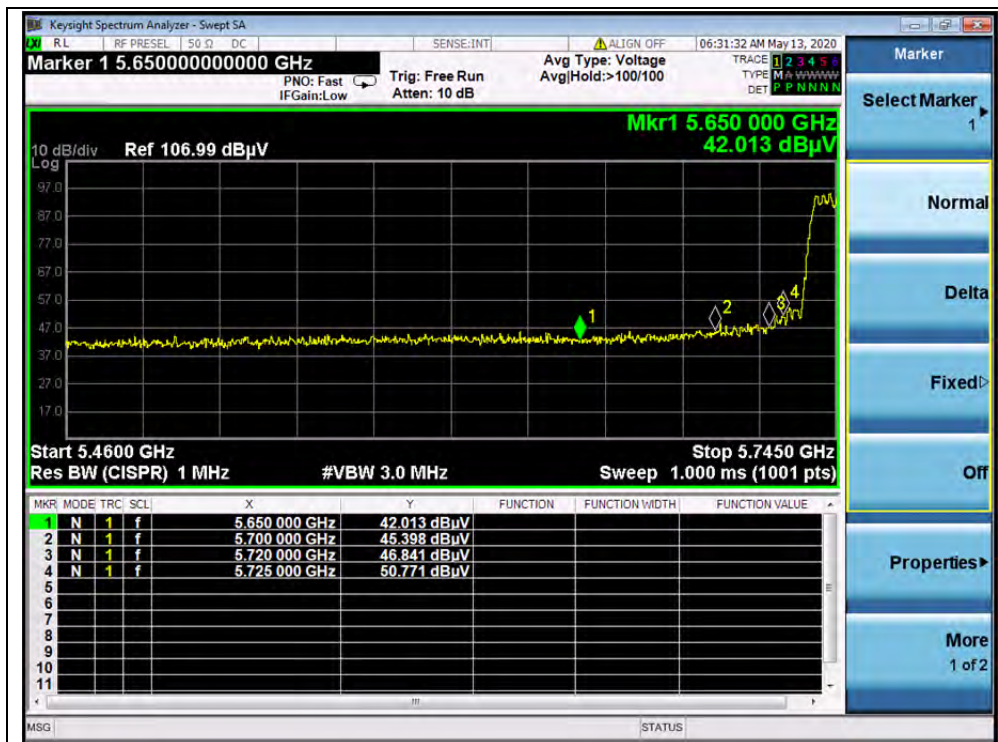

(PEAK, Channel 149, 802.11n (HT20))



(PEAK, Channel 165, 802.11n (HT20))




802.11n (HT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
38	5150.00	PK	57.20	-26.92	32.2	62.48	74	PASS
38	5150.00	AV	45.42	-26.92	32.2	50.7	54	PASS
46	5357.40	PK	43.63	-26.92	32.2	48.91	74	PASS
46	5350.00	AV	33.68	-26.92	32.2	38.96	54	PASS
151	5725.00	PK	59.00	-26.23	32.2	64.97	122.23	PASS
159	5855.00	PK	46.72	-26.23	32.2	52.69	110.83	PASS


B. Test Plots:

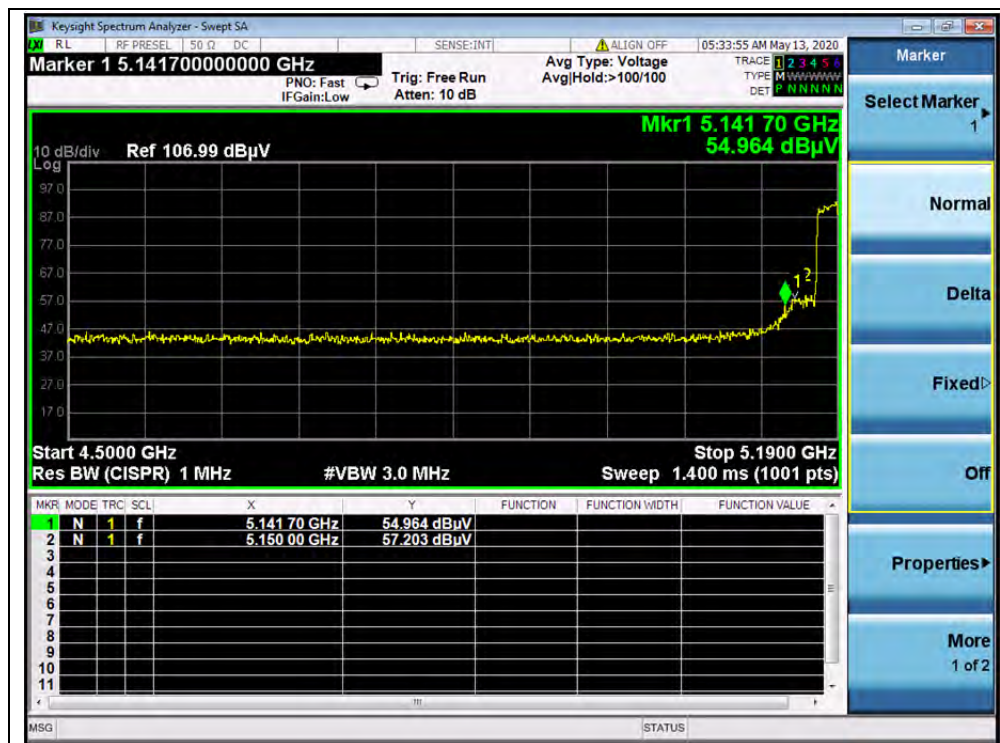

(PEAK, Channel 38,802.11n (HT40))

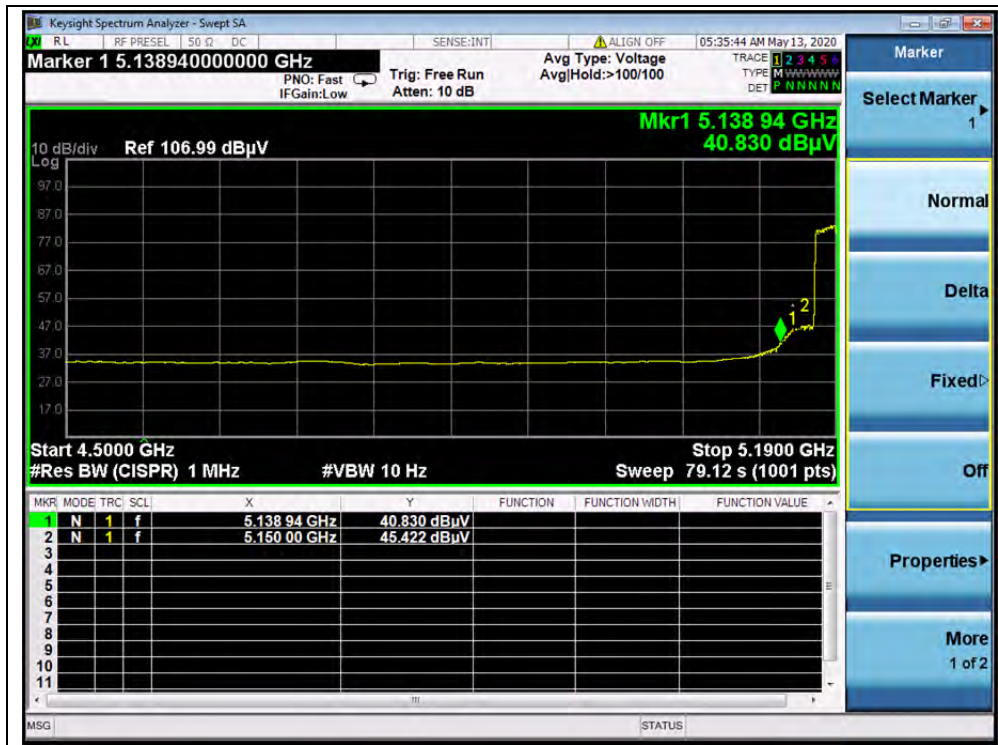


(AVG, Channel 38,802.11n (HT40))

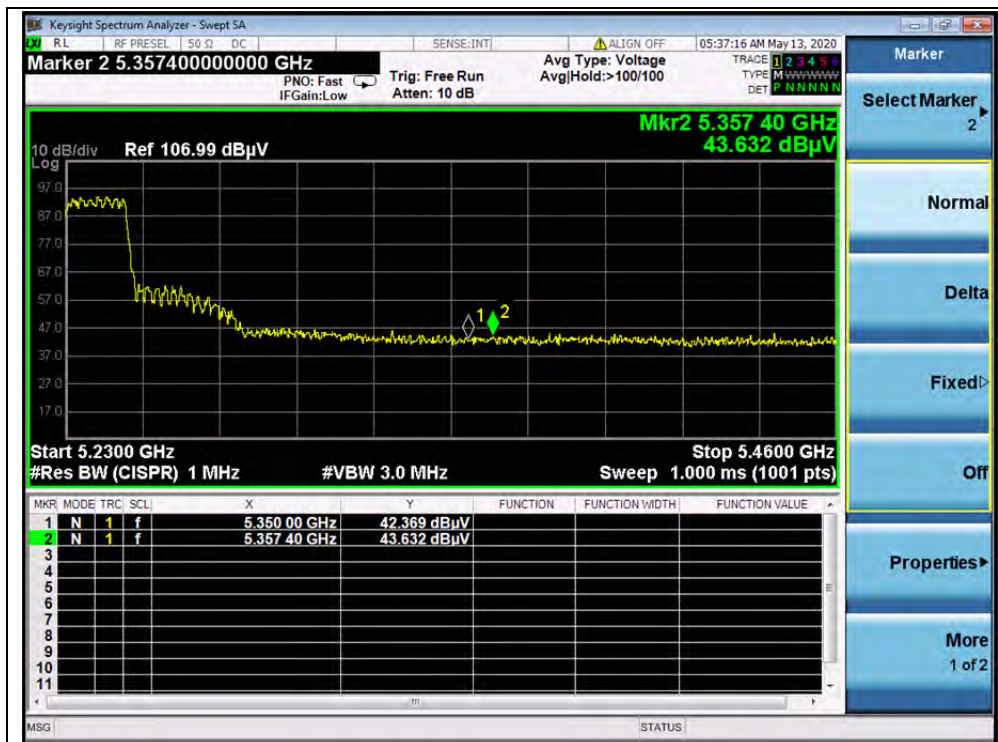


(PEAK, Channel 46, 802.11n (HT40))



(AVG, Channel 46, 802.11n (HT40))

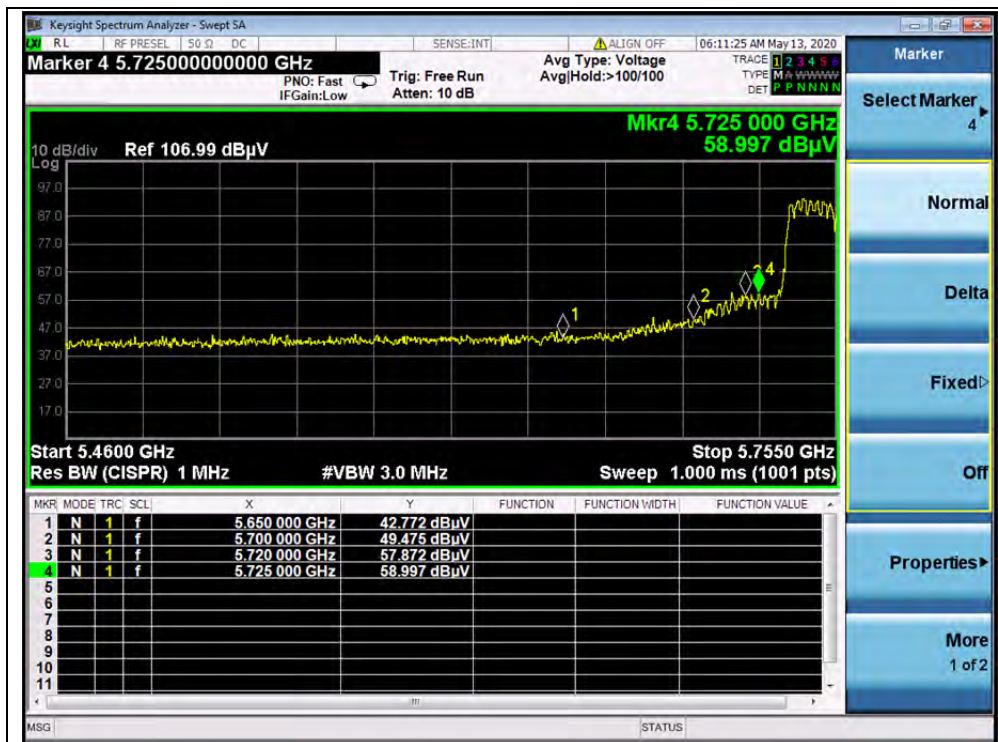

(PEAK, Channel 151, 802.11n (HT40))

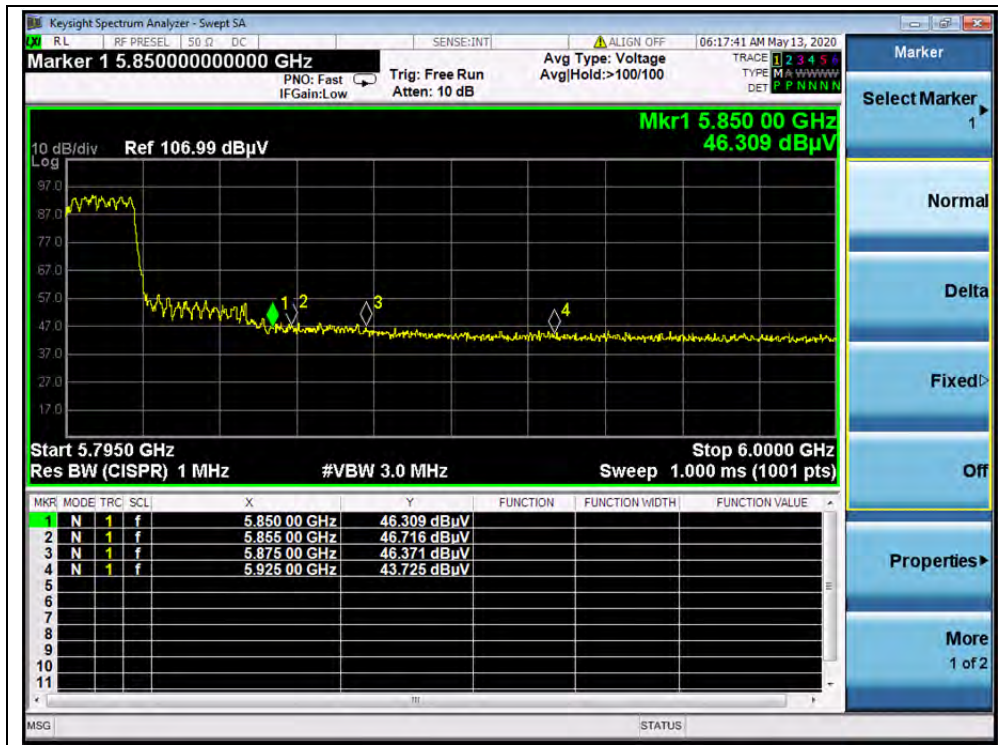

(PEAK, Channel 159, 802.11n (HT40))




802.11ac (VHT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A_T	A_{Factor}	Max. Emission	Limit	Verdict
		PK/ AV	U_R (dBuV)	(dB)	(dB@3m)	E (dBμV/m)	(dBμV/m)	
36	5147.36	PK	50.52	-26.92	32.2	55.8	74	PASS
36	5150.00	AV	40.76	-26.92	32.2	46.04	54	PASS
48	5361.62	PK	44.16	-26.92	32.2	49.44	74	PASS
48	5350.00	AV	33.60	-26.92	32.2	38.88	54	PASS
149	5725.00	PK	50.89	-26.23	32.2	56.86	122.23	PASS
165	5850.00	PK	46.54	-26.92	32.2	51.82	122.23	PASS


B. Test Plots:

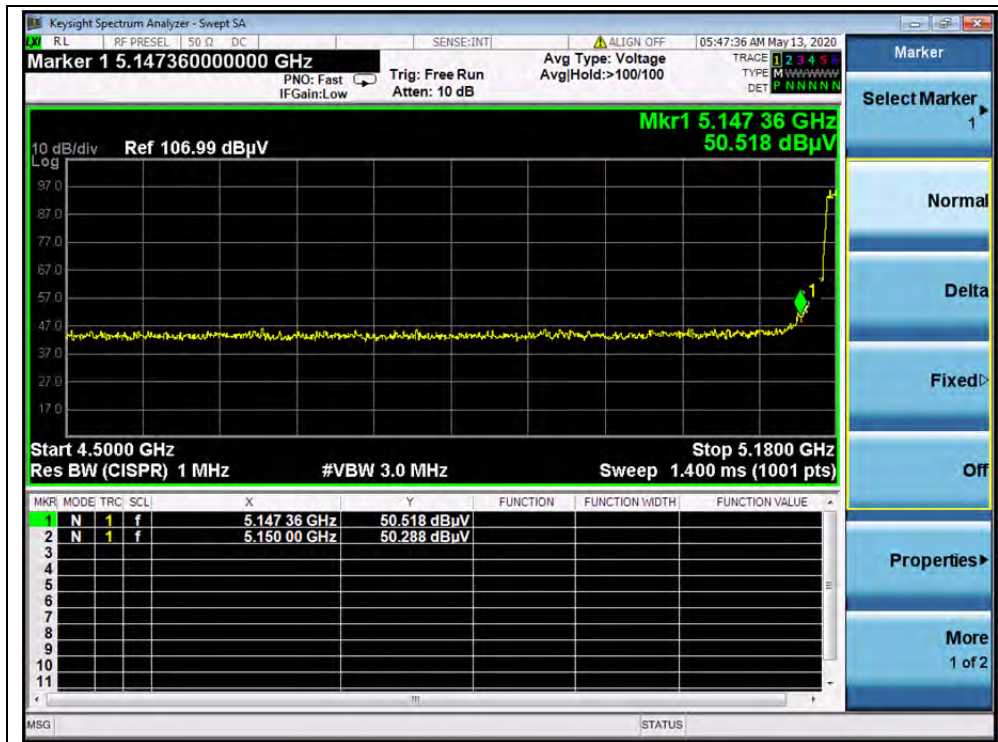


(PEAK, Channel 36,802.11ac (VHT20))

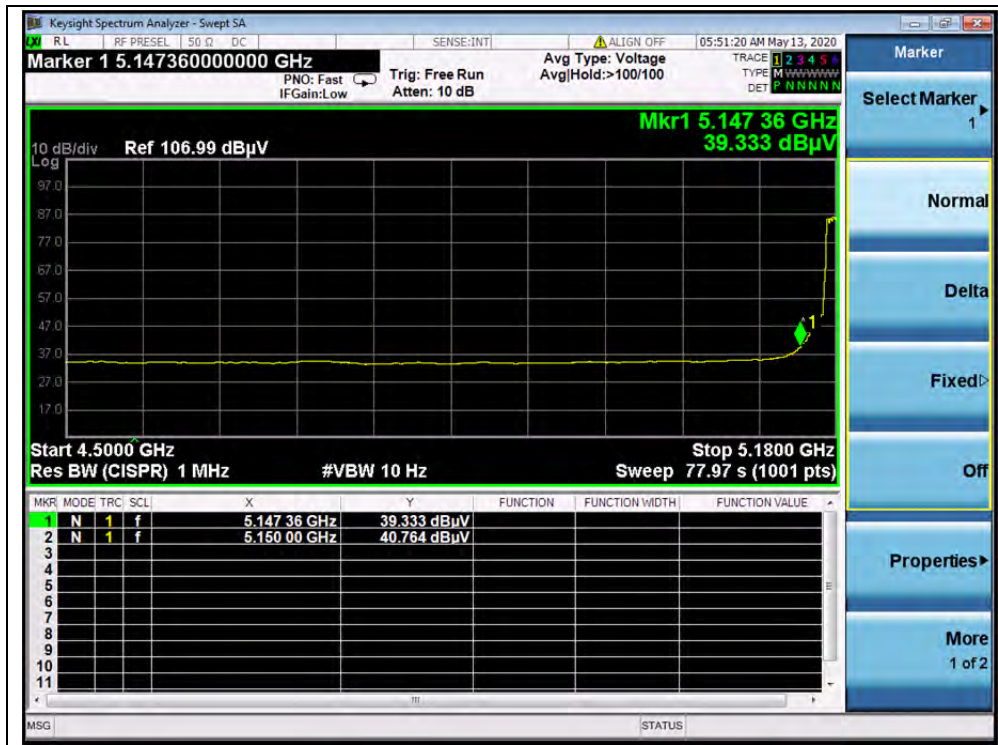


(AVG, Channel 36,802.11ac (VHT20))

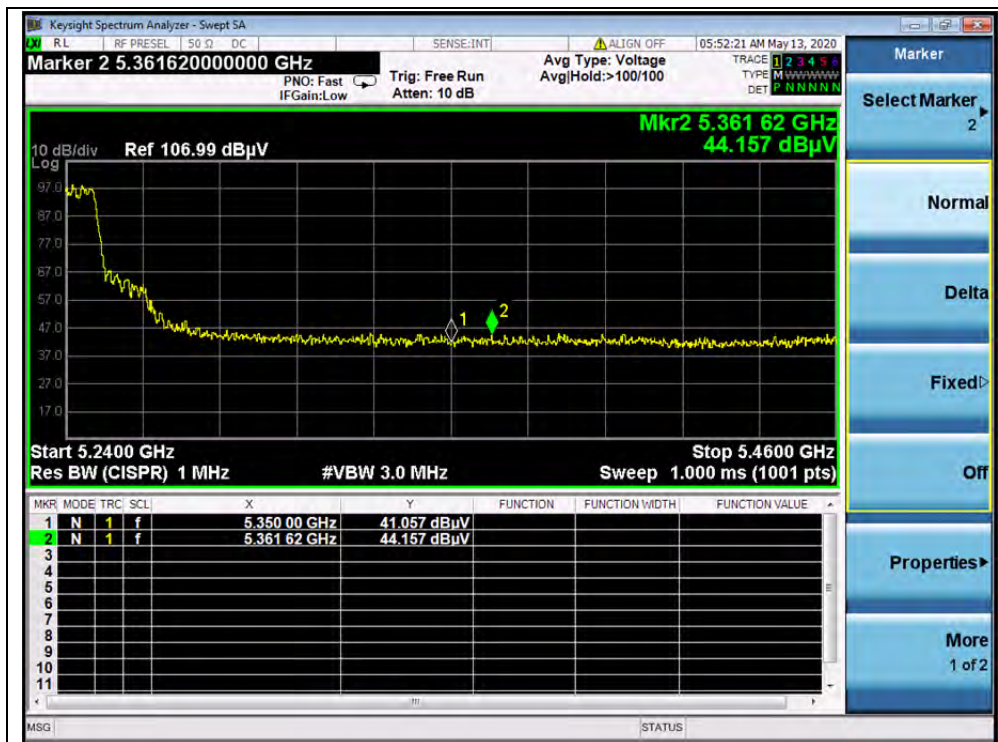

(PEAK, Channel 48, 802.11ac (VHT20))

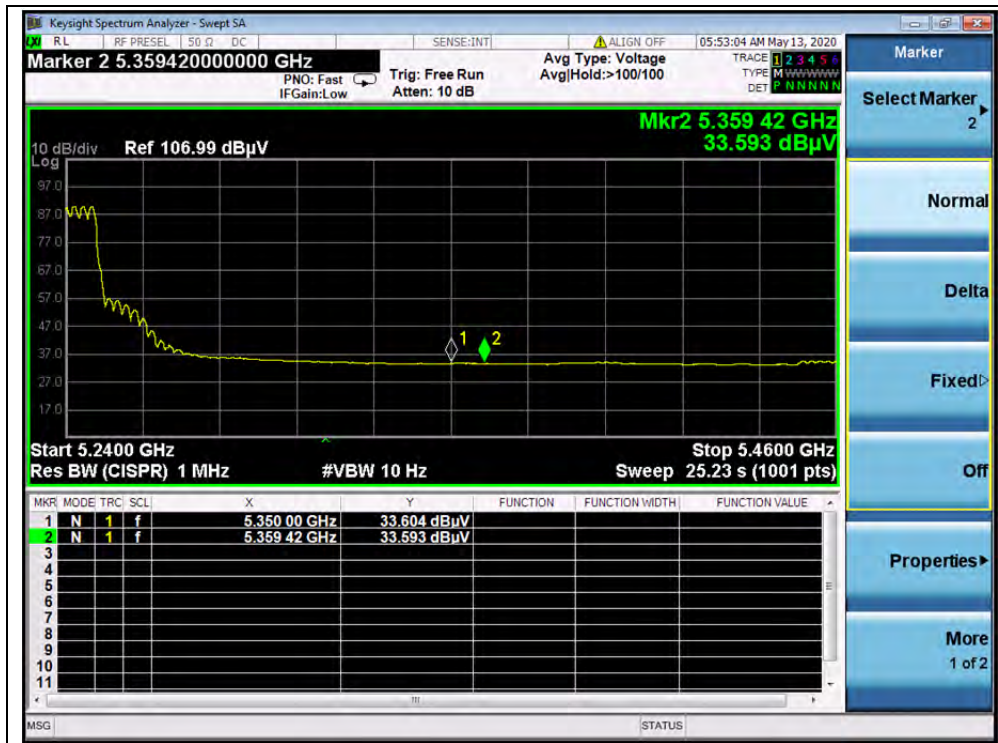

(AVG, Channel 48,802.11ac (VHT20))

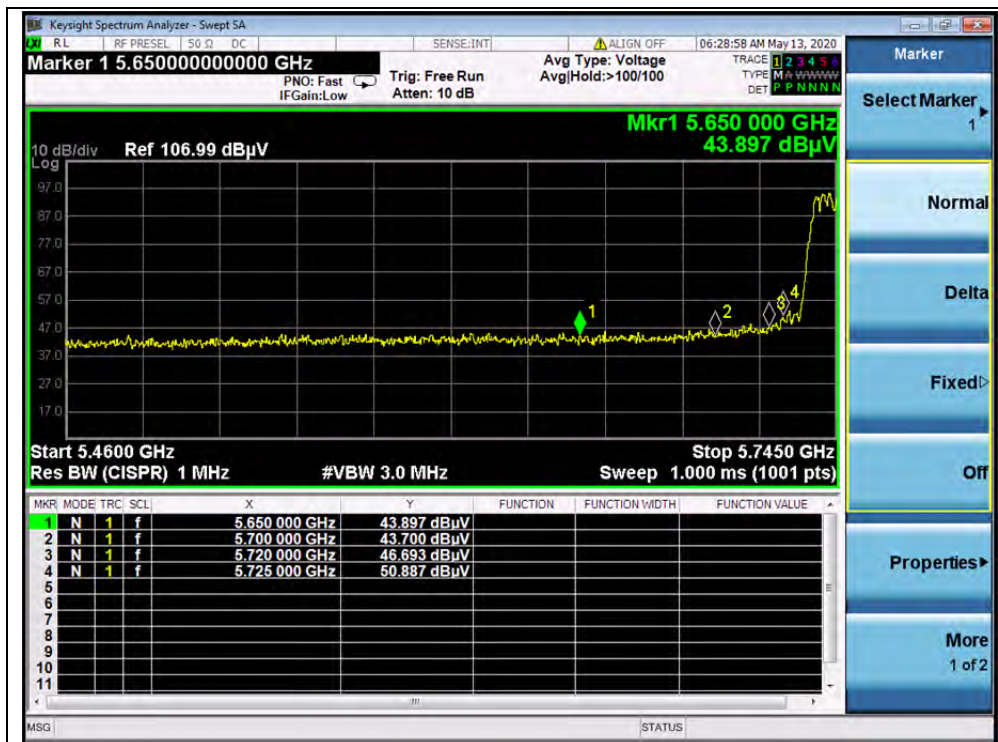

(PEAK, Channel 149, 802.11ac (VHT20))



(PEAK, Channel 165,802.11ac (VHT20))




802.11ac (VHT40) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
38	5149.14	PK	57.15	-26.92	32.2	62.43	74	PASS
38	5150.00	AV	45.78	-26.92	32.2	51.06	54	PASS
46	5355.33	PK	44.02	-26.92	32.2	49.3	74	PASS
46	5350.00	AV	33.66	-26.92	32.2	38.94	54	PASS
151	5720.00	PK	55.78	-26.23	32.2	61.75	110.83	PASS
159	5850.00	PK	47.17	-26.92	32.2	52.45	122.23	PASS


B. Test Plots:

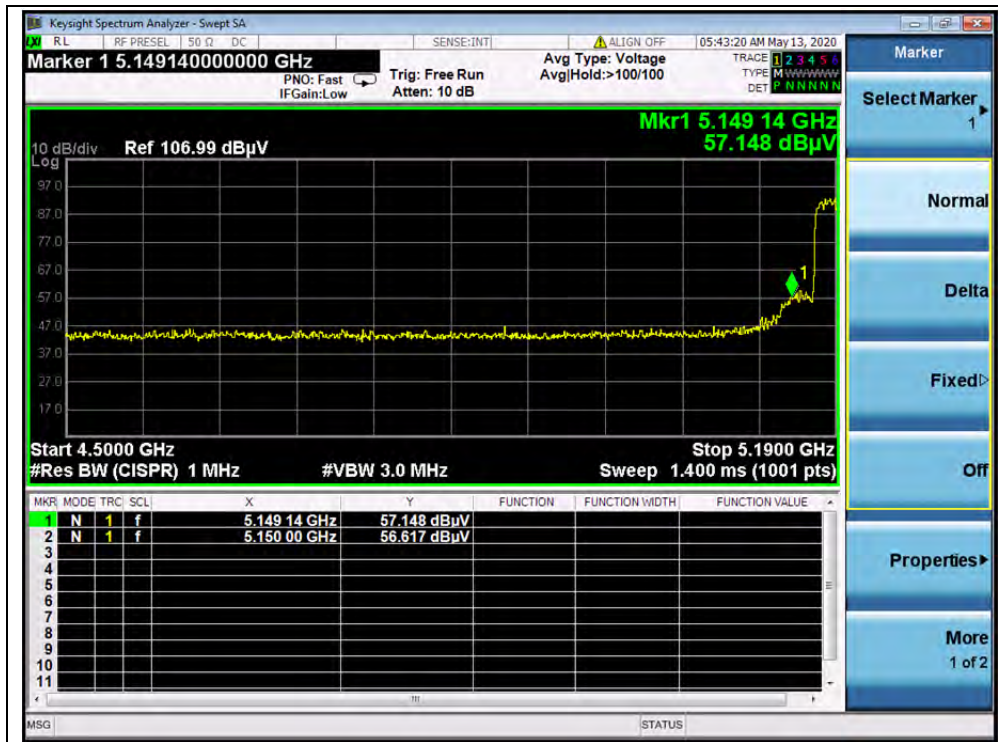


(PEAK, Channel 38, 802.11ac (VHT40))

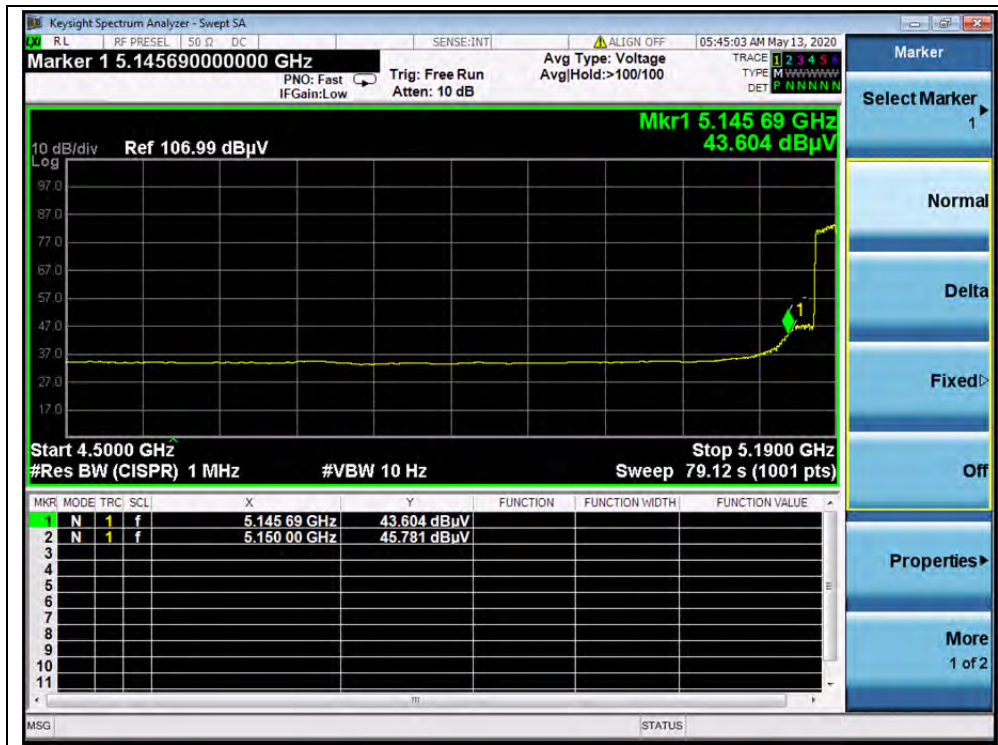


(AVG, Channel 38, 802.11ac (VHT40))

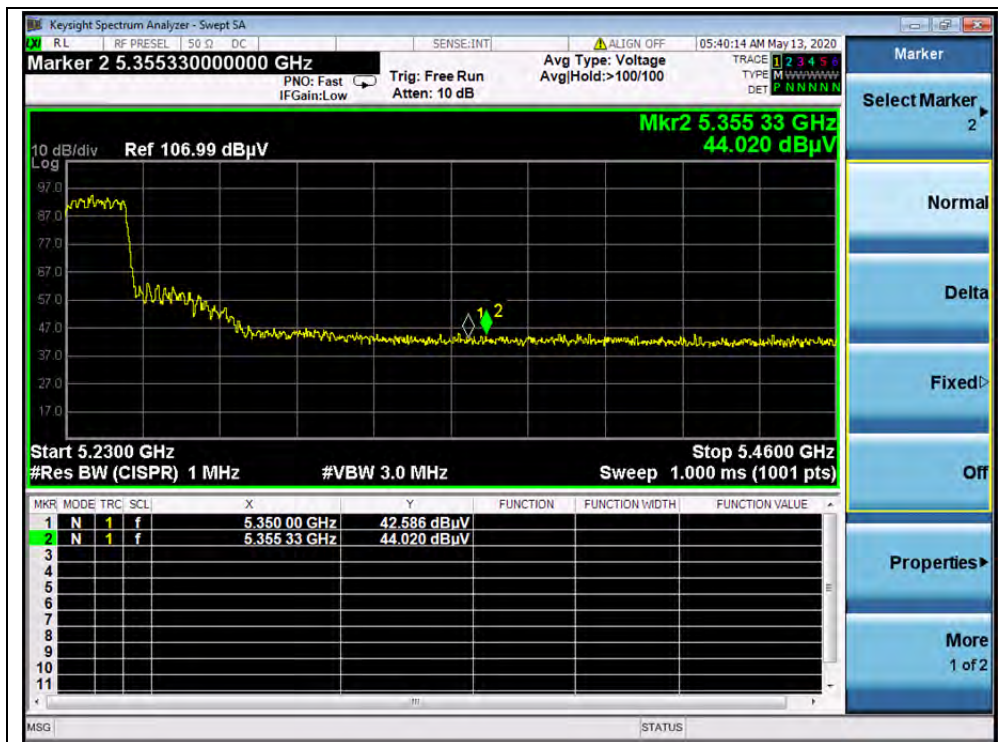


(PEAK, Channel 46, 802.11ac (VHT40))

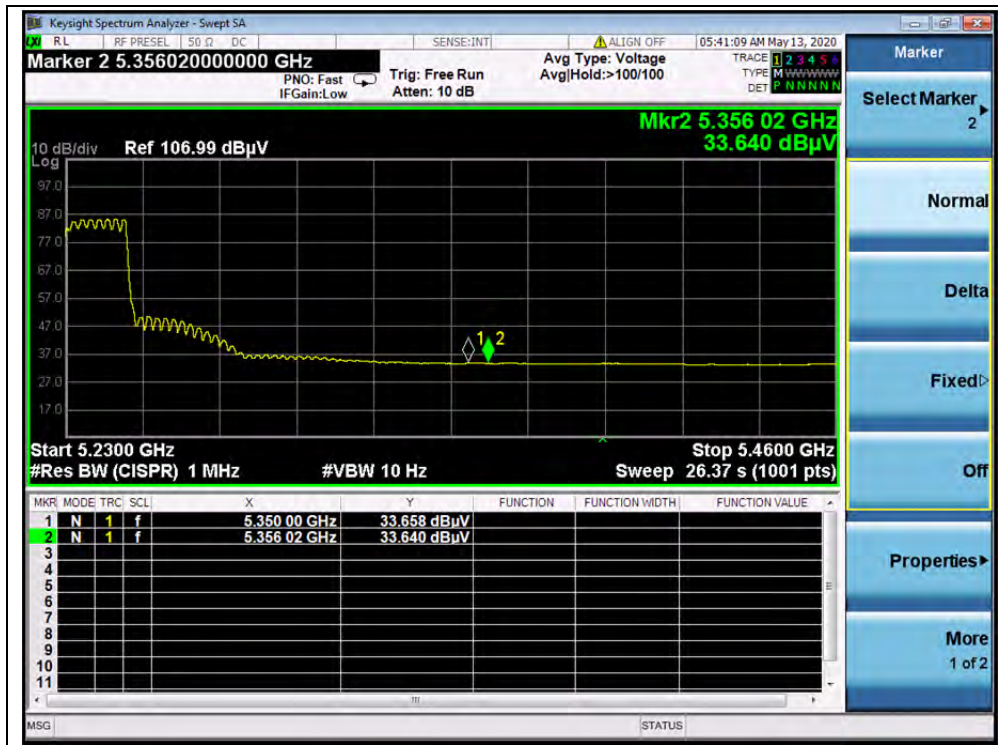

(AVG, Channel 46, 802.11ac (VHT40))

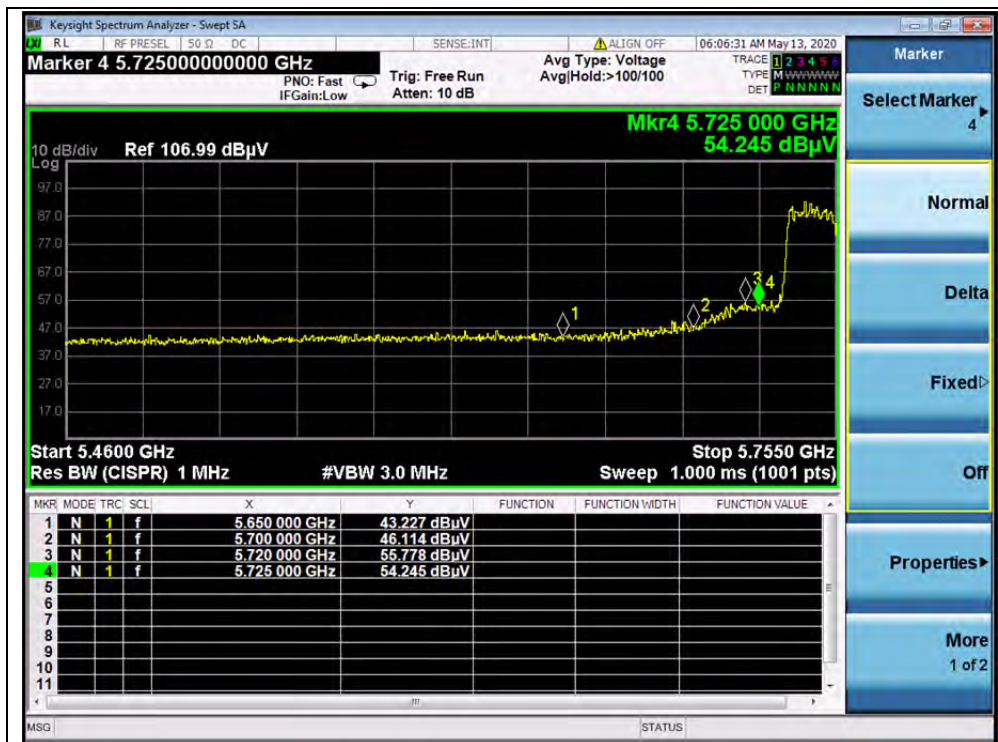

(PEAK, Channel 151, 802.11ac (VHT40))

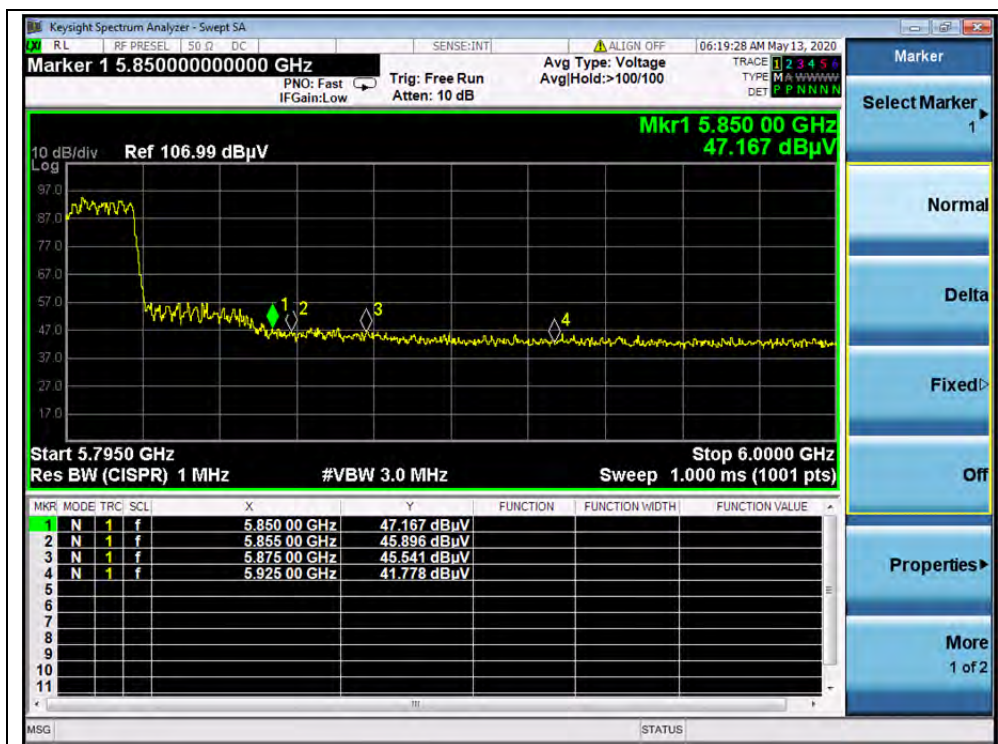

(PEAK, Channel 159,802.11ac (VHT40))




802.11ac (VHT80) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)					
42	5150.00	PK	56.80	-26.92	32.2	62.08	74	PASS
42	5150.00	AV	44.06	-26.92	32.2	49.34	54	PASS
42	5363.60	PK	44.59	-26.92	32.2	49.87	74	PASS
42	5350.00	AV	34.42	-26.92	32.2	39.7	54	PASS
155	5704.80	PK	48.49	-26.23	32.2	54.46	106.57	PASS
155	5871.60	PK	47.29	-26.23	32.2	53.26	64.35	PASS


B. Test Plots:

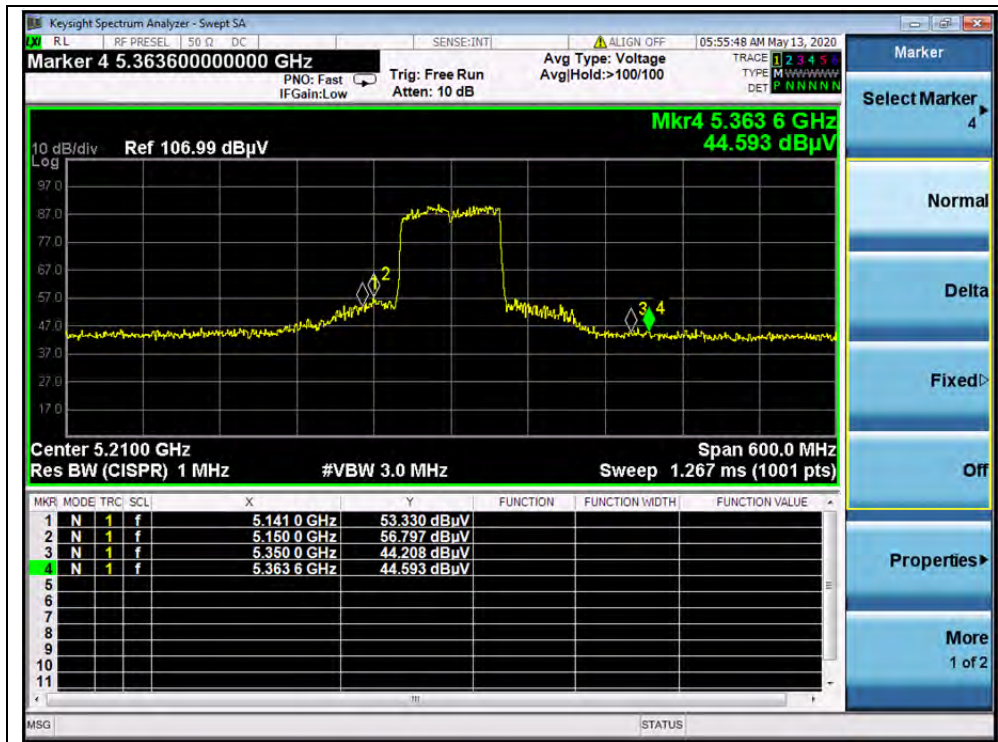

(PEAK, Channel 42, 802.11ac (VHT80))

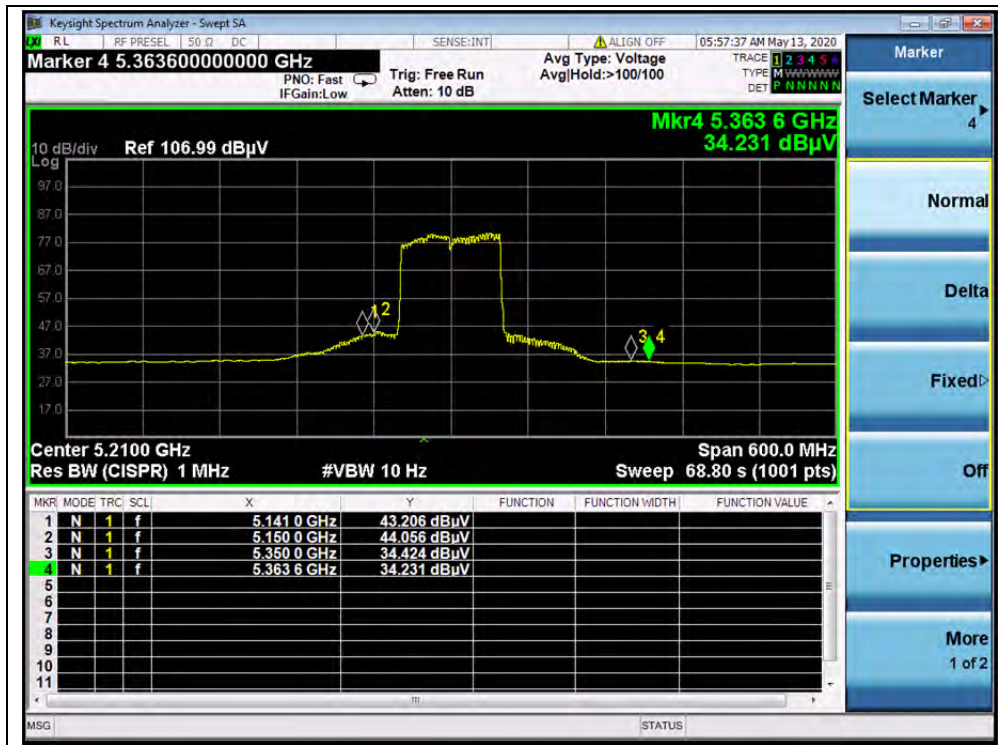

(AVG, Channel 42, 802.11ac (VHT80))

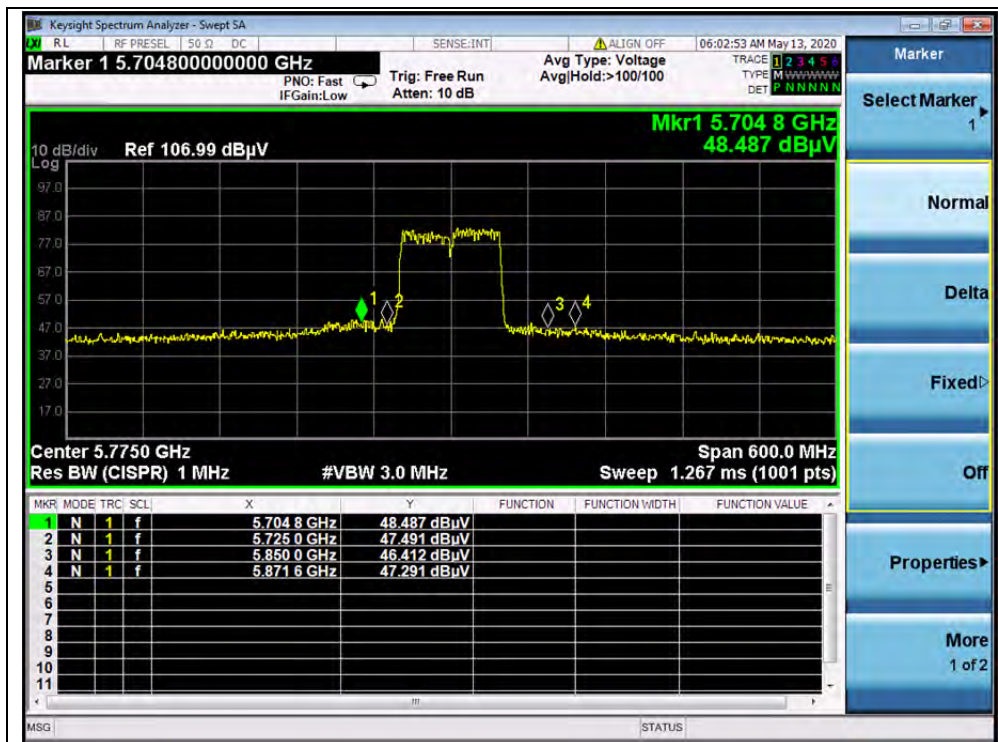

(PEAK, Channel 155, 802.11ac (VHT80))

2.9. Radiated Emission

2.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(eirp) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2. Test Description**Test Setup:**


- 1) For radiated emissions from 9kHz to 30MHz

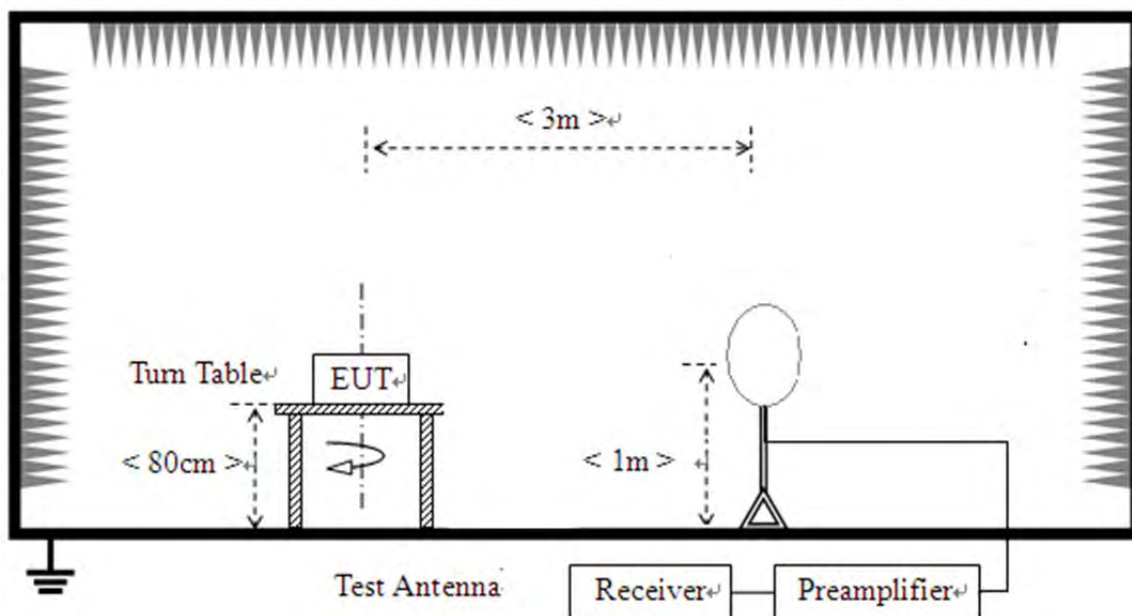

2) For radiated emissions from 30MHz to1GHz

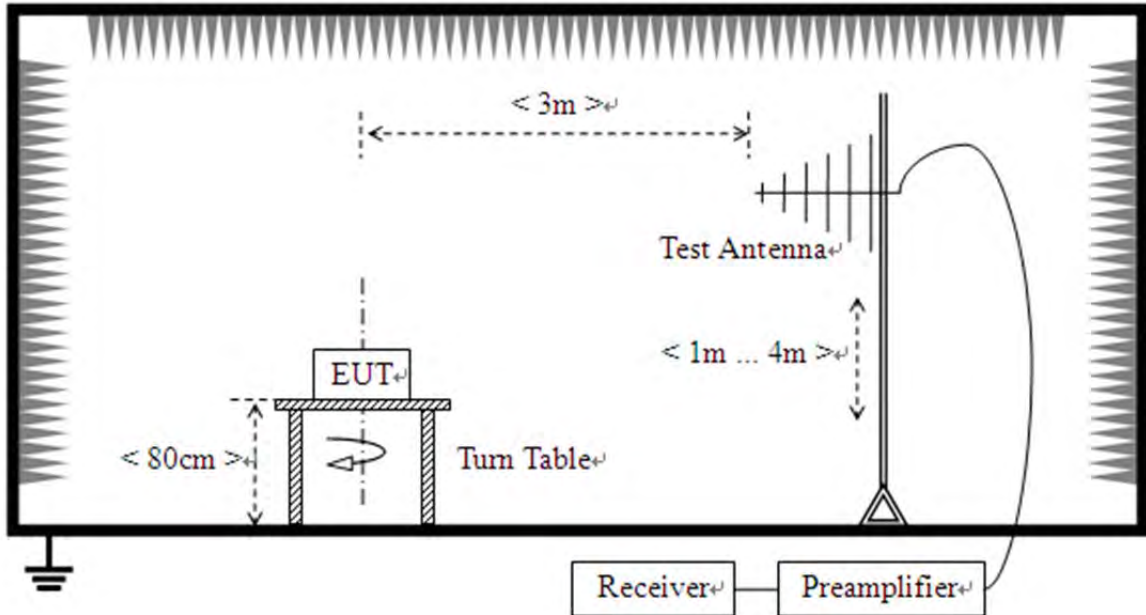

3) For radiated emissions above 1GHz

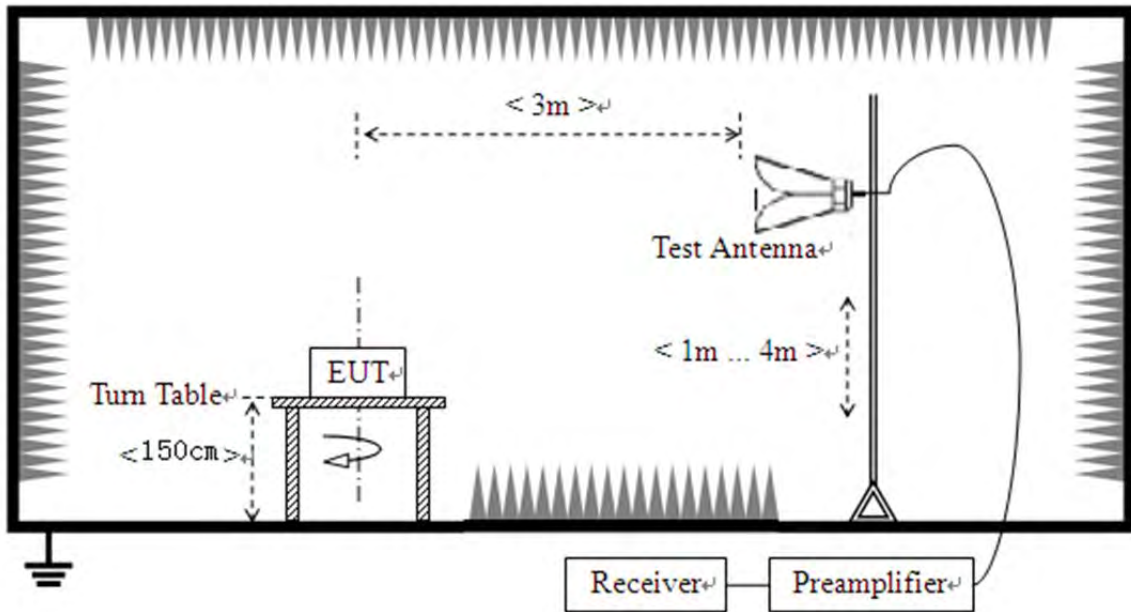

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT



was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.



2.9.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


802.11a Test mode

Plots for Channel = 36

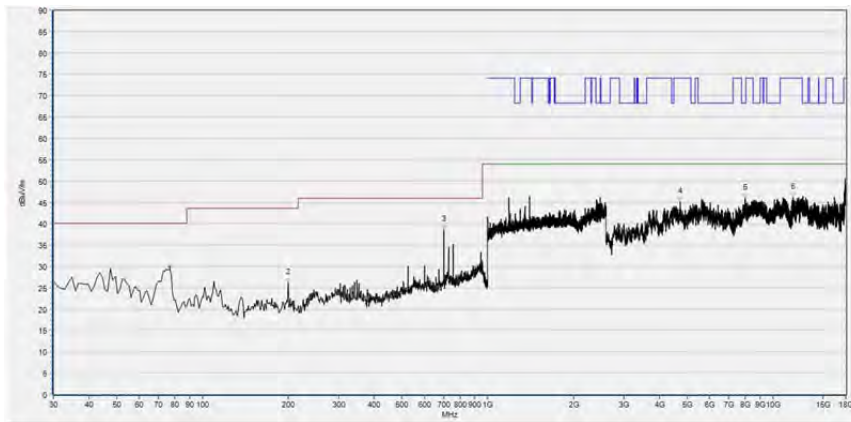

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
76.607	29.26	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	26.17	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	38.50	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
4728.706	45.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7991.078	45.84	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11721.704	46.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

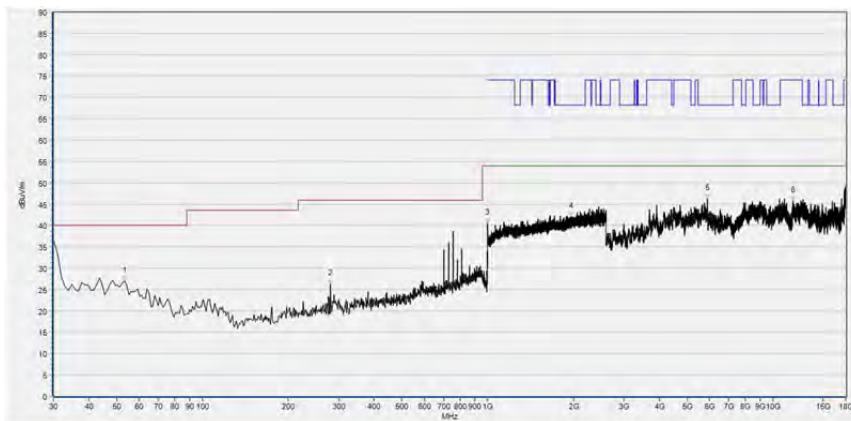

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.303	26.98	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
281.481	26.35	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1000.000	40.59	N/A	N/A	N/A	54.00	N/A	Vertical	PASS
1957.653	42.04	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5893.179	46.25	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11724.785	45.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 44

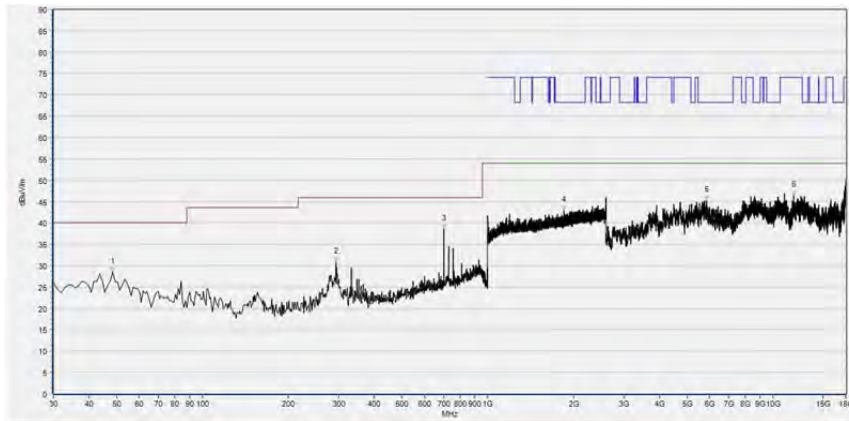

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.448	28.56	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
293.133	30.76	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	38.61	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1853.084	42.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5859.292	45.17	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11832.607	46.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

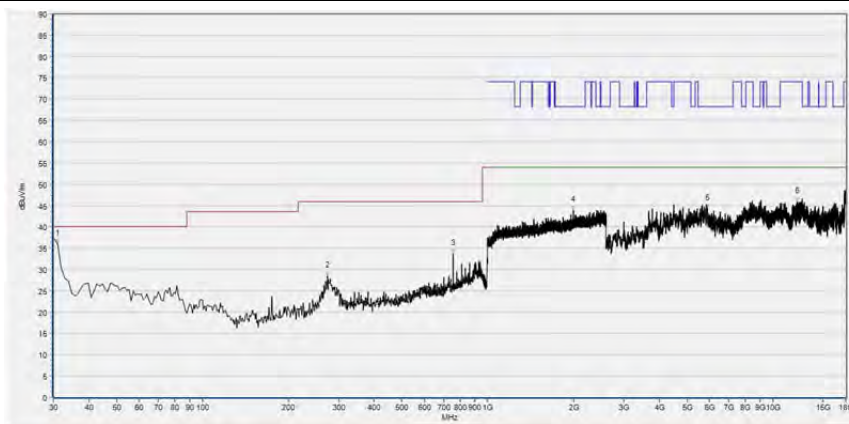

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
30.971	36.04	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
274.685	28.56	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	33.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1997.132	43.92	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5874.695	44.32	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12140.668	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 48

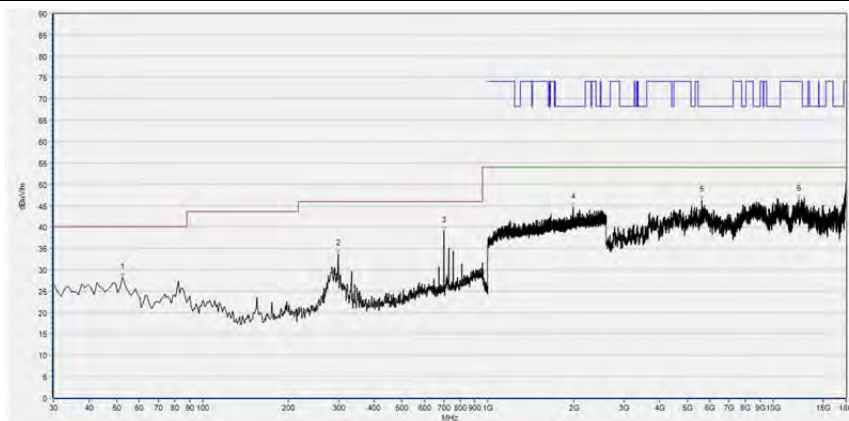

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
52.332	28.21	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
298.959	33.61	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	39.04	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1990.197	44.66	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5634.407	46.29	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12294.699	46.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

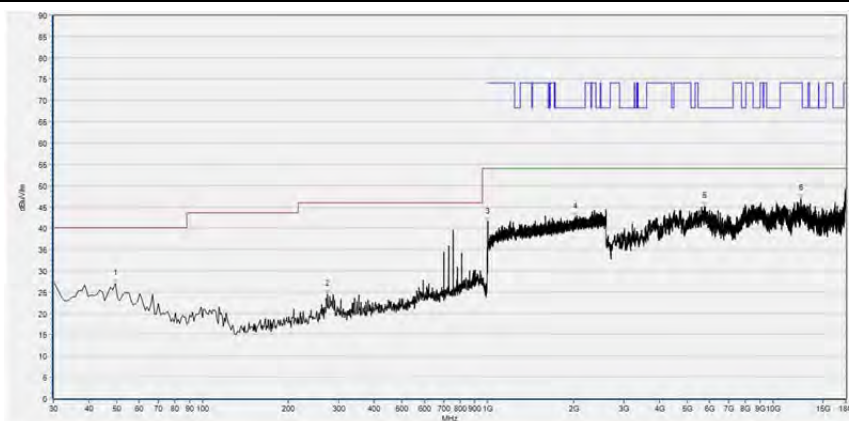

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.419	27.00	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
274.685	24.51	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1000.000	41.45	N/A	N/A	N/A	54.00	N/A	Vertical	PASS
2025.408	42.55	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5754.551	45.08	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12507.261	46.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 149

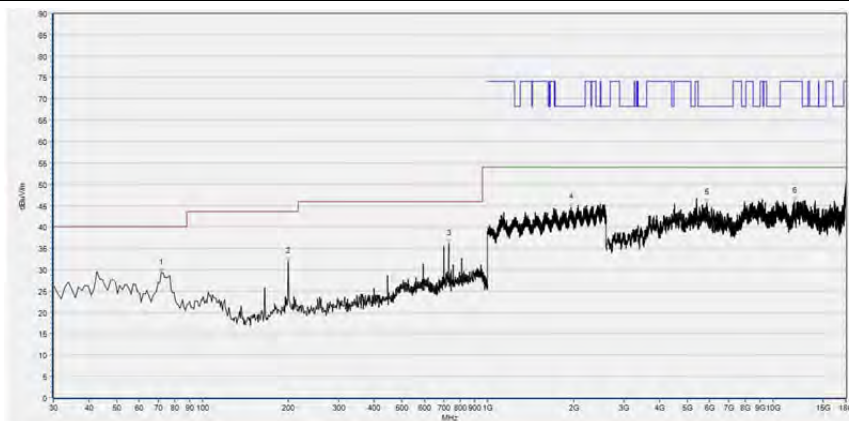

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.752	29.12	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	31.76	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
729.099	35.95	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1959.253	44.59	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5865.453	45.56	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11866.493	45.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

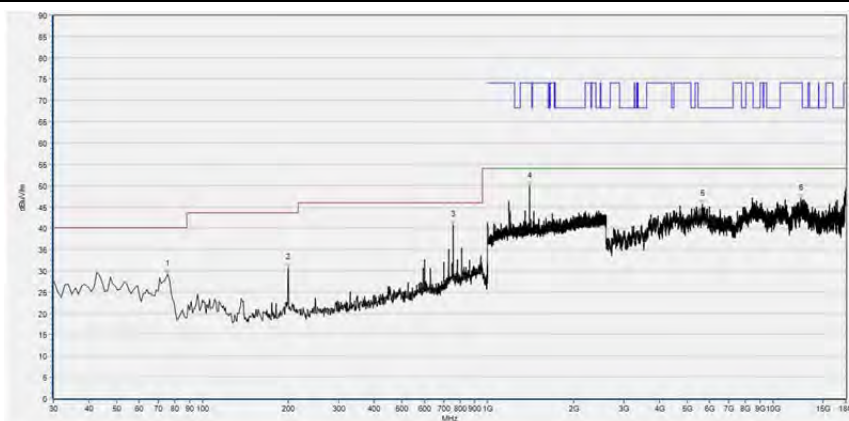

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
75.636	29.14	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	30.59	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
756.286	40.80	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1399.600	49.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5646.729	45.59	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12525.745	46.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 157

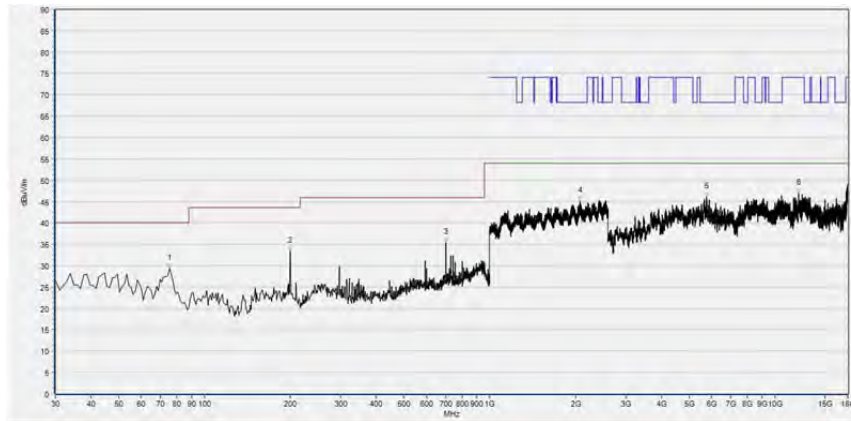

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
75.636	29.36	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	33.34	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	35.41	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2070.757	45.05	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5760.712	46.09	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12069.814	46.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

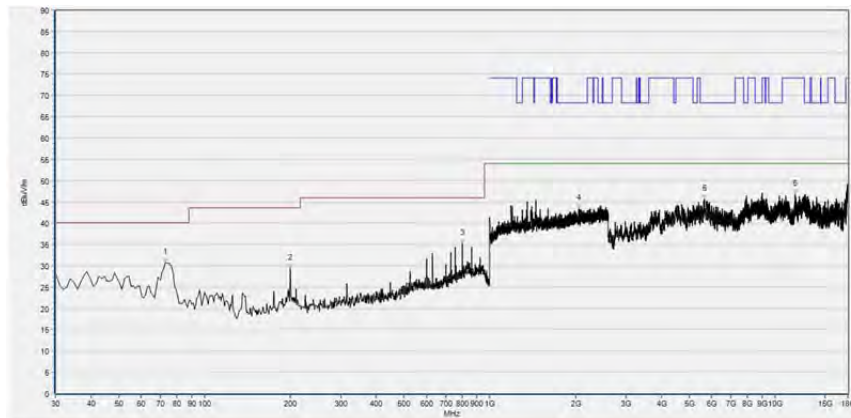

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.723	30.75	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	29.38	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
799.980	35.19	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2053.151	43.43	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5665.213	45.64	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11740.188	46.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 165

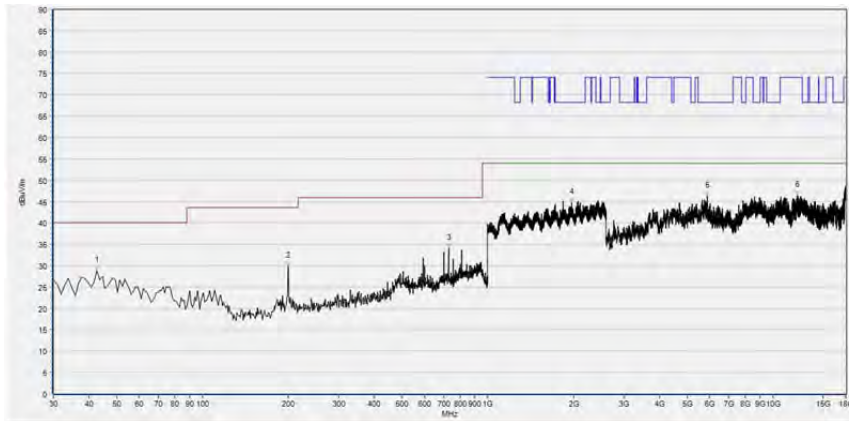

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.623	28.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	29.76	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
729.099	33.95	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1968.323	44.79	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5874.695	46.28	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12180.716	46.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

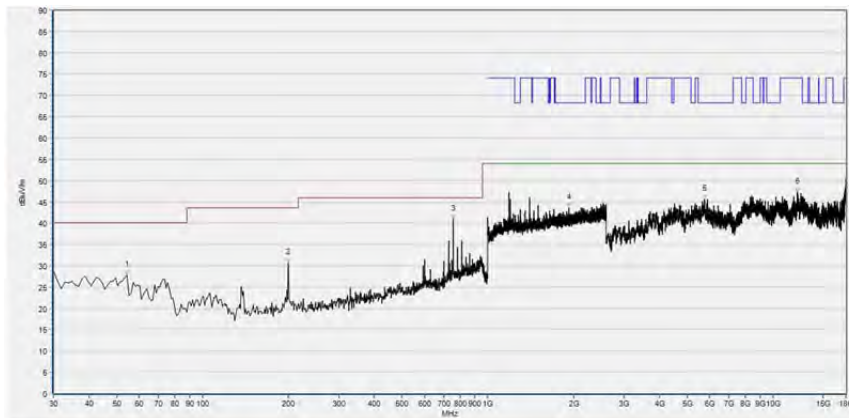


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
54.274	27.81	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	30.62	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
756.286	40.95	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1923.508	43.58	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5757.632	45.55	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12143.749	47.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

802.11n (HT20) Test mode

Plots for Channel = 36

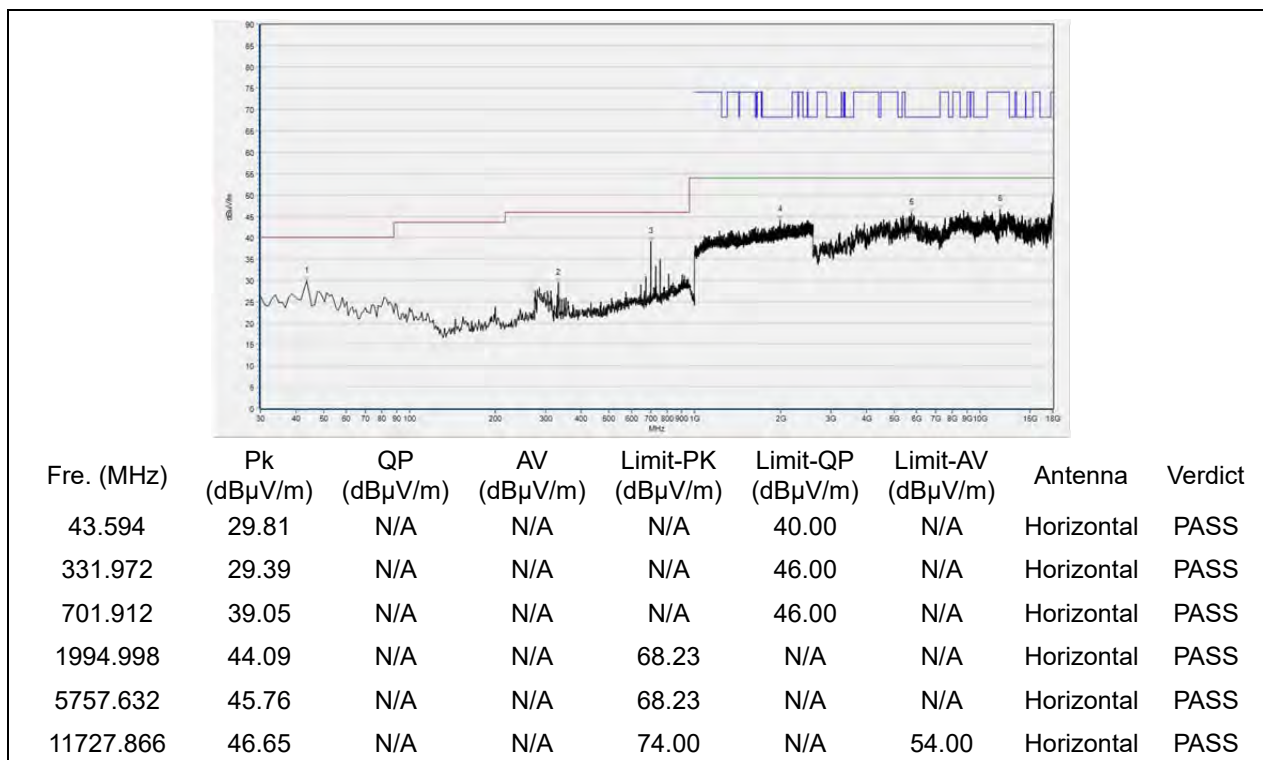


(Antenna Horizontal, 30MHz to 18GHz)

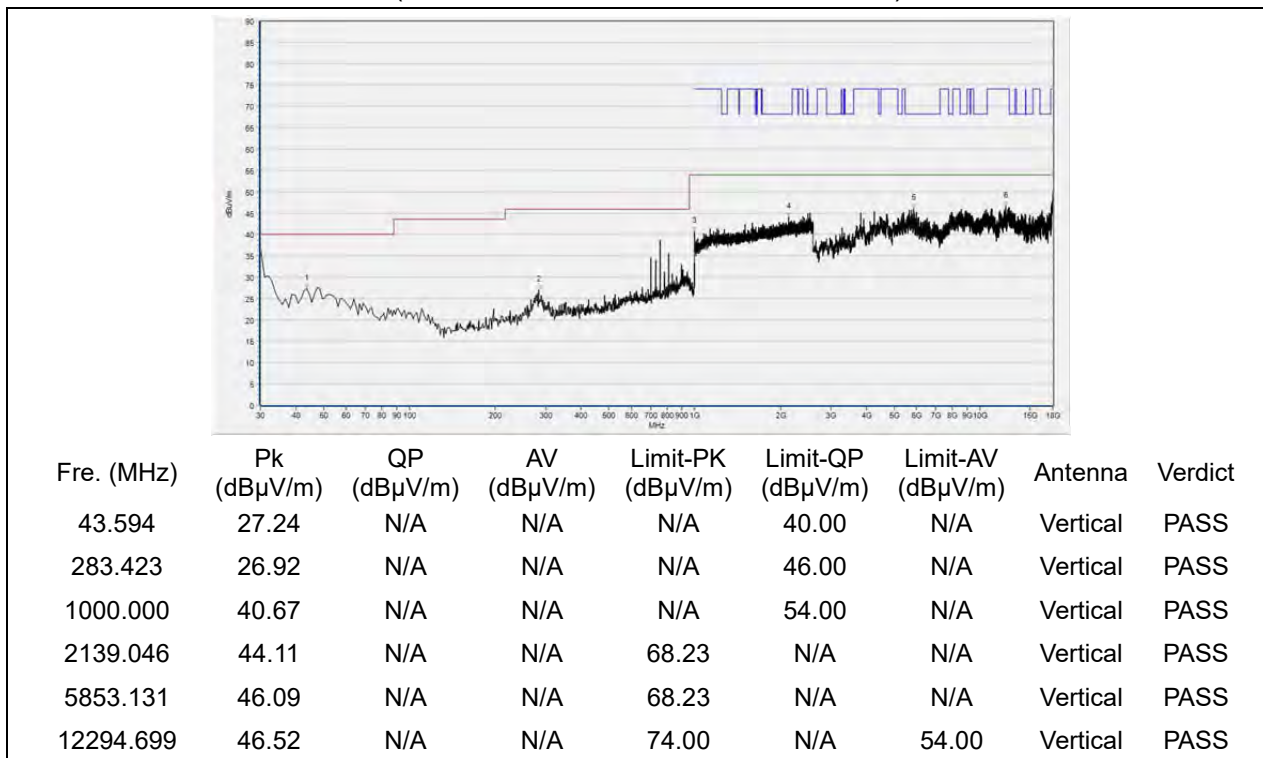


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 44

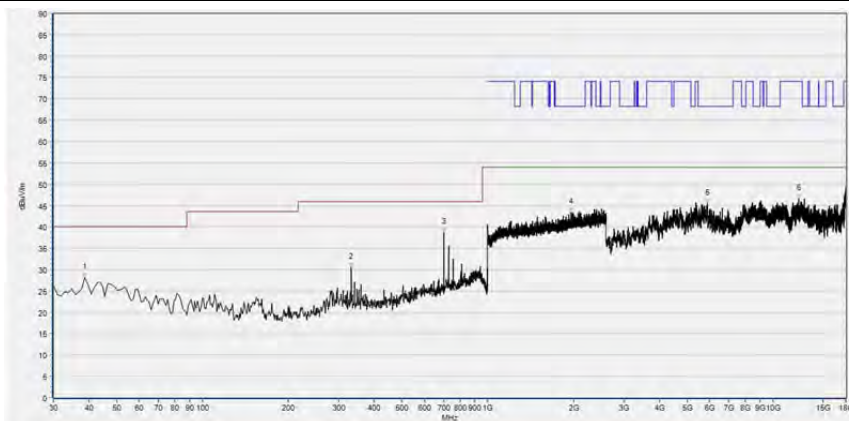

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.739	28.11	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
331.972	30.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	38.75	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1959.253	43.46	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5877.776	45.34	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12310.102	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

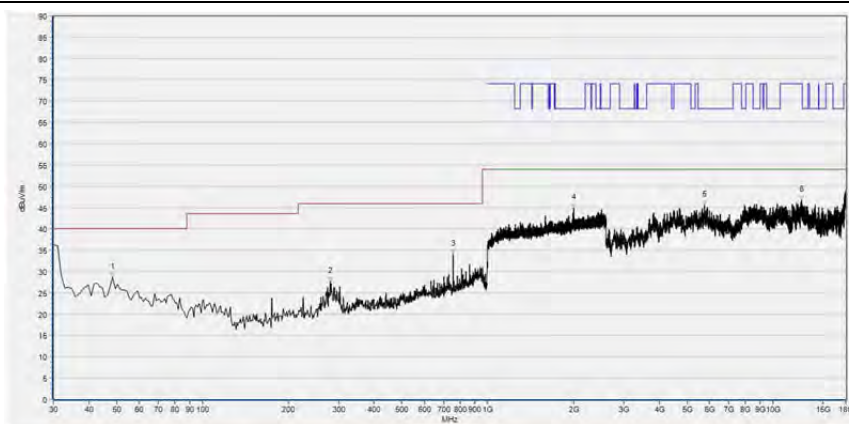

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	28.72	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
280.511	27.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	34.10	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1998.199	44.94	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5763.793	45.54	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12587.357	46.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 48

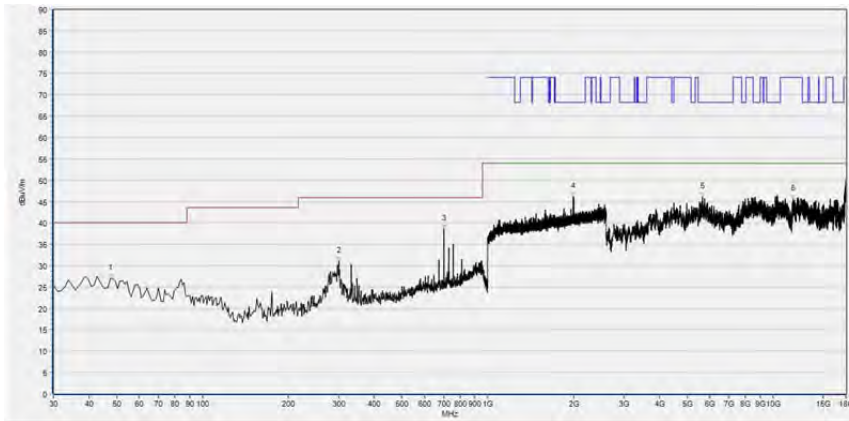

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
47.477	27.05	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
299.930	31.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	38.54	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1994.998	46.14	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5646.729	46.11	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11737.107	45.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

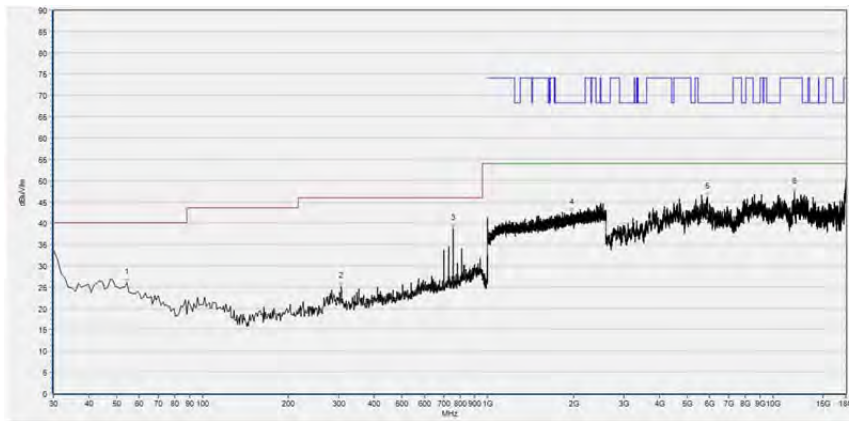

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
54.274	26.06	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
306.727	25.14	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	38.74	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1969.923	42.34	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5880.856	46.02	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11875.735	47.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 149

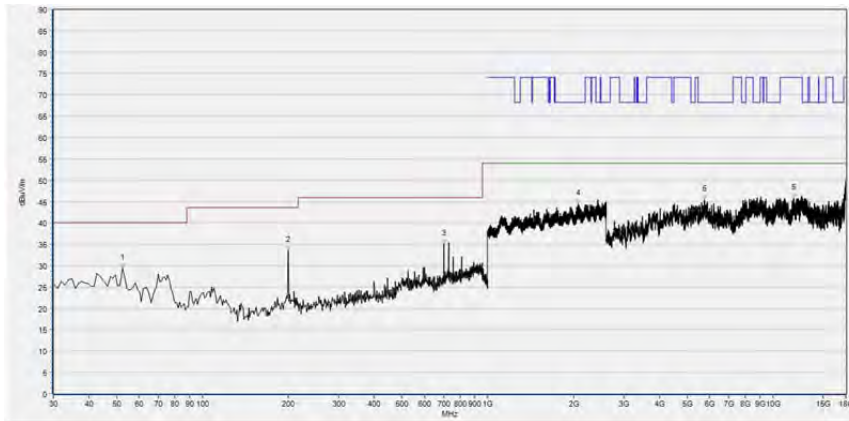

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
52.332	29.33	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	33.55	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	35.08	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2076.626	44 36	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5745.309	45.43	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11817.203	45.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

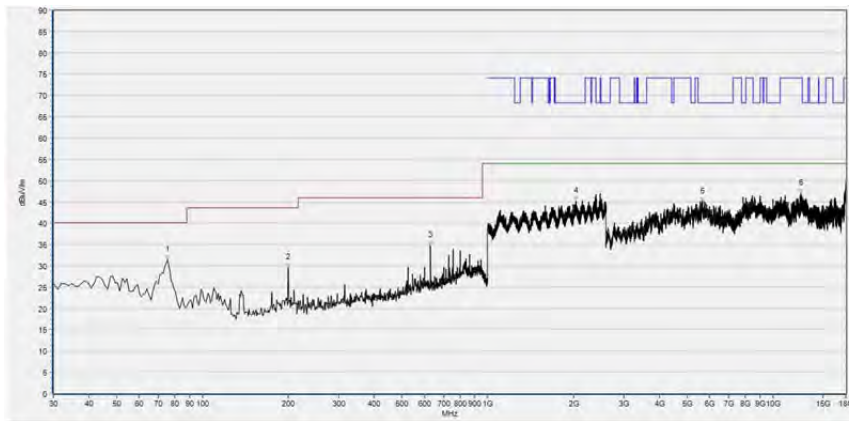

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
75.636	31.37	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	29.50	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
630.060	34.63	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2040.880	45.09	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5637.487	44.93	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12538.068	46.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 157

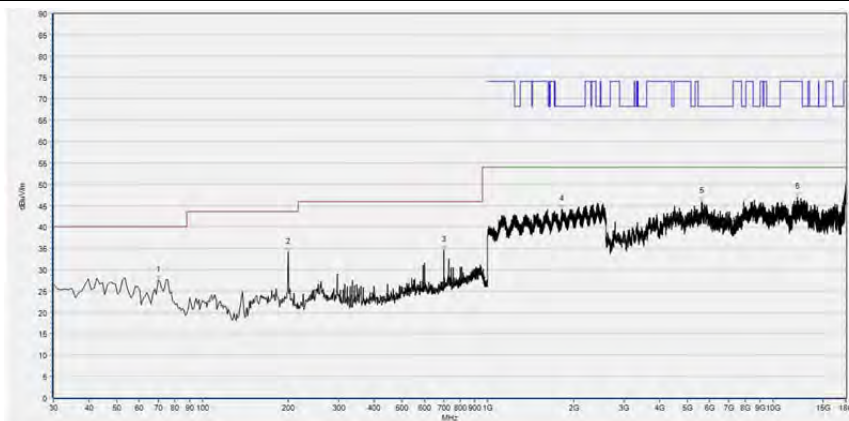

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
69.810	27.55	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	33.98	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	34.60	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1820.007	44.07	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5631.326	45.97	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12174.555	46.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

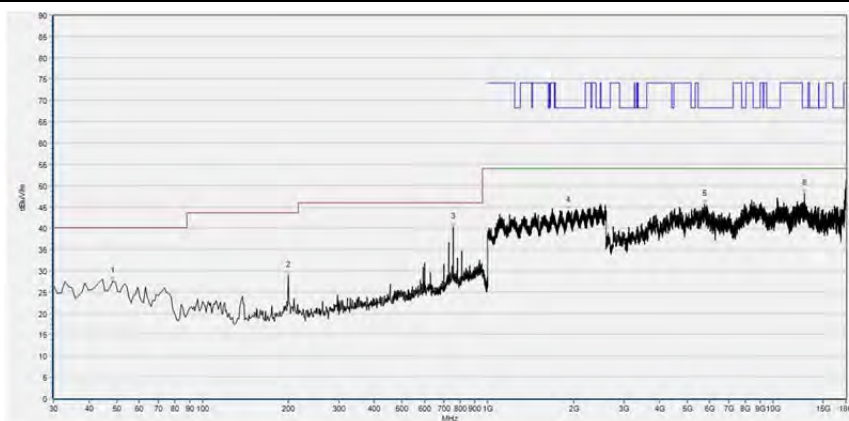

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	27.56	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	28.86	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
756.286	40.26	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1917.639	44.01	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5751.470	45.62	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12913.903	48.16	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 165

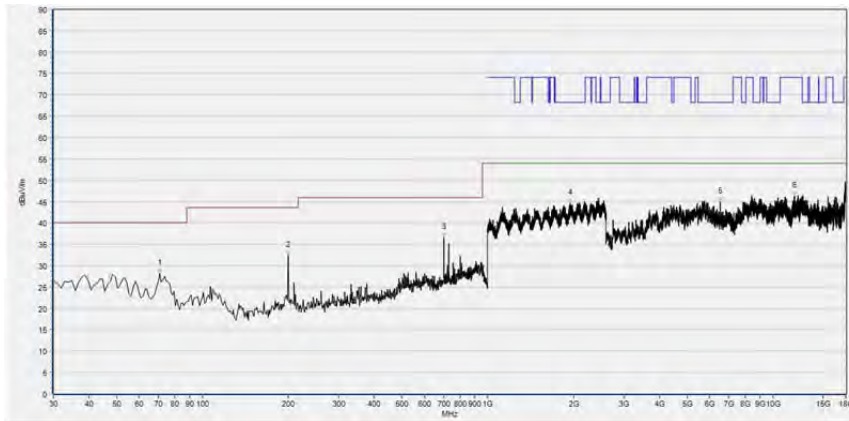

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
70.781	28.15	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	32.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	36.58	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1946.982	44.58	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
6527.786	44.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11860.332	46.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

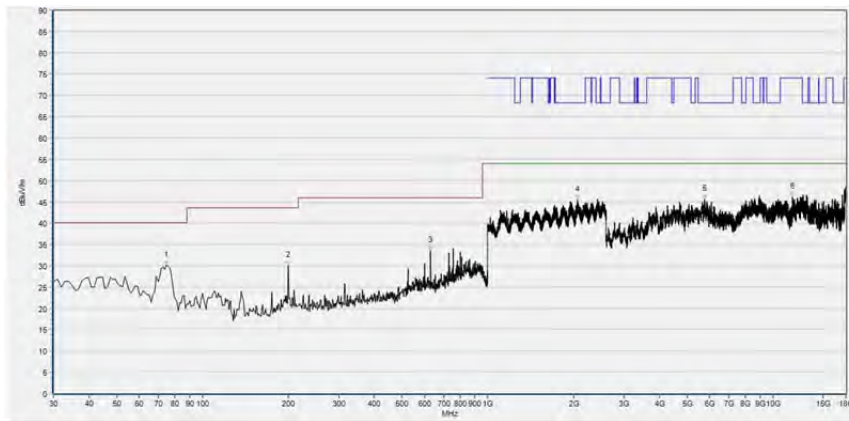


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.665	29.93	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	29.93	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
630.060	33.52	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2065.955	45.49	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5766.873	45.62	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11715.543	46.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11n (HT40) Test mode

Plots for Channel = 38

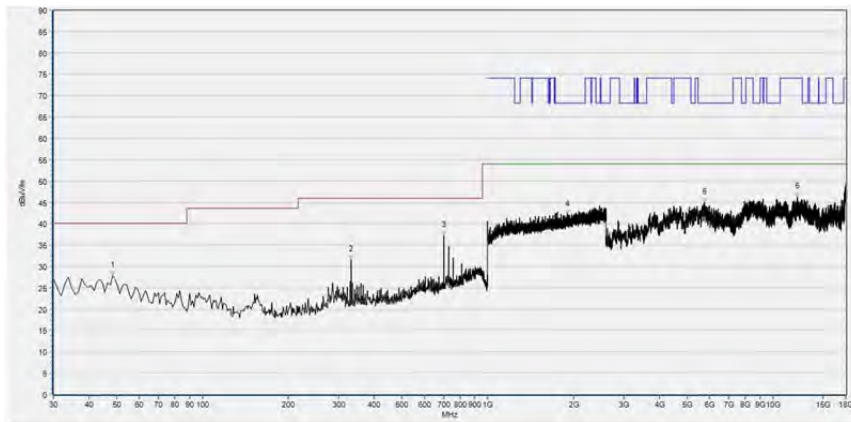

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	27.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
331.972	31.46	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	37.27	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1906.435	42.11	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5751.470	44.93	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12168.394	46.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

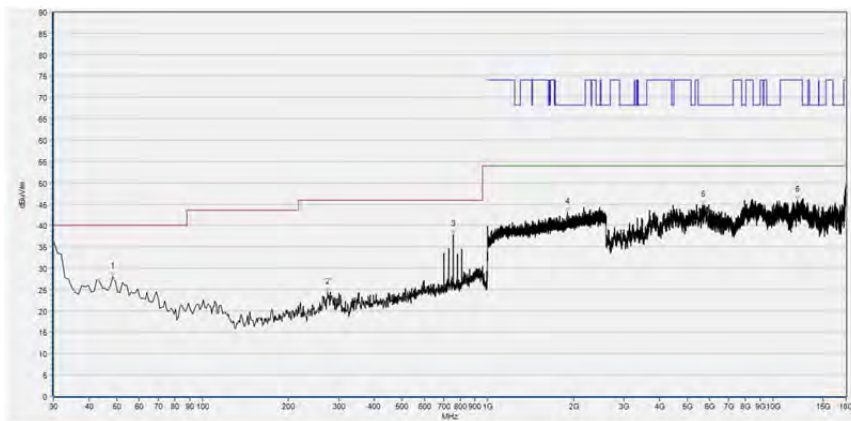


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	27.93	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
274.685	24.27	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	37.95	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1898.433	43.10	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5683.697	44.82	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12137.588	45.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel = 46

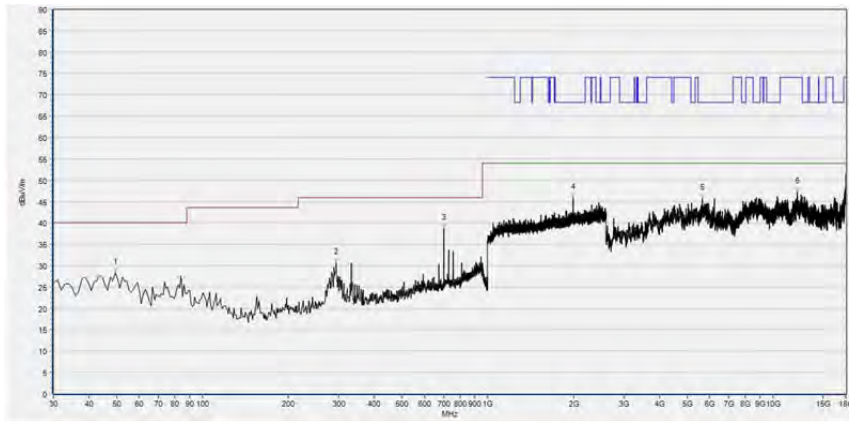

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.419	28.37	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
294.104	30.70	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	38.75	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1995.532	46.00	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5643.649	45.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12189.958	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

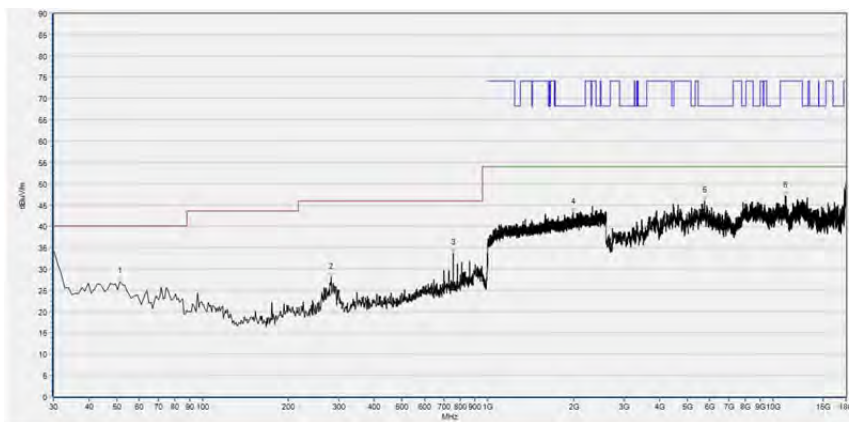

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
51.361	26.97	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
282.452	28.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	33.76	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1994.465	43.23	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5751.470	45.87	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11010.082	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 151

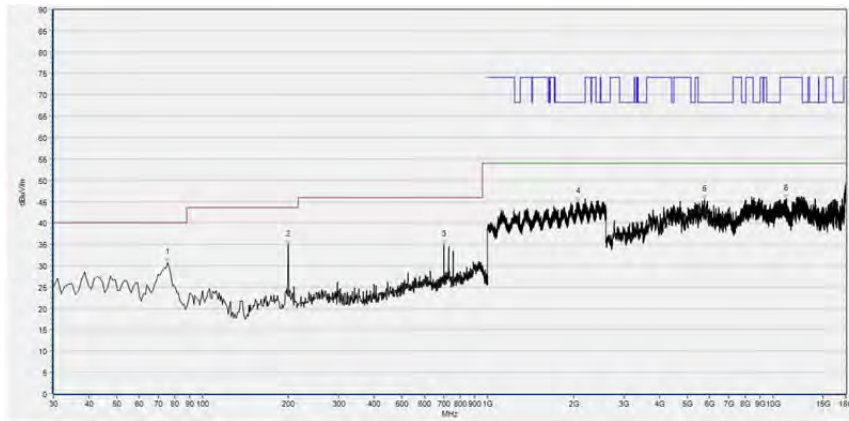

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
75.636	30.63	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	34.90	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	34.83	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2077.159	44.96	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5754.551	45.48	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11124.065	45.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

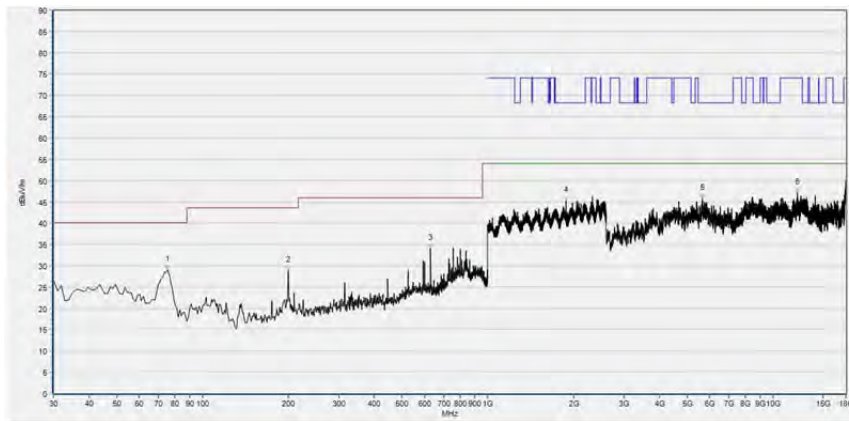


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
75.636	28.95	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	28.80	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
630.060	33.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1879.226	45.30	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5662.132	45.69	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12162.232	47.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 159

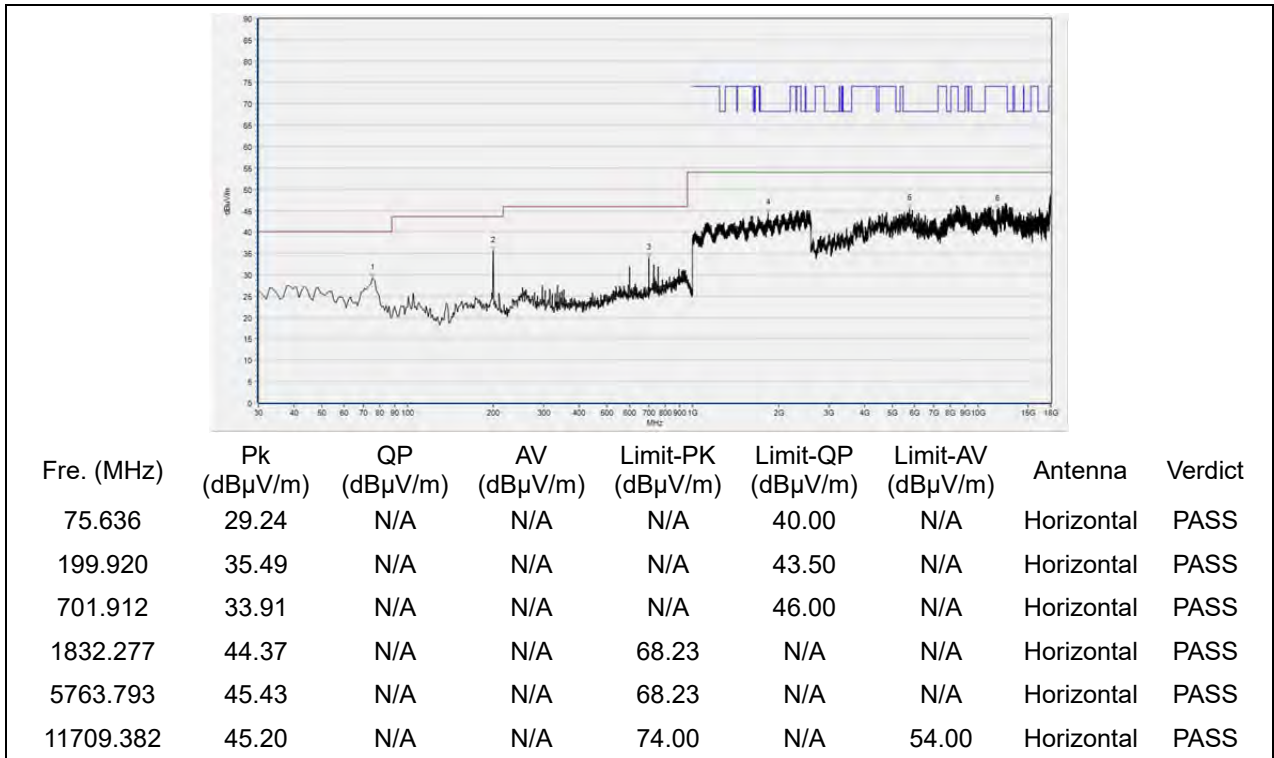

(Antenna Horizontal, 30MHz to 18GHz)

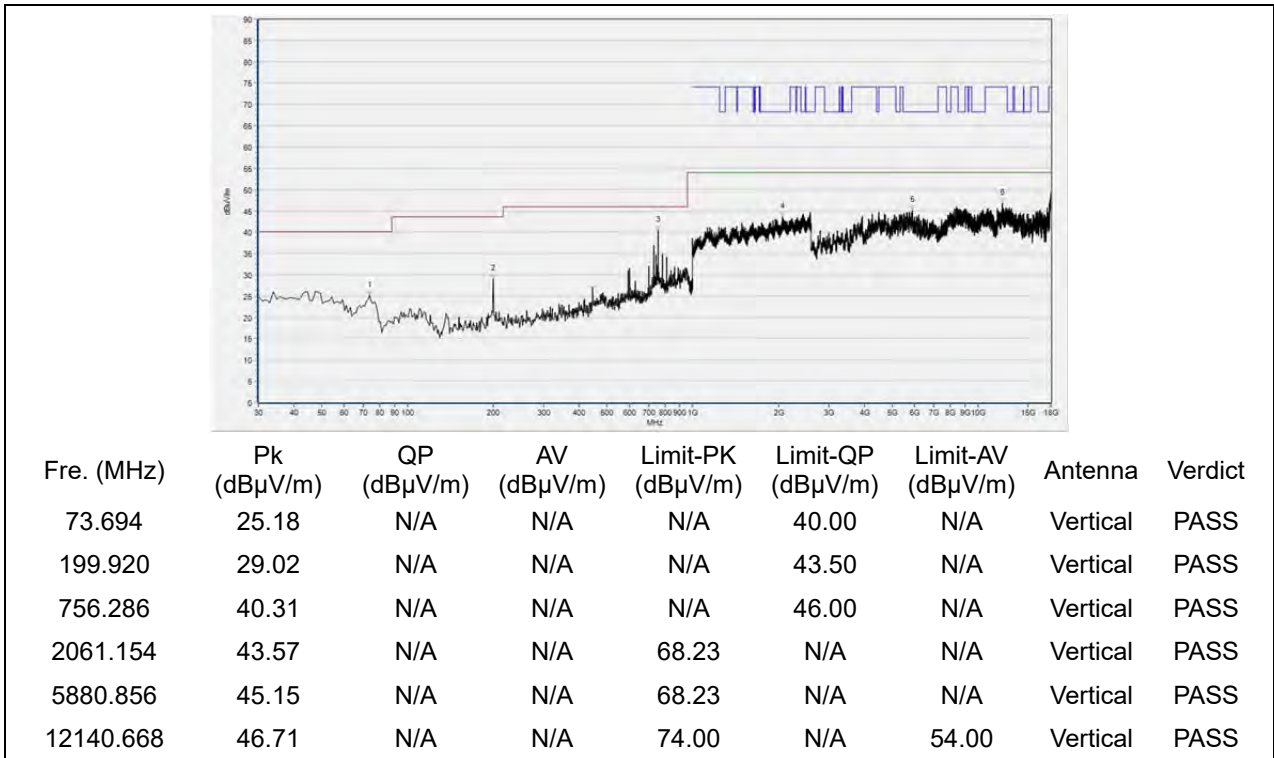


(Antenna Vertical, 30MHz to 18GHz)




802.11ac (VHT20) Test mode

Plots for Channel = 36

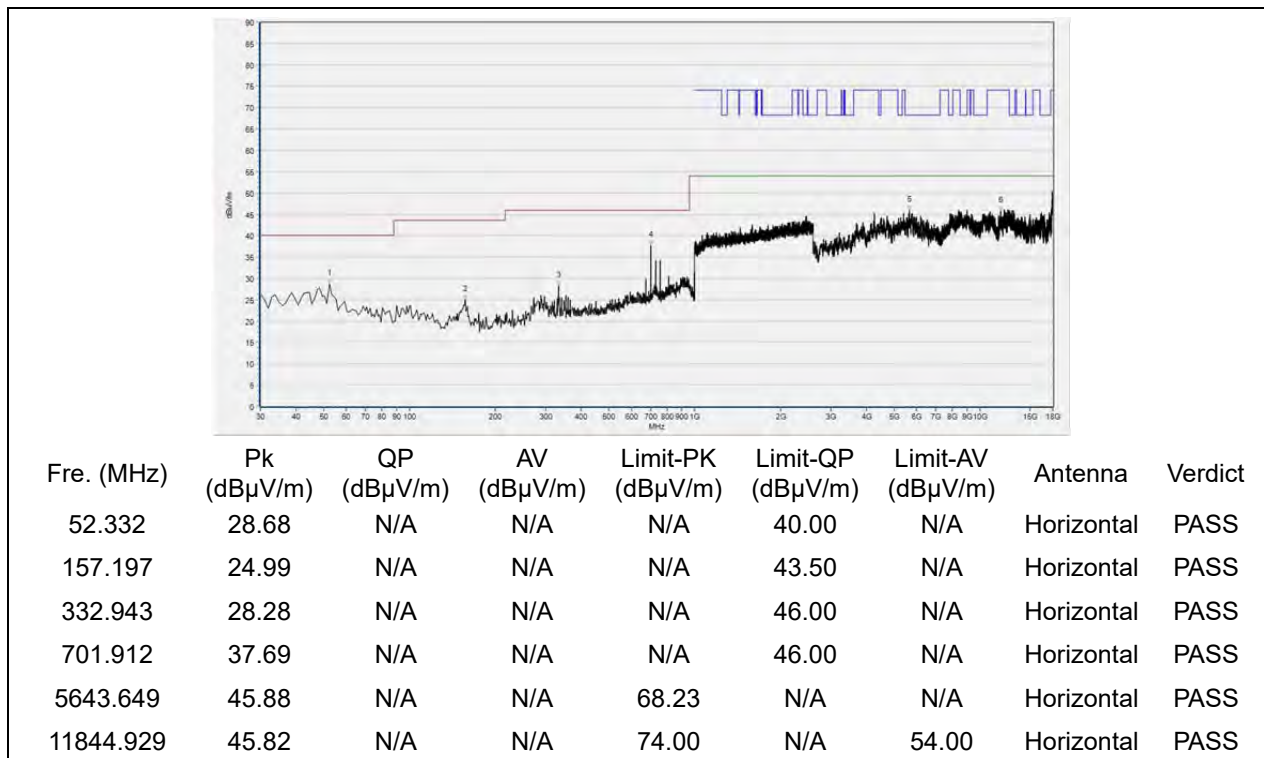


(Antenna Horizontal, 30MHz to 18GHz)

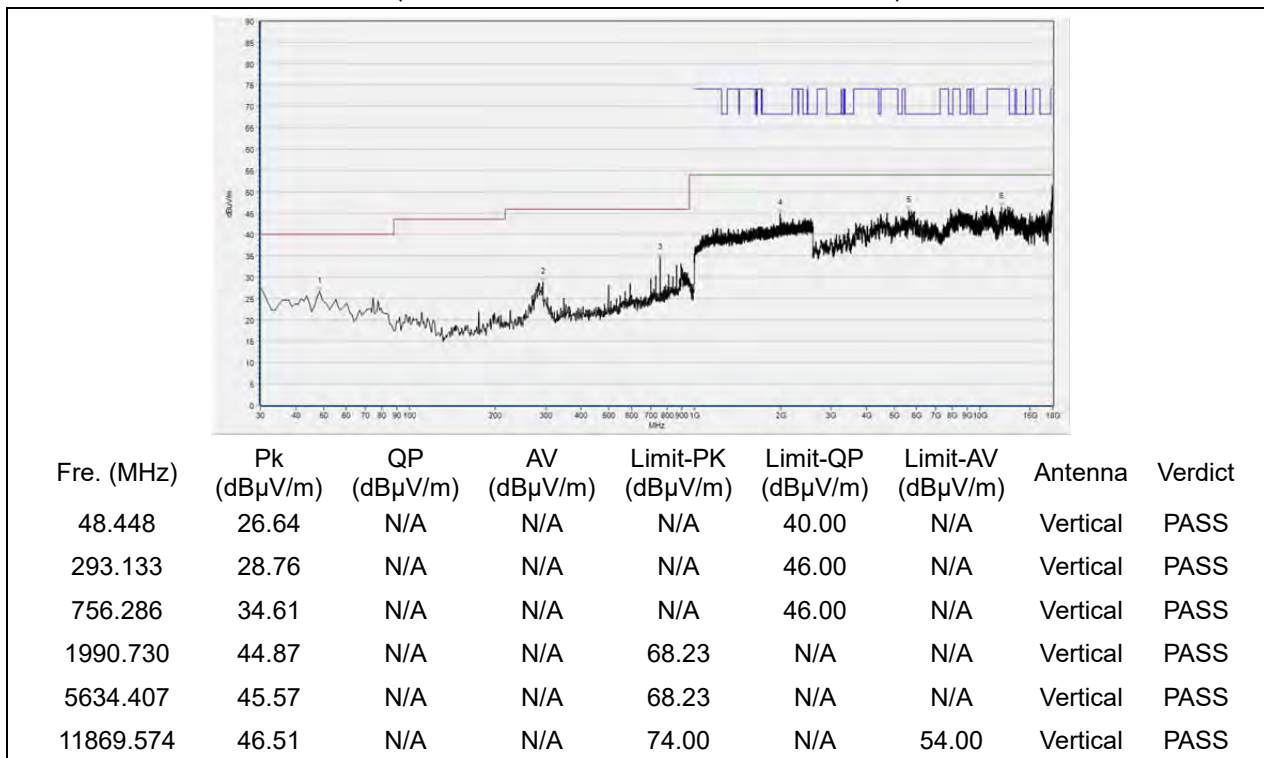


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 44

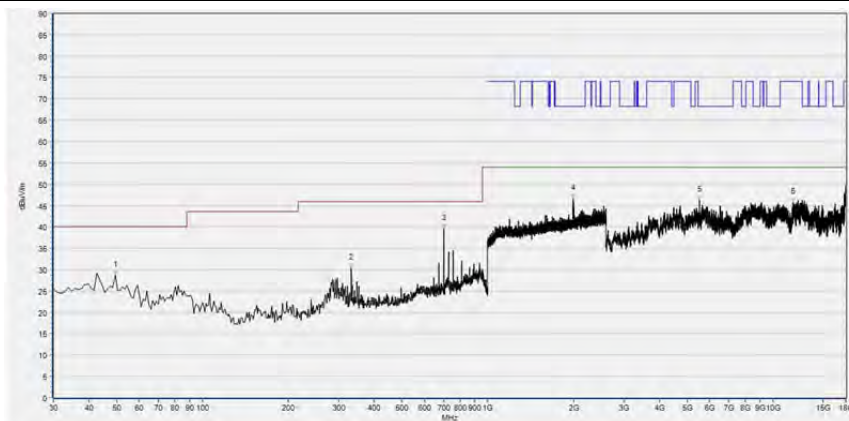

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.419	28.61	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
331.972	30.27	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	39.56	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1997.132	46.52	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5517.343	46.25	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11752.511	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

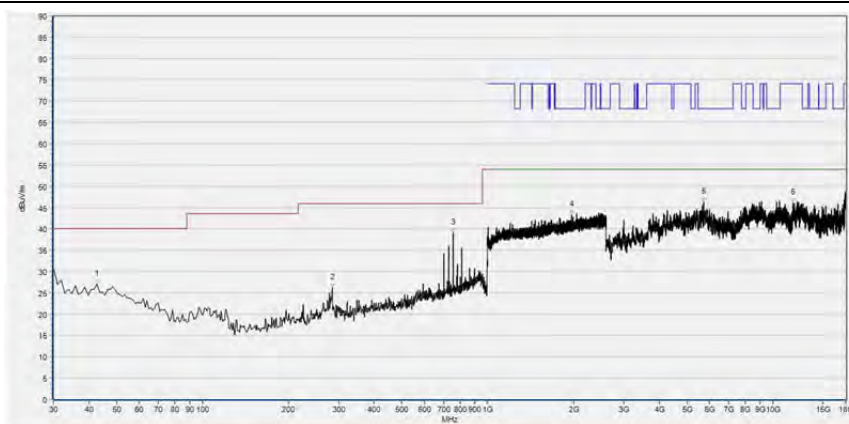

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
42.623	26.94	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
285.365	26.14	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	38.99	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1972.057	43.23	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5726.825	46.28	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11737.107	46.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 48

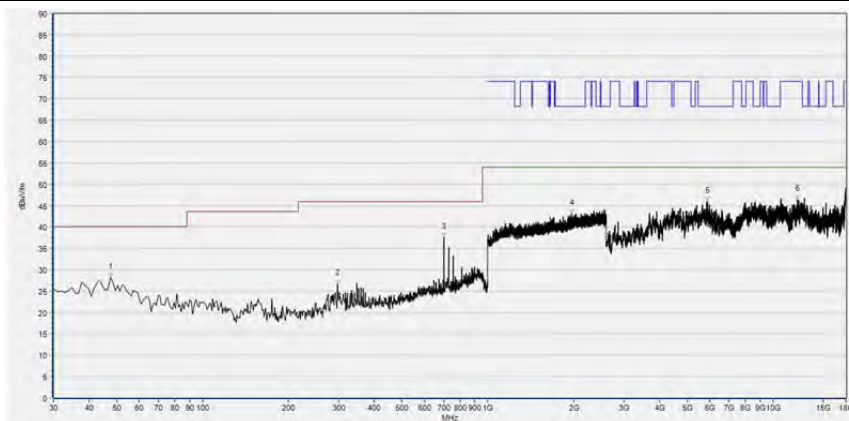

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
47.477	28.09	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
297.017	26.64	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	37.62	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1967.256	43.02	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5887.017	45.96	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12196.119	46.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

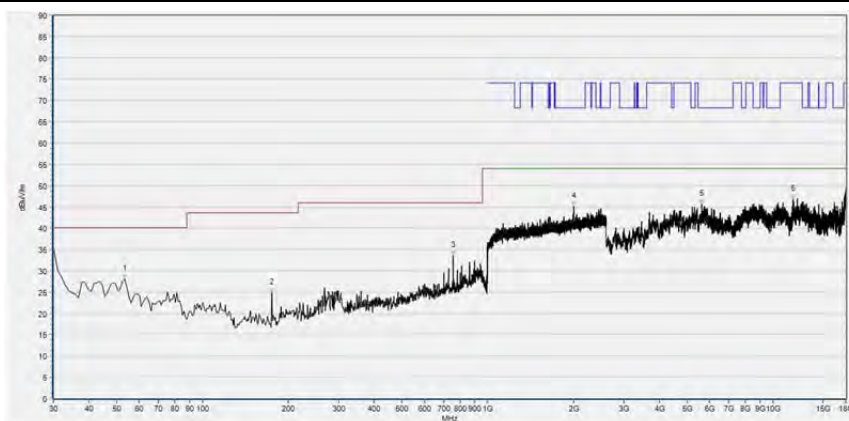

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.303	27.99	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
174.675	24.75	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
756.286	33.48	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1998.733	45.04	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5631.326	45.53	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11721.704	46.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 149

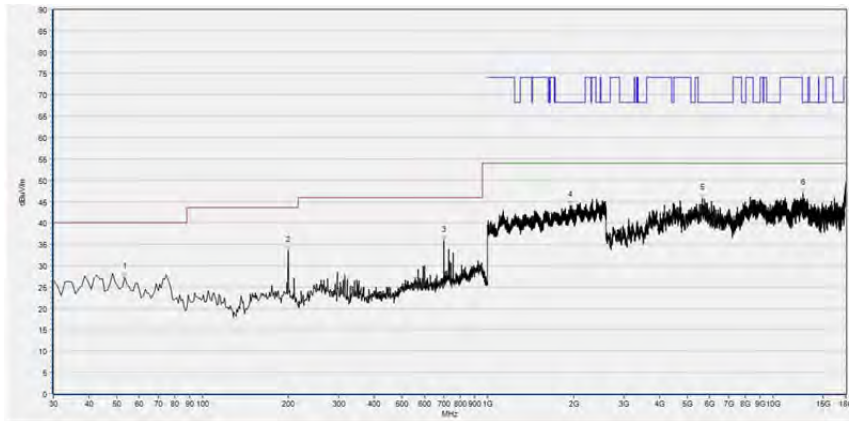

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
53.303	27.24	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	33.50	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	35.91	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1949.650	44.16	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5637.487	45.69	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12722.905	46.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

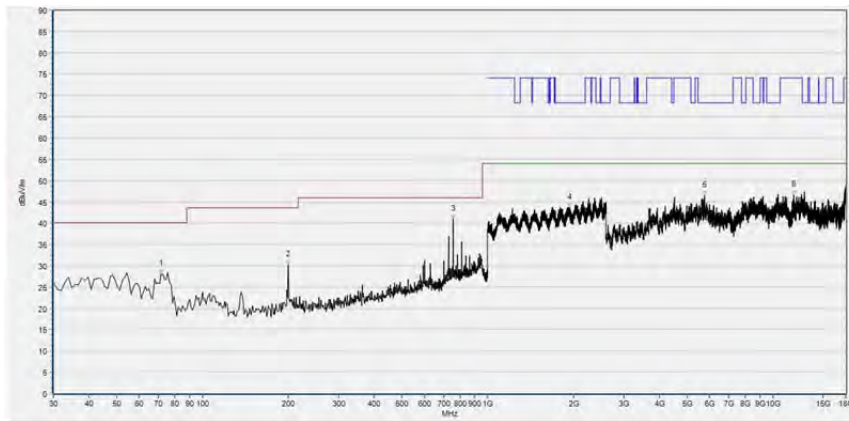


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.752	28.03	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	30.13	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
756.286	40.90	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1929.910	43.49	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5751.470	46.35	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11851.090	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 157

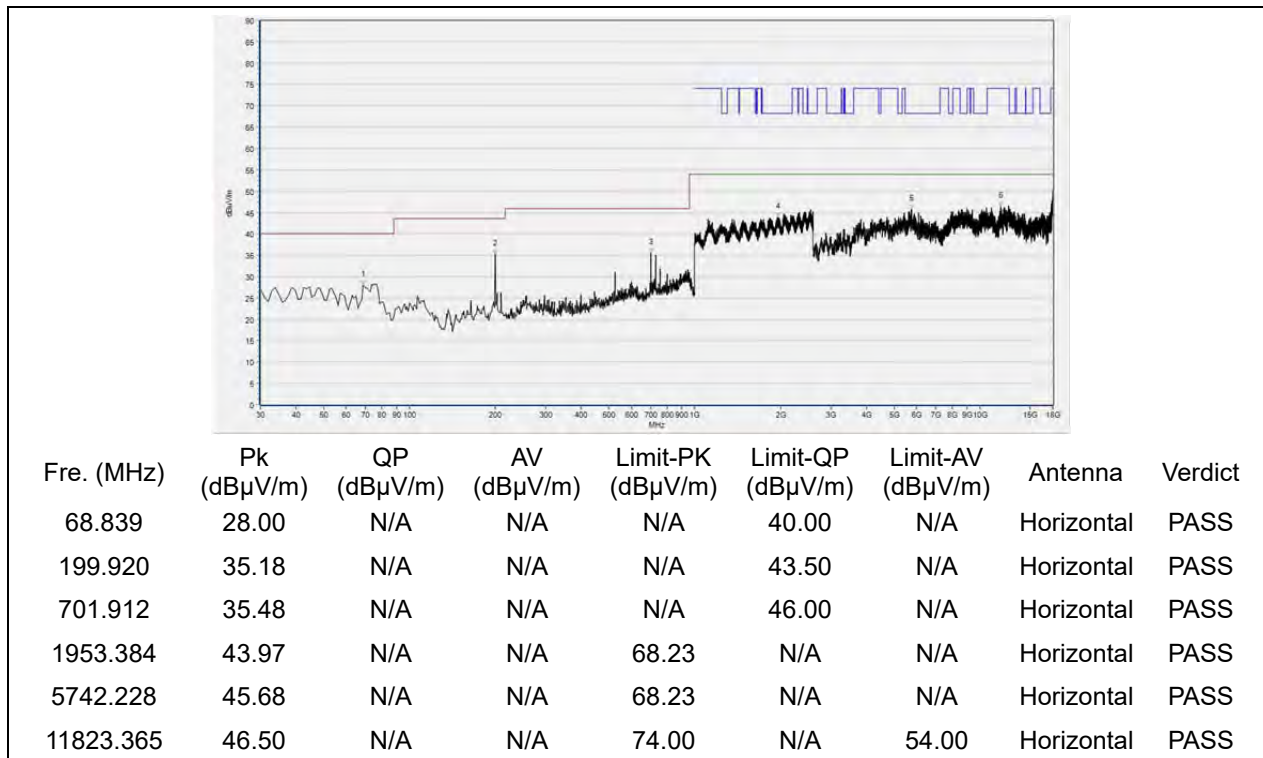


(Antenna Horizontal, 30MHz to 18GHz)

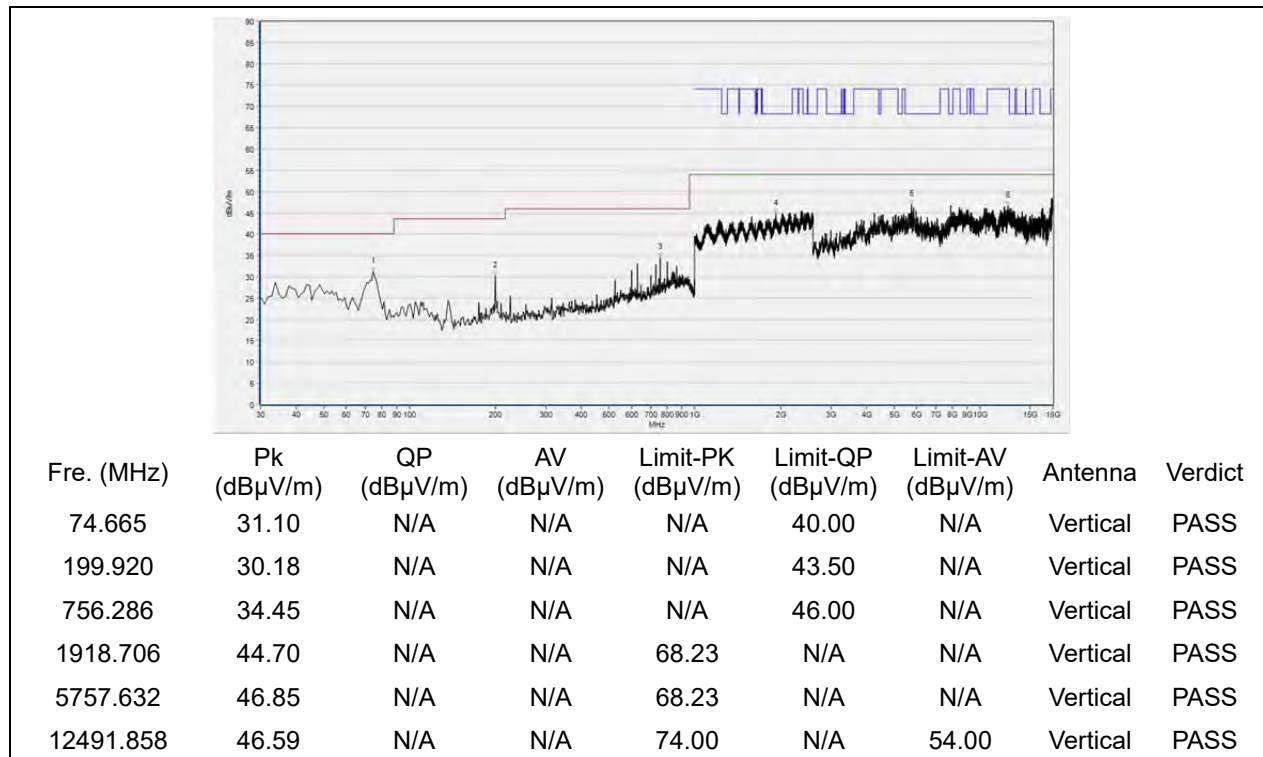


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 165

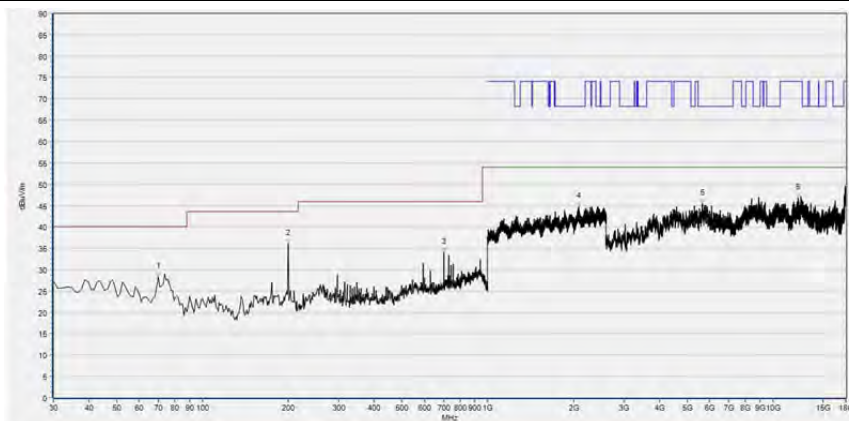

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
69.810	28.28	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	36.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	34.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2080.894	44.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5640.568	45.46	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12205.361	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

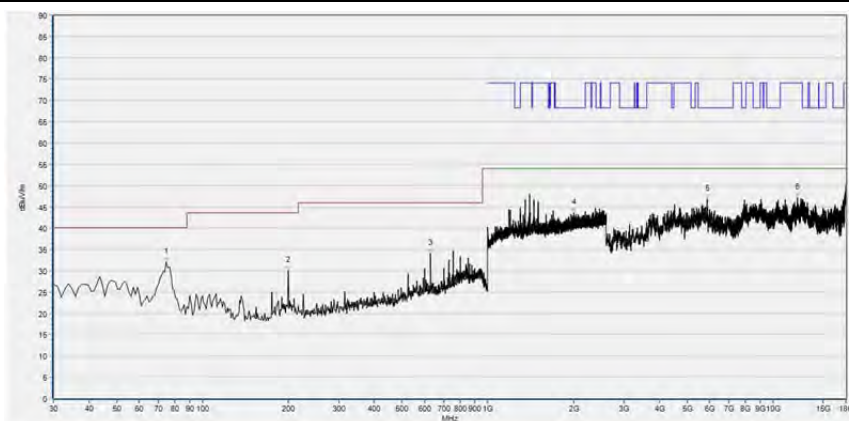


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
74.665	31.94	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	29.94	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
630.060	34.03	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2000.867	43.50	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5868.534	46.71	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12134.507	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11ac (VHT40) Test mode

Plots for Channel = 38

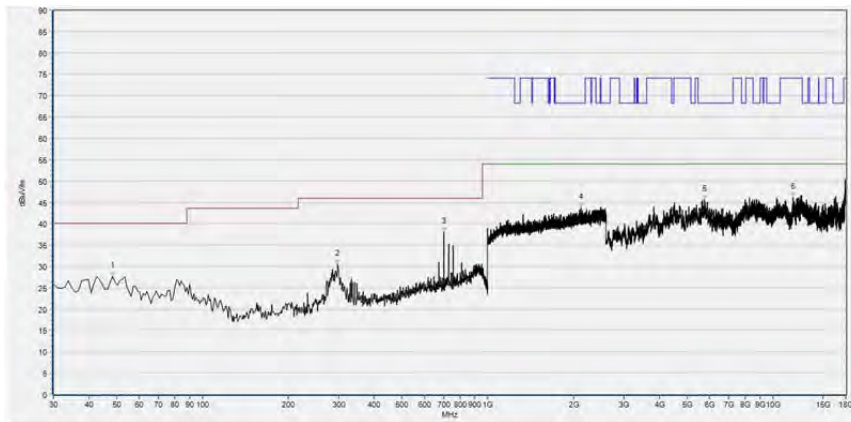

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	27.61	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
297.988	30.47	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	38.06	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2118.239	43.66	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5751.470	45.55	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11727.866	46.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

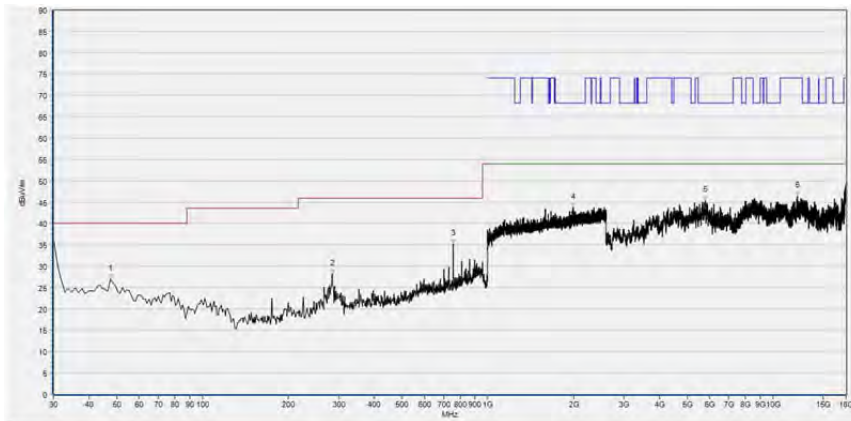


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
47.477	27.03	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
285.365	28.18	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	35.20	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1992.864	43.77	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5773.035	45.49	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12149.910	46.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel = 46

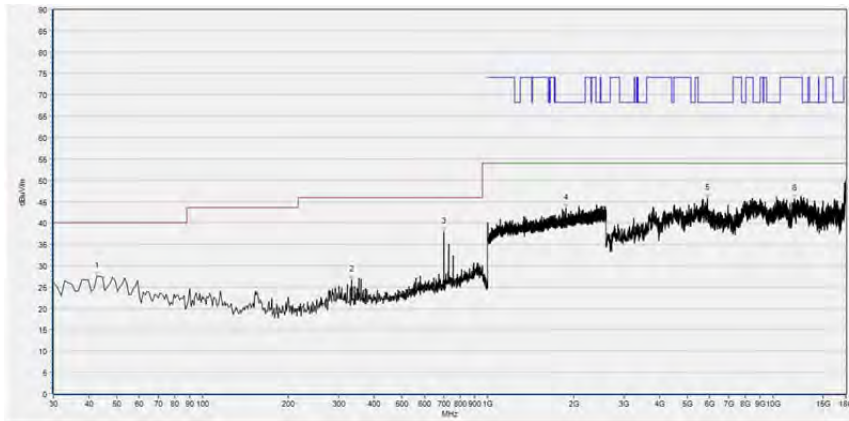

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
42.623	27.44	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.943	26.57	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	37.95	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1882.961	43.35	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5899.340	45.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11881.896	45.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

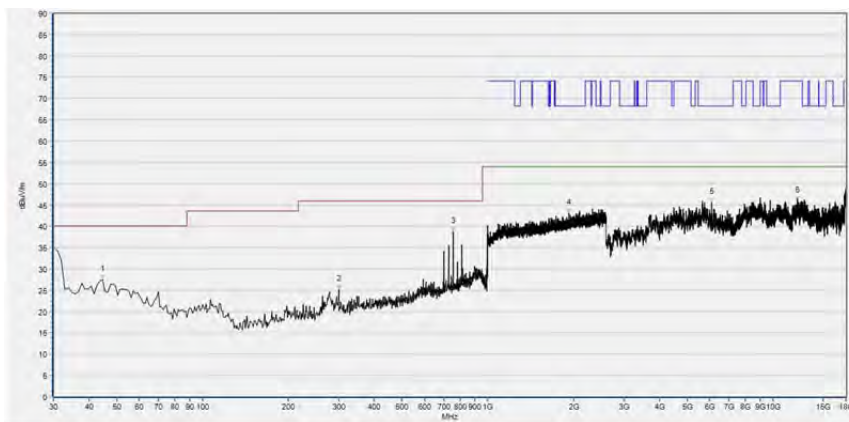


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
44.565	27.42	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
299.930	25.14	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
756.286	38.68	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1924.041	43.13	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
6090.338	45.63	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12149.910	45.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 151

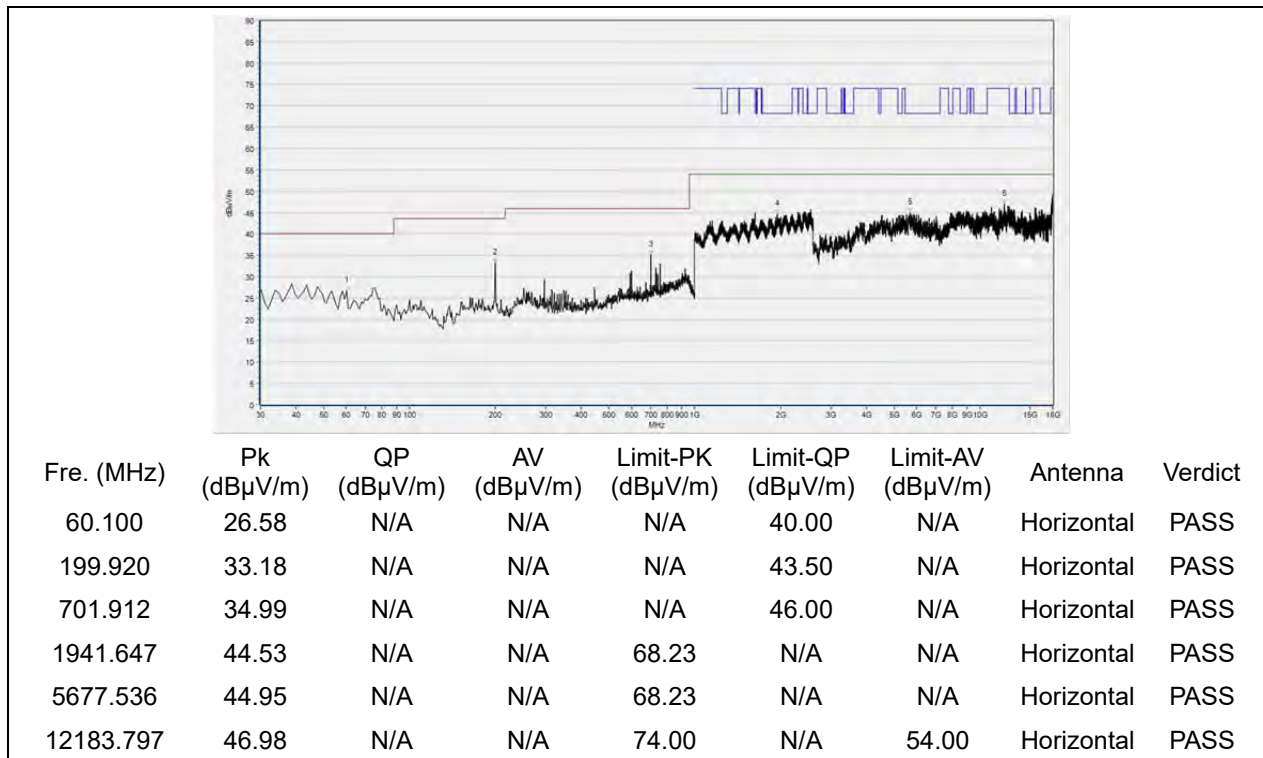


(Antenna Horizontal, 30MHz to 18GHz)

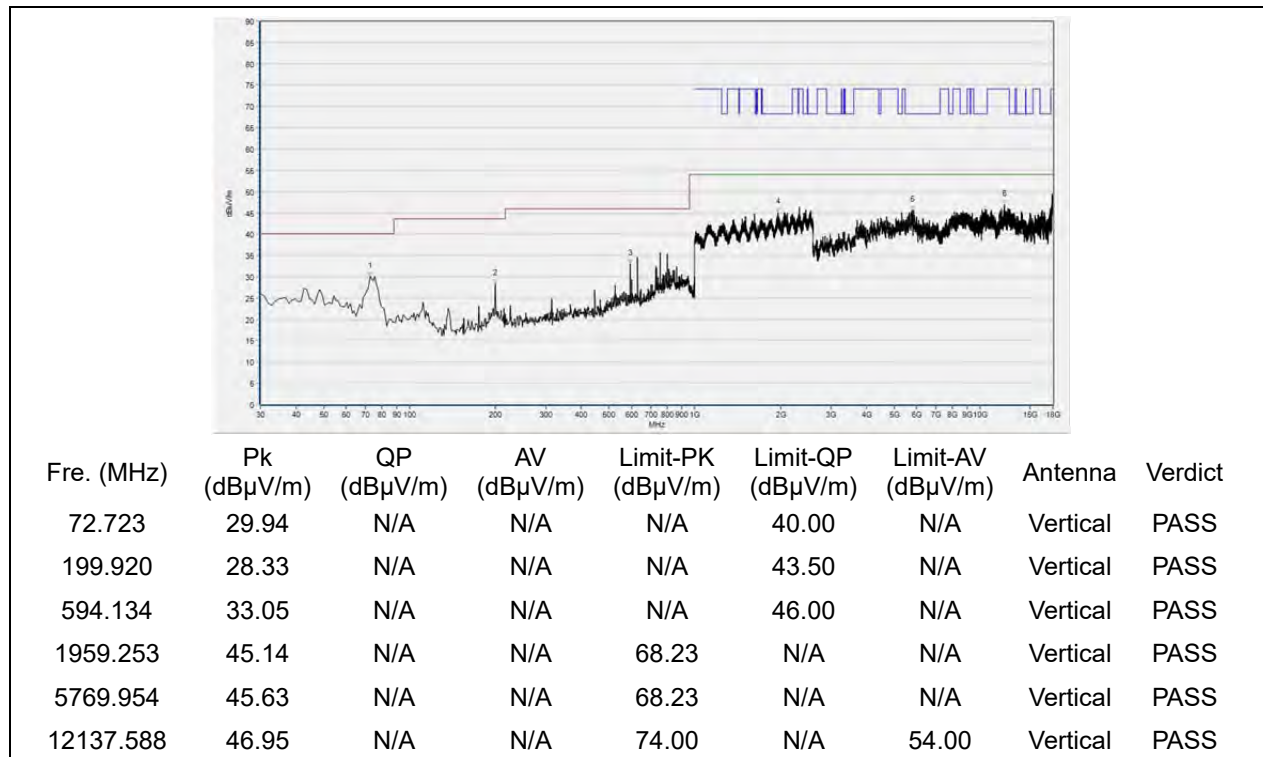


(Antenna Vertical, 30MHz to 18GHz)

Plots for Channel = 159

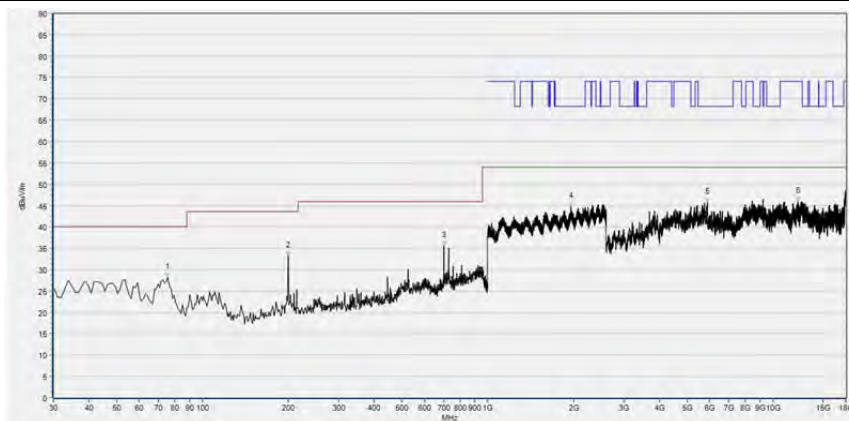

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
75.636	28.18	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	33.13	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	35.61	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1960.854	44.77	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5874.695	45.73	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12226.925	45.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

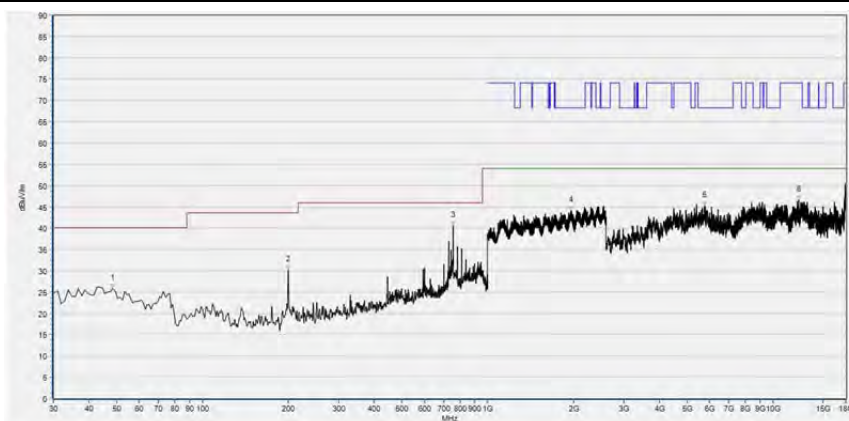


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	25.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	30.16	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
756.286	40.54	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1954.451	44.04	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5742.228	45.17	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12310.102	46.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11ac (VHT80) Test mode

Plot for Channel = 42

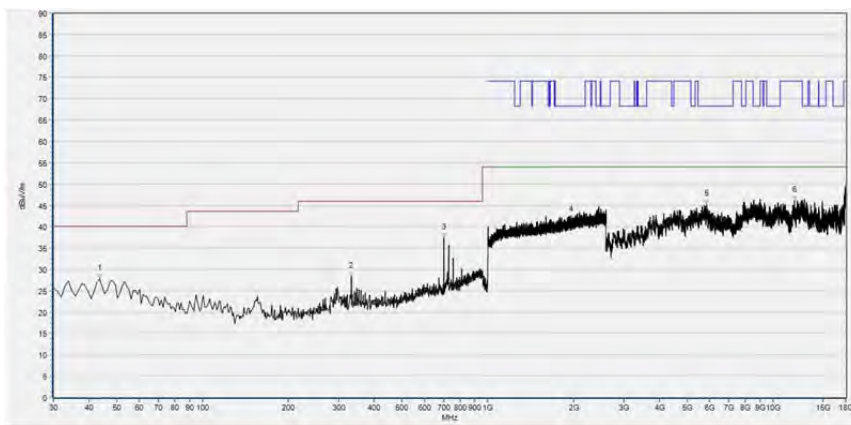

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.594	27.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
331.972	28.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
701.912	37.31	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1954.451	41.52	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5859.292	45.25	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11872.655	46.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

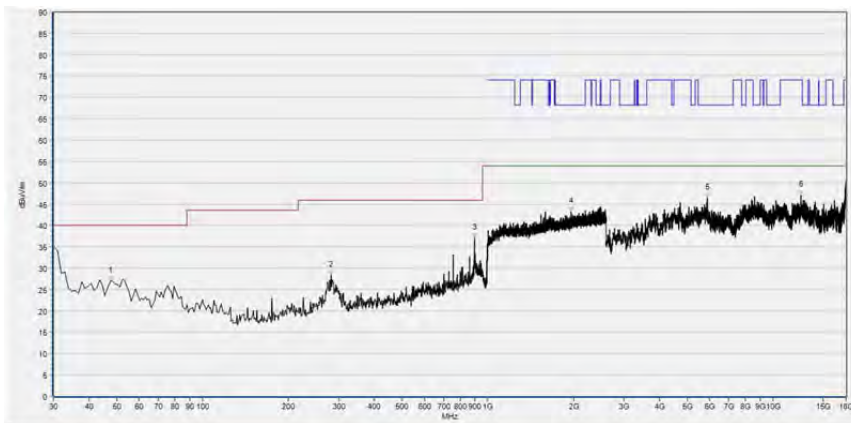

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
47.477	26.93	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
282.452	28.29	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
897.077	37.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1959.787	43.18	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5871.614	46.42	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12534.987	47.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel = 155

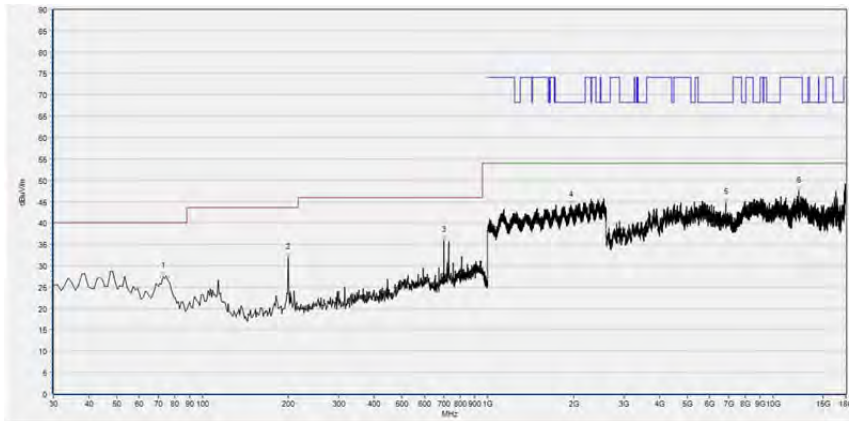

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
72.723	27.57	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
199.920	31.93	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
701.912	35.78	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1956.586	44.13	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
6817.363	44.69	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12288.538	47.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

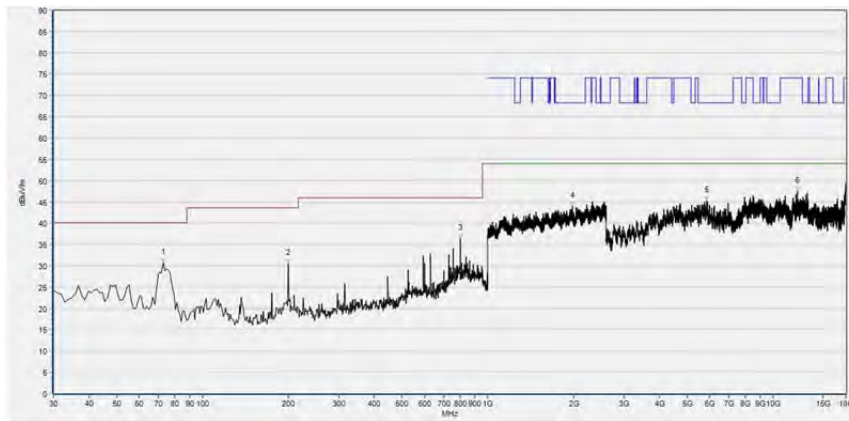

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
72.723	30.62	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
199.920	30.44	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
799.980	36.44	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1975.792	43.83	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5859.292	45.23	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12152.991	47.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Attenuator 1	(N/A)	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	12108015	DTL-003S101	YOMA	2020.01.08	2021.01.07
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2019.08.13	2020.08.12
Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2019.07.29	2020.07.28
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L3203	Tonscend	2019.07.29	2020.07.28
18-26.5GHz pre-Amplifier	46732	S10M100L3802	Tonscend	2019.07.29	2020.07.28
26GHz -40GHz pre-Amplifier	MA05	BBV9721	Rohde& Schwarz	2019.07.29	2020.07.28
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

END OF REPORT