

TEST REPORT

APPLICANT: Anker Innovations Limited

PRODUCT NAME: eufyCam E

MODEL NAME : T8112

BRAND NAME: eufy Security

FCC ID : 2AOKB-T8112

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-09-22 to 2018-10-12

ISSUE DATE : 2018-10-17

Tested by:

Wang Meng (Test Engineer)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



d. Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	б
2.1. Antenna requirement	б
2.2. Duty Cycle Of Test Signal	e
2.3. Peak Output Power ······	10
2.4. Bandwidth	13
2.5. Conducted Spurious Emissions and Band Edge	22
2.6. Power spectral density (PSD)	35
2.7. Conducted Emission	44
2.8. Restricted Frequency Bands	48
2.9. Radiated Emission	60
Annex A Test Uncertainty	76
Annex B Testing Laboratory Information	77



Change History				
Issue	Date	Reason for change		
1.0	2018-10-17	First edition		



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited
Applicant Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok,
	Kowloon, Hong Kong
Manufacturer:	Anker Innovations Limited
Manufacturer Address:	Room 1318-19,Hollywood Plaza,610 Nathan Road, Mongkok,
	Kowloon, Hong Kong

1.2. Equipment Under Test (EUT) Description

Product Name:	eufyCam E
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V3C
Software Version:	V1.6.5
Modulation Type:	DSSS, OFDM
Operating Fraguency Panger	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz
Operating Frequency Range:	802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n-20MHz: 11
Chaimer Number.	802.11n-40MHz: 7
Antenna Type:	LDS Antenna
Antenna Gain:	0 dBi

Note 1: The EUT is operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is F (MHz) =2412+5*(n-1) (1<=n<=11). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is F (MHz) =2412+5*(n-1) (3<=n<=9). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title		
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices		

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	N/A	Duty Cycle Of Test Signal	Sep 26, 2018	Wang Meng	PASS
3	15.247(b)	Peak Output Power	Sep 26, 2018	Wang Meng	PASS
4	15.247(a)	Bandwidth	Sep 26, 2018	Wang Meng	PASS
5	15.247(d)	Conducted Spurious Emission and Band Edge	Sep 26, 2018	Wang Meng	PASS
6	15.247(e)	Power spectral density (PSD)	Sep 26, 2018	Wang Meng	PASS
7	15.207	Conducted Emission	Sep 22, 2018	Peng Xuewei	PASS
8	15.247(d)	Restricted Frequency Bands	Oct 12, 2018	Peng Xuewei	PASS
9	15.209, 15.247(d)	Radiated Emission	Oct 12, 2018	Peng Xuewei	PASS

Note: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013 and KDB558074 D01 v04 (04/05/2017).

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Duty Cycle Of Test Signal

2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,





2.2.2. Test Description

A. Test Set:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.


B. Equipments List:

Please refer ANNEX B(4).

2.2.3. Test Result

A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*lg[1/D])
802.11b	100	0
802.11g	100	0
802.11n20	100	0
802.11n40	100	0






B. Test Plots




(Channel 1, 2412MHz, 802.11b)

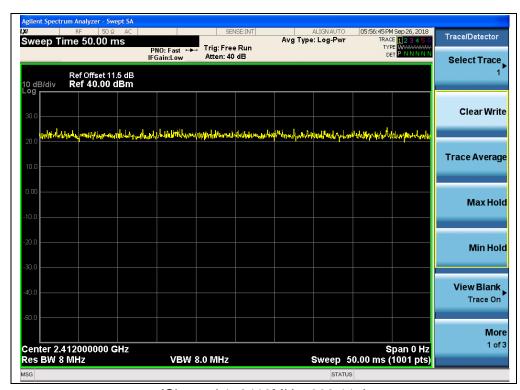


(Channel 1, 2412MHz, 802.11g)








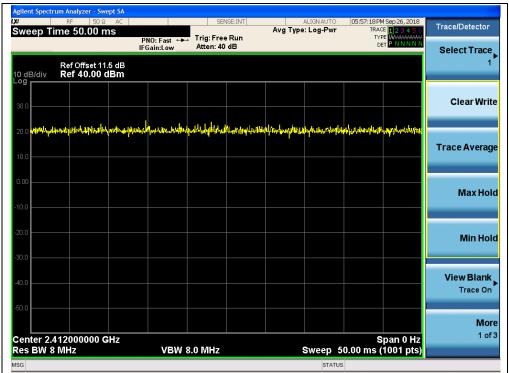

(Channel 1, 2412MHz, 802.11n-20)

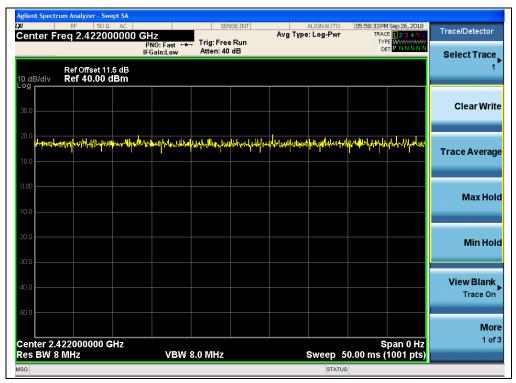

(Channel 3, 2422MHz, 802.11n-40)





2.3. Peak Output Power


2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed1 Watt.

2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX B(4).



2.3.3. Test Result

2.3.3.1 802.11b Test Mode

Channel	Fraguency (MHz)	Measured Output Peak Power		d Output Peak Power Limit		Verdict
Charmer	Frequency (MHz)	dBm	W	dBm	W	verdict
1	2412	23.51	0.224			PASS
6	2437	23.69	0.234	30	1	PASS
11	2462	23.80	0.240			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.61	0.091			PASS
6	2437	19.72	0.094	30	1	PASS
11	2462	19.91	0.098			PASS

2.3.3.2 802.11g Test mode

Channel	Frequency (MHz)	Measured C	output Peak Power	Limit	t	Verdict
Charmer	Frequency (MHZ)	dBm	W	dBm	W	verdict
1	2412	26.98	0.499			PASS
6	2437	27.11	0.514	30	1	PASS
11	2462	27.06	0.508			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	18.73	0.075			PASS
6	2437	18.84	0.077	30	1	PASS
11	2462	18.97	0.079			PASS



2.3.3.3 802.11n-20MHz Test mode

	Channel	Fraguency (MHz)	Measured C	output Peak Power	Limi	t	Verdict
	Channel	Frequency (MHz)	dBm	W	dBm	W	verdict
	1	2412	26.50	0.447			PASS
	6	2437	26.49	0.446	30	1	PASS
	11	2462	26.55	0.452			PASS

Channel	Frequency (MHz)		Output Average Power	Limi	t	Verdict
		dBm	W	dBm	W	1
1	2412	17.13	0.052			PASS
6	2437	17.33	0.054	30	1	PASS
11	2462	17.46	0.056			PASS

2.3.3.4 802.11n-40MHz Test mode

Channel	Frequency (MHz)	Measured C	Output Peak Power	Limit		Verdict
Charmer	Frequency (MHZ)	dBm	W	dBm	W	verdict
3	2422	26.13	0.410			PASS
6	2437	26.65	0.462	30	1	PASS
9	2452	26.08	0.406			PASS

Channel	Frequency (MHz)		Output Average Power	Limi	t	Verdict
		dBm	W	dBm	W	
3	2422	16.69	0.047			PASS
6	2437	17.10	0.051	30	1	PASS
9	2452	16.73	0.047			PASS




2.4. Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).



2.4.3. Test Result

2.4.3.1 802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.106	≥500	PASS
6	2437	9.106	≥500	PASS
11	2462	9.101	≥500	PASS


B. Test Plots



(Channel 1, 2412MHz, 802.11b)





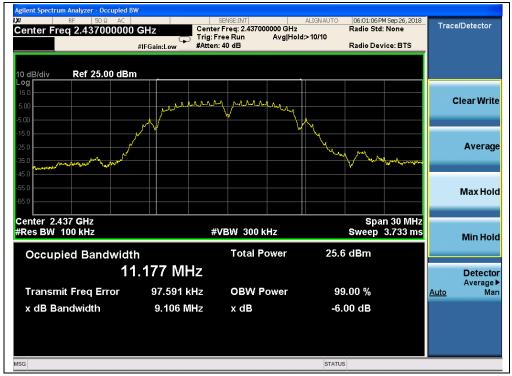

(Channel 6, 2437 MHz, 802.11b)



(Channel 11, 2462MHz, 802.11b)






2.4.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.40	≥500	PASS
6	2437	16.39	≥500	PASS
11	2462	16.40	≥500	PASS


B. Test Plots:

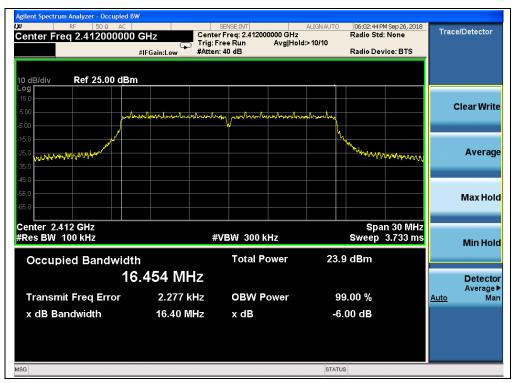

(Channel 1, 2412MHz, 802.11g)





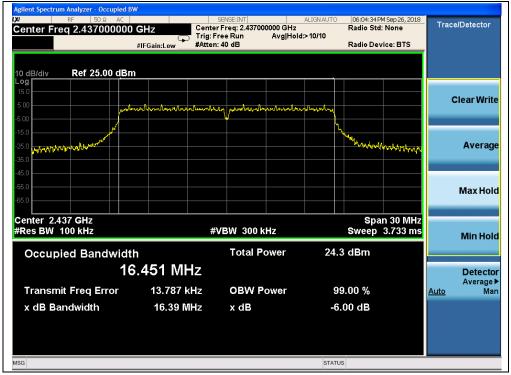

(Channel 6, 2437MHz, 802.11g)



(Channel 11, 2462MHz, 802.11g)



Tel: 86-755-36698555




2.4.3.3 802.11n-20 Test mode

A. Test Verdict:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.62	≥500	PASS
6	2437	17.62	≥500	PASS
11	2462	17.62	≥500	PASS

B. Test Plots:

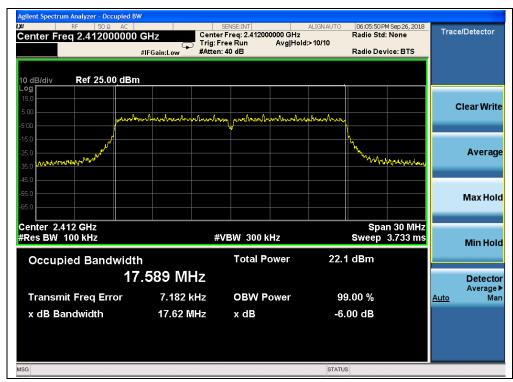


(Channel 1, 2412MHz, 802.11n-20)


Tel: 86-755-36698555





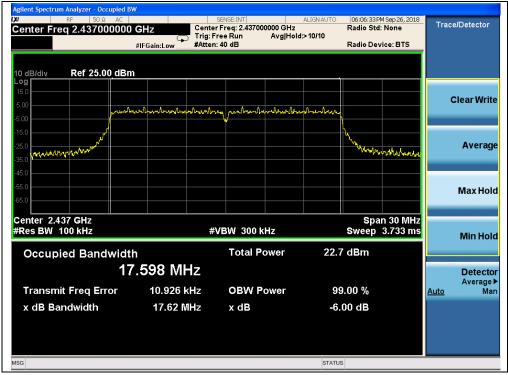

(Channel 6, 2437MHz, 802.11n-20)

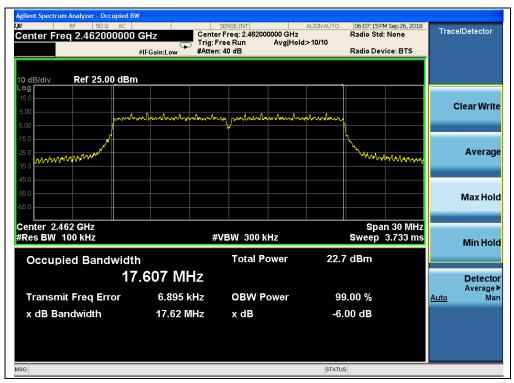

(Channel 11, 2462MHz, 802.11n-20)



Tel: 86-755-36698555




2.4.3.4 802.11n-40 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	36.28	≥500	PASS
6	2437	36.29	≥500	PASS
9	2452	36.29	≥500	PASS


B. Test Plots:

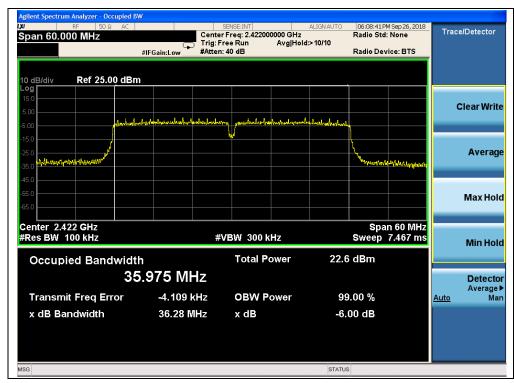


(Channel 3, 2422Mz, 802.11n-40)





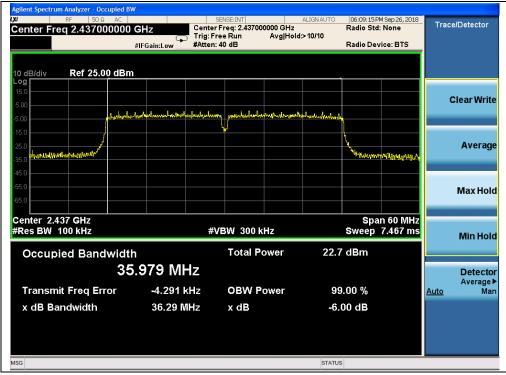

(Channel 6, 2437MHz, 802.11n-40)

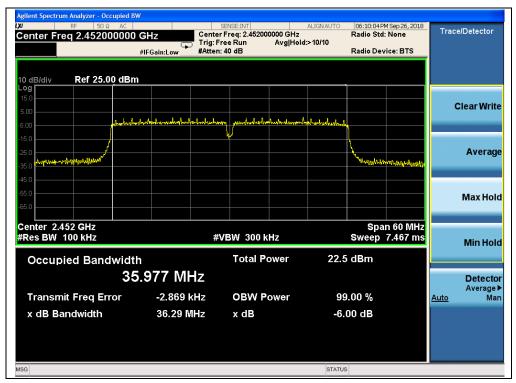

(Channel 9, 2452MHz, 802.11n-40)






2.5. Conducted Spurious Emissions and Band Edge

2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX B(4).




2.5.3. Test Result

2.5.3.1 802.11b Test mode

A. Test Verdict:

		Measured Max. Out	Limit	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-32.28	10.32	-9.68	PASS
6	2437	-32.45	9.77	-10.23	PASS
11	2462	-32.36	10.23	-9.77	PASS


B. Test Plots:

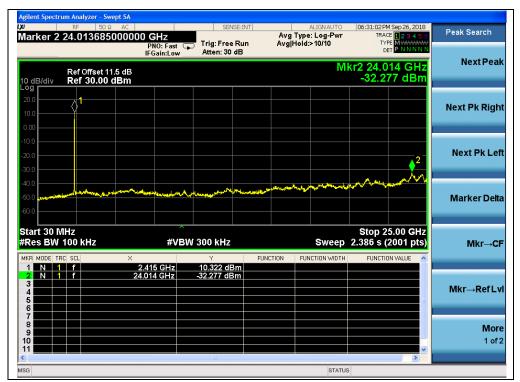

(Channel = 1, 30MHz to 25GHz)





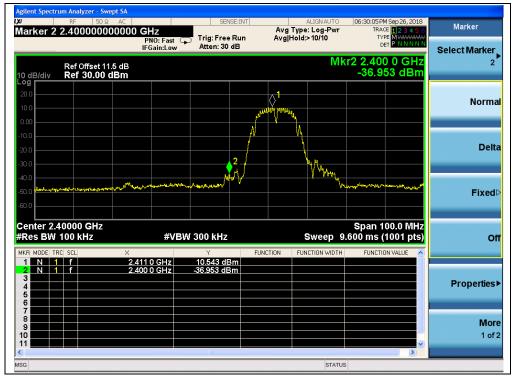


(Band Edge, Channel = 1)



(Channel = 6, 30MHz to 25GHz)









(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)






2.5.3.2 802.11g Test mode


A. Test Verdict:

		Measured Max. Out	Limit	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-32.10	3.84	-16.16	PASS
6	2437	-32.25	4.37	-15.63	PASS
11	2462	-32.39	4.37	-15.63	PASS


B. Test Plots:

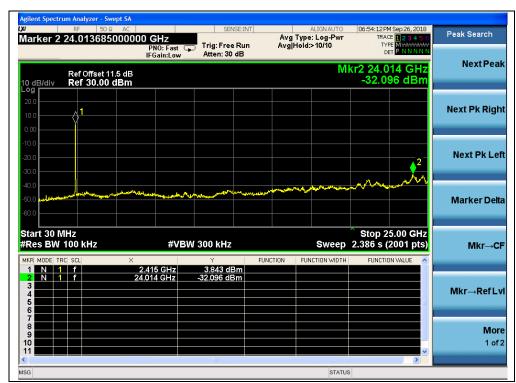


(Channel = 1, 30MHz to 25GHz)





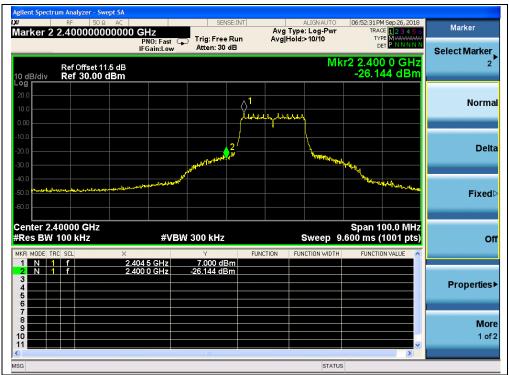


(Band Edge, Channel = 1)

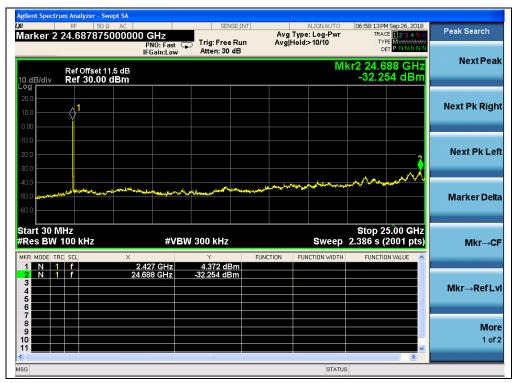

(Channel = 6, 30MHz to 25GHz)









(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)





2.5.3.3 802.11n -20MHz Test mode

A. Test Verdict:

		Measured Max. Out	Limit	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
1	2412	-32.31	3.44	-16.56	PASS
6	2437	-31.92	2.79	-17.21	PASS
11	2462	-32.13	6.06	-13.94	PASS

B. Test Plots:




(Channel = 1, 30MHz to 25GHz)







(Band Edge, Channel = 1)

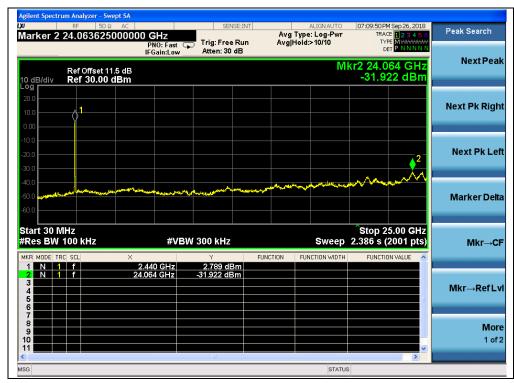

(Channel = 6, 30MHz to 25GHz)



Tel: 86-755-36698555







(Channel = 11, 30MHz to 25GHz)



(Band Edge, Channel = 11)






2.5.3.4 802.11n-40MHz Test mode


A. Test Verdict:

		Measured Max. Out	Limit	t (dBm)	
Channel	Frequency (MHz)	of Band Emission	Carrier	Calculated	Verdict
		(dBm)	Level	-20dBc Limit	
3	2422	-32.72	2.35	-17.65	PASS
6	2437	-31.78	2.85	-17.15	PASS
9	2452	-32.37	2.00	-18.00	PASS

B. Test Plots:

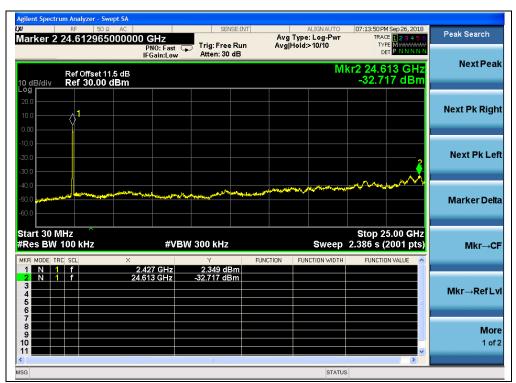


(Channel = 3, 30MHz to 25GHz)








(Band Edge, Channel = 3)

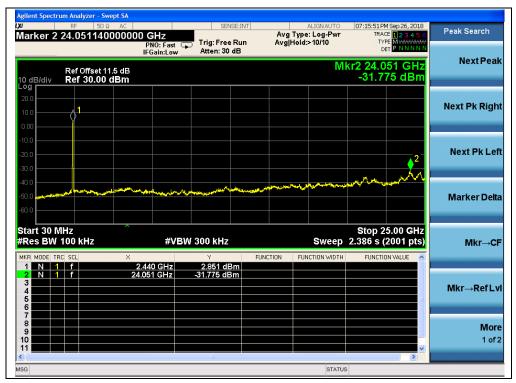

(Channel = 6, 30MHz to 25GHz)









(Channel = 9, 30MHz to 25GHz)



(Band Edge, Channel = 9)



Tel: 86-755-36698555



2.6. Power spectral density (PSD)

2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.6.2. Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please refer ANNEX B(4).





2.6.3. Test Result

2.6.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-3.83	8	PASS
6	2437	-3.03	8	PASS
11	2462	-3.89	8	PASS

B. Test Plots:



(Channel = 1, 802.11b)







(Channel = 6, 802.11b)



(Channel = 11, 802.11b)






2.6.3.2 802.11g Test mode

A. Test Verdict:

	Spectral power density (dBm/3kHz)							
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict				
1	2412	-4.81	8	PASS				
6	2437	-5.76	8	PASS				
11	2462	-6.12	8	PASS				

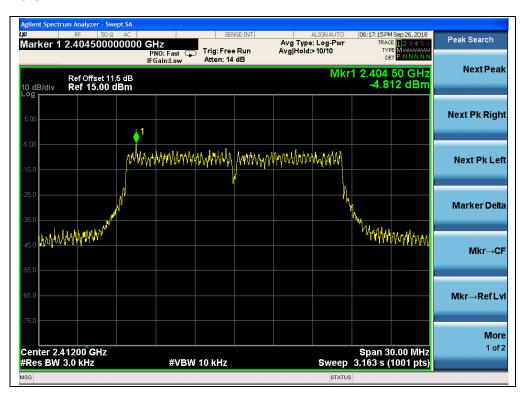


(Channel = 1, 802.11g)





(Channel = 6, 802.11g)

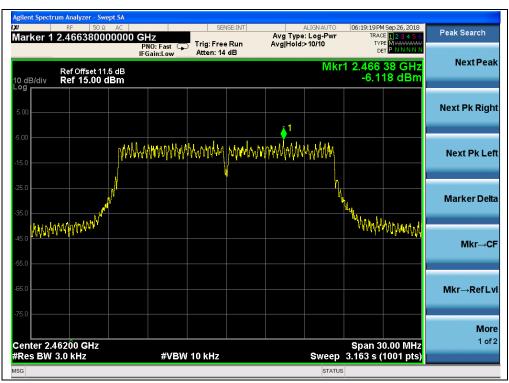

(Channel = 11, 802.11g)



Tel: 86-755-36698555




2.6.3.3 802.11n-20MHz Test mode

A. Test Verdict:


	Spectral power density (dBm/3kHz)							
Channel	Frequency	Management BSD (dDm/3kl l=)		Verdict				
Channel	(MHz)	Measured PSD (dBm/3kHz)	(dBm/3kHz)	verdict				
1	2412	-8.65	8	PASS				
6	2437	-8.39	8	PASS				
11	2462	-8.00	8	PASS				




(Channel = 1, 802.11n-20MHz)





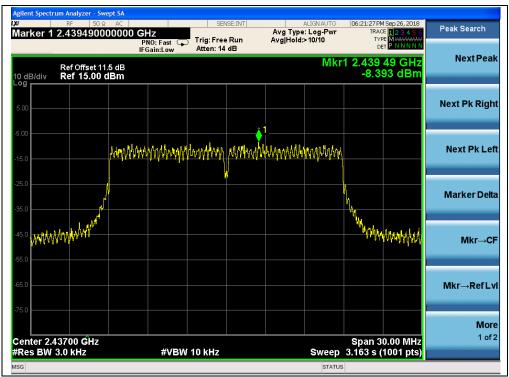

(Channel = 6, 802.11n-20MHz)

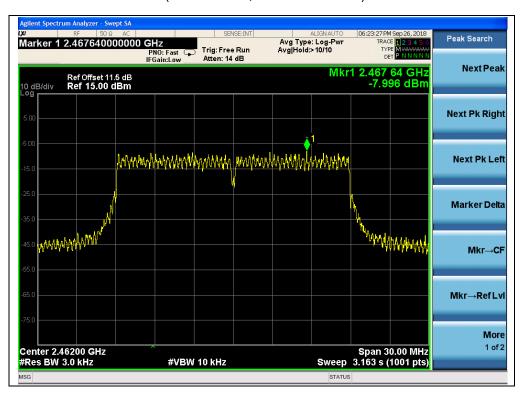

(Channel = 11, 802.11n-20MHz)







2.6.3.4 802.11n-40MHz Test mode

A. Test Verdict:


	Spectral power density (dBm/3kHz)								
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict					
3	2422	-11.37	8	PASS					
6	2437	-11.22	8	PASS					
9	2452	-11.05	8	PASS					

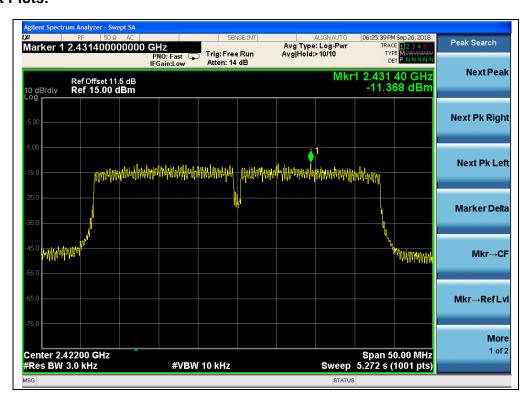


(Channel = 3, 802.11n-40MHz)





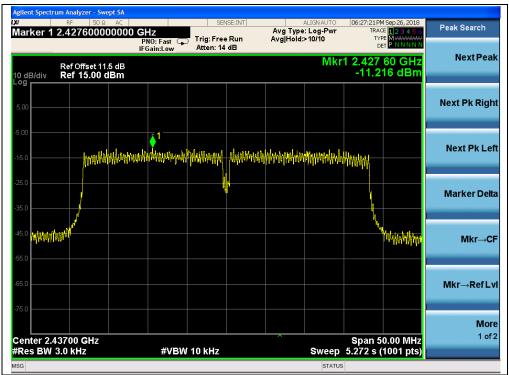

(Channel = 6, 802.11n-40MHz)

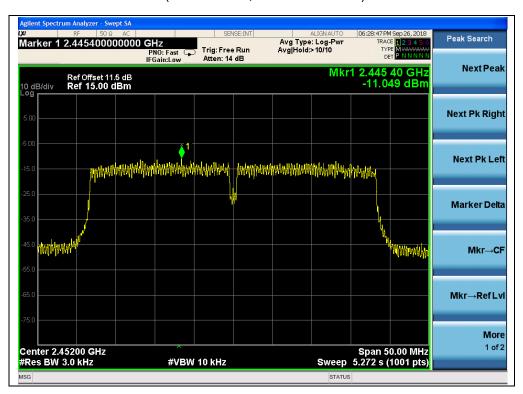

(Channel = 9, 802.11n-40MHz)



Tel: 86-755-36698555



2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).


Frequency range	Conducted Limit (dBµV)					
(MHz)	Quai-peak	Average				
0.15 - 0.50	66 to 56	56 to 46				
0.50 - 5	56	46				
5 - 30	60	50				

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 0.50MHz.

2.7.2. Test Description

A. Test Setup:

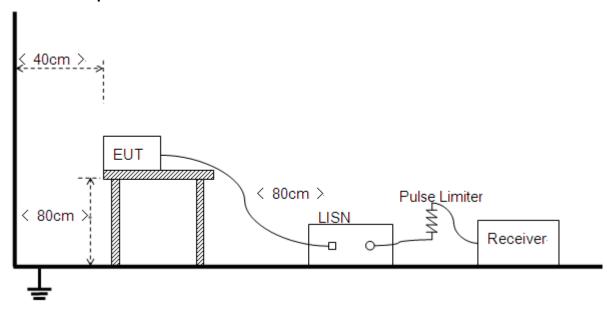

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.



Tel: 86-755-36698555



B. Equipments List:

Please refer ANNEX B(4).

2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is <u>EUT + Link</u>.

Note: The test voltage is AC 120V/60Hz.




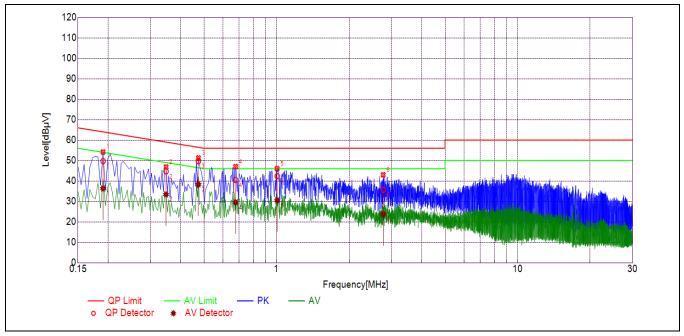

(L Phase)

NO.	Fre.	Emission L	evel (dBµV) Limit (dBµV)		dΒμV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		7010101
1	0.1906	49.73	36.34	64.01	54.01		PASS
2	0.3478	44.69	33.44	59.01	49.01		PASS
3	0.4737	49.69	38.34	56.45	46.45	Line	PASS
4	0.6761	40.48	29.55	56.00	46.00	LINE	PASS
5	1.0059	42.42	30.55	56.00	46.00		PASS
6	2.7715	35.69	23.75	56.00	46.00		PASS



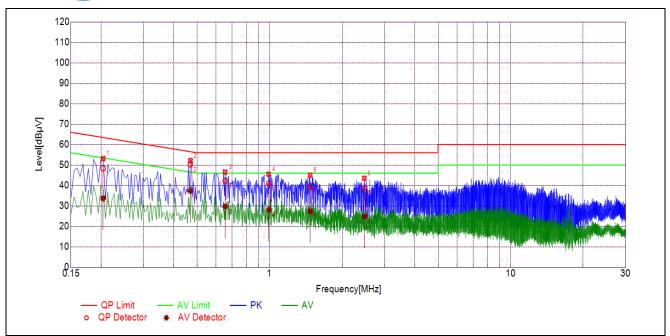

(N Phase)

NO.	Fre.	Emission L	evel (dBµV) Limit (dBµV)		dΒμV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.2039	48.37	33.72	63.45	53.45		PASS
2	0.4690	50.31	37.39	56.53	46.53		PASS
3	0.6543	42.19	29.73	56.00	46.00	Noutral	PASS
4	0.9920	41.03	28.09	56.00	46.00	Neutral	PASS
5	1.4745	39.58	27.41	56.00	46.00		PASS
6	2.4729	38.90	24.86	56.00	46.00		PASS

Tel: 86-755-36698555




2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup

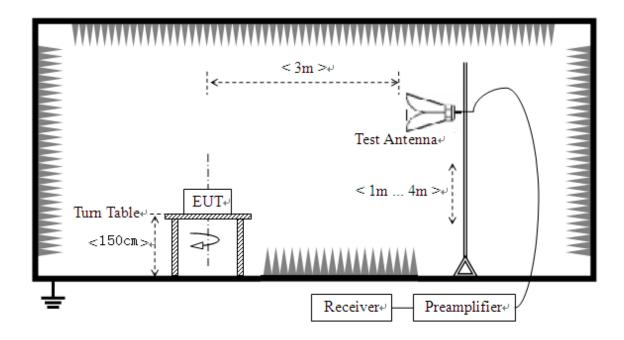

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.





B. Equipments List:

Please refer ANNEX B(4).

2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

 $\label{eq:energy} E \ [dB\mu V/m] = U_R + A_T + A_{Factor} \ [dB]; \ A_T = L_{Cable \ loss} \ [dB] - G_{preamp} \ [dB]$

A_T: Total correction Factor except Antenna

 U_R : Receiver Reading G_{preamp} : Preamplifier Gain


A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.7.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Griannor	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	vordiot
1	2385.94	PK	47.59	-29.67	32.56	50.48	74	PASS
1	2390.00	AV	36.18	-29.67	32.56	39.07	54	PASS
11	2486.70	PK	50.96	-29.67	32.56	53.85	74	PASS
11	2486.05	AV	40.85	-29.67	32.56	43.74	54	PASS





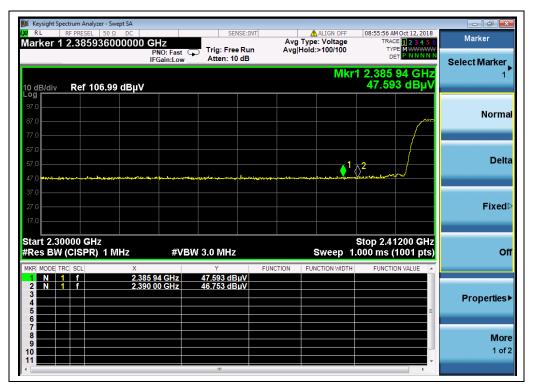


(Channel = 1 PEAK, 802.11b)



(Channel = 1 AVG, 802.11b)









(Channel = 11 PEAK, 802.11b)



(Channel = 11 AVG, 802.11b)




Tel: 86-755-36698555



2.7.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Vordict
Channel	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
1	2391.46	PK	48.15	-29.67	32.56	51.04	74	PASS
1	2374.14	AV	36.49	-29.67	32.56	39.38	54	PASS
11	2485.86	PK	49.13	-29.67	32.56	52.02	74	PASS
11	2486.02	AV	40.49	-29.67	32.56	43.38	54	PASS

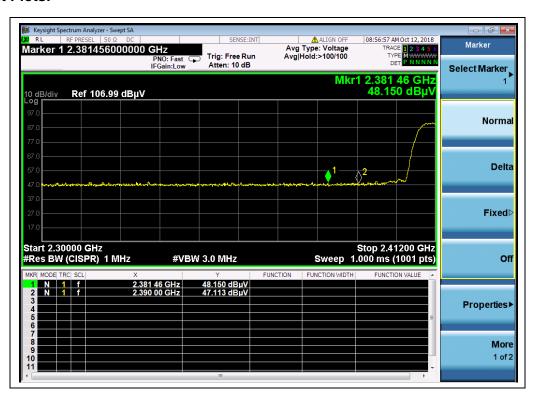

(Channel = 1 PEAK, 802.11g)








(Channel = 1 AVG, 802.11g)



(Channel = 11 PEAK, 802.11g)





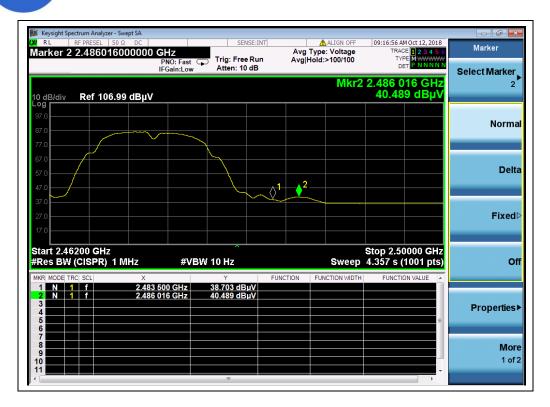


(Channel = 11 AVG, 802.11g)


2.7.3.3 802.11n-20MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U _R	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E	Limit (dBµV/m)	Verdict
	(**** :=)	PK/ AV	(dBuV)	(42)	(42 00)	(dBµV/m)	(αΣμ τ/)	
1	2373.73	PK	48.55	-29.67	32.56	51.44	74	PASS
1	2374.48	AV	36.71	-29.67	32.56	39.60	54	PASS
11	2485.64	PK	51.13	-29.67	32.56	54.02	74	PASS
11	2485.83	AV	42.84	-29.67	32.56	45.73	54	PASS





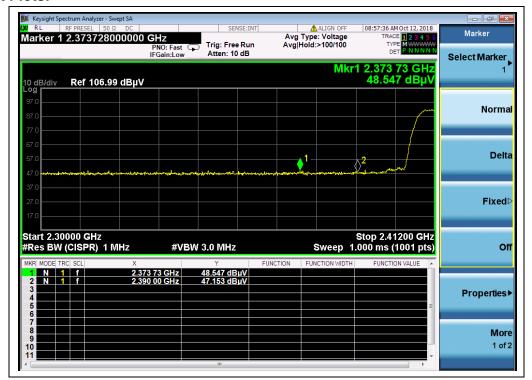


(Channel = 1 PEAK, 802.11n-20)



(Channel = 1 AVG, 802.11n-20)









(Channel = 11 PEAK, 802.11n-20)



(Channel = 11 AVG, 802.11n-20)




Tel: 86-755-36698555



2.7.3.4 802.11n-40MHz Test mode

A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U _R (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	
3	2389.15	PK	57.76	-29.67	32.56	60.65	74	PASS
3	2389.15	AV	41.86	-29.67	32.56	44.75	54	PASS
9	2486.70	PK	54.79	-29.67	32.56	57.68	74	PASS
9	2484.57	AV	38.74	-29.67	32.56	41.63	54	PASS

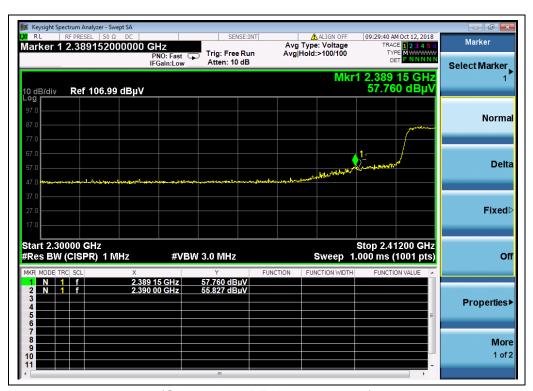

(Channel = 3 PEAK, 802.11n-40)







(Channel = 3 AVG, 802.11n-40)



(Channel = 9 PEAK, 802.11n-40)







(Channel = 9 AVG, 802.11n-40)





2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)


In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)




2.9.2. Test Description

A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

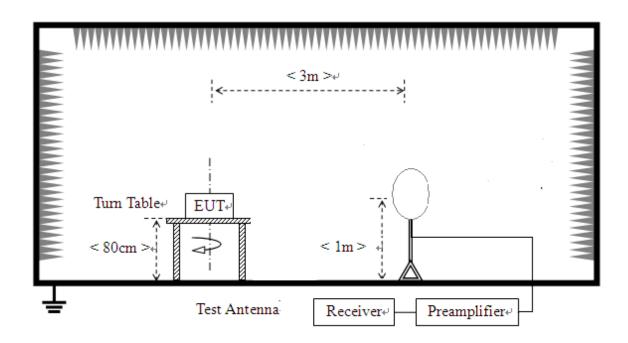


2) For radiated emissions from 30MHz to1GHz

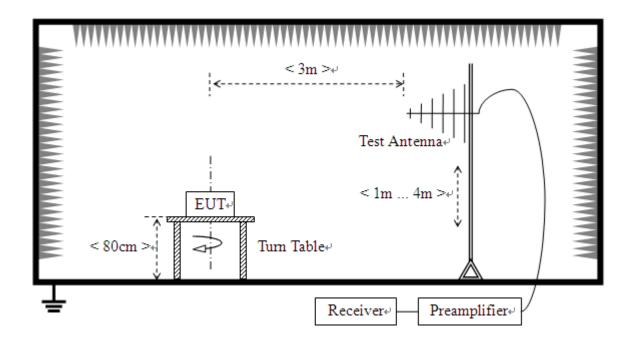





3) For radiated emissions above 1GHz

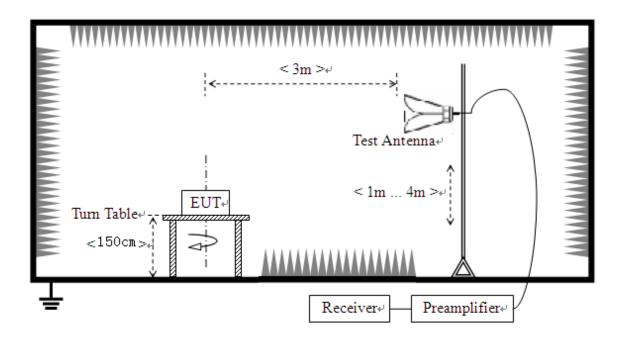

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading





For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

A. Equipments List:

Please refere ANNEX B(4).

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading
G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






2.9.3.1 802.11b Test mode

Plots for Channel = 1

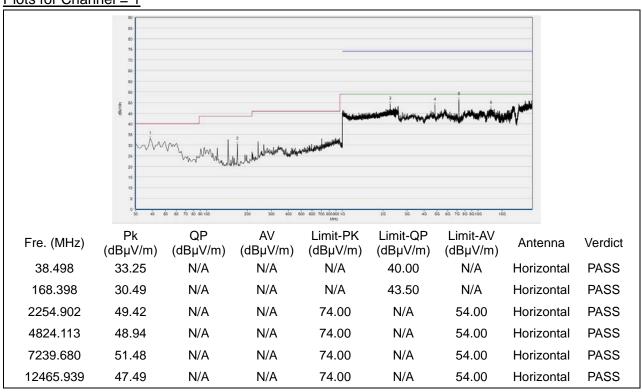

(Antenna Horizontal, 30MHz to 25GHz)

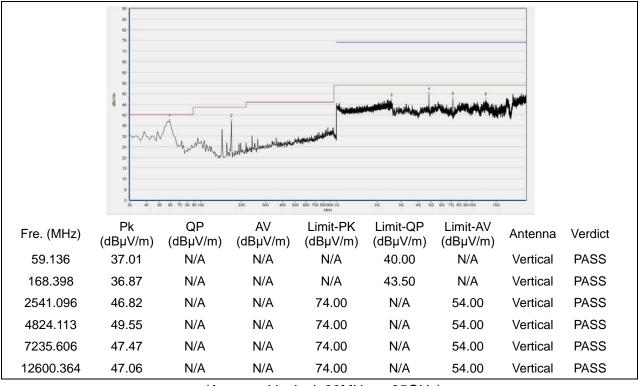


(Antenna Vertical, 30MHz to 25GHz)








Plot for Channel = 6

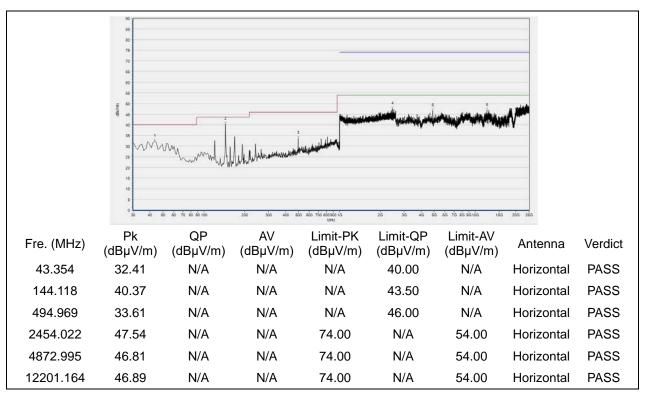

(Antenna Horizontal, 30MHz to 25GHz)

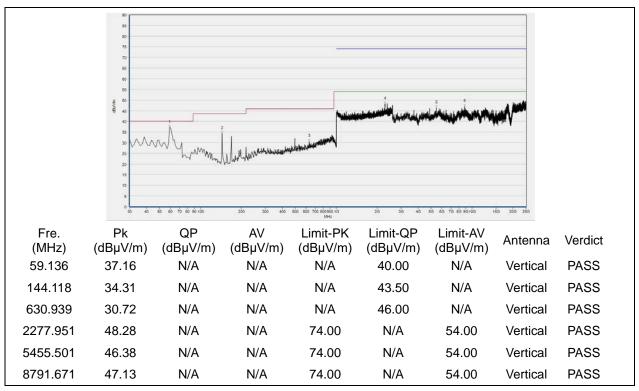


(Antenna Vertical, 30MHz to 25GHz)








Plot for Channel = 11

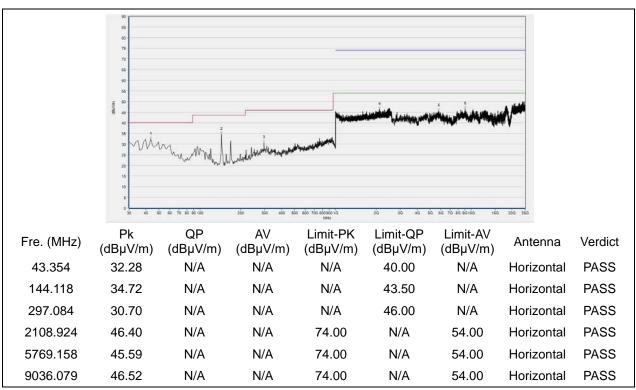

(Antenna Horizontal, 30MHz to 25GHz)

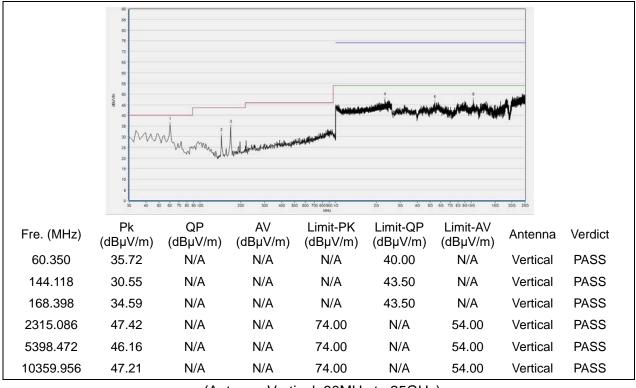


(Antenna Vertical, 30MHz to 25GHz)






2.9.3.2 802.11g Test mode

Plots for Channel = 1

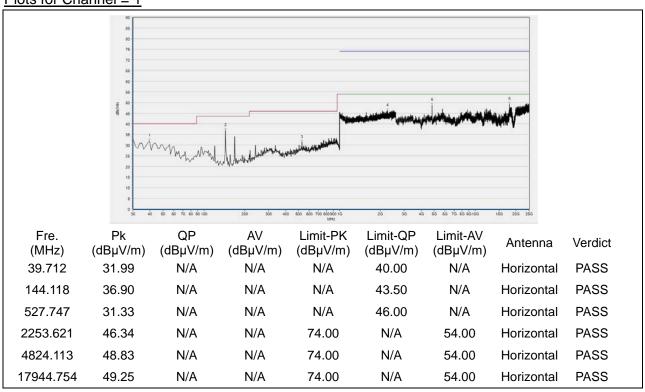


(Antenna Horizontal, 30MHz to 25GHz)

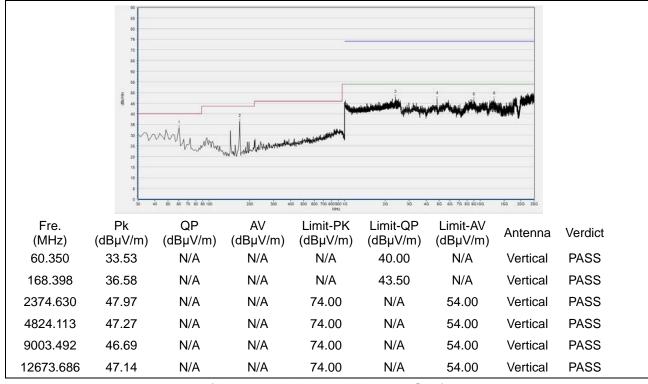


(Antenna Vertical, 30MHz to 25GHz)








Plot for Channel = 6

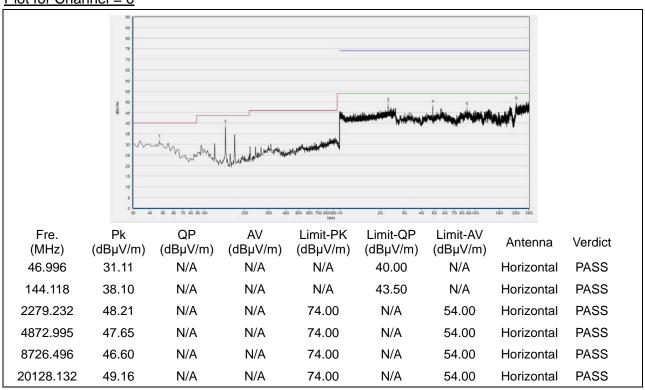


(Antenna Horizontal, 30MHz to 25GHz)

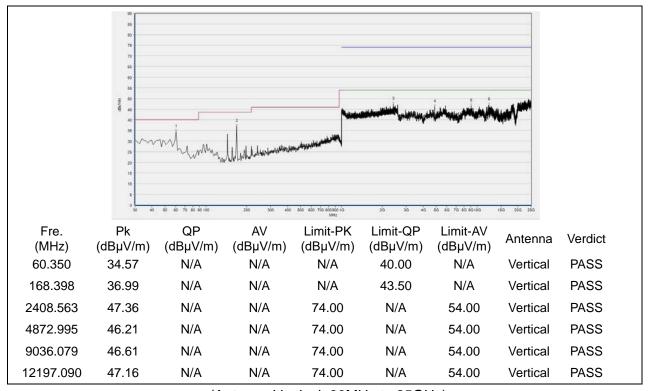

(Antenna Vertical, 30MHz to 25GHz)




Tel: 86-755-36698555






Plot for Channel = 11

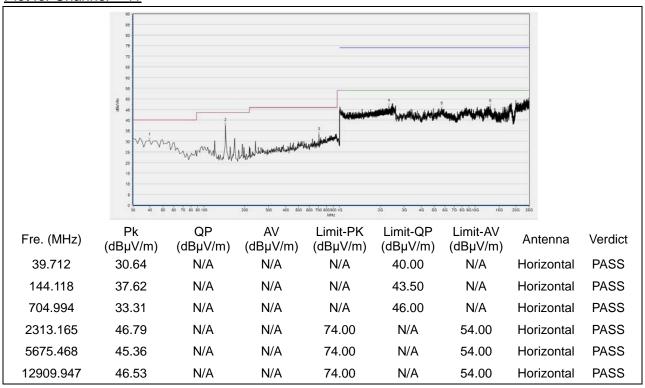

(Antenna Horizontal, 30MHz to 25GHz)

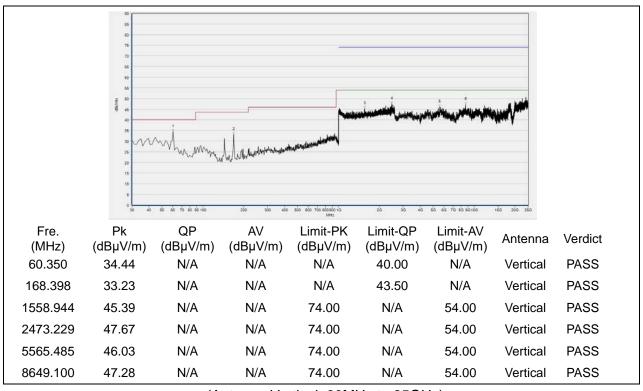


(Antenna Vertical, 30MHz to 25GHz)






2.9.3.3 802.11n-20MHz Test mode

Plots for Channel = 1

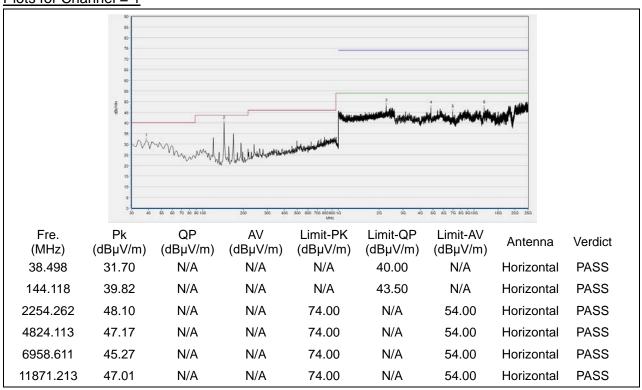

(Antenna Horizontal, 30MHz to 25GHz)

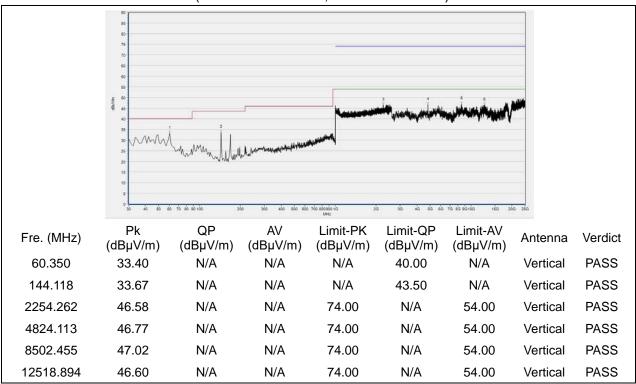


(Antenna Vertical, 30MHz to 25GHz)








Plot for Channel = 6

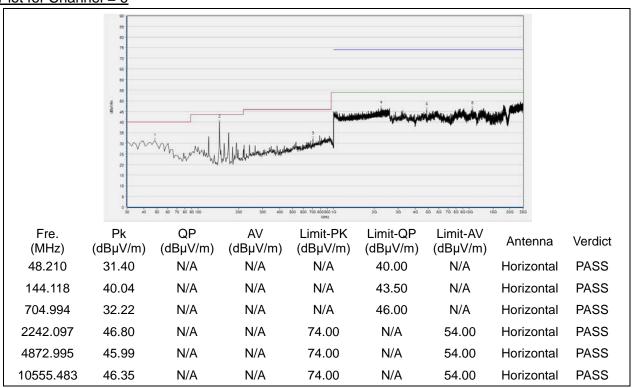

(Antenna Horizontal, 30MHz to 25GHz)

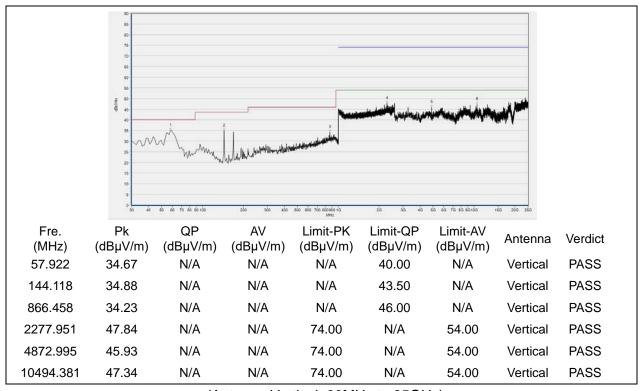


(Antenna Vertical, 30MHz to 25GHz)








Plot for Channel = 11

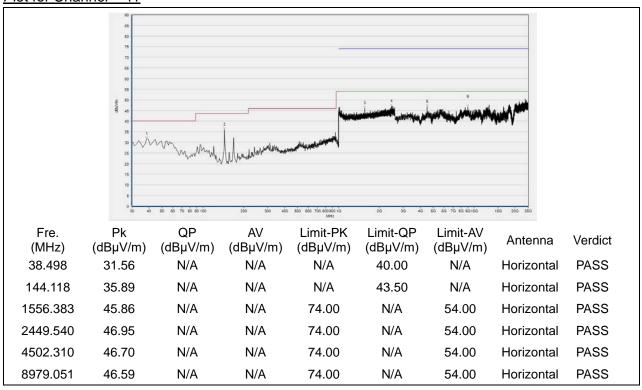

(Antenna Horizontal, 30MHz to 25GHz)

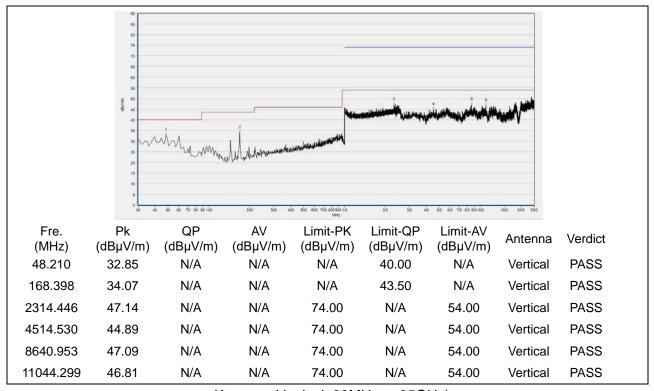


(Antenna Vertical, 30MHz to 25GHz)






2.9.3.4 802.11n-40MHz Test mode

Plots for Channel = 3

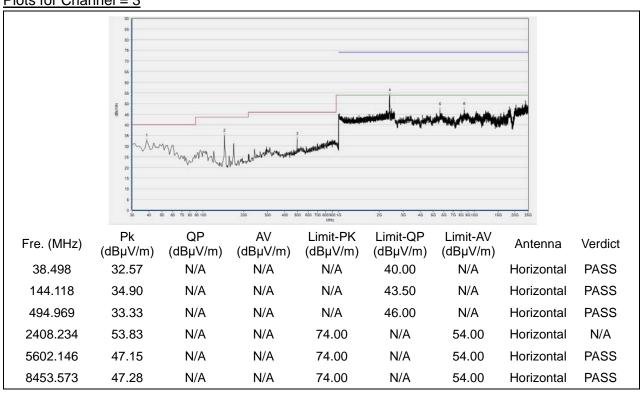

(Antenna Horizontal, 30MHz to 25GHz)

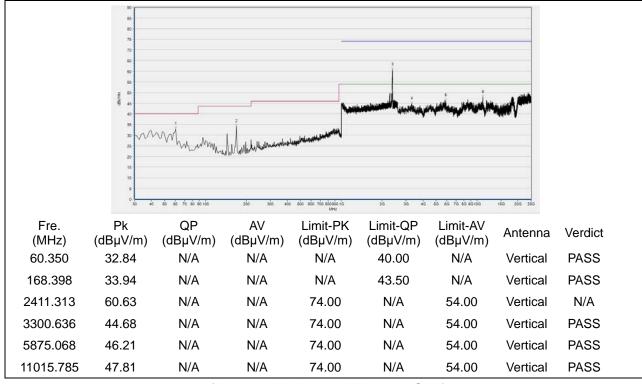


(Antenna Vertical, 30MHz to 25GHz)






Plots for Channel = 6

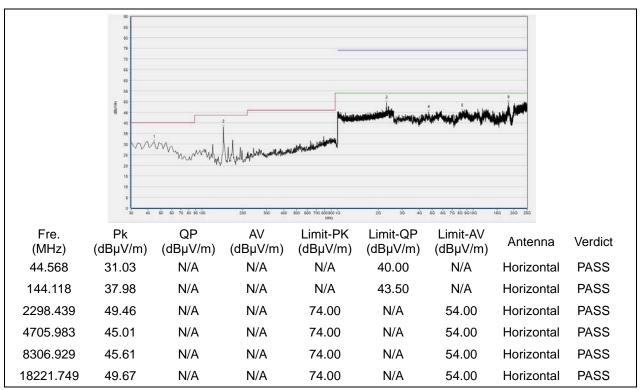


(Antenna Horizontal, 30MHz to 25GHz)

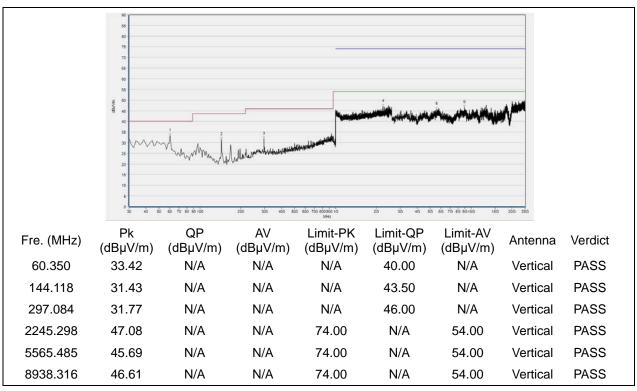


(Antenna Vertical, 30MHz to 25GHz)








Plots for Channel = 9

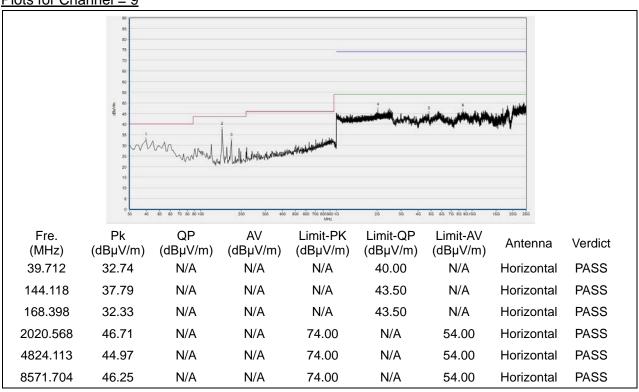

(Antenna Horizontal, 30MHz to 25GHz)

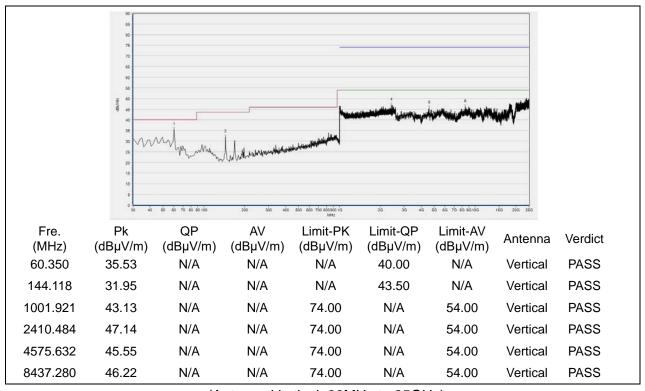

(Antenna Vertical, 30MHz to 25GHz)



Tel: 86-755-36698555



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Tel: 86-755-36698555



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.					
Department:	Morlab Laboratory					
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang					
	Road, Block 67, BaoAn District, ShenZhen, GuangDong					
	Province, P. R. China					
Responsible Test Lab	Mr. Su Fond					
Manager:	Mr. Su Feng					
Telephone:	+86 755 36698555					
Facsimile:	+86 755 36698525					

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Name.	Morlab Laboratory
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal	MV50470000	NIOOAOA	A ail a a t	0047.40.00	0040 40 00
Analzyer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
USB Wideband	MY54210011	U2021XA	Agilont	2040.04.47	0040 04 46
Power Sensor	W1154210011	UZUZTAA	Agilent	2018.04.17	2019.04.16
RF cable	CD04	DEO4	Maylah	NI/A	NI/A
(30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3Auxiliary Test Equipment

Familian and Name	NA - J - I NI -	Daras d Massa	M	O-1 D-1-	0-1 D D-1-
Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0



4.5 Radiated Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.08.04	2019.08.03
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.18	2019.05.17
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2018.08.06	2019.08.05
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2018.08.02	2019.08.01
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

END OF REPORT	
 EIND OF KEPOKI	

Tel: 86-755-36698555