



Product Specification

P/N:

BT Antenna


Rev.:

A

Page:

3/6

3.4 BT VSWR/Return Loss/Smith:

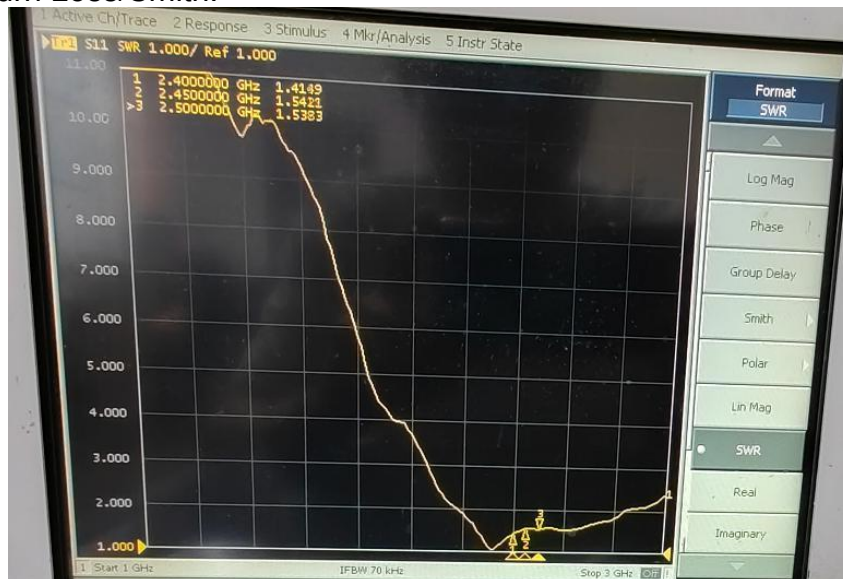

3.5 BT Efficiency And Gain:

Frequency/Mhz	Efficiency / dB	Efficiency / %	Frequency/MHz	MaxGain/dBi	AvgGain/dBi
2400	-5.34	29.24	2400	-0.49	-5.34
2410	-5.42	28.71	2410	-0.42	-5.42
2420	-5.16	30.48	2420	-0.09	-5.16
2430	-5.1	30.9	2430	-0.19	-5.1
2440	-5.25	29.85	2440	-0.34	-5.25
2450	-5.02	31.48	2450	0.23	-5.02
2460	-4.98	31.77	2460	0.58	-4.98
2470	-5.21	30.13	2470	0.58	-5.21
2480	-5.19	30.27	2480	0.71	-5.19
2490	-5.01	31.55	2490	0.8	-5.01
2500	-5.15	30.55	2500	0.68	-5.15



Product Specification

P/N:

BT Antenna


Rev.:

A


Page:

4/6


3.6. BT 3D Pattern 2400MHz

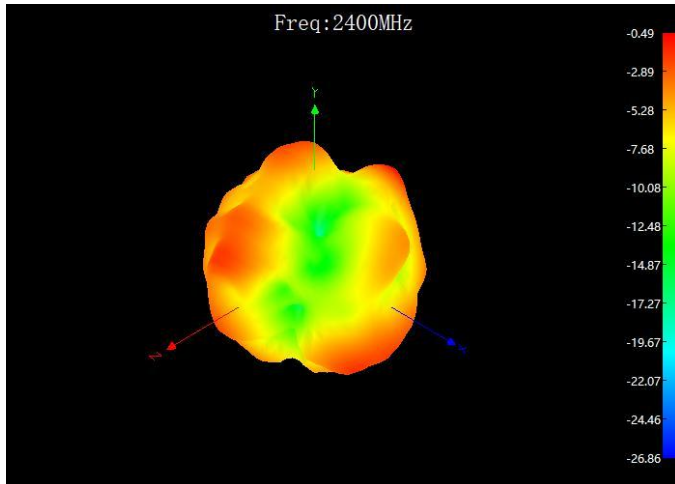

2450MHz

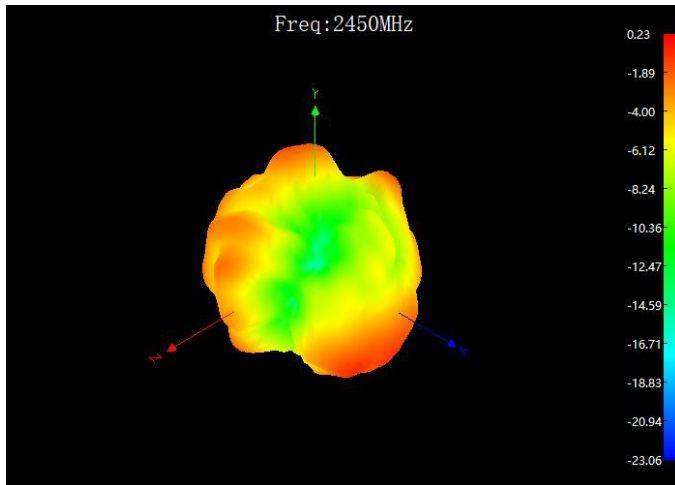

2500MHz

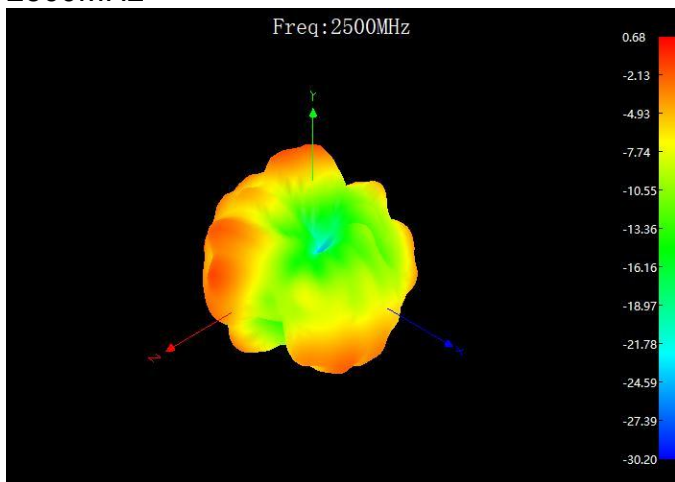



Product Specification

P/N:

BT Antenna


Rev.:

A

Page:

5/6

3.7 BT Engineering drawings:

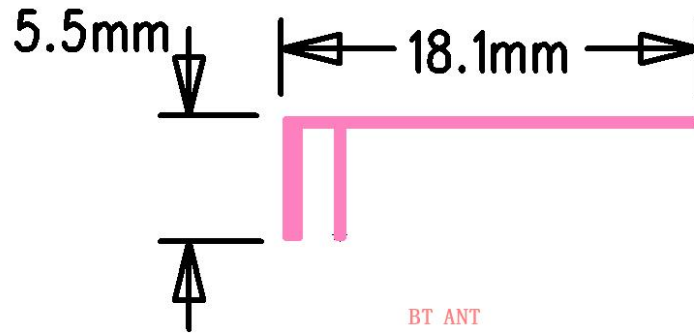

PCB on-board antenna