




EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

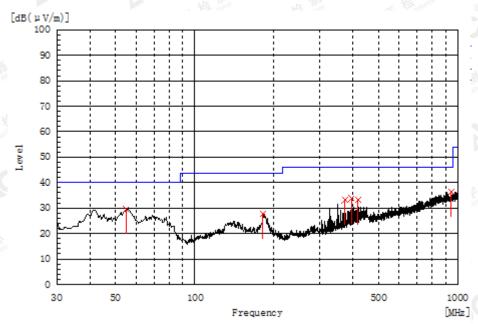

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
54.735	The V	12.9	16.7	29.6	40.0	10.4	Pass	100.0	287.7
181.805	Not Close V	13.4	14.4	27.8	43.5	15.7	Pass	100.0	287.7
372.410	V	13.4	19.8	33.2	46.0	12.8	Pass	100.0	251.1
395.205	V	13.2	20.6	33.8	46.0	12.2	Pass	150.0	287.9
418.000	® Francisco	11.9	21.4	33.3	46.0	12.7	Pass	150.0	287.9
946.165	V	5.8	30.6	36.4	46.0	9.6	Pass	200.0	58.3

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC01110180556FE05

Page 56 of 81

RADIATED EMISSION ABOVE 1GHZ

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.118	41.69	3.72	45.41	74	-28.59	peak
4824.104	39.32	3.72	43.04	54	-10.96	AVG
7236.034	40.94	8.15	49.09	74	-24.91	peak
7236.092	36.81	8.15	44.96	54	-9.04	AVG
Artestation	(B) Westation of	Allestan				litter
					The state of the s	极 Manoo
emark:			11172	Tr	Combia.	E Mobal Com
actor = Ante	enna Factor + Ca	able Loss –	Pre-amplifier.	® # Jajion of Clo	(8)	iton of
			7.5	The same of the sa		

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.056	42.28	3.72	46	74	-28	peak
4824.023	38.15	3.72	41.87	54	-12.13	AVG
7236.059	41.97	8.15	50.12	74	-23.88	peak
7236.037	36.33	8.15	44.48	54	-9.52	AVG
allance	Global B	alion of Gio	Allesia			
	le station	Alles				
emark:						
actor = Anter	nna Factor + Cab	le Loss – Pre-	amplifier.	The Compliance	FA bal Comp	Allee
		-71117	- 17°		~ - 75 10W	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KeC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gent.com.

Attestation of Global Compliance



Report No.: AGC01110180556FE05 Page 57 of 81

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.077	44.53	3.75	48.28	74	-25.72	peak
4874.039	39.12	3.75	42.87	54	-11.13	AVG
7311.030	41.86	8.16	50.02	74	-23.98	peak
7311.033	40.21	8.16	48.37	54	-5.63	AVG
Allestation	(R) Market Ballon C.	Attestan				lline
						MET VIEWOS
emark:			LINE .	抓	Complian	* Clopal Court
actor = Anter	nna Factor + Cable	e Loss – Pre-	-amplifier.	® A alion of Gio	(C) The stall	ono
	- Illize	EN COMP	and the state of t	2,462		

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.040	46.72	3.75	50.47	74	-23.53	peak
4874.085	40.68	3.75	44.43	54	-9.57	AVG
7311.065	39.56	8.16	47.72	74	-26.28	peak
7311.051	34.22	8.16	42.38	54	-11.62	AVG
100				Kir mpliance	The Company	© \$500 miles
emark:	-	100	E plance (a) an	F of Global Con	® Station of Gunna	20
actor = Anter	nna Factor + Cabl	e Loss – Pre-a	mplifier.	testano.	Atte	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance



Report No.: AGC01110180556FE05 Page 58 of 81

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

-6111	- AA	20.	n21 - 1/1 1/0°	564 .0	102	All of
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.050	46.08	3.81	49.89	74	-24.11	peak
4924.033	41.55	3.81	45.36	54	-8.64	AVG
7386.039	43.38	8.19	51.57	74	-22.43	peak
7386.036	37.15	8.19	45.34	54	-8.66	AVG
R A FOR	Com The Com	(C) (Man and C)	(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)		Alle	
Remark:	Alle Surion C				-1111	199
actor = Ante	enna Factor + Ca	ble Loss – F	Pre-amplifier.	·	Kindlance	EK Compilar

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.109	44.48	3.81	48.29	74	-25.71	peak
4924.072	39.15	3.81	42.96	54	-11.04	AVG
7386.078	41.21	8.19	49.4	74	-24.6	peak
7386.053	33.62	8.19	41.81	54	-12.19	AVG
	The Manual ance	I That Compile	® The stripp of Glob	(8)	ion o'	
Remark:	Tot Glov ® #1	alion o'	PC .	GU		rà.
actor = Ante	enna Factor + Ca	ble Loss -	Pre-amplifier.	- Fills		457 ° "

RESULT: PASS

Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report. Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Report No.: AGC01110180556FE05

Page 59 of 81

12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

12.2. TEST SET-UP

same as 11.2

Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



12.3. TEST RESULT

EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal



AV



RESULT: PASS





EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical



AV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40with data rate 13.5 2452MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	Soundcore Model Zero+	Model Name	Z6111
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2452MHZ	Antenna	Vertical



ΑV



RESULT: PASS

Report No.: AGC01110180556FE05

Page 76 of 81

13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)				
150kHz-500kHz	66-56	56-46				
500kHz-5MHz	56	46				
5MHz-30MHz	60	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

13.2. BLOCK DIAGRAM OF TEST SETUP

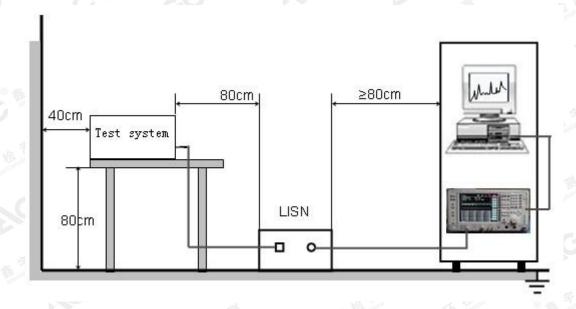



Report No.: AGC01110180556FE05

Page 77 of 81

13.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.10.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- (4) The EUT received DC 15V power from adapter which received AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



13.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

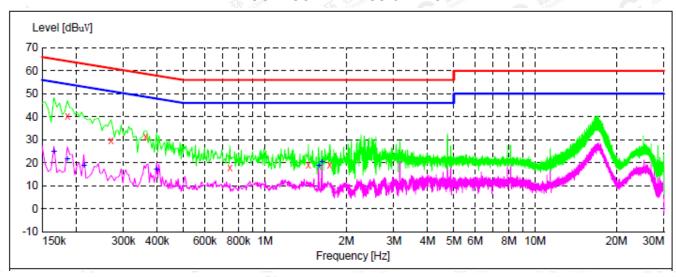

MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.186000	40.10	10.0	64	24.1	QP	L1	FLO
0.270000	29.50	10.1	61	31.6	QP	L1	FLO
0.362000	31.50	10.0	59	27.2	QP	L1	FLO
0.742000	18.00	10.0	56	38.0	QP	L1	FLO
1.450000	19.20	10.0	56	36.8	QP	L1	FLO
1.738000	19.00	9.9	56	37.0	QP	L1	FLO


MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.166000 0.186000 0.214000 0.398000 1.582000 1.626000	24.90 21.70 18.50 17.00 18.80 20.40	10.0 10.0 10.1 10.0 10.0	55 54 53 48 46 46	30.3 32.5 34.5 30.9 27.2 25.6	AV AV AV	L1 L1 L1 L1 L1	FLO FLO FLO FLO FLO

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

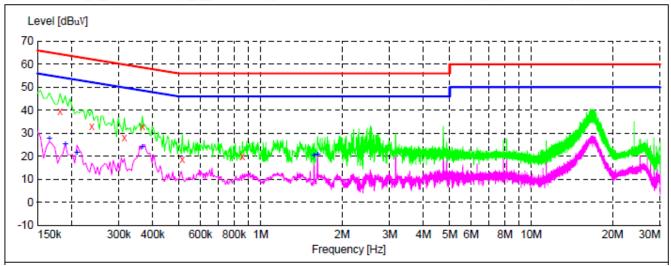

MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.182000	39.30	10.0	64	25.1	QP	N	FLO
0.238000	32.90	10.1	62	29.3	QP	N	FLO
0.314000	27.90	10.1	60	32.0	QP	N	FLO
0.366000	32.80	10.0	59	25.8	QP	N	FLO
0.514000	18.60	9.9	56	37.4	QP	N	FLO
0.858000	19.80	10.1	56	36.2	QP	N	FLO

MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.166000	27.50	10.0	55	27.7	AV	N	FLO
0.190000	25.20	10.1	54	28.8	AV	N	FLO
0.210000	21.40	10.1	53	31.8	AV	N	FLO
0.366000	24.10	10.0	49	24.5	AV	N	FLO
1.578000	20.20	10.0	46	25.8	AV	N	FLO
1.626000	20.60	10.0	46	25.4	AV	N	FLO

RESULT: PASS


The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.

Attestation of Global Compliance




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

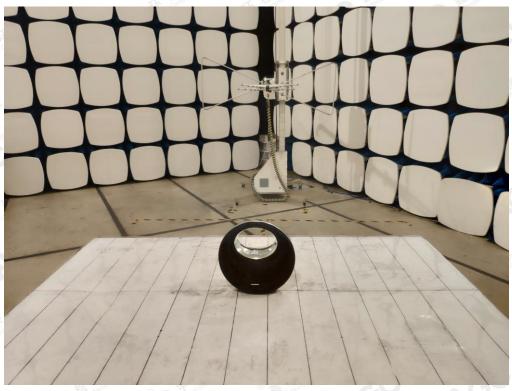

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ

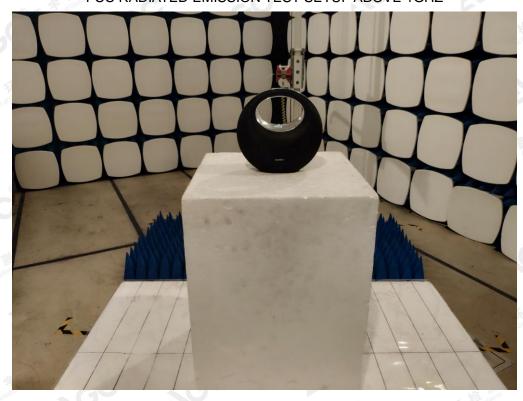

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attem.//www.agc.gett.com.


Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China





FCC CONDUCTED EMISSION TEST SETUP

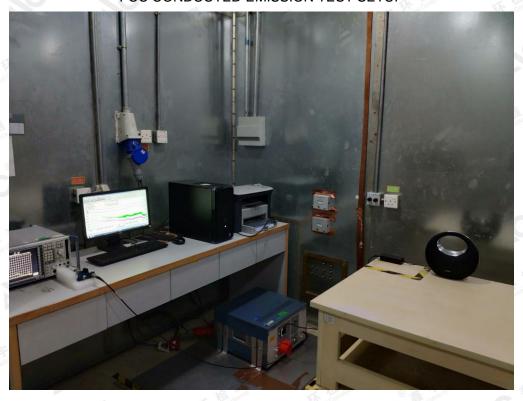

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CE), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F. , Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China