



REPORT No.: SZ21040408W04

TEST REPORT

APPLICANT : Anker Innovations Limited

PRODUCT NAME : Nebula Capsule II

MODEL NAME : D2421

BRAND NAME : NEBULA

FCC ID : 2AOKB-D2421X

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2018-12-06


TEST DATE : 2018-12-11 to 2019-01-17

ISSUE DATE : 2022-07-04

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:

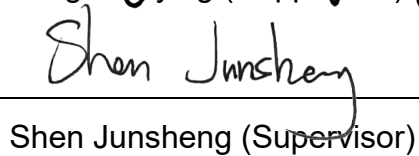
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	5
1.4. Test Standards and Results	6
1.5. Environmental Conditions	7
2. 47 CFR Part 15C Requirements	8
2.1. Antenna requirement	8
2.2. Duty Cycle of the test signal	8
2.3. Emission Bandwidth	14
2.4. Maximum conducted output power	36
2.5. Peak Power spectral density	40
2.6. Frequency Stability	59
2.7. Conducted Emission	61
2.8. Restricted Frequency Bands	65
2.9. Radiated Emission	92
Annex A Test Uncertainty	124
Annex B Testing Laboratory Information	125

Change History		
Version	Date	Reason for change
1.0	2022-07-04	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited
Applicant Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer:	Anker Innovations Limited
Manufacturer Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong

1.2. Equipment Under Test (EUT) Description

Product Name:	Nebula Capsule II	
Sample No.:	30#	
Hardware Version:	A277C	
Software Version:	V0.0.06	
Modulation Type:	OFDM	
Modulation Mode:	802.11a, 802.11n(HT20), 802.11n(HT40) 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80),	
Operating Frequency Range:	5.180 GHz- 5.240 GHz; 5.745GHz- 5.825GHz	
Channel Number:	Refer to 1.3	
Antenna Type:	FPC Antenna	
Antenna Gain:	3.04dBi	
Accessory Information:	Battery 1	
	Brand Name:	N/A
	Model No.:	INR21700M50T(21CR22/71)
	Serial No.:	N/A
	Capacity:	4850mAh
	Rated Voltage:	7.26V
	Charge Limit:	8.4V
	Manufacturer:	Anker Innovations Limited

Accessory Information:	Battery 2	
	Brand Name:	N/A
	Model No.:	LR2170SD-2S1P
	Serial No.:	N/A
	Capacity:	4850mAh
	Rated Voltage:	7.2V
	Charge Limit:	8.4V
	Manufacturer:	Anker Innovations Limited
Accessory Information:	AC Adapter	
	Brand Name:	N/A
	Model No.:	PN303UP
	Serial No.:	N/A
	Rated Output:	5V $\Rightarrow$ 3A, 9V $\Rightarrow$ 3A, 12V $\Rightarrow$ 2.5A, 15V $\Rightarrow$ 2A, 20V $\Rightarrow$ 1.5A
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.7A
	Manufacturer:	Shenzhen Xinspower Technology Co.,Ltd

Note1: This is a variant report of original report (Report No.: SZ18110335W04, FCC ID: 2AOKB-D2421). Based on the similarity between before, made the following changes:

1. Changed the brand name and FCC ID.
2. Delete A2014 adapter.
3. Modify the company information of the main supplier battery manufacturer.
4. Add a new battery.
5. Replace the T835 Bluetooth module.
6. Modify the hardware version number.

Except for the above differences, the others are the same as before. No other changes. The changes do not affect the results in this report.

Note 2: According to the certificate holder, they declared that the model D2421 contains two main modules, module (DM8260) and module (CGBT030). And this report recorded the results of module (DM8260) for WLAN5G function.

Note 3: WIFI hotspot does not support U-NII band.

Note 4: During test, the duty cycle of the EUT was setting to 100%.

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. The Channel Number and Frequency

Frequency Range: 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
80MHz	42	5210		
Frequency Range: 5745-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795
80MHz	155	5775		

Note 1: The black bold channels were selected for test.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS _{Note1}	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Dec 11, 2018	Wang Meng	PASS _{Note1}	No deviation
3	15.407(a)	Maximum Conducted Output Power	Dec 11, 2018	Wang Meng	PASS _{Note1}	No deviation
4	15.407(a) (e)	Emission Bandwidth	Dec 11, 2018	Wang Meng	PASS _{Note1}	No deviation
5	15.407(a)	Peak Power Spectral Density	Dec 11, 2018	Wang Meng	PASS _{Note1}	No deviation
6	15.407(g)	Frequency Stability	Dec 11, 2018	Wang Meng	PASS _{Note1}	No deviation
7	15.207	Conducted Emission	Jan 01, 2019	Ya Xinhou	PASS _{Note1}	No deviation
8	15.407(b)	Restricted Frequency Bands	Dec 28, 2018	Ya Xinhou	PASS _{Note1}	No deviation
9	15.407(b)	Radiated Emission	Jan 17, 2019	Ya Xinhou	PASS _{Note1}	No deviation

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11dB contains two parts that cable loss 1dB and Attenuator



10dB.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

Inside of the EUT has a FPC antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of the test signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Set:

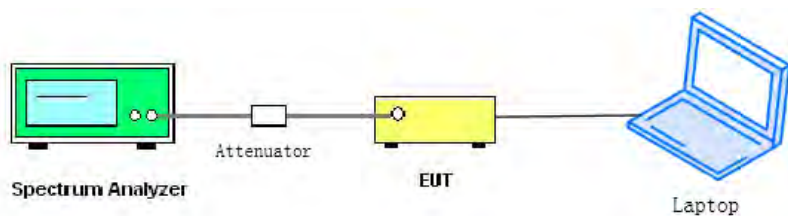

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	97.21	0.12
802.11n(HT20)	97.03	0.13
802.11n(HT40)	97.05	0.13
802.11ac(VHT20)	93.62	0.29
802.11ac(VHT40)	93.97	0.27
802.11ac(VHT80)	88.22	0.54


B. Test Plots

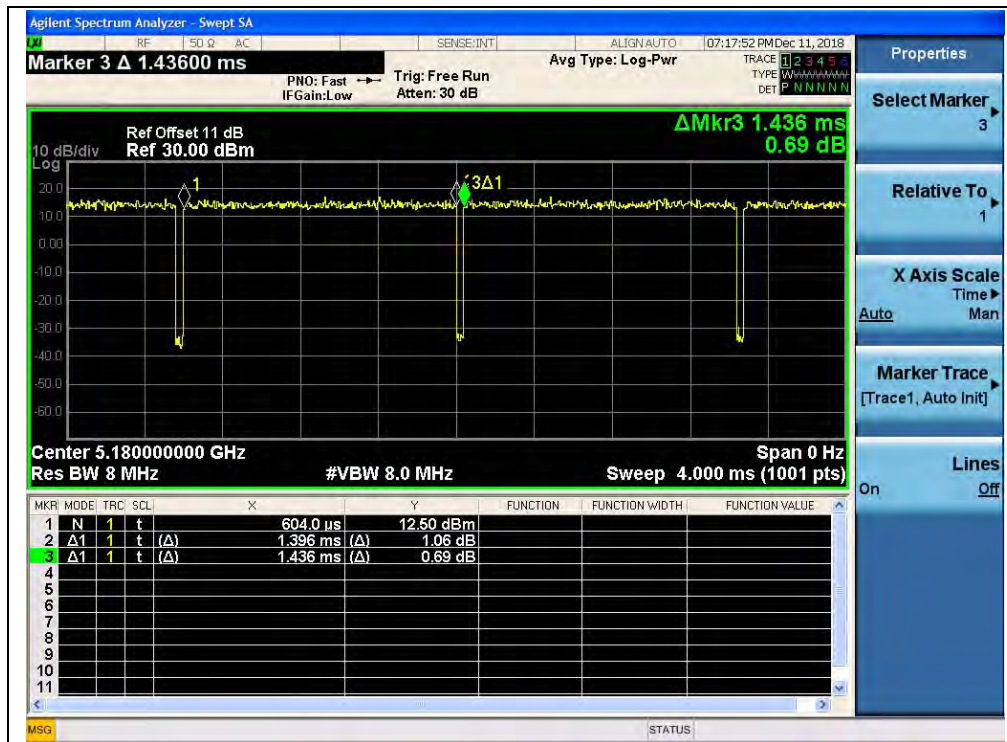


(CH36_5180MHz_802.11a)

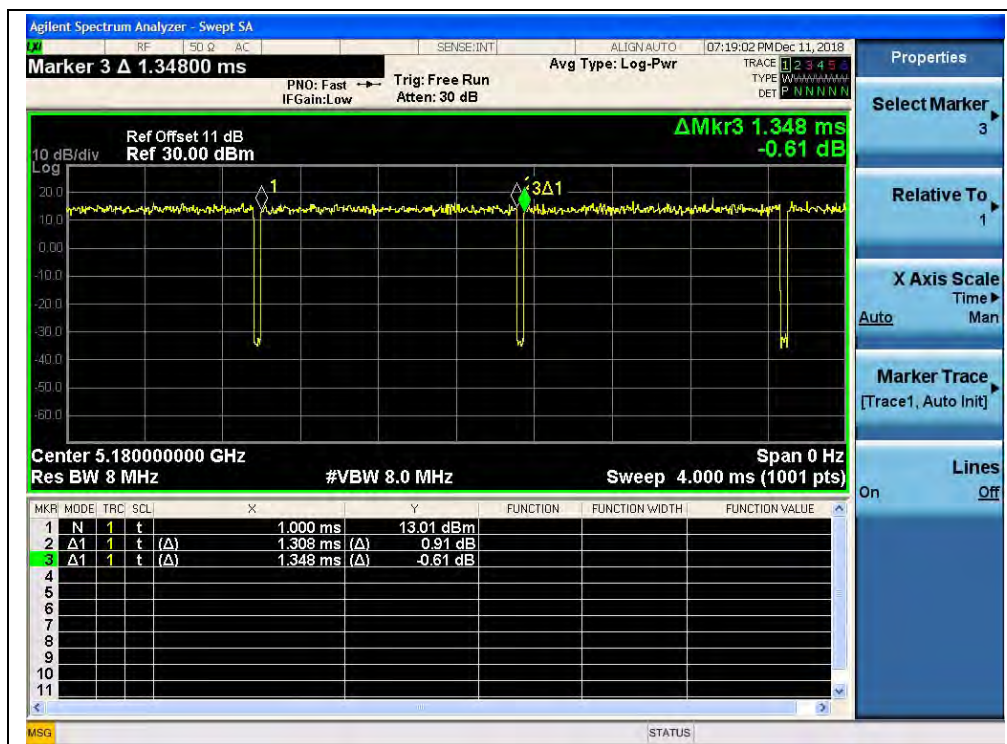


(CH36_5180MHz _802.11n(HT20))

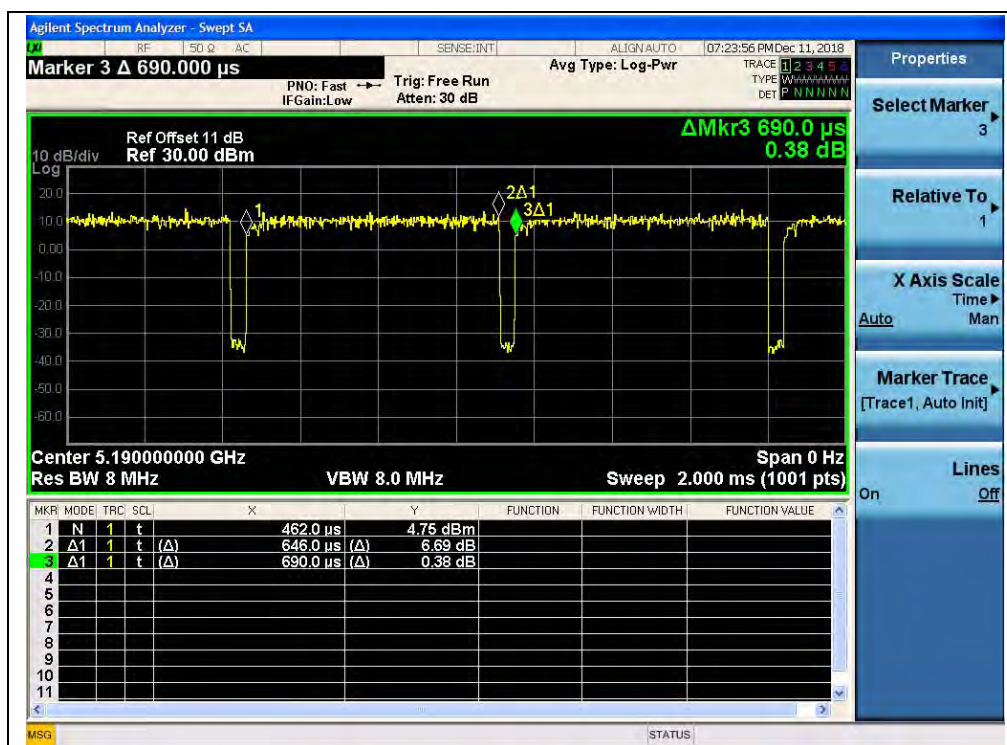


(CH38_5190MHz _802.11n(HT40))

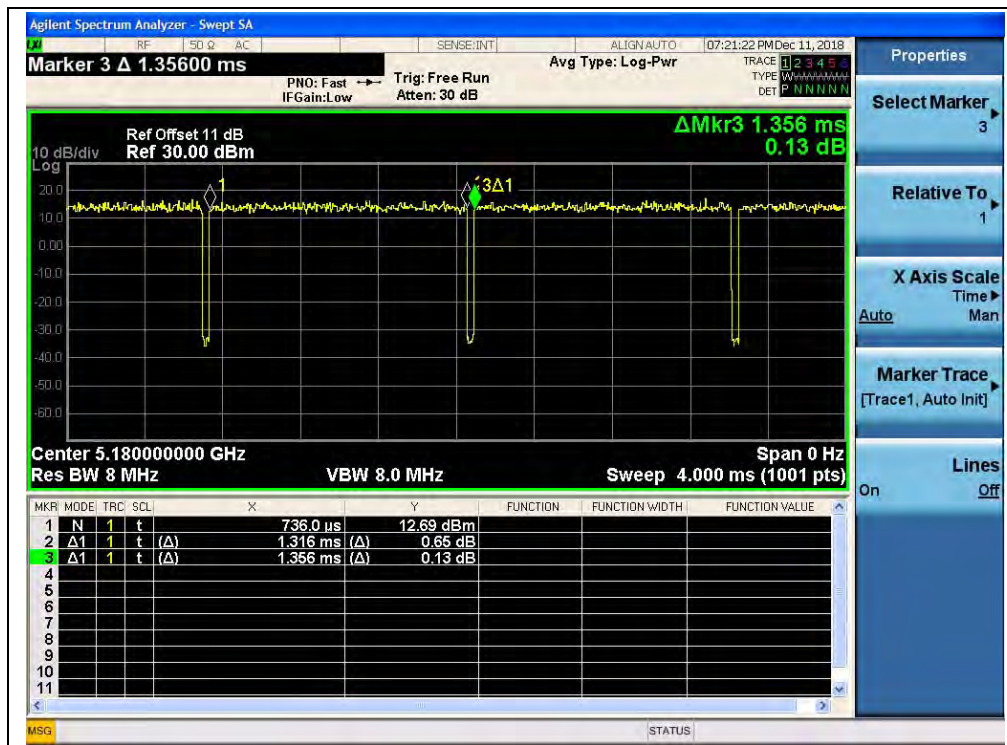

(CH36_5180MHz_802.11ac(VHT20))

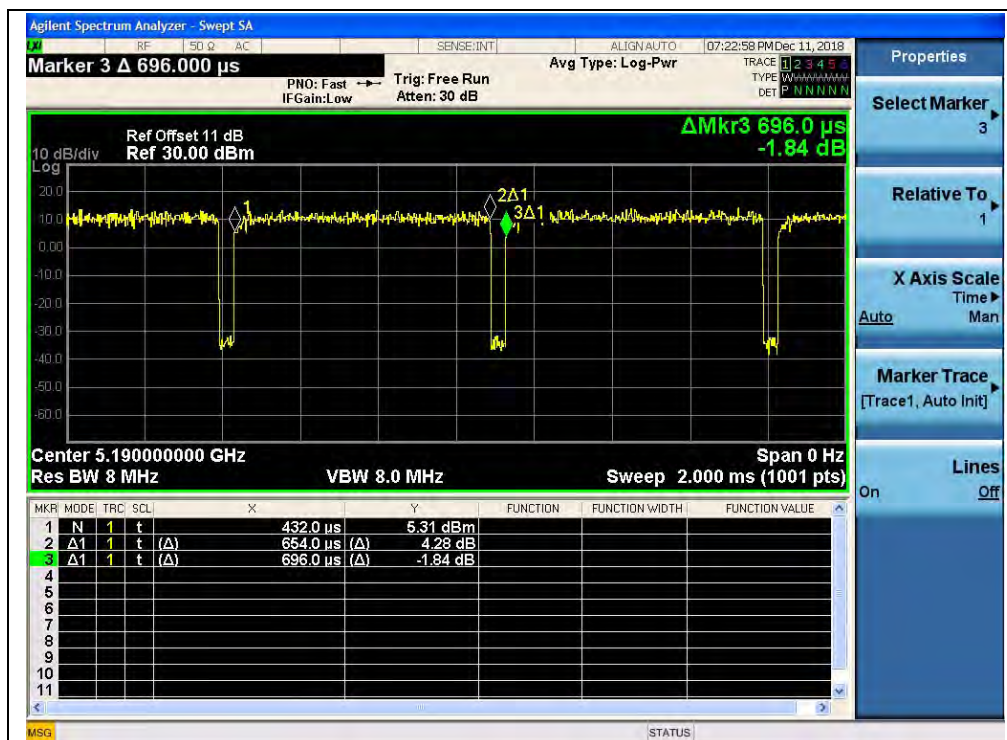

(CH38_5190MHz_802.11 ac(VHT40))

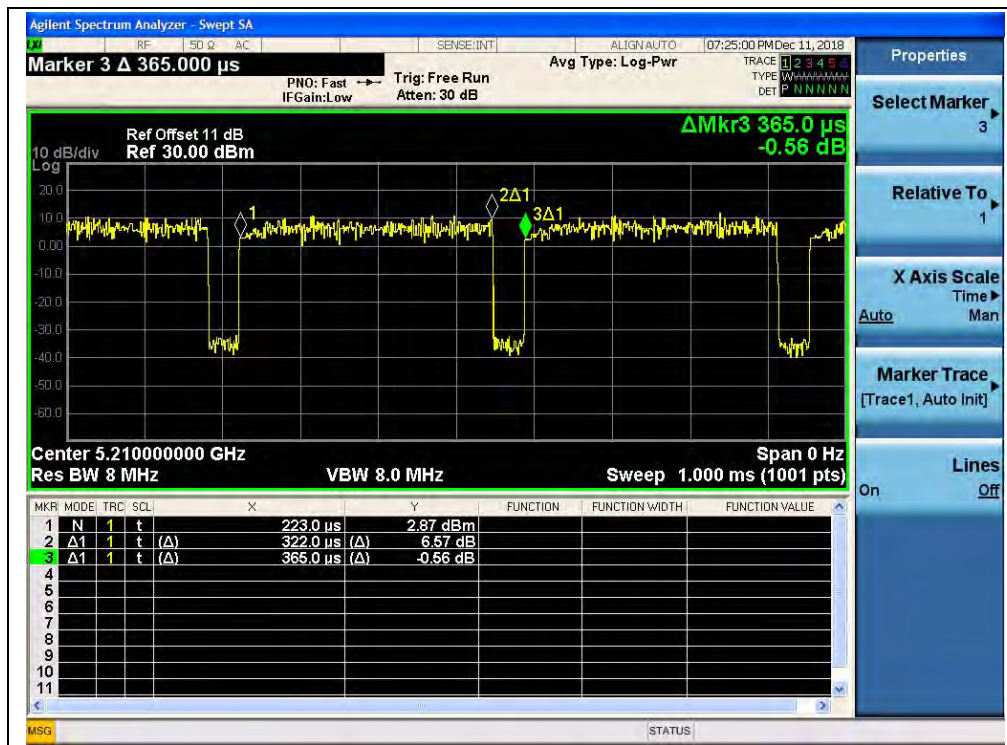

(CH42_5210MHz_802.11 ac(VHT80))


2.3. Emission Bandwidth

2.3.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.3.2. Test Description

Test Set:

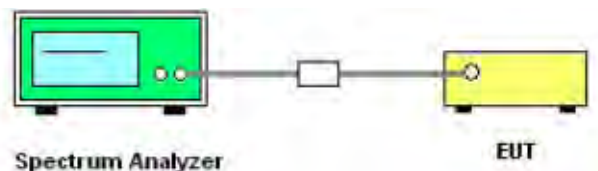

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.3.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.



- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.3.4. Test Result

802.11a Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	30.42
44	5220	31.95
48	5240	31.58
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
149	5745	16.36
157	5785	16.34
165	5825	16.36



B. Test Plots



(Channel 36, 5180MHz, 802.11a,)



(Channel 44, 5220 MHz, 802.11a,)



(Channel 48, 5240MHz, 802.11a,)



(Channel 48, 5240MHz, fh of -26dB, 802.11a,)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	31.62
44	5220	32.22
48	5240	30.13
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
149	5745	17.58
157	5785	17.53
165	5825	17.57

B. Test Plots



(Channel 36, 5180MHz, 802.11 n (HT20))



(Channel 44, 5220 MHz, 802.11 n (HT20))



(Channel 48, 5240MHz, 802.11 n (HT20))



(Channel 48, 5240MHz, fh of -26dB, 802.11 n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	64.45
46	5230	66.07
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
151	5755	36.11
159	5795	36.05

B. Test Plots



(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230 MHz, 802.11n (HT40))



(Channel 46, 5230 MHz, fh of -26dB, 802.11n (HT40))



(Channel 151, 5755 MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))




802.11ac (VHT20) Test mode


A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	33.22
44	5220	33.17
48	5240	30.80
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
149	5745	17.59
157	5785	17.58
165	5825	17.58

B. Test Plots

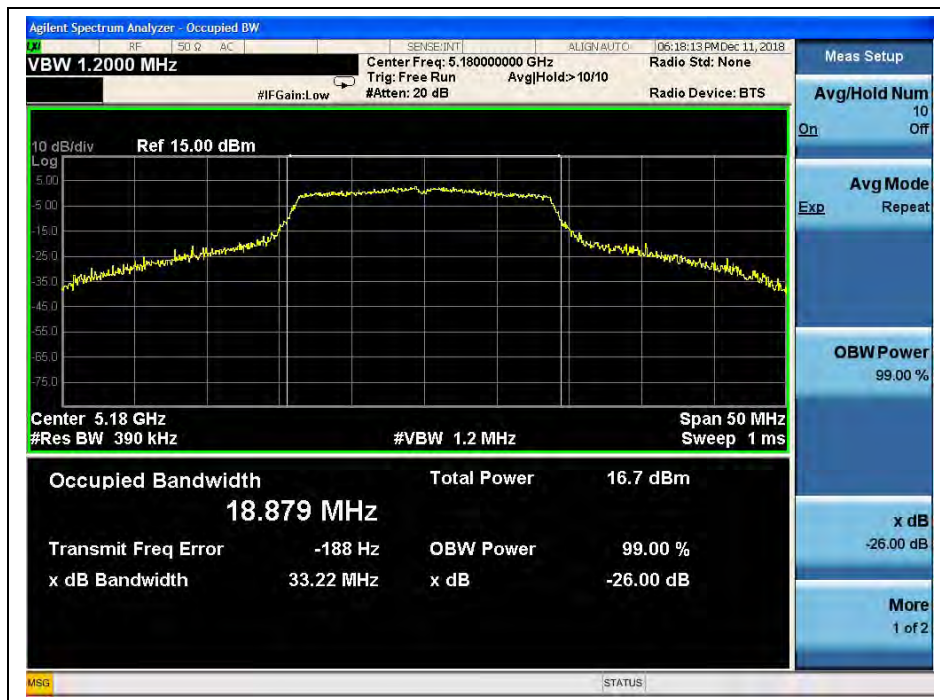

(Channel 36, 5180MHz, 802.11 ac (VHT20))

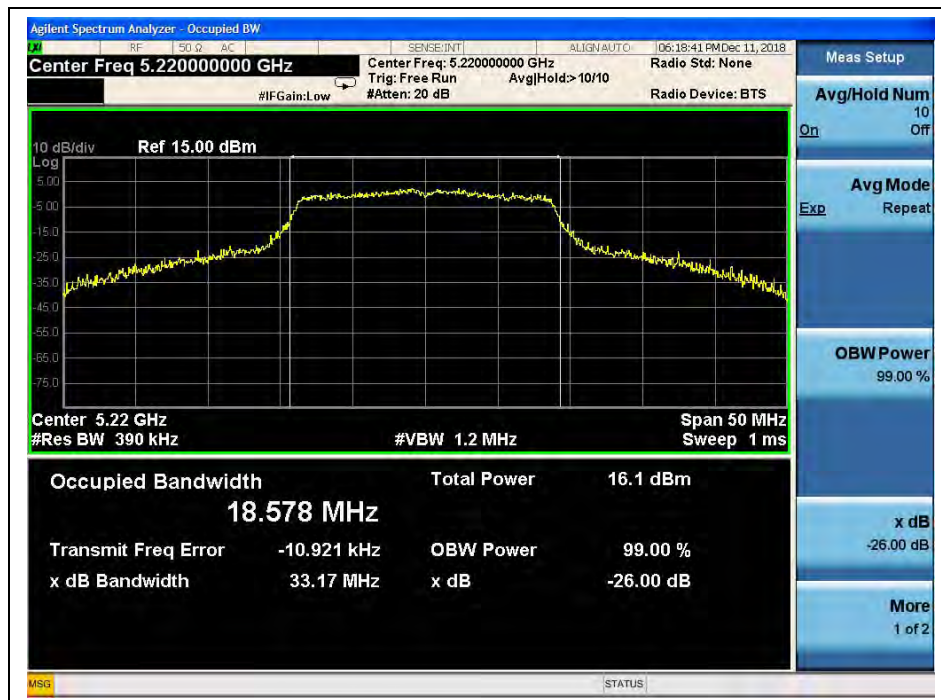

(Channel 44, 5220 MHz, 802.11 ac (VHT20))



(Channel 48, 5240MHz, 802.11 ac (VHT20))



(Channel 48, 5240MHz, fh of -26dB, ac (VHT20))



(Channel 149, 5745MHz, 802.11 ac (VHT20))



(Channel 157, 5785MHz, 802.11 ac (VHT20))



(Channel 165, 5825MHz, 802.11 ac (VHT20))

**802.11ac (VHT40) Test mode****A. Test Verdict:**

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	65.53
46	5230	63.75
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
151	5755	36.03
159	5795	35.79

B. Test Plots

(Channel 38, 5190MHz, 802.11 ac (VHT40))





(Channel 151, 5755 MHz, 802.11 ac (VHT40))



(Channel 159, 5795MHz, 802.11ac (VHT40))




802.11ac (VHT80) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	110.4
Channel	Frequency (MHz)	6dB Bandwidth (MHz)
155	5775	75.54


B. Test Plots

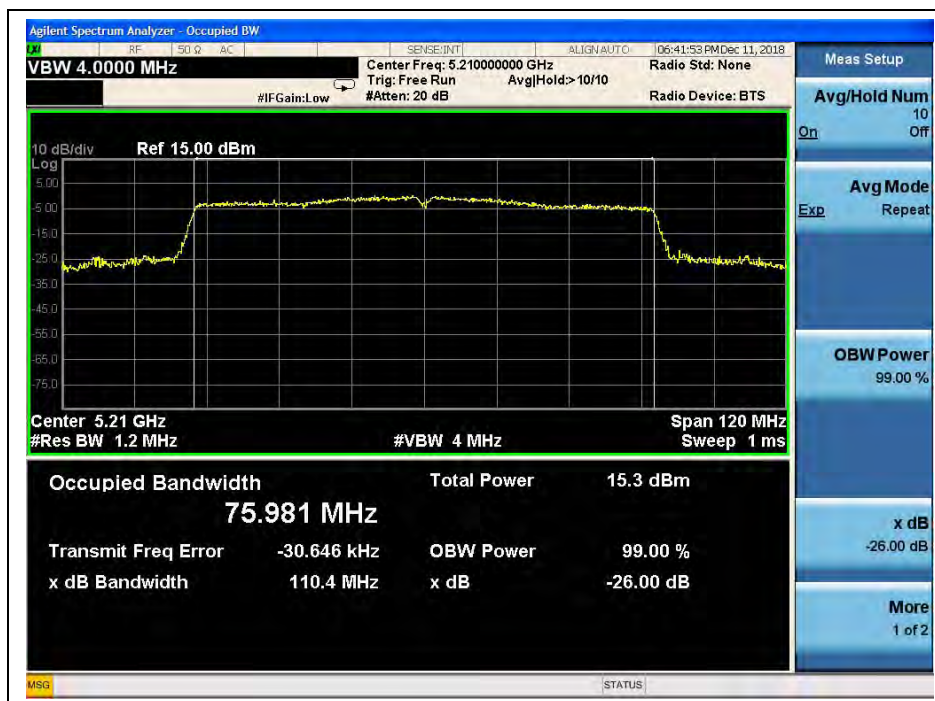

(Channel 42, 5210MHz, 802.11 ac (VHT80))



(Channel 42, 5210 MHz, fh of -26dB, 802. ac (VHT80))

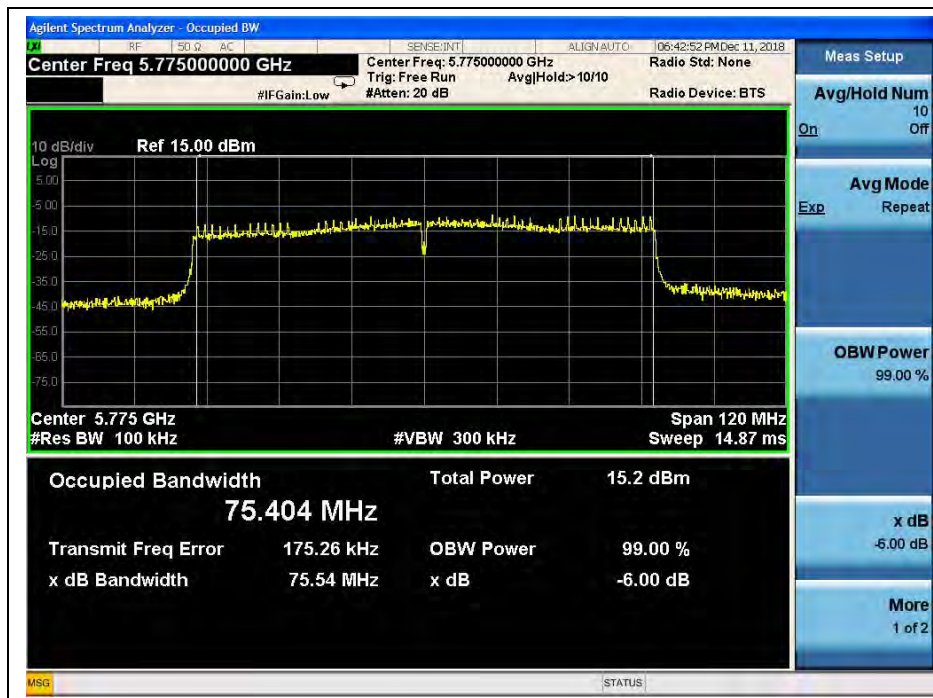

(Channel 155, 5775 MHz, 802.11 ac (VHT80))

2.4. Maximum conducted output power

2.4.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10 \log(N_{\text{ANT}})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.4.2. Test Description

Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

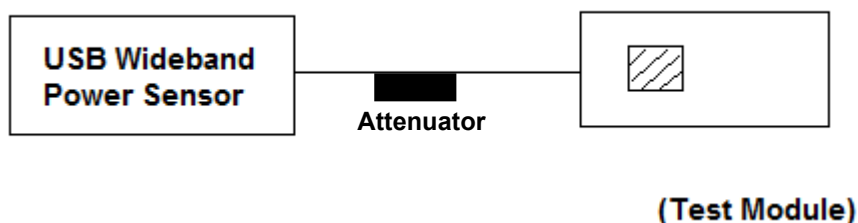

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

**2.4.3. Test Result****802.11a Test mode**

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Limit (dBm)	Verdict
36	5180	17.84	24	PASS
44	5220	18.02		
48	5240	18.20		
149	5745	18.92	30	
157	5785	19.14		
165	5825	19.72		
Channel	Frequency (MHz)	Measured Average Power (dBm)	Limit (dBm)	Verdict
36	5180	12.07	24	PASS
44	5220	12.16		
48	5240	12.37		
149	5745	12.83	30	
157	5785	12.95		
165	5825	13.49		

802.11n (HT20) Test mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Limit (dBm)	Verdict
36	5180	17.92	24	PASS
44	5220	18.23		
48	5240	18.30		
149	5745	19.05	30	
157	5785	19.28		
165	5825	19.82		
Channel	Frequency (MHz)	Measured Average Power (dBm)	Limit (dBm)	Verdict
36	5180	11.82	24	PASS
44	5220	12.08		
48	5240	12.15		
52	5260	12.45		
149	5745	12.66	30	
157	5785	13.18		
165	5825	11.82		

**802.11n (HT40) Test mode**

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Limit (dBm)	Verdict
38	5190	18.17	24	PASS
46	5230	18.32		
151	5755	19.23	30	
159	5795	19.63		
Channel	Frequency (MHz)	Measured Average Power (dBm)	Limit (dBm)	Verdict
38	5190	11.95	24	PASS
46	5230	11.89		
151	5755	12.58	30	
159	5795	12.90		

802.11ac (VHT20) Test mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Limit (dBm)	Verdict
36	5180	18.02	24	PASS
44	5220	18.24		
48	5240	18.42		
149	5745	19.03	30	
157	5785	19.29		
165	5825	19.81		
Channel	Frequency (MHz)	Measured Average Power (dBm)	Limit (dBm)	Verdict
36	5180	11.92	24	PASS
44	5220	12.08		
48	5240	12.16		
149	5745	12.48	30	
157	5785	12.78		
165	5825	13.14		

**802.11ac (VHT40) Test mode**

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Limit (dBm)	Verdict
38	5190	18.45	24	PASS
46	5230	18.11		
151	5755	19.29	30	
159	5795	19.54		
Channel	Frequency (MHz)	Measured Average Power (dBm)	Limit (dBm)	Verdict
38	5190	11.96	24	PASS
46	5230	11.85		
151	5755	12.50	30	
159	5795	12.80		

802.11ac (VHT80) Test mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Limit (dBm)	Verdict
42	5210	18.10	24	PASS
155	5775	19.15	30	
Channel	Frequency (MHz)	Measured Average Power (dBm)	Limit (dBm)	Verdict
42	5210	11.53	24	PASS
155	5775	12.11	30	

2.5. Peak Power spectral density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500KHz band.


If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Set:

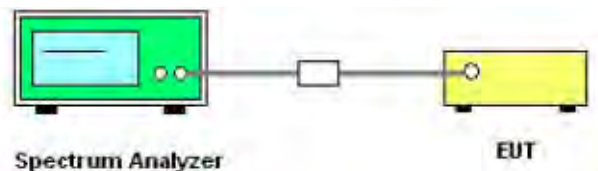

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.5.3. Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-1 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1 MHz. Set VBW $\geq$ 3 MHz.
- 3) Number of points in sweep $\geq$ 2 Span / RBW. Sweep time = auto.
- 4) Detector = Peak



- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result

802.11a Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	8.42	11	PASS
44	5220	7.98		
48	5240	8.01		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	4.54	30	PASS
157	5785	5.77		
165	5825	6.52		

B. Test Plots



(Channel 36, 5180MHz, 802.11a,)



(Channel 44, 5220 MHz, 802.11a,)



(Channel 48, 5240MHz, 802.11a,)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)

802.11n (HT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	7.72	11	PASS
44	5220	7.86		
48	5240	8.17		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	4.24	30	PASS
157	5785	5.68		
165	5825	7.46		



B. Test Plots



(Channel 36, 5180MHz, 802.11 n (HT20))



(Channel 44, 5220 MHz, 802.11 n (HT20))



(Channel 48, 5240MHz, 802.11 n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))



802.11n (HT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	5.29	11	PASS
46	5230	4.87		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
151	5755	2.42	30	PASS
159	5795	3.35		

B. Test Plots



(Channel 38, 5190MHz, 802.11n (HT40))



(Channel 46, 5230 MHz, 802.11n (HT40))



(Channel 151, 5755 MHz, 802.11n (HT40))



(Channel 159, 5795MHz, 802.11n (HT40))



802.11ac (VHT20) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	8.06	11	PASS
44	5220	7.93		
48	5240	8.07		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	4.33	30	PASS
157	5785	5.51		
165	5825	6.59		


B. Test Plots



(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 44, 5220 MHz, 802.11 ac (VHT20))

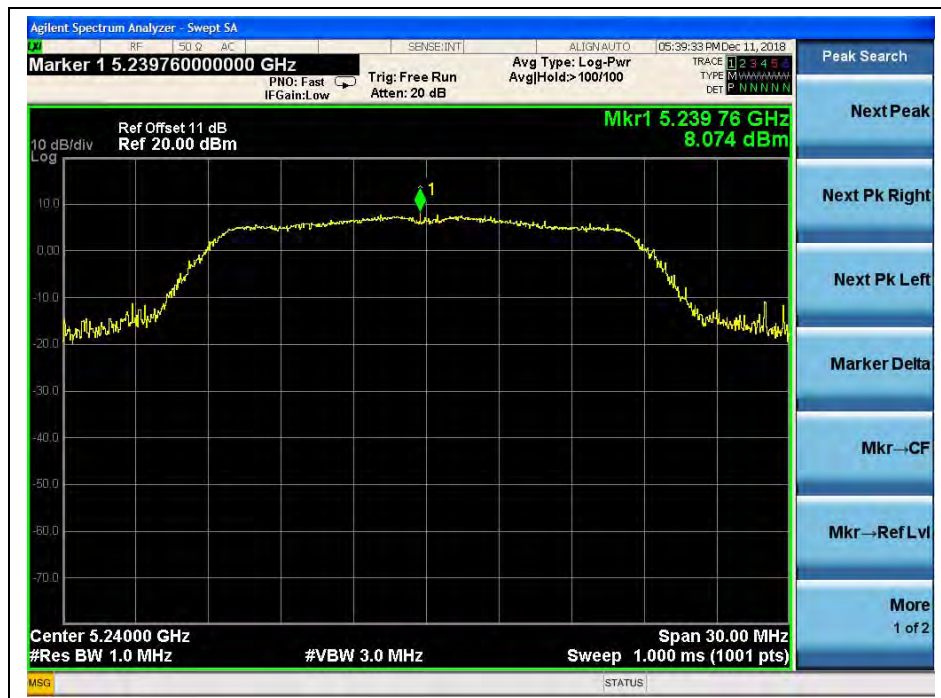

(Channel 48, 5240MHz, 802.11 ac (VHT20))



(Channel 149, 5745MHz, 802.11 ac (VHT20))



(Channel 157, 5785MHz, 802.11 ac (VHT20))



(Channel 165, 5825MHz, 802.11 ac (VHT20))

802.11ac (VHT40) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSP (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	5.64	11	PASS
46	5230	5.39		
Channel	Frequency (MHz)	Measured PPSP (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
151	5755	2.42	30	PASS
155	5795	2.89		



B. Test Plots



(Channel 38, 5190MHz, 802.11 ac (VHT40))



(Channel 46, 5230 MHz, 802.11 ac (VHT40))



(Channel 151, 5755MHz, 802.11 ac (VHT40))



(Channel 159, 5795MHz, 802.11 ac (VHT40))



802.11ac (VHT80) Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSP (dBm/MHz)	Limit (dBm/MHz)	Verdict
42	5210	2.85	11	PASS
Channel	Frequency (MHz)	Measured PPSP (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
155	5775	-0.01	30	PASS

B. Test Plots



(Channel 42, 5210MHz, 802.11ac (VHT80))



(Channel 155, 5775MHz, 802.11 ac (VHT80))



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Freq Dev. (Hz)	Deviation (ppm)
100%	3.8	+20(Ref)	23	0.004
100%		-30	52	0.010
100%		-20	43	0.008
100%		-10	35	0.007
100%		0	28	0.005
100%		+10	20	0.004
100%		+20	21	0.004
100%		+30	37	0.007
100%		+40	42	0.008
100%		+50	44	0.008
85%	3.23	+20	50	0.010
115%	4.37	+20	41	0.008



U-NII-3 (Ch. 149) 5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Freq Dev. (Hz)	Deviation (ppm)
100%	3.8	+20(Ref)	16	0.003
100%		-30	49	0.009
100%		-20	36	0.006
100%		-10	25	0.004
100%		0	18	0.003
100%		+10	16	0.003
100%		+20	21	0.004
100%		+30	25	0.004
100%		+40	33	0.006
100%		+50	42	0.007
85%	3.23	+20	27	0.005
115%	4.37	+20	35	0.006

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

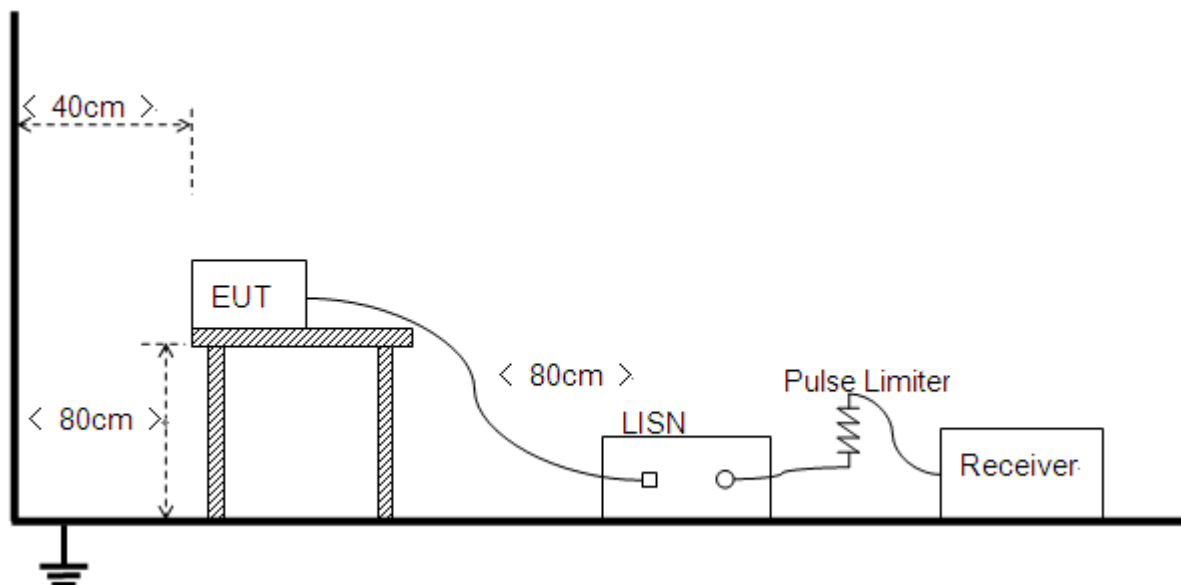

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ADAPTER+USB+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

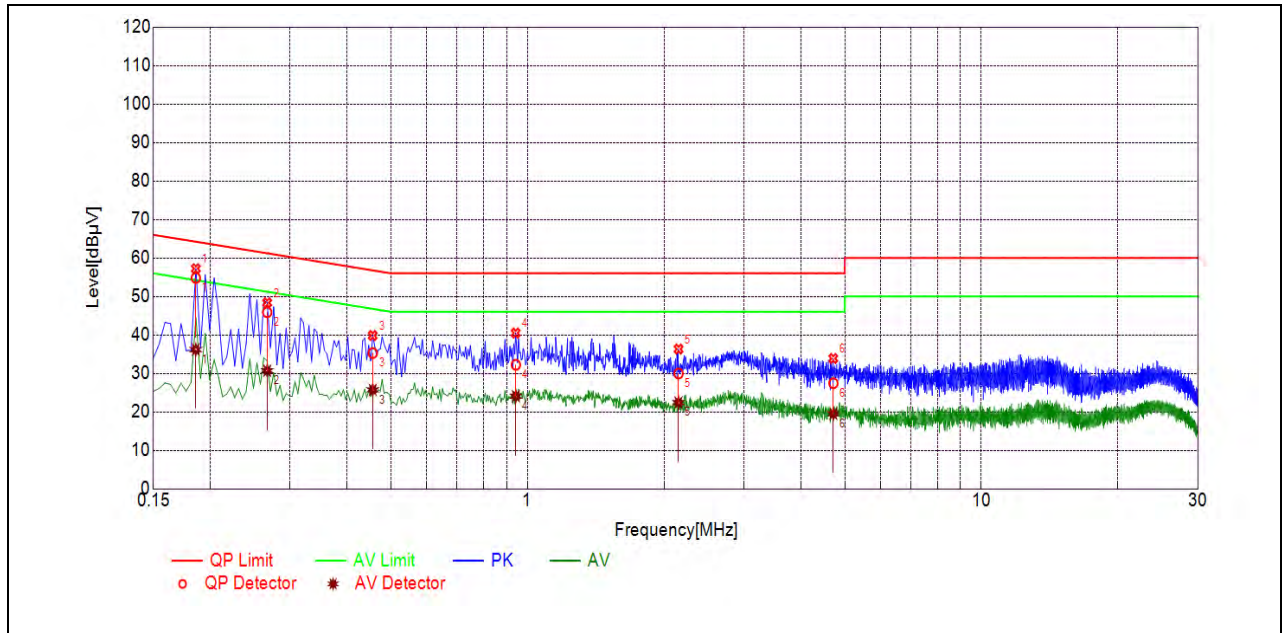

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1859	54.81	36.17	64.22	54.22	Line	PASS
2	0.2670	45.88	30.69	61.21	51.21		PASS
3	0.4562	35.29	25.72	56.76	46.76		PASS
4	0.9428	32.23	24.08	56.00	46.00		PASS
5	2.1513	29.97	22.41	56.00	46.00		PASS
6	4.7199	27.43	19.50	56.00	46.00		PASS

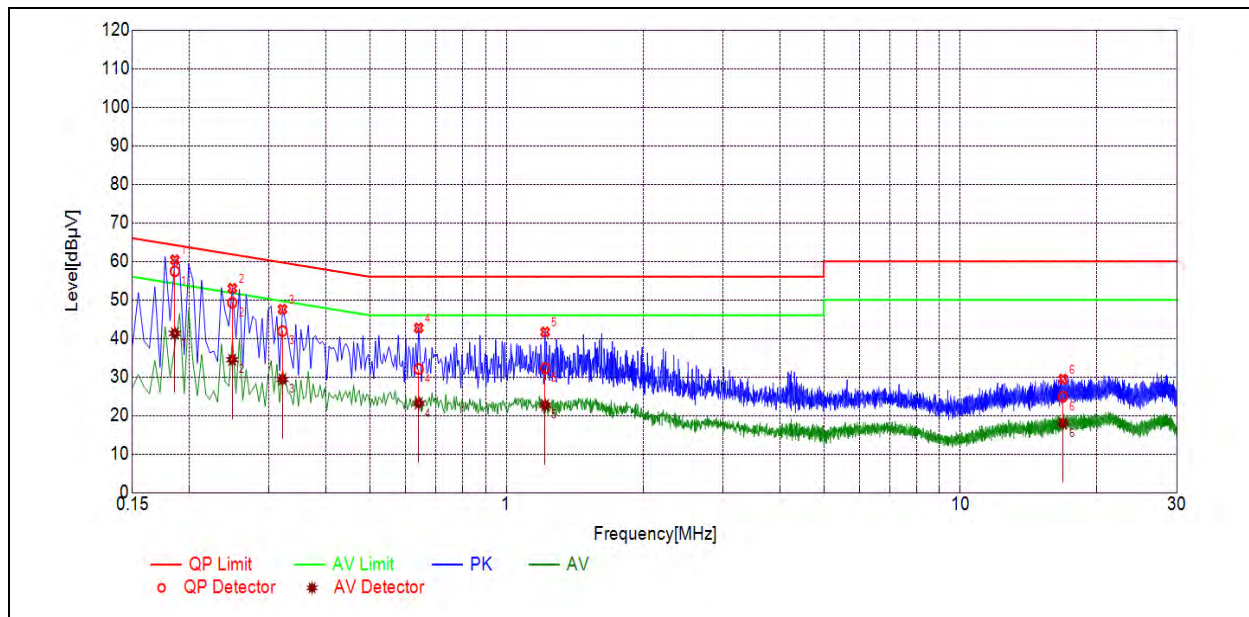

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1860	57.44	41.30	64.21	54.21	Neutral	PASS
2	0.2488	49.28	34.48	61.80	51.80		PASS
3	0.3210	41.90	29.38	59.68	49.68		PASS
4	0.6406	32.07	23.15	56.00	46.00		PASS
5	1.2168	32.27	22.68	56.00	46.00		PASS
6	16.8262	24.91	18.00	60.00	50.00		PASS


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.407(b)(7), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

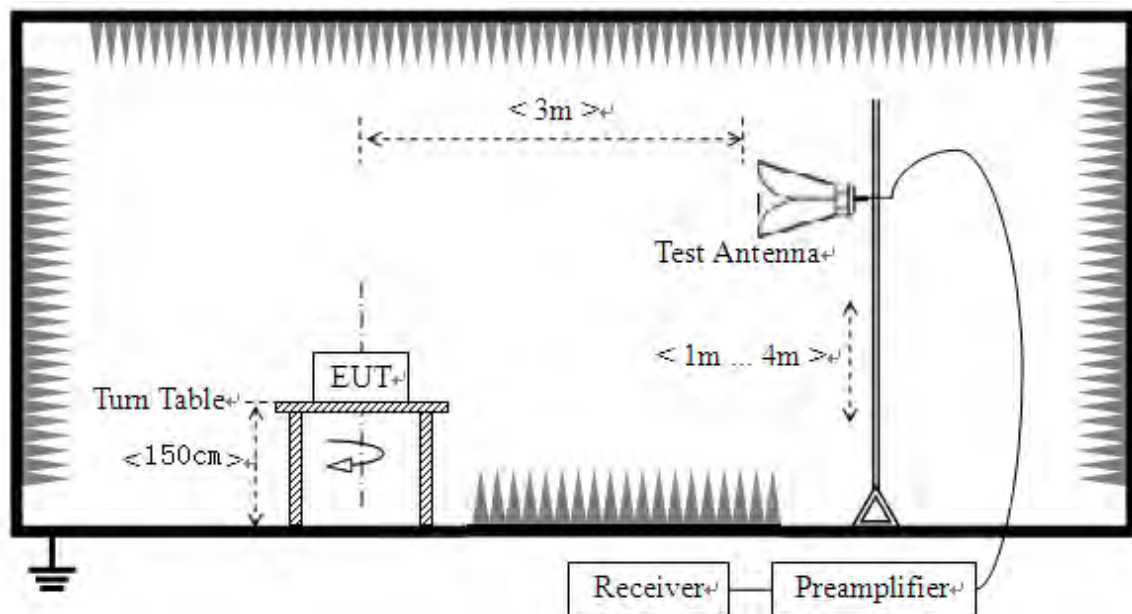

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


802.11a Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
36	5150.00	PK	53.97	-26.92	32.20	59.25	74	PASS
36	5150.00	AV	43.74	-26.92	32.20	49.02	54	PASS
48	5376.82	PK	45.88	-26.92	32.20	51.16	74	PASS
48	5350.00	AV	34.41	-26.92	32.20	39.69	54	PASS
149	5725.00	PK	60.36	-26.23	32.20	66.33	122.23	PASS
149	5725.00	AV	47.59	-26.23	32.20	53.56	54	PASS
165	5850.00	PK	51.22	-26.23	32.20	57.19	122.23	PASS
165	5850.00	AV	38.65	-26.23	32.20	44.62	54	PASS




B. Test Plots:

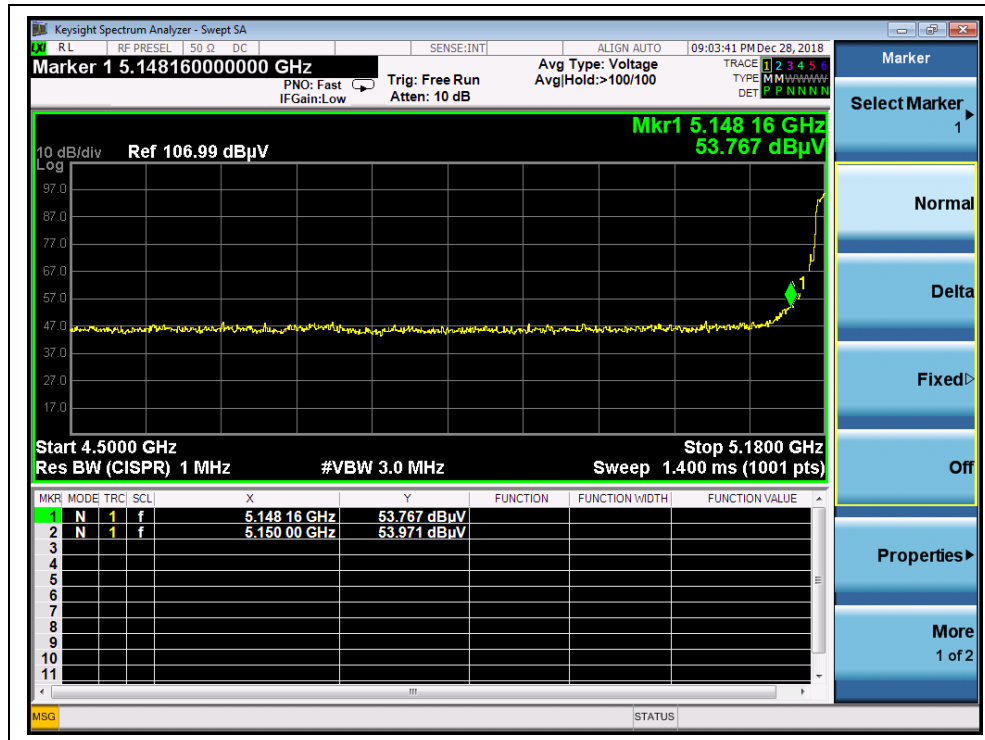


(Channel 36, PEAK, 802.11a)

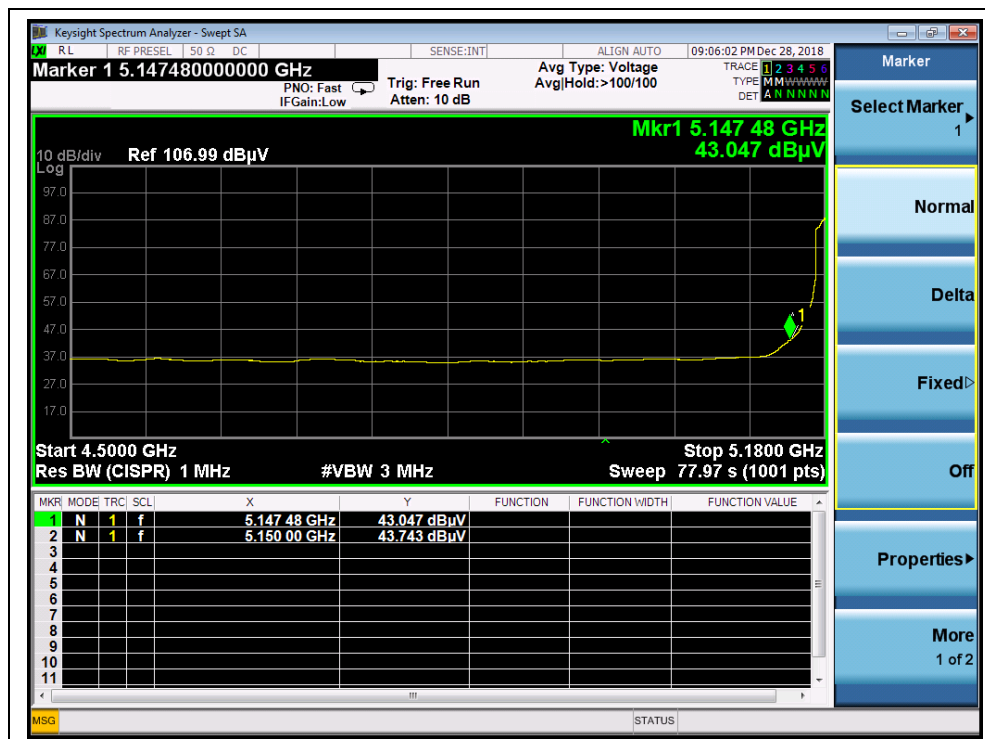


(Channel 36, AVG, 802.11a)

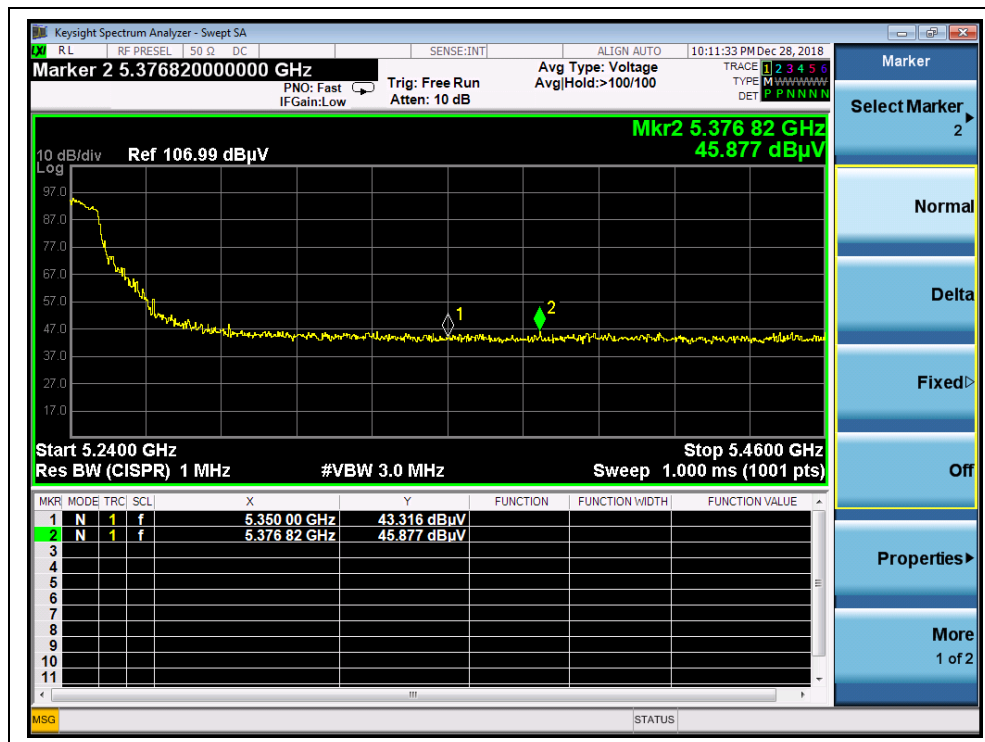


(Channel 48, PEAK, 802.11a)

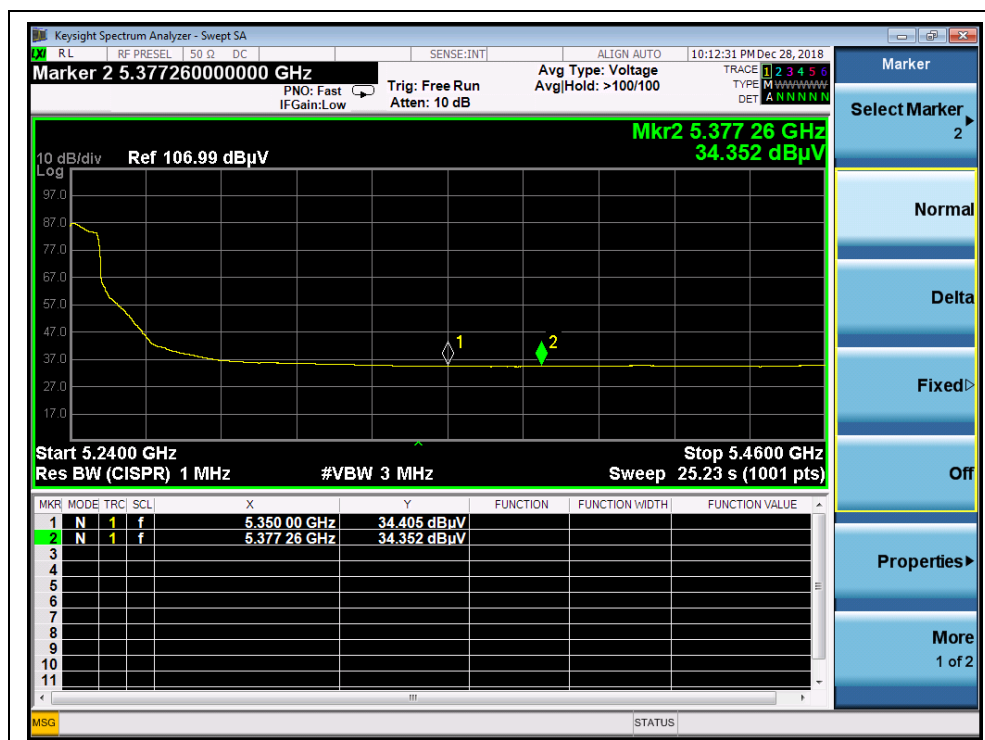


(Channel 48, AVG, 802.11a)

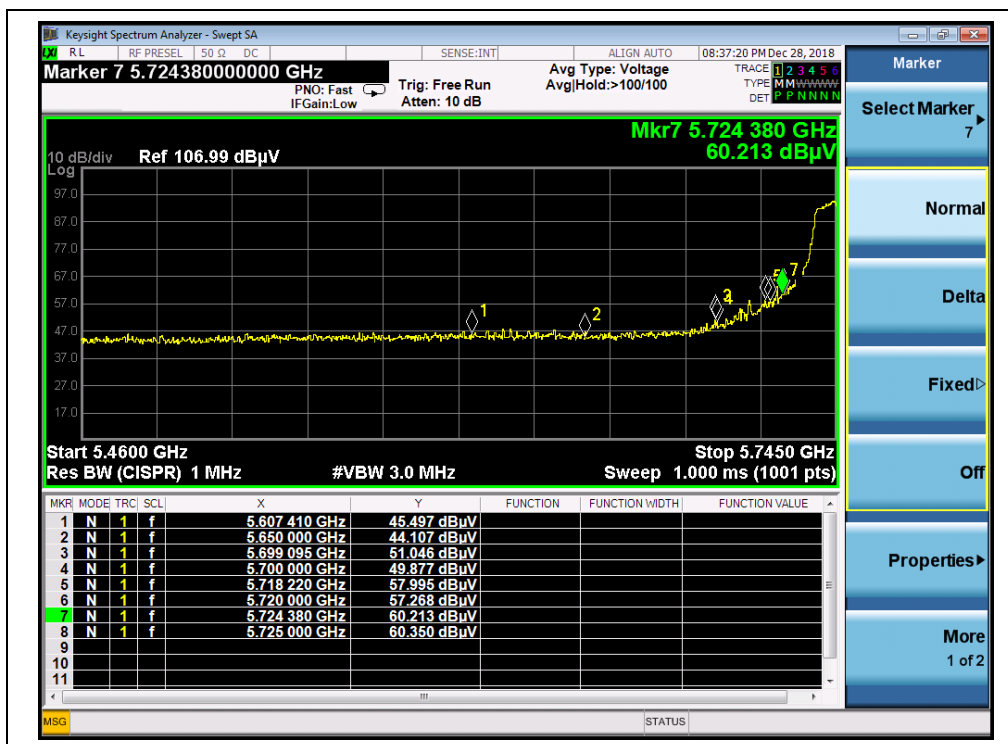

(Channel 149, PEAK, 802.11a)

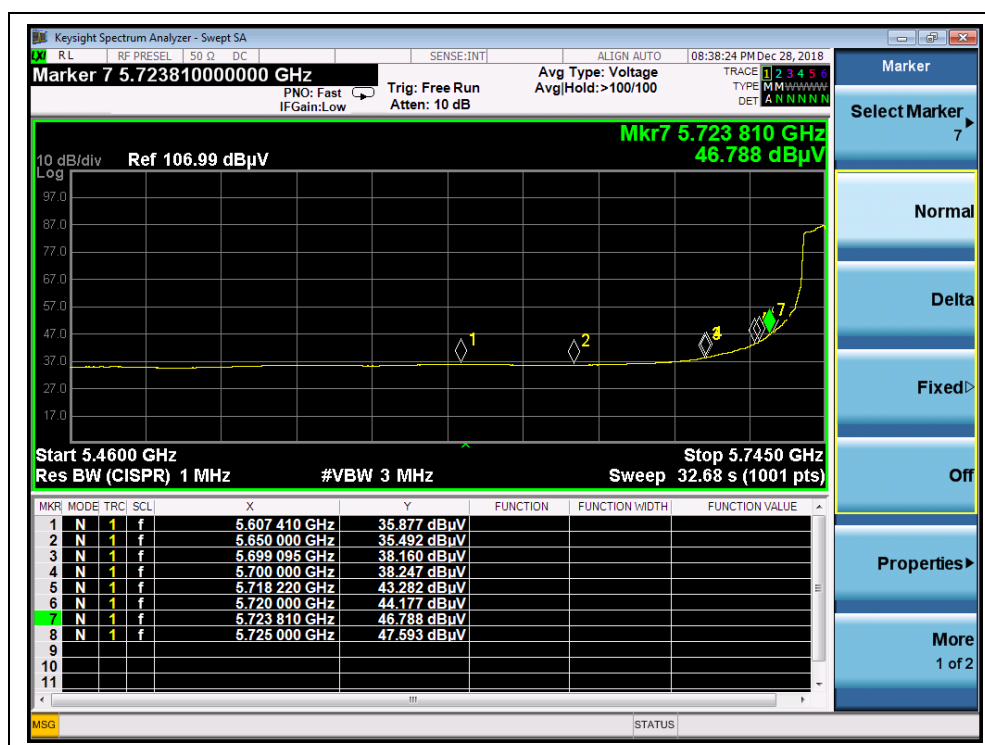

(Channel 149, AVG, 802.11a)

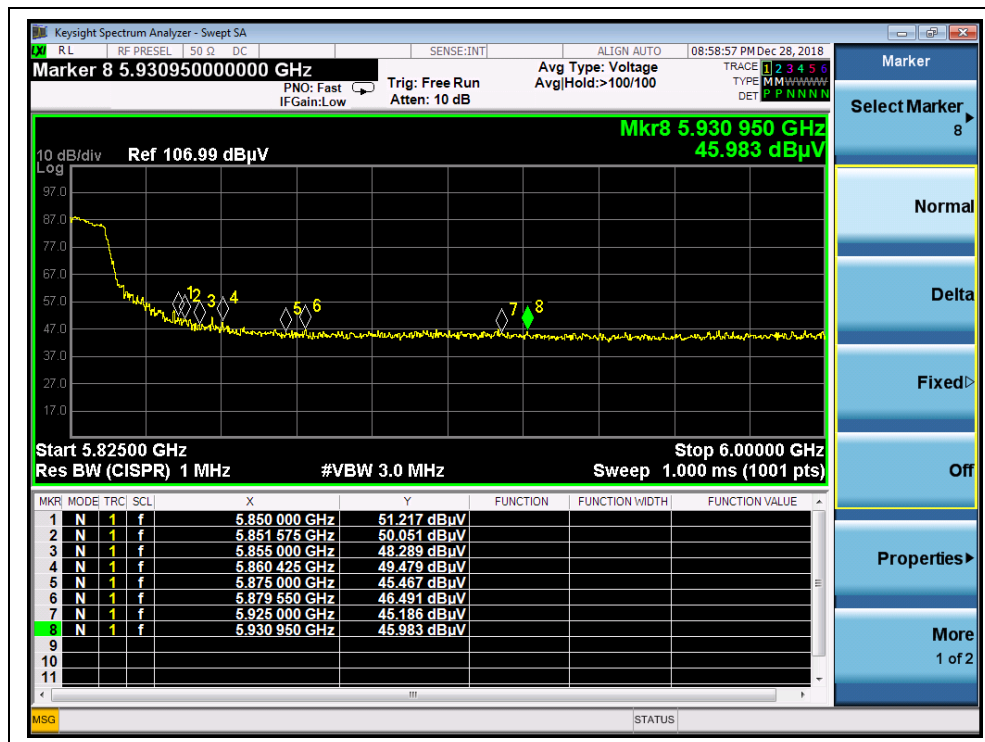

(Channel 165, PEAK, 802.11a)



(Channel 165, AVG, 802.11a)