

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN22LJWT 002</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	<b>168361390</b>	<b>Seite 1 von 19</b> <i>Page 1 of 19</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	<b>N/A</b>	<b>Auftragsdatum:</b> <i>Order date:</i>	<b>2022-03-04</b>	
<b>Auftraggeber:</b> <i>Client:</i>	<b>Sichuan AI-Link Technology Co.,Ltd.</b> Anzhou Industrial Park, Mianyang, Sichuan,P.R.C			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Wi-Fi Module			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	WF-M63B-UWP1			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Test Report			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2022-03-04	Please refer to Photo Document		
<b>Prüfmuster-Nr.:</b> <i>Test sample no:</i>	A003222723-001~004 A003224163-001~002			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2022-03-24 - 2022-04-13			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>geprüft von:</b> <i>tested by:</i>	<u>X Bell Hu</u> <small>Signed by: Bell Hu</small>		<b>genehmigt von:</b> <i>authorized by:</i>	<u>X Lin Lin</u> <small>Signed by: Lin Lin</small>
<b>Datum:</b> <i>Date:</i>	2022-04-25		<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2022-04-25
<b>Stellung / Position:</b>	Project Manager		<b>Stellung / Position:</b>	Reviewer
<b>Sonstiges / Other:</b>	FCC ID: 2AOKI-WFM63BUWP1			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
<b>* Legende:</b>	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
<b>* Legend:</b>	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

v05

## **Test Summary**

**5.1.1 ANTENNA REQUIREMENT**

*RESULT: Pass*

**5.1.2 MAXIMUM CONDUCTED OUTPUT POWER**

*RESULT: Pass*

**5.1.3 CONDUCTED POWER SPECTRAL DENSITY**

*RESULT: Pass*

**5.1.4 6DB BANDWIDTH**

*RESULT: Pass*

**5.1.5 99% BANDWIDTH**

*RESULT: Pass*

**5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH**

*RESULT: Pass*

**5.1.7 RADIATED SPURIOUS EMISSION**

*RESULT: Pass*

**5.1.8 AC CONDUCTED EMISSION**

*RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2</b>	<b>TEST SITES .....</b>	<b>4</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>5</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>6</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>6</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>6</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>7</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>7</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>7</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>8</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>8</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>8</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>9</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>9</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>9</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>9</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>9</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM.....</b>	<b>10</b>
<b>5</b>	<b>TEST RESULTS .....</b>	<b>11</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>11</b>
<b>5.1.1</b>	<i>Antenna Requirement .....</i>	<b>11</b>
<b>5.1.2</b>	<i>Maximum Conducted Output Power .....</i>	<b>12</b>
<b>5.1.3</b>	<i>Conducted Power Spectral Density .....</i>	<b>13</b>
<b>5.1.4</b>	<i>6dB Bandwidth .....</i>	<b>14</b>
<b>5.1.5</b>	<i>99% Bandwidth .....</i>	<b>15</b>
<b>5.1.6</b>	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth .....</i>	<b>16</b>
<b>5.1.7</b>	<i>Radiated Spurious Emission .....</i>	<b>17</b>
<b>5.1.8</b>	<i>AC Conducted Emission .....</i>	<b>18</b>
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>19</b>
<b>7</b>	<b>LIST OF TABLES.....</b>	<b>19</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of Test Set-up

Appendix B: Test Results of Wi-Fi 802.11 b/g/n

# 2 Test Sites

## 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

<b>Radio Spectrum Testing (TS8997)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
Signal Analyzer	R&S	FSV 40	101441	09.08.2022
OSP	R&S	OSP 150	101017	02.12.2022
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	02.12.2022
Wideband Power Sensor	R&S	NRP-Z81	105677	09.08.2022
Shielding Room 8#	Albatross	SR8	APC17151-SR8	22.06.2024
<b>Unwanted Emission Testing (TS9975)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EMI Test Receiver	R&S	ESR 7	102021	10.08.2022
Signal Analyzer	R&S	FSV 40	101439	09.08.2022
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	09.08.2022
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	09.08.2022
Amplifier	R&S	SCU-18F	180070	09.08.2022
Amplifier	R&S	SCU40A	100475	09.08.2022
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	08.08.2022
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	08.08.2022
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	08.08.2022
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	13.09.2022
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
Voltage (DC)	$\pm 1$ %
Voltage (AC, <10kHz)	$\pm 2$ %

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a Wi-Fi Module, which supports Bluetooth, 2.4GHz Wi-Fi 802.11 b/g/n and 5GHz Wi-Fi 802.11a/n/ac wireless technology.

For details refer to the User Manual, Technical Description and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment:	Wi-Fi Module
Type Designation:	WF-M63B-UWP1
FCC ID:	2AOKI-WFM63BUWP1
Operating Voltage:	DC 5V
Antenna Type:	Integral Antennas
Antenna Gain:	<b>Wi-Fi Antenna 1#:</b> Max gain 2.4 dBi for 2.4GHz Wi-Fi Max gain 3.48 dBi for 5GHz Wi-Fi <b>Wi-Fi Antenna 2#:</b> Max gain 3.9 dBi for 2.4GHz Wi-Fi Max gain 4.44 dBi for 5GHz Wi-Fi <b>BT Antenna 3#:</b> Max gain 3.0 dBi for Bluetooth  As for MIMO mode for Antenna 1# and Antenna 2#, Cyclic Delay Diversity mode Employed.
<b>Technical Specification of Bluetooth (Dual Mode)</b>	
Operating Frequency:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Channel Number:	79 channels, BDR & EDR 40 channels, BLE
Channel Separation:	1MHz (for EDR & BDR), 2MHz (for BLE)
<b>Technical Specification of Wi-Fi 802.11 b/g/n</b>	
Operating Frequency:	2412 - 2462 MHz for 802.11b/g/n(HT20) 2422 - 2452 MHz for 802.11n(HT40)
Type of Modulation:	DSSS(DBPSK/DQPSK/CCK) OFDM(BPSK/QPSK/16QAM/64QAM)
Data Rate:	1/2/5.5/11 Mbps for 802.11b 6/9/12/18/24/36/48/54 Mbps for 802.11g MCS0 ~ MCS7 for 802.11n
Channel Number:	11 channels for 802.11b/g/n(HT20) 7 channels for 802.11n(HT40)
Channel Separation:	5 MHz

MIMO and SISO mode:	SISO for 802.11b/g, MIMO and SISO for 802.11n.
<b>Technical Specification of Wi-Fi 802.11 a/n/ac</b>	
Operating Frequency:	5180-5320MHz, 5500-5720MHz, 5745-5825MHz
Type of Modulation:	OFDM(BPSK/QPSK/16QAM/64QAM/256QAM)
Channels:	5180-5320MHz, 802.11 a/n20/n40/ac20/ac40/ac80 5500-5720MHz, 802.11 a/n20/n40/ac20/ac40/ac80 5745-5825MHz, 802.11 a/n20/n40/ac20/ac40/ac80
Channel Separation	5 MHz
MIMO and SISO mode:	SISO for 802.11a, MIMO and SISO for 802.11n/ac.
DFS:	Client device without DFS detection

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi 802.11 b/g/n wireless transmitting mode
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. On, Wi-Fi 802.11 b/g/n connecting mode
- C. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Application Form
- User Manual
- Block Diagram
- Operation Description



## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model WF-M63B-UWP1 in this report.

**Table 3: Test environments**

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	24.6°C	DC 5.0V	Ambient

**Table 4: Test channel and frequency**

Mode	Test Channels
802.11b/g/n(HT20)	L: CH01, 2412MHz; M: CH06, 2437MHz; H: CH11, 2462MHz
802.11b/g/n(HT40)	L: CH03, 2422MHz; M: CH06, 2437MHz; H: CH09, 2452MHz

### 4.3 Special Accessories and Auxiliary Equipment

**Table 5: Auxiliary Equipment Used during Test**

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Test jig	Sichuan AI-Link Technology Co.,Ltd.	WF-M63B-UWP1	N/A	DC 5V

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

### 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

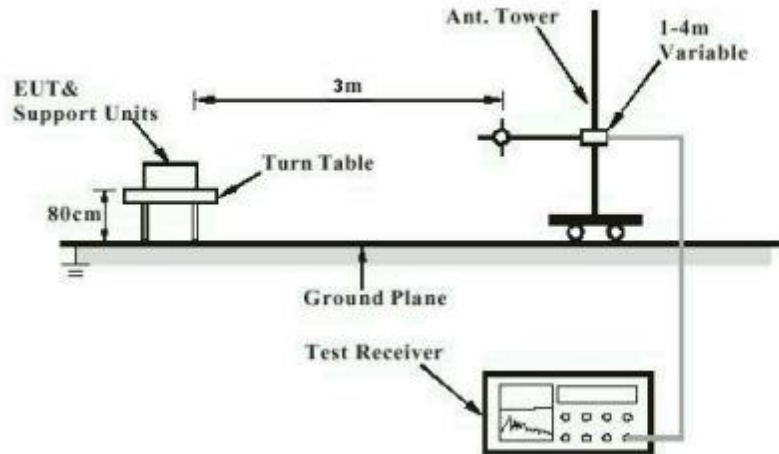


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


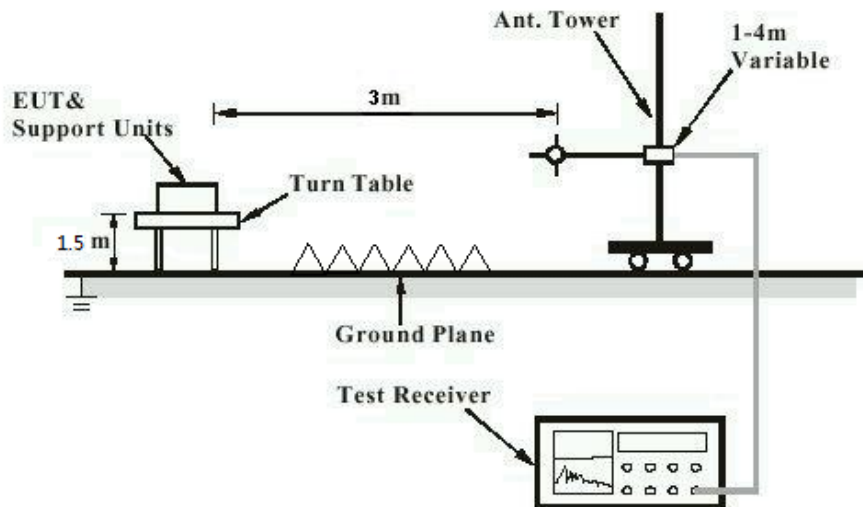


Diagram of Measurement Configuration for Conducted Transmitter Measurement

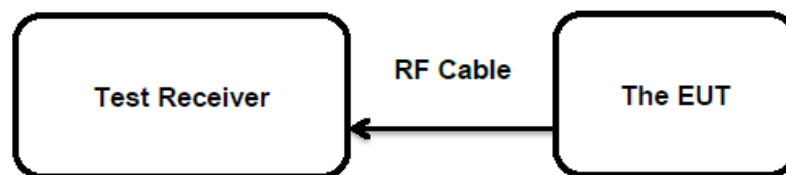

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

RESULT:

Pass

**Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203  
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has integral antennas with a unique connector, which is designed with permanent attachment and no consideration of replacement. The maximum antenna gain is 3.9 dBi.

Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

### 5.1.2 Maximum Conducted Output Power

**RESULT:**
**Pass**
**Test Specification**

Test standard : FCC Part 15.247(b)(3)  
 Basic standard : ANSI C63.10: 2013  
 Limits : 1.0 Watts  
 Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-04-13  
 Input voltage : DC 5.0V  
 Operation mode : A  
 Test channel : Low / Middle / High  
 Ambient temperature : 24.6 °C  
 Relative humidity : 55 %  
 Atmospheric pressure : 101 kPa

**Table 6: Test Result of Maximum Peak Output Power, Wi-Fi 802.11 b/g/n**

Test Mode	Data Rate	Test Channel (MHz)	Maximum Peak output power				Limit (W)
			SISO Ant 1# (dBm)	SISO Ant 2# (dBm)	MIMO Sum (Ant1#+ Ant 2#)		
					(dBm)	(W)	
802.11b	1 Mbps	2412	17.48	17.29	/	/	< 1.0
		2437	19.52	19.59	/	/	
		2462	17.81	17.77	/	/	
802.11g	6 Mbps	2412	21.45	22.33	/	/	
		2437	24.38	24.02	/	/	
		2462	21.14	20.74	/	/	
802.11n (HT20)	MCS0	2412	22.6	23.05	25.84	0.3837	
		2437	24.59	24.01	27.32	0.5395	
		2462	21.25	20.32	23.82	0.2410	
802.11n (HT40)	MCS0	2422	21.67	20.99	24.35	0.2723	
		2437	24.76	23.55	27.21	0.5260	
		2452	21.02	20.23	23.65	0.2317	
<b>Maximum Measured Value</b>			0.5395 W				

Note:

- 1) The cable loss is taken into account in results.
- 2) e.i.r.p.=P<sub>(Peak power)</sub>+ G, which is far below the 4 W

### 5.1.3 Conducted Power Spectral Density

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(e)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-04-13
Input voltage	: DC 5.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

### 5.1.4 6dB Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(2)
Basic standard	:	ANSI C63.10: 2013
Limits	:	> 500 KHz
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2022-03-25~2022-04-05
Input voltage	:	DC 5.0V
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	24.6 °C
Relative humidity	:	55 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

### 5.1.5 99% Bandwidth

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(a)  
Basic standard : ANSI C63.10: 2013  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2022-03-25~2022-04-05  
Input voltage : DC 5.0V  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 24.6 °C  
Relative humidity : 55 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

## 5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: If the tested output power based on peak test: At least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.  If the tested output power based on RMS averaging over a time interval: At least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2022-03-25~2022-04-05
Input voltage	: DC 5.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 24.6 °C
Relative humidity	: 55 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.



## 5.1.7 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d) RSS-Gen Table 5
Kind of test site	: 3m Semi-anechoic Chamber

**Test Setup**

Date of testing	: 2022-04-10~2022-04-13
Input voltage	: DC 5.0V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

As for Co-location with Bluetooth, it verified that there was no additional emission found and no need to report it.

For the measurement records, refer to the appendix B.

## 5.1.8 AC Conducted Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.207(a) RSS-GEN clause 8.8
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.207(a)
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2022-03-30
Input voltage	:	Via PC USB port
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B .  
All modes tested, only the worst-case reported.

## 6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT .....	7
Table 3: Test environments .....	9
Table 4: Test channel and frequency.....	9
Table 5: Auxiliary Equipment Used during Test .....	9
Table 6: Test Result of Maximum Peak Output Power, Wi-Fi 802.11 b/g/n.....	12


## Appendix B: Test Results of Wi-Fi 802.11 b/g/n

<b>APPENDIX B: TEST RESULTS OF WI-FI 802.11 B/G/N .....</b>	<b>1</b>
<b>APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY .....</b>	<b>2</b>
<b>APPENDIX B.2: TEST RESULTS OF 6DB BANDWIDTH.....</b>	<b>13</b>
<b>APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH.....</b>	<b>22</b>
<b>APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH.....</b>	<b>27</b>
<b>APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS .....</b>	<b>43</b>
<b>30MHz - 1GHz (Worst case) .....</b>	<b>43</b>
<b>Above 1GHz.....</b>	<b>45</b>
<b>APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS .....</b>	<b>69</b>
<b>APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSIONS OF AC MAINS .....</b>	<b>85</b>


### Appendix B.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-1.98	≤8.00	PASS
	Ant2	2412	-1.74	≤8.00	PASS
	Ant1	2437	0.76	≤8.00	PASS
	Ant2	2437	0.95	≤8.00	PASS
	Ant1	2462	-1.72	≤8.00	PASS
	Ant2	2462	-1.68	≤8.00	PASS


11B Ant1 2412

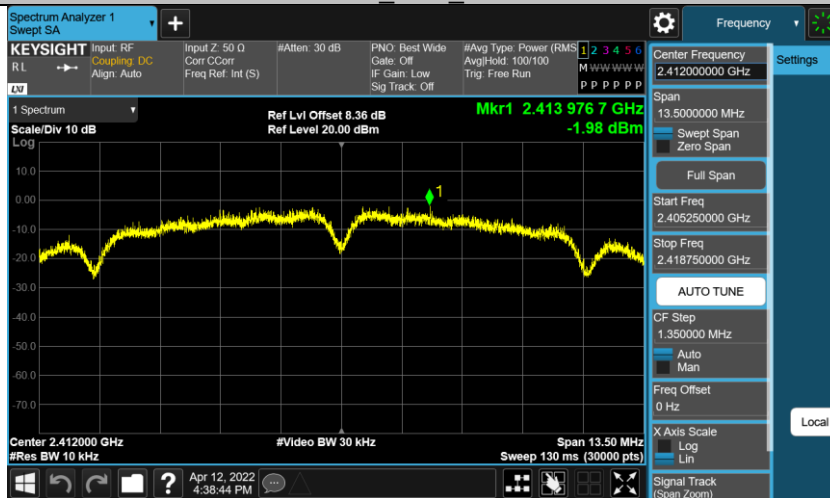


11B Ant2 2412

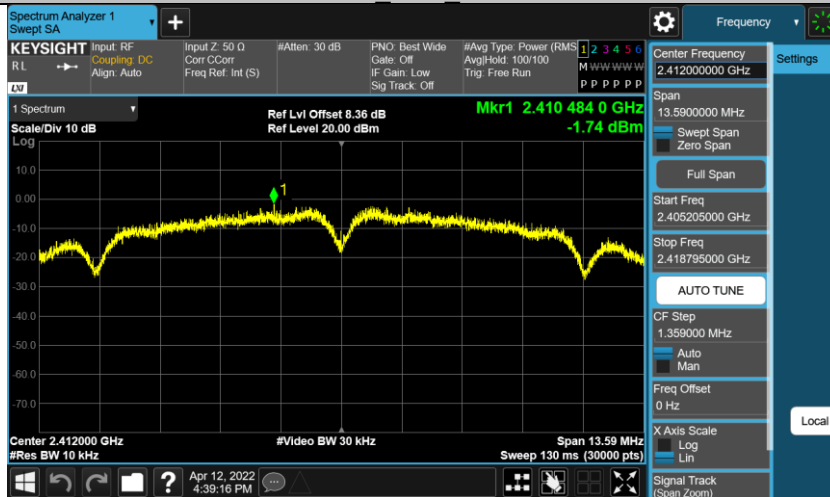


11B Ant1 2437

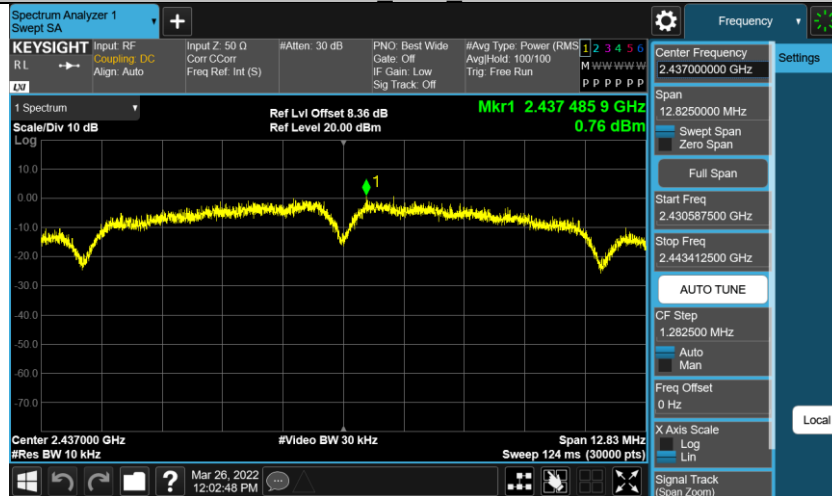


11B Ant2 2437

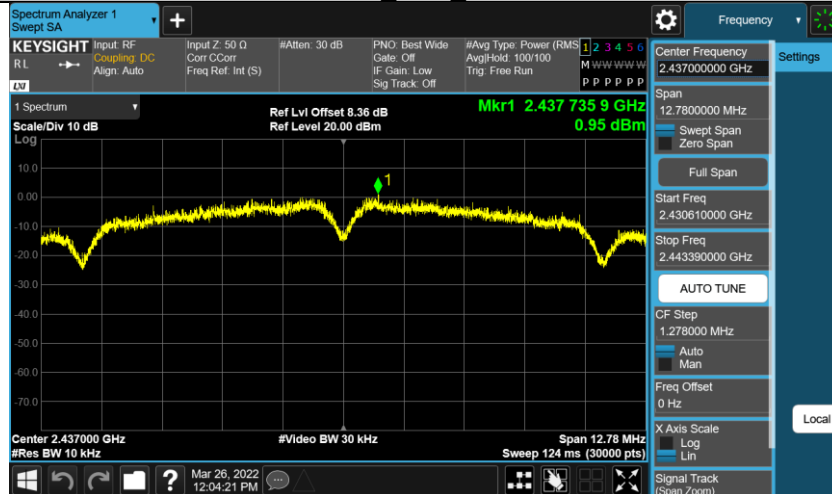

11B Ant1 2462

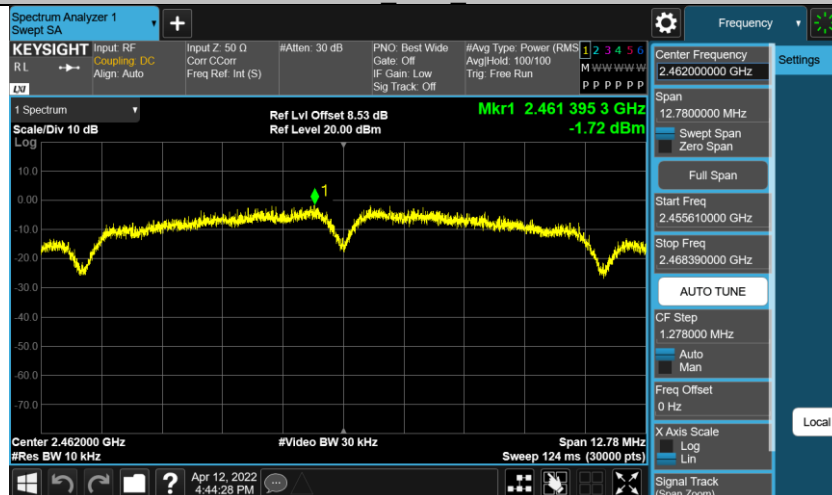


11B\_Ant2\_2462

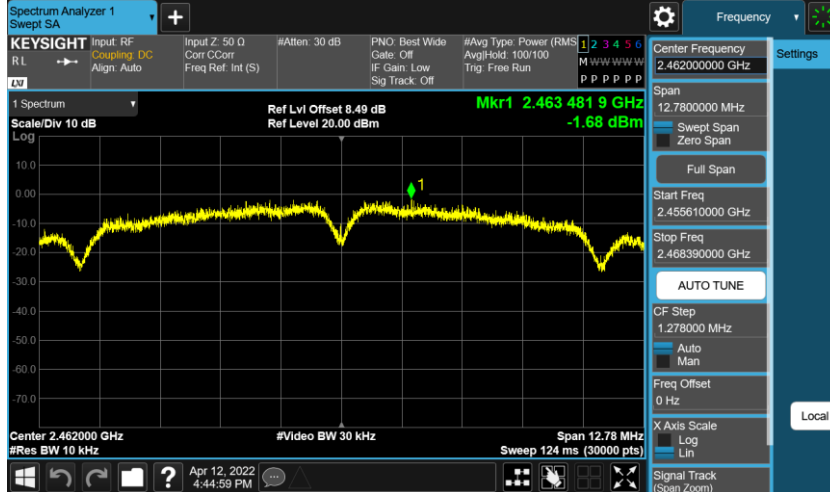


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11G	Ant1	2412	-2.48	≤8.00	PASS
	Ant2	2412	-3.55	≤8.00	PASS
	Ant1	2437	-0.76	≤8.00	PASS
	Ant2	2437	-1.13	≤8.00	PASS
	Ant1	2462	-5.5	≤8.00	PASS
	Ant2	2462	-4.52	≤8.00	PASS

11G Ant1 2412

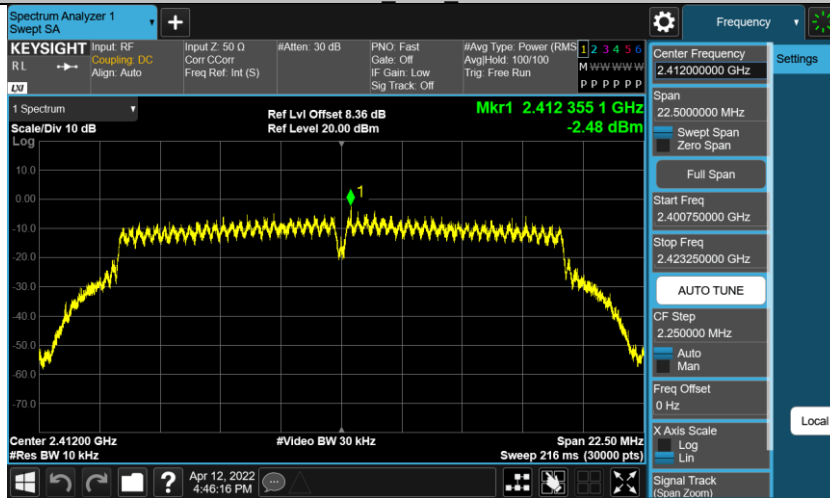


11G Ant2 2412

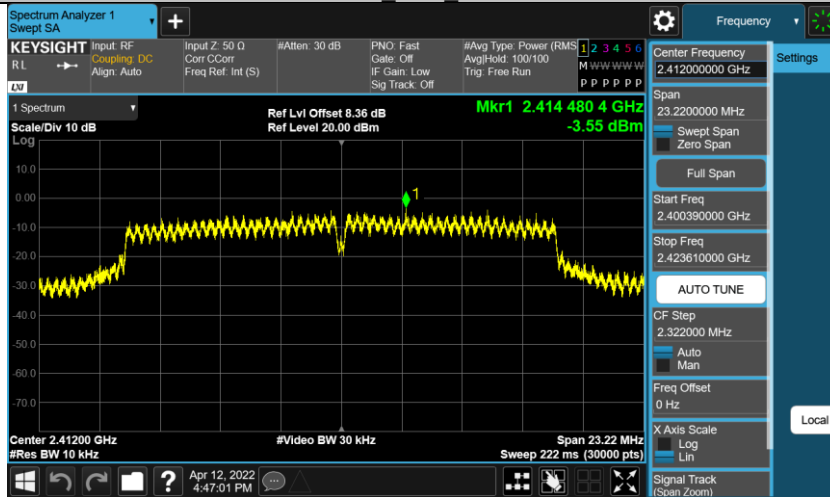





11G Ant1 2437

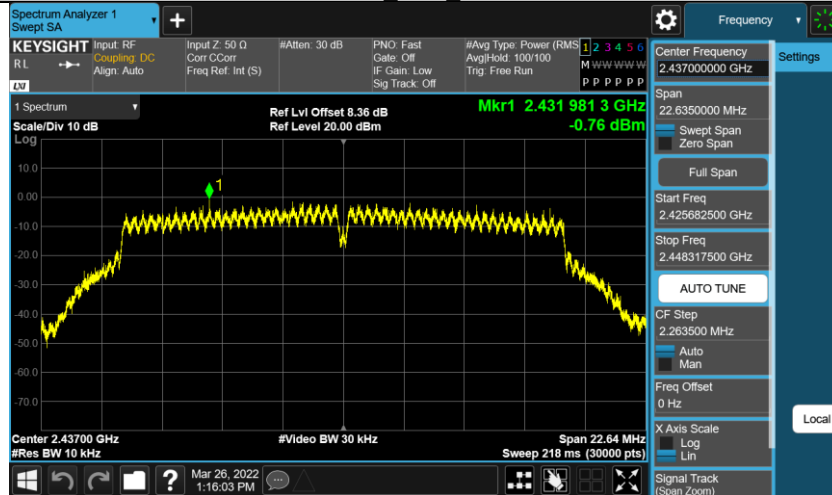


11G Ant2 2437

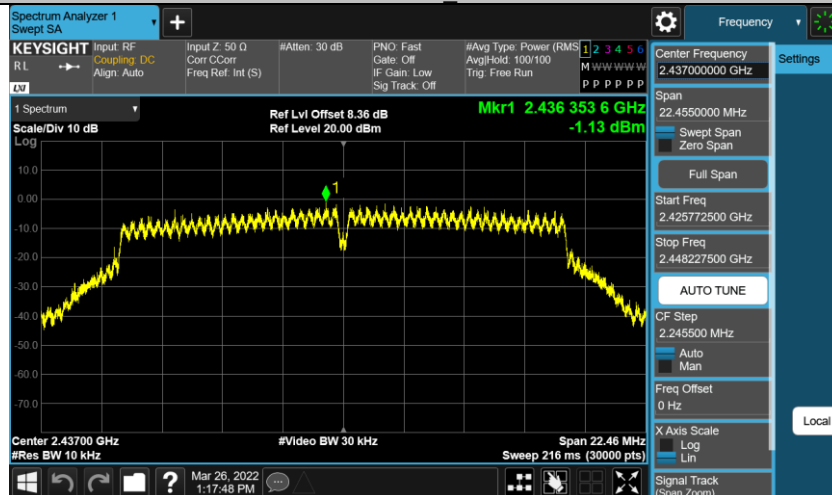

11G- Ant1 2462

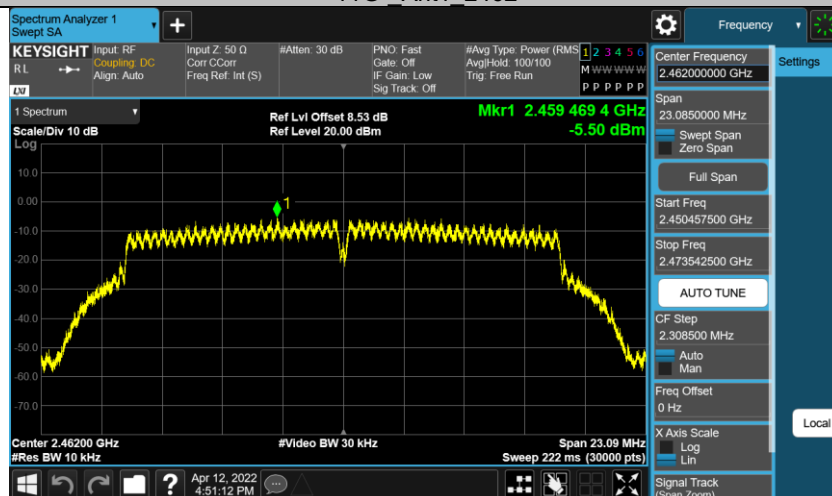

11G Ant2 2462

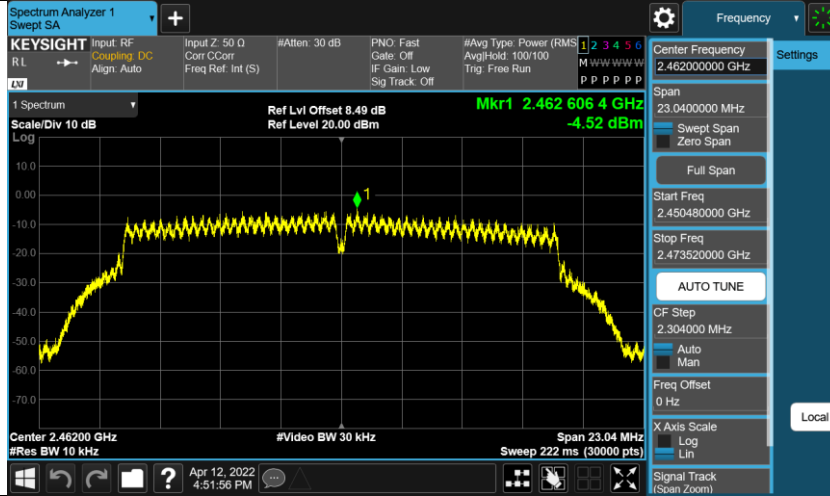


TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11N20MIMO	Ant1	2412	-2.66	≤8.00	PASS
	Ant2	2412	-3.15	≤8.00	PASS
	total	2412	0.11	≤7.10	PASS
	Ant1	2437	0.05	≤8.00	PASS
	Ant2	2437	-0.69	≤8.00	PASS
	total	2437	2.71	≤7.10	PASS
	Ant1	2462	-3.26	≤8.00	PASS
	Ant2	2462	-5.7	≤8.00	PASS
	total	2462	-1.30	≤7.10	PASS
11N40MIMO	Ant1	2422	-7.04	≤8.00	PASS
	Ant2	2422	-6.2	≤8.00	PASS
	total	2422	-3.59	≤7.10	PASS
	Ant1	2437	-3.63	≤8.00	PASS
	Ant2	2437	-4.03	≤8.00	PASS
	total	2437	-0.82	≤7.10	PASS
	Ant1	2452	-6.68	≤8.00	PASS
	Ant2	2452	-7.43	≤8.00	PASS
	total	2452	-4.03	≤7.10	PASS


As per KDB662911D01 section F) f) (ii), the direction gain for power spectral density (PSD) MIMO mode is 6.9dBi\*, thus PSD limit should be 7.1dBm based on it.

\* The directional gain is calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain\*


11N20MIMO\_Ant1\_2412

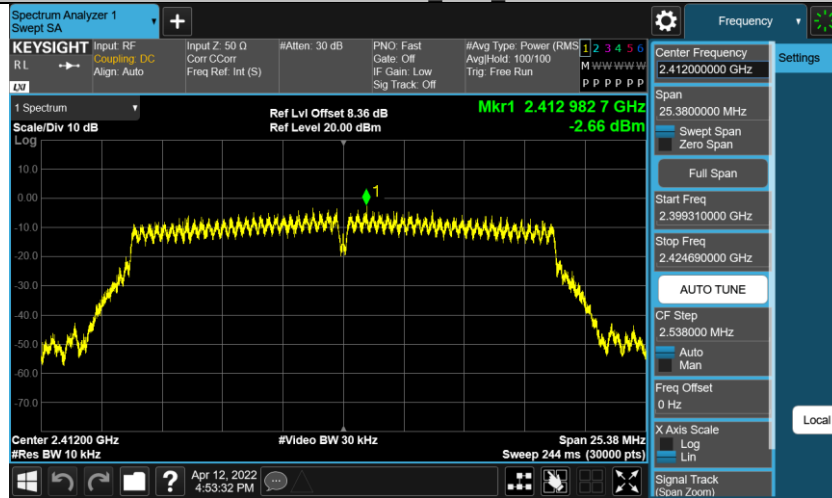


11N20MIMO\_Ant2\_2412

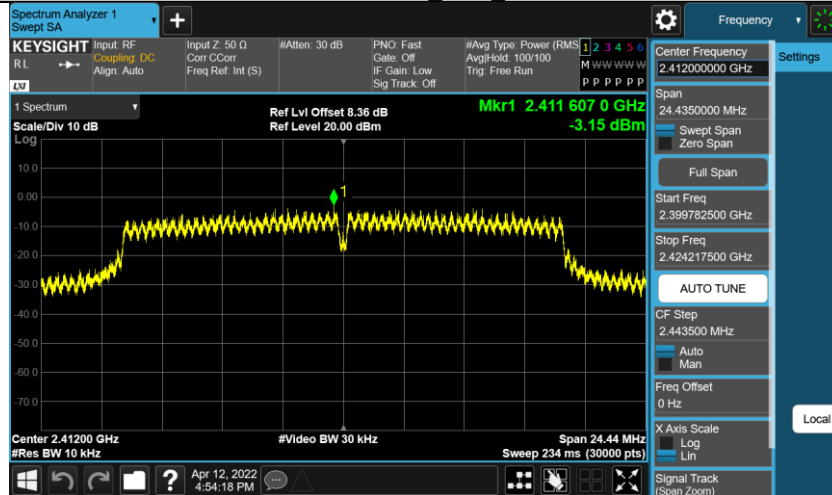


11N20MIMO\_Ant1\_2437

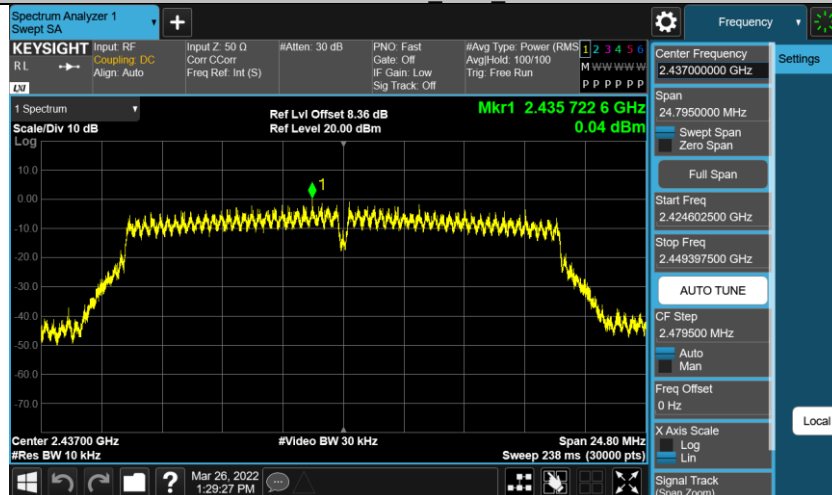


11N20MIMO\_Ant2\_2437

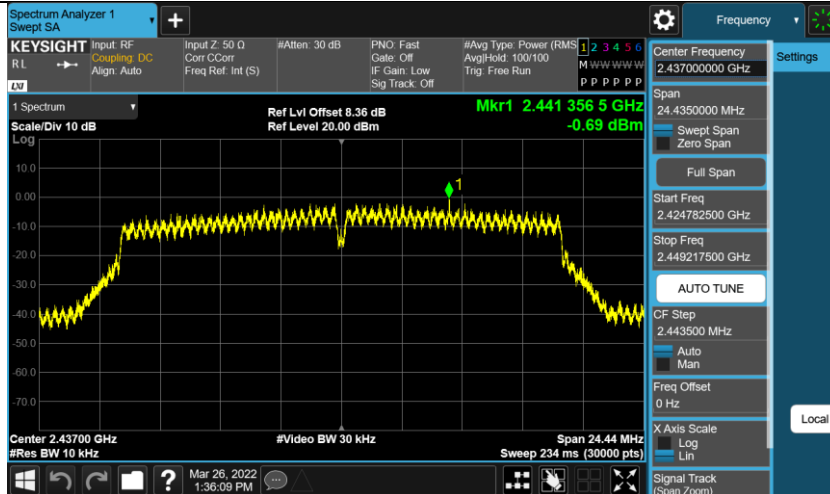

11N20MIMO Ant1 2462

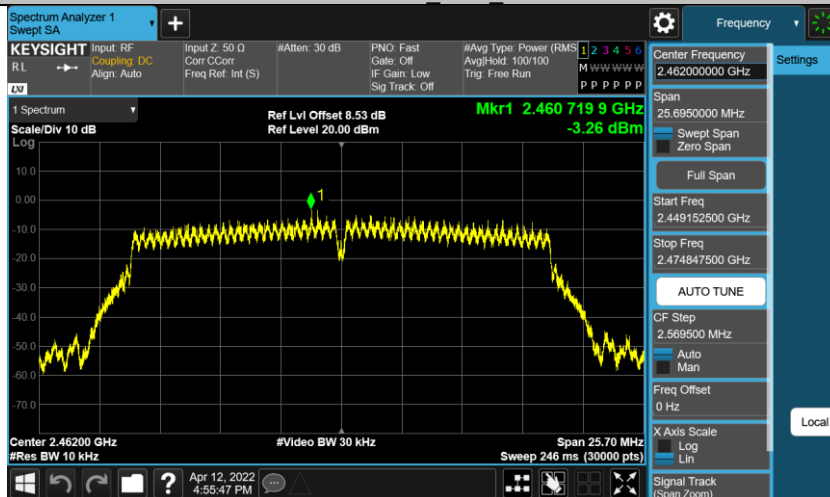

11N20MIMO Ant2 2462

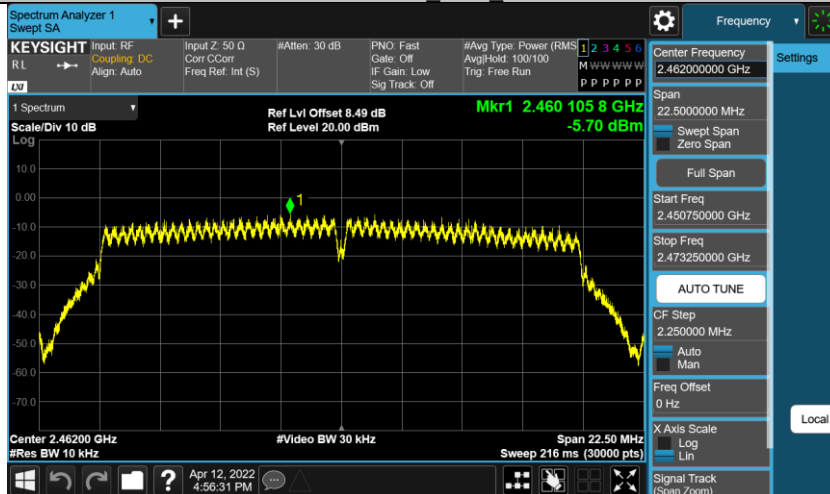

11N40MIMO Ant1 2422

