

Sichuan AI-Link Technology Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.407 & ISED RSS-247 RF report

Model:

WF-R12C-UWD2L, WF-R12C-UWD3L

REPORT NUMBER:

210401011SHA-002

ISSUE DATE:

May 20, 2021

DOCUMENT CONTROL NUMBER:

TTRF15.407_v1 © 2018 Intertek



Applicant: Sichuan AI-Link Technology Co., Ltd.
Anzhou, Industrial park, Mianyang, Sichuan, China

Manufacturer: Sichuan AI-Link Technology Co., Ltd.
Anzhou, Industrial park, Mianyang, Sichuan, China

Product Name: WIFI Module

Type/Model: WF-R12C-UWD2L, WF-R12C-UWD3L

FCC ID: 2AOKI-WFR12CUWD2

IC: 23460-WFR12CUWD2

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2019): Radio Frequency Devices (Subpart C)


ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (March 2019) Amendment 1: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

REVIEWED BY:



Project Engineer
Dylan Tang



Reviewer
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	6
1.3 ANTENNA INFORMATION.....	7
1.4 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST.....	9
2.3 TEST SOFTWARE LIST	11
2.4 TEST PERIPHERALS LIST	11
2.5 TEST ENVIRONMENT CONDITION:.....	11
2.6 INSTRUMENT LIST	12
2.7 MEASUREMENT UNCERTAINTY	14
3 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	15
3.1 LIMIT	15
3.2 MEASUREMENT PROCEDURE	16
3.3 TEST CONFIGURATION	16
3.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	16
4 POWER SPECTRUM DENSITY	19
4.1 LIMIT	19
4.2 MEASUREMENT PROCEDURE	20
4.3 TEST CONFIGURATION	21
4.4 TEST RESULTS OF POWER SPECTRUM DENSITY	21
5 RADIATED EMISSIONS	24
5.1 LIMIT	24
5.2 MEASUREMENT PROCEDURE	25
5.3 TEST CONFIGURATION	26
5.4 TEST RESULTS OF RADIATED EMISSIONS	28
6 ANTENNA REQUIREMENT	39

Revision History

Report No.	Version	Description	Issued Date
210401011SHA-002	Rev. 01	C2PC	May 20, 2021

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
26 dB Bandwidth & 99% Occupied Bandwidth	15.407(a)	RSS-247 Issue 2 Clause 6	Verified
Minimum 6dB Bandwidth	15.407(e)	RSS-247 Issue 2 Clause 6	Verified
Maximum Conducted Output Power	15.407(a)	RSS-247 Issue 2 Clause 6	Verified
Power spectral density	15.407(a)	RSS-247 Issue 2 Clause 6	Verified
Radiated emission	15.407(b) 15.205 15.209	RSS-247 Issue 2 Clause 6 RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.407(b) 15.207	RSS-Gen Issue 5 Clause 8.8	Verified
Frequency Stability	15.407(g)	RSS-Gen Issue 5 Clause 8.11	Verified
Antenna requirement	15.203	-	Verified

Notes:

1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

4: Verified= This report is based on the previous report that changed the Antenna. For specific changes, please refer to the difference declaration. After the C2PC evaluation, all technical data is referred to original report.

TEST REPORT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	WIFI Module
Type/Model:	WF-R12C-UWD2L, WF-R12C-UWD3L
Description of EUT:	The EUT is a WIFI module which supports 802.11a/b/g/n/ac mode, there have two models and they are same except the connector. We choose WF-R12C-UWD2L to test as representative.
Rating:	DC 3.3V
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Product Marketing Name:	WF-R12C-UWD2L, WF-R12C-UWD3L
Hardware Version:	0457-3
Sample received date:	July 29, 2020
Date of test:	July 29, 2020 ~ October 22, 2020

1.2 Technical Specification

Frequency Range:	5150 ~ 5250MHz 5250 ~ 5350MHz 5470 ~ 5725MHz 5725 ~ 5850MHz
Support Standards:	802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80)
Type of Modulation:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Number:	For 5150 ~ 5250MHz band: Channel 36 - 48 For 5250 ~ 5350MHz Band: Channel 52 - 64 For 5470 ~ 5725MHz Band: Channel 100 - 140 For 5725 ~ 5850MHz band: Channel 149 - 165

TEST REPORT

1.3 Antenna information

Antenna information:			
No.	Antenna Type	Gain	Note
0	PIFA Antenna	3.68dBi	On the board
1	PIFA Antenna	3.37dBi	External type
2	PIFA Antenna	2.57dBi	External type

Note: After technology evaluation, the max gain antenna 1 was choose as external antenna for all test.

Mode	Tx/Rx Function	Beamforming function	CDD function	Directional gain (dBi)
802.11a	1Tx/1Rx	NO	NO	-
802.11n(HT20) 802.11ac(VHT20)	2Tx/2Rx	NO	NO	3.39
802.11n(HT40) 802.11ac(VHT40)	2Tx/2Rx	NO	NO	3.39
802.11ac(VHT80)	2Tx/2Rx	NO	NO	3.39

Note: For 802.11a mode, it only supports 1TX.
 For 802.11n and 802.11ac modes, it can support 2TX, all the two transmit signals are completely uncorrelated with each other, so the directional gain = $10 \log ((10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}) / N_{ANT})$

TEST REPORT

1.4 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

Name:	Shenzhen UnionTrust Quality and Technology Co., Ltd.
Address:	Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109
Telephone:	+86 (0) 755 2823 0888
Telefax:	+86 (0) 755 2823 0886

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L9069
	FCC Accredited Lab Designation Number: CN1194
	IC Registration Lab CAB identifier.: CN0032
	A2LA Accreditation Lab Certificate Number: 4312.01

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2019)
 ANSI C63.10 (2013)
 RSS-247 Issue 2 (February 2017)
 RSS-Gen Issue 5 (March 2019) Amendment 1
 KDB 789033 D02 v02r01
 KDB 662911 D01 (v02r01)

2.2 Mode of operation during the test

There have two models EUT, the Radiation emission was chosen for pretest, after this pre-scan, we find the worst-case model is “WF-R12C-UWD2L”, and we choose this model for all test as representative.

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
REALTEK 11ac 8822CU USB WLAN NIC Massproduction Kit	REALTEK	-	Client

The lowest, middle and highest channel for the following modes were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
5150 - 5250	802.11a	5180	5200	5240
	802.11n(HT20)	5180	5200	5240
	802.11n(HT40)	5190	/	5230
	802.11ac(VHT80)	5210	/	/
5250 - 5350	802.11a	5260	5300	5320
	802.11n(HT20)	5260	5300	5320
	802.11n(HT40)	5270	/	5310
	802.11ac(VHT80)	5290	/	/
5470 - 5725	802.11a	5500	5580	5700
	802.11n(HT20)	5500	5580	5700
	802.11n(HT40)	5510	5590	5670
	802.11ac(VHT80)	5530	/	5610
5725 - 5850	802.11a	5745	5785	5825
	802.11n(HT20)	5745	5785	5825
	802.11n(HT40)	5755	/	5795
	802.11ac(VHT80)	5775	/	/

TEST REPORT

Note: 802.11ac(VHT20) is similar as 802.11n(HT20), and 802.11n(HT20) is the worse after checked, so only 802.11n(HT20) was chosen to do the tests. It is the same to 802.11ac(VHT40) and 802.11n(HT40).

Data rate and Power setting:

The pre-scan for the conducted power with all data rates in each modulation and band was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rata as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
5150 - 5250	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac(VHT80)	MCS8
5250 - 5350	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac(VHT80)	MCS8
5500 - 5725	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac(VHT80)	MCS8
5725 - 5850	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac(VHT80)	MCS8

TEST REPORT

2.3 Test software list

Test Items	Software	Manufacturer	Version
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	-
2	RF cable	/	0.2m length; 0.5dB loss

2.5 Test environment condition:

Test items	Temperature	Humidity
26 dB Bandwidth & 99% Occupied Bandwidth	19°C	53% RH
Minimum 6dB Bandwidth		
Maximum Conducted Output Power		
Power spectral density		
Radiated Emissions in restricted frequency bands	25.2°C	52%RH
Power line conducted emission	20°C	53% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2021-07-14
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2021-11-09
Radiated Emission					
Used	Equipment	Manufacturer	Type	Serial Number	Due date
<input checked="" type="checkbox"/>	3m Chamber & Accessory Equipment	ETS-LINDGREN	3m	N/A	2024-01-21
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	2021-11-17
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	2021-11-13
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	2021-11-13
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	2021-11-13
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	2021-11-09
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	2021-05-29
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	118385	00201874	2021-11-09
<input checked="" type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	2021-06-18
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	118384	00202652	2021-11-13
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2022-03-15
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030B	EC 6078	2021-06-10
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2022-03-15
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2022-03-15
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2022-03-15
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2021-09-16
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2021-12-09
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	Ec6209	2021-12-30
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	Ec6172	2021-08-21
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	Ec6171	2021-08-21
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2022-03-04
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2022-03-02

TEST REPORT

<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 4620	2021-09-09
-------------------------------------	----------------	-----	--------------------	---------	------------

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.60\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 4.40\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Maximum conducted output power and e.i.r.p.

Test result: Pass

3.1 Limit

- For an outdoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W provided the maximum antenna gain does not exceed 6dBi.
The maximum e.i.r.p. at any elevation angle above 30 degrees from the horizon must not exceed 125mW (21 dBm).
- For an indoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.
- For fixed point-to-point access points operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W.
- For client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. (FCC Limit)
- For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in megahertz. (FCC limit)
- For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W. (FCC limit)
- For Frequency Band 5150-5250 MHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. (IC limit)
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz. (IC limit)
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. (IC limit)
- For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. (IC limit)

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


TEST REPORT

3.2 Measurement Procedure

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW ≥ 3 MHz.
- (iv) Number of points in sweep ≥ 2 × span / RBW. (This ensures that bin-to-bin spacing is ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

3.3 Test Configuration



3.4 Test Results of Maximum conducted output power and e.i.r.p.

AVGSA Output Power									
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Total Power (dBm)	FCC Power Limit (dBm)	EIRP (dBm)	IC EIRP Limit (dBm)	Result

TEST REPORT

802.11a	5180	Ant0	0.00	16.45	16.45	24	20.22	22	Pass
802.11a	5260	Ant0	0.00	17.55	17.55	24	21.32	23	Pass
802.11a	5500	Ant0	0.00	14.96	14.96	24	18.73	23	Pass
802.11a	5745	Ant0	0.00	13.29	13.29	30	17.06	30	Pass
802.11n (HT20)	5180	Ant0	0.00	13.90	16.97	24	20.74	22	Pass
802.11n (HT20)	5180	Ant1	0.00	14.02					
802.11n (nT20)	5200	Ant0	0.00	13.87	16.74	24	20.51	22	Pass
802.11n (nT20)	5200	Ant1	0.00	13.59					
802.11n (HT20)	5240	Ant0	0.00	13.98	16.93	24	20.70	22	Pass
802.11n (HT20)	5240	Ant1	0.00	13.85					
802.11n (HT20)	5260	Ant0	0.00	15.21	18.05	24	21.82	23	Pass
802.11n (HT20)	5260	Ant1	0.00	14.87					
802.11n (HT20)	5300	Ant0	0.00	14.98	17.65	24	21.42	23	Pass
802.11n (HT20)	5300	Ant1	0.00	14.27					
802.11n (HT20)	5320	Ant0	0.00	13.83	17.07	24	20.84	23	Pass
802.11n (HT20)	5320	Ant1	0.00	14.27					
802.11n (HT20)	5500	Ant0	0.00	13.76	17.03	24	20.80	23	Pass
802.11n (HT20)	5500	Ant1	0.00	14.20					
802.11n (HT20)	5600	Ant0	0.00	14.06	17.18	24	20.95	23	Pass
802.11n (HT20)	5600	Ant1	0.00	14.27					
802.11n (HT20)	5700	Ant0	0.00	13.79	16.92	24	20.69	24	Pass
802.11n (HT20)	5700	Ant1	0.00	13.85					
802.11n (HT20)	5825	Ant0	0.00	12.41	15.27	30	19.04	30	Pass
802.11n (HT20)	5825	Ant1	0.00	12.10					
802.11n (HT40)	5190	Ant0	0.00	12.41	15.27	24	19.04	23	Pass
802.11n (HT40)	5190	Ant1	0.00	12.25					
802.11n (HT40)	5230	Ant0	0.00	12.75	15.41	24	19.18	23	Pass
802.11n (HT40)	5230	Ant1	0.00	12.02					

TEST REPORT

802.11n (HT40)	5270	Ant0	0.00	14.85	17.63	24	21.40	24	Pass
802.11n (HT40)	5270	Ant1	0.00	14.38					
802.11n (HT40)	5310	Ant0	0.00	14.08	16.98	24	20.75	24	Pass
802.11n (HT40)	5310	Ant1	0.00	13.85					
802.11n (HT40)	5510	Ant0	0.00	13.02	16.00	24	19.77	24	Pass
802.11n (HT40)	5510	Ant1	0.00	12.96					
802.11n (HT40)	5590	Ant0	0.00	13.26	16.41	24	20.18	24	Pass
802.11n (HT40)	5590	Ant1	0.00	13.54					
802.11n (HT40)	5670	Ant0	0.00	13.55	16.02	24	19.79	24	Pass
802.11n (HT40)	5670	Ant1	0.00	13.02					
802.11n (HT40)	5755	Ant0	0.00	12.65	15.42	30	19.19	30	Pass
802.11n (HT40)	5755	Ant1	0.00	12.18					
802.11n (HT40)	5795	Ant0	0.00	12.94	16.09	30	19.86	30	Pass
802.11n (HT40)	5795	Ant1	0.00	13.21					
802.11ac (VHT80)	5210	Ant0	0.00	12.08	14.98	24	18.75	23	Pass
802.11ac (VHT80)	5210	Ant1	0.00	11.85					
802.11ac (VHT80)	5290	Ant0	0.00	14.06	16.97	24	20.74	24	Pass
802.11ac (VHT80)	5290	Ant1	0.00	13.85					
802.11ac (VHT80)	5530	Ant0	0.00	12.57	15.35	24	19.12	24	Pass
802.11ac (VHT80)	5530	Ant1	0.00	12.10					
802.11ac (VHT80)	5610	Ant0	0.00	13.17	15.98	24	19.75	24	Pass
802.11ac (VHT80)	5610	Ant1	0.00	12.75					
802.11ac (VHT80)	5775	Ant0	0.00	11.95	14.78	30	18.55	30	Pass
802.11ac (VHT80)	5775	Ant1	0.00	11.58					

4 Power spectrum density

Test result: Pass

4.1 Limit

- For an outdoor access point operating in the band 5.15-5.25GHz, the maximum power spectral density shall not exceed 17dBm in any 1 megahertz band.
- For an indoor access point operating in the band 5.15-5.25GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.
- For client devices in the 5.15-5.25GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. (FCC limit)
- For the 5.25-5.35 GHz and 5.47-5.725GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. (FCC limit)
- For the band 5.725-5.85GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. (FCC limit)
- For the 5.15-5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. (IC limit)
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. (IC limit)
- For the 5.725-5.85GHz band, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. (IC limit)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the less of original and original + (6 - antenna gain - beamforming gain).

TEST REPORT

4.2 Measurement Procedure


The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15 5.25 GHz, 5.25 5.35 GHz, and 5.47 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
 - b) Set $VBW \geq 3 RBW$.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for steps 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.

TEST REPORT

4.3 Test Configuration

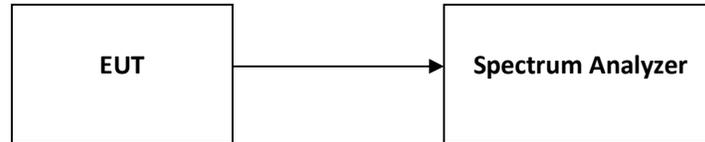

4.4 Test Results of Power spectrum density

AVGSA Power Spectral Density								
Mode	Test Frequency (MHz)	Ant	Total PSD [dBm/MHz]	FCC PSD [dBm/MHz]	EIRP PSD [dBm/MHz]	Limit [dBm/MHz]	Result	
802.11a	5180	Ant0	1.339	10	5.109	11	Pass	
802.11a	5260	Ant0	1.821	10	5.591	11	Pass	
802.11a	5500	Ant0	1.949	10	5.719	11	Pass	
802.11n (HT20)	5180	Ant0	-2.015	1.06	10	4.83	11	Pass
802.11n (HT20)	5180	Ant1	-1.895					
802.11n (nT20)	5200	Ant0	-1.655	1.54	10	5.31	11	Pass
802.11n (nT20)	5200	Ant1	-1.286					
802.11n (HT20)	5240	Ant0	1.556	4.40	10	8.17	11	Pass
802.11n (HT20)	5240	Ant1	1.220					
802.11n (HT20)	5260	Ant0	3.985	6.61	10	10.38	11	Pass
802.11n (HT20)	5260	Ant1	3.167					
802.11n (HT20)	5300	Ant0	3.667	6.37	10	10.14	11	Pass
802.11n (HT20)	5300	Ant1	3.019					
802.11n (HT20)	5320	Ant0	1.985	4.860	10	8.63	11	Pass
802.11n (HT20)	5320	Ant1	1.704					
802.11n (HT20)	5500	Ant0	1.965	4.87	10	8.64	11	Pass
802.11n (HT20)	5500	Ant1	1.755					
802.11n (HT20)	5600	Ant0	1.995	4.86	10	8.63	11	Pass
802.11n (HT20)	5600	Ant1	1.545					

Total Quality. Assured.

TEST REPORT

802.11n (HT20)	5700	Ant0	2.001	4.84	10	8.61	11	Pass
802.11n (HT20)	5700	Ant1	1.654					
802.11n (HT40)	5190	Ant0	-2.934	0.04	10	3.81	11	Pass
802.11n (HT40)	5190	Ant1	-3.015					
802.11n (HT40)	5230	Ant0	-4.675	-1.80	10	1.97	11	Pass
802.11n (HT40)	5230	Ant1	-4.955					
802.11n (HT40)	5270	Ant0	-0.470	2.30	11	6.07	10	Pass
802.11n (HT40)	5270	Ant1	-0.955					
802.11n (HT40)	5310	Ant0	-0.469	2.26	11	6.03	10	Pass
802.11n (HT40)	5310	Ant1	-1.059					
802.11n (HT40)	5510	Ant0	-1.340	1.41	11	5.18	10	Pass
802.11n (HT40)	5510	Ant1	-1.867					
802.11n (HT40)	5590	Ant0	-0.056	2.76	11	6.53	10	Pass
802.11n (HT40)	5590	Ant1	-0.456					
802.11n (HT40)	5670	Ant0	-0.102	2.66	11	6.43	10	Pass
802.11n (HT40)	5670	Ant1	-0.622					
802.11a c (VHT80)	5210	Ant0	-6.207	-3.53	11	0.24	10	Pass
802.11a c (VHT80)	5210	Ant1	-6.903					
802.11a c (VHT80)	5290	Ant0	-3.214	-0.420	11	3.35	10	Pass
802.11a c (VHT80)	5290	Ant1	-3.655					
802.11a c (VHT80)	5530	Ant0	-5.377	-2.65	11	1.12	10	Pass
802.11a c (VHT80)	5530	Ant1	-5.956					
802.11a c (VHT80)	5610	Ant0	-5.977	-3.20	11	0.57	10	Pass
802.11a c (VHT80)	5610	Ant1	-6.456					

TEST REPORT

AVGSA Power Spectral Density							
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Total PSD [dBm/500kHz]		PSD Limit [dBm/500kHz]	Result
802.11a	5745	Ant0	0.00	6.850		30	Pass
802.11n (HT20)	5825	Ant0	0.00	4.835	7.550	30	Pass
802.11n (HT20)	5825	Ant1	0.00	4.232			
802.11n (HT40)	5755	Ant0	0.00	3.202	5.950	30	Pass
802.11n (HT40)	5755	Ant1	0.00	2.654			
802.11n (HT40)	5795	Ant0	0.00	2.954	5.680	30	Pass
802.11n (HT40)	5795	Ant1	0.00	2.356			
802.11ac (VHT80)	5775	Ant0	0.00	-1.111	1.700	30	Pass
802.11ac (VHT80)	5775	Ant1	0.00	-1.535			

TEST REPORT

5 Radiated Emissions

Test result: Pass

5.1 Limit

The radiated emissions which fall in the restricted bands, and the radiated emissions below 1GHz, must comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

The radiated emissions which fall outside the restrict bands, should comply with the EIRP limit as below:

For transmitters operating in the 5.15 - 5.25 / 5.25 - 5.35 / 5.47 - 5.725GHz band:

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (3m) (dBμV/m)
<5150	-27	68.20
>5350		
<5470		
>5725		

For transmitters operating in the 5.725 - 5.85GHz band:

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (3m) (dBμV/m)
<5650	-27	68.20
5650 ~ 5700	-27 ~ 10	68.20 ~ 105.20
5700 ~ 5720	10 ~ 15.6	105.20 ~ 110.80
5720 ~ 5725	15.6 ~ 27	110.80 ~ 122.20
5850 ~ 5855	27 ~ 15.6	122.20 ~ 110.80
5855 ~ 5875	15.6 ~ 10	110.80 ~ 105.20
5875 ~ 5925	10 ~ -27	105.20 ~ 68.20
>5925	-27	68.20

TEST REPORT

5.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to peak or quasi-peak detect function and specified bandwidth with maximum hold mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to peak or quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for peak or quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz at frequency above 1GHz for peak detection above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

5.3 Test Configuration

For Radiated emission below 30MHz:

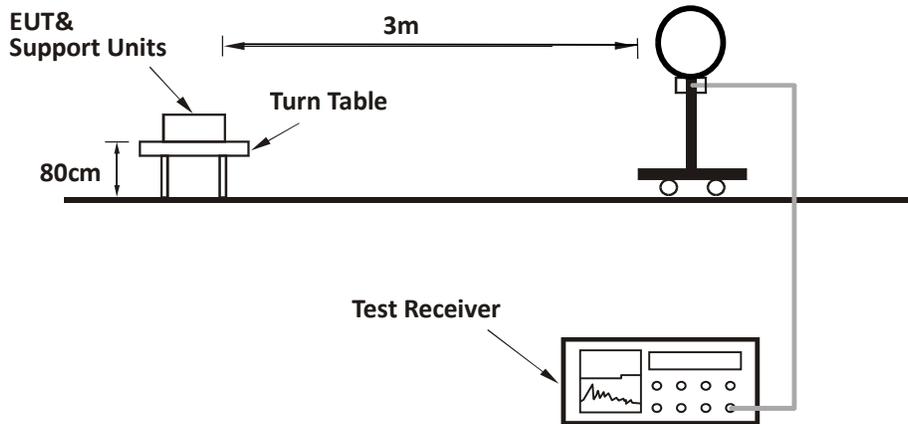


For Radiated emission 30MHz to 1GHz:

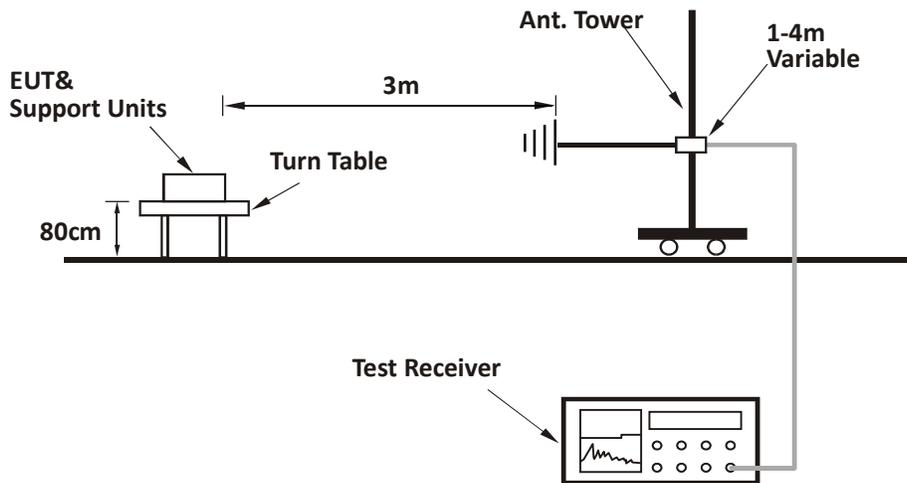

TEST REPORT

For Radiated emission above 1GHz:

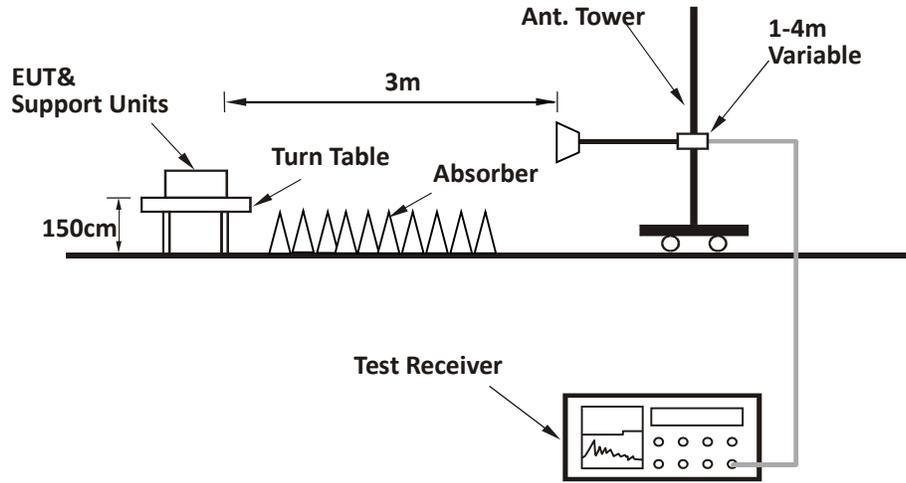


TEST REPORT


5.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Horizontal

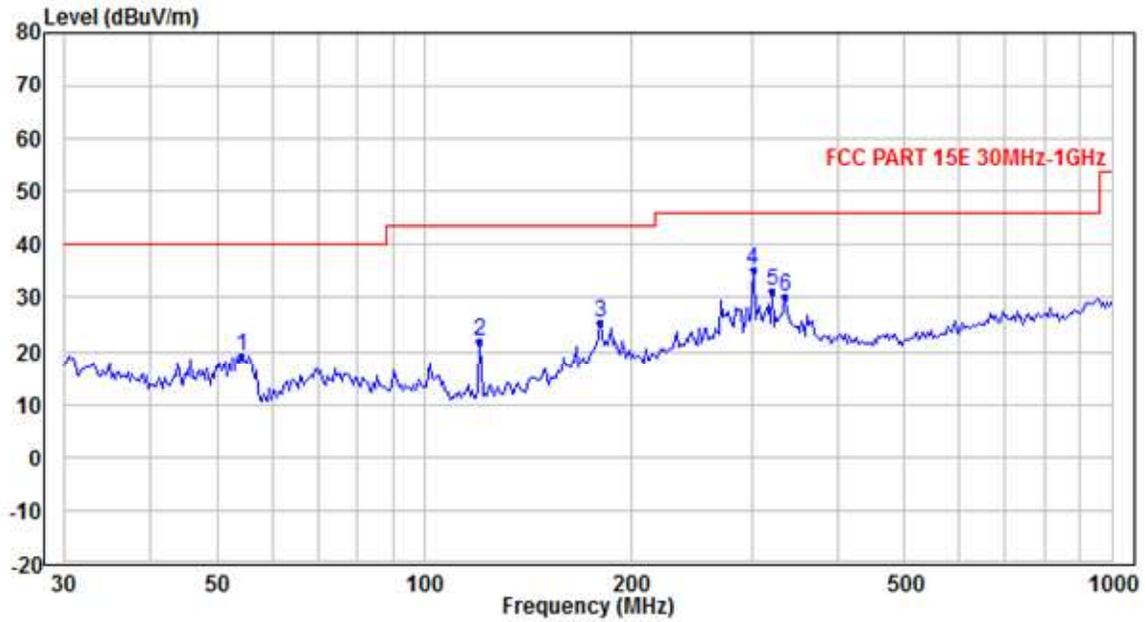

Vertical

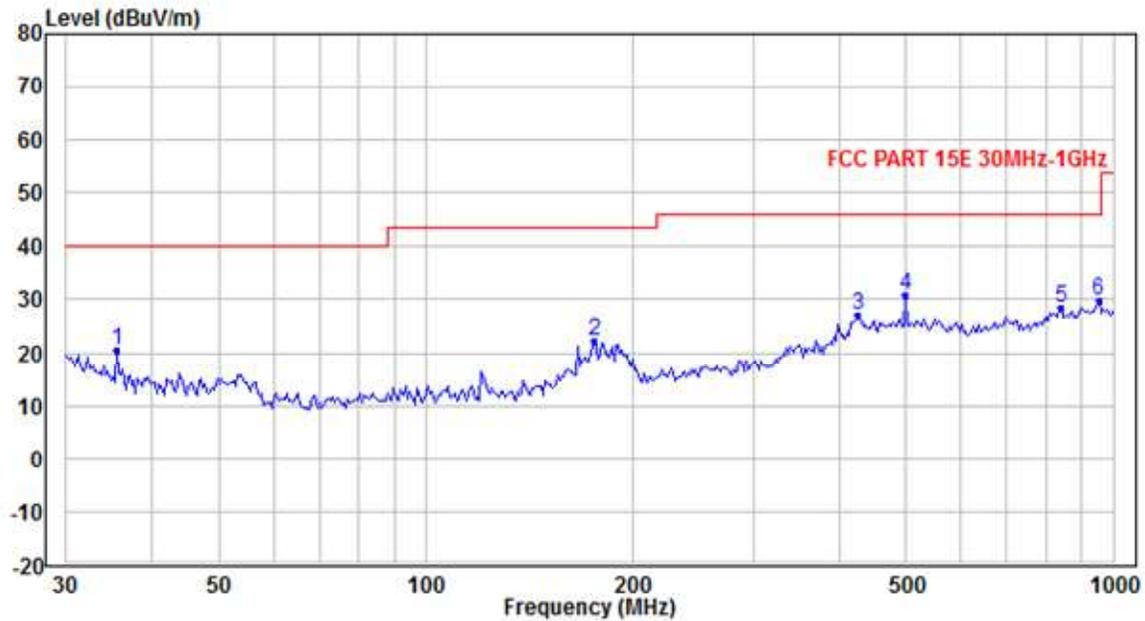

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	54.135	19.28	-14.90	40.00	20.72	PK
H	120.612	21.85	-13.09	43.50	21.65	PK
H	180.030	25.38	-10.76	43.50	18.12	PK
H	300.699	35.22	-6.63	46.00	10.78	PK
H	320.331	31.11	-6.09	46.00	14.89	PK
H	334.126	30.30	-5.56	46.00	15.70	PK
V	35.511	20.38	-8.88	40.00	19.62	PK
V	176.275	22.21	-11.04	43.50	21.29	PK
V	424.300	27.21	-3.07	46.00	18.79	PK
V	498.730	30.74	-2.27	46.00	15.26	PK
V	838.887	28.55	2.18	46.00	17.45	PK
V	952.000	29.76	3.58	46.00	16.24	PK

TEST REPORT

Test result above 1GHz:

The emission was conducted from 1GHz to 40GHz

U-NII-1 Band:

802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	-1.14	50.47	74.00	23.53	PK
	H	5150.00	-1.14	35.98	54.00	18.02	AV
	H	15540.00	12.81	50.22	74.00	23.78	PK
	V	15540.00	12.81	50.84	74.00	23.16	PK
M	H	10440.00	7.46	48.74	74.00	25.26	PK
	H	15660.00	13.06	50.12	74.00	23.88	PK
	V	10440.00	7.46	49.20	74.00	24.80	PK
	V	15660.00	13.06	50.90	74.00	23.10	PK
H	H	10480.00	7.51	49.88	74.00	24.12	PK
	H	15720.00	13.20	51.73	74.00	22.27	PK
	V	10480.00	7.51	48.89	74.00	25.11	PK
	V	15720.00	13.20	49.97	74.00	24.03	PK

802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	-1.14	50.80	74.00	23.20	PK
	H	5150.00	-1.14	35.72	54.00	18.28	AV
	H	15540.00	12.81	50.86	54.00	23.14	PK
	V	10360.00	7.32	56.35	74.00	17.65	PK
	V	10360.00	7.32	40.26	54.00	13.74	AV
M	H	10440.00	7.46	50.84	74.00	23.16	PK
	H	15660.00	13.06	53.42	74.00	20.58	PK
	V	10440.00	7.46	53.22	74.00	20.78	PK
	V	15660.00	13.06	50.40	74.00	23.60	PK

TEST REPORT

H	H	10480.00	7.51	49.41	74.00	24.59	PK
	H	15720.00	13.20	51.71	74.00	22.29	PK
	V	10480.00	7.51	49.87	74.00	24.13	PK
	V	15720.00	13.20	50.91	74.00	23.09	PK

802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5150.00	-1.14	55.99	74.00	18.01	PK
	V	5150.00	-1.14	40.18	54.00	13.82	AV
	H	15570.00	12.86	50.99	74.00	23.01	PK
	V	15570.00	12.86	51.27	74.00	22.73	PK
H	H	10460.00	7.48	48.01	74.00	25.99	PK
	H	15690.00	13.14	51.63	74.00	22.37	PK
	V	10460.00	7.48	48.67	74.00	25.33	PK
	V	15690.00	13.14	50.82	74.00	23.18	PK

802.11ac80

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
M	V	5150.00	-1.14	55.90	74.00	18.10	PK
	V	5150.00	-1.14	41.66	54.00	12.34	AV
	H	15630.00	13.00	51.39	74.00	22.61	PK
	V	15630.00	13.00	52.55	74.00	21.45	PK

TEST REPORT

U-NII-2A Band:

802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	7.52	49.16	74.00	24.84	PK
	H	15780.00	13.34	50.30	74.00	23.70	PK
	V	10520.00	7.52	49.72	74.00	24.28	PK
	V	15780.00	13.34	50.36	74.00	23.64	PK
M	H	10600.00	7.44	48.25	74.00	25.75	PK
	H	15900.00	13.61	52.16	74.00	21.84	PK
	V	10600.00	7.44	51.10	74.00	22.90	PK
	V	15900.00	7.44	51.10	54.00	22.90	AV
H	V	5350.00	-0.5	46.68	74.00	7.32	PK
	V	5350.00	-0.5	66.91	54.00	7.09	AV
	H	15960.00	13.73	50.32	74.00	23.68	PK
	V	15960.00	13.73	51.19	74.00	22.81	PK

802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	7.52	49.01	74.00	24.99	PK
	H	15780.00	13.34	51.57	74.00	22.43	PK
	V	10520.00	7.52	48.33	74.00	25.67	PK
	V	15780.00	13.34	51.59	74.00	22.41	PK
M	H	10600.00	7.44	47.28	74.00	26.72	PK
	H	15900.00	13.61	51.81	74.00	22.19	PK
	V	10600.00	7.44	47.81	74.00	26.19	PK
	V	15900.00	13.61	52.31	74.00	21.69	PK
H	V	5350.00	-0.50	65.62	74.00	8.38	PK
	V	5350.00	-0.50	44.94	54.00	9.06	AV
	H	15960.00	13.73	51.29	74.00	22.71	PK

TEST REPORT

	V	15960.00	13.73	51.33	74.00	22.67	PK
--	---	----------	-------	-------	-------	-------	----

802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10540.00	7.50	47.46	74.00	26.54	PK
	H	15810.00	13.40	50.89	74.00	23.11	PK
	V	10540.00	7.50	49.30	74.00	24.70	PK
	V	15810.00	13.40	51.02	74.00	22.98	PK
H	H	5350.00	-0.50	69.48	74.00	4.52	PK
	H	5350.00	-0.50	49.16	54.00	4.84	AV
	H	15930.00	13.68	51.79	74.00	22.21	PK
	V	15930.00	13.68	50.36	74.00	23.64	PK

802.11ac80

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5350.00	-0.50	70.38	74.00	3.62	PK
	H	5350.00	-0.50	49.37	54.00	4.63	AV
	H	15870.00	13.54	50.57	74.00	23.43	PK
	V	15870.00	13.54	50.87	74.00	23.13	PK

TEST REPORT
U-NII-2C Band:

802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5470.00	-0.07	55.42	68.20	12.78	PK
	H	5470.00	-0.07	39.52	68.20	28.68	AV
	H	16500.00	14.75	53.44	74.00	20.56	PK
	V	16500.00	14.75	51.03	74.00	22.97	PK
M	H	11160.00	7.17	48.41	74.00	25.29	PK
	H	16740.00	14.48	52.26	74.00	21.74	PK
	V	11160.00	7.17	48.38	74.00	25.62	PK
	V	16740.00	14.48	53.07	74.00	20.93	PK
H	H	5725.00	0.12	67.02	68.20	1.18	PK
	V	5725.00	0.11	66.24	68.20	1.96	PK
	H	17100.00	14.44	50.50	74.00	23.50	PK
	V	17100.00	14.44	49.56	74.00	24.35	PK

802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5470.00	-0.07	62.01	68.20	6.19	PK
	V	5470.00	-0.07	43.47	68.20	24.73	PK
	H	16500.00	14.75	52.33	74.00	21.67	PK
	V	16500.00	14.75	52.90	74.00	21.10	PK
M	H	11160.00	7.17	45.79	74.00	28.21	PK
	H	16740.00	14.48	52.18	74.00	21.82	PK
	V	11160.00	7.17	45.07	74.00	28.93	PK
	V	16740.00	14.48	52.20	74.00	21.80	PK
H	H	5725.00	0.11	67.30	68.20	0.90	PK
	V	5725.00	0.11	67.13	68.20	1.07	PK
	H	17100.00	14.44	50.62	74.00	23.38	PK

TEST REPORT

	V	17100.00	14.44	50.53	74.00	23.47	PK
--	---	----------	-------	-------	-------	-------	----

802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5470.00	-0.07	66.28	68.20	1.92	PK
	V	5470.00	-0.07	47.75	68.20	20.45	PK
	H	16530.00	14.73	51.94	74.00	22.06	PK
	V	16530.00	14.73	52.65	74.00	21.35	PK
H	H	5725.00	0.11	65.74	68.20	2.46	PK
	V	5725.00	0.11	64.15	68.20	4.05	PK
	H	17010.00	14.21	51.01	74.00	22.99	PK
	V	17010.00	14.21	51.50	74.00	22.50	PK

802.11ac80

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	5470.00	-0.07	66.46	68.20	1.74	PK
	H	5470.00	-0.11	48.10	54.00	5.90	AV
	H	16590.00	14.66	51.79	74.00	22.21	PK
	V	16590.00	14.66	52.31	74.00	21.69	PK
H	H	5725.00	0.11	58.86	68.20	9.34	PK
	V	5725.00	0.11	59.56	68.20	8.64	PK
	H	16830.00	14.38	52.68	74.00	21.32	PK
	V	16830.00	14.38	52.33	74.00	21.67	PK

TEST REPORT

U-NII-3 Band:

802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	17235.00	14.80	52.19	74.00	21.81	PK
	V	17235.00	14.80	50.51	74.00	23.49	PK
M	H	11570.00	7.59	48.14	74.00	25.86	PK
	H	17355.00	15.11	53.46	74.00	20.54	PK
	V	11570.00	7.59	47.36	74.00	26.64	PK
	V	17355.00	15.11	52.54	74.00	21.46	PK
H	H	17475.00	15.43	51.74	74.00	22.26	PK
	V	17475.00	15.43	52.64	74.00	21.36	PK

802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	17235.00	14.80	51.16	74.00	22.84	PK
	V	17235.00	14.80	52.01	74.00	21.99	PK
M	H	11570.00	7.59	45.74	74.00	28.26	PK
	H	17355.00	15.11	52.20	74.00	21.80	PK
	V	11570.00	7.59	46.77	74.00	27.23	PK
	V	17355.00	15.11	52.28	74.00	21.72	PK
H	H	17475.00	15.43	51.19	74.00	22.81	PK
	V	17475.00	15.43	52.60	74.00	21.40	PK

TEST REPORT

802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	17265.00	36.42	51.30	74.00	22.70	PK
	V	17265.00	14.88	50.87	74.00	23.13	PK
H	H	17385.00	15.19	51.65	74.00	22.35	PK
	V	17385.00	15.19	52.52	74.00	21.48	PK

802.11ac80

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	17325.00	15.03	52.07	74.00	21.93	PK
	V	17325.00	15.03	52.50	74.00	21.50	PK

802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)	Detector
L	H	5725.00	11.85	-17.17	27.00	44.17	PK
	V	5725.00	11.85	-17.76	27.00	44.76	AV
H	H	5850.00	12.02	-28.93	27.00	55.93	PK
	V	5850.00	12.02	-32.29	27.00	59.29	AV

802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)	Detector
L	H	5725.00	11.85	-7.81	27.00	34.81	PK
	V	5725.00	11.85	-10.53	27.00	37.53	AV
H	H	5850.00	12.02	-20.85	27.00	47.85	PK
	V	5850.00	12.02	-21.58	27.00	48.58	PK

TEST REPORT

802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)	Detector
L	H	5725.00	11.85	-11.25	27.00	38.25	PK
	V	5725.00	11.85	-13.57	27.00	40.57	PK
H	H	5850.00	12.02	-28.22	27.00	55.22	PK
	V	5850.00	12.02	-29.51	27.00	56.51	PK

802.11ac80

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)	Detector
L	H	5850.00	12.02	-17.02	27.00	44.02	PK
	V	5850.00	12.02	-22.44	27.00	49.44	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

6 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses of a permanently attached antenna and a unique coupling to the intentional radiator, so it can comply with the provisions of this section.

***** END *****