
Company: Remote Tech LLC Address: 310 ALDER RD,Dover,DE 19904,USA Name:Remote Key Model: RT-NI3SG

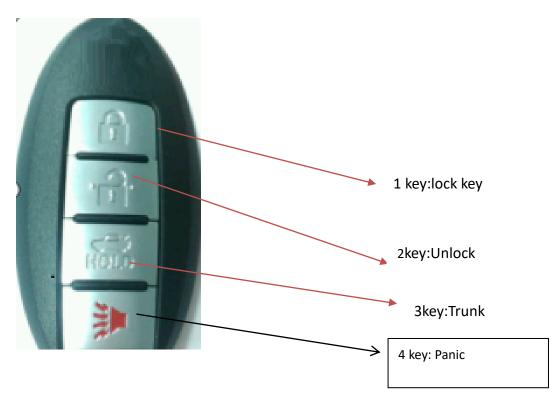

Operation instructions

- 1. After matching the key to the car, press 2 the unlock key for 2 seconds to open the door and press 1 the lock key for 2 seconds to close the door.
- 2. The trunk key is used to open or close the trunk.

Product parameters	
Rated voltage	DC 3V
Working current	<12mA
Operating voltage	DC 3.3V-2.2V
Transmit power	>-8dbm
Key operation force	200±50g
Operating temperature	-5° C +45° C
Stand-by current	<7uA
transmitting frequency	315MHZ±75KHZ
Modulation	ASK
Battery	CR2032
Key durability	More than 70,000 times

FCC COMPLIANCE STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC WARNING

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device

ADVERTENCIA IC

Cet appareil contient des énetteurs / r écepteurs exempt és de licence conformes aux RSS (RSS)d'Innovation, Sciences et D éveloppement économique Canada. Le fonctionnement est soumis auxdeux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interf érences.

(2) Cet appareil doit accepter toutes les interf érences, y compris celles susceptibles deprovoquer un fonctionnement ind ésirable de l'appareil.

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.