



FCC Test Report

**Test report
On Behalf of
HUAHAI ELECTRONICS CO., LIMITED
For
3 IN 1 WIRELESS CHARGE STAND
Model No.: HH-HD-W221, 9087HD, 9087NR, 9076, T9076BJ,
CWC-2500BLK, 9087
FCC ID: 2AOKO-HHHDW221**

**Prepared For : HUAHAI ELECTRONICS CO., LIMITED
No. 5, Gaoqing Road, TangXia Town, DongGuan City, Guangdong Province,
China**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F, Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

**Date of Test: Jul. 18, 2023 ~ Aug. 02, 2023
Date of Report: Aug. 02, 2023
Report Number: HK2307183115-1E**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Test Result Certification

Applicant's Name : HUAHAI ELECTRONICS CO., LIMITED

Address : No. 5, Gaoqing Road, TangXia Town, DongGuan City, Guangdong Province, China

Manufacture's Name : Dongguan Huahaitong Technology Co., Ltd.

Address : No. 5, Gaoqing Road, TangXia Town, DongGuan City, Guangdong Province, China

Product Description

Trade Mark : N/A

Product Name : 3 IN 1 WIRELESS CHARGE STAND

Model and/or type reference : HH-HD-W221, 9087HD, 9087NR, 9076, T9076BJ, CWC-2500BLK, 9087

Standards : FCC CFR 47 PART 18


This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : Jul. 18, 2023 ~ Aug. 02, 2023

Date of Issue : Aug. 02, 2023

Test Result : Pass

Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory : 

(Jason Zhou)

**Table of Contents**

	Page
1 . Test Summary	5
1.1 . Test Procedures and Results	5
1.2 . Information of the Test Laboratory	5
1.3 . Measurement Uncertainty	5
2. General Information	6
2.1. General Description of EUT	6
2.2. Carrier Frequency of Channels	7
2.3. Test Mode	7
2.4. Description of Test Setup	8
2.5. Description of Support Units	9
2.6. Measurement Instruments List	10
3. Conducted Emission Test	11
3.1. Block Diagram of Test Setup	11
3.2. Conducted Power Line Emission Limit	11
3.3. Test Procedure	11
4. Radiated Emissions	14
4.1. Block Diagram of Test Setup	14
4.2. Rules and Specifications	15
4.3. Test Procedure	15
4.4. Test Result	15
5. Antenna Requirement	20
6. Photograph of Test	21
7. Photos of the EUT	23

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Aug. 02, 2023	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1. Test Summary

1.1. Test Procedures and Results

Description of Test	Section Number	Result
Conducted Emissions Test	18.307	COMPLIANT
Radiated Emission Test	18.305	COMPLIANT

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.3. Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.71dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 3.90dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.28dB, k=2



2. General Information

2.1. General Description of EUT

Equipment:	3 IN 1 WIRELESS CHARGE STAND
Model Name:	HH-HD-W221
Series Models:	9087HD, 9087NR, 9076, T9076BJ, CWC-2500BLK, 9087
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: HH-HD-W221.
Trade Mark:	N/A
FCC ID:	2AOKO-HHHDW221
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Operation Frequency (Mobile Phone+ Earphone):	112KHz~205KHz
Operation Frequency(Watch):	329KHz
Test Frequency:	Mobile Phone:113KHz Watch: 329KHz Earphone: 113KHz
Modulation Type:	ASK
Power Source:	Input: 9V/3A Phone Wireless Output: 15W Earphone Wireless Output: 5W Watch Wireless Output: 2.5W
Power Rating:	Input: 9V/3A Phone Wireless Output: 15W Earphone Wireless Output: 5W Watch Wireless Output: 2.5W
Note: The transfer system includes three coils, 3 coils can work individually or can work at the same time. All the situation(full load, half load and empty load) has been tested, only the worst situation (ANT1+ANT2+ANT3) was recorded in the report.	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



2.2. Carrier Frequency of Channels

Operation Frequency each of channel	
Channel	Frequency
01	113KHz
02	113KHz
03	329KHz

2.3. Test Mode

Test Item	Test mode	Description
Radiated & Conducted test cases	Mode 1	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <1%)+Wireless load (Full Load)
	Mode 2	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <50%)+Wireless load (Full Load)
	Mode 3	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <100%)+Wireless load (Full Load)
	Mode 4	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <1%)+Wireless load (Half Load)
	Mode 5	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <50%)+Wireless load (Half Load)
	Mode 6	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <100%)+Wireless load (Half Load)
	Mode 7	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <1%)+Wireless load (Null Load)
	Mode 8	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <50%)+Wireless load (Null Load)
	Mode 9	AC/DC Adapter+ EUT + Earbuds + Watch (Battery Status: <100%)+Wireless load (Null Load)
	Mode 10	AC/DC Adapter+ EUT (Null Load)

Note:


1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The manufacturer provides wireless charging equipment for testing and evaluation Earbuds, and the wireless load replaces the(Phone, Watch).
4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>



2.4. Description of Test Setup

Operation of EUT during Testing:

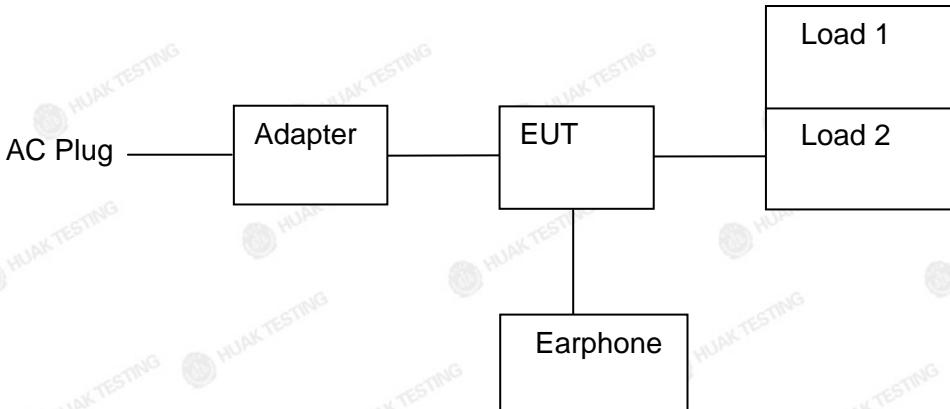

The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz)) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	3 IN 1 WIRELESS CHARGE STAND	N/A	HH-HD-W221	N/A	EUT
2	Adapter	N/A	HA835	Input: 100-240V, 50/60Hz 1.8A Output:5V, 3A/9V, 3A/12V, 3A/15V, 3A/20V, 3.25A 65W MAX	Accessories
3	USB Cable	N/A	N/A	Length:1.54m	Accessories
4	Load 1	YBZ	N/A	Wireless input:15W	Peripheral
5	Load 2	YBZ	N/A	Wireless input: 2.5W	Peripheral
6	Earphone	Airpods	N/A	Wireless input: 5W	Peripheral

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



2.6. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 17, 2023	1 Year
2.	Receiver	R&S	ESR-7	HKE-005	Feb. 17, 2023	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 17, 2023	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 17, 2023	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 17, 2023	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 17, 2023	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 17, 2023	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 17, 2023	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 17, 2023	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Feb. 17, 2023	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 17, 2023	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 17, 2023	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 17, 2023	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 17, 2023	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 09, 2021	3 Year
19.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 17, 2023	1 Year

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



3. Conducted Emission Test

3.1. Block Diagram of Test Setup

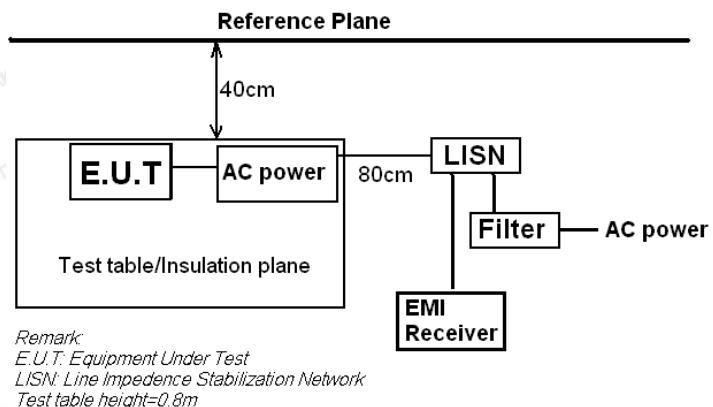

3.2. Conducted Power Line Emission Limit

According to FCC Part 18.307(b)

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §18.307 Line Conducted Emission Limit is same as above table.

3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




3.4. Test Result

PASS

All the test modes completed for test. Only the worst result of Full Load was reported as below:

Test Specification: Line

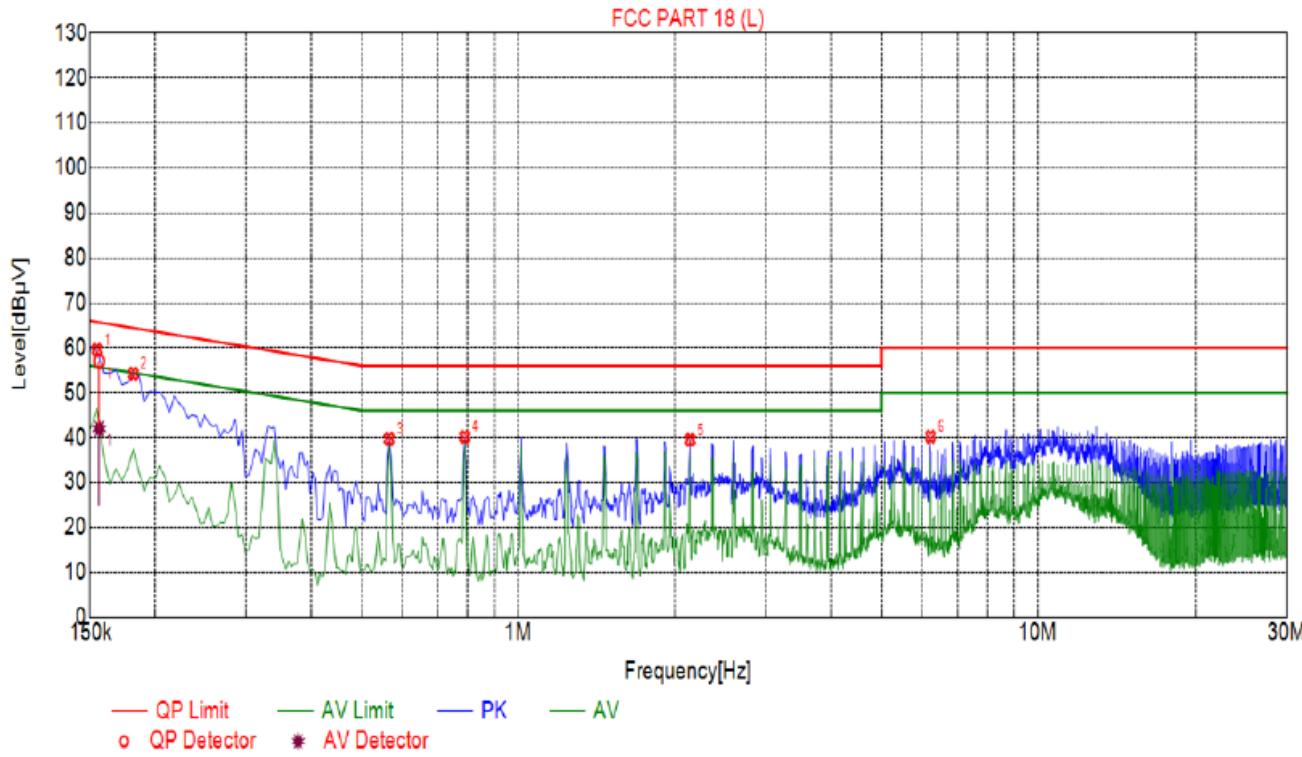**Suspected List**

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1545	59.61	20.03	65.75	6.14	39.58	PK	L
2	0.1815	54.22	20.06	64.42	10.20	34.16	PK	L
3	0.5640	39.72	20.06	56.00	16.28	19.66	PK	L
4	0.7890	40.15	20.05	56.00	15.85	20.10	PK	L
5	2.1435	39.51	20.16	56.00	16.49	19.35	PK	L
6	6.2205	40.18	20.22	60.00	19.82	19.96	PK	L

Final Data List

NO.	Freq. [MHz]	Correction factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.1560	20.02	56.98	65.67	8.69	36.96	41.98	55.67	13.69	21.96	L


Remark: Margin = Limit - Level

Correction factor = Cable loss + LISN insertion loss

Level = Test receiver reading + correction factor



Test Specification: Neutral

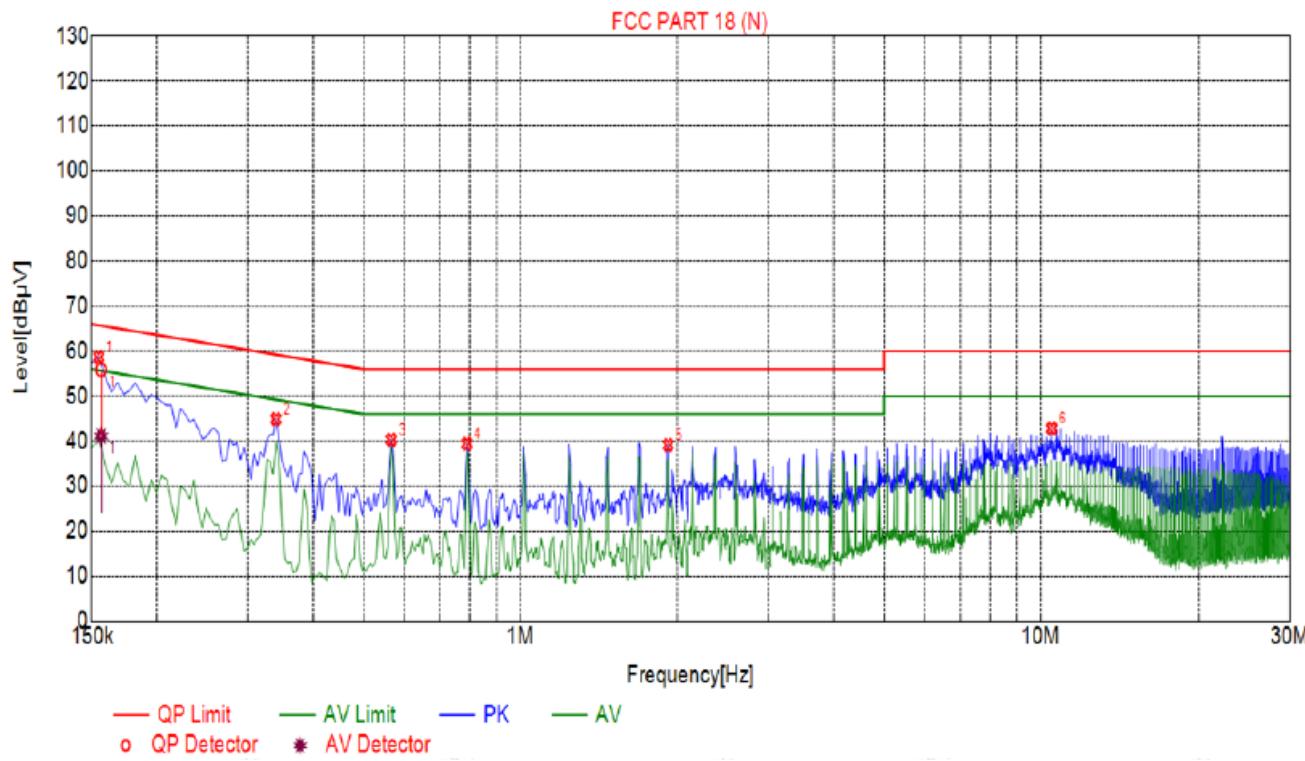

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1545	58.71	20.03	65.75	7.04	38.68	PK	N
2	0.3390	44.89	20.03	59.23	14.34	24.86	PK	N
3	0.5640	40.30	20.06	56.00	15.70	20.24	PK	N
4	0.7890	39.41	20.05	56.00	16.59	19.36	PK	N
5	1.9230	39.13	20.14	56.00	16.87	18.99	PK	N
6	10.5090	42.82	20.04	60.00	17.18	22.78	PK	N

Final Data List

NO.	Freq. [MHz]	Correction factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.1562	20.02	55.88	65.67	9.79	35.86	41.12	55.67	14.55	21.10	N

Remark: Margin = Limit - Level



Correction factor = Cable loss + LISN insertion loss

Level = Test receiver reading + correction factor



4. Radiated Emissions

4.1. Block Diagram of Test Setup

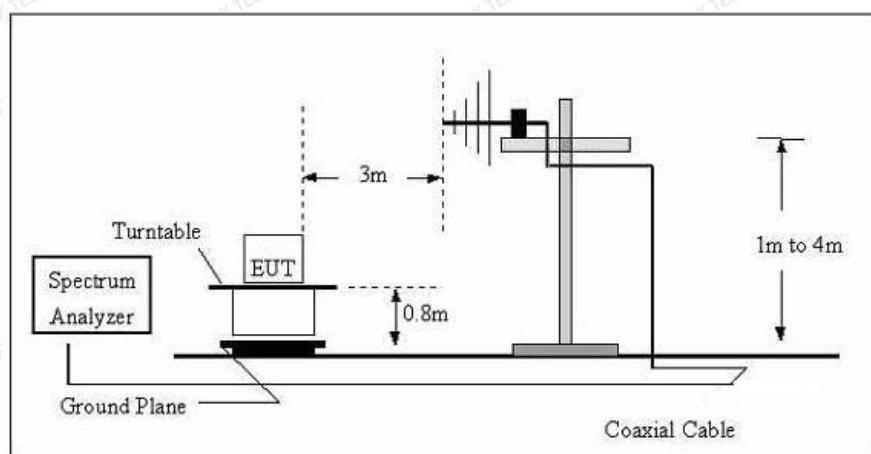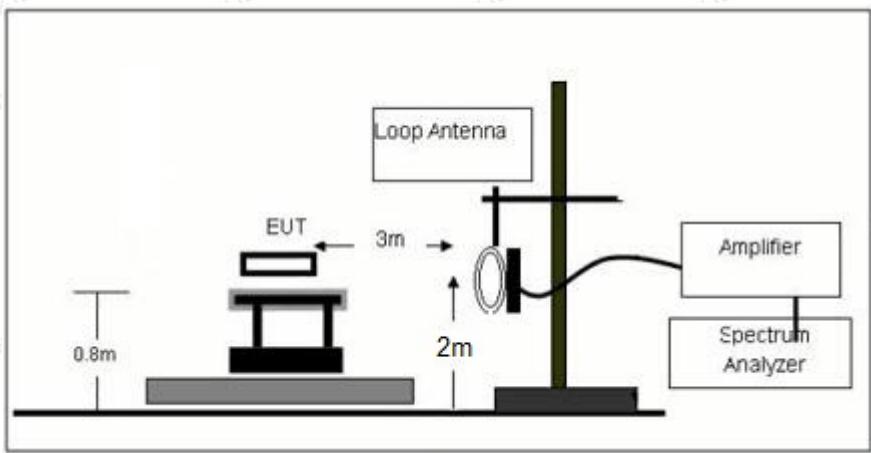

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.2. Rules and Specifications

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
(miscellaneous)				
	Any non-ISM frequency	Below 500 500 or more	15 15 × SQRT(power/500)	300 1300

Remark:

- (1) Emission level dBuV/m for 0.009~30MHz = $20\log(15) + 40\log(300/3)$ dBuV/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurements are extrapolated to 300m and 30m distance respectively, by 40dB/decade, Per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4. Test Result


PASS

Note: All the test modes completed for test. Only the worst result (ANT1+ANT2+ANT3) was reported as below:



Mobile Phone+ Earphone:

For 9KHz - 30MHz

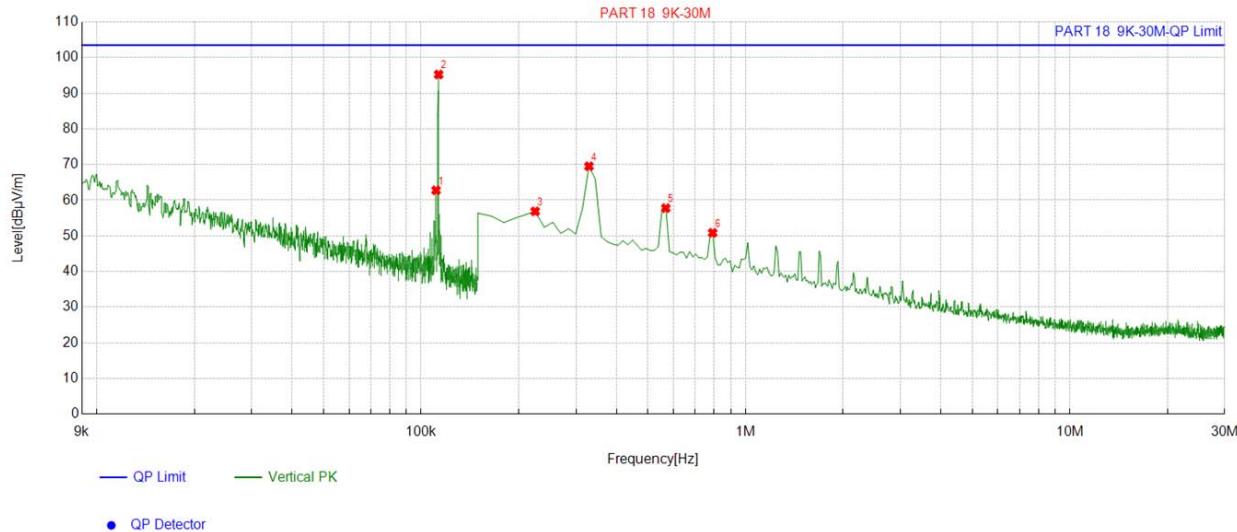

Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
1	0.111135	13.81	48.98	62.79	103.50	40.71
2	0.113181	13.80	81.47	95.27	103.50	8.23
3	0.224662	13.66	43.22	56.88	103.50	46.62
4	0.32919	13.72	55.80	69.52	103.50	33.98
5	0.568109	13.72	44.06	57.78	103.50	45.72
6	0.792096	14.02	36.84	50.86	103.50	52.64

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Watch:

For 9KHz - 30MHz

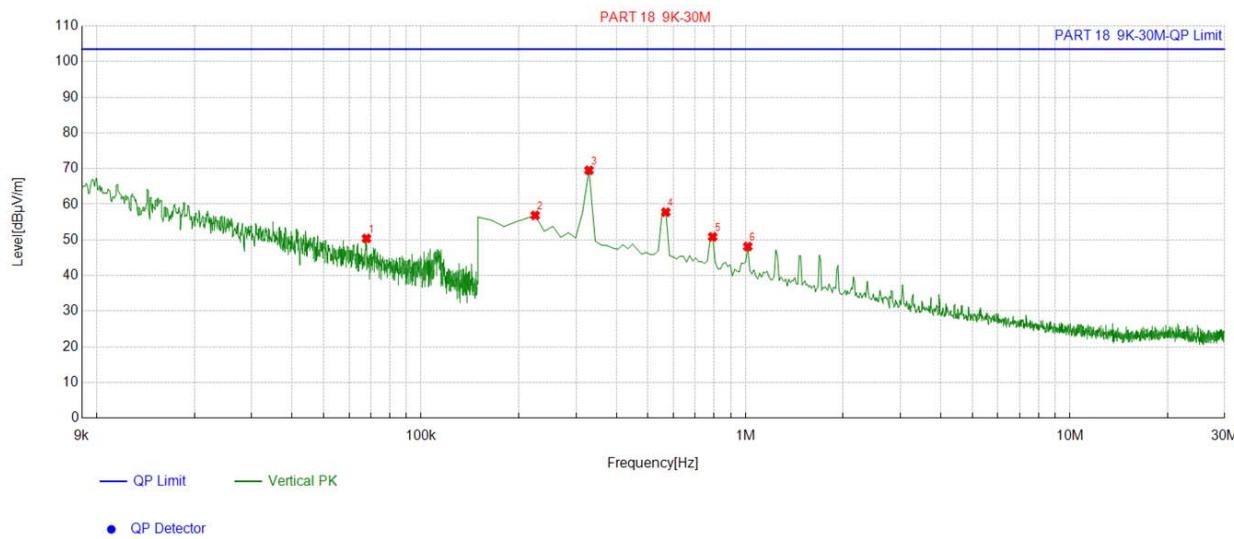

Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
1	0.067826	13.96	36.44	50.40	103.50	53.10
2	0.224662	13.66	43.22	56.88	103.50	46.62
3	0.32919	13.72	55.80	69.52	103.50	33.98
4	0.568109	13.72	44.06	57.78	103.50	45.72
5	0.792096	14.02	36.84	50.86	103.50	52.64
6	1.016083	14.12	34.02	48.14	103.50	55.36

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



For 30MHz-1GHz

Antenna polarity: H

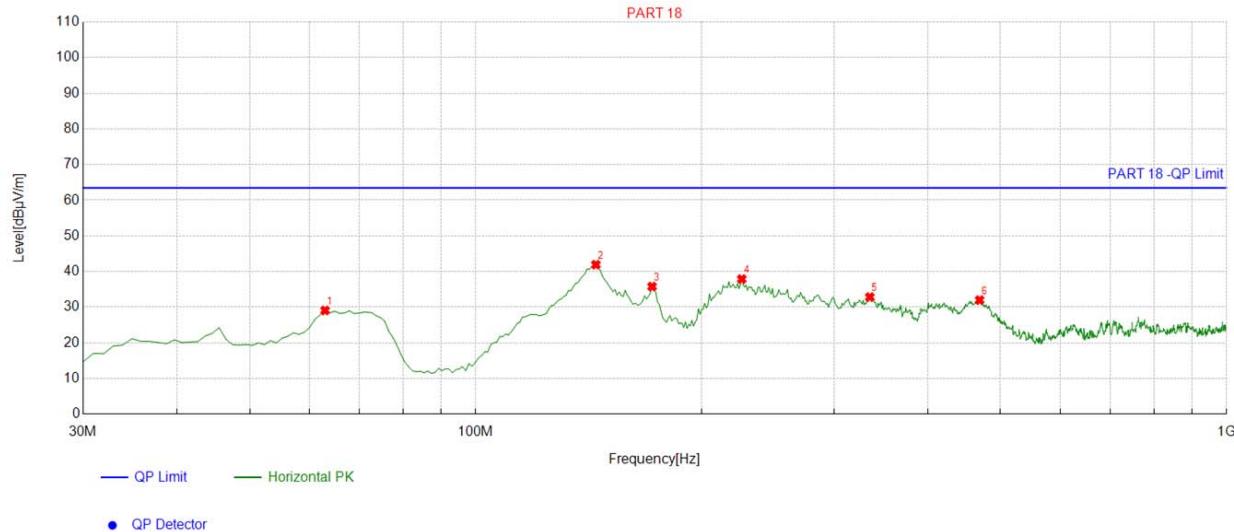


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	63.013013	-14.38	43.47	29.09	63.50	34.41	100	359	Horizontal
2	144.57457	-18.38	60.31	41.93	63.50	21.57	100	170	Horizontal
3	171.76176	-16.91	52.70	35.79	63.50	27.71	100	261	Horizontal
4	226.13613	-13.99	51.88	37.89	63.50	25.61	100	234	Horizontal
5	334.88488	-11.51	44.35	32.84	63.50	30.66	100	300	Horizontal
6	468.87887	-8.07	40.07	32.00	63.50	31.50	100	289	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



Antenna polarity: V

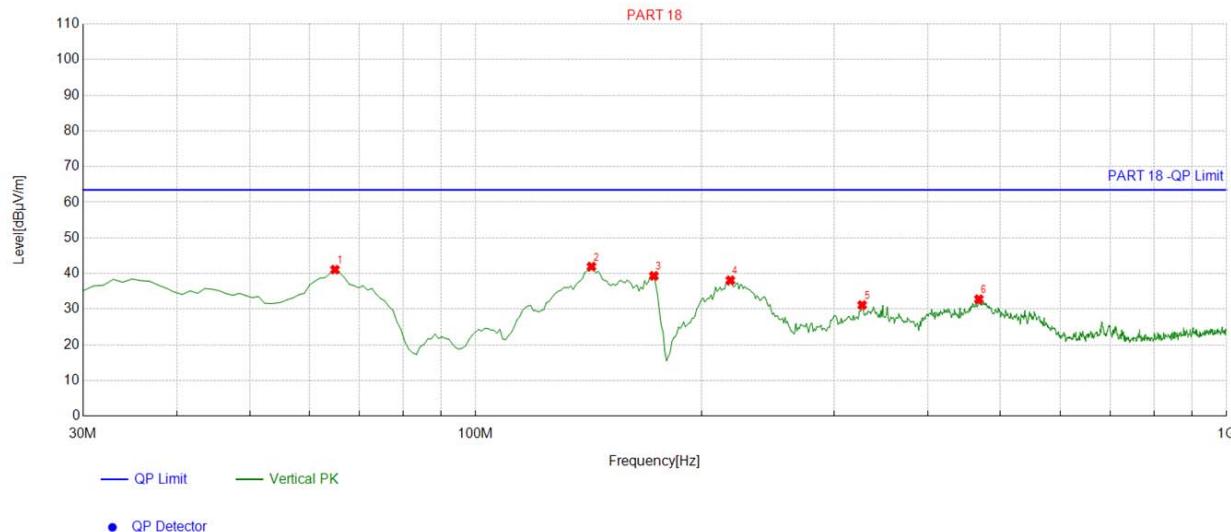

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	64.954955	-14.58	55.68	41.10	63.50	22.40	100	155	Vertical
2	142.63263	-18.24	60.20	41.96	63.50	21.54	100	147	Vertical
3	172.73273	-16.80	56.14	39.34	63.50	24.16	100	235	Vertical
4	218.36836	-14.33	52.44	38.11	63.50	25.39	100	180	Vertical
5	327.11711	-11.60	42.76	31.16	63.50	32.34	100	22	Vertical
6	467.90790	-8.11	40.92	32.81	63.50	30.69	100	180	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



5. Antenna Requirement


Refer to statement below for compliance.



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Coil Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.

Antenna

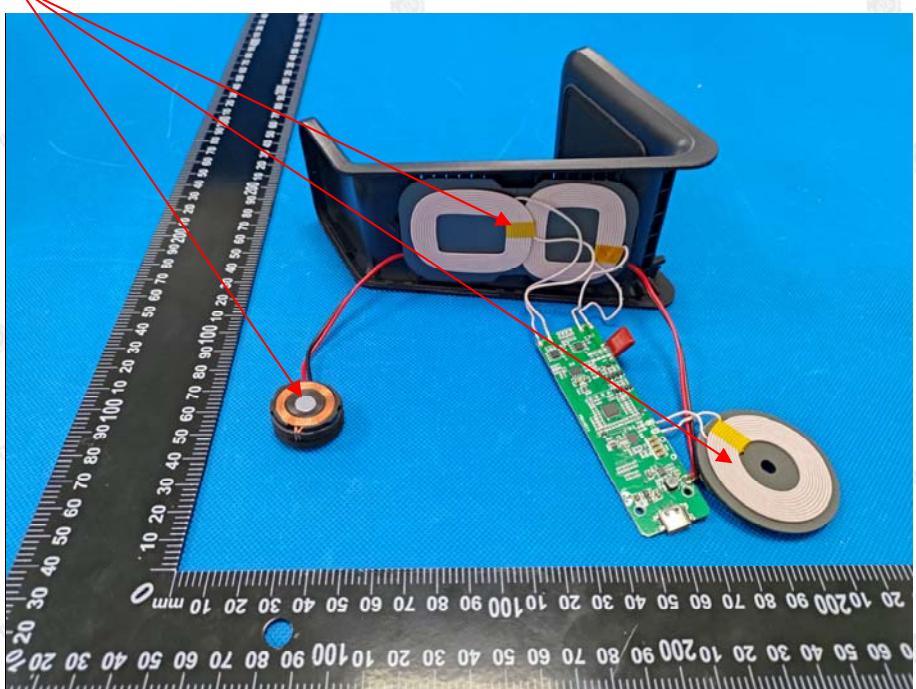

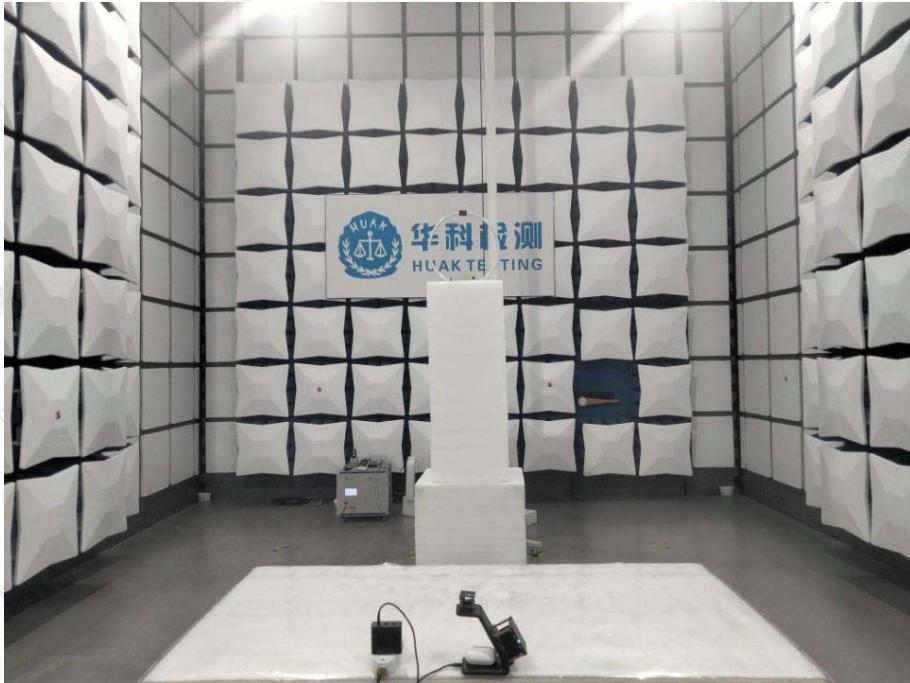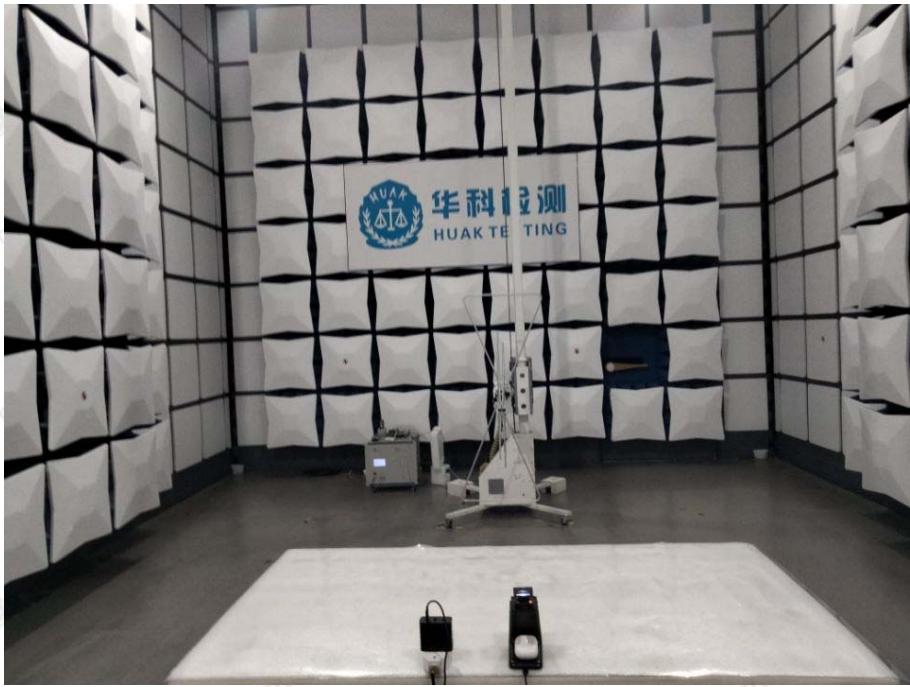**6. Photograph of Test****Radiated Emission**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Conducted Emission**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----