

# **FCC Test Report**

## **FCC ID: 2AOKUPAD8**

**Product:** Tablet

**Trade Mark:** HOTWAV

**Model No.:** Pad 8

**Family Model:** P2203, Pad

**Report No.:** S23050501502007

**Issue Date:** Jun 21, 2023

**Prepared for**

SHENZHEN TUGAO INTELLIGENT CO.,LTD  
8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,  
Bao'an District, Shenzhen, China

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen P.R. China  
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090  
Website:<http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN TUGAO INTELLIGENT CO.,LTD  
Address : 8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,  
Bao'an District, Shenzhen, China  
Manufacturer's Name : SHENZHEN TUGAO INTELLIGENT CO.,LTD  
Address : 8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,  
Bao'an District, Shenzhen, China  
Product description  
Product name : Tablet  
Trade Mark : HOTWAV  
Model and/or type reference : P2203, Pad  
Family Model : S230505015003  
Standards.....: FCC Part 15B  
ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Test Sample Number.....: S230505015003

Date of Test .....


Date (s) of performance of tests.....: May 05, 2023 ~ Jun 21, 2023

Date of Issue .....: Jun 21, 2023

Test Result .....: **Pass**

Testing Engineer

:



(Mukzi Lee)

Authorized Signatory

:



(Alex Li)

## Table of Contents

## Page

1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	17
3.2.2 TEST PROCEDURE	17
3.2.3 TEST SETUP	18
3.2.4 TEST RESULTS	19
3.2.5 TEST RESULTS(1000~18000MHz)	23

## 1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

## 1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

IC-Registration The Certificate Registration Number is 9270A.

CAB identifier:CN0074

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	$\pm 2.80$ dB	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
NTEKA01	ANSI	30MHz~1000MHz	$\pm 2.64$ dB	
		1GHz~6GHz	$\pm 2.40$ dB	
		6GHz~26.5GHz	$\pm 2.52$ dB	

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet				
Trade Mark	HOTWAV				
Model Name	Pad 8				
Family Model	P2203, Pad				
Model Difference	All the model are the same circuit and RF module, except the model names.				
Product Description	<table border="1"> <tr> <td>Connecting I/O port:</td><td>Micro USB, Earphone</td></tr> <tr> <td>Operation Frequency:</td><td>5.8GHz</td></tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Connecting I/O port:	Micro USB, Earphone	Operation Frequency:	5.8GHz
Connecting I/O port:	Micro USB, Earphone				
Operation Frequency:	5.8GHz				
Adapter	<p>Adapter 1:</p> <p>Model: HJ-0502000W2-US</p> <p>Input: 100-240V~50/60Hz 0.3A</p> <p>Output: 5.0V <math>\overline{\text{---}}</math> 2.0A 10.0W</p> <p>Adapter 2:</p> <p>Model: 5277-20B1</p> <p>Input: 100-240V~50/60Hz 0.4A</p> <p>Output: 5.0V <math>\overline{\text{---}}</math> 2.0A, 10.0W</p>				
Battery	DC 3.8V, 7500mAh, 28.5Wh				
Power supply	DC 3.8V from battery or DC 5V from adapter				
HW Version	KEP_P30A_V1.0				
SW Version	HOTWAV_Pad 8_V01_20230525				

## 2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Model 1	USB Data Transmission
Model 2	TF card Playing
Model 3	REC
Model 4	FM
Model 5	GPS


For Conducted Test	
Final Test Mode	Description
Model 1	USB Data Transmission
Model 2	TF card Playing
Model 3	REC
Model 4	FM
Model 5	GPS

For Radiated Test	
Final Test Mode	Description
Model 1	USB Data Transmission
Model 2	TF card Playing
Model 3	REC
Model 4	FM
Model 5	GPS


Note: Final Test Mode: Through Pre-scan, find the model 1 is the worst case.  
Only the worst case mode is recorded in the report.

## 2.2 DESCRIPTION OF TEST SETUP

CE

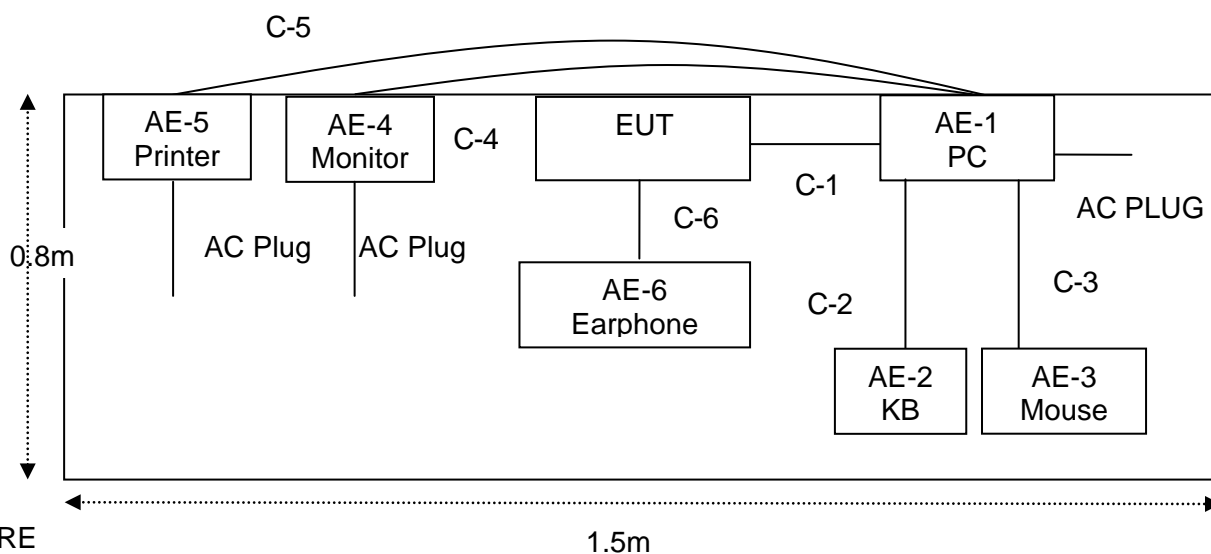

RE

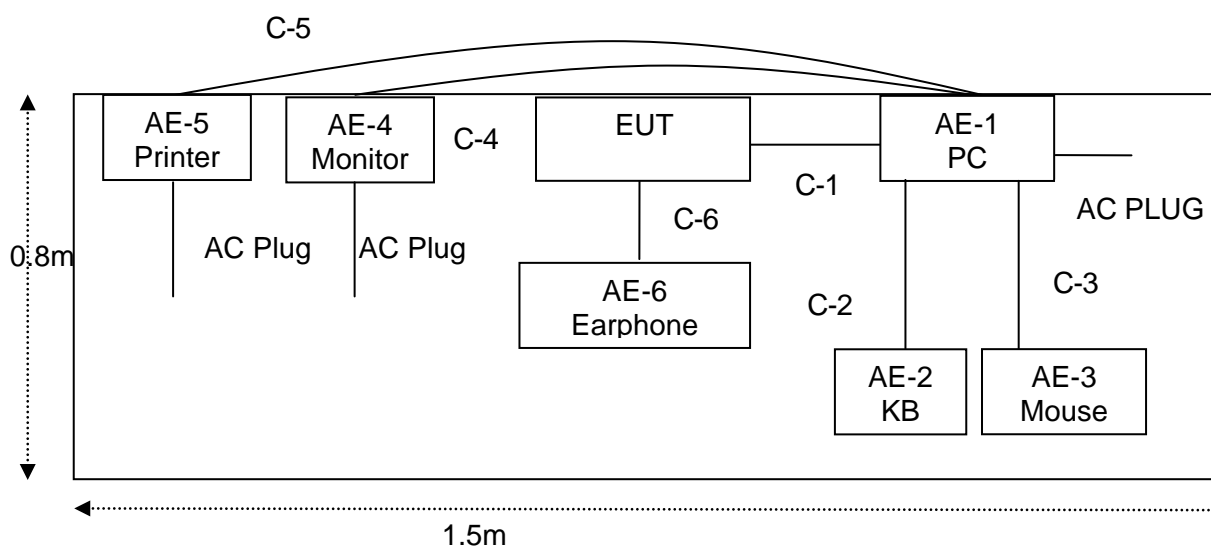



## 2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	PC	DELL	FT4Y23X	N/A	Peripherals
AE-2	KB	N/A	N/A	N/A	Peripherals
AE-3	Mouse	DELL	MS111-P	N/A	Peripherals
AE-4	Monitor	DELL	IN2020MB	N/A	Peripherals
AE-5	Printer	Canon	L11121E	N/A	Peripherals
AE-6	Earphone	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	YES	NO	1.0m	
C-2	USB Cable	NO	NO	1.2m	
C-3	USB Cable	NO	NO	1.2m	
C-4	HDMI Cable	YES	YES	1.0m	
C-5	USB Cable	NO	NO	1.2m	
C-6	Earphone Cable	NO	NO	1.2m	

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

## 2.4 MEASUREMENT INSTRUMENTS LIST

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Aglient	E4440A	MY41000130	2023.03.27	2024.03.26	1 year
2	Test Receiver	R&S	ESPI	101318	2023.03.27	2024.03.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16	2024.03.15	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2023.03.27	2024.03.26	1 year
6	Horn Antenna	SCHWARZBECK	BBHA 9120D	2816	2023.01.12	2024.01.11	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.11.07	2023.11.06	1 year
8	Amplifier	EMC	EMC051835SE	980246	2022.06.17 2023.05.29	2023.06.16 2024.05.28	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2022.06.17 2023.05.29	2023.06.16 2024.05.28	1 year
10	Power Meter	DARE	RPR3006W	15I00041SNO84	2022.06.16 2023.05.29	2023.06.15 2024.05.28	1 year
11	Power Sensor	R&S	URV4-Z4	0395.1619.05	2022.06.16 2023.05.29	2023.06.15 2024.05.28	1 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40GHz)	N/A	R-04	N/A	2022.06.17	2025.06.16	3 year
15	Test Receiver	R&S	ESCI	101160	2023.03.27	2024.03.26	1 year

### AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2023.03.27	2024.03.26	1 year
2	LISN	R&S	ENV216	101313	2023.03.27	2024.03.26	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2023.03.27	2024.03.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

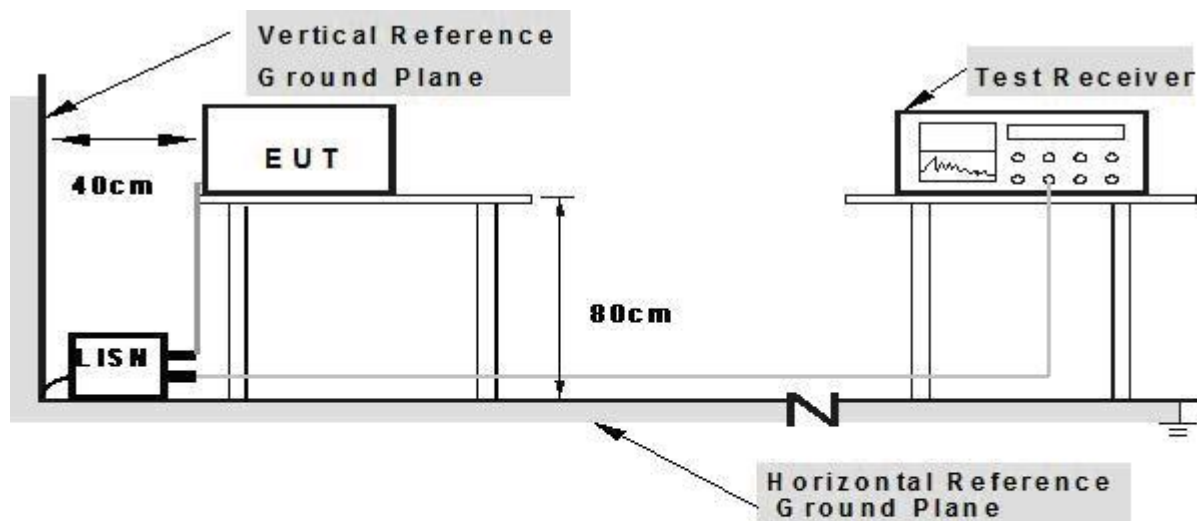

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.


### 3.1.5 TEST RESULTS

EUT:	Tablet	Model Name. :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2023-05-09
Test Mode:	Mode 1 (Adapter 1)	Phase :	L
Test Voltage:	DC 5V from PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2020	33.81	10.03	43.84	63.53	-19.69	QP
0.2020	12.54	10.03	22.57	53.53	-30.96	AVG
0.6860	35.43	11.03	46.46	56.00	-9.54	QP
0.6860	18.07	11.03	29.10	46.00	-16.90	AVG
1.0300	31.40	11.72	43.12	56.00	-12.88	QP
1.0300	15.10	11.72	26.82	46.00	-19.18	AVG
2.2380	25.94	9.66	35.60	56.00	-20.40	QP
2.2380	9.46	9.66	19.12	46.00	-26.88	AVG
10.8179	26.54	9.69	36.23	60.00	-23.77	QP
10.8179	10.83	9.69	20.52	50.00	-29.48	AVG
19.0579	37.25	9.72	46.97	60.00	-13.03	QP
19.0579	21.60	9.72	31.32	50.00	-18.68	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

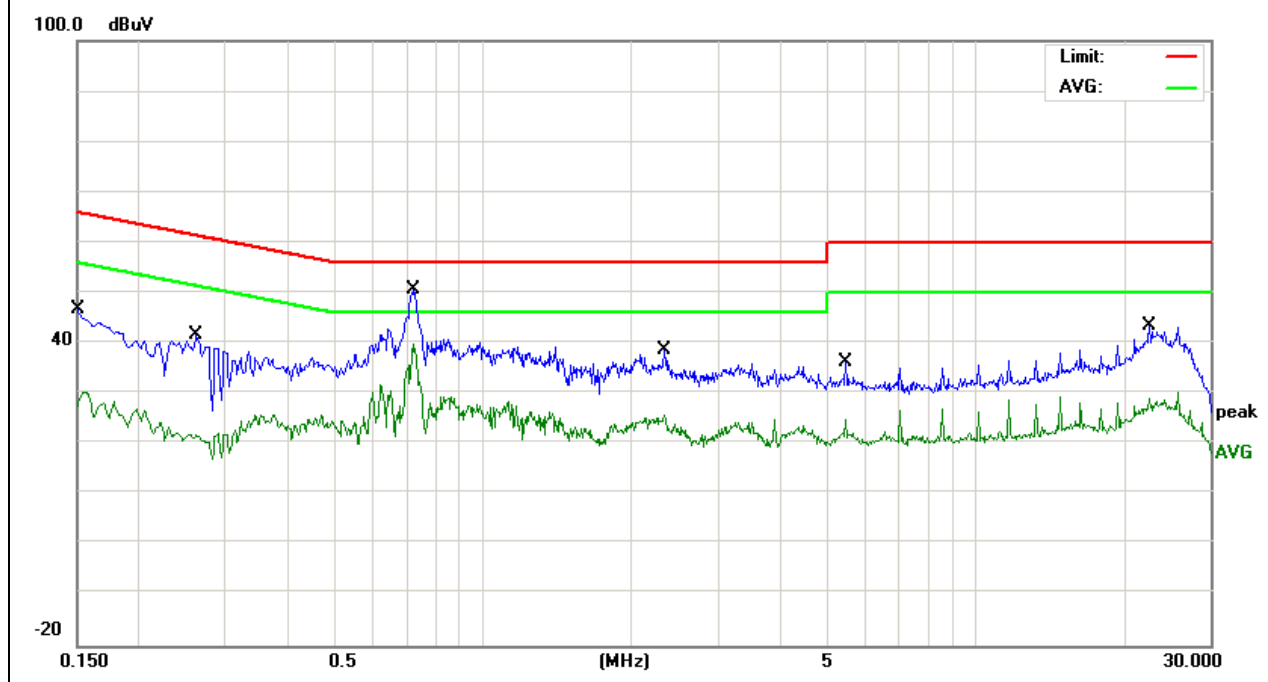


EUT:	Tablet	Model Name. :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2023-05-09
Test Mode:	Mode 1(Adapter 1)	Phase :	N
Test Voltage:	DC 5V from PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	35.05	9.93	44.98	66.00	-21.02	QP
0.1500	17.03	9.93	26.96	56.00	-29.04	AVG
0.1700	34.15	9.97	44.12	64.96	-20.84	QP
0.1700	16.23	9.97	26.20	54.96	-28.76	AVG
0.5620	33.98	10.77	44.75	56.00	-11.25	QP
0.5620	18.01	10.77	28.78	46.00	-17.22	AVG
0.6700	39.25	10.99	50.24	56.00	-5.76	QP
0.6700	26.50	10.99	37.49	46.00	-8.51	AVG
2.2740	32.23	9.66	41.89	56.00	-14.11	QP
2.2740	18.73	9.66	28.39	46.00	-17.61	AVG
19.4780	41.00	9.72	50.72	60.00	-9.28	QP
19.4780	25.18	9.72	34.90	50.00	-15.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

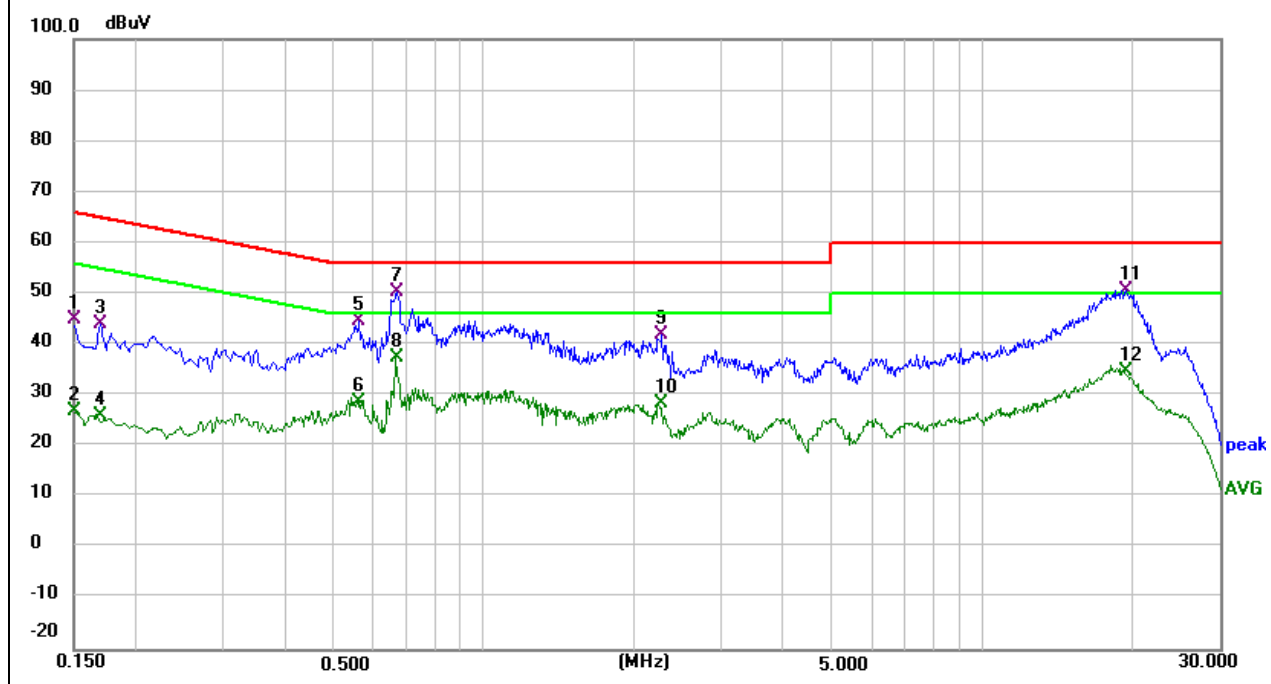


EUT:	Tablet	Model Name. :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2023-06-10
Test Mode:	Mode 1 (Adapter 2)	Phase :	L
Test Voltage:	DC 5V from PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1500	39.11	9.93	49.04	66.00	-16.96	QP
0.1500	26.04	9.93	35.97	56.00	-20.03	AVG
0.3020	35.30	10.24	45.54	60.19	-14.65	QP
0.3020	21.79	10.24	32.03	50.19	-18.16	AVG
0.5620	39.76	10.77	50.53	56.00	-5.47	QP
0.5620	24.61	10.77	35.38	46.00	-10.62	AVG
0.6660	41.04	10.99	52.03	56.00	-3.97	QP
0.6660	26.41	10.99	37.40	46.00	-8.60	AVG
1.4380	30.23	12.54	42.77	56.00	-13.23	QP
1.4380	15.63	12.54	28.17	46.00	-17.83	AVG
4.0939	32.79	9.67	42.46	56.00	-13.54	QP
4.0939	17.67	9.67	27.34	46.00	-18.66	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

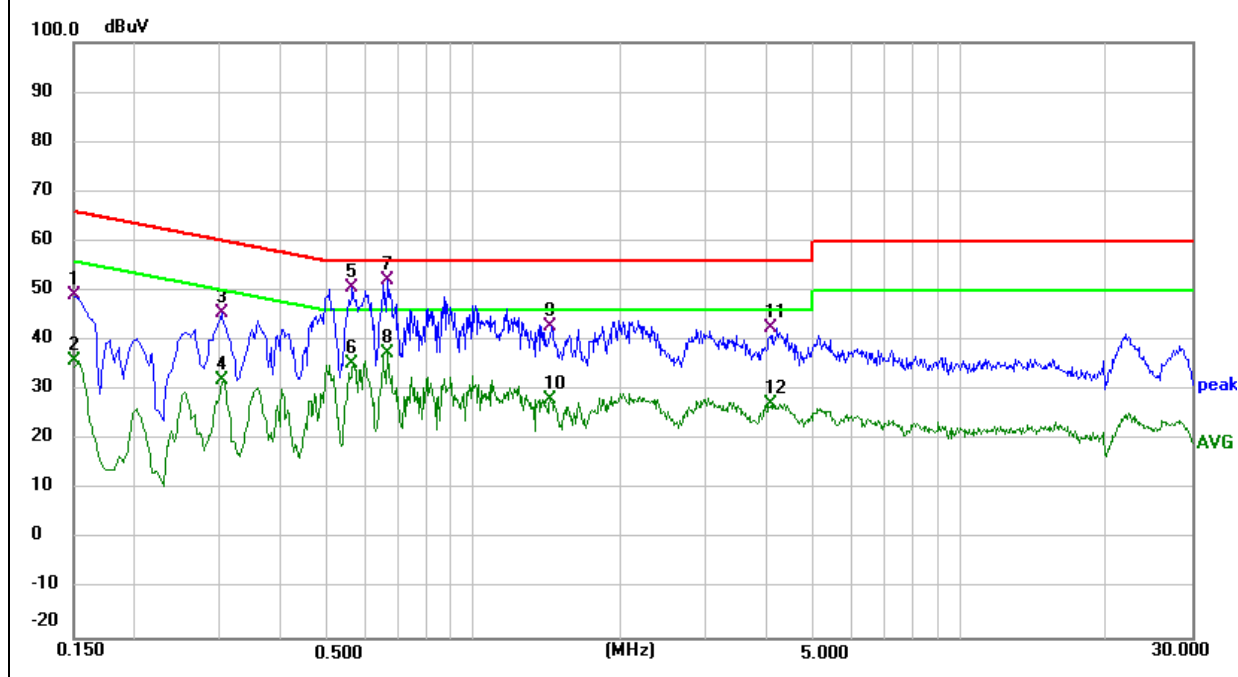


EUT:	Tablet	Model Name. :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2023-06-10
Test Mode:	Mode 1(Adapter 2)	Phase :	N
Test Voltage:	DC 5V from PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	42.16	9.93	52.09	66.00	-13.91	QP
0.1500	28.30	9.93	38.23	56.00	-17.77	AVG
0.1900	33.87	10.01	43.88	64.04	-20.16	QP
0.1900	18.67	10.01	28.68	54.04	-25.36	AVG
0.5060	33.99	10.67	44.66	56.00	-11.34	QP
0.5060	24.47	10.67	35.14	46.00	-10.86	AVG
0.5940	34.69	10.83	45.52	56.00	-10.48	QP
0.5940	24.67	10.83	35.50	46.00	-10.50	AVG
1.0859	30.21	11.84	42.05	56.00	-13.95	QP
1.0859	17.78	11.84	29.62	46.00	-16.38	AVG
2.1140	31.19	9.66	40.85	56.00	-15.15	QP
2.1140	17.07	9.66	26.73	46.00	-19.27	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

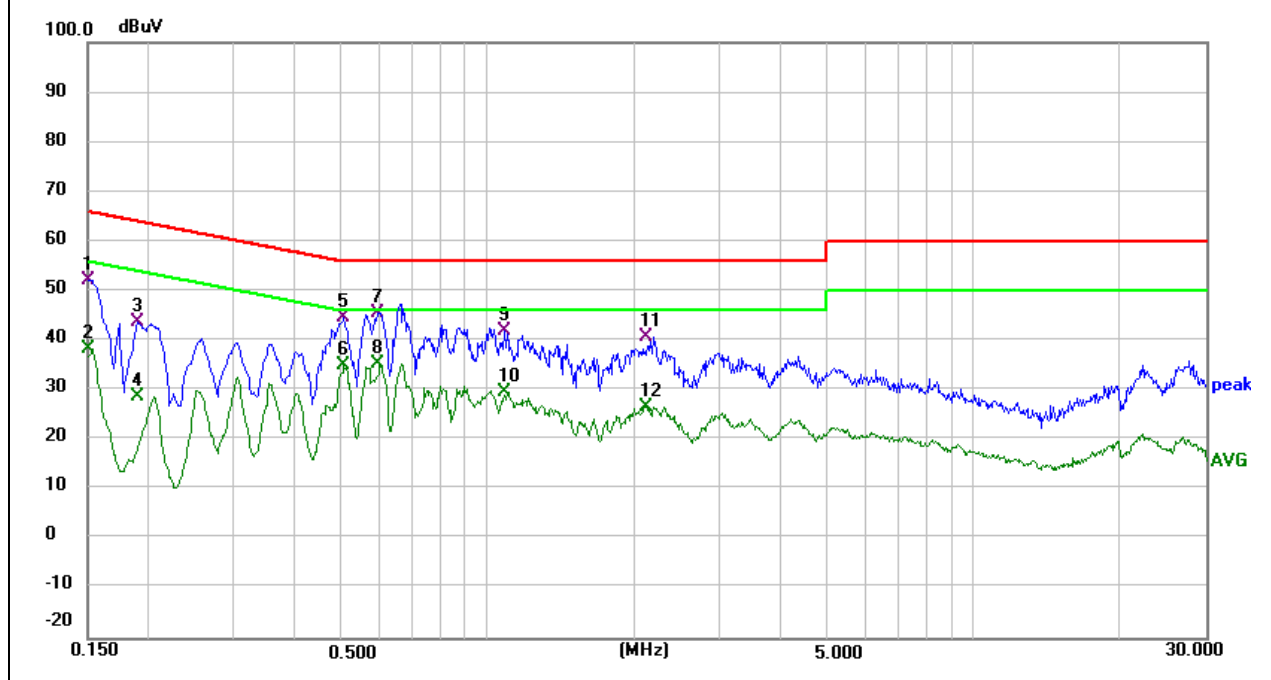



## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:  
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 3.2.2 TEST PROCEDURE

#### Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

#### Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report


During the radiated emission test, according to ANSI C63.4-2014(4.2), the Spectrum Analyzer was

set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Avg	1 MHz	10 Hz

### 3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

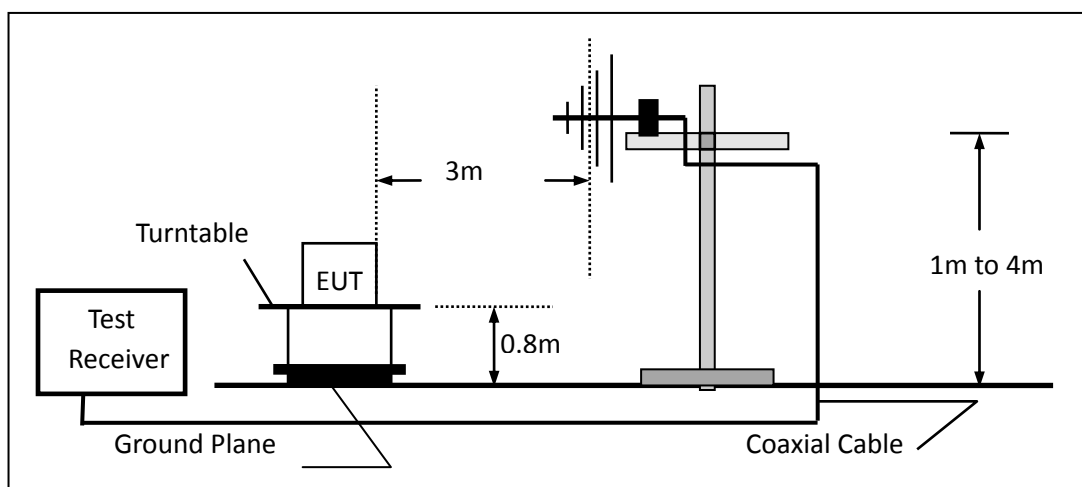

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

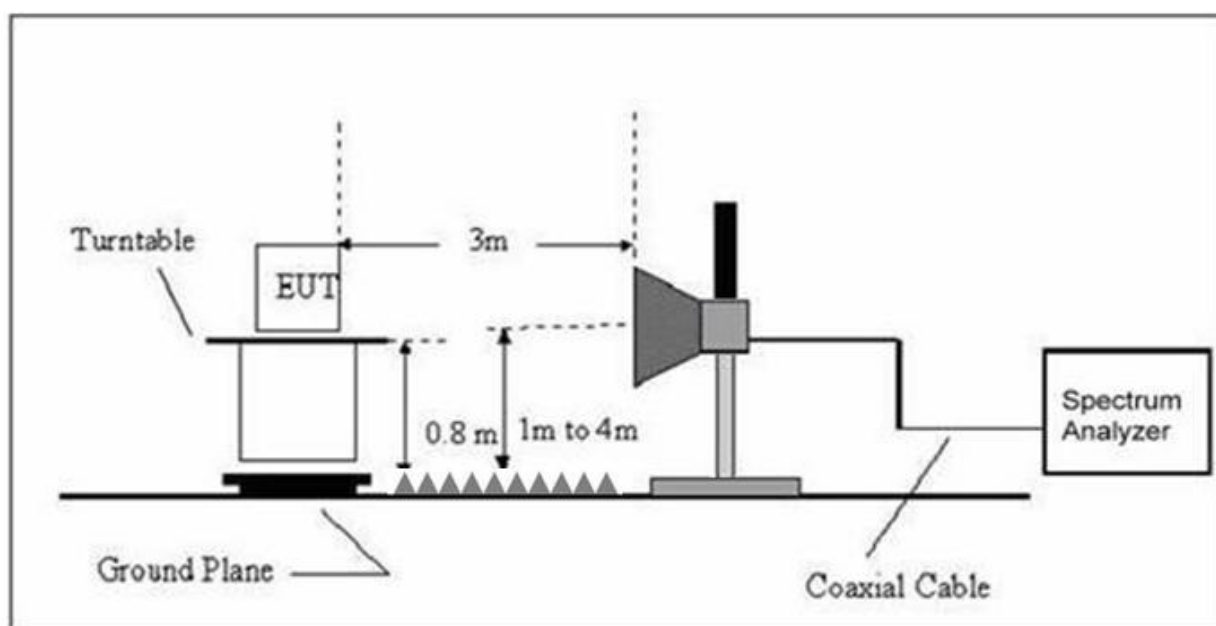

### 3.2.4 TEST RESULTS


#### TEST RESULTS (30~1000 MHz)

EUT:	Tablet	Model Name:	Pad 8
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2023-05-09
Test Mode :	Mode 1 (Adapter 1)	Polarization :	Horizontal
Test Power :	DC 5V from PC AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.1054	5.43	26.41	31.84	40.00	-8.16	QP
H	190.4050	10.69	16.46	27.15	43.50	-16.35	QP
H	393.4723	6.32	23.07	29.39	46.00	-16.61	QP
H	620.7096	7.93	26.75	34.68	46.00	-11.32	QP
H	763.3757	6.69	29.03	35.72	46.00	-10.28	QP
H	893.8567	7.28	30.72	38.00	46.00	-8.00	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

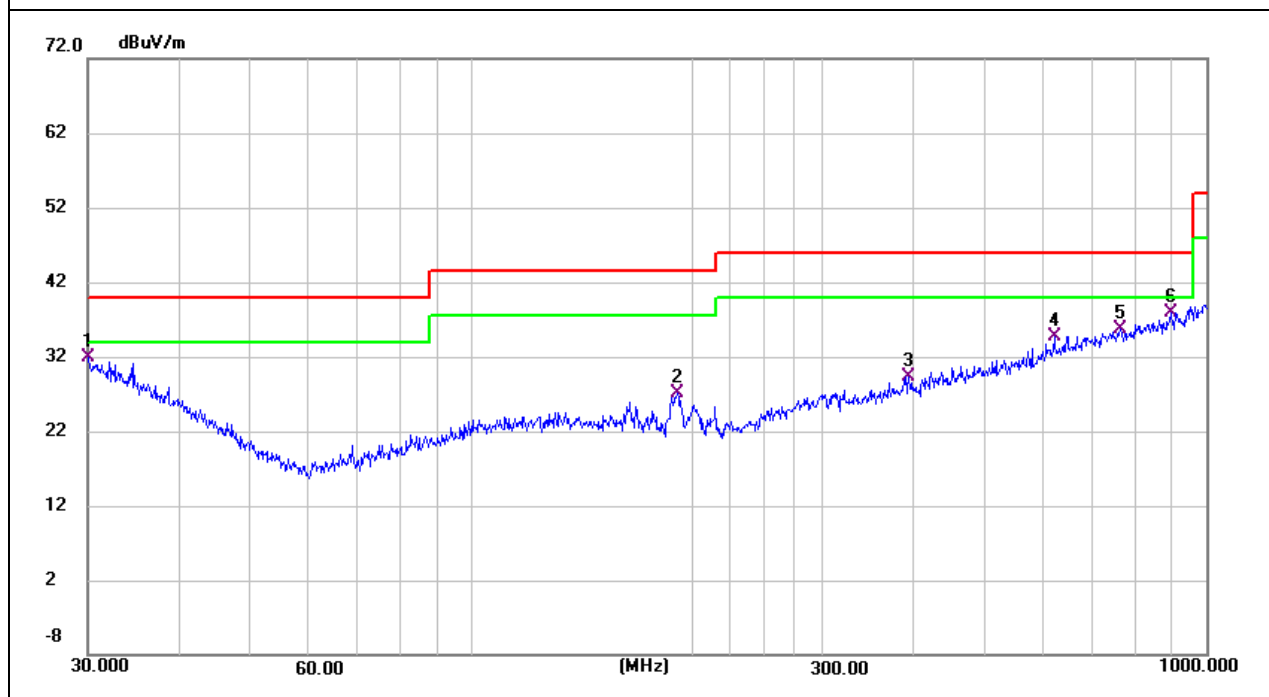


EUT:	Tablet	Model Name :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2023-05-09
Test Mode :	Mode 1 (Adapter 1)	Polarization :	Vertical
Test Power :	DC 5V from PC AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.4238	10.02	26.23	36.25	40.00	-3.75	QP
V	33.3278	7.83	24.63	32.46	40.00	-7.54	QP
V	76.2442	8.81	14.69	23.50	40.00	-16.50	QP
V	185.1379	11.99	16.65	28.64	43.50	-14.86	QP
V	758.0408	7.02	28.96	35.98	46.00	-10.02	QP
V	887.6100	6.64	30.65	37.29	46.00	-8.71	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

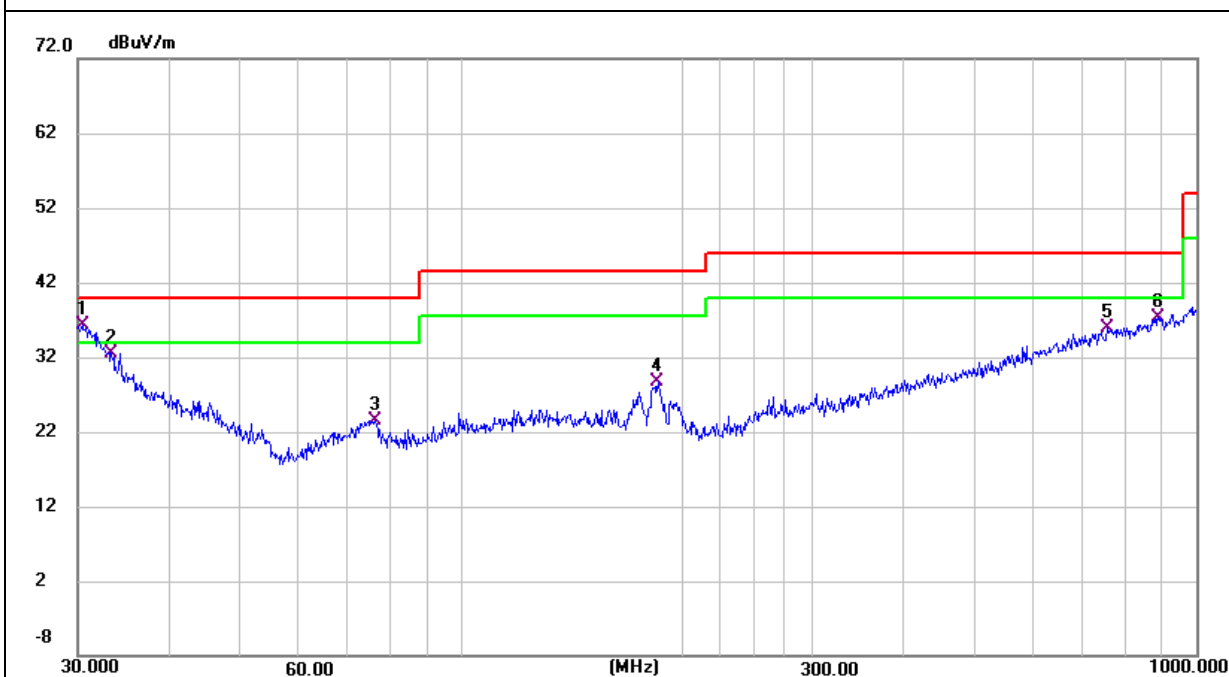


EUT:	Tablet	Model Name:	Pad 8
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2023-06-14
Test Mode :	Mode 1 (Adapter 2)	Polarization :	Horizontal
Test Power :	DC 5V from PC AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.6378	5.53	26.07	31.60	40.00	-8.40	QP
H	146.8877	11.77	18.58	30.35	43.50	-13.15	QP
H	186.4409	10.63	16.59	27.22	43.50	-16.28	QP
H	293.0842	9.99	20.11	30.10	46.00	-15.90	QP
H	694.4174	8.40	27.85	36.25	46.00	-9.75	QP
H	935.5463	7.04	31.19	38.23	46.00	-7.77	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

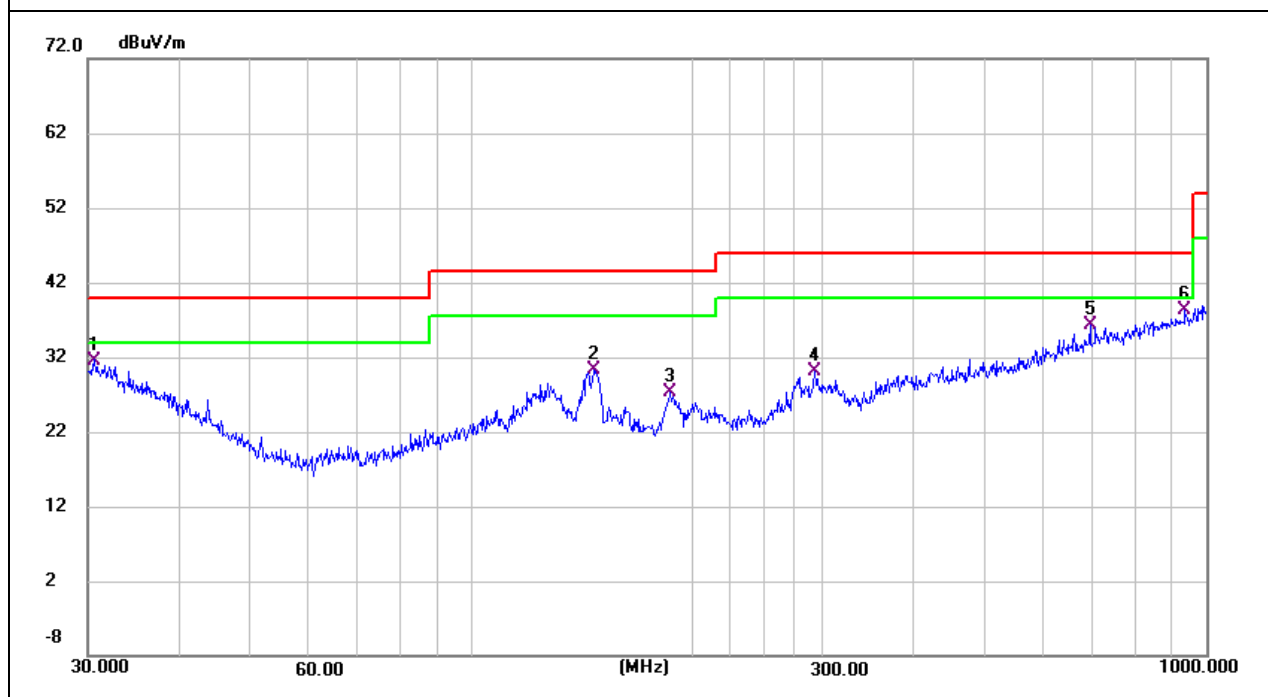


EUT:	Tablet	Model Name :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2023-06-14
Test Mode :	Mode 1 (Adapter 2)	Polarization :	Vertical
Test Power :	DC 5V from PC AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	41.7129	14.47	20.06	34.53	40.00	-5.47	QP
V	53.1313	15.50	13.78	29.28	40.00	-10.72	QP
V	147.4036	20.37	18.57	38.94	43.50	-4.56	QP
V	185.7882	15.13	16.62	31.75	43.50	-11.75	QP
V	552.8832	7.10	25.70	32.80	46.00	-13.20	QP
V	881.4067	7.33	30.56	37.89	46.00	-8.11	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

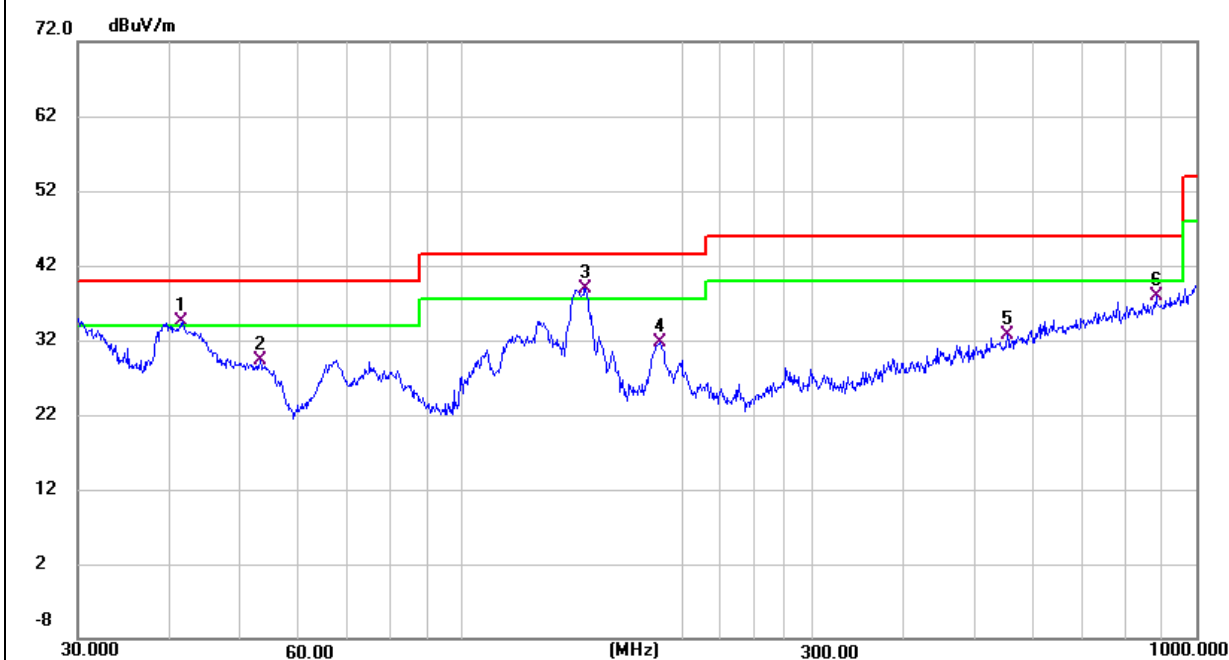

### 3.2.5 TEST RESULTS(1000~18000MHz)

EUT:	Tablet	Model Name :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2023-05-09
Test Mode :	Mode 1 (Adapter 1)		
Test Power :	DC 5V from PC AC 120V/60Hz		

All the modulation modes have been tested, and the worst result was report as below:

Polar (H/V)	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
V	7443.000	34.04	22.03	56.07	74.00	-17.93	peak
V	7443.000	18.20	22.03	40.23	54.00	-13.77	AVG
V	9517.000	32.79	24.75	57.54	74.00	-16.46	peak
V	9517.000	16.75	24.75	41.50	54.00	-12.50	AVG
V	11778.000	32.30	26.72	59.02	74.00	-14.98	peak
V	11778.000	16.43	26.72	43.15	54.00	-10.85	AVG
V	13971.000	33.07	28.29	61.36	74.00	-12.64	peak
V	13971.000	15.91	28.29	44.20	54.00	-9.80	AVG
V	15892.000	35.45	26.93	62.38	74.00	-11.62	peak
V	15892.000	18.23	26.93	45.16	54.00	-8.84	AVG
V	16861.000	35.49	27.41	62.90	74.00	-11.10	peak
V	16861.000	19.85	27.41	47.26	54.00	-6.74	AVG
H	5981.000	33.87	18.91	52.78	74.00	-21.22	peak
H	5981.000	19.39	18.91	38.30	54.00	-15.70	AVG
H	6780.000	33.34	21.07	54.41	74.00	-19.59	peak
H	6780.000	20.13	21.07	41.20	54.00	-12.80	AVG
H	7987.000	33.67	22.93	56.60	74.00	-17.40	peak
H	7987.000	18.63	22.93	41.56	54.00	-12.44	AVG
H	10724.000	32.86	26.13	58.99	74.00	-15.01	peak
H	10724.000	16.22	26.13	42.35	54.00	-11.65	AVG
H	13274.000	32.21	28.54	60.75	74.00	-13.25	peak
H	13274.000	15.03	28.54	43.57	54.00	-10.43	AVG
H	16827.000	35.41	27.40	62.81	74.00	-11.19	peak
H	16827.000	19.46	27.40	46.86	54.00	-7.14	AVG

EUT:	Tablet	Model Name :	Pad 8
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2023-06-13
Test Mode :	Mode 1 (Adapter 2)		
Test Power :	DC 5V from PC AC 120V/60Hz		

All the modulation modes have been tested, and the worst result was report as below:

Polar (H/V)	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
V	5420.000	33.26	14.14	47.40	74.00	-26.60	peak
V	5420.000	21.16	14.14	35.30	54.00	-18.70	AVG
V	7426.000	32.01	19.36	51.37	74.00	-22.63	peak
V	7426.000	19.08	19.36	38.44	54.00	-15.56	AVG
V	9109.000	31.17	21.12	52.29	74.00	-21.71	peak
V	9109.000	18.58	21.12	39.70	54.00	-14.30	AVG
V	11013.000	30.71	22.82	53.53	74.00	-20.47	peak
V	11013.000	17.32	22.82	40.14	54.00	-13.86	AVG
V	13988.000	29.71	25.83	55.54	74.00	-18.46	peak
V	13988.000	16.65	25.83	42.48	54.00	-11.52	AVG
V	17949.000	31.26	25.61	56.87	74.00	-17.13	peak
V	17949.000	17.26	25.61	42.87	54.00	-11.13	AVG
H	7120.000	32.40	19.09	51.49	74.00	-22.51	peak
H	7120.000	20.35	19.09	39.44	54.00	-14.56	AVG
H	8871.000	31.58	21.05	52.63	74.00	-21.37	peak
H	8871.000	19.17	21.05	40.22	54.00	-13.78	AVG
H	13410.000	30.26	25.37	55.63	74.00	-18.37	peak
H	13410.000	16.07	25.37	41.44	54.00	-12.56	AVG
H	15280.000	32.59	23.09	55.68	74.00	-18.32	peak
H	15280.000	19.41	23.09	42.50	54.00	-11.50	AVG
H	16759.000	32.46	22.63	55.09	74.00	-18.91	peak
H	16759.000	19.65	22.63	42.28	54.00	-11.72	AVG
H	18000.000	31.02	25.79	56.81	74.00	-17.19	peak
H	18000.000	17.35	25.79	43.14	54.00	-10.86	AVG

Remark:

Result = Reading + Correct, Over Limit= Result - Limit

Note: Only the worst results data points are reported in the report.

Other emissions are attenuated 20dB below the limit that does not recorded in the report.

END OF REPORT