

# FCC SAR EVALUATION REPORT

**In accordance with the requirements of  
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and  
IEEE Std 1528-2013**

**Product Name :** Tablet

**Trademark :** HOTWAV

**Model Name :** Pad 8

**Family Model :** P2203, Pad

**FCC ID :** 2AOKUPAD8

**Report No. :** S23050501503001

**Prepared for**

SHENZHEN TUGAO INTELLIGENT CO.,LTD  
8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,  
Bao'an District, Shenzhen, China

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,  
Bao'an District, Shenzhen 518126 P.R.China.  
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090  
Website: <http://www.ntek.org.cn>

**TEST RESULT CERTIFICATION**

**Applicant's name**..... SHENZHEN TUGAO INTELLIGENT CO.,LTD  
Address ..... 8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,  
Bao'an District, Shenzhen, China

**Manufacturer's Name**..... SHENZHEN TUGAO INTELLIGENT CO.,LTD  
Address ..... 8th Floor, Bldg A, Jinggang Science&Technology Park, Fuyong,  
Bao'an District, Shenzhen, China

**Product description**

Product name..... Tablet  
Trademark ..... HOTWAV  
Model Name ..... Pad 8  
Family Model..... P2203, Pad  
FCC 47 CFR Part 2(2.1093);  
ANSI/IEEE C95.1-1992

**Standards**..... IEEE Std 1528-2013;  
Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number ..... S230505015004

**Date of Test**

Date (s) of performance of tests..... May 06, 2023 ~ May 23, 2023

Date of Issue ..... Jun. 16, 2023

Test Result ..... **Pass**

Prepared By :  
(Test Engineer)

*Jack Li*

(Jack Li)

Approved By :  
(Lab Manager)

*Alex*

(Alex Li)

※ ※ Revision History ※ ※

| REV.    | DESCRIPTION                 | ISSUED DATE   | REMARK  |
|---------|-----------------------------|---------------|---------|
| Rev.1.0 | Initial Test Report Release | Jun. 16, 2023 | Jack Li |
|         |                             |               |         |
|         |                             |               |         |
|         |                             |               |         |

## TABLE OF CONTENTS

|                                                              |    |
|--------------------------------------------------------------|----|
| 1. General Information .....                                 | 6  |
| 1.1. RF exposure limits.....                                 | 6  |
| 1.2. Statement of Compliance .....                           | 7  |
| 1.3. EUT Description .....                                   | 7  |
| 1.4. Test specification(s) .....                             | 8  |
| 1.5. Ambient Condition.....                                  | 9  |
| 2. SAR Measurement System .....                              | 10 |
| 2.1. SATIMO SAR Measurement Set-up Diagram .....             | 10 |
| 2.2. Robot .....                                             | 11 |
| 2.3. E-Field Probe.....                                      | 12 |
| 2.3.1. E-Field Probe Calibration .....                       | 12 |
| 2.4. SAM phantoms .....                                      | 13 |
| 2.4.1. Technical Data .....                                  | 14 |
| 2.5. Device Holder .....                                     | 15 |
| 2.6. Test Equipment List .....                               | 16 |
| 3. SAR Measurement Procedures .....                          | 19 |
| 3.1. Power Reference .....                                   | 19 |
| 3.2. Area scan & Zoom scan.....                              | 19 |
| 3.3. Description of interpolation/extrapolation scheme ..... | 21 |
| 3.4. Volumetric Scan .....                                   | 21 |
| 3.5. Power Drift .....                                       | 21 |
| 4. System Verification Procedure .....                       | 22 |
| 4.1. Tissue Verification .....                               | 22 |
| 4.1.1. Tissue Dielectric Parameter Check Results .....       | 23 |
| 4.2. System Verification Procedure .....                     | 24 |
| 4.2.1. System Verification Results.....                      | 25 |
| 5. SAR Measurement variability and uncertainty .....         | 26 |
| 5.1. SAR measurement variability.....                        | 26 |
| 5.2. SAR measurement uncertainty .....                       | 26 |
| 6. RF Exposure Positions .....                               | 27 |
| 6.1. Tablet host platform exposure conditions.....           | 27 |
| 7. RF Output Power .....                                     | 28 |
| 7.1. GSM Conducted Power .....                               | 28 |
| 7.2. WCDMA Conducted Power .....                             | 29 |
| 7.3. LTE Conducted Power .....                               | 29 |
| 7.4. WLAN & Bluetooth Output Power .....                     | 44 |
| 7.4.1. Output Power Results Of WLAN .....                    | 44 |
| 7.4.2. Output Power Results Of Bluetooth .....               | 45 |
| 8. Antenna Location.....                                     | 47 |
| 9. Stand-alone SAR test exclusion.....                       | 56 |

|          |                                                |     |
|----------|------------------------------------------------|-----|
| 10.      | SAR Results .....                              | 56  |
| 10.1.    | SAR measurement results.....                   | 56  |
| 10.1.1.  | SAR measurement Result of GSM850.....          | 56  |
| 10.1.2.  | SAR measurement Result of GSM1900.....         | 57  |
| 10.1.3.  | SAR measurement Result of WCDMA Band 2.....    | 58  |
| 10.1.4.  | SAR measurement Result of WCDMA Band 5.....    | 59  |
| 10.1.5.  | SAR measurement Result of LTE Band 2 .....     | 59  |
| 10.1.6.  | SAR measurement Result of LTE Band 5 .....     | 61  |
| 10.1.7.  | SAR measurement Result of LTE Band 7 .....     | 62  |
| 10.1.8.  | SAR measurement Result of LTE Band 12 .....    | 63  |
| 10.1.9.  | SAR measurement Result of LTE Band 17 .....    | 64  |
| 10.1.10. | SAR measurement Result of LTE Band 38 .....    | 65  |
| 10.1.11. | SAR measurement Result of LTE Band 40A.....    | 67  |
| 10.1.12. | SAR measurement Result of LTE Band 40B .....   | 68  |
| 10.1.13. | SAR measurement Result of LTE Band 41 .....    | 69  |
| 10.1.14. | SAR measurement Result of WLAN 2.4G .....      | 70  |
| 10.1.15. | SAR measurement Result of WLAN 5.2G .....      | 70  |
| 10.1.16. | SAR measurement Result of WLAN 5.8G .....      | 71  |
| 10.2.    | SAR Summation Scenario.....                    | 72  |
| 11.      | Appendix A. Photo documentation .....          | 73  |
| 12.      | Appendix B. System Check Plots.....            | 74  |
| 13.      | Appendix C. Plots of High SAR Measurement..... | 93  |
| 14.      | Appendix D. Calibration Certificate .....      | 126 |

## 1. General Information

### 1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4        | 8.0          | 20.0                           |

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08       | 1.6          | 4.0                            |

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

#### General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE  
TRUNK LIMIT  
1.6 W/kg  
APPLIED TO THIS EUT

## 1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Pad 8 are as follows.

| RF Exposure Conditions                     |           | Max Reported SAR Value(W/kg) |
|--------------------------------------------|-----------|------------------------------|
| 1-g Body-Worn (Separation distance of 0mm) |           | 1.195                        |
| 1-g Hotspot (Separation distance of 0mm)   |           | 1.195                        |
| Max Simultaneous Tx                        | Body-Worn | 1.408                        |
|                                            | Hotspot   | 1.408                        |

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

## 1.3. EUT Description

| Device Information              |                                                                                                       |           |           |
|---------------------------------|-------------------------------------------------------------------------------------------------------|-----------|-----------|
| Product Name                    | Tablet                                                                                                |           |           |
| Trade Name                      | HOTWAV                                                                                                |           |           |
| Model Name                      | Pad 8                                                                                                 |           |           |
| Family Model                    | P2203, Pad                                                                                            |           |           |
| Model Difference                | All the model are the same circuit and RF module,except the model names.                              |           |           |
| FCC ID                          | 2AOKUPAD8                                                                                             |           |           |
| Device Phase                    | Identical Prototype                                                                                   |           |           |
| Exposure Category               | General population / Uncontrolled environment                                                         |           |           |
| Antenna                         | PIFA Antenna                                                                                          |           |           |
| Battery                         | DC 3.8V, 7500mAh                                                                                      |           |           |
| Hardware version                | KEP_P30A_V1.0                                                                                         |           |           |
| Software version                | HOTWAV_Pad 8_V01_20230525                                                                             |           |           |
| Device Operating Configurations |                                                                                                       |           |           |
| Supporting Mode(s)              | GSM 850/1900, WCDMA Band 2/4/5, LTE Band 2/5/7/12/17/38/40A/40B/41, WLAN 2.4G/5G, Bluetooth           |           |           |
| Test Modulation                 | GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK) |           |           |
| Device Class                    | B                                                                                                     |           |           |
| Operating Frequency Range(s)    | Band                                                                                                  | Tx (MHz)  | Rx (MHz)  |
|                                 | GSM 850                                                                                               | 824-849   | 869-894   |
|                                 | GSM 1900                                                                                              | 1850-1910 | 1930-1990 |
|                                 | WCDMA Band 2                                                                                          | 1850-1910 | 1930-1990 |
|                                 | WCDMA Band 5                                                                                          | 824-849   | 869-894   |

|                           |                                                     |           |           |
|---------------------------|-----------------------------------------------------|-----------|-----------|
|                           | LTE Band 2                                          | 1850-1910 | 1930-1990 |
|                           | LTE Band 5                                          | 824-849   | 869-894   |
|                           | LTE Band 7                                          | 2500-2570 | 2620-2690 |
|                           | LTE Band 12                                         | 699-716   | 729-746   |
|                           | LTE Band 17                                         | 704-716   | 734-746   |
|                           | LTE Band 38                                         | 2570-2620 |           |
|                           | LTE Band 40A                                        | 2305-2315 |           |
|                           | LTE Band 40B                                        | 2350-2360 |           |
|                           | LTE Band 41                                         | 2540-2650 |           |
|                           | WLAN 2.4G                                           | 2412-2462 |           |
|                           | WLAN 5.2G                                           | 5180-5240 |           |
|                           | WLAN 5.8G                                           | 5745-5825 |           |
|                           | Bluetooth                                           | 2402-2480 |           |
| GPRS Multislot Class(12)  | Max Number of Timeslots in Uplink                   |           | 4         |
|                           | Max Number of Timeslots in Downlink                 |           | 4         |
|                           | Max Total Timeslot                                  |           | 5         |
| EGPRS Multislot Class(12) | Max Number of Timeslots in Uplink                   |           | 4         |
|                           | Max Number of Timeslots in Downlink                 |           | 4         |
|                           | Max Total Timeslot                                  |           | 5         |
| Power Class               | 4, tested with power level 5(GSM 850)               |           |           |
|                           | 1, tested with power level 0(GSM 1900)              |           |           |
|                           | 3, tested with power control "all 1"(WCDMA Band 2)  |           |           |
|                           | 3, tested with power control "all 1"(WCDMA Band 5)  |           |           |
|                           | 3, tested with power control all Max.(LTE Band 2)   |           |           |
|                           | 3, tested with power control all Max.(LTE Band 5)   |           |           |
|                           | 3, tested with power control all Max.(LTE Band 7)   |           |           |
|                           | 3, tested with power control all Max.(LTE Band 12)  |           |           |
|                           | 3, tested with power control all Max.(LTE Band 17)  |           |           |
|                           | 3, tested with power control all Max.(LTE Band 38)  |           |           |
|                           | 3, tested with power control all Max.(LTE Band 40A) |           |           |
|                           | 3, tested with power control all Max.(LTE Band 40B) |           |           |
|                           | 3, tested with power control all Max.(LTE Band 41)  |           |           |

#### 1.4. Test specification(s)

|                                                 |
|-------------------------------------------------|
| FCC 47 CFR Part 2(2.1093)                       |
| ANSI/IEEE C95.1-1992                            |
| IEEE Std 1528-2013                              |
| KDB 865664 D01 SAR measurement 100 MHz to 6 GHz |
| KDB 865664 D02 RF Exposure Reporting            |

|                                             |
|---------------------------------------------|
| KDB 447498 D01 General RF Exposure Guidance |
|---------------------------------------------|

|                                 |
|---------------------------------|
| KDB 248227 D01 802.11 Wi-Fi SAR |
|---------------------------------|

|                                  |
|----------------------------------|
| KDB 941225 D01 3G SAR Procedures |
|----------------------------------|

|                                    |
|------------------------------------|
| KDB 941225 D05 SAR for LTE Devices |
|------------------------------------|


|                                           |
|-------------------------------------------|
| KDB 616217 D04 SAR for laptop and tablets |
|-------------------------------------------|

### 1.5. Ambient Condition

|                     |             |
|---------------------|-------------|
| Ambient temperature | 20°C – 24°C |
| Relative Humidity   | 30% – 70%   |

## 2. SAR Measurement System

### 2.1. SATIMO SAR Measurement Set-up Diagram

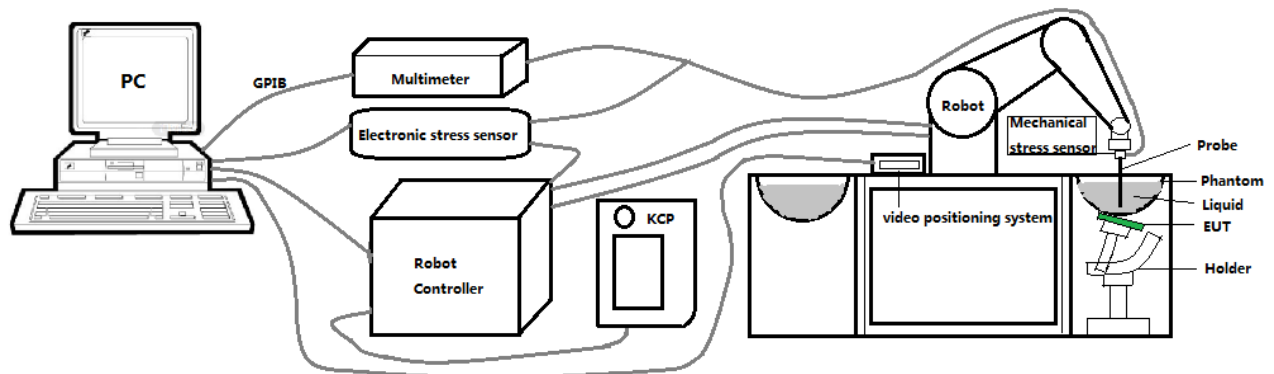

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than  $\pm 0.03$  mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

## 2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability  $\pm 0.03$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

### 2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 2.5 mm
- Distance between probe tip and sensor center: 1 mm
- Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than  $\pm 1$  mm).
- Probe linearity:  $\pm 0.08$  dB
- Axial isotropy:  $\pm 0.01$  dB
- Hemispherical Isotropy:  $\pm 0.01$  dB
- Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
- Lower detection limit: 8mW/kg

Angle between probe axis (evaluation axis) and surface normal line: less than  $30^\circ$ .

#### 2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

## 2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

### 2.4.1. Technical Data

| Serial Number   | Shell thickness | Filling volume | Dimensions                                      | Positionner Material    | Permittivity | Loss Tangent |
|-----------------|-----------------|----------------|-------------------------------------------------|-------------------------|--------------|--------------|
| SN 16/15 SAM119 | 2 mm ±0.2 mm    | 27 liters      | Length:1000 mm<br>Width:500 mm<br>Height:200 mm | Gelcoat with fiberglass | 3.4          | 0.02         |

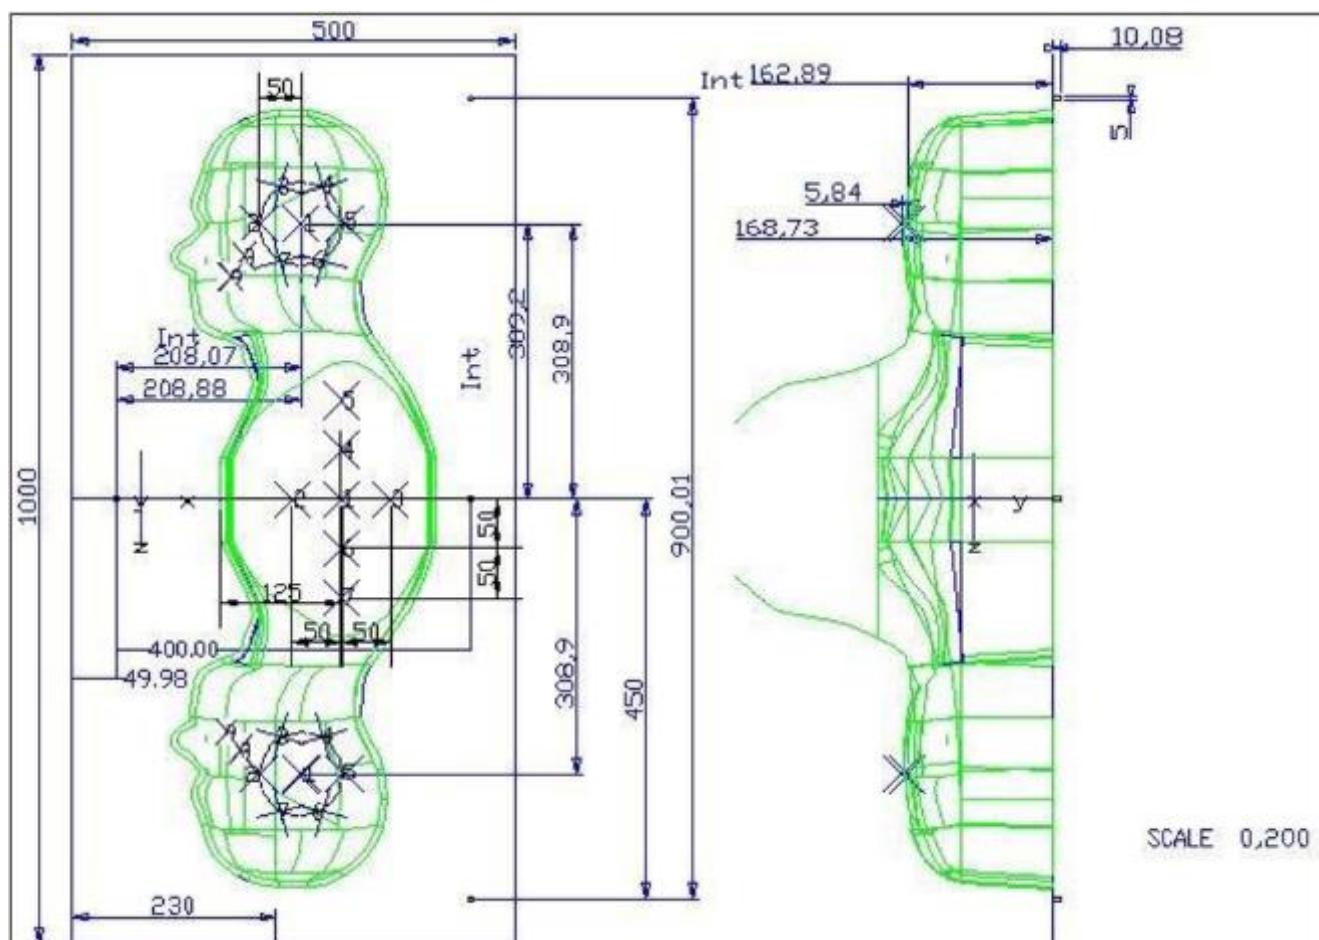


| Serial Number   | Left Head(mm) |      | Right Head(mm) |      | Flat Part(mm) |      |
|-----------------|---------------|------|----------------|------|---------------|------|
| SN 16/15 SAM119 | 2             | 2.02 | 2              | 2.08 | 1             | 2.09 |
|                 | 3             | 2.05 | 3              | 2.06 | 2             | 2.06 |
|                 | 4             | 2.07 | 4              | 2.07 | 3             | 2.08 |
|                 | 5             | 2.08 | 5              | 2.08 | 4             | 2.10 |
|                 | 6             | 2.05 | 6              | 2.07 | 5             | 2.10 |
|                 | 7             | 2.05 | 7              | 2.05 | 6             | 2.07 |
|                 | 8             | 2.07 | 8              | 2.06 | 7             | 2.07 |
|                 | 9             | 2.08 | 9              | 2.06 | -             | -    |

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10  $\mu\text{m}$ .

## 2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

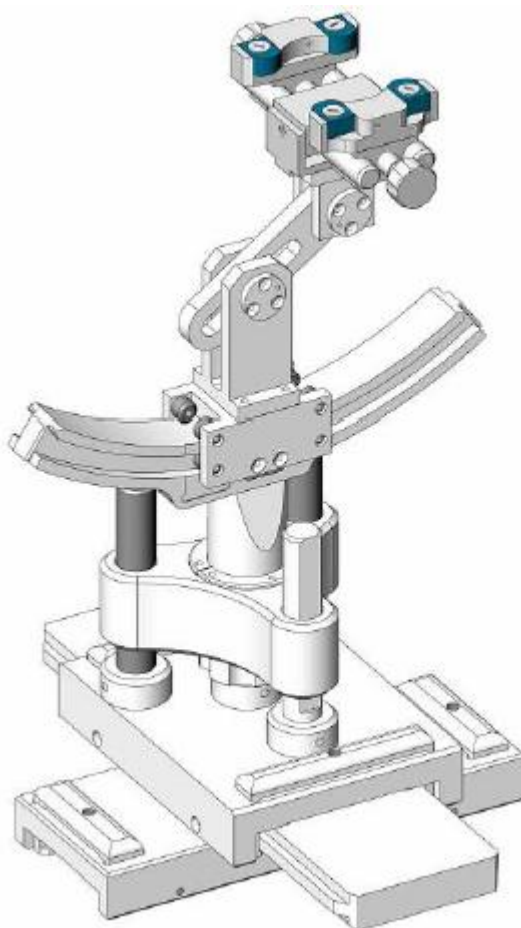

| Serial Number   | Holder Material | Permittivity | Loss Tangent |
|-----------------|-----------------|--------------|--------------|
| SN 16/15 MSH100 | Delrin          | 3.7          | 0.005        |

## 2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

|                                     | Manufacturer | Name of Equipment                    | Type/Model | Serial Number             | Calibration   |               |
|-------------------------------------|--------------|--------------------------------------|------------|---------------------------|---------------|---------------|
|                                     |              |                                      |            |                           | Last Cal.     | Due Date      |
| <input checked="" type="checkbox"/> | MVG          | E FIELD PROBE                        | SSE2       | SN 08/16 EPGO287          | Jan. 10, 2023 | Jan. 09, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 750 MHz Dipole                       | SID750     | SN 03/15 DIP<br>0G750-355 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 835 MHz Dipole                       | SID835     | SN 03/15 DIP<br>0G835-347 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input type="checkbox"/>            | MVG          | 900 MHz Dipole                       | SID900     | SN 03/15 DIP<br>0G900-348 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 1800 MHz Dipole                      | SID1800    | SN 03/15 DIP<br>1G800-349 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 1900 MHz Dipole                      | SID1900    | SN 03/15 DIP<br>1G900-350 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input type="checkbox"/>            | MVG          | 2000 MHz Dipole                      | SID2000    | SN 03/15 DIP<br>2G000-351 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 2300 MHz Dipole                      | SID2300    | SN 03/16 DIP<br>2G300-358 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 2450 MHz Dipole                      | SID2450    | SN 03/15 DIP<br>2G450-352 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 2600 MHz Dipole                      | SID2600    | SN 03/15 DIP<br>2G600-356 | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | 5000 MHz Dipole                      | SWG5500    | SN 13/14 WGA 33           | Mar. 01, 2021 | Feb. 28, 2024 |
| <input checked="" type="checkbox"/> | MVG          | Liquid measurement Kit               | SCLMP      | SN 21/15 OCPG 72          | NCR           | NCR           |
| <input checked="" type="checkbox"/> | MVG          | Power Amplifier                      | N.A        | AMPLISAR_28/14_003        | NCR           | NCR           |
| <input checked="" type="checkbox"/> | KEITHLEY     | Millivoltmeter                       | 2000       | 4072790                   | NCR           | NCR           |
| <input checked="" type="checkbox"/> | R&S          | Universal radio communication tester | CMU200     | 117858                    | Jun. 17, 2022 | Jun. 16, 2023 |
| <input checked="" type="checkbox"/> | R&S          | Wideband radio communication tester  | CMW500     | 103917                    | Jun. 17, 2022 | Jun. 16, 2023 |
| <input checked="" type="checkbox"/> | HP           | Network Analyzer                     | 8753D      | 3410J01136                | Jun. 17, 2022 | Jun. 16, 2023 |

|                                     |                                                                |                                |           |                 |                  |                  |
|-------------------------------------|----------------------------------------------------------------|--------------------------------|-----------|-----------------|------------------|------------------|
| <input checked="" type="checkbox"/> | Agilent                                                        | MXG Vector<br>Signal Generator | N5182A    | MY47070317      | Jun. 16,<br>2022 | Jun. 15,<br>2023 |
| <input checked="" type="checkbox"/> | Agilent                                                        | Power meter                    | E4419B    | MY45102538      | Jun. 17,<br>2022 | Jun. 16,<br>2023 |
| <input checked="" type="checkbox"/> | Agilent                                                        | Power sensor                   | E9301A    | MY41495644      | Jun. 17,<br>2022 | Jun. 16,<br>2023 |
| <input checked="" type="checkbox"/> | Agilent                                                        | Power sensor                   | E9301A    | US39212148      | Jun. 17,<br>2022 | Jun. 16,<br>2023 |
| <input checked="" type="checkbox"/> | MCLI/USA                                                       | Directional<br>Coupler         | CB11-20   | 0D2L51502       | Jul. 17,<br>2020 | Jul. 16,<br>2023 |
| <input checked="" type="checkbox"/> | N/A                                                            | Thermometer                    | N/A       | LES-085         | Mar. 27,<br>2023 | Mar. 26,<br>2026 |
| <input checked="" type="checkbox"/> | MVG                                                            | SAM Phantom                    | SSM2      | SN 16/15 SAM119 | NCR              | NCR              |
| <input checked="" type="checkbox"/> | MVG                                                            | Device Holder                  | SMPPD     | SN 16/15 MSH100 | NCR              | NCR              |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid     | Head 750  | Head 750        | NCR              | NCR              |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid     | Head 835  | Head 835        | NCR              | NCR              |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid     | Head 1800 | Head 1800       | NCR              | NCR              |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid     | Head 1900 | Head 1900       | NCR              | NCR              |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid     | Head 2300 | Head 2300       | NCR              | NCR              |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu                                             | Human<br>Simulating Liquid     | Head 2450 | Head 2450       | NCR              | NCR              |

|                                     |                                                                |                            |           |           |     |     |
|-------------------------------------|----------------------------------------------------------------|----------------------------|-----------|-----------|-----|-----|
|                                     | Communication<br>Technology<br>Co., Ltd.                       |                            |           |           |     |     |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid | Head 2600 | Head 2600 | NCR | NCR |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid | Head 5200 | Head 5200 | NCR | NCR |
| <input checked="" type="checkbox"/> | Shenzhen<br>Tianxu<br>Communication<br>Technology<br>Co., Ltd. | Human<br>Simulating Liquid | Head 5800 | Head 5800 | NCR | NCR |

### 3. SAR Measurement Procedures

The measurement procedures are as follows:

#### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

#### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

#### 3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### 3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

|                                                                                                        |                                           |                                                                                             | ≤ 3 GHz                                                                                                                                                                                                                                                           | > 3 GHz                                                                                                                          |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface |                                           |                                                                                             | 5 ± 1 mm                                                                                                                                                                                                                                                          | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$                                                                       |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              |                                           |                                                                                             | 30° ± 1°                                                                                                                                                                                                                                                          | 20° ± 1°                                                                                                                         |
| Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$                 |                                           |                                                                                             | $\leq 2 \text{ GHz: } \leq 15 \text{ mm}$<br>$2 - 3 \text{ GHz: } \leq 12 \text{ mm}$                                                                                                                                                                             | $3 - 4 \text{ GHz: } \leq 12 \text{ mm}$<br>$4 - 6 \text{ GHz: } \leq 10 \text{ mm}$                                             |
|                                                                                                        |                                           |                                                                                             | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                                                                                  |
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$                 |                                           |                                                                                             | $\leq 2 \text{ GHz: } \leq 8 \text{ mm}$<br>$2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$                                                                                                                                                                             | $3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$<br>$4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$                                           |
| Maximum zoom scan spatial resolution, normal to phantom surface                                        | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |                                                                                             | ≤ 5 mm                                                                                                                                                                                                                                                            | $3 - 4 \text{ GHz: } \leq 4 \text{ mm}$<br>$4 - 5 \text{ GHz: } \leq 3 \text{ mm}$<br>$5 - 6 \text{ GHz: } \leq 2 \text{ mm}$    |
|                                                                                                        | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | ≤ 4 mm                                                                                                                                                                                                                                                            | $3 - 4 \text{ GHz: } \leq 3 \text{ mm}$<br>$4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$<br>$5 - 6 \text{ GHz: } \leq 2 \text{ mm}$  |
|                                                                                                        |                                           | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | ≤ 1.5 · $\Delta z_{\text{Zoom}}(n-1)$                                                                                                                                                                                                                             |                                                                                                                                  |
| Minimum zoom scan volume                                                                               | x, y, z                                   |                                                                                             | ≥ 30 mm                                                                                                                                                                                                                                                           | $3 - 4 \text{ GHz: } \geq 28 \text{ mm}$<br>$4 - 5 \text{ GHz: } \geq 25 \text{ mm}$<br>$5 - 6 \text{ GHz: } \geq 22 \text{ mm}$ |

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

### 3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

### 3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

### 3.5. Power Drift

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than  $\pm 5\%$ , the SAR will be retested.

## 4. System Verification Procedure

### 4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Ingredients (% of weight) | Head Tissue |       |       |       |       |       |       |       |       |
|---------------------------|-------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Frequency Band (MHz)      | 750         | 835   | 900   | 1800  | 1900  | 2000  | 2450  | 2600  | 5000  |
| Water                     | 34.40       | 34.40 | 34.40 | 55.36 | 55.36 | 71.88 | 71.88 | 71.88 | 65.53 |
| NaCl                      | 0.79        | 0.79  | 0.79  | 0.35  | 0.35  | 0.16  | 0.16  | 0.16  | 0.00  |
| 1,2-Propanediol           | 64.81       | 64.81 | 64.81 | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  | 0.00  |
| Triton X-100              | 0.00        | 0.00  | 0.00  | 30.45 | 30.45 | 19.97 | 19.97 | 19.97 | 17.24 |
| DGBE                      | 0.00        | 0.00  | 0.00  | 13.84 | 13.84 | 7.99  | 7.99  | 7.99  | 0.00  |

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

| Photo of Liquid depth for Head Position                                             | Photo of Liquid depth for Body Position                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |

#### 4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.


| Tissue Type | Measured Frequency (MHz) | Target Tissue          |                              | Measured Tissue |                | Liquid Temp. | Test Date     |
|-------------|--------------------------|------------------------|------------------------------|-----------------|----------------|--------------|---------------|
|             |                          | $\epsilon_r (\pm 5\%)$ | $\sigma$ (S/m) ( $\pm 5\%$ ) | $\epsilon_r$    | $\sigma$ (S/m) |              |               |
| Head 750    | 750                      | 41.96<br>(39.86~44.06) | 0.89<br>(0.85~0.93)          | 40.46           | 0.90           | 21.5 °C      | May. 11, 2023 |
| Head 850    | 835                      | 41.50<br>(39.43~43.58) | 0.90<br>(0.86~0.95)          | 40.85           | 0.91           | 21.5 °C      | May. 22, 2023 |
| Head 1800   | 1800                     | 40.00<br>(38.00~42.00) | 1.40<br>(1.33~1.47)          | 38.94           | 1.41           | 21.7 °C      | May. 12, 2023 |
| Head 1900   | 1900                     | 40.00<br>(38.00~42.00) | 1.40<br>(1.33~1.47)          | 38.26           | 1.46           | 21.5 °C      | May. 23, 2023 |
| Head 2300   | 2300                     | 39.47<br>(37.50~41.44) | 1.66<br>(1.58~1.74)          | 37.56           | 1.71           | 21.7 °C      | May. 16, 2023 |
| Head 2450   | 2450                     | 39.20<br>(37.24~41.16) | 1.80<br>(1.71~1.89)          | 38.07           | 1.77           | 21.5 °C      | May. 06, 2023 |
| Head 2600   | 2600                     | 39.01<br>(37.06~40.96) | 1.96<br>(1.86~2.06)          | 38.10           | 1.99           | 21.4 °C      | May. 17, 2023 |
| Head 5200   | 5200                     | 36.00<br>(34.20~37.80) | 4.66<br>(4.43~4.89)          | 35.39           | 4.60           | 21.5 °C      | May. 18, 2023 |
| Head 5800   | 5800                     | 35.30<br>(33.54~37.07) | 5.27<br>(5.01~5.53)          | 33.97           | 5.10           | 21.9 °C      | May. 19, 2023 |

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

## 4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

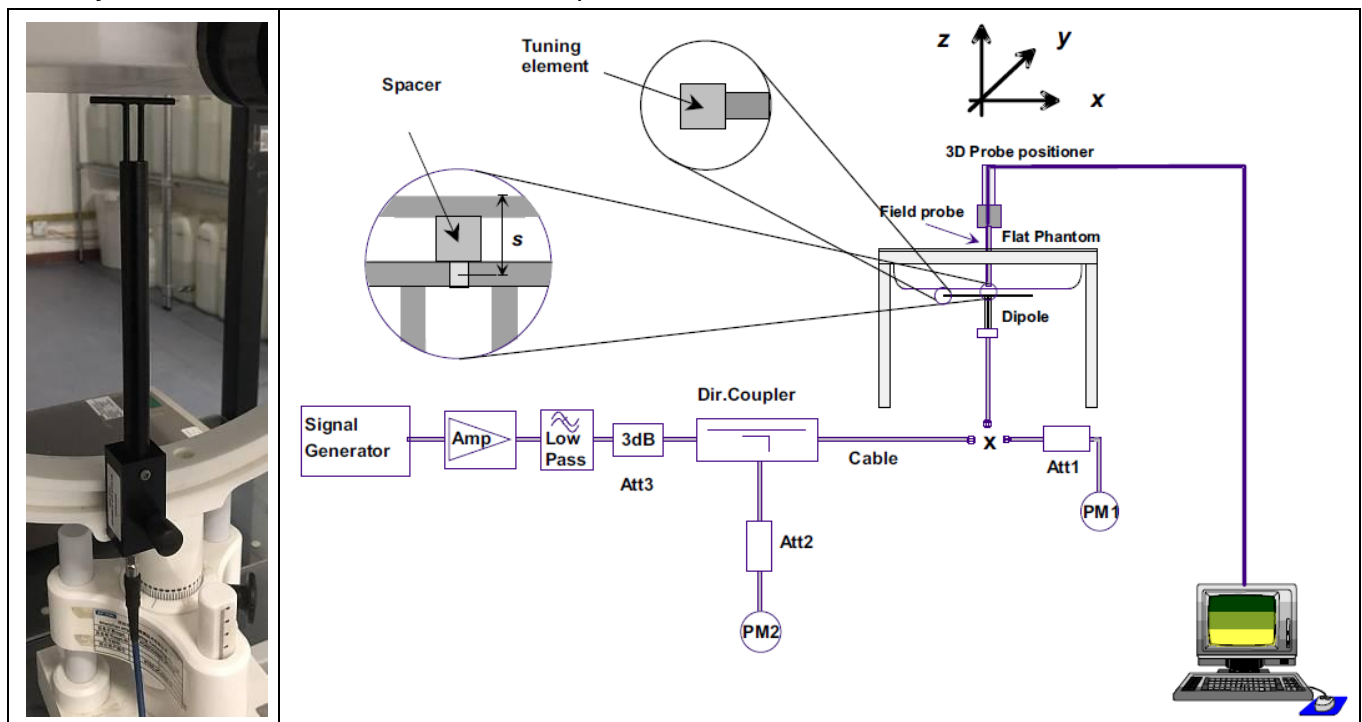

### 4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of  $\pm 10\%$ . Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

| System Verification | Target SAR (1W) |               | Measured SAR       |             | Liquid Temp. | Delta (%)  |             | Test Date     |
|---------------------|-----------------|---------------|--------------------|-------------|--------------|------------|-------------|---------------|
|                     | (±10%)          |               | (Normalized to 1W) |             |              |            |             |               |
|                     | 1-g (W/Kg)      | 10-g (W/Kg)   | 1-g (W/Kg)         | 10-g (W/Kg) |              | 1-g (±10%) | 10-g (±10%) |               |
| 750MHz              | 8.53            | 5.56          | 8.75               | 5.69        | 21.5 °C      | 2.58%      | 2.34%       | May. 11, 2023 |
|                     | (7.68~9.38)     | (5.01~6.11)   |                    |             |              |            |             |               |
| 835MHz              | 9.84            | 6.22          | 9.33               | 5.89        | 21.5 °C      | -5.18%     | -5.31%      | May. 22, 2023 |
|                     | (8.86~10.82)    | (5.60~6.84)   |                    |             |              |            |             |               |
| 1800MHz             | 37.96           | 19.81         | 38.84              | 19.4        | 21.7 °C      | 2.32%      | -2.07%      | May. 12, 2023 |
|                     | (34.17~41.75)   | (17.83~21.79) |                    |             |              |            |             |               |
| 1900MHz             | 40.37           | 20.48         | 43.10              | 20.85       | 21.5 °C      | 7.26%      | 1.81%       | May. 23, 2023 |
|                     | (36.34~44.40)   | (18.44~22.52) |                    |             |              |            |             |               |
| 2300MHz             | 50.65           | 23.55         | 50.35              | 23.59       | 21.7 °C      | -0.59%     | 0.17%       | May. 16, 2023 |
|                     | (45.59~55.71)   | (21.20~25.90) |                    |             |              |            |             |               |
| 2450MHz             | 53.69           | 23.94         | 58.62              | 25.84       | 21.5 °C      | 9.18%      | 7.94%       | May. 06, 2023 |
|                     | (48.33~59.05)   | (21.55~26.33) |                    |             |              |            |             |               |
| 2600MHz             | 55.83           | 24.19         | 57.97              | 22.93       | 21.4 °C      | 3.83%      | -5.21%      | May. 17, 2023 |
|                     | (50.25~61.41)   | (21.78~26.60) |                    |             |              |            |             |               |
| 5200MHz             | 162.34          | 55.42         | 174.89             | 59.9        | 21.5 °C      | 7.73%      | 8.08%       | May. 18, 2023 |
|                     | (146.11~178.57) | (49.88~60.96) |                    |             |              |            |             |               |
| 5800MHz             | 178.89          | 59.32         | 163.67             | 54.32       | 21.9 °C      | -8.51%     | -8.43%      | May. 19, 2023 |
|                     | (161.01~196.77) | (53.39~65.25) |                    |             |              |            |             |               |

## 5. SAR Measurement variability and uncertainty

### 5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### 5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6. RF Exposure Positions

### 6.1. Tablet host platform exposure conditions

Refer to KDB616217 D04, when the modular approach is used, transmitters and modules must be initially tested for standalone operations in generic host conditions according to the following minimum test separation distance and antenna installation requirements for incorporation in the tablet platform. The separation distance required for incorporation in qualified hosts is described in KDB 447498; item 5) of section 4.1 and item 1) of section 5.2.2 etc.

- $\leq 5$  mm between the antenna and user for both back surface and edge exposure conditions
- the antennas used by the host must have been tested for equipment approval or qualify for SAR test exclusion
- the antenna polarization, physical orientation, rotation and installation configurations used by the host must have been tested for compliance or qualify for test exclusion
- when the *SAR Test Exclusion Threshold* in KDB 447498 applies, a *test separation distance* of 5 mm is required to determine test exclusion for the tablet platform

The antennas embedded in tablets are typically  $\leq 5$ mm from the outer housing. The required antenna to user test separation distance is a “not to exceed test” distance required to apply the modular approach. Instead of the typical zero gap tablet edge test requirement between the edge of a tablet and the user, when an antenna has been tested at  $\leq 5$  mm according to the modular approach it can be incorporated into tablets with at least twice the tested distance from the outer housing of the tablet edge; otherwise, the tablet edge zero gap test requirement applies. When the dedicated host approach is applied, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom.

## 7. RF Output Power

### 7.1. GSM Conducted Power

| Band GSM850       | Burst-Averaged output Power<br>(dBm) |        |       |        | Frame-Averaged output Power<br>(dBm) |        |       |        |
|-------------------|--------------------------------------|--------|-------|--------|--------------------------------------|--------|-------|--------|
| Tx Channel        | Tune -                               | 128    | 189   | 251    | Tune -                               | 128    | 189   | 251    |
| Frequency (MHz)   | up<br>(dBm)                          | 824.2  | 836.4 | 848.8  | up<br>(dBm)                          | 824.2  | 836.4 | 848.8  |
| GSM (GMSK)        | 34.00                                | 33.55  | 33.71 | 33.63  | 24.97                                | 24.52  | 24.68 | 24.60  |
| GPRS(GMSK, 1 TS)  | 34.00                                | 33.49  | 33.68 | 33.59  | 24.97                                | 24.46  | 24.65 | 24.56  |
| GPRS(GMSK, 2 TS)  | 32.00                                | 31.59  | 31.62 | 31.40  | 25.98                                | 25.57  | 25.60 | 25.38  |
| GPRS(GMSK, 3 TS)  | 31.50                                | 31.45  | 31.50 | 31.47  | 27.24                                | 27.19  | 27.24 | 27.21  |
| GPRS(GMSK, 4 TS)  | 27.50                                | 27.37  | 27.40 | 27.27  | 24.49                                | 24.36  | 24.39 | 24.26  |
| EGPRS(8PSK, 1 TS) | 26.50                                | 26.20  | 26.19 | 26.45  | 17.47                                | 17.17  | 17.16 | 17.42  |
| EGPRS(8PSK, 2 TS) | 25.50                                | 25.06  | 25.21 | 25.07  | 19.48                                | 19.04  | 19.19 | 19.05  |
| EGPRS(8PSK, 3 TS) | 23.50                                | 22.78  | 23.45 | 23.00  | 19.24                                | 18.52  | 19.19 | 18.74  |
| EGPRS(8PSK, 4 TS) | 21.00                                | 20.29  | 20.66 | 20.10  | 17.99                                | 17.28  | 17.65 | 17.09  |
| Band GSM1900      | Burst-Averaged output Power<br>(dBm) |        |       |        | Frame-Averaged output Power<br>(dBm) |        |       |        |
| Tx Channel        | Tune -                               | 512    | 661   | 810    | Tune -                               | 512    | 661   | 810    |
| Frequency (MHz)   | up<br>(dBm)                          | 1850.2 | 1880  | 1909.8 | up<br>(dBm)                          | 1850.2 | 1880  | 1909.8 |
| GSM (GMSK)        | 31.00                                | 30.78  | 30.77 | 30.73  | 21.97                                | 21.75  | 21.74 | 21.70  |
| GPRS(GMSK, 1 TS)  | 31.00                                | 30.73  | 30.75 | 30.68  | 21.97                                | 21.70  | 21.72 | 21.65  |
| GPRS(GMSK, 2 TS)  | 29.00                                | 28.69  | 28.52 | 28.29  | 22.98                                | 22.67  | 22.50 | 22.27  |
| GPRS(GMSK, 3 TS)  | 27.50                                | 27.08  | 26.93 | 26.69  | 23.24                                | 22.82  | 22.67 | 22.43  |
| GPRS(GMSK, 4 TS)  | 25.00                                | 24.96  | 24.77 | 24.50  | 21.99                                | 21.95  | 21.76 | 21.49  |
| EGPRS(8PSK, 1 TS) | 27.50                                | 27.47  | 27.33 | 26.98  | 18.47                                | 18.44  | 18.30 | 17.95  |
| EGPRS(8PSK, 2 TS) | 25.50                                | 25.27  | 25.01 | 24.32  | 19.48                                | 19.25  | 18.99 | 18.30  |
| EGPRS(8PSK, 3 TS) | 24.50                                | 24.08  | 23.83 | 23.78  | 20.24                                | 19.82  | 19.57 | 19.52  |
| EGPRS(8PSK, 4 TS) | 23.00                                | 22.92  | 22.19 | 21.12  | 19.99                                | 19.91  | 19.18 | 18.11  |

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots. The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3.01 dB

## 7.2. WCDMA Conducted Power

| WCDMA Band 2    |                  | Burst-Averaged output Power (dBm) |       |        |  |
|-----------------|------------------|-----------------------------------|-------|--------|--|
| Tx Channel      | Tune-up<br>(dBm) | 9262                              | 9400  | 9538   |  |
| Frequency (MHz) |                  | 1852.4                            | 1880  | 1907.6 |  |
| RMC12.2K        | 24.00            | 23.87                             | 23.84 | 23.89  |  |
| HSDPA Sub 1     | 24.00            | 23.91                             | 23.89 | 23.94  |  |
| HSDPA Sub 2     | 24.00            | 23.90                             | 23.89 | 23.93  |  |
| HSDPA Sub 3     | 24.00            | 23.92                             | 23.88 | 23.95  |  |
| HSDPA Sub 4     | 24.00            | 23.91                             | 23.90 | 23.95  |  |
| HSUPA Sub 1     | 24.00            | 23.58                             | 23.41 | 23.38  |  |
| HSUPA Sub 2     | 24.00            | 23.64                             | 23.50 | 23.46  |  |
| HSUPA Sub 3     | 23.50            | 23.48                             | 23.02 | 23.10  |  |
| HSUPA Sub 4     | 24.00            | 23.67                             | 23.38 | 23.36  |  |
| HSUPA Sub 5     | 23.50            | 23.32                             | 23.10 | 23.24  |  |
| WCDMA Band 5    |                  | Burst-Averaged output Power (dBm) |       |        |  |
| Tx Channel      | Tune-up<br>(dBm) | 4132                              | 4182  | 4233   |  |
| Frequency (MHz) |                  | 826.4                             | 836.4 | 846.6  |  |
| RMC12.2K        | 24.00            | 23.65                             | 23.52 | 23.44  |  |
| HSDPA Sub 1     | 23.50            | 23.08                             | 22.87 | 23.12  |  |
| HSDPA Sub 2     | 23.00            | 22.74                             | 22.69 | 22.83  |  |
| HSDPA Sub 3     | 23.00            | 22.56                             | 22.13 | 22.70  |  |
| HSDPA Sub 4     | 22.50            | 22.31                             | 22.12 | 22.25  |  |
| HSUPA Sub 1     | 23.50            | 23.02                             | 22.80 | 22.79  |  |
| HSUPA Sub 2     | 23.00            | 23.00                             | 22.76 | 22.94  |  |
| HSUPA Sub 3     | 23.00            | 22.67                             | 22.62 | 22.68  |  |
| HSUPA Sub 4     | 23.00            | 22.95                             | 22.76 | 22.89  |  |
| HSUPA Sub 5     | 23.00            | 22.86                             | 22.73 | 22.90  |  |

## 7.3. LTE Conducted Power

| Band       | Band Width | Modulation | RB Configuration |           | Tune-up<br>(dBm) | Channel/Frequency(MHz) |            |              |
|------------|------------|------------|------------------|-----------|------------------|------------------------|------------|--------------|
|            |            |            | RB Size          | RB Offset |                  | 18607/1850.7           | 18900/1880 | 19193/1909.3 |
| LTE Band 2 | 1.4MHz     | QPSK       | 1                | 0         | 26.50            | 26.06                  | 25.79      | 26.16        |
|            |            |            | 1                | 2         | 26.50            | 26.08                  | 25.83      | 26.07        |
|            |            |            | 1                | 5         | 26.50            | 26.04                  | 25.86      | 26.17        |

|            |            |            |                  | 3         | 0             | 26.00                  | 25.89      | 25.77        | 25.90 |
|------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|-------|
|            |            |            |                  | 3         | 1             | 26.00                  | 25.92      | 25.68        | 25.93 |
|            |            |            |                  | 3         | 2             | 26.00                  | 25.88      | 25.70        | 25.93 |
|            |            |            |                  | 6         | 0             | 25.00                  | 24.78      | 24.60        | 24.85 |
|            |            |            | 16QAM            | 1         | 0             | 26.00                  | 25.83      | 24.11        | 24.82 |
|            |            |            |                  | 1         | 2             | 26.00                  | 25.79      | 24.08        | 24.82 |
|            |            |            |                  | 1         | 5             | 26.00                  | 25.87      | 24.15        | 24.77 |
|            |            |            |                  | 3         | 0             | 25.50                  | 25.13      | 24.57        | 24.96 |
|            |            |            |                  | 3         | 1             | 25.50                  | 25.18      | 24.57        | 24.88 |
|            |            |            |                  | 3         | 2             | 25.50                  | 25.14      | 24.53        | 24.90 |
|            |            |            |                  | 6         | 0             | 24.50                  | 24.11      | 23.83        | 23.90 |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |       |
|            |            |            | RB Size          | RB Offset |               | 18615/1851.5           | 18900/1880 | 19185/1908.5 |       |
| LTE Band 2 | 3MHz       | QPSK       | 1                | 0         | 26.50         | 25.91                  | 25.84      | 26.09        |       |
|            |            |            | 1                | 7         | 26.50         | 25.93                  | 25.83      | 26.13        |       |
|            |            |            | 1                | 14        | 26.50         | 25.86                  | 25.77      | 26.10        |       |
|            |            |            | 8                | 0         | 25.00         | 24.98                  | 24.60      | 24.75        |       |
|            |            |            | 8                | 4         | 25.00         | 24.98                  | 24.66      | 24.93        |       |
|            |            |            | 8                | 7         | 25.00         | 24.88                  | 24.64      | 24.80        |       |
|            |            |            | 15               | 0         | 25.00         | 24.85                  | 24.64      | 24.79        |       |
|            |            | 16QAM      | 1                | 0         | 26.50         | 26.01                  | 24.78      | 24.79        |       |
|            |            |            | 1                | 7         | 26.50         | 25.95                  | 24.76      | 24.79        |       |
|            |            |            | 1                | 14        | 26.50         | 25.97                  | 24.72      | 24.80        |       |
|            |            |            | 8                | 0         | 24.00         | 23.89                  | 23.73      | 23.83        |       |
|            |            |            | 8                | 4         | 24.00         | 23.92                  | 23.69      | 23.84        |       |
|            |            |            | 8                | 7         | 24.00         | 23.89                  | 23.69      | 23.86        |       |
|            |            |            | 15               | 0         | 24.50         | 24.07                  | 23.74      | 23.96        |       |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |       |
|            |            |            | RB Size          | RB Offset |               | 18625/1852.5           | 18900/1880 | 19175/1907.5 |       |
| LTE Band 2 | 5MHz       | QPSK       | 1                | 0         | 26.00         | 25.85                  | 25.73      | 25.73        |       |
|            |            |            | 1                | 12        | 26.00         | 25.84                  | 25.75      | 25.72        |       |
|            |            |            | 1                | 24        | 26.00         | 25.87                  | 25.74      | 25.90        |       |
|            |            |            | 12               | 0         | 25.00         | 24.95                  | 24.70      | 24.92        |       |
|            |            |            | 12               | 6         | 25.00         | 24.92                  | 24.66      | 24.75        |       |

|            |            |            | 12               | 11        | 25.00         | 24.95                  | 24.75      | 24.86        |
|------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|            |            |            | 25               | 0         | 25.00         | 24.91                  | 24.74      | 24.84        |
|            |            | 16QAM      | 1                | 0         | 25.50         | 24.97                  | 24.78      | 25.29        |
|            |            |            | 1                | 12        | 25.50         | 24.99                  | 24.75      | 25.33        |
|            |            |            | 1                | 24        | 25.50         | 25.00                  | 24.76      | 25.34        |
|            |            |            | 12               | 0         | 24.00         | 23.91                  | 23.56      | 23.86        |
|            |            |            | 12               | 6         | 24.00         | 23.84                  | 23.52      | 23.87        |
|            |            |            | 12               | 11        | 24.00         | 23.92                  | 23.52      | 23.77        |
|            |            |            | 25               | 0         | 24.50         | 24.10                  | 23.73      | 24.01        |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|            |            |            | RB Size          | RB Offset |               | 18650/1855             | 18900/1880 | 19150/1905   |
| LTE Band 2 | 10MHz      | QPSK       | 1                | 0         | 26.50         | 25.91                  | 25.62      | 25.85        |
|            |            |            | 1                | 24        | 26.50         | 25.89                  | 25.64      | 25.99        |
|            |            |            | 1                | 49        | 26.50         | 25.94                  | 25.65      | 26.14        |
|            |            |            | 25               | 0         | 25.00         | 24.89                  | 24.63      | 24.66        |
|            |            |            | 25               | 12        | 25.00         | 24.85                  | 24.70      | 24.68        |
|            |            |            | 25               | 24        | 25.00         | 24.97                  | 24.78      | 24.84        |
|            |            |            | 50               | 0         | 25.00         | 24.81                  | 24.66      | 24.79        |
|            |            | 16QAM      | 1                | 0         | 26.00         | 25.99                  | 25.41      | 24.57        |
|            |            |            | 1                | 24        | 26.00         | 25.94                  | 25.38      | 24.69        |
|            |            |            | 1                | 49        | 26.00         | 25.90                  | 25.38      | 24.76        |
|            |            |            | 25               | 0         | 24.00         | 24.00                  | 23.76      | 23.66        |
|            |            |            | 25               | 12        | 24.00         | 23.94                  | 23.79      | 23.74        |
|            |            |            | 25               | 24        | 24.00         | 23.93                  | 23.74      | 23.87        |
|            |            |            | 50               | 0         | 24.00         | 24.00                  | 23.79      | 23.80        |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|            |            |            | RB Size          | RB Offset |               | 18675/1857.5           | 18900/1880 | 19125/1902.5 |
| LTE Band 2 | 15MHz      | QPSK       | 1                | 0         | 26.00         | 25.78                  | 25.67      | 25.55        |
|            |            |            | 1                | 37        | 26.00         | 25.81                  | 25.78      | 25.46        |
|            |            |            | 1                | 74        | 26.00         | 25.72                  | 25.72      | 25.69        |
|            |            |            | 36               | 0         | 25.00         | 24.87                  | 24.62      | 24.69        |
|            |            |            | 36               | 18        | 25.00         | 24.92                  | 24.63      | 24.75        |
|            |            |            | 36               | 37        | 25.00         | 24.80                  | 24.65      | 24.86        |
|            |            |            | 75               | 0         | 25.00         | 24.93                  | 24.72      | 24.62        |

|            |            | 16QAM      | 1                | 0         | 26.00         | 25.96                  | 25.44      | 25.49      |
|------------|------------|------------|------------------|-----------|---------------|------------------------|------------|------------|
|            |            |            | 1                | 37        | 26.00         | 25.95                  | 25.45      | 25.48      |
|            |            |            | 1                | 74        | 26.00         | 25.85                  | 25.40      | 25.67      |
|            |            |            | 36               | 0         | 24.00         | 23.91                  | 23.87      | 23.62      |
|            |            |            | 36               | 18        | 24.00         | 23.97                  | 23.90      | 23.69      |
|            |            |            | 36               | 37        | 24.00         | 23.96                  | 23.90      | 23.77      |
|            |            |            | 75               | 0         | 24.00         | 23.90                  | 23.75      | 23.70      |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |            |
|            |            |            | RB Size          | RB Offset |               | 18700/1860             | 18900/1880 | 19100/1900 |
| LTE Band 2 | 20MHz      | QPSK       | 1                | 0         | 26.50         | 26.04                  | 25.87      | 25.59      |
|            |            |            | 1                | 49        | 26.50         | 25.99                  | 25.83      | 25.62      |
|            |            |            | 1                | 99        | 26.50         | 25.91                  | 25.98      | 25.82      |
|            |            |            | 50               | 0         | 25.00         | 24.91                  | 24.64      | 24.74      |
|            |            |            | 50               | 24        | 25.00         | 24.88                  | 24.78      | 24.67      |
|            |            |            | 50               | 49        | 25.00         | 24.87                  | 24.57      | 24.62      |
|            |            |            | 100              | 0         | 25.00         | 24.90                  | 24.72      | 24.70      |
|            |            | 16QAM      | 1                | 0         | 25.50         | 24.95                  | 24.26      | 24.88      |
|            |            |            | 1                | 49        | 25.50         | 24.89                  | 24.32      | 24.86      |
|            |            |            | 1                | 99        | 25.50         | 24.79                  | 24.35      | 25.08      |
|            |            |            | 50               | 0         | 24.00         | 23.94                  | 23.76      | 23.72      |
|            |            |            | 50               | 24        | 24.00         | 23.95                  | 23.76      | 23.71      |
|            |            |            | 50               | 49        | 24.00         | 23.90                  | 23.73      | 23.77      |
|            |            |            | 100              | 0         | 24.00         | 23.98                  | 23.76      | 23.70      |

| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|------------|------------|------------|------------------|-----------|---------------|------------------------|-------------|-------------|
|            |            |            | RB Size          | RB Offset |               | 20407/824.7            | 20525/836.5 | 20643/848.3 |
| LTE Band 5 | 1.4MHz     | QPSK       | 1                | 0         | 25.00         | 23.90                  | 23.70       | 24.31       |
|            |            |            | 1                | 2         | 25.00         | 23.91                  | 23.72       | 24.34       |
|            |            |            | 1                | 5         | 25.00         | 23.88                  | 23.73       | 24.56       |
|            |            |            | 3                | 0         | 24.50         | 23.81                  | 23.75       | 24.04       |
|            |            |            | 3                | 1         | 24.50         | 23.81                  | 23.70       | 24.04       |
|            |            |            | 3                | 2         | 24.50         | 23.77                  | 23.69       | 24.02       |
|            |            |            | 6                | 0         | 23.50         | 22.71                  | 22.70       | 23.06       |
|            |            | 16QAM      | 1                | 0         | 24.00         | 23.73                  | 22.74       | 23.03       |
|            |            |            | 1                | 2         | 24.00         | 23.72                  | 22.68       | 23.06       |

|            |            |            | 1                | 5         | 24.00         | 23.80                  | 22.75       | 23.08       |
|------------|------------|------------|------------------|-----------|---------------|------------------------|-------------|-------------|
|            |            |            | 3                | 0         | 23.50         | 23.07                  | 22.75       | 22.81       |
|            |            |            | 3                | 1         | 23.50         | 23.03                  | 22.69       | 22.88       |
|            |            |            | 3                | 2         | 23.50         | 22.98                  | 22.72       | 22.98       |
|            |            |            | 6                | 0         | 22.50         | 21.84                  | 21.87       | 22.05       |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|            |            |            | RB Size          | RB Offset |               | 20415/825.5            | 20525/836.5 | 20635/847.5 |
| LTE Band 5 | 3MHz       | QPSK       | 1                | 0         | 24.50         | 23.72                  | 23.65       | 24.32       |
|            |            |            | 1                | 7         | 24.50         | 23.74                  | 23.80       | 24.24       |
|            |            |            | 1                | 14        | 24.50         | 23.60                  | 23.75       | 24.29       |
|            |            |            | 8                | 0         | 23.50         | 22.84                  | 22.64       | 22.89       |
|            |            |            | 8                | 4         | 23.50         | 22.74                  | 22.73       | 22.80       |
|            |            |            | 8                | 7         | 23.50         | 22.68                  | 22.73       | 23.03       |
|            |            |            | 15               | 0         | 23.00         | 22.77                  | 22.90       | 22.94       |
|            |            | 16QAM      | 1                | 0         | 24.00         | 23.67                  | 22.69       | 23.01       |
|            |            |            | 1                | 7         | 24.00         | 23.63                  | 22.72       | 22.99       |
|            |            |            | 1                | 14        | 24.00         | 23.52                  | 22.74       | 23.08       |
|            |            |            | 8                | 0         | 22.50         | 21.54                  | 21.72       | 22.01       |
|            |            |            | 8                | 4         | 22.50         | 21.54                  | 21.72       | 21.97       |
|            |            |            | 8                | 7         | 22.50         | 21.45                  | 21.69       | 22.07       |
|            |            |            | 15               | 0         | 22.50         | 21.83                  | 21.70       | 22.01       |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|            |            |            | RB Size          | RB Offset |               | 20425/826.5            | 20525/836.5 | 20625/846.5 |
| LTE Band 5 | 5MHz       | QPSK       | 1                | 0         | 24.00         | 23.67                  | 23.71       | 23.77       |
|            |            |            | 1                | 12        | 24.00         | 23.61                  | 23.71       | 23.85       |
|            |            |            | 1                | 24        | 24.00         | 23.61                  | 23.78       | 23.84       |
|            |            |            | 12               | 0         | 23.00         | 22.73                  | 22.63       | 22.84       |
|            |            |            | 12               | 6         | 23.00         | 22.64                  | 22.80       | 22.91       |
|            |            |            | 12               | 11        | 23.00         | 22.60                  | 22.67       | 22.87       |
|            |            |            | 25               | 0         | 23.00         | 22.59                  | 22.74       | 22.88       |
|            |            | 16QAM      | 1                | 0         | 23.50         | 22.83                  | 22.38       | 23.38       |
|            |            |            | 1                | 12        | 23.50         | 22.74                  | 22.35       | 23.40       |
|            |            |            | 1                | 24        | 23.50         | 22.87                  | 22.46       | 23.48       |
|            |            |            | 12               | 0         | 22.50         | 21.57                  | 21.48       | 22.34       |
|            |            |            | 12               | 6         | 22.50         | 21.53                  | 21.55       | 21.85       |
|            |            |            | 12               | 11        | 22.50         | 21.51                  | 21.61       | 21.83       |

|            |            |            | 25               | 0         | 22.50         | 21.74                  | 21.62       | 22.01     |
|------------|------------|------------|------------------|-----------|---------------|------------------------|-------------|-----------|
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |           |
|            |            |            | RB Size          | RB Offset |               | 20450/829              | 20525/836.5 | 20600/844 |
| LTE Band 5 | 10MHz      | QPSK       | 1                | 0         | 24.50         | 23.66                  | 23.52       | 23.87     |
|            |            |            | 1                | 24        | 24.50         | 23.63                  | 23.62       | 23.96     |
|            |            |            | 1                | 49        | 24.50         | 23.70                  | 23.73       | 24.18     |
|            |            |            | 25               | 0         | 23.00         | 22.61                  | 22.68       | 22.74     |
|            |            |            | 25               | 12        | 23.00         | 22.74                  | 22.72       | 22.80     |
|            |            |            | 25               | 24        | 23.00         | 22.76                  | 22.80       | 22.86     |
|            |            |            | 50               | 0         | 23.00         | 22.66                  | 22.71       | 22.77     |
|            |            | 16QAM      | 1                | 0         | 24.00         | 23.51                  | 23.29       | 22.98     |
|            |            |            | 1                | 24        | 24.00         | 23.55                  | 23.30       | 23.08     |
|            |            |            | 1                | 49        | 24.00         | 23.50                  | 23.36       | 23.25     |
|            |            |            | 25               | 0         | 22.00         | 21.59                  | 21.69       | 21.70     |
|            |            |            | 25               | 12        | 22.00         | 21.75                  | 21.74       | 21.76     |
|            |            |            | 25               | 24        | 22.00         | 21.73                  | 21.78       | 21.96     |
|            |            |            | 50               | 0         | 22.00         | 21.72                  | 21.78       | 21.70     |

| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|            |            |            | RB Size          | RB Offset |               | 20775/2502.5           | 21100/2535 | 21425/2567.5 |
| LTE Band 7 | 5MHz       | QPSK       | 1                | 0         | 26.50         | 26.03                  | 25.90      | 26.28        |
|            |            |            | 1                | 12        | 26.50         | 26.02                  | 25.91      | 26.26        |
|            |            |            | 1                | 24        | 26.50         | 26.07                  | 25.99      | 26.33        |
|            |            |            | 12               | 0         | 25.50         | 24.91                  | 25.07      | 25.27        |
|            |            |            | 12               | 6         | 25.50         | 25.07                  | 25.02      | 25.31        |
|            |            |            | 12               | 11        | 25.50         | 25.00                  | 25.13      | 25.37        |
|            |            |            | 25               | 0         | 25.50         | 24.98                  | 25.16      | 25.38        |
|            |            | 16QAM      | 1                | 0         | 26.00         | 25.08                  | 25.16      | 25.66        |
|            |            |            | 1                | 12        | 26.00         | 25.10                  | 25.19      | 25.66        |
|            |            |            | 1                | 24        | 26.00         | 25.10                  | 25.24      | 25.66        |
|            |            |            | 12               | 0         | 24.50         | 23.90                  | 24.19      | 24.36        |
|            |            |            | 12               | 6         | 24.50         | 23.93                  | 24.27      | 24.34        |
|            |            |            | 12               | 11        | 24.50         | 24.01                  | 24.19      | 24.42        |
|            |            |            | 25               | 0         | 25.00         | 24.11                  | 24.21      | 24.52        |
| Band       | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |

|                  |               |            | RB<br>Size          | RB<br>Offset |                  | 20800/2505             | 21100/2535 | 21400/2565   |
|------------------|---------------|------------|---------------------|--------------|------------------|------------------------|------------|--------------|
| LTE<br>Band<br>7 | 10MHz         | QPSK       | 1                   | 0            | 27.00            | 25.89                  | 26.06      | 26.52        |
|                  |               |            | 1                   | 24           | 27.00            | 25.85                  | 26.11      | 26.67        |
|                  |               |            | 1                   | 49           | 27.00            | 26.02                  | 26.16      | 26.66        |
|                  |               |            | 25                  | 0            | 25.50            | 24.90                  | 24.99      | 25.33        |
|                  |               |            | 25                  | 12           | 25.50            | 24.90                  | 25.10      | 25.30        |
|                  |               |            | 25                  | 24           | 25.50            | 24.96                  | 25.13      | 25.34        |
|                  |               |            | 50                  | 0            | 25.50            | 24.96                  | 25.10      | 25.34        |
|                  |               | 16QAM      | 1                   | 0            | 26.50            | 25.94                  | 25.85      | 25.33        |
|                  |               |            | 1                   | 24           | 26.50            | 26.02                  | 25.83      | 25.36        |
|                  |               |            | 1                   | 49           | 26.50            | 26.06                  | 25.80      | 25.45        |
|                  |               |            | 25                  | 0            | 24.50            | 24.06                  | 24.21      | 24.45        |
|                  |               |            | 25                  | 12           | 24.50            | 23.98                  | 24.31      | 24.48        |
|                  |               |            | 25                  | 24           | 24.50            | 23.96                  | 24.30      | 24.47        |
|                  |               |            | 50                  | 0            | 24.50            | 24.05                  | 24.25      | 24.45        |
| Band             | Band<br>Width | Modulation | RB<br>Configuration |              | Tune-up<br>(dBm) | Channel/Frequency(MHz) |            |              |
|                  |               |            | RB<br>Size          | RB<br>Offset |                  | 20825/2507.5           | 21100/2535 | 21375/2562.5 |
| LTE<br>Band<br>7 | 15MHz         | QPSK       | 1                   | 0            | 26.50            | 25.82                  | 26.09      | 26.21        |
|                  |               |            | 1                   | 37           | 26.50            | 25.88                  | 26.14      | 26.26        |
|                  |               |            | 1                   | 74           | 26.50            | 25.94                  | 26.28      | 26.37        |
|                  |               |            | 36                  | 0            | 25.50            | 24.94                  | 24.97      | 25.39        |
|                  |               |            | 36                  | 18           | 25.50            | 24.97                  | 25.09      | 25.25        |
|                  |               |            | 36                  | 37           | 25.50            | 25.00                  | 25.15      | 25.41        |
|                  |               |            | 75                  | 0            | 25.50            | 24.96                  | 25.17      | 25.25        |
|                  |               | 16QAM      | 1                   | 0            | 26.50            | 25.95                  | 25.09      | 26.19        |
|                  |               |            | 1                   | 37           | 26.50            | 26.01                  | 25.21      | 26.25        |
|                  |               |            | 1                   | 74           | 26.50            | 26.16                  | 25.26      | 26.34        |
|                  |               |            | 36                  | 0            | 24.50            | 24.10                  | 24.29      | 24.41        |
|                  |               |            | 36                  | 18           | 24.50            | 24.06                  | 24.29      | 24.49        |
|                  |               |            | 36                  | 37           | 24.50            | 24.17                  | 24.38      | 24.45        |
|                  |               |            | 75                  | 0            | 24.50            | 24.11                  | 24.27      | 24.44        |
| Band             | Band<br>Width | Modulation | RB<br>Configuration |              | Tune-up<br>(dBm) | Channel/Frequency(MHz) |            |              |
|                  |               |            | RB<br>Size          | RB<br>Offset |                  | 20850/2510             | 21100/2535 | 21350/2560   |
| LTE<br>Band      | 20MHz         | QPSK       | 1                   | 0            | 26.50            | 25.89                  | 26.05      | 26.20        |
|                  |               |            | 1                   | 49           | 26.50            | 26.01                  | 26.11      | 26.21        |

|   |  |       |     |    |       |       |       |       |
|---|--|-------|-----|----|-------|-------|-------|-------|
| 7 |  |       | 1   | 99 | 26.50 | 26.04 | 26.30 | 26.32 |
|   |  |       | 50  | 0  | 25.50 | 24.91 | 25.09 | 25.28 |
|   |  |       | 50  | 24 | 25.50 | 25.08 | 25.19 | 25.31 |
|   |  |       | 50  | 49 | 25.50 | 25.10 | 25.09 | 25.38 |
|   |  |       | 100 | 0  | 25.50 | 24.98 | 25.12 | 25.35 |
|   |  | 16QAM | 1   | 0  | 26.00 | 24.72 | 25.10 | 25.68 |
|   |  |       | 1   | 49 | 26.00 | 24.81 | 25.21 | 25.79 |
|   |  |       | 1   | 99 | 26.00 | 24.88 | 25.31 | 25.95 |
|   |  |       | 50  | 0  | 25.00 | 24.13 | 24.18 | 24.46 |
|   |  |       | 50  | 24 | 25.00 | 24.20 | 24.31 | 24.52 |
|   |  |       | 50  | 49 | 25.00 | 24.28 | 24.28 | 24.51 |
|   |  |       | 100 | 0  | 25.00 | 24.07 | 24.25 | 24.50 |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|-------------|-------------|
|             |            |            | RB Size          | RB Offset |               | 23017/699.7            | 23095/707.5 | 23173/715.3 |
| LTE Band 12 | 1.4MHz     | QPSK       | 1                | 0         | 24.50         | 24.44                  | 24.03       | 24.28       |
|             |            |            | 1                | 2         | 24.50         | 24.42                  | 24.06       | 24.20       |
|             |            |            | 1                | 5         | 24.50         | 24.40                  | 24.07       | 24.19       |
|             |            |            | 3                | 0         | 24.50         | 24.30                  | 24.04       | 24.07       |
|             |            |            | 3                | 1         | 24.50         | 24.35                  | 24.05       | 23.98       |
|             |            |            | 3                | 2         | 24.50         | 24.35                  | 24.01       | 23.96       |
|             |            |            | 6                | 0         | 23.50         | 23.12                  | 22.98       | 22.92       |
|             |            | 16QAM      | 1                | 0         | 24.50         | 24.37                  | 23.05       | 22.97       |
|             |            |            | 1                | 2         | 24.50         | 24.30                  | 23.08       | 22.92       |
|             |            |            | 1                | 5         | 24.50         | 24.38                  | 23.06       | 22.84       |
|             |            |            | 3                | 0         | 24.00         | 23.50                  | 22.93       | 22.92       |
|             |            |            | 3                | 1         | 24.00         | 23.44                  | 22.96       | 22.82       |
|             |            |            | 3                | 2         | 24.00         | 23.54                  | 22.98       | 22.89       |
|             |            |            | 6                | 0         | 22.50         | 22.24                  | 22.13       | 21.90       |
| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|             |            |            | RB Size          | RB Offset |               | 23025/700.5            | 23095/707.5 | 23165/714.5 |
| LTE Band 12 | 3MHz       | QPSK       | 1                | 0         | 24.50         | 24.18                  | 24.04       | 24.36       |
|             |            |            | 1                | 7         | 24.50         | 24.17                  | 24.11       | 24.27       |
|             |            |            | 1                | 14        | 24.50         | 24.17                  | 24.07       | 24.17       |
|             |            |            | 8                | 0         | 23.50         | 23.25                  | 23.07       | 23.03       |
|             |            |            | 8                | 4         | 23.50         | 23.18                  | 22.94       | 22.95       |

|             |            |            |                  |           |               |                        |             |             |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|-------------|-------------|
|             |            |            | 8                | 7         | 23.50         | 23.24                  | 23.02       | 22.99       |
|             |            |            | 15               | 0         | 23.50         | 23.25                  | 23.01       | 23.02       |
|             |            | 16QAM      | 1                | 0         | 24.50         | 24.23                  | 23.21       | 23.11       |
|             |            |            | 1                | 7         | 24.50         | 24.18                  | 23.07       | 23.00       |
|             |            |            | 1                | 14        | 24.50         | 24.17                  | 23.03       | 22.90       |
|             |            |            | 8                | 0         | 22.50         | 21.95                  | 22.04       | 21.95       |
|             |            |            | 8                | 4         | 22.50         | 22.08                  | 22.02       | 21.99       |
|             |            |            | 8                | 7         | 22.50         | 22.10                  | 22.03       | 21.92       |
|             |            |            | 15               | 0         | 22.50         | 22.21                  | 21.87       | 22.05       |
|             |            |            |                  |           |               |                        |             |             |
| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|             |            |            | RB Size          | RB Offset |               | 23035/701.5            | 23095/707.5 | 23155/713.5 |
| LTE Band 12 | 5MHz       | QPSK       | 1                | 0         | 24.50         | 24.23                  | 24.10       | 24.00       |
|             |            |            | 1                | 12        | 24.50         | 24.10                  | 24.09       | 23.98       |
|             |            |            | 1                | 24        | 24.50         | 24.06                  | 24.17       | 23.79       |
|             |            |            | 12               | 0         | 23.50         | 23.24                  | 23.21       | 23.09       |
|             |            |            | 12               | 6         | 23.50         | 23.14                  | 23.04       | 23.01       |
|             |            |            | 12               | 11        | 23.50         | 23.13                  | 22.99       | 22.95       |
|             |            |            | 25               | 0         | 23.50         | 23.14                  | 22.97       | 23.03       |
|             |            | 16QAM      | 1                | 0         | 24.00         | 23.24                  | 23.18       | 23.65       |
|             |            |            | 1                | 12        | 24.00         | 23.31                  | 23.06       | 23.47       |
|             |            |            | 1                | 24        | 24.00         | 23.28                  | 23.19       | 23.34       |
|             |            |            | 12               | 0         | 22.50         | 22.02                  | 21.88       | 22.03       |
|             |            |            | 12               | 6         | 22.50         | 22.03                  | 21.89       | 21.98       |
|             |            |            | 12               | 11        | 22.50         | 22.08                  | 21.86       | 21.84       |
|             |            |            | 25               | 0         | 22.50         | 22.31                  | 21.96       | 22.00       |
| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |             |             |
|             |            |            | RB Size          | RB Offset |               | 23060/704              | 23095/707.5 | 23130/711   |
| LTE Band 12 | 10MHz      | QPSK       | 1                | 0         | 24.50         | 24.33                  | 24.14       | 24.34       |
|             |            |            | 1                | 24        | 24.50         | 24.21                  | 24.09       | 24.37       |
|             |            |            | 1                | 49        | 24.50         | 24.16                  | 24.23       | 24.17       |
|             |            |            | 25               | 0         | 23.50         | 23.24                  | 23.20       | 23.03       |
|             |            |            | 25               | 12        | 23.50         | 23.18                  | 23.08       | 23.11       |
|             |            |            | 25               | 24        | 23.50         | 23.22                  | 23.15       | 23.00       |
|             |            |            | 50               | 0         | 23.50         | 23.11                  | 23.02       | 23.09       |
|             |            | 16QAM      | 1                | 0         | 24.50         | 24.01                  | 23.72       | 23.09       |
|             |            |            | 1                | 24        | 24.50         | 24.01                  | 23.68       | 23.06       |

|  |  |  |    |    |       |       |       |       |
|--|--|--|----|----|-------|-------|-------|-------|
|  |  |  | 1  | 49 | 24.50 | 23.89 | 23.83 | 22.76 |
|  |  |  | 25 | 0  | 22.50 | 22.20 | 22.17 | 22.04 |
|  |  |  | 25 | 12 | 22.50 | 22.27 | 22.03 | 22.12 |
|  |  |  | 25 | 24 | 22.50 | 22.05 | 22.16 | 22.11 |
|  |  |  | 50 | 0  | 22.50 | 22.34 | 21.97 | 22.05 |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |           |             |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|-----------|-------------|
|             |            |            | RB Size          | RB Offset |               | 23755/706.5            | 23790/710 | 23825/713.5 |
| LTE Band 17 | 5MHz       | QPSK       | 1                | 0         | 24.50         | 24.04                  | 24.27     | 24.19       |
|             |            |            | 1                | 12        | 24.50         | 24.03                  | 24.28     | 24.06       |
|             |            |            | 1                | 24        | 24.50         | 23.93                  | 24.21     | 23.91       |
|             |            |            | 12               | 0         | 23.50         | 23.23                  | 23.03     | 23.14       |
|             |            |            | 12               | 6         | 23.50         | 23.28                  | 23.14     | 23.10       |
|             |            |            | 12               | 11        | 23.50         | 23.06                  | 23.09     | 22.99       |
|             |            |            | 25               | 0         | 23.50         | 23.21                  | 23.25     | 23.04       |
|             |            | 16QAM      | 1                | 0         | 24.00         | 23.81                  | 23.23     | 23.11       |
|             |            |            | 1                | 12        | 24.00         | 23.73                  | 23.34     | 23.10       |
|             |            |            | 1                | 24        | 24.00         | 23.67                  | 23.38     | 22.97       |
|             |            |            | 12               | 0         | 22.50         | 22.16                  | 21.85     | 21.93       |
|             |            |            | 12               | 6         | 22.50         | 22.11                  | 22.04     | 21.87       |
|             |            |            | 12               | 11        | 22.50         | 22.05                  | 22.04     | 21.80       |
|             |            |            | 25               | 0         | 22.50         | 22.24                  | 22.19     | 22.00       |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |           |           |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|-----------|-----------|
|             |            |            | RB Size          | RB Offset |               | 23780/709              | 23790/710 | 23800/711 |
| LTE Band 17 | 10MHz      | QPSK       | 1                | 0         | 24.50         | 24.21                  | 24.19     | 24.31     |
|             |            |            | 1                | 24        | 24.50         | 24.10                  | 24.13     | 24.40     |
|             |            |            | 1                | 49        | 24.50         | 24.15                  | 24.04     | 24.18     |
|             |            |            | 25               | 0         | 23.50         | 23.22                  | 23.06     | 23.04     |
|             |            |            | 25               | 12        | 23.50         | 23.09                  | 23.17     | 23.10     |
|             |            |            | 25               | 24        | 23.50         | 23.28                  | 23.05     | 23.08     |
|             |            |            | 50               | 0         | 23.50         | 23.00                  | 23.16     | 23.15     |
|             |            | 16QAM      | 1                | 0         | 24.50         | 24.02                  | 23.17     | 23.48     |
|             |            |            | 1                | 24        | 24.50         | 23.75                  | 23.21     | 23.64     |
|             |            |            | 1                | 49        | 24.50         | 23.89                  | 23.05     | 23.36     |
|             |            |            | 25               | 0         | 22.50         | 22.10                  | 22.03     | 22.03     |
|             |            |            | 25               | 12        | 22.50         | 21.98                  | 22.24     | 22.15     |

|  |  |  |    |    |       |       |       |       |
|--|--|--|----|----|-------|-------|-------|-------|
|  |  |  | 25 | 24 | 22.50 | 22.17 | 22.14 | 22.08 |
|  |  |  | 50 | 0  | 22.50 | 22.07 | 22.27 | 22.08 |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|             |            |            | RB Size          | RB Offset |               | 37775/2572.5           | 38000/2595 | 38225/2617.5 |
| LTE Band 38 | 5MHz       | QPSK       | 1                | 0         | 26.50         | 26.17                  | 26.09      | 26.29        |
|             |            |            | 1                | 12        | 26.50         | 26.12                  | 26.00      | 26.26        |
|             |            |            | 1                | 24        | 26.50         | 26.18                  | 25.95      | 26.33        |
|             |            |            | 12               | 0         | 25.50         | 25.33                  | 25.27      | 25.17        |
|             |            |            | 12               | 6         | 25.50         | 25.24                  | 25.27      | 25.13        |
|             |            |            | 12               | 11        | 25.50         | 25.22                  | 25.28      | 25.13        |
|             |            |            | 25               | 0         | 25.50         | 25.23                  | 25.30      | 25.00        |
|             |            | 16QAM      | 1                | 0         | 26.00         | 25.12                  | 25.91      | 24.80        |
|             |            |            | 1                | 12        | 26.00         | 25.07                  | 25.83      | 24.76        |
|             |            |            | 1                | 24        | 26.00         | 25.09                  | 25.89      | 24.66        |
|             |            |            | 12               | 0         | 24.50         | 24.32                  | 24.31      | 24.04        |
|             |            |            | 12               | 6         | 24.50         | 24.34                  | 24.32      | 24.01        |
|             |            |            | 12               | 11        | 24.50         | 24.46                  | 24.44      | 24.13        |
|             |            |            | 25               | 0         | 25.00         | 24.39                  | 24.55      | 24.26        |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |            |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|------------|------------|
|             |            |            | RB Size          | RB Offset |               | 37800/2575             | 38000/2595 | 38200/2615 |
| LTE Band 38 | 10MHz      | QPSK       | 1                | 0         | 26.50         | 26.42                  | 26.14      | 25.95      |
|             |            |            | 1                | 24        | 26.50         | 26.38                  | 26.17      | 26.04      |
|             |            |            | 1                | 49        | 26.50         | 26.30                  | 26.19      | 26.04      |
|             |            |            | 25               | 0         | 25.50         | 25.25                  | 25.19      | 25.09      |
|             |            |            | 25               | 12        | 25.50         | 25.33                  | 25.22      | 25.12      |
|             |            |            | 25               | 24        | 25.50         | 25.33                  | 25.26      | 25.10      |
|             |            |            | 50               | 0         | 25.00         | 24.92                  | 24.84      | 24.76      |
|             |            | 16QAM      | 1                | 0         | 26.00         | 25.71                  | 25.44      | 25.51      |
|             |            |            | 1                | 24        | 26.00         | 25.91                  | 25.53      | 25.51      |
|             |            |            | 1                | 49        | 26.00         | 25.92                  | 25.46      | 25.53      |
|             |            |            | 25               | 0         | 25.00         | 24.33                  | 24.55      | 24.35      |
|             |            |            | 25               | 12        | 25.00         | 24.41                  | 24.47      | 24.24      |
|             |            |            | 25               | 24        | 25.00         | 24.33                  | 24.55      | 24.36      |
|             |            |            | 50               | 0         | 24.50         | 24.18                  | 24.08      | 23.81      |

| Band | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|      |            |            | RB Size          | RB Offset |               | 37825/2577.5           | 38000/2595 | 38175/2612.5 |

| LTE<br>Band<br>38 | 15MHz      | QPSK       | 1                | 0         | 26.50         | 26.35                  | 26.12      | 26.11      |
|-------------------|------------|------------|------------------|-----------|---------------|------------------------|------------|------------|
|                   |            |            | 1                | 37        | 26.50         | 26.36                  | 26.13      | 26.07      |
|                   |            |            | 1                | 74        | 26.50         | 26.41                  | 26.07      | 26.07      |
|                   |            |            | 36               | 0         | 25.50         | 25.21                  | 25.32      | 25.25      |
|                   |            |            | 36               | 18        | 25.50         | 25.27                  | 25.17      | 25.09      |
|                   |            |            | 36               | 37        | 25.50         | 25.37                  | 25.30      | 25.13      |
|                   |            |            | 75               | 0         | 25.00         | 24.89                  | 24.83      | 24.77      |
|                   |            | 16QAM      | 1                | 0         | 26.00         | 25.79                  | 25.59      | 25.31      |
|                   |            |            | 1                | 37        | 26.00         | 25.73                  | 25.47      | 25.19      |
|                   |            |            | 1                | 74        | 26.00         | 25.86                  | 25.46      | 25.22      |
|                   |            |            | 36               | 0         | 24.50         | 24.45                  | 24.29      | 24.22      |
|                   |            |            | 36               | 18        | 24.50         | 24.36                  | 24.30      | 24.21      |
|                   |            |            | 36               | 37        | 24.50         | 24.46                  | 24.43      | 24.23      |
|                   |            |            | 75               | 0         | 24.50         | 23.98                  | 24.08      | 23.89      |
| Band              | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |            |
|                   |            |            | RB Size          | RB Offset |               | 37850/2580             | 38000/2595 | 38150/2610 |
| LTE<br>Band<br>38 | 20MHz      | QPSK       | 1                | 0         | 27.00         | 26.16                  | 26.57      | 25.97      |
|                   |            |            | 1                | 49        | 27.00         | 26.23                  | 26.56      | 26.00      |
|                   |            |            | 1                | 99        | 27.00         | 26.25                  | 26.52      | 25.89      |
|                   |            |            | 50               | 0         | 25.50         | 25.24                  | 25.26      | 25.21      |
|                   |            |            | 50               | 24        | 25.50         | 25.20                  | 25.16      | 25.05      |
|                   |            |            | 50               | 49        | 25.50         | 25.29                  | 25.35      | 25.22      |
|                   |            |            | 100              | 0         | 25.00         | 24.92                  | 24.92      | 24.82      |
|                   |            | 16QAM      | 1                | 0         | 26.00         | 25.24                  | 25.41      | 24.99      |
|                   |            |            | 1                | 49        | 26.00         | 25.29                  | 25.34      | 24.74      |
|                   |            |            | 1                | 99        | 26.00         | 25.42                  | 25.87      | 24.92      |
|                   |            |            | 50               | 0         | 25.00         | 24.52                  | 24.33      | 24.35      |
|                   |            |            | 50               | 24        | 25.00         | 24.55                  | 24.21      | 24.22      |
|                   |            |            | 50               | 49        | 25.00         | 24.51                  | 24.32      | 24.32      |
|                   |            |            | 100              | 0         | 24.00         | 23.98                  | 23.98      | 23.94      |

| Band               | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|--------------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|                    |            |            | RB Size          | RB Offset |               | 38725/2307.5           | 38750/2310 | 38775/2312.5 |
| LTE<br>Band<br>40A | 5MHz       | QPSK       | 1                | 0         | 24.50         | 23.82                  | 23.74      | 23.84        |
|                    |            |            | 1                | 12        | 24.50         | 24.12                  | 24.06      | 24.12        |
|                    |            |            | 1                | 24        | 24.50         | 23.80                  | 23.73      | 23.84        |
|                    |            |            | 12               | 0         | 23.00         | 22.90                  | 22.87      | 22.88        |

|              |            |            |                  |           |               |                        |            |       |       |
|--------------|------------|------------|------------------|-----------|---------------|------------------------|------------|-------|-------|
|              |            |            |                  | 12        | 6             | 23.00                  | 22.96      | 22.95 | 22.95 |
|              |            |            |                  | 12        | 11            | 23.00                  | 22.91      | 22.89 | 22.91 |
|              |            |            |                  | 25        | 0             | 23.00                  | 22.94      | 22.90 | 22.91 |
|              |            |            | 16QAM            | 1         | 0             | 24.00                  | 23.20      | 23.21 | 23.54 |
|              |            |            |                  | 1         | 12            | 24.00                  | 23.45      | 23.47 | 23.79 |
|              |            |            |                  | 1         | 24            | 24.00                  | 23.20      | 23.11 | 23.57 |
|              |            |            |                  | 12        | 0             | 22.50                  | 21.94      | 21.99 | 21.95 |
|              |            |            |                  | 12        | 6             | 22.50                  | 22.00      | 22.05 | 22.03 |
|              |            |            |                  | 12        | 11            | 22.50                  | 21.95      | 21.95 | 21.98 |
|              |            |            |                  | 25        | 0             | 22.50                  | 22.01      | 21.95 | 21.94 |
| Band         | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |       |       |
|              |            |            | RB Size          | RB Offset |               | N/A                    | 38750/2310 | N/A   |       |
| LTE Band 40A | 10MHz      | QPSK       | 1                | 0         | 24.50         | N/A                    | 23.82      | N/A   |       |
|              |            |            | 1                | 24        | 24.50         | N/A                    | 24.00      | N/A   |       |
|              |            |            | 1                | 49        | 24.50         | N/A                    | 23.82      | N/A   |       |
|              |            |            | 25               | 0         | 23.00         | N/A                    | 22.97      | N/A   |       |
|              |            |            | 25               | 12        | 23.00         | N/A                    | 22.94      | N/A   |       |
|              |            |            | 25               | 24        | 23.00         | N/A                    | 22.96      | N/A   |       |
|              |            |            | 50               | 0         | 23.00         | N/A                    | 22.97      | N/A   |       |
|              |            | 16QAM      | 1                | 0         | 24.00         | N/A                    | 23.45      | N/A   |       |
|              |            |            | 1                | 24        | 24.00         | N/A                    | 23.62      | N/A   |       |
|              |            |            | 1                | 49        | 24.00         | N/A                    | 23.47      | N/A   |       |
|              |            |            | 25               | 0         | 22.50         | N/A                    | 22.07      | N/A   |       |
|              |            |            | 25               | 12        | 22.50         | N/A                    | 22.06      | N/A   |       |
|              |            |            | 25               | 24        | 22.50         | N/A                    | 22.05      | N/A   |       |
|              |            |            | 50               | 0         | 22.50         | N/A                    | 22.05      | N/A   |       |

|              |            |            |                  |           |               |                        |            |              |
|--------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
| Band         | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|              |            |            | RB Size          | RB Offset |               | 39175/2352.5           | 39200/2355 | 39225/2357.5 |
| LTE Band 40B | 5MHz       | QPSK       | 1                | 0         | 24.50         | 23.92                  | 23.91      | 23.85        |
|              |            |            | 1                | 12        | 24.50         | 24.17                  | 24.14      | 24.11        |
|              |            |            | 1                | 24        | 24.50         | 23.90                  | 23.86      | 23.82        |
|              |            |            | 12               | 0         | 23.50         | 22.98                  | 22.96      | 22.97        |
|              |            |            | 12               | 6         | 23.50         | 23.04                  | 23.03      | 23.02        |
|              |            |            | 12               | 11        | 23.50         | 22.98                  | 22.97      | 22.97        |
|              |            |            | 25               | 0         | 23.00         | 22.98                  | 22.97      | 22.98        |

|              |            | 16QAM      | 1                | 0         | 24.00         | 23.65                  | 23.25      | 23.29 |
|--------------|------------|------------|------------------|-----------|---------------|------------------------|------------|-------|
|              |            |            | 1                | 12        | 24.00         | 23.92                  | 23.53      | 23.57 |
|              |            |            | 1                | 24        | 24.00         | 23.61                  | 23.24      | 23.28 |
|              |            |            | 12               | 0         | 22.50         | 22.06                  | 21.96      | 22.07 |
|              |            |            | 12               | 6         | 22.50         | 22.10                  | 22.03      | 22.13 |
|              |            |            | 12               | 11        | 22.50         | 22.07                  | 21.99      | 22.06 |
|              |            |            | 25               | 0         | 22.50         | 22.03                  | 22.06      | 22.04 |
| Band         | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |       |
|              |            |            | RB Size          | RB Offset |               | N/A                    | 39200/2355 | N/A   |
| LTE Band 40B | 10MHz      | QPSK       | 1                | 0         | 24.50         | N/A                    | 23.91      | N/A   |
|              |            |            | 1                | 24        | 24.50         | N/A                    | 24.12      | N/A   |
|              |            |            | 1                | 49        | 24.50         | N/A                    | 23.94      | N/A   |
|              |            |            | 25               | 0         | 23.50         | N/A                    | 23.04      | N/A   |
|              |            |            | 25               | 12        | 23.50         | N/A                    | 23.01      | N/A   |
|              |            |            | 25               | 24        | 23.50         | N/A                    | 23.02      | N/A   |
|              |            |            | 50               | 0         | 23.50         | N/A                    | 23.03      | N/A   |
|              |            | 16QAM      | 1                | 0         | 24.00         | N/A                    | 23.55      | N/A   |
|              |            |            | 1                | 24        | 24.00         | N/A                    | 23.73      | N/A   |
|              |            |            | 1                | 49        | 24.00         | N/A                    | 23.49      | N/A   |
|              |            |            | 25               | 0         | 22.50         | N/A                    | 22.13      | N/A   |
|              |            |            | 25               | 12        | 22.50         | N/A                    | 22.14      | N/A   |
|              |            |            | 25               | 24        | 22.50         | N/A                    | 22.13      | N/A   |
|              |            |            | 50               | 0         | 22.50         | N/A                    | 22.11      | N/A   |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|             |            |            | RB Size          | RB Offset |               | 40115/2542.5           | 40640/2595 | 41165/2647.5 |
| LTE Band 41 | 5MHz       | QPSK       | 1                | 0         | 25.50         | 24.50                  | 24.57      | 24.96        |
|             |            |            | 1                | 12        | 25.50         | 24.56                  | 24.62      | 24.95        |
|             |            |            | 1                | 24        | 25.50         | 24.41                  | 24.67      | 25.07        |
|             |            |            | 12               | 0         | 24.00         | 23.51                  | 23.67      | 23.87        |
|             |            |            | 12               | 6         | 24.00         | 23.52                  | 23.64      | 23.84        |
|             |            |            | 12               | 11        | 24.00         | 23.49                  | 23.61      | 23.76        |
|             |            |            | 25               | 0         | 24.00         | 23.51                  | 23.63      | 23.83        |
|             |            | 16QAM      | 1                | 0         | 24.00         | 23.24                  | 23.92      | 23.55        |
|             |            |            | 1                | 12        | 24.00         | 23.14                  | 23.96      | 23.50        |
|             |            |            | 1                | 24        | 24.00         | 23.21                  | 23.97      | 23.57        |

|             |            |            | 12               | 0         | 23.00         | 22.40                  | 22.70      | 22.84        |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|------------|--------------|
|             |            |            | 12               | 6         | 23.00         | 22.38                  | 22.71      | 22.82        |
|             |            |            | 12               | 11        | 23.00         | 22.50                  | 22.69      | 22.75        |
|             |            |            | 25               | 0         | 23.50         | 22.70                  | 22.86      | 23.10        |
| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|             |            |            | RB Size          | RB Offset |               | 40140/2545             | 40640/2595 | 41140/2645   |
| LTE Band 41 | 10MHz      | QPSK       | 1                | 0         | 25.00         | 24.47                  | 24.40      | 24.80        |
|             |            |            | 1                | 24        | 25.00         | 24.55                  | 24.57      | 24.82        |
|             |            |            | 1                | 49        | 25.00         | 24.62                  | 24.53      | 24.86        |
|             |            |            | 25               | 0         | 24.00         | 23.38                  | 23.58      | 23.81        |
|             |            |            | 25               | 12        | 24.00         | 23.45                  | 23.65      | 23.78        |
|             |            |            | 25               | 24        | 24.00         | 23.58                  | 23.61      | 23.82        |
|             |            |            | 50               | 0         | 23.50         | 23.21                  | 23.33      | 23.46        |
|             |            | 16QAM      | 1                | 0         | 24.50         | 23.87                  | 22.83      | 24.28        |
|             |            |            | 1                | 24        | 24.50         | 23.82                  | 22.91      | 24.11        |
|             |            |            | 1                | 49        | 24.50         | 23.90                  | 22.96      | 24.41        |
|             |            |            | 25               | 0         | 23.00         | 22.57                  | 22.75      | 22.83        |
|             |            |            | 25               | 12        | 23.00         | 22.53                  | 22.67      | 22.92        |
|             |            |            | 25               | 24        | 23.00         | 22.66                  | 22.81      | 22.84        |
|             |            |            | 50               | 0         | 23.00         | 22.25                  | 22.41      | 22.59        |
| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |              |
|             |            |            | RB Size          | RB Offset |               | 40165/2547.5           | 40640/2595 | 41115/2642.5 |
| LTE Band 41 | 15MHz      | QPSK       | 1                | 0         | 25.00         | 24.49                  | 24.40      | 24.58        |
|             |            |            | 1                | 37        | 25.00         | 24.54                  | 24.50      | 24.63        |
|             |            |            | 1                | 74        | 25.00         | 24.56                  | 24.55      | 24.63        |
|             |            |            | 36               | 0         | 24.00         | 23.48                  | 23.68      | 23.79        |
|             |            |            | 36               | 18        | 24.00         | 23.50                  | 23.74      | 23.76        |
|             |            |            | 36               | 37        | 24.00         | 23.49                  | 23.74      | 23.82        |
|             |            |            | 75               | 0         | 23.50         | 23.15                  | 23.33      | 23.45        |
|             |            | 16QAM      | 1                | 0         | 24.50         | 23.91                  | 22.77      | 23.76        |
|             |            |            | 1                | 37        | 24.50         | 24.07                  | 22.82      | 23.92        |
|             |            |            | 1                | 74        | 24.50         | 24.09                  | 22.94      | 24.23        |
|             |            |            | 36               | 0         | 23.00         | 22.66                  | 22.91      | 22.85        |
|             |            |            | 36               | 18        | 23.00         | 22.68                  | 22.90      | 22.71        |
|             |            |            | 36               | 37        | 23.00         | 22.57                  | 22.96      | 22.75        |
|             |            |            | 75               | 0         | 23.00         | 22.32                  | 22.48      | 22.67        |

| Band        | Band Width | Modulation | RB Configuration |           | Tune-up (dBm) | Channel/Frequency(MHz) |            |            |
|-------------|------------|------------|------------------|-----------|---------------|------------------------|------------|------------|
|             |            |            | RB Size          | RB Offset |               | 40190/2550             | 40640/2595 | 41090/2640 |
| LTE Band 41 | 20MHz      | QPSK       | 1                | 0         | 25.00         | 24.22                  | 24.75      | 24.67      |
|             |            |            | 1                | 49        | 25.00         | 24.43                  | 24.77      | 24.74      |
|             |            |            | 1                | 99        | 25.00         | 24.52                  | 24.87      | 24.74      |
|             |            |            | 50               | 0         | 24.00         | 23.53                  | 23.68      | 23.79      |
|             |            |            | 50               | 24        | 24.00         | 23.48                  | 23.69      | 23.77      |
|             |            |            | 50               | 49        | 24.00         | 23.56                  | 23.73      | 23.81      |
|             |            |            | 100              | 0         | 23.50         | 23.23                  | 23.24      | 23.48      |
|             |            | 16QAM      | 1                | 0         | 24.00         | 23.08                  | 23.21      | 23.64      |
|             |            |            | 1                | 49        | 24.00         | 23.25                  | 23.28      | 23.25      |
|             |            |            | 1                | 99        | 24.00         | 23.24                  | 23.36      | 23.55      |
|             |            |            | 50               | 0         | 23.50         | 22.69                  | 22.67      | 23.04      |
|             |            |            | 50               | 24        | 23.50         | 22.74                  | 22.70      | 22.90      |
|             |            |            | 50               | 49        | 23.50         | 22.78                  | 22.80      | 22.95      |
|             |            |            | 100              | 0         | 23.00         | 22.28                  | 22.51      | 22.59      |

#### 7.4. WLAN & Bluetooth Output Power

##### 7.4.1. Output Power Results Of WLAN

| Mode         | Channel | Frequency (MHz) | Tune-up (dBm) | Output Power (dBm) |
|--------------|---------|-----------------|---------------|--------------------|
| 802.11b      | 1       | 2412            | 15.50         | 15.15              |
|              | 6       | 2437            | 15.50         | 14.41              |
|              | 11      | 2462            | 15.50         | 15.11              |
| 802.11g      | 1       | 2412            | 14.00         | 13.52              |
|              | 6       | 2437            | 14.00         | 13.89              |
|              | 11      | 2462            | 14.00         | 13.17              |
| 802.11n HT20 | 1       | 2412            | 12.50         | 12.03              |
|              | 6       | 2437            | 12.50         | 12.30              |
|              | 11      | 2462            | 12.50         | 11.30              |
| 802.11n HT40 | 3       | 2422            | 12.50         | 12.06              |
|              | 6       | 2437            | 12.50         | 11.74              |
|              | 9       | 2452            | 12.50         | 11.56              |

NOTE: Power measurement results of WLAN 2.4G.

| Mode           | Channel | Frequency (MHz) | Tune-up (dBm) | Output Power (dBm) |
|----------------|---------|-----------------|---------------|--------------------|
| 802.11a        | 36      | 5180            | 10.50         | 9.97               |
|                | 40      | 5200            | 10.50         | 10.13              |
|                | 48      | 5240            | 10.50         | 9.55               |
| 802.11n HT20   | 36      | 5180            | 10.50         | 9.94               |
|                | 40      | 5200            | 10.50         | 10.16              |
|                | 48      | 5240            | 10.50         | 9.58               |
| 802.11n HT40   | 38      | 5190            | 11.00         | 10.77              |
|                | 46      | 5230            | 11.00         | 10.15              |
| 802.11ac VHT20 | 36      | 5180            | 10.50         | 9.91               |
|                | 40      | 5200            | 10.50         | 10.11              |
|                | 48      | 5240            | 10.50         | 9.57               |
| 802.11ac VHT40 | 38      | 5190            | 11.00         | 10.73              |
|                | 46      | 5230            | 11.00         | 10.15              |
| 802.11ac VHT80 | 42      | 5210            | 11.00         | 10.69              |

NOTE: Power measurement results of WLAN 5.2G.

| Mode           | Channel | Frequency (MHz) | Tune-up (dBm) | Output Power (dBm) |
|----------------|---------|-----------------|---------------|--------------------|
| 802.11a        | 149     | 5745            | 10.00         | 9.33               |
|                | 157     | 5785            | 10.00         | 9.91               |
|                | 165     | 5825            | 10.00         | 9.62               |
| 802.11n HT20   | 149     | 5745            | 10.00         | 9.43               |
|                | 157     | 5785            | 10.00         | 9.94               |
|                | 165     | 5825            | 10.00         | 9.70               |
| 802.11n HT40   | 151     | 5755            | 11.00         | 10.59              |
|                | 159     | 5795            | 11.00         | 10.19              |
| 802.11ac VHT20 | 149     | 5745            | 10.00         | 9.42               |
|                | 157     | 5785            | 10.00         | 9.95               |
|                | 165     | 5825            | 10.00         | 9.70               |
| 802.11ac VHT40 | 151     | 5755            | 10.50         | 10.46              |
|                | 159     | 5795            | 10.50         | 10.17              |
| 802.11ac VHT80 | 155     | 5775            | 10.50         | 10.21              |

NOTE: Power measurement results of WLAN 5.8G.


#### 7.4.2. Output Power Results Of Bluetooth

|        |                    |
|--------|--------------------|
| BR+EDR | Output Power (dBm) |
|--------|--------------------|

|  | Data Rates | Tune-up<br>(dBm) | Channel |      |      |
|--|------------|------------------|---------|------|------|
|  |            |                  | 0CH     | 39CH | 78CH |
|  | 1M         | 5                | 4.22    | 3.02 | 4.75 |
|  | 2M         | 7                | 6.12    | 5.14 | 6.86 |
|  | 3M         | 7.5              | 6.31    | 5.76 | 7.50 |

| BLE | Channel | Tune-up<br>(dBm) | Output Power (dBm) |       |
|-----|---------|------------------|--------------------|-------|
|     |         |                  | 1M                 | 2M    |
|     | 0CH     | -2.00            | -2.71              | -2.85 |
|     | 19CH    | -1.00            | -1.71              | -1.9  |
|     | 39CH    | -2.00            | -2.90              | -3.07 |

## 8. Antenna Location

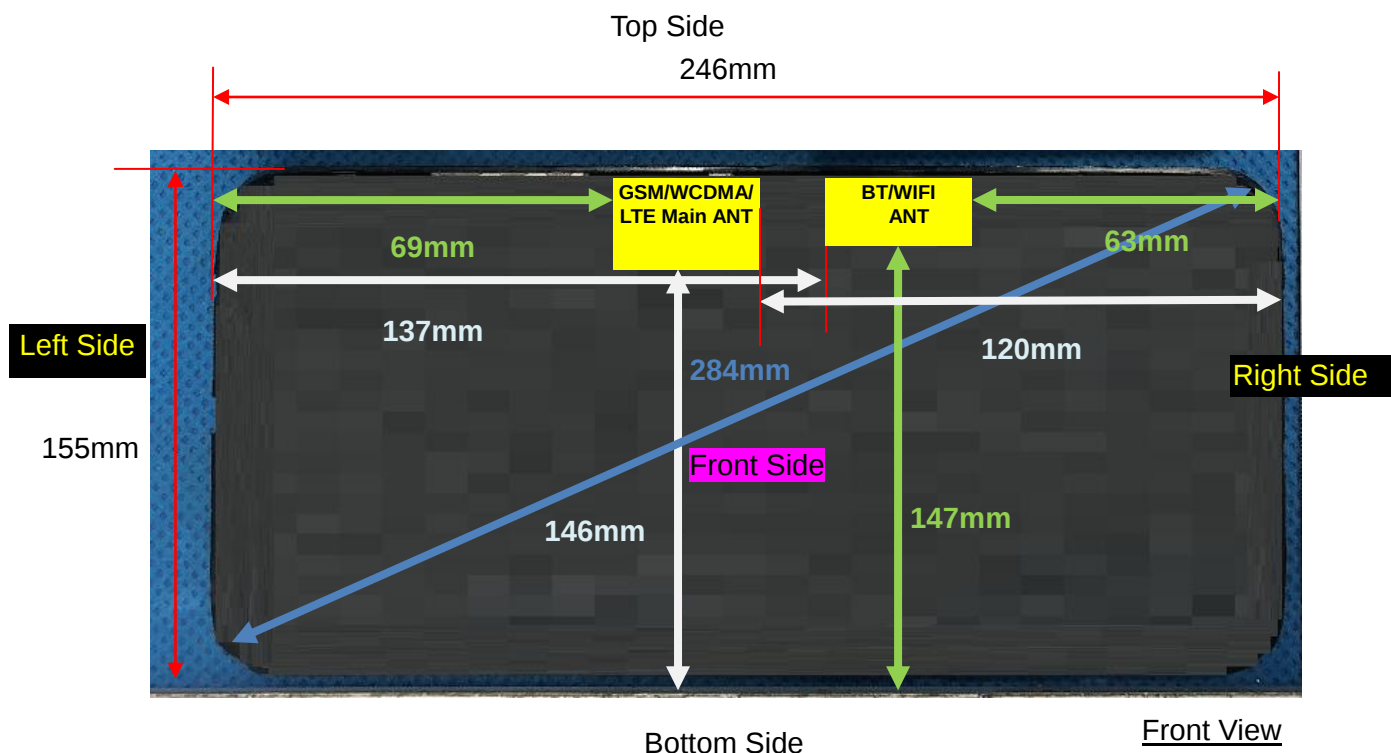

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

| Distance of the Antenna to the EUT surface/edge |            |           |           |            |          |             |
|-------------------------------------------------|------------|-----------|-----------|------------|----------|-------------|
| Antennas                                        | Front Side | Back Side | Left Side | Right Side | Top Side | Bottom Side |
| WLAN & Bluetooth                                | 5          | 5         | 137       | 63         | 5        | 147         |
| WWAN                                            | 5          | 5         | 69        | 120        | 5        | 146         |

Note: When the minimum separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

| Positions for SAR tests                |                                    |       |
|----------------------------------------|------------------------------------|-------|
| Test separation distances $\leq$ 50 mm |                                    |       |
| Exposure Positions                     | Tune-up Maximum power of WLAN 2.4G |       |
|                                        | 15.50dBm                           |       |
| Front Side                             | Antenna to user(mm)                | 5     |
|                                        | SAR exclusion threshold            | 11.14 |
|                                        | SAR testing required?              | YES   |
| Back Side                              | Antenna to user(mm)                | 5     |
|                                        | SAR exclusion threshold            | 11.14 |
|                                        | SAR testing required?              | YES   |
| Top Side                               | Antenna to user(mm)                | 5     |
|                                        | SAR exclusion threshold            | 11.14 |
|                                        | SAR testing required?              | YES   |
| Exposure Positions                     | Tune-up Maximum power of WLAN 5.2G |       |

|                    |                                    |        |
|--------------------|------------------------------------|--------|
|                    | 11.00dBm                           |        |
| Front Side         | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 5.76   |
|                    | SAR testing required?              | YES    |
| Back Side          | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 5.76   |
|                    | SAR testing required?              | YES    |
| Top Side           | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 5.76   |
|                    | SAR testing required?              | YES    |
| Exposure Positions | Tune-up Maximum power of WLAN 5.8G |        |
|                    | 11.00dBm                           |        |
| Front Side         | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 6.08   |
|                    | SAR testing required?              | YES    |
| Back Side          | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 6.08   |
|                    | SAR testing required?              | YES    |
| Top Side           | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 6.08   |
|                    | SAR testing required?              | YES    |
| Exposure Positions | Tune-up Maximum power of GSM 850   |        |
|                    | 32.00dBm                           |        |
| Front Side         | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 291.87 |
|                    | SAR testing required?              | YES    |
| Back Side          | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 291.87 |
|                    | SAR testing required?              | YES    |
| Top Side           | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 291.87 |
|                    | SAR testing required?              | YES    |
| Exposure Positions | Tune-up Maximum power of GSM 1900  |        |
|                    | 27.50dBm                           |        |
| Front Side         | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 155.39 |
|                    | SAR testing required?              | YES    |
| Back Side          | Antenna to user(mm)                | 5      |
|                    | SAR exclusion threshold            | 155.39 |
|                    | SAR testing required?              | YES    |

|                    |                                       |        |
|--------------------|---------------------------------------|--------|
| Top Side           | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 155.39 |
|                    | SAR testing required?                 | YES    |
| Exposure Positions | Tune-up Maximum power of WCDMA Band 2 |        |
|                    | 24.00dBm                              |        |
| Front Side         | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 69.39  |
|                    | SAR testing required?                 | YES    |
| Back Side          | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 69.39  |
|                    | SAR testing required?                 | YES    |
| Top Side           | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 69.39  |
|                    | SAR testing required?                 | YES    |
| Exposure Positions | Tune-up Maximum power of WCDMA Band 5 |        |
|                    | 24.00dBm                              |        |
| Front Side         | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 41.20  |
|                    | SAR testing required?                 | YES    |
| Back Side          | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 41.20  |
|                    | SAR testing required?                 | YES    |
| Top Side           | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 41.20  |
|                    | SAR testing required?                 | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 2   |        |
|                    | 26.50dBm                              |        |
| Front Side         | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 123.14 |
|                    | SAR testing required?                 | YES    |
| Back Side          | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 123.14 |
|                    | SAR testing required?                 | YES    |
| Top Side           | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 123.14 |
|                    | SAR testing required?                 | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 5   |        |
|                    | 24.50dBm                              |        |
| Front Side         | Antenna to user(mm)                   | 5      |
|                    | SAR exclusion threshold               | 51.79  |

|                    |                                      |        |
|--------------------|--------------------------------------|--------|
|                    | SAR testing required?                | YES    |
| Back Side          | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 51.79  |
|                    | SAR testing required?                | YES    |
| Top Side           | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 51.79  |
|                    | SAR testing required?                | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 7  |        |
|                    | 26.50dBm                             |        |
| Front Side         | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 142.94 |
|                    | SAR testing required?                | YES    |
| Back Side          | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 142.94 |
|                    | SAR testing required?                | YES    |
| Top Side           | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 142.94 |
|                    | SAR testing required?                | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 12 |        |
|                    | 24.50dBm                             |        |
| Front Side         | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 47.53  |
|                    | SAR testing required?                | YES    |
| Back Side          | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 47.53  |
|                    | SAR testing required?                | YES    |
| Top Side           | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 47.53  |
|                    | SAR testing required?                | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 17 |        |
|                    | 24.50dBm                             |        |
| Front Side         | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 47.53  |
|                    | SAR testing required?                | YES    |
| Back Side          | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 47.53  |
|                    | SAR testing required?                | YES    |
| Top Side           | Antenna to user(mm)                  | 5      |
|                    | SAR exclusion threshold              | 47.53  |
|                    | SAR testing required?                | YES    |

| Exposure Positions | Tune-up Maximum power of LTE Band 38    |        |
|--------------------|-----------------------------------------|--------|
|                    | 27.00dBm                                |        |
| Front Side         | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 161.94 |
|                    | SAR testing required?                   | YES    |
| Back Side          | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 161.94 |
|                    | SAR testing required?                   | YES    |
| Top Side           | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 161.94 |
|                    | SAR testing required?                   | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 40A/B |        |
|                    | 24.50dBm                                |        |
| Front Side         | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 77.67  |
|                    | SAR testing required?                   | YES    |
| Back Side          | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 77.67  |
|                    | SAR testing required?                   | YES    |
| Top Side           | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 77.67  |
|                    | SAR testing required?                   | YES    |
| Exposure Positions | Tune-up Maximum power of LTE Band 41    |        |
|                    | 25.00dBm                                |        |
| Front Side         | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 103.54 |
|                    | SAR testing required?                   | YES    |
| Back Side          | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 103.54 |
|                    | SAR testing required?                   | YES    |
| Top Side           | Antenna to user(mm)                     | 5      |
|                    | SAR exclusion threshold                 | 103.54 |
|                    | SAR testing required?                   | YES    |

NOTE: Refer to section 4.3.1 of KDB 447498 D01.

| Positions for SAR tests           |                                    |          |
|-----------------------------------|------------------------------------|----------|
| Test separation distances > 50 mm |                                    |          |
| Exposure Positions                | Tune-up Maximum power of WLAN 2.4G |          |
|                                   | 15.50 dBm                          | 35.48 mV |
| Left Side                         | Antenna to user(mm)                | 69       |

|                    |                                    |            |
|--------------------|------------------------------------|------------|
|                    | SAR exclusion threshold(mW)        | 286        |
|                    | SAR testing required?              | NO         |
| Right Side         | Antenna to user(mm)                | 120        |
|                    | SAR exclusion threshold(mW)        | 796        |
|                    | SAR testing required?              | NO         |
| Bottom Side        | Antenna to user(mm)                | 146        |
|                    | SAR exclusion threshold(mW)        | 1056       |
|                    | SAR testing required?              | NO         |
| Exposure Positions | Tune-up Maximum power of WLAN 5.2G |            |
|                    | 11.00 dBm                          | 12.59 mV   |
| Left Side          | Antenna to user(mm)                | 69         |
|                    | SAR exclusion threshold(mW)        | 256        |
|                    | SAR testing required?              | NO         |
| Right Side         | Antenna to user(mm)                | 120        |
|                    | SAR exclusion threshold(mW)        | 766        |
|                    | SAR testing required?              | NO         |
| Bottom Side        | Antenna to user(mm)                | 146        |
|                    | SAR exclusion threshold(mW)        | 1026       |
|                    | SAR testing required?              | NO         |
| Exposure Positions | Tune-up Maximum power of WLAN 5.8G |            |
|                    | 11.00 dBm                          | 12.59 mV   |
| Left Side          | Antenna to user(mm)                | 69         |
|                    | SAR exclusion threshold(mW)        | 252        |
|                    | SAR testing required?              | NO         |
| Right Side         | Antenna to user(mm)                | 120        |
|                    | SAR exclusion threshold(mW)        | 762        |
|                    | SAR testing required?              | NO         |
| Bottom Side        | Antenna to user(mm)                | 146        |
|                    | SAR exclusion threshold(mW)        | 1022       |
|                    | SAR testing required?              | NO         |
| Exposure Positions | Tune-up Maximum power of GSM 850   |            |
|                    | 32.00 dBm                          | 1584.89 mV |
| Left Side          | Antenna to user(mm)                | 137        |
|                    | SAR exclusion threshold(mW)        | 648        |
|                    | SAR testing required?              | YES        |
| Right Side         | Antenna to user(mm)                | 63         |
|                    | SAR exclusion threshold(mW)        | 236        |
|                    | SAR testing required?              | YES        |
| Bottom Side        | Antenna to user(mm)                | 147        |
|                    | SAR exclusion threshold(mW)        | 704        |

|                    |                                       |           |
|--------------------|---------------------------------------|-----------|
|                    | SAR testing required?                 | YES       |
| Exposure Positions | Tune-up Maximum power of GSM 1900     |           |
|                    | 27.50 dBm                             | 562.34 mV |
| Left Side          | Antenna to user(mm)                   | 137       |
|                    | SAR exclusion threshold(mW)           | 979       |
|                    | SAR testing required?                 | YES       |
| Right Side         | Antenna to user(mm)                   | 63        |
|                    | SAR exclusion threshold(mW)           | 239       |
|                    | SAR testing required?                 | YES       |
| Bottom Side        | Antenna to user(mm)                   | 147       |
|                    | SAR exclusion threshold(mW)           | 1079      |
|                    | SAR testing required?                 | NO        |
| Exposure Positions | Tune-up Maximum power of WCDMA Band 2 |           |
|                    | 24.00 dBm                             | 251.19 mV |
| Left Side          | Antenna to user(mm)                   | 137       |
|                    | SAR exclusion threshold(mW)           | 979       |
|                    | SAR testing required?                 | NO        |
| Right Side         | Antenna to user(mm)                   | 63        |
|                    | SAR exclusion threshold(mW)           | 239       |
|                    | SAR testing required?                 | YES       |
| Bottom Side        | Antenna to user(mm)                   | 147       |
|                    | SAR exclusion threshold(mW)           | 1079      |
|                    | SAR testing required?                 | NO        |
| Exposure Positions | Tune-up Maximum power of WCDMA Band 5 |           |
|                    | 24.00 dBm                             | 251.19 mV |
| Left Side          | Antenna to user(mm)                   | 137       |
|                    | SAR exclusion threshold(mW)           | 648       |
|                    | SAR testing required?                 | NO        |
| Right Side         | Antenna to user(mm)                   | 63        |
|                    | SAR exclusion threshold(mW)           | 236       |
|                    | SAR testing required?                 | YES       |
| Bottom Side        | Antenna to user(mm)                   | 147       |
|                    | SAR exclusion threshold(mW)           | 704       |
|                    | SAR testing required?                 | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 2   |           |
|                    | 26.50 dBm                             | 446.68 mV |
| Left Side          | Antenna to user(mm)                   | 137       |
|                    | SAR exclusion threshold(mW)           | 979       |
|                    | SAR testing required?                 | NO        |
| Right Side         | Antenna to user(mm)                   | 63        |

|                    |                                      |           |
|--------------------|--------------------------------------|-----------|
|                    | SAR exclusion threshold(mW)          | 239       |
|                    | SAR testing required?                | YES       |
|                    |                                      |           |
| Bottom Side        | Antenna to user(mm)                  | 147       |
|                    | SAR exclusion threshold(mW)          | 1079      |
|                    | SAR testing required?                | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 5  |           |
|                    | 24.50 dBm                            | 281.84 mV |
| Left Side          | Antenna to user(mm)                  | 137       |
|                    | SAR exclusion threshold(mW)          | 648       |
|                    | SAR testing required?                | NO        |
| Right Side         | Antenna to user(mm)                  | 63        |
|                    | SAR exclusion threshold(mW)          | 236       |
|                    | SAR testing required?                | YES       |
| Bottom Side        | Antenna to user(mm)                  | 147       |
|                    | SAR exclusion threshold(mW)          | 704       |
|                    | SAR testing required?                | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 7  |           |
|                    | 26.50 dBm                            | 354.81 mV |
| Left Side          | Antenna to user(mm)                  | 137       |
|                    | SAR exclusion threshold(mW)          | 966       |
|                    | SAR testing required?                | NO        |
| Right Side         | Antenna to user(mm)                  | 63        |
|                    | SAR exclusion threshold(mW)          | 226       |
|                    | SAR testing required?                | YES       |
| Bottom Side        | Antenna to user(mm)                  | 147       |
|                    | SAR exclusion threshold(mW)          | 1066      |
|                    | SAR testing required?                | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 12 |           |
|                    | 24.50 dBm                            | 281.84 mV |
| Left Side          | Antenna to user(mm)                  | 137       |
|                    | SAR exclusion threshold(mW)          | 648       |
|                    | SAR testing required?                | NO        |
| Right Side         | Antenna to user(mm)                  | 63        |
|                    | SAR exclusion threshold(mW)          | 236       |
|                    | SAR testing required?                | YES       |
| Bottom Side        | Antenna to user(mm)                  | 147       |
|                    | SAR exclusion threshold(mW)          | 704       |
|                    | SAR testing required?                | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 17 |           |
|                    | 24.50 dBm                            | 281.84 mV |

|                    |                                         |           |
|--------------------|-----------------------------------------|-----------|
| Left Side          | Antenna to user(mm)                     | 137       |
|                    | SAR exclusion threshold(mW)             | 648       |
|                    | SAR testing required?                   | NO        |
| Right Side         | Antenna to user(mm)                     | 63        |
|                    | SAR exclusion threshold(mW)             | 236       |
|                    | SAR testing required?                   | YES       |
| Bottom Side        | Antenna to user(mm)                     | 147       |
|                    | SAR exclusion threshold(mW)             | 704       |
|                    | SAR testing required?                   | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 38    |           |
|                    | 27.00 dBm                               | 501.19 mV |
| Left Side          | Antenna to user(mm)                     | 137       |
|                    | SAR exclusion threshold(mW)             | 966       |
|                    | SAR testing required?                   | NO        |
| Right Side         | Antenna to user(mm)                     | 63        |
|                    | SAR exclusion threshold(mW)             | 226       |
|                    | SAR testing required?                   | YES       |
| Bottom Side        | Antenna to user(mm)                     | 147       |
|                    | SAR exclusion threshold(mW)             | 1066      |
|                    | SAR testing required?                   | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 40A/B |           |
|                    | 24.50 dBm                               | 281.84 mV |
| Left Side          | Antenna to user(mm)                     | 137       |
|                    | SAR exclusion threshold(mW)             | 966       |
|                    | SAR testing required?                   | NO        |
| Right Side         | Antenna to user(mm)                     | 63        |
|                    | SAR exclusion threshold(mW)             | 226       |
|                    | SAR testing required?                   | YES       |
| Bottom Side        | Antenna to user(mm)                     | 147       |
|                    | SAR exclusion threshold(mW)             | 1066      |
|                    | SAR testing required?                   | NO        |
| Exposure Positions | Tune-up Maximum power of LTE Band 41    |           |
|                    | 25.00 dBm                               | 316.23 mV |
| Left Side          | Antenna to user(mm)                     | 137       |
|                    | SAR exclusion threshold(mW)             | 966       |
|                    | SAR testing required?                   | NO        |
| Right Side         | Antenna to user(mm)                     | 63        |
|                    | SAR exclusion threshold(mW)             | 226       |
|                    | SAR testing required?                   | YES       |
| Bottom Side        | Antenna to user(mm)                     | 147       |

|  |                             |      |
|--|-----------------------------|------|
|  | SAR exclusion threshold(mW) | 1066 |
|  | SAR testing required?       | NO   |

NOTE: Refer to section 4.3.1 of KDB 447498 D01.

## 9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

| Mode      | $P_{\text{max}}$<br>(dBm) | $P_{\text{max}}$<br>(mW) | Distance<br>(mm) | f<br>(GHz) | Calculation<br>Result | SAR Exclusion<br>threshold | SAR test<br>exclusion |
|-----------|---------------------------|--------------------------|------------------|------------|-----------------------|----------------------------|-----------------------|
| Bluetooth | 7.50                      | 5.62                     | 5                | 2.480      | 1.76                  | 3                          | Yes                   |

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$  for test separation distances  $\leq 50\text{mm}$ , where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

| Mode      | Position | $P_{\text{max}}$<br>(dBm) | $P_{\text{max}}$<br>(mW) | Distance<br>(mm) | f<br>(GHz) | x   | Estimated SAR<br>(W/Kg) |
|-----------|----------|---------------------------|--------------------------|------------------|------------|-----|-------------------------|
| Bluetooth | Body     | 7.50                      | 5.62                     | 5                | 2.48       | 7.5 | 0.235                   |
| Bluetooth | Hotspot  | 7.50                      | 5.62                     | 5                | 2.48       | 7.5 | 0.235                   |

NOTE: Estimated SAR calculation for Bluetooth

## 10. SAR Results

### 10.1. SAR measurement results

#### 10.1.1. SAR measurement Result of GSM850

| Test<br>Position of | Test<br>channel | Test Mode | SAR Value<br>(W/kg) | Power<br>Drift | Conducted<br>power | Tune-up<br>power | Scaled<br>SAR | Date | Plot |
|---------------------|-----------------|-----------|---------------------|----------------|--------------------|------------------|---------------|------|------|
|---------------------|-----------------|-----------|---------------------|----------------|--------------------|------------------|---------------|------|------|

| Body-Worn<br>with 0mm | /Freq.    |                   | 1g    | 10g   | (±5%) | (dBm) | (dBm) | 1g<br>(W/Kg) |           |    |
|-----------------------|-----------|-------------------|-------|-------|-------|-------|-------|--------------|-----------|----|
| Front Side            | 189/836.4 | GPRS(GMSK<br>3TS) | 0.408 | 0.222 | -0.46 | 31.50 | 31.50 | 0.408        | 2023/5/22 |    |
| Back Side             | 189/836.4 | GPRS(GMSK<br>3TS) | 0.655 | 0.364 | -0.49 | 31.50 | 31.50 | 0.655        | 2023/5/22 | 1# |

NOTE: Body-Worn SAR test results of GSM850

| Test Position of Hotspot with 0mm | Test channel /Freq. | Mode           | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-----------------------------------|---------------------|----------------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                   |                     |                | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                        | 189/836.4           | GPRS(GMSK 3TS) | 0.408            | 0.222 | -0.46          | 31.50                 | 31.50               | 0.408                 | 2023/5/22 |      |
| Back Side                         | 189/836.4           | GPRS(GMSK 3TS) | 0.655            | 0.364 | -0.49          | 31.50                 | 31.50               | 0.655                 | 2023/5/22 | 1#   |
| Left Side                         | 189/836.4           | GPRS(GMSK 3TS) | 0.204            | 0.112 | -2.39          | 31.50                 | 31.50               | 0.204                 | 2023/5/22 |      |
| Right Side                        | 189/836.4           | GPRS(GMSK 3TS) | 0.207            | 0.109 | -2.32          | 31.50                 | 31.50               | 0.207                 | 2023/5/22 |      |
| Top Side                          | 189/836.4           | GPRS(GMSK 3TS) | 0.341            | 0.174 | 0.12           | 31.50                 | 31.50               | 0.341                 | 2023/5/22 |      |
| Bottom Side                       | 189/836.4           | GPRS(GMSK 3TS) | 0.350            | 0.185 | -0.11          | 31.50                 | 31.50               | 0.350                 | 2023/5/22 |      |

NOTE: Hotspot SAR test results of GSM850

### 10.1.2. SAR measurement Result of GSM1900

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test<br>channel<br>/Freq. | Test Mode         | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|---------------------------|-------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                           |                   | 1g                  | 10g   |                         |                             |                           |                               |           |      |
| Front Side                                   | 661/1880                  | GPRS(GMSK<br>3TS) | 0.318               | 0.129 | 0.98                    | 26.93                       | 27.50                     | 0.363                         | 2023/5/23 |      |
| Back Side                                    | 661/1880                  | GPRS(GMSK<br>3TS) | 0.525               | 0.218 | 0.71                    | 26.93                       | 27.50                     | 0.599                         | 2023/5/23 | 2#   |

NOTE: Body-Worn SAR test results of GSM1900

| Test<br>Position<br>of | Test<br>channel<br>/Freq. | Mode | SAR Value<br>(W/kg) |      | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g | Date | Plot |
|------------------------|---------------------------|------|---------------------|------|-------------------|-----------------------------|---------------------------|----------------------|------|------|
|                        |                           |      | 1-g                 | 10-g |                   |                             |                           |                      |      |      |

|                  |          |                |       |       |       |       |       |        |           |    |
|------------------|----------|----------------|-------|-------|-------|-------|-------|--------|-----------|----|
| Hotspot with 0mm |          |                |       |       |       |       |       | (W/Kg) |           |    |
| Front Side       | 661/1880 | GPRS(GMSK 3TS) | 0.318 | 0.129 | 0.98  | 26.93 | 27.50 | 0.363  | 2023/5/23 |    |
| Back Side        | 661/1880 | GPRS(GMSK 3TS) | 0.525 | 0.218 | 0.71  | 26.93 | 27.50 | 0.599  | 2023/5/23 | 2# |
| Left Side        | 661/1880 | GPRS(GMSK 3TS) | 0.171 | 0.067 | -3.48 | 26.93 | 27.50 | 0.195  | 2023/5/23 |    |
| Right Side       | 661/1880 | GPRS(GMSK 3TS) | 0.171 | 0.069 | -3.08 | 26.93 | 27.50 | 0.195  | 2023/5/23 |    |
| Top Side         | 661/1880 | GPRS(GMSK 3TS) | 0.285 | 0.115 | 2.39  | 26.93 | 27.50 | 0.325  | 2023/5/23 |    |

NOTE: Hotspot SAR test results of GSM1900

### 10.1.3. SAR measurement Result of WCDMA Band 2

| Test Position of Body-Worn with 0mm | Test channel /Freq. | Test Mode | SAR Value (W/kg) |       | Power Drift (±5%) | Conducted power (dBm) | Tune-up power (dBm) | Scaled SAR 1g (W/Kg) | Date      | Plot |
|-------------------------------------|---------------------|-----------|------------------|-------|-------------------|-----------------------|---------------------|----------------------|-----------|------|
|                                     |                     |           | 1g               | 10g   |                   |                       |                     |                      |           |      |
| Front Side                          | 9400/1880           | RMC12.2K  | 0.468            | 0.201 | -2.98             | 23.84                 | 24.00               | 0.486                | 2023/5/23 |      |
| Back Side                           | 9400/1880           | RMC12.2K  | 0.778            | 0.344 | -0.38             | 23.84                 | 24.00               | 0.807                | 2023/5/23 | 3#   |
| Back Side                           | 9262/1852.4         | RMC12.2K  | 0.745            | 0.320 | 0.12              | 23.87                 | 24.00               | 0.768                | 2023/5/23 |      |
| Back Side                           | 9538/1907.6         | RMC12.2K  | 0.712            | 0.312 | 0.15              | 23.89                 | 24.00               | 0.730                | 2023/5/23 |      |
| BackSide Repeated                   | 9400/1880           | RMC12.2K  | 0.760            | 0.340 | 1.54              | 23.84                 | 24.00               | 0.789                | 2023/5/23 |      |

NOTE: Body-Worn SAR test results of WCDMA Band 2

| Test Position of Hotspot with 0mm | Test channel /Freq. | Mode     | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-----------------------------------|---------------------|----------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                   |                     |          | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                        | 9400/1880           | RMC12.2K | 0.468            | 0.201 | -2.98          | 23.84                 | 24.00               | 0.486                 | 2023/5/23 |      |
| Back Side                         | 9400/1880           | RMC12.2K | 0.778            | 0.344 | -0.38          | 23.84                 | 24.00               | 0.807                 | 2023/5/23 | 3#   |
| Right Side                        | 9400/1880           | RMC12.2K | 0.243            | 0.104 | 2.73           | 23.84                 | 24.00               | 0.252                 | 2023/5/23 |      |
| Top Side                          | 9400/1880           | RMC12.2K | 0.405            | 0.170 | -1.06          | 23.84                 | 24.00               | 0.420                 | 2023/5/23 |      |

|                   |             |          |       |       |      |       |       |       |           |  |
|-------------------|-------------|----------|-------|-------|------|-------|-------|-------|-----------|--|
| Back Side         | 9262/1852.4 | RMC12.2K | 0.745 | 0.320 | 0.12 | 23.87 | 24.00 | 0.768 | 2023/5/23 |  |
| Back Side         | 9538/1907.6 | RMC12.2K | 0.712 | 0.312 | 0.15 | 23.89 | 24.00 | 0.730 | 2023/5/23 |  |
| BackSide Repeated | 9400/1880   | RMC12.2K | 0.760 | 0.340 | 1.54 | 23.84 | 24.00 | 0.789 | 2023/5/23 |  |

NOTE: Hotspot SAR test results of WCDMA Band 2

**10.1.4. SAR measurement Result of WCDMA Band 5**

| Test Position of Body-Worn with 0mm | Test channel /Freq. | Test Mode | SAR Value (W/kg) |       | Power Drift (±5%) | Conducted power (dBm) | Tune-up power (dBm) | Scaled SAR 1g (W/Kg) | Date      | Plot |
|-------------------------------------|---------------------|-----------|------------------|-------|-------------------|-----------------------|---------------------|----------------------|-----------|------|
|                                     |                     |           | 1g               | 10g   |                   |                       |                     |                      |           |      |
| Front Side                          | 4182/836.4          | RMC12.2K  | 0.402            | 0.242 | 3.52              | 23.52                 | 24.00               | 0.449                | 2023/5/22 |      |
| Back Side                           | 4182/836.4          | RMC12.2K  | 0.626            | 0.384 | -0.38             | 23.52                 | 24.00               | 0.699                | 2023/5/22 | 4#   |

NOTE: Body-Worn SAR test results of WCDMA Band 5

| Test Position of Hotspot with 0mm | Test channel /Freq. | Mode     | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-----------------------------------|---------------------|----------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                   |                     |          | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                        | 4182/836.4          | RMC12.2K | 0.402            | 0.242 | 3.52           | 23.52                 | 24.00               | 0.449                 | 2023/5/22 |      |
| Back Side                         | 4182/836.4          | RMC12.2K | 0.626            | 0.384 | -0.38          | 23.52                 | 24.00               | 0.699                 | 2023/5/22 | 4#   |
| Right Side                        | 4182/836.4          | RMC12.2K | 0.189            | 0.114 | 1.97           | 23.52                 | 24.00               | 0.211                 | 2023/5/22 |      |
| Top Side                          | 4182/836.4          | RMC12.2K | 0.325            | 0.199 | -2.22          | 23.52                 | 24.00               | 0.363                 | 2023/5/22 |      |

NOTE: Hotspot SAR test results of WCDMA Band 5

**10.1.5. SAR measurement Result of LTE Band 2**

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test<br>channel<br>/Freq. | Test Mode        | SAR Value |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|---------------------------|------------------|-----------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                           |                  | (W/kg)    |       |                         |                             |                           |                               |           |      |
|                                              |                           |                  | 1-g       | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                           |                  |           |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 18900/1880                | 20M<br>QPSK(1,0) | 0.564     | 0.251 | 1.84                    | 25.87                       | 26.50                     | 0.652                         | 2023/5/23 |      |
| Back Side                                    | 18900/1880                | 20M<br>QPSK(1,0) | 0.913     | 0.406 | -0.48                   | 25.87                       | 26.50                     | 1.056                         | 2023/5/23 | 8#   |
| Back Side                                    | 18700/1860                | 20M              | 0.902     | 0.405 | -0.24                   | 26.04                       | 26.50                     | 1.003                         | 2023/5/23 |      |

|                      |            |                   |       |       |       |       |       |       |           |  |
|----------------------|------------|-------------------|-------|-------|-------|-------|-------|-------|-----------|--|
|                      |            | QPSK(1,0)         |       |       |       |       |       |       |           |  |
| Back Side            | 19100/1900 | 20M<br>QPSK(1,0)  | 0.782 | 0.345 | -0.12 | 25.59 | 26.50 | 0.964 | 2023/5/23 |  |
| BackSide<br>Repeated | 18900/1880 | 20M<br>QPSK(1,0)  | 0.908 | 0.401 | 0.23  | 25.87 | 26.50 | 1.050 | 2023/5/23 |  |
| 50%RB                |            |                   |       |       |       |       |       |       |           |  |
| Front Side           | 18900/1880 | 20M<br>QPSK(50,0) | 0.301 | 0.143 | 1.90  | 24.64 | 25.00 | 0.327 | 2023/5/23 |  |
| Back Side            | 18900/1880 | 20M<br>QPSK(50,0) | 0.491 | 0.230 | -4.56 | 24.64 | 25.00 | 0.533 | 2023/5/23 |  |

NOTE: Body-Worn SAR test results of LTE Band 2

| Test<br>Position of<br>Hotspot<br>with 0mm | Test channel<br>/Freq. | Mode               | SAR Value<br>(W/kg) |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------|------------------------|--------------------|---------------------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                            |                        |                    | 1-g                 | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                        |                        |                    |                     |       |                   |                             |                           |                                |           |      |
| Front Side                                 | 18900/1880             | 20M<br>QPSK(1,0)   | 0.564               | 0.251 | 1.84              | 25.87                       | 26.50                     | 0.652                          | 2023/5/23 |      |
| Back Side                                  | 18900/1880             | 20M<br>QPSK(1,0)   | 0.913               | 0.406 | -0.48             | 25.87                       | 26.50                     | 1.056                          | 2023/5/23 | 8#   |
| Right Side                                 | 18900/1880             | 20M<br>QPSK(1,0)   | 0.276               | 0.118 | -2.98             | 25.87                       | 26.50                     | 0.319                          | 2023/5/23 |      |
| Top Side                                   | 18900/1880             | 20M<br>QPSK(1,0)   | 0.480               | 0.209 | 3.13              | 25.87                       | 26.50                     | 0.555                          | 2023/5/23 |      |
| Back Side                                  | 18700/1860             | 20M<br>QPSK(1,0)   | 0.902               | 0.405 | -0.24             | 26.04                       | 26.50                     | 1.003                          | 2023/5/23 |      |
| Back Side                                  | 19100/1900             | 20M<br>QPSK(1,0)   | 0.782               | 0.345 | -0.12             | 25.59                       | 26.50                     | 0.964                          | 2023/5/23 |      |
| BackSide<br>Repeated                       | 18900/1880             | 20M<br>QPSK(1,0)   | 0.908               | 0.401 | 0.23              | 25.87                       | 26.50                     | 1.050                          | 2023/5/23 |      |
| 50%RB                                      |                        |                    |                     |       |                   |                             |                           |                                |           |      |
| Front Side                                 | 18900/1880             | 20M<br>QPSK(50,0)  | 0.301               | 0.143 | 1.90              | 24.64                       | 25.00                     | 0.327                          | 2023/5/23 |      |
| Back Side                                  | 18900/1880             | 20M<br>QPSK(50,0)  | 0.491               | 0.230 | -4.56             | 24.64                       | 25.00                     | 0.533                          | 2023/5/23 |      |
| Right Side                                 | 18900/1880             | 20M<br>QPSK(50,0)  | 0.140               | 0.060 | 3.20              | 24.64                       | 25.00                     | 0.152                          | 2023/5/23 |      |
| Top Side                                   | 18900/1880             | 20M<br>QPSK(50,0)  | 0.280               | 0.117 | 0.79              | 24.64                       | 25.00                     | 0.304                          | 2023/5/23 |      |
| 100%RB                                     |                        |                    |                     |       |                   |                             |                           |                                |           |      |
| Back Side                                  | 18900/1880             | 20M<br>QPSK(100,0) | 0.312               | 0.187 | 0.23              | 23.76                       | 24.00                     | 0.330                          | 2023/5/23 |      |

NOTE: Hotspot SAR test results of LTE Band 2

### 10.1.6. SAR measurement Result of LTE Band 5

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test<br>channel<br>/Freq. | Test Mode          | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|---------------------------|--------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                           |                    | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                           |                    |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 20525/836.5               | 10M<br>QPSK(1,49)  | 0.420               | 0.250 | -1.46                   | 23.73                       | 24.50                     | 0.501                         | 2023/5/22 |      |
| Back Side                                    | 20525/836.5               | 10M<br>QPSK(1,49)  | 0.650               | 0.399 | -0.69                   | 23.73                       | 24.50                     | 0.776                         | 2023/5/22 | 9#   |
| 50%RB                                        |                           |                    |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 20525/836.5               | 10M<br>QPSK(25,24) | 0.250               | 0.144 | -4.58                   | 22.80                       | 23.00                     | 0.262                         | 2023/5/22 |      |
| Back Side                                    | 20525/836.5               | 10M<br>QPSK(25,24) | 0.367               | 0.204 | -4.82                   | 22.80                       | 23.00                     | 0.384                         | 2023/5/22 |      |

NOTE: Body-Worn SAR test results of LTE Band 5

| Test<br>Position<br>of<br>Hotspot<br>with<br>0mm | Test channel<br>/Freq. | Mode               | SAR Value<br>(W/kg) |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------------|------------------------|--------------------|---------------------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                                  |                        |                    | 1-g                 | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                              |                        |                    |                     |       |                   |                             |                           |                                |           |      |
| Front<br>Side                                    | 20525/836.5            | 10M<br>QPSK(1,49)  | 0.420               | 0.250 | -1.46             | 23.73                       | 24.50                     | 0.501                          | 2023/5/22 |      |
| Back<br>Side                                     | 20525/836.5            | 10M<br>QPSK(1,49)  | 0.650               | 0.399 | -0.69             | 23.73                       | 24.50                     | 0.776                          | 2023/5/22 | 9#   |
| Right<br>Side                                    | 20525/836.5            | 10M<br>QPSK(1,49)  | 0.195               | 0.114 | 0.98              | 23.73                       | 24.50                     | 0.233                          | 2023/5/22 |      |
| Top<br>Side                                      | 20525/836.5            | 10M<br>QPSK(1,49)  | 0.350               | 0.215 | -0.73             | 23.73                       | 24.50                     | 0.418                          | 2023/5/22 |      |
| 50%RB                                            |                        |                    |                     |       |                   |                             |                           |                                |           |      |
| Front<br>Side                                    | 20525/836.5            | 10M<br>QPSK(25,24) | 0.250               | 0.144 | -4.58             | 22.80                       | 23.00                     | 0.262                          | 2023/5/22 |      |
| Back<br>Side                                     | 20525/836.5            | 10M<br>QPSK(25,24) | 0.367               | 0.204 | -4.82             | 22.80                       | 23.00                     | 0.384                          | 2023/5/22 |      |
| Right<br>Side                                    | 20525/836.5            | 10M<br>QPSK(25,24) | 0.107               | 0.059 | -0.54             | 22.80                       | 23.00                     | 0.112                          | 2023/5/22 |      |
| Top<br>Side                                      | 20525/836.5            | 10M<br>QPSK(25,24) | 0.184               | 0.111 | 2.21              | 22.80                       | 23.00                     | 0.193                          | 2023/5/22 |      |

NOTE: Hotspot SAR test results of LTE Band 5

### 10.1.7. SAR measurement Result of LTE Band 7

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test channel<br>/Freq. | Test Mode          | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|------------------------|--------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                        |                    | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                        |                    |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 21100/2535             | 20M<br>QPSK(1,99)  | 0.528               | 0.212 | 0.23                    | 26.30                       | 26.50                     | 0.553                         | 2023/5/17 |      |
| Back Side                                    | 21100/2535             | 20M<br>QPSK(1,99)  | 0.835               | 0.342 | -0.45                   | 26.30                       | 26.50                     | 0.874                         | 2023/5/17 | 10#  |
| Back Side                                    | 20850/2510             | 20M<br>QPSK(1,99)  | 0.781               | 0.290 | 0.12                    | 26.04                       | 26.50                     | 0.868                         | 2023/5/17 |      |
| Back Side                                    | 21350/2560             | 20M<br>QPSK(1,99)  | 0.791               | 0.306 | 0.20                    | 26.32                       | 26.50                     | 0.824                         | 2023/5/17 |      |
| BackSide<br>Repeated                         | 21100/2535             | 20M<br>QPSK(1,99)  | 0.830               | 0.337 | 1.54                    | 26.30                       | 26.50                     | 0.869                         | 2023/5/17 |      |
| 50%RB                                        |                        |                    |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 21100/2535             | 20M<br>QPSK(50,49) | 0.297               | 0.117 | 1.03                    | 25.09                       | 25.50                     | 0.326                         | 2023/5/17 |      |
| Back Side                                    | 21100/2535             | 20M<br>QPSK(50,49) | 0.431               | 0.188 | 3.41                    | 25.09                       | 25.50                     | 0.474                         | 2023/5/17 |      |

NOTE: Body-Worn SAR test results of LTE Band 7

| Test<br>Position of<br>Hotspot<br>with 0mm | Test channel<br><br>/Freq. | Mode              | SAR Value |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------|----------------------------|-------------------|-----------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                            |                            |                   | (W/kg)    |       |                   |                             |                           |                                |           |      |
|                                            |                            |                   | 1-g       | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                        |                            |                   |           |       |                   |                             |                           |                                |           |      |
| Front Side                                 | 21100/2535                 | 20M<br>QPSK(1,99) | 0.528     | 0.212 | 0.23              | 26.30                       | 26.50                     | 0.553                          | 2023/5/17 |      |
| Back Side                                  | 21100/2535                 | 20M<br>QPSK(1,99) | 0.835     | 0.342 | -0.45             | 26.30                       | 26.50                     | 0.874                          | 2023/5/17 | 10#  |
| Right Side                                 | 21100/2535                 | 20M<br>QPSK(1,99) | 0.258     | 0.103 | -3.74             | 26.30                       | 26.50                     | 0.270                          | 2023/5/17 |      |
| Top Side                                   | 21100/2535                 | 20M<br>QPSK(1,99) | 0.440     | 0.171 | 3.75              | 26.30                       | 26.50                     | 0.461                          | 2023/5/17 |      |
| Back Side                                  | 20850/2510                 | 20M<br>QPSK(1,99) | 0.781     | 0.290 | 0.12              | 26.04                       | 26.50                     | 0.868                          | 2023/5/17 |      |
| Back Side                                  | 21350/2560                 | 20M<br>QPSK(1,99) | 0.791     | 0.306 | 0.20              | 26.32                       | 26.50                     | 0.824                          | 2023/5/17 |      |
| BackSide<br>Repeated                       | 21100/2535                 | 20M<br>QPSK(1,99) | 0.830     | 0.337 | 1.54              | 26.30                       | 26.50                     | 0.869                          | 2023/5/17 |      |

| 50%RB      |            |                    |       |       |      |       |       |       |           |  |
|------------|------------|--------------------|-------|-------|------|-------|-------|-------|-----------|--|
| Front Side | 21100/2535 | 20M<br>QPSK(50,49) | 0.297 | 0.117 | 1.03 | 25.09 | 25.50 | 0.326 | 2023/5/17 |  |
| Back Side  | 21100/2535 | 20M<br>QPSK(50,49) | 0.431 | 0.188 | 3.41 | 25.09 | 25.50 | 0.474 | 2023/5/17 |  |
| Right Side | 21100/2535 | 20M<br>QPSK(50,49) | 0.134 | 0.058 | 4.16 | 25.09 | 25.50 | 0.147 | 2023/5/17 |  |
| Top Side   | 21100/2535 | 20M<br>QPSK(50,49) | 0.253 | 0.100 | 0.98 | 25.09 | 25.50 | 0.278 | 2023/5/17 |  |

NOTE: Hotspot SAR test results of LTE Band 7

### 10.1.8. SAR measurement Result of LTE Band 12

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test<br>channel<br>/Freq. | Test Mode         | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|---------------------------|-------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                           |                   | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                           |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 23095/707.5               | 10M<br>QPSK(1,24) | 0.654               | 0.376 | 0.64                    | 24.09                       | 24.50                     | 0.719                         | 2023/5/11 |      |
| Back Side                                    | 23095/707.5               | 10M<br>QPSK(1,24) | 1.054               | 0.619 | 0.43                    | 24.09                       | 24.50                     | 1.158                         | 2023/5/11 |      |
| Back Side                                    | 23060/704                 | 10M<br>QPSK(1,24) | 1.112               | 0.621 | 0.65                    | 24.21                       | 24.50                     | 1.189                         | 2023/5/11 |      |
| Back Side                                    | 23130/711                 | 10M<br>QPSK(1,24) | 1.160               | 0.659 | 0.39                    | 24.37                       | 24.50                     | 1.195                         | 2023/5/11 | 11#  |
| BackSide<br>Repeated                         | 23130/711                 | 10M<br>QPSK(1,24) | 1.150               | 0.642 | 0.12                    | 24.37                       | 24.50                     | 1.185                         | 2023/5/11 |      |
| 50%RB                                        |                           |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 23095/707.5               | 10M<br>QPSK(25,0) | 0.350               | 0.203 | -3.80                   | 23.20                       | 23.50                     | 0.375                         | 2023/5/11 |      |
| Back Side                                    | 23095/707.5               | 10M<br>QPSK(25,0) | 0.628               | 0.323 | -0.39                   | 23.20                       | 23.50                     | 0.673                         | 2023/5/11 |      |

NOTE: Body-Worn SAR test results of LTE Band 12

| Test<br>Position<br>of Hotspot<br>with 0mm | Test channel<br>/Freq. | Mode              | SAR Value<br>(W/kg) |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------|------------------------|-------------------|---------------------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                            |                        |                   | 1-g                 | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                        |                        |                   |                     |       |                   |                             |                           |                                |           |      |
| Front Side                                 | 23095/707.5            | 10M<br>QPSK(1,24) | 0.654               | 0.376 | 0.64              | 24.09                       | 24.50                     | 0.719                          | 2023/5/11 |      |
| Back Side                                  | 23095/707.5            | 10M<br>QPSK(1,24) | 1.054               | 0.619 | 0.43              | 24.09                       | 24.50                     | 1.158                          | 2023/5/11 |      |
| Right Side                                 | 23095/707.5            | 10M               | 0.318               | 0.177 | 0.75              | 24.09                       | 24.50                     | 0.349                          | 2023/5/11 |      |

|                      |             |                   |       |       |       |       |       |       |           |     |
|----------------------|-------------|-------------------|-------|-------|-------|-------|-------|-------|-----------|-----|
|                      |             | QPSK(1,24)        |       |       |       |       |       |       |           |     |
| Top Side             | 23095/707.5 | 10M<br>QPSK(1,24) | 0.550 | 0.320 | 1.33  | 24.09 | 24.50 | 0.604 | 2023/5/11 |     |
| Back Side            | 23060/704   | 10M<br>QPSK(1,24) | 1.112 | 0.621 | 0.65  | 24.21 | 24.50 | 1.189 | 2023/5/11 |     |
| Back Side            | 23130/711   | 10M<br>QPSK(1,24) | 1.160 | 0.659 | 0.39  | 24.37 | 24.50 | 1.195 | 2023/5/11 | 11# |
| BackSide<br>Repeated | 23095/707.5 | 10M<br>QPSK(1,24) | 1.150 | 0.642 | 0.12  | 24.37 | 24.50 | 1.185 | 2023/5/11 |     |
| 50%RB                |             |                   |       |       |       |       |       |       |           |     |
| Front Side           | 23095/707.5 | 10M<br>QPSK(25,0) | 0.350 | 0.203 | -3.80 | 23.20 | 23.50 | 0.375 | 2023/5/11 |     |
| Back Side            | 23095/707.5 | 10M<br>QPSK(25,0) | 0.628 | 0.323 | -0.39 | 23.20 | 23.50 | 0.673 | 2023/5/11 |     |
| Right Side           | 23095/707.5 | 10M<br>QPSK(25,0) | 0.172 | 0.090 | 2.18  | 23.20 | 23.50 | 0.184 | 2023/5/11 |     |
| Top Side             | 23095/707.5 | 10M<br>QPSK(25,0) | 0.291 | 0.164 | 1.63  | 23.20 | 23.50 | 0.312 | 2023/5/11 |     |
| 100%RB               |             |                   |       |       |       |       |       |       |           |     |
| Back Side            | 23095/707.5 | 10M<br>QPSK(25,0) | 0.402 | 0.274 | 0.12  | 23.02 | 23.50 | 0.449 | 2023/5/11 |     |

NOTE: Hotspot SAR test results of LTE Band 12

### 10.1.9. SAR measurement Result of LTE Band 17

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test<br>channel<br>/Freq. | Test Mode         | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|---------------------------|-------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                           |                   | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                           |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 23790/710                 | 10M<br>QPSK(1,24) | 0.612               | 0.349 | 3.74                    | 24.13                       | 24.50                     | 0.666                         | 2023/5/11 |      |
| Back Side                                    | 23790/710                 | 10M<br>QPSK(1,24) | 0.982               | 0.573 | 1.70                    | 24.13                       | 24.50                     | 1.069                         | 2023/5/11 |      |
| Back Side                                    | 23780/709                 | 10M<br>QPSK(1,24) | 0.922               | 0.532 | -0.96                   | 24.10                       | 24.50                     | 1.011                         | 2023/5/11 |      |
| Back Side                                    | 23800/711                 | 10M<br>QPSK(1,24) | 1.048               | 0.602 | -0.30                   | 24.40                       | 24.50                     | 1.072                         | 2023/5/11 | 12#  |
| BackSide<br>Repeated                         | 23800/711                 | 10M<br>QPSK(1,24) | 1.042               | 0.595 | 0.14                    | 24.40                       | 24.50                     | 1.066                         | 2023/5/11 |      |
| 50%RB                                        |                           |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 23790/710                 | 10M<br>QPSK(25,0) | 0.319               | 0.190 | 0.33                    | 23.05                       | 23.50                     | 0.354                         | 2023/5/11 |      |

| Test<br>Position of<br>Body-Worn | Test<br>channel<br>/Freq. | Test Mode | SAR Value |      | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g | Date | Plot |
|----------------------------------|---------------------------|-----------|-----------|------|-------------------------|-----------------------------|---------------------------|---------------------|------|------|
|                                  |                           |           | (W/kg)    |      |                         |                             |                           |                     |      |      |
|                                  |                           |           | 1-g       | 10-g |                         |                             |                           |                     |      |      |

|                      |            |                    |       |       |       |       |       |        |           |     |
|----------------------|------------|--------------------|-------|-------|-------|-------|-------|--------|-----------|-----|
| with 0mm             |            |                    |       |       |       |       |       | (W/Kg) |           |     |
| 1RB                  |            |                    |       |       |       |       |       |        |           |     |
| Front Side           | 38000/2595 | 20M<br>QPSK(1,0)   | 0.492 | 0.205 | 2.62  | 26.57 | 27.00 | 0.543  | 2023/5/17 |     |
| Back Side            | 38000/2595 | 20M<br>QPSK(1,0)   | 0.772 | 0.321 | -0.75 | 26.57 | 27.00 | 0.852  | 2023/5/17 | 13# |
| Back Side            | 37850/2580 | 20M<br>QPSK(1,0)   | 0.652 | 0.302 | 0.12  | 26.16 | 27.00 | 0.791  | 2023/5/17 |     |
| Back Side            | 38150/2610 | 20M<br>QPSK(1,0)   | 0.662 | 0.300 | 1.56  | 25.97 | 27.00 | 0.839  | 2023/5/17 |     |
| BackSide<br>Repeated | 38000/2595 | 20M<br>QPSK(1,0)   | 0.752 | 0.315 | 2.01  | 26.57 | 27.00 | 0.830  | 2023/5/17 |     |
| 50%RB                |            |                    |       |       |       |       |       |        |           |     |
| Front Side           | 38000/2595 | 20M<br>QPSK(50,49) | 0.264 | 0.108 | 0.77  | 25.35 | 23.50 | 0.172  | 2023/5/17 |     |
| Back Side            | 38000/2595 | 20M<br>QPSK(50,49) | 0.414 | 0.170 | -0.41 | 25.35 | 23.50 | 0.270  | 2023/5/17 |     |

NOTE: Body-Worn SAR test results of LTE Band 41

| Test<br>Position<br>of Hotspot<br>with 0mm | Test<br>channel<br>/Freq. | Mode               | SAR Value<br>(W/kg) |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------|---------------------------|--------------------|---------------------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                            |                           |                    | 1-g                 | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                        |                           |                    |                     |       |                   |                             |                           |                                |           |      |
| Front<br>Side                              | 38000/2595                | 20M<br>QPSK(1,0)   | 0.492               | 0.205 | 2.62              | 26.57                       | 27.00                     | 0.543                          | 2023/5/17 |      |
| Back Side                                  | 38000/2595                | 20M<br>QPSK(1,0)   | 0.772               | 0.321 | -0.75             | 26.57                       | 27.00                     | 0.852                          | 2023/5/17 | 13#  |
| Right<br>Side                              | 38000/2595                | 20M<br>QPSK(1,0)   | 0.234               | 0.095 | -1.96             | 26.57                       | 27.00                     | 0.258                          | 2023/5/17 |      |
| Top Side                                   | 38000/2595                | 20M<br>QPSK(1,0)   | 0.410               | 0.169 | -3.41             | 26.57                       | 27.00                     | 0.453                          | 2023/5/17 |      |
| Back Side                                  | 37850/2580                | 20M<br>QPSK(1,0)   | 0.652               | 0.302 | 0.12              | 26.16                       | 27.00                     | 0.791                          | 2023/5/17 |      |
| Back Side                                  | 38150/2610                | 20M<br>QPSK(1,0)   | 0.662               | 0.300 | 1.56              | 25.97                       | 27.00                     | 0.839                          | 2023/5/17 |      |
| BackSide<br>Repeated                       | 38000/2595                | 20M<br>QPSK(1,0)   | 0.752               | 0.315 | 2.01              | 26.57                       | 27.00                     | 0.830                          | 2023/5/17 |      |
| 50%RB                                      |                           |                    |                     |       |                   |                             |                           |                                |           |      |
| Front<br>Side                              | 38000/2595                | 20M<br>QPSK(50,49) | 0.264               | 0.108 | 0.77              | 25.35                       | 23.50                     | 0.172                          | 2023/5/17 |      |

|            |            |                    |       |       |       |       |       |       |           |  |
|------------|------------|--------------------|-------|-------|-------|-------|-------|-------|-----------|--|
| Back Side  | 38000/2595 | 20M<br>QPSK(50,49) | 0.414 | 0.170 | -0.41 | 25.35 | 23.50 | 0.270 | 2023/5/17 |  |
| Right Side | 38000/2595 | 20M<br>QPSK(50,49) | 0.129 | 0.050 | -1.30 | 25.35 | 23.50 | 0.084 | 2023/5/17 |  |
| Top Side   | 38000/2595 | 20M<br>QPSK(50,49) | 0.232 | 0.088 | -4.87 | 25.35 | 23.50 | 0.152 | 2023/5/17 |  |
| 100%RB     |            |                    |       |       |       |       |       |       |           |  |
| Back Side  | 38000/2595 | 20M<br>QPSK(100,0) | 0.312 | 0.120 | 0.58  | 24.92 | 25.00 | 0.318 | 2023/5/17 |  |

NOTE: Hotspot SAR test results of LTE Band 38

#### 10.1.11. SAR measurement Result of LTE Band 40A

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test channel<br>/Freq. | Test Mode         | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|------------------------|-------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                        |                   | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                        |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 38750/2310             | 10M<br>QPSK(1,24) | 0.365               | 0.154 | 0.54                    | 24.00                       | 24.50                     | 0.410                         | 2023/5/16 |      |
| Back Side                                    | 38750/2310             | 10M<br>QPSK(1,24) | 0.405               | 0.188 | -0.21                   | 24.00                       | 24.50                     | 0.454                         | 2023/5/16 | 15#  |
| 50%RB                                        |                        |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 38750/2310             | 10M<br>QPSK(25,0) | 0.312               | 0.130 | 1.20                    | 22.97                       | 23.00                     | 0.314                         | 2023/5/16 |      |
| Back Side                                    | 38750/2310             | 10M<br>QPSK(25,0) | 0.374               | 0.150 | 0.36                    | 22.97                       | 23.00                     | 0.377                         | 2023/5/16 |      |

NOTE: Body-Worn SAR test results of LTE Band 40A

| Test<br>Position<br>of<br>Hotspot<br>with<br>0mm | Test channel<br>/Freq. | Mode              | SAR Value<br>(W/kg) |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------------|------------------------|-------------------|---------------------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                                  |                        |                   | 1-g                 | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                              |                        |                   |                     |       |                   |                             |                           |                                |           |      |
| Front<br>Side                                    | 38750/2310             | 10M<br>QPSK(1,24) | 0.365               | 0.154 | 0.54              | 24.00                       | 24.50                     | 0.410                          | 2023/5/16 |      |
| Back<br>Side                                     | 38750/2310             | 10M<br>QPSK(1,24) | 0.405               | 0.188 | -0.21             | 24.00                       | 24.50                     | 0.454                          | 2023/5/16 | 15#  |
| Right<br>Side                                    | 38750/2310             | 10M<br>QPSK(1,24) | 0.291               | 0.132 | 3.02              | 24.00                       | 24.50                     | 0.327                          | 2023/5/16 |      |

|            |            |                   |       |       |      |       |       |       |           |  |
|------------|------------|-------------------|-------|-------|------|-------|-------|-------|-----------|--|
| Top Side   | 38750/2310 | 10M<br>QPSK(1,24) | 0.265 | 0.115 | 0.12 | 24.00 | 24.50 | 0.297 | 2023/5/16 |  |
| 50%RB      |            |                   |       |       |      |       |       |       |           |  |
| Front Side | 38750/2310 | 10M<br>QPSK(25,0) | 0.312 | 0.130 | 1.20 | 22.97 | 23.00 | 0.314 | 2023/5/16 |  |
| Back Side  | 38750/2310 | 10M<br>QPSK(25,0) | 0.374 | 0.150 | 0.36 | 22.97 | 23.00 | 0.377 | 2023/5/16 |  |
| Right Side | 38750/2310 | 10M<br>QPSK(25,0) | 0.274 | 0.112 | 0.23 | 22.97 | 23.00 | 0.276 | 2023/5/16 |  |
| Top Side   | 38750/2310 | 10M<br>QPSK(25,0) | 0.257 | 0.103 | 1.24 | 22.97 | 23.00 | 0.259 | 2023/5/16 |  |

NOTE: Hotspot SAR test results of LTE Band 40A

#### 10.1.12. SAR measurement Result of LTE Band 40B

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test channel<br>/Freq. | Test Mode         | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|------------------------|-------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                        |                   | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                        |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 39200/2355             | 10M<br>QPSK(1,24) | 0.356               | 0.128 | 0.25                    | 24.12                       | 24.50                     | 0.389                         | 2023/5/16 |      |
| Back Side                                    | 39200/2355             | 10M<br>QPSK(1,24) | 0.406               | 0.173 | 0.01                    | 24.12                       | 24.50                     | 0.443                         | 2023/5/16 | 16#  |
| 50%RB                                        |                        |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 39200/2355             | 10M<br>QPSK(25,0) | 0.289               | 0.102 | 0.12                    | 23.04                       | 23.50                     | 0.321                         | 2023/5/16 |      |
| Back Side                                    | 39200/2355             | 10M<br>QPSK(25,0) | 0.378               | 0.136 | 0.56                    | 23.04                       | 23.50                     | 0.420                         | 2023/5/16 |      |

NOTE: Body-Worn SAR test results of LTE Band 40B

| Test<br>Position<br>of<br>Hotspot<br>with<br>0mm | Test channel<br>/Freq. | Mode              | SAR Value<br>(W/kg) |       | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date      | Plot |
|--------------------------------------------------|------------------------|-------------------|---------------------|-------|-------------------|-----------------------------|---------------------------|--------------------------------|-----------|------|
|                                                  |                        |                   | 1-g                 | 10-g  |                   |                             |                           |                                |           |      |
| 1RB                                              |                        |                   |                     |       |                   |                             |                           |                                |           |      |
| Front<br>Side                                    | 39200/2355             | 10M<br>QPSK(1,24) | 0.356               | 0.128 | 0.25              | 24.12                       | 24.50                     | 0.389                          | 2023/5/16 |      |
| Back                                             | 39200/2355             | 10M               | 0.406               | 0.173 | 0.01              | 24.12                       | 24.50                     | 0.443                          | 2023/5/16 | 16#  |

|            |            |                   |       |       |      |       |       |       |           |  |
|------------|------------|-------------------|-------|-------|------|-------|-------|-------|-----------|--|
| Side       |            | QPSK(1,24)        |       |       |      |       |       |       |           |  |
| Right Side | 39200/2355 | 10M<br>QPSK(1,24) | 0.245 | 0.091 | 0.65 | 24.12 | 24.50 | 0.267 | 2023/5/16 |  |
| Top Side   | 39200/2355 | 10M<br>QPSK(1,24) | 0.187 | 0.075 | 3.20 | 24.12 | 24.50 | 0.204 | 2023/5/16 |  |
| 50%RB      |            |                   |       |       |      |       |       |       |           |  |
| Front Side | 39200/2355 | 10M<br>QPSK(25,0) | 0.289 | 0.102 | 0.12 | 23.04 | 23.50 | 0.321 | 2023/5/16 |  |
| Back Side  | 39200/2355 | 10M<br>QPSK(25,0) | 0.378 | 0.136 | 0.56 | 23.04 | 23.50 | 0.420 | 2023/5/16 |  |
| Right Side | 39200/2355 | 10M<br>QPSK(25,0) | 0.210 | 0.074 | 0.15 | 23.04 | 23.50 | 0.233 | 2023/5/16 |  |
| Top Side   | 39200/2355 | 10M<br>QPSK(25,0) | 0.170 | 0.057 | 2.14 | 23.04 | 23.50 | 0.189 | 2023/5/16 |  |

NOTE: Hotspot SAR test results of LTE Band 40B

### 10.1.13. SAR measurement Result of LTE Band 41

| Test<br>Position of<br>Body-Worn<br>with 0mm | Test channel<br>/Freq. | Test Mode         | SAR Value<br>(W/kg) |       | Power<br>Drift<br>(±5%) | Conducted<br>power<br>(dBm) | Tune-up<br>power<br>(dBm) | Scaled<br>SAR<br>1g<br>(W/Kg) | Date      | Plot |
|----------------------------------------------|------------------------|-------------------|---------------------|-------|-------------------------|-----------------------------|---------------------------|-------------------------------|-----------|------|
|                                              |                        |                   | 1-g                 | 10-g  |                         |                             |                           |                               |           |      |
| 1RB                                          |                        |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 40640/2595             | 20M<br>QPSK(1,99) | 0.486               | 0.196 | -3.05                   | 24.87                       | 25.00                     | 0.501                         | 2023/5/17 |      |
| Back Side                                    | 40640/2595             | 20M<br>QPSK(1,99) | 0.766               | 0.319 | -0.67                   | 24.87                       | 25.00                     | 0.789                         | 2023/5/17 | 14#  |
| 50%RB                                        |                        |                   |                     |       |                         |                             |                           |                               |           |      |
| Front Side                                   | 40640/2595             | 20M<br>QPSK(50,0) | 0.288               | 0.113 | 4.91                    | 23.73                       | 24.00                     | 0.306                         | 2023/5/17 |      |
| Back Side                                    | 40640/2595             | 20M<br>QPSK(50,0) | 0.386               | 0.182 | 0.62                    | 23.73                       | 24.00                     | 0.411                         | 2023/5/17 |      |

NOTE: Body-Worn SAR test results of LTE Band 41

| Test<br>Position<br>of<br>Hotspot<br>with<br>0mm | Test channel<br>/Freq. | Mode | SAR Value<br>(W/kg) |      | Power<br>Drift(%) | Conducted<br>Power<br>(dBm) | Tune-up<br>Power<br>(dBm) | Scaled<br>SAR<br>1-g<br>(W/Kg) | Date | Plot |
|--------------------------------------------------|------------------------|------|---------------------|------|-------------------|-----------------------------|---------------------------|--------------------------------|------|------|
|                                                  |                        |      | 1-g                 | 10-g |                   |                             |                           |                                |      |      |
| 1RB                                              |                        |      |                     |      |                   |                             |                           |                                |      |      |

|            |            |                |       |       |       |       |       |       |           |     |
|------------|------------|----------------|-------|-------|-------|-------|-------|-------|-----------|-----|
| Front Side | 40640/2595 | 20M QPSK(1,99) | 0.486 | 0.196 | -3.05 | 24.87 | 25.00 | 0.501 | 2023/5/17 |     |
| Back Side  | 40640/2595 | 20M QPSK(1,99) | 0.766 | 0.319 | -0.67 | 24.87 | 25.00 | 0.789 | 2023/5/17 | 14# |
| Right Side | 40640/2595 | 20M QPSK(1,99) | 0.231 | 0.091 | -3.40 | 24.87 | 25.00 | 0.238 | 2023/5/17 |     |
| Top Side   | 40640/2595 | 20M QPSK(1,99) | 0.385 | 0.157 | -1.96 | 24.87 | 25.00 | 0.397 | 2023/5/17 |     |
| 50%RB      |            |                |       |       |       |       |       |       |           |     |
| Front Side | 40640/2595 | 20M QPSK(50,0) | 0.288 | 0.113 | 4.91  | 23.73 | 24.00 | 0.306 | 2023/5/17 |     |
| Back Side  | 40640/2595 | 20M QPSK(50,0) | 0.386 | 0.182 | 0.62  | 23.73 | 24.00 | 0.411 | 2023/5/17 |     |
| Right Side | 40640/2595 | 20M QPSK(50,0) | 0.137 | 0.047 | -0.56 | 23.73 | 24.00 | 0.146 | 2023/5/17 |     |
| Top Side   | 40640/2595 | 20M QPSK(50,0) | 0.203 | 0.093 | 0.89  | 23.73 | 24.00 | 0.216 | 2023/5/17 |     |

NOTE: Hotspot SAR test results of LTE Band 41

#### 10.1.14. SAR measurement Result of WLAN 2.4G

| Test Position of Body-Worn with 0mm | Test channel /Freq. | Test Mode | SAR Value (W/kg) |       | Power Drift (±5%) | Conducted power (dBm) | Tune-up power (dBm) | Scaled SAR 1g (W/Kg) | Date      | Plot |
|-------------------------------------|---------------------|-----------|------------------|-------|-------------------|-----------------------|---------------------|----------------------|-----------|------|
|                                     |                     |           | 1-g              | 10-g  |                   |                       |                     |                      |           |      |
| Front Side                          | 1/2412              | 802.11b   | 0.132            | 0.021 | 0.25              | 15.15                 | 15.50               | 0.143                | 2023/5/06 |      |
| Back Side                           | 1/2412              | 802.11b   | 0.172            | 0.061 | -0.07             | 15.15                 | 15.50               | 0.186                | 2023/5/06 | 5#   |

NOTE: Body-Worn SAR test results of WLAN 2.4G

| Test Position of Hotspot with 0mm | Test channel /Freq. | Mode    | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-----------------------------------|---------------------|---------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                   |                     |         | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                        | 1/2412              | 802.11b | 0.132            | 0.021 | 0.25           | 15.15                 | 15.50               | 0.143                 | 2023/5/06 |      |
| Back Side                         | 1/2412              | 802.11b | 0.172            | 0.061 | -0.07          | 15.15                 | 15.50               | 0.186                 | 2023/5/06 | 5#   |
| Top Side                          | 1/2412              | 802.11b | 0.071            | 0.016 | 1.23           | 15.15                 | 15.50               | 0.077                 | 2023/5/06 |      |

NOTE: Hotspot SAR test results of WLAN 2.4G

#### 10.1.15. SAR measurement Result of WLAN 5.2G

| Test Position of | Test channel | Mode | SAR Value (W/kg) | Power Drift(%) | Conducted Power | Tune-up Power | Scaled SAR | Date | Plot |
|------------------|--------------|------|------------------|----------------|-----------------|---------------|------------|------|------|
|------------------|--------------|------|------------------|----------------|-----------------|---------------|------------|------|------|

| Body-Worn with 0mm | /Freq   |              | 1-g   | 10-g  |       | (dBm) | (dBm) | 1-g (W/Kg) |           |    |
|--------------------|---------|--------------|-------|-------|-------|-------|-------|------------|-----------|----|
| Front Side         | 38/5190 | 802.11n HT40 | 0.120 | 0.027 | 0.58  | 10.77 | 11.00 | 0.127      | 2023/5/18 |    |
| Back Side          | 38/5190 | 802.11n HT40 | 0.149 | 0.035 | -1.62 | 10.77 | 11.00 | 0.157      | 2023/5/18 | 6# |

NOTE: Body-Worn SAR test results of WLAN 5.2G

| Test Position of Hotspot with 0mm | Test channel /Freq | Mode         | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-----------------------------------|--------------------|--------------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                   |                    |              | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                        | 38/5190            | 802.11n HT40 | 0.120            | 0.027 | 0.58           | 10.77                 | 11.00               | 0.127                 | 2023/5/18 |      |
| Back Side                         | 38/5190            | 802.11n HT40 | 0.149            | 0.035 | -1.62          | 10.77                 | 11.00               | 0.157                 | 2023/5/18 | 6#   |
| Top Side                          | 38/5190            | 802.11n HT40 | 0.064            | 0.020 | 1.14           | 10.77                 | 11.00               | 0.067                 | 2023/5/18 |      |

NOTE: Hotspot SAR test results of WLAN 5.2G

#### 10.1.16. SAR measurement Result of WLAN 5.8G

| Test Position of Body-Worn with 0mm | Test channel /Freq | Mode         | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-------------------------------------|--------------------|--------------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                     |                    |              | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                          | 151/5755           | 802.11n HT40 | 0.142            | 0.036 | 0.25           | 10.59                 | 11.00               | 0.156                 | 2023/5/19 |      |
| Back Side                           | 151/5755           | 802.11n HT40 | 0.194            | 0.045 | -0.40          | 10.59                 | 11.00               | 0.213                 | 2023/5/19 | 7#   |

NOTE: Body-Worn SAR test results of WLAN 5.8G

| Test Position of Hotspot with 0mm | Test channel /Freq | Mode         | SAR Value (W/kg) |       | Power Drift(%) | Conducted Power (dBm) | Tune-up Power (dBm) | Scaled SAR 1-g (W/Kg) | Date      | Plot |
|-----------------------------------|--------------------|--------------|------------------|-------|----------------|-----------------------|---------------------|-----------------------|-----------|------|
|                                   |                    |              | 1-g              | 10-g  |                |                       |                     |                       |           |      |
| Front Side                        | 151/5755           | 802.11n HT40 | 0.142            | 0.036 | 0.25           | 10.59                 | 11.00               | 0.156                 | 2023/5/19 |      |

|           |          |                 |       |       |       |       |       |       |           |    |
|-----------|----------|-----------------|-------|-------|-------|-------|-------|-------|-----------|----|
| Back Side | 151/5755 | 802.11n<br>HT40 | 0.194 | 0.045 | -0.40 | 10.59 | 11.00 | 0.213 | 2023/5/19 | 7# |
| Top Side  | 151/5755 | 802.11n<br>HT40 | 0.078 | 0.020 | 2.30  | 10.59 | 11.00 | 0.086 | 2023/5/19 |    |

NOTE: Hotspot SAR test results of WLAN 5.8G

## 10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation  $< 1.6\text{W/kg}$ .
- $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan. If  $\text{SPLSR} \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.

| Test Position |             | Scaled SAR <sub>MAX</sub> |       | $\Sigma$ 1-g SAR<br>(W/Kg) | SPLSR | Remark |
|---------------|-------------|---------------------------|-------|----------------------------|-------|--------|
|               |             | WWAN                      | DTS   |                            |       |        |
| Body-Worn     | Front Side  | 0.719                     | 0.143 | 0.862                      | N/A   | N/A    |
|               | Back Side   | 1.195                     | 0.186 | 1.381                      | N/A   | N/A    |
| Body          | Front Side  | 0.719                     | 0.143 | 0.862                      | N/A   | N/A    |
|               | Back Side   | 1.195                     | 0.186 | 1.381                      | N/A   | N/A    |
|               | Left Side   | 0.204                     | N/A   | 0.204                      | N/A   | N/A    |
|               | Right Side  | 0.349                     | N/A   | 0.349                      | N/A   | N/A    |
|               | Top Side    | 0.604                     | 0.077 | 0.681                      | N/A   | N/A    |
|               | Bottom Side | N/A                       | N/A   | N/A                        | N/A   | N/A    |

| Test Position |             | Scaled SAR <sub>MAX</sub> |       | $\Sigma$ 1-g SAR<br>(W/Kg) | SPLSR | Remark |
|---------------|-------------|---------------------------|-------|----------------------------|-------|--------|
|               |             | WWAN                      | NII   |                            |       |        |
| Body-Worn     | Front Side  | 0.719                     | 0.156 | 0.875                      | N/A   | N/A    |
|               | Back Side   | 1.195                     | 0.213 | 1.408                      | N/A   | N/A    |
| Body          | Front Side  | 0.719                     | 0.156 | 0.875                      | N/A   | N/A    |
|               | Back Side   | 1.195                     | 0.213 | 1.408                      | N/A   | N/A    |
|               | Left Side   | 0.204                     | N/A   | 0.204                      | N/A   | N/A    |
|               | Right Side  | 0.349                     | N/A   | 0.349                      | N/A   | N/A    |
|               | Top Side    | 0.604                     | 0.086 | 0.690                      | N/A   | N/A    |
|               | Bottom Side | N/A                       | N/A   | N/A                        | N/A   | N/A    |

| Test Position |            | Scaled SAR <sub>MAX</sub> |       | $\Sigma$ 1-g SAR<br>(W/Kg) | SPLSR | Remark |
|---------------|------------|---------------------------|-------|----------------------------|-------|--------|
|               |            | WWAN                      | DSS   |                            |       |        |
| Body-Worn     | Front Side | 0.719                     | 0.235 | 0.954                      | N/A   | N/A    |

|      |             |       |       |       |     |     |
|------|-------------|-------|-------|-------|-----|-----|
|      | Back Side   | 1.195 | 0.235 | 1.430 | N/A | N/A |
| Body | Front Side  | 0.719 | 0.235 | 0.954 | N/A | N/A |
|      | Back Side   | 1.195 | 0.235 | 1.430 | N/A | N/A |
|      | Left Side   | 0.204 | N/A   | 0.204 | N/A | N/A |
|      | Right Side  | 0.349 | N/A   | 0.349 | N/A | N/A |
|      | Top Side    | 0.604 | 0.235 | 0.839 | N/A | N/A |
|      | Bottom Side | N/A   | N/A   | N/A   | N/A | N/A |

## 11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

## 12. Appendix B. System Check Plots

| Table of contents                                |
|--------------------------------------------------|
| MEASUREMENT 1 System Performance Check - 750MHz  |
| MEASUREMENT 2 System Performance Check - 835MHz  |
| MEASUREMENT 3 System Performance Check - 1800MHz |
| MEASUREMENT 4 System Performance Check - 1900MHz |
| MEASUREMENT 5 System Performance Check - 2300MHz |
| MEASUREMENT 6 System Performance Check - 2450MHz |
| MEASUREMENT 7 System Performance Check - 2600MHz |
| MEASUREMENT 8 System Performance Check - 5200MHz |
| MEASUREMENT 9 System Performance Check - 5800MHz |

## MEASUREMENT 1


Date of measurement: 11/5/2023

### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Dipole</u>                      |
| <u>Band</u>            | <u>CW750</u>                       |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>CW (Crest factor: 1.0)</u>      |
| <u>ConvF</u>           | <u>1.49</u>                        |

### B. SAR Measurement Results



|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 750.000000 |
| <b>Relative permittivity (real part)</b>      | 40.462777  |
| <b>Relative permittivity (imaginary part)</b> | 21.618986  |
| <b>Conductivity (S/m)</b>                     | 0.900791   |
| <b>Variation (%)</b>                          | -2.160000  |

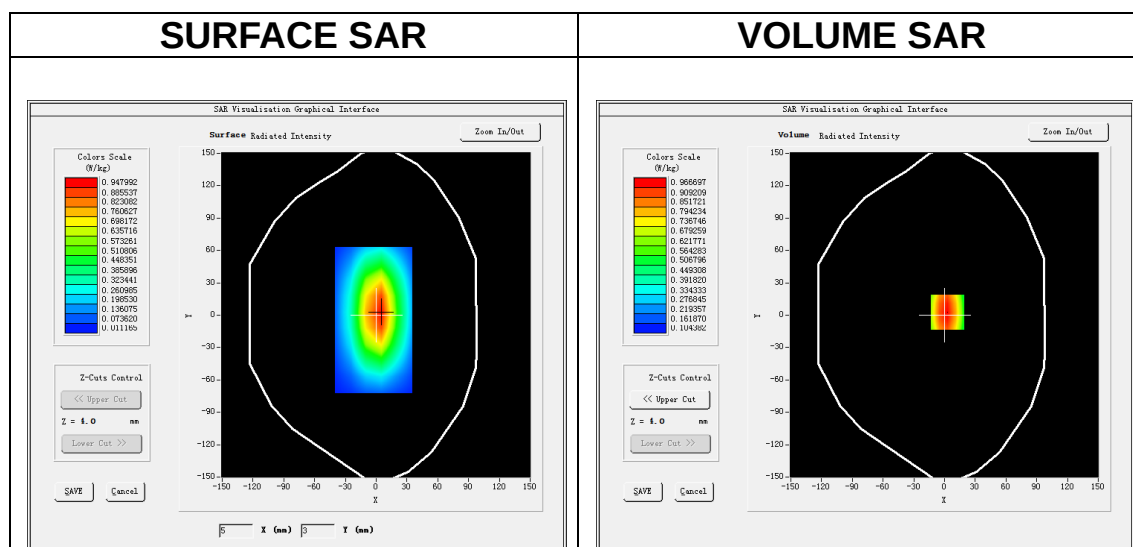

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.569318 |
| <b>SAR 1g (W/Kg)</b>  | 0.875339 |

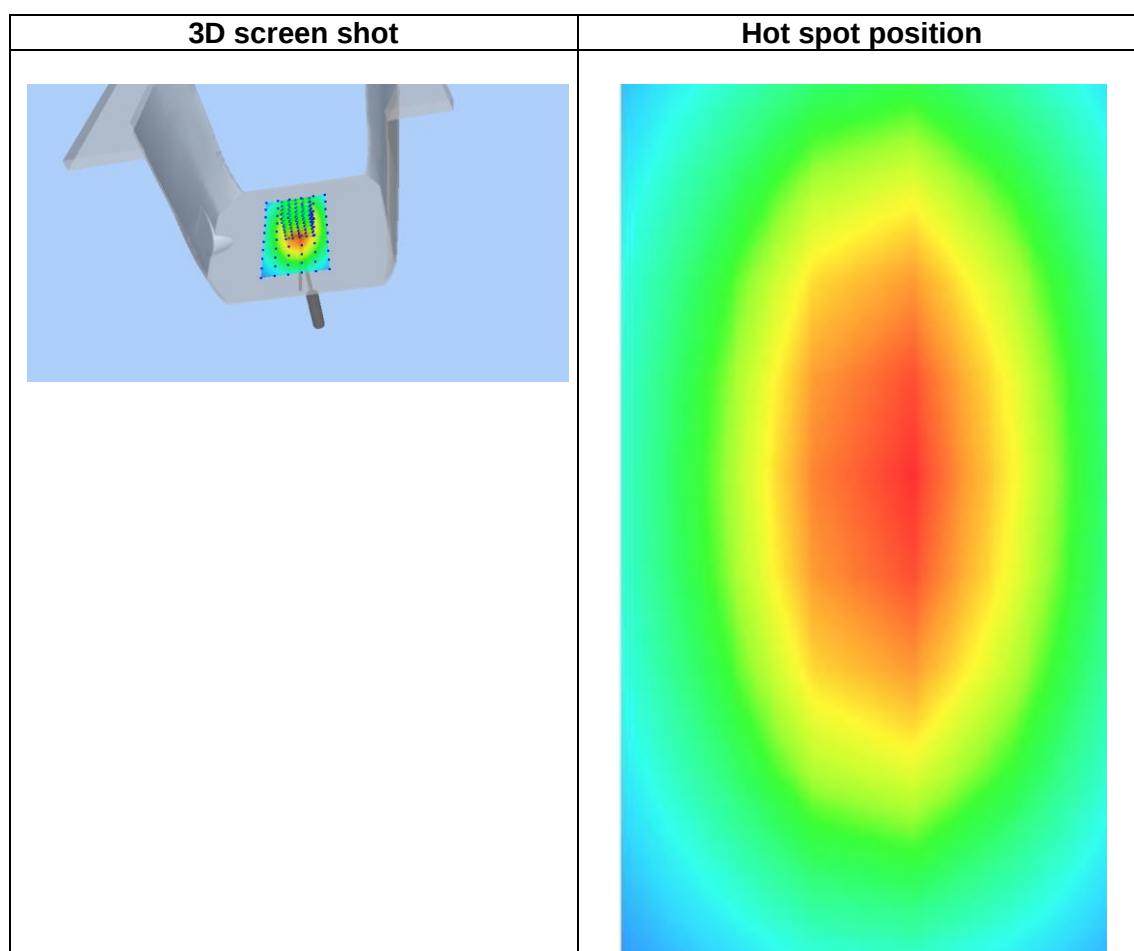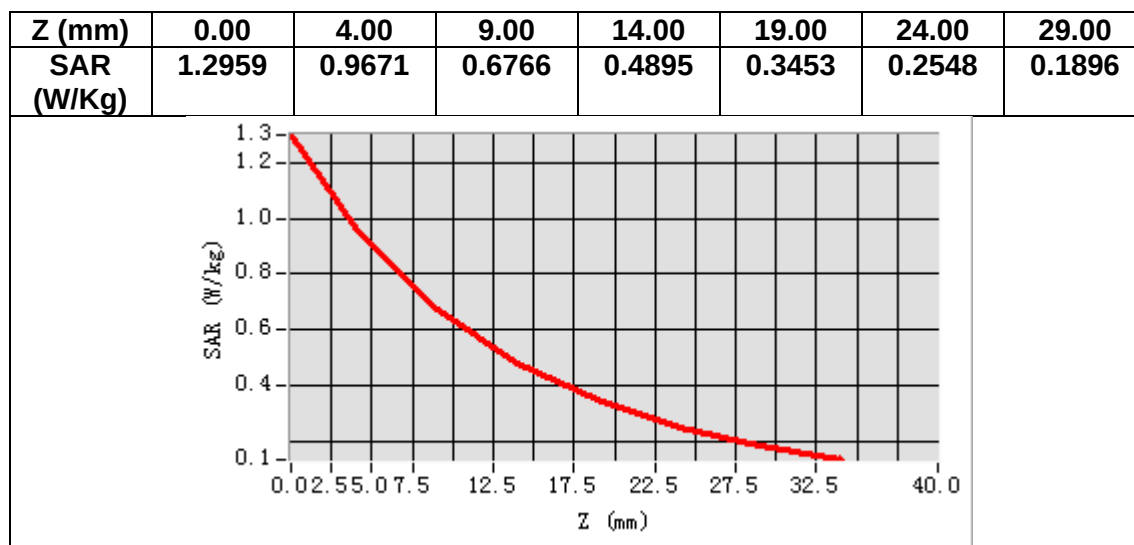

## MEASUREMENT 2


Date of measurement: 22/5/2023

### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Dipole</u>                      |
| <b>Band</b>            | <u>CW835</u>                       |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>CW (Crest factor: 1.0)</u>      |
| <b>ConvF</b>           | <u>1.50</u>                        |

### B. SAR Measurement Results


|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 835.000000 |
| <b>Relative permittivity (real part)</b>      | 40.851013  |
| <b>Relative permittivity (imaginary part)</b> | 19.567467  |
| <b>Conductivity (S/m)</b>                     | 0.907713   |
| <b>Variation (%)</b>                          | -0.780000  |

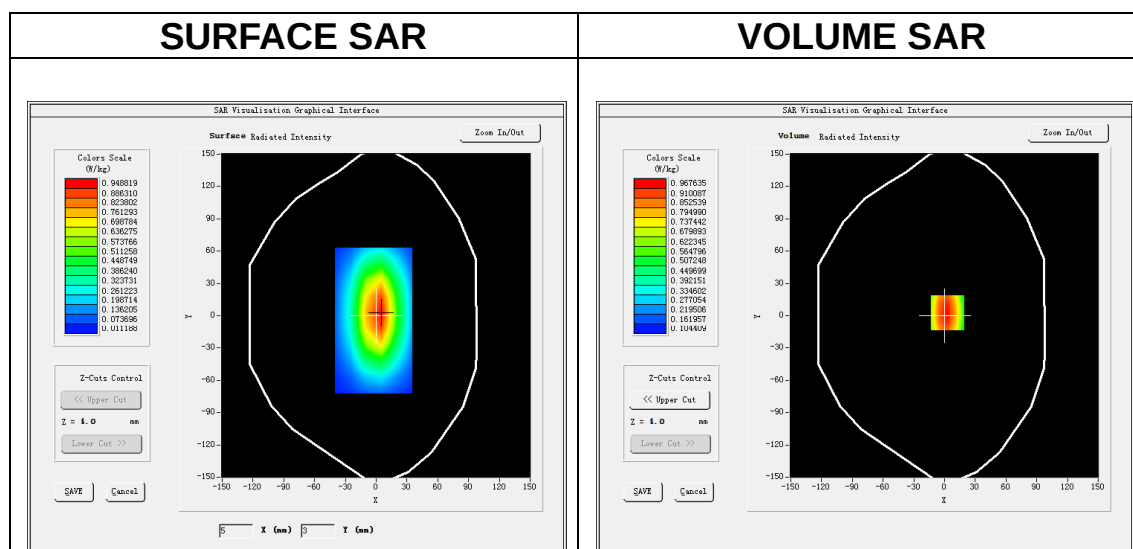


Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.589115 |
| <b>SAR 1g (W/Kg)</b>  | 0.933057 |

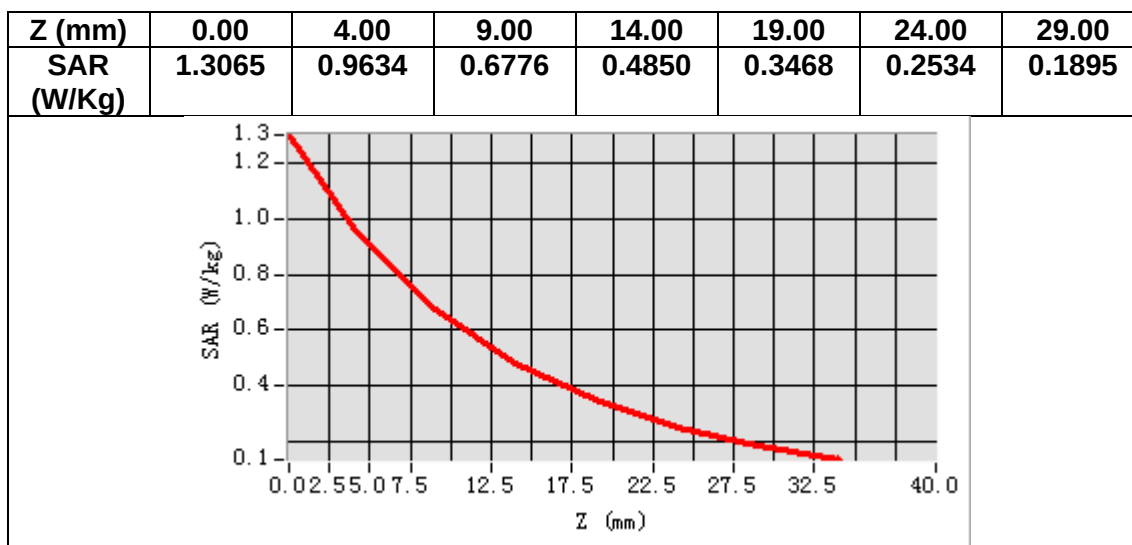

3D screen shot

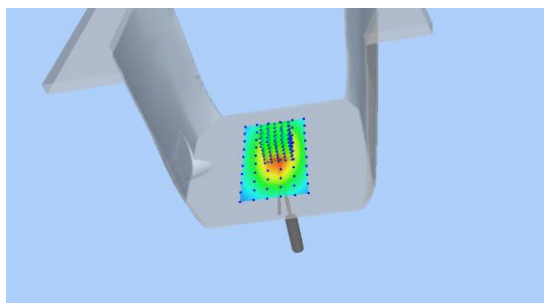

Hot spot position

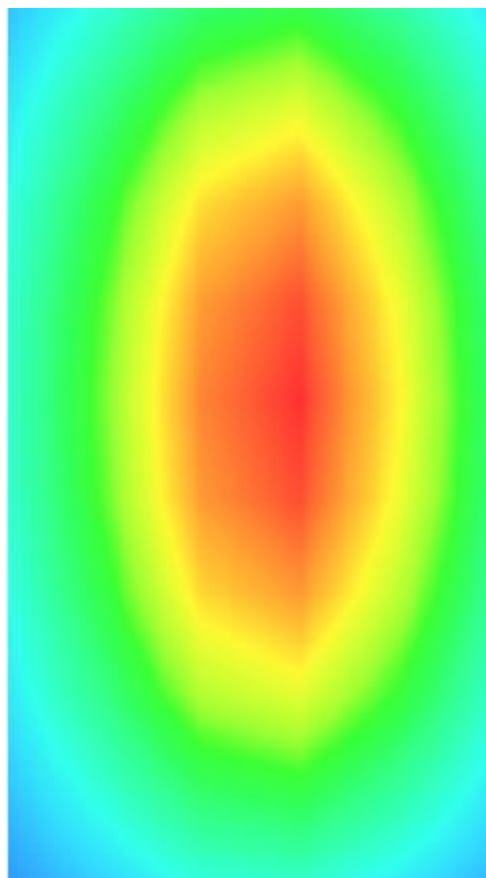

## MEASUREMENT 3


Date of measurement: 12/5/2023

### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Dipole</u>                      |
| <b>Band</b>            | <u>CW1800</u>                      |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>CW (Crest factor: 1.0)</u>      |
| <b>ConvF</b>           | <u>1.73</u>                        |

### B. SAR Measurement Results


|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 1800.000000 |
| <b>Relative permittivity (real part)</b>      | 38.939563   |
| <b>Relative permittivity (imaginary part)</b> | 14.081262   |
| <b>Conductivity (S/m)</b>                     | 1.408126    |
| <b>Variation (%)</b>                          | -3.570000   |

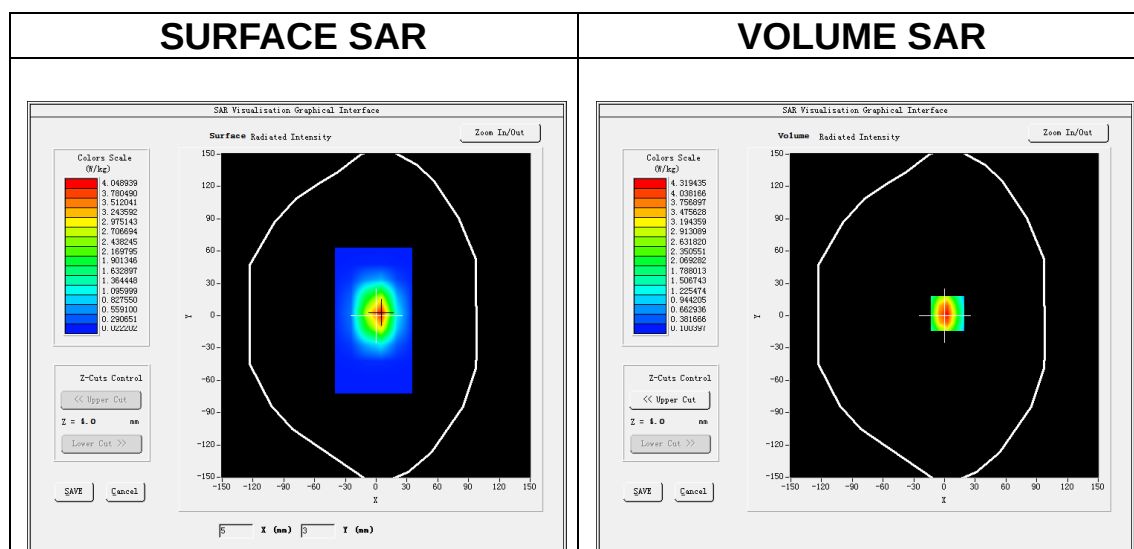


Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 1.940138 |
| <b>SAR 1g (W/Kg)</b>  | 3.884120 |

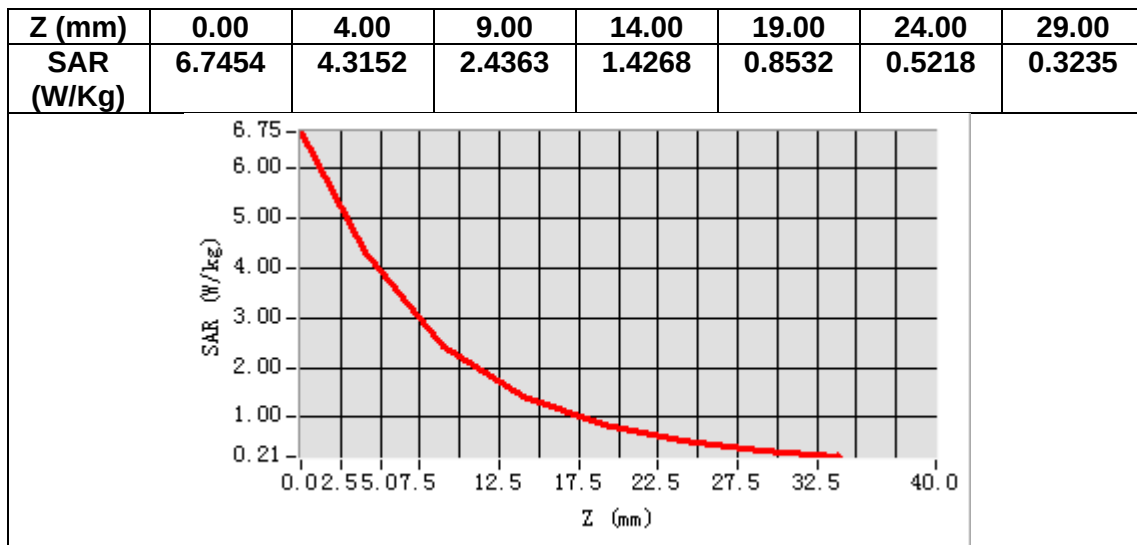

3D screen shot

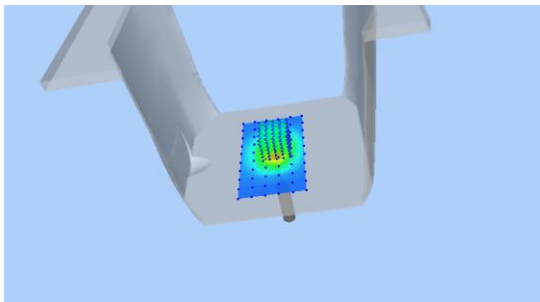

Hot spot position

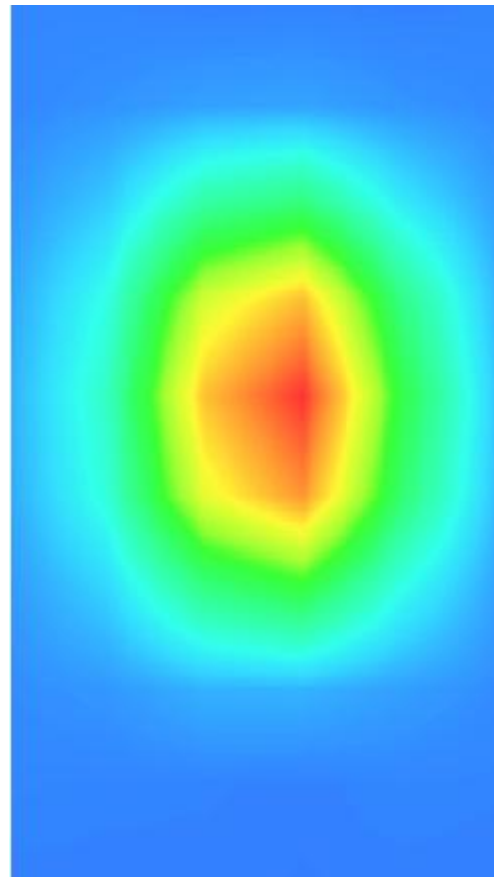

## MEASUREMENT 4

Date of measurement: 23/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Dipole</u>                      |
| <b>Band</b>            | <u>CW1900</u>                      |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>CW (Crest factor: 1.0)</u>      |
| <b>ConvF</b>           | <u>1.91</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 1900.000000 |
| <b>Relative permittivity (real part)</b>      | 38.255627   |
| <b>Relative permittivity (imaginary part)</b> | 13.812378   |
| <b>Conductivity (S/m)</b>                     | 1.457973    |
| <b>Variation (%)</b>                          | -1.560000   |

#### SURFACE SAR

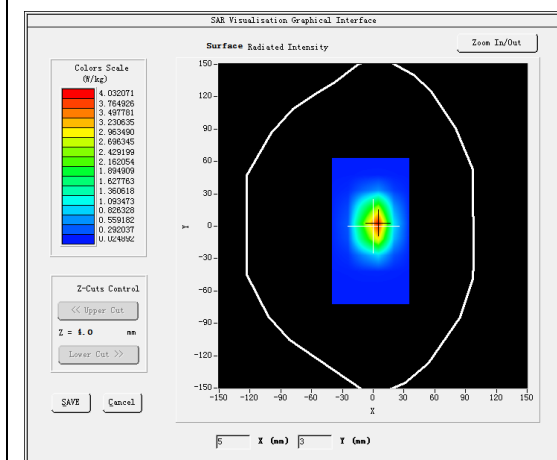


#### VOLUME SAR

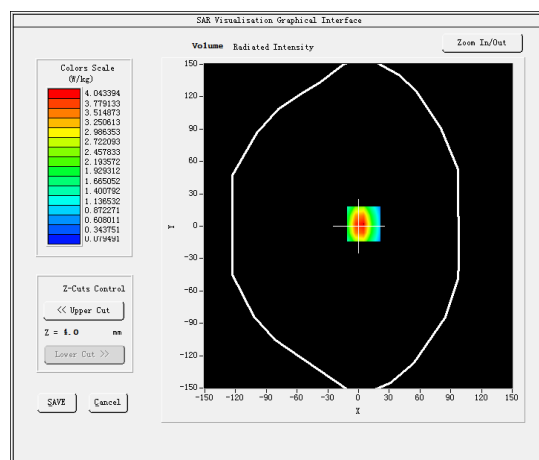


Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 2.085012 |
| <b>SAR 1g (W/Kg)</b>  | 4.310167 |

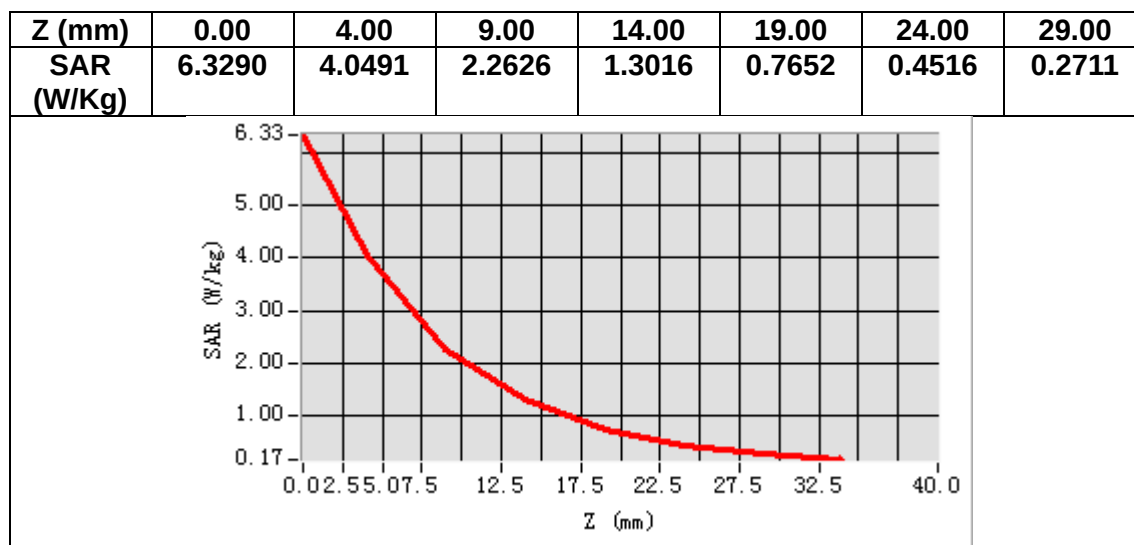

3D screen shot

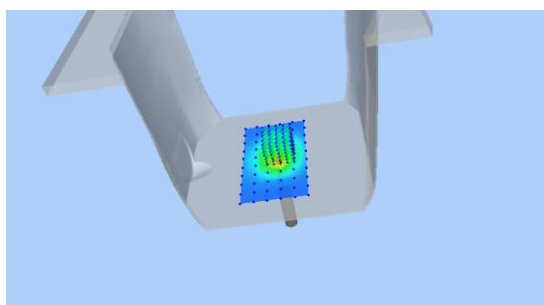

Hot spot position

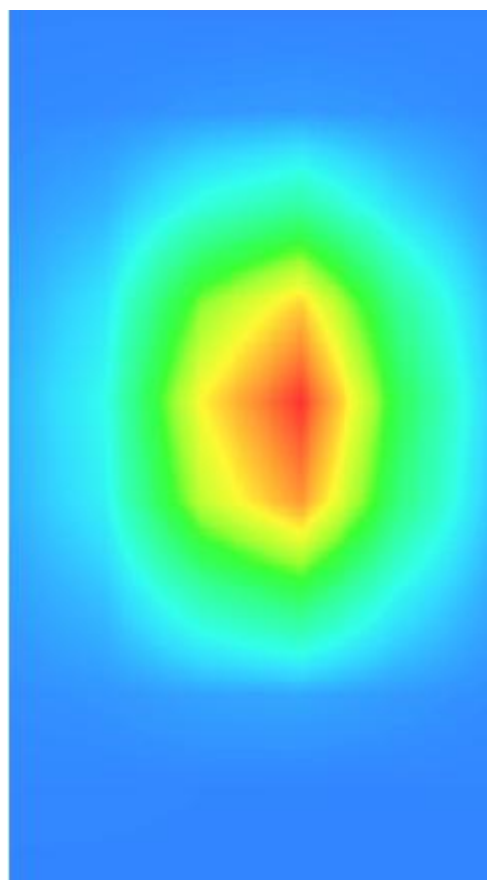

## MEASUREMENT 5

Date of measurement: 16/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>7x7x7, dx=5mm dy=5mm dz=5mm</u> |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Dipole</u>                      |
| <u>Band</u>            | <u>CW2300</u>                      |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>CW (Crest factor: 1.0)</u>      |
| <u>ConvF</u>           | <u>1.92</u>                        |


### B. SAR Measurement Results

|                                        |             |
|----------------------------------------|-------------|
| Frequency (MHz)                        | 2300.000000 |
| Relative permittivity (real part)      | 37.559409   |
| Relative permittivity (imaginary part) | 13.373406   |
| Conductivity (S/m)                     | 1.708824    |
| Variation (%)                          | -0.280000   |

#### SURFACE SAR

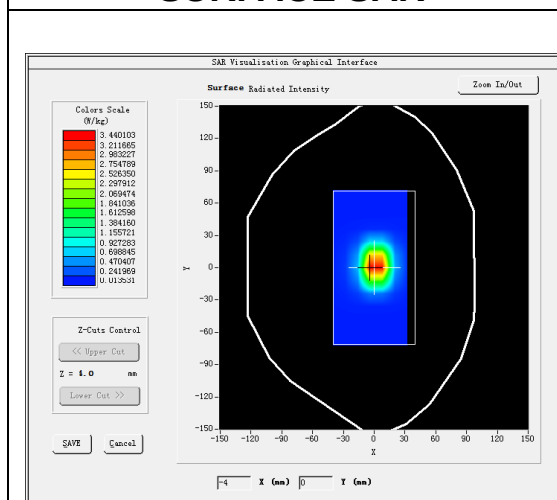


#### VOLUME SAR

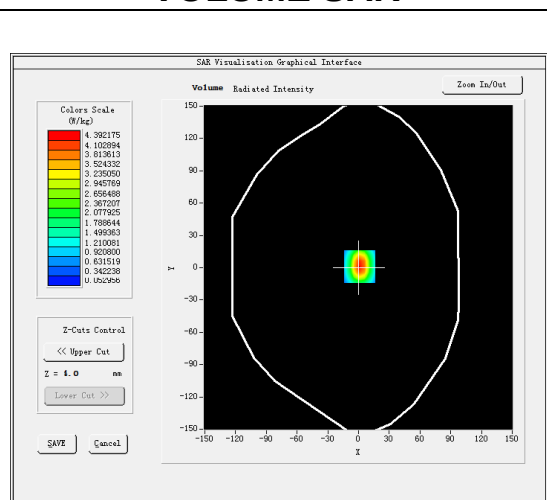


Maximum location: X=1.00, Y=1.00

SAR Peak: 7.04 W/kg


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 2.359331 |
| SAR 1g (W/Kg)  | 5.035268 |

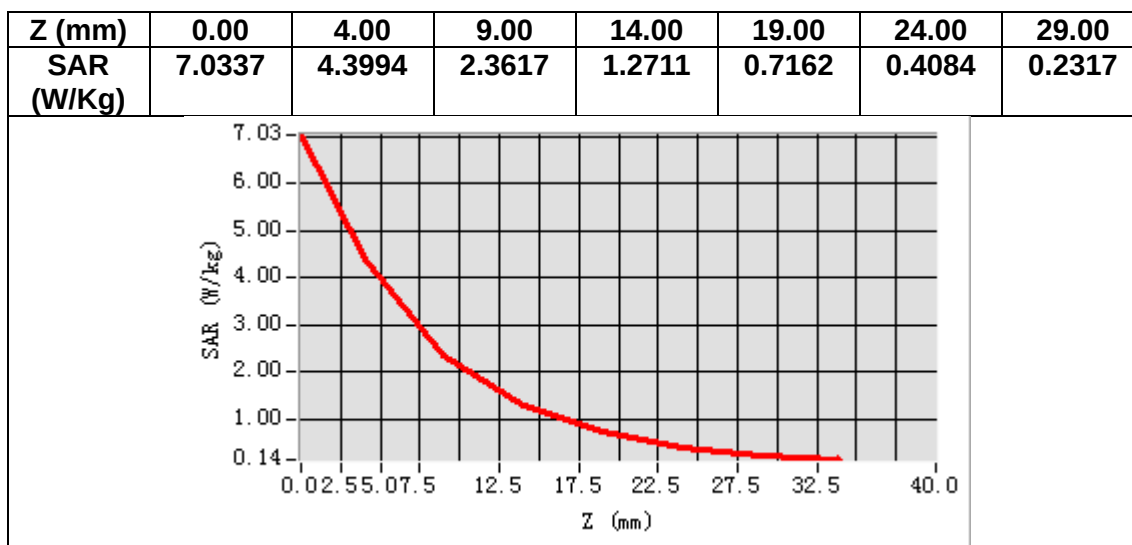

3D screen shot

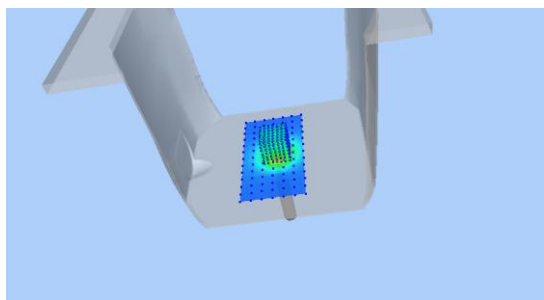

Hot spot position

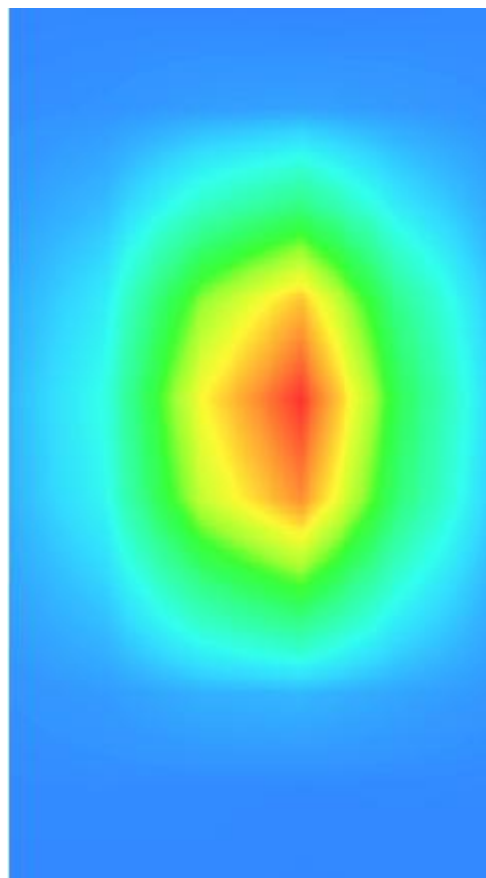

## MEASUREMENT 6

Date of measurement: 6/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Dipole</u>                      |
| <b>Band</b>            | <u>CW2450</u>                      |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>CW (Crest factor: 1.0)</u>      |
| <b>ConvF</b>           | <u>1.98</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2450.000000 |
| <b>Relative permittivity (real part)</b>      | 38.070413   |
| <b>Relative permittivity (imaginary part)</b> | 12.978579   |
| <b>Conductivity (S/m)</b>                     | 1.766529    |
| <b>Variation (%)</b>                          | 2.500000    |

#### SURFACE SAR

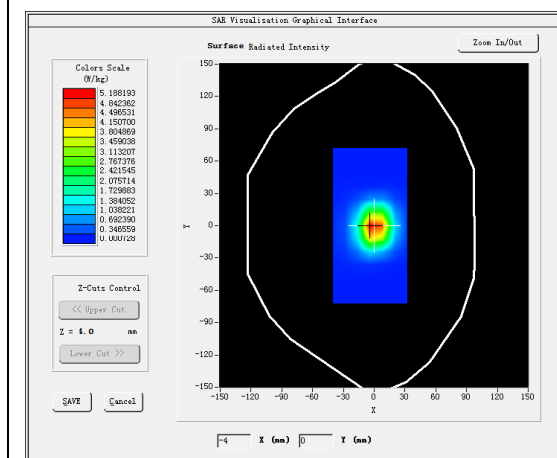



#### VOLUME SAR

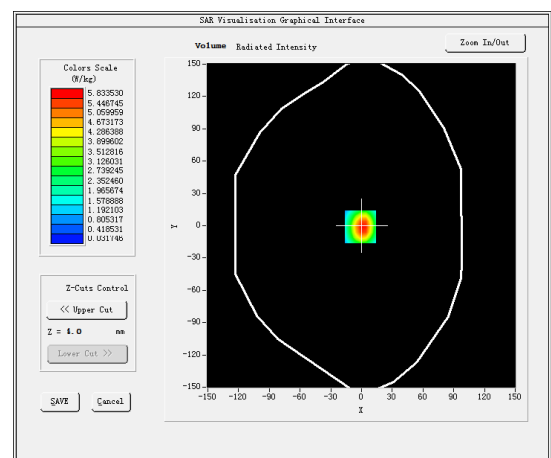

Maximum location: X=-1.00, Y=-1.00

SAR Peak: 9.83 W/kg

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 2.584105 |
| <b>SAR 1g (W/Kg)</b>  | 5.862294 |

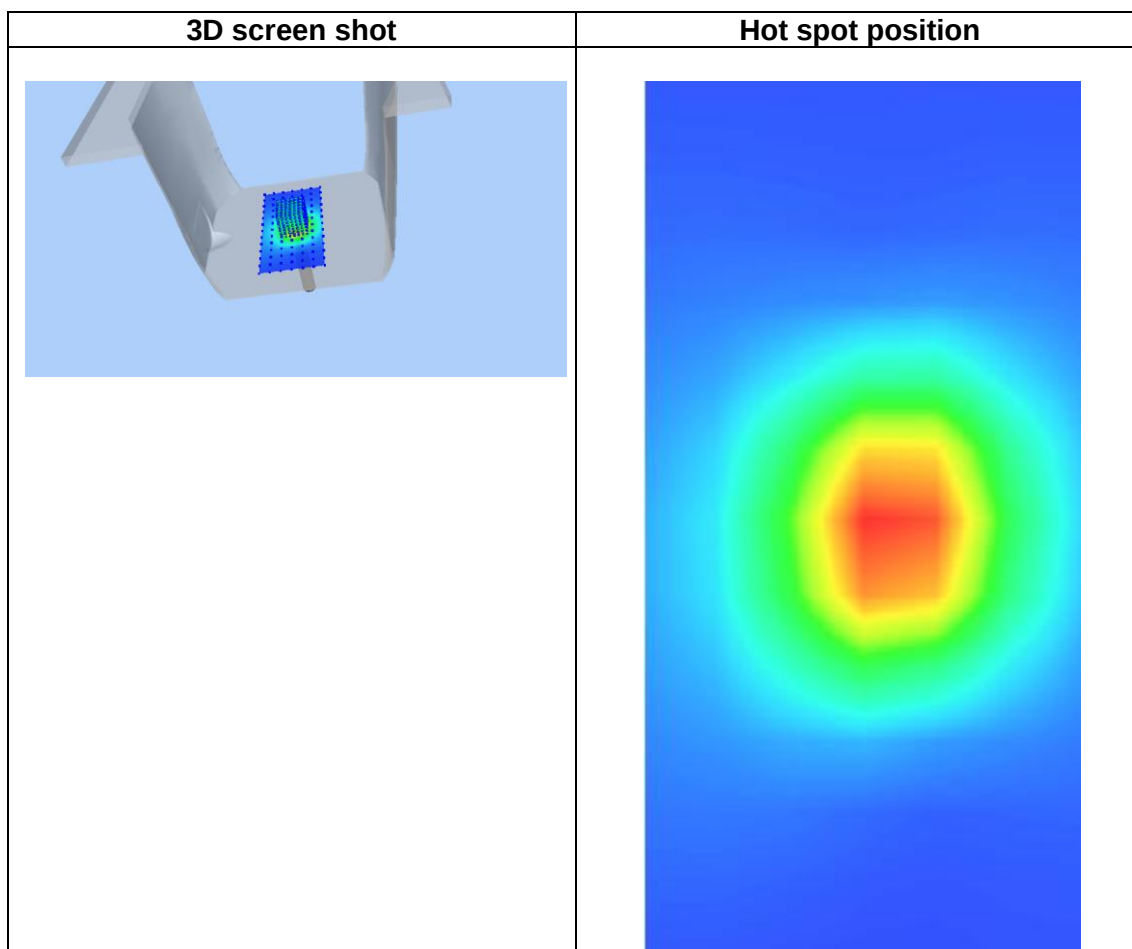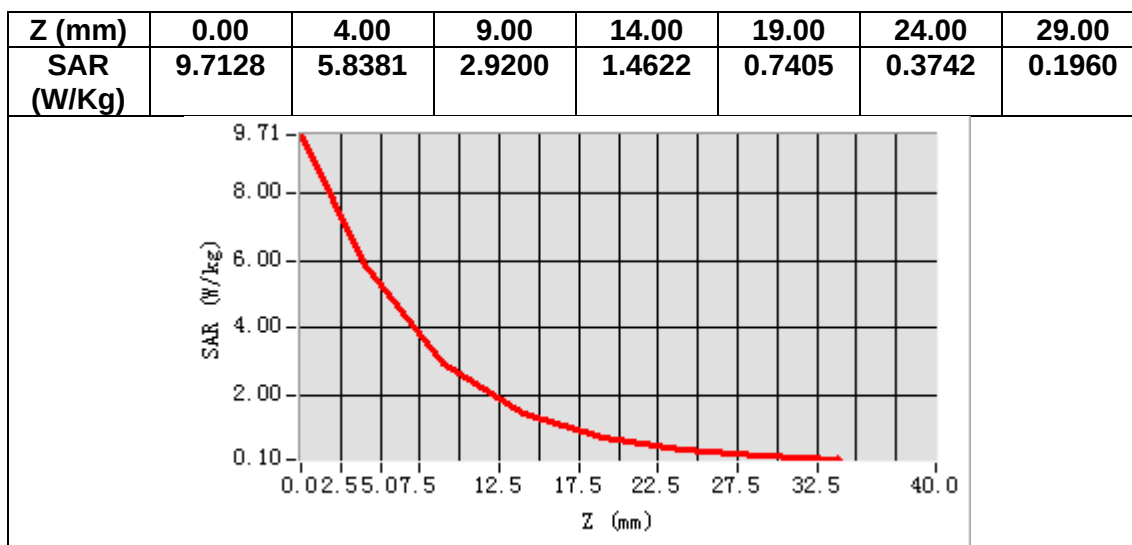

## MEASUREMENT 7

Date of measurement: 17/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Dipole</u>                      |
| <b>Band</b>            | <u>CW2600</u>                      |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>CW (Crest factor: 1.0)</u>      |
| <b>ConvF</b>           | <u>1.87</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2600.000000 |
| <b>Relative permittivity (real part)</b>      | 38.103742   |
| <b>Relative permittivity (imaginary part)</b> | 13.779907   |
| <b>Conductivity (S/m)</b>                     | 1.990431    |
| <b>Variation (%)</b>                          | -2.070000   |

#### SURFACE SAR

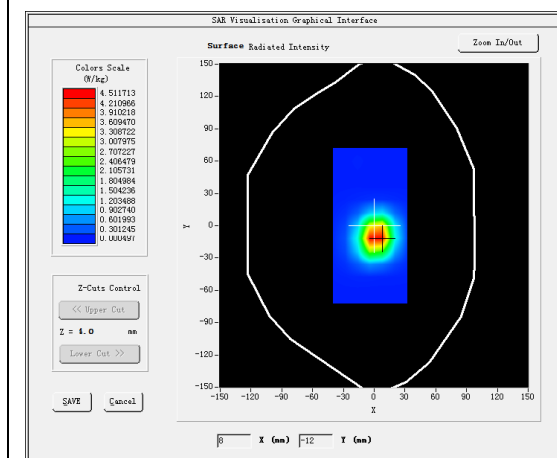



#### VOLUME SAR

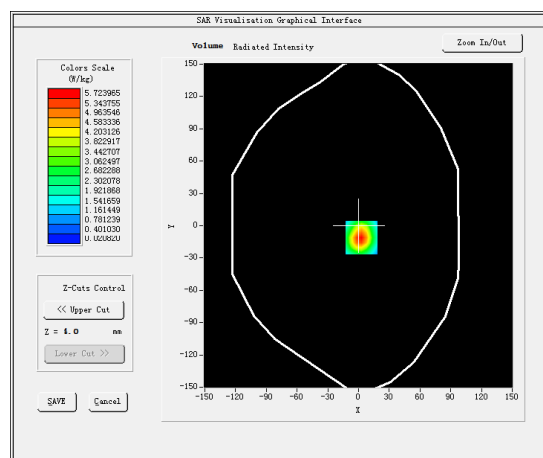

Maximum location: X=3.00, Y=-11.00

SAR Peak: 10.29 W/kg

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 2.293258 |
| <b>SAR 1g (W/Kg)</b>  | 5.797367 |

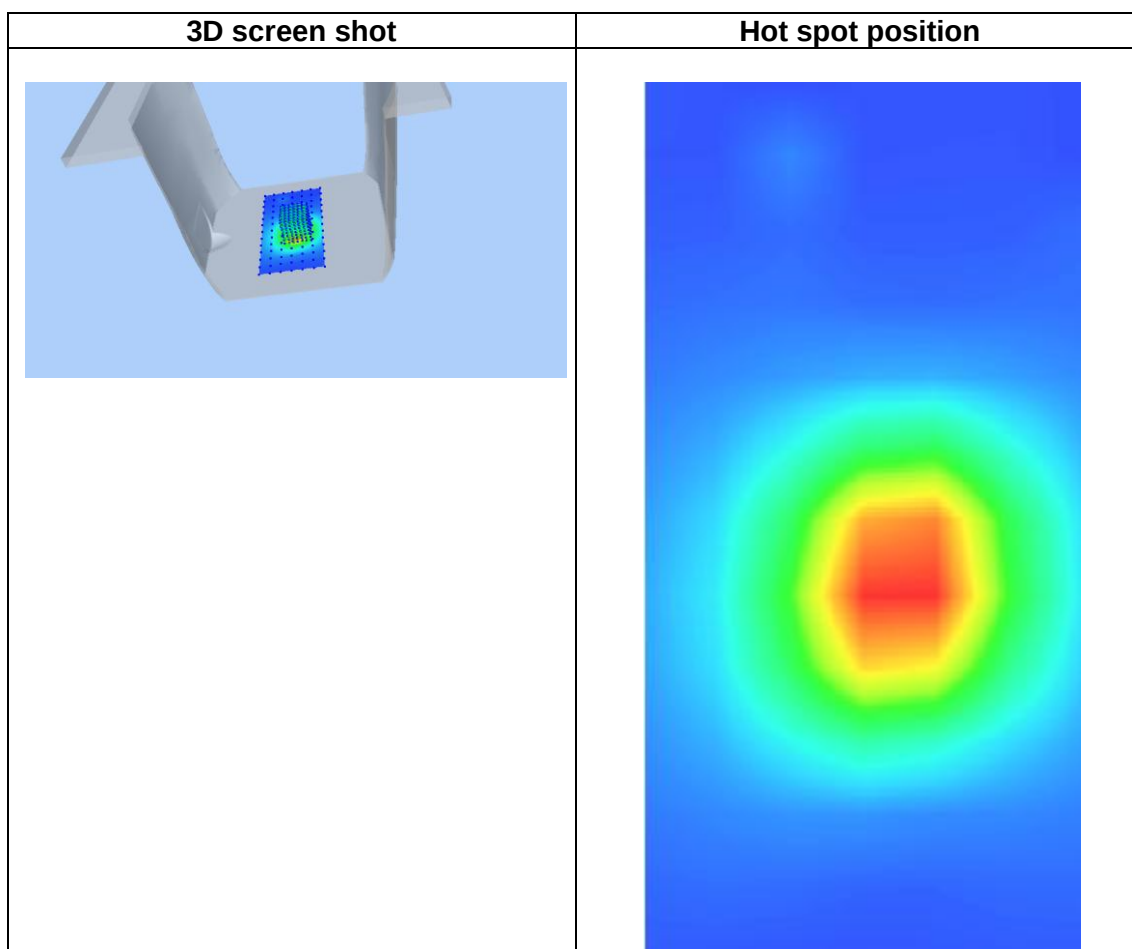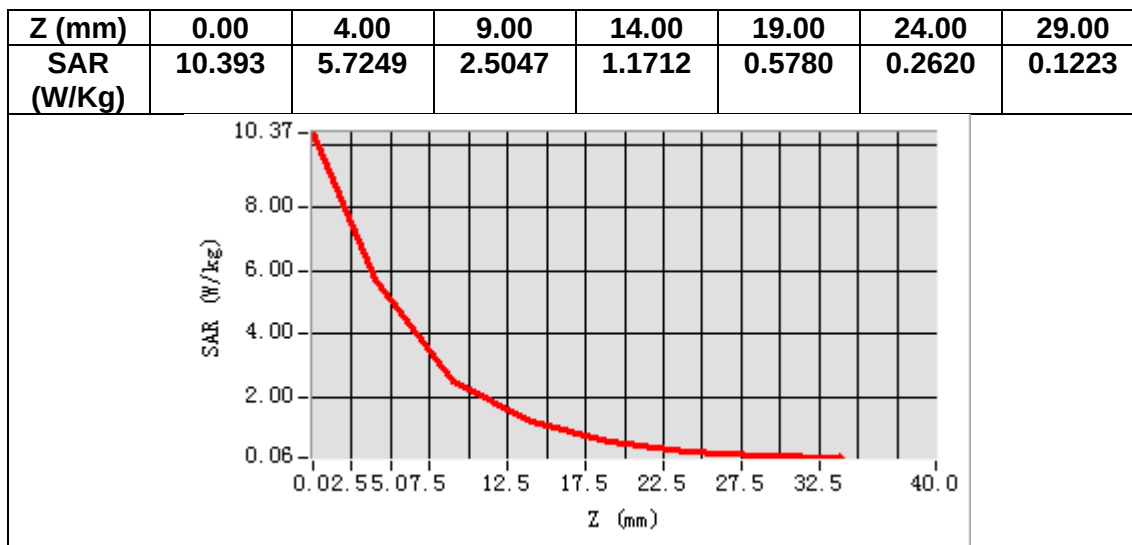

## MEASUREMENT 8


Date of measurement: 18/5/2023

### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=10mm dy=10mm, h= 2.00 mm</u> |
| <u>ZoomScan</u>        | <u>7x7x12,dx=4mm dy=4mm dz=2mm</u> |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Dipole</u>                      |
| <u>Band</u>            | <u>CW5200</u>                      |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>CW (Crest factor: 1.0)</u>      |
| <u>ConvF</u>           | <u>1.80</u>                        |

### B. SAR Measurement Results



|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 5200.000000 |
| <b>Relative permittivity (real part)</b>      | 35.392120   |
| <b>Relative permittivity (imaginary part)</b> | 15.926808   |
| <b>Conductivity (S/m)</b>                     | 4.601078    |
| <b>Variation (%)</b>                          | 3.790000    |

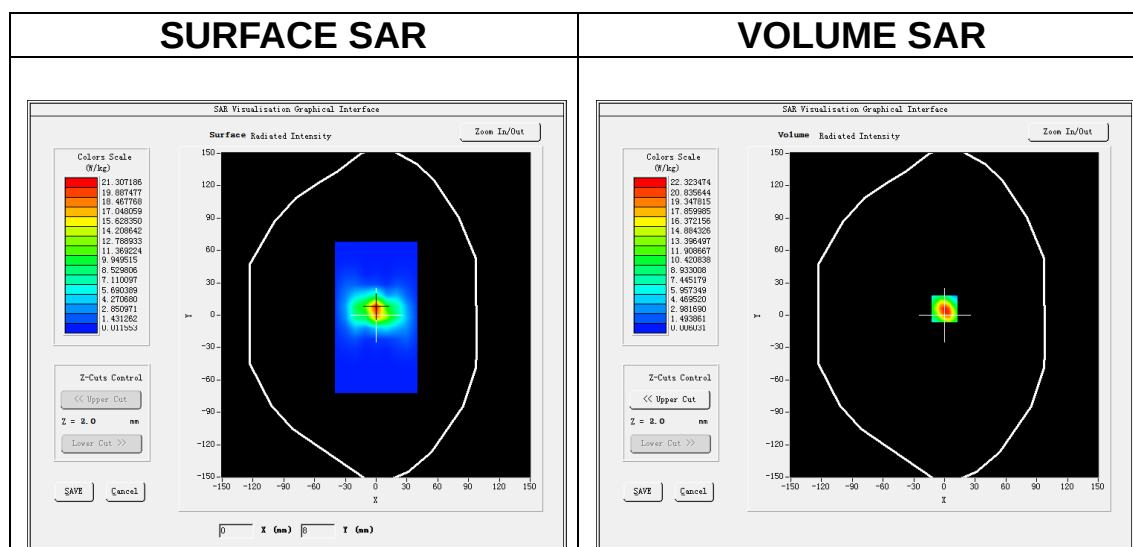

Maximum location: X=0.00, Y=6.00

SAR Peak: 40.06 W/kg

|                       |           |
|-----------------------|-----------|
| <b>SAR 10g (W/Kg)</b> | 5.990217  |
| <b>SAR 1g (W/Kg)</b>  | 17.489024 |

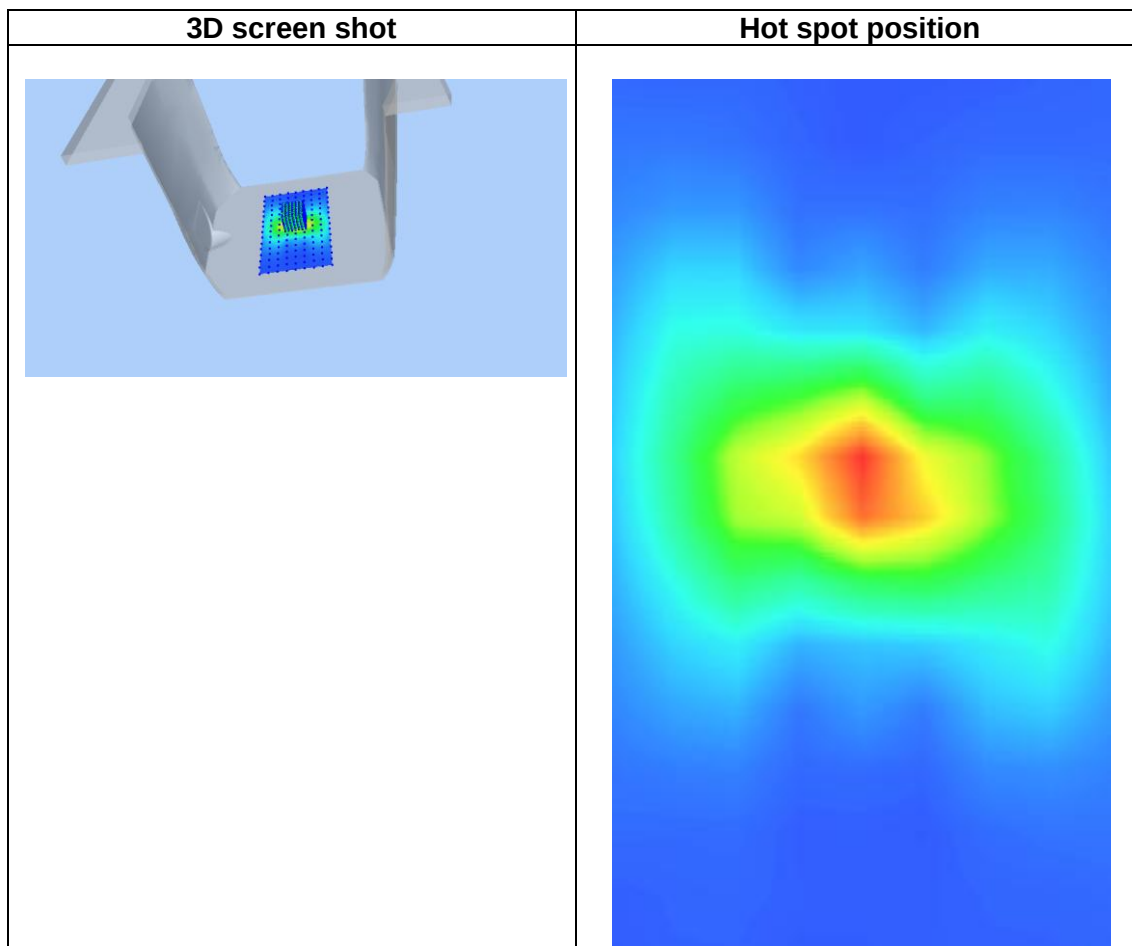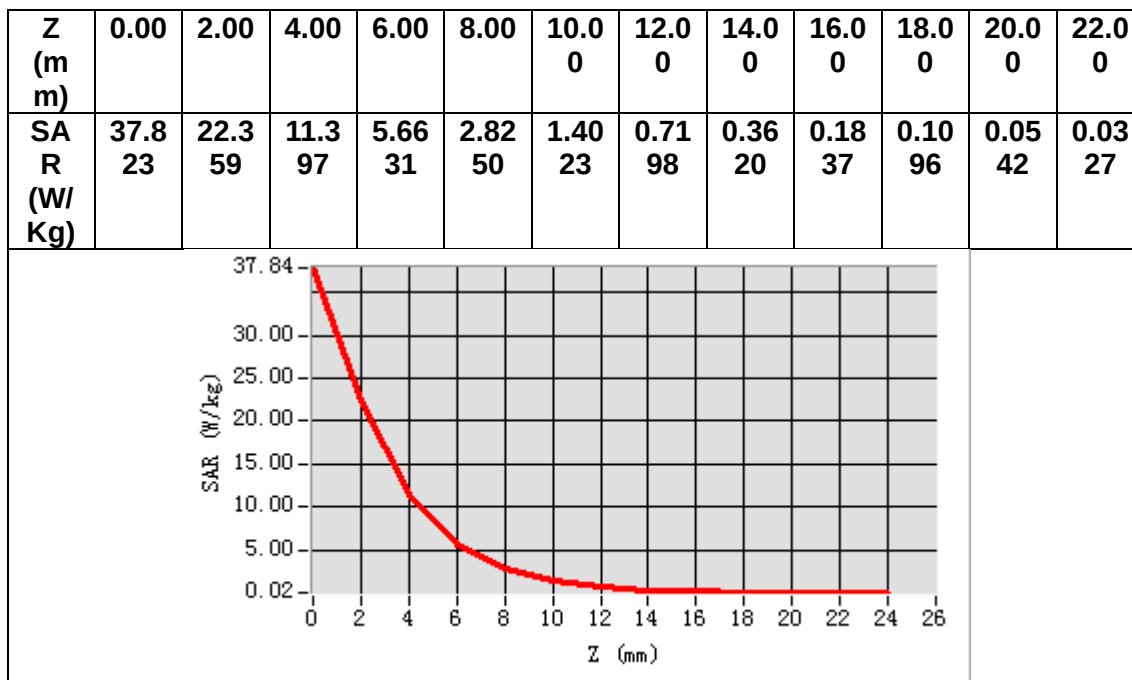

## MEASUREMENT 9


Date of measurement: 19/5/2023

### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=10mm dy=10mm, h= 2.00 mm</u> |
| <u>ZoomScan</u>        | <u>7x7x12,dx=4mm dy=4mm dz=2mm</u> |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Dipole</u>                      |
| <u>Band</u>            | <u>CW5800</u>                      |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>CW (Crest factor: 1.0)</u>      |
| <u>ConvF</u>           | <u>2.07</u>                        |

### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 5800.000000 |
| <b>Relative permittivity (real part)</b>      | 33.971037   |
| <b>Relative permittivity (imaginary part)</b> | 15.828369   |
| <b>Conductivity (S/m)</b>                     | 5.100252    |
| <b>Variation (%)</b>                          | -1.540000   |

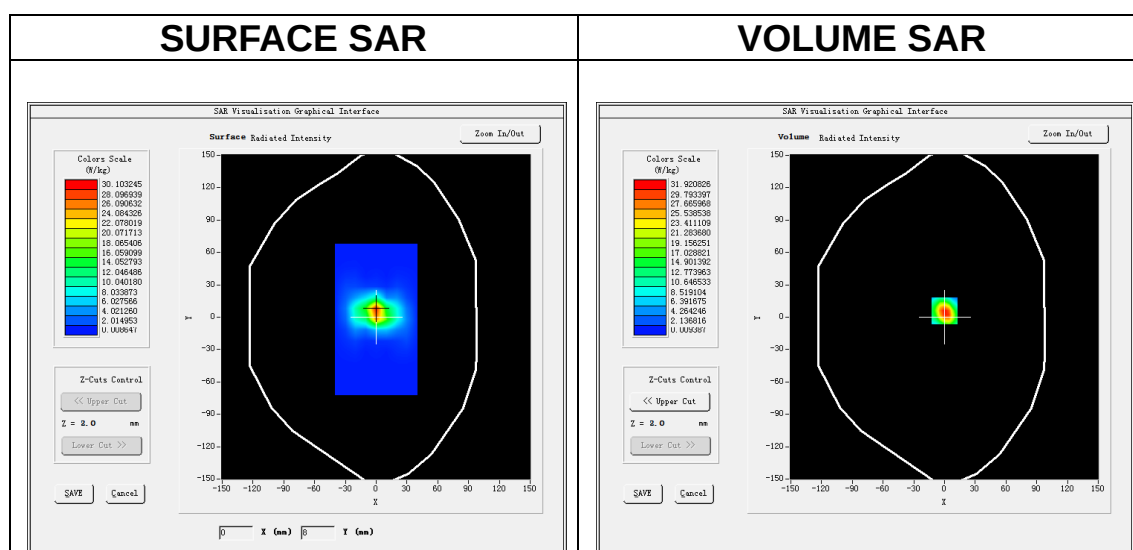


Maximum location: X=0.00, Y=6.00


SAR Peak: 57.37 W/kg

|                       |           |
|-----------------------|-----------|
| <b>SAR 10g (W/Kg)</b> | 5.432177  |
| <b>SAR 1g (W/Kg)</b>  | 16.367230 |


| Z<br>(m<br>m)     | 0.00       | 2.00       | 4.00       | 6.00       | 8.00       | 10.0<br>0  | 12.0<br>0  | 14.0<br>0  | 16.0<br>0  | 18.0<br>0  | 20.0<br>0  | 22.0<br>0  |
|-------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| SAR<br>(W/<br>Kg) | 54.0<br>86 | 31.9<br>68 | 16.1<br>33 | 8.17<br>88 | 4.08<br>88 | 2.05<br>75 | 1.03<br>36 | 0.51<br>12 | 0.27<br>70 | 0.15<br>30 | 0.07<br>74 | 0.04<br>74 |

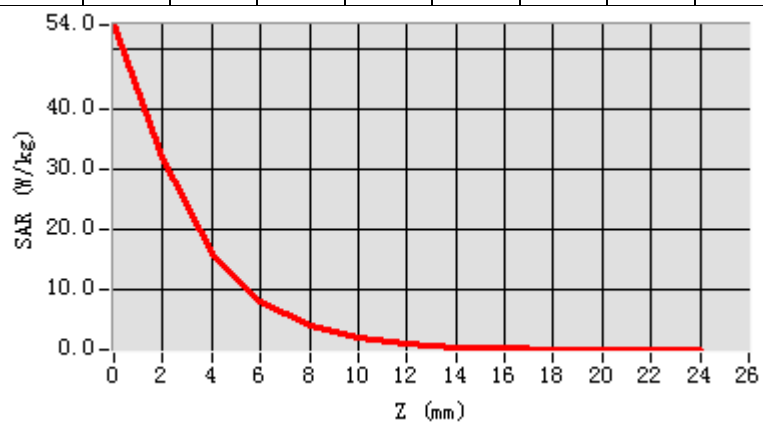

3D screen shot

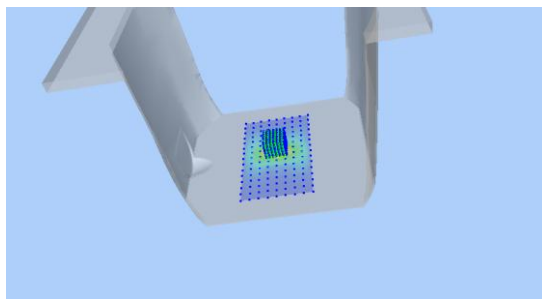

Hot spot position

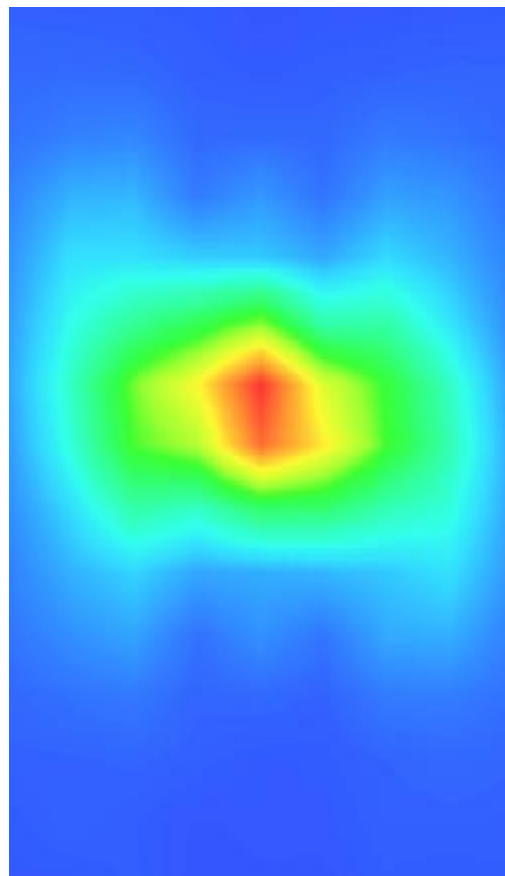

### 13. Appendix C. Plots of High SAR Measurement

| Table of contents                |
|----------------------------------|
| MEASUREMENT 1 GSM 850 Body       |
| MEASUREMENT 2 GSM 1900 Body      |
| MEASUREMENT 3 WCDMA Band 2 Body  |
| MEASUREMENT 4 WCDMA Band 5 Body  |
| MEASUREMENT 5 WLAN 2.4G Body     |
| MEASUREMENT 6 WLAN 5.2G Body     |
| MEASUREMENT 7 WLAN 5.8G Body     |
| MEASUREMENT 8 LTE Band 2 Body    |
| MEASUREMENT 9 LTE Band 5 Body    |
| MEASUREMENT 10 LTE Band 7 Body   |
| MEASUREMENT 11 LTE Band 12 Body  |
| MEASUREMENT 12 LTE Band 17 Body  |
| MEASUREMENT 13 LTE Band 38 Body  |
| MEASUREMENT 14 LTE Band 41 Body  |
| MEASUREMENT 15 LTE Band 40A Body |
| MEASUREMENT 16 LTE Band 40B Body |

## MEASUREMENT 1

Date of measurement: 22/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Body</u>                        |
| <u>Band</u>            | <u>GSM850</u>                      |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>TDMA (Crest factor: 8.0)</u>    |
| <u>ConvF</u>           | <u>1.50</u>                        |


### B. SAR Measurement Results

|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 836.400000 |
| <b>Relative permittivity (real part)</b>      | 40.766674  |
| <b>Relative permittivity (imaginary part)</b> | 19.593307  |
| <b>Conductivity (S/m)</b>                     | 0.910436   |
| <b>Variation (%)</b>                          | -0.490000  |

#### SURFACE SAR

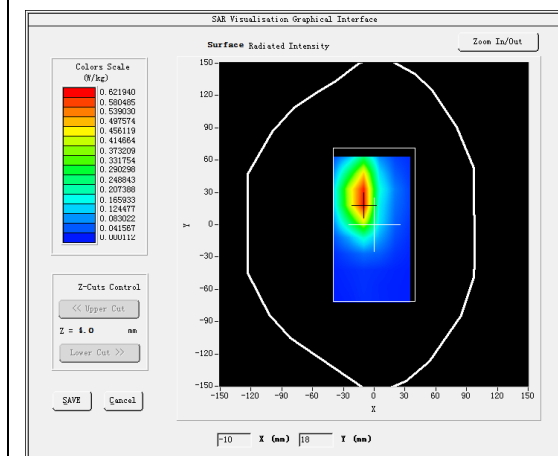


#### VOLUME SAR

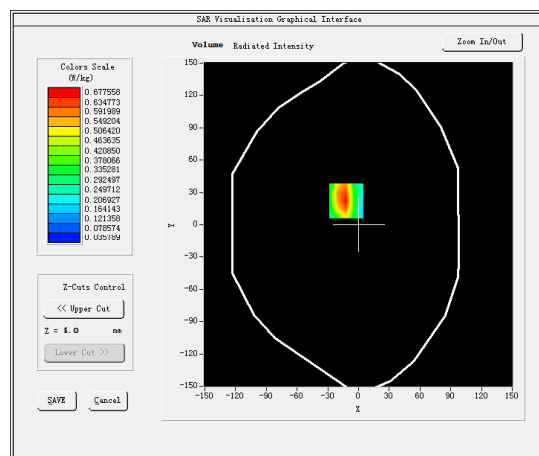


Maximum location: X=-12.00, Y=22.00

SAR Peak: 1.11 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.364272 |
| <b>SAR 1g (W/Kg)</b>  | 0.654743 |

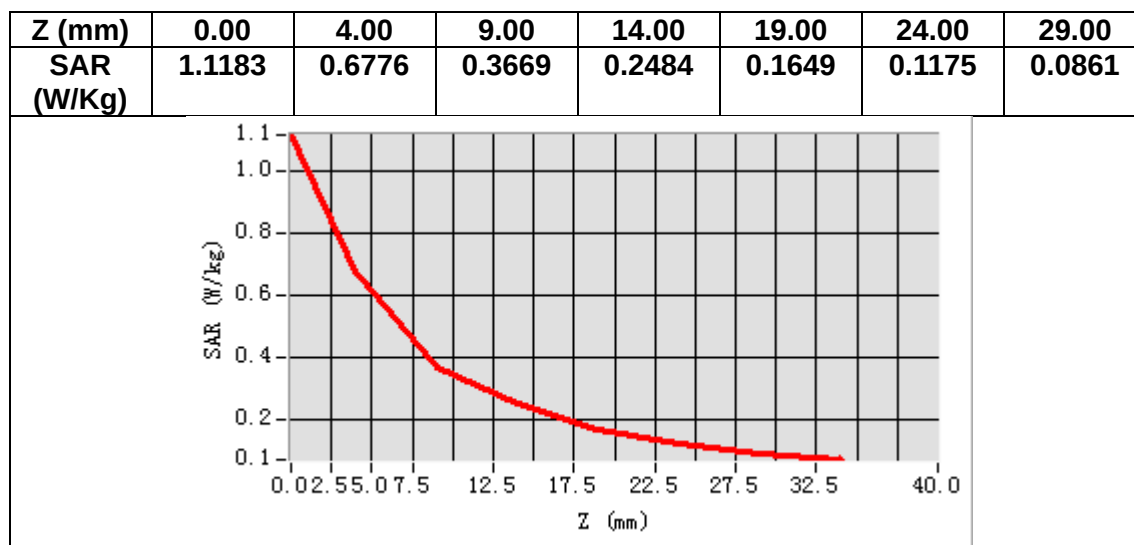

3D screen shot

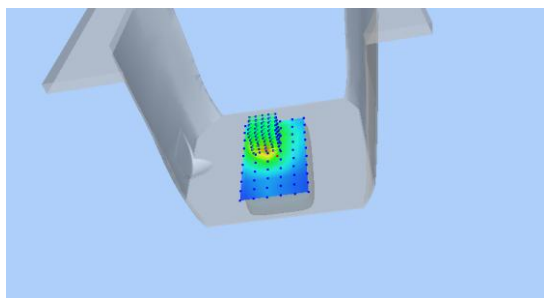

Hot spot position

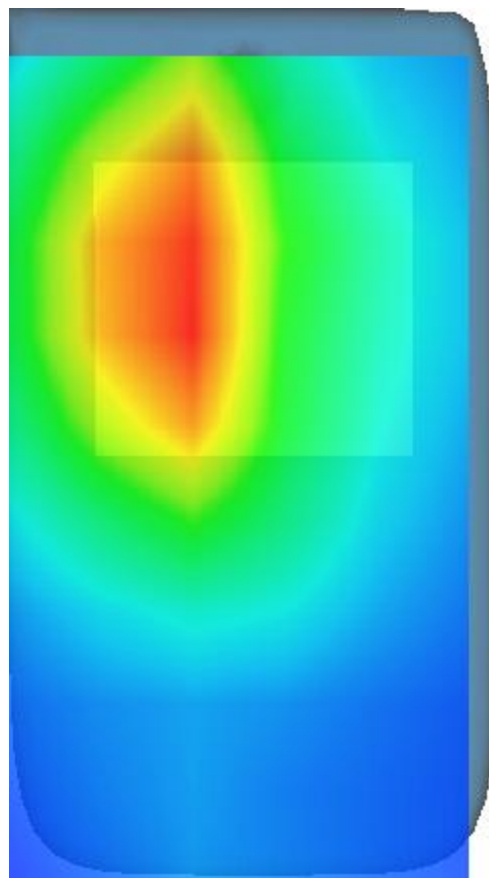

## MEASUREMENT 2

Date of measurement: 23/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>GSM1900</u>                     |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>TDMA (Crest factor: 8.0)</u>    |
| <b>ConvF</b>           | <u>1.91</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 1880.000000 |
| <b>Relative permittivity (real part)</b>      | 38.342026   |
| <b>Relative permittivity (imaginary part)</b> | 13.830178   |
| <b>Conductivity (S/m)</b>                     | 1.444485    |
| <b>Variation (%)</b>                          | 0.710000    |

#### SURFACE SAR

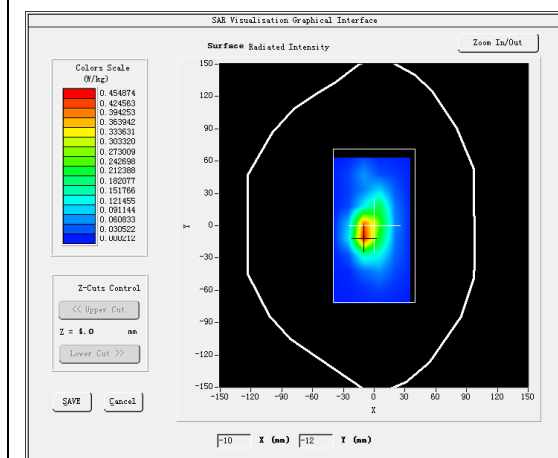


#### VOLUME SAR

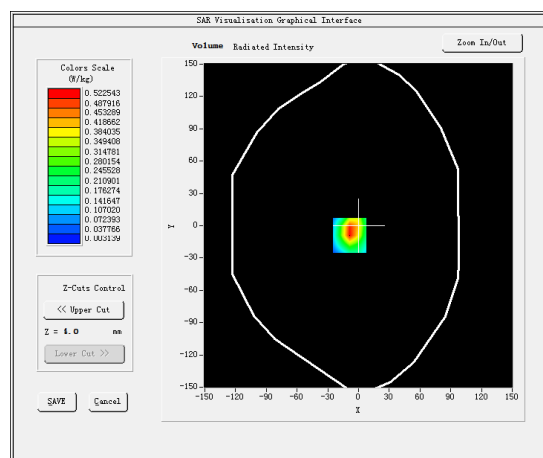


Maximum location: X=-9.00, Y=-9.00

SAR Peak: 1.02 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.218260 |
| <b>SAR 1g (W/Kg)</b>  | 0.525271 |

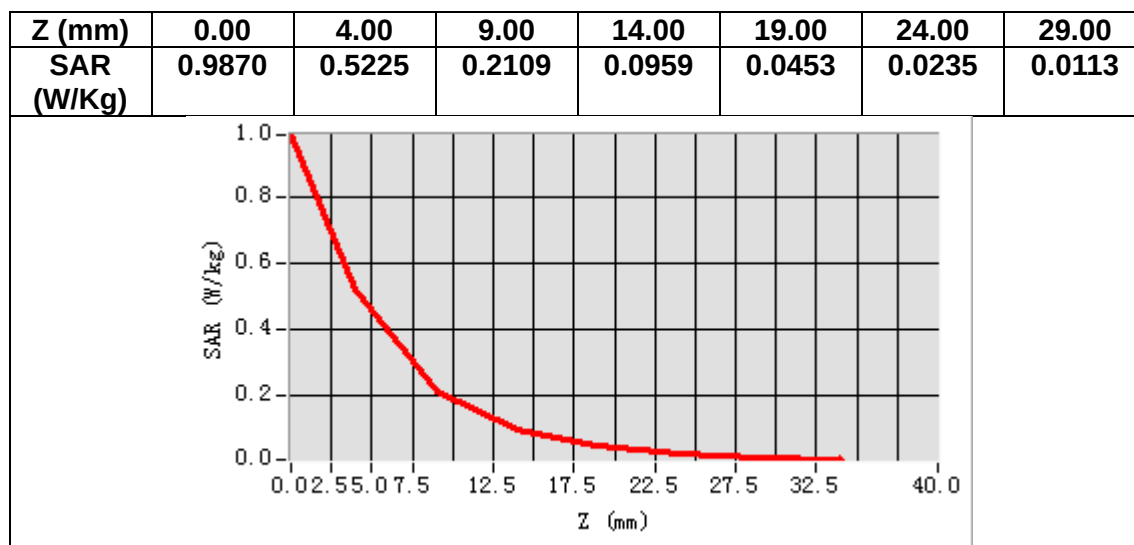

3D screen shot

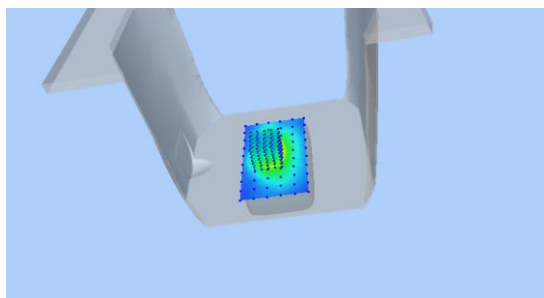

Hot spot position

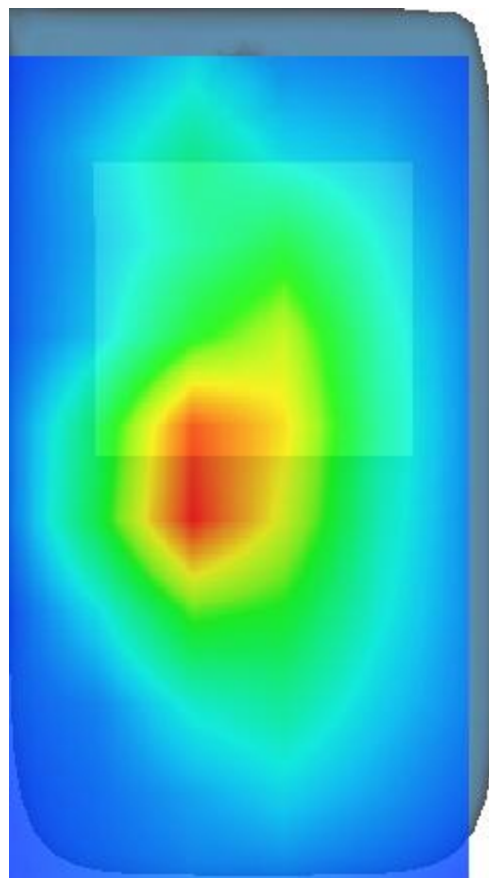

## MEASUREMENT 3

Date of measurement: 23/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>Band2 WCDMA1900</u>             |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>1.91</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 1880.000000 |
| <b>Relative permittivity (real part)</b>      | 38.342026   |
| <b>Relative permittivity (imaginary part)</b> | 13.830178   |
| <b>Conductivity (S/m)</b>                     | 1.444485    |
| <b>Variation (%)</b>                          | -0.380000   |

#### SURFACE SAR

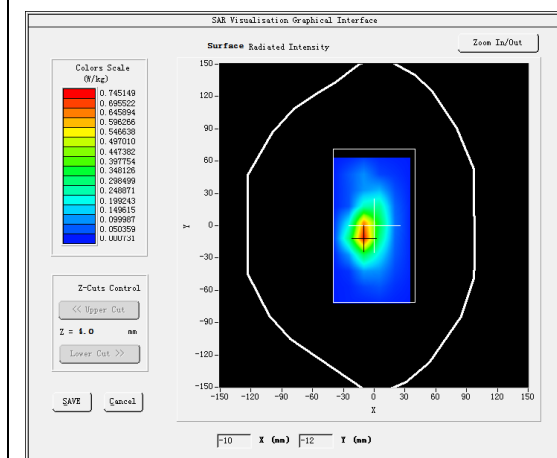


#### VOLUME SAR

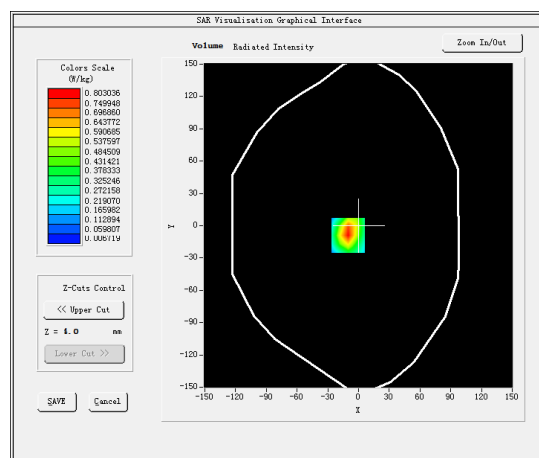


Maximum location: X=-10.00, Y=-9.00

SAR Peak: 1.47 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.343888 |
| <b>SAR 1g (W/Kg)</b>  | 0.777571 |

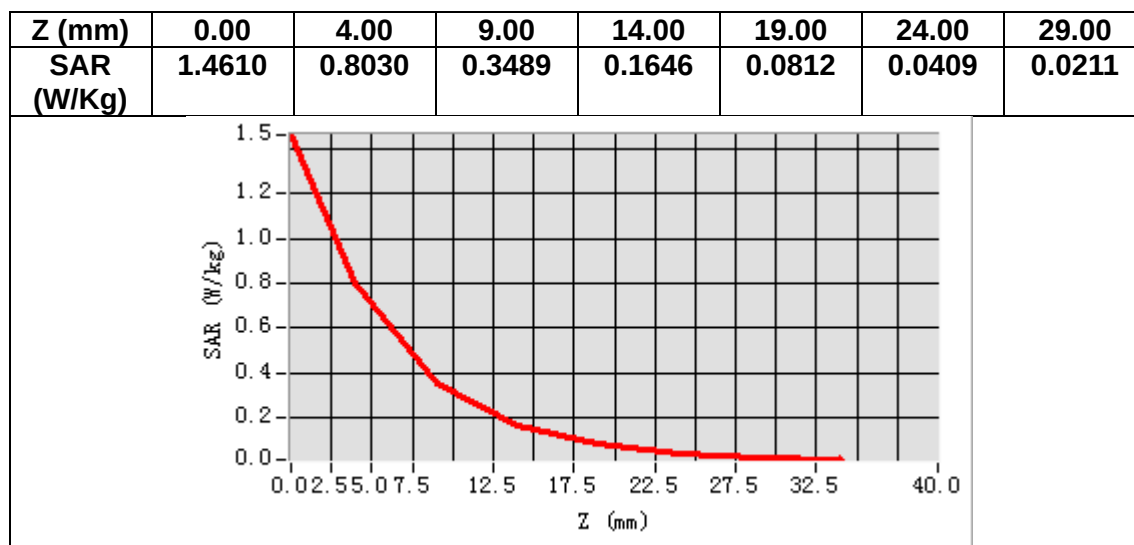

3D screen shot

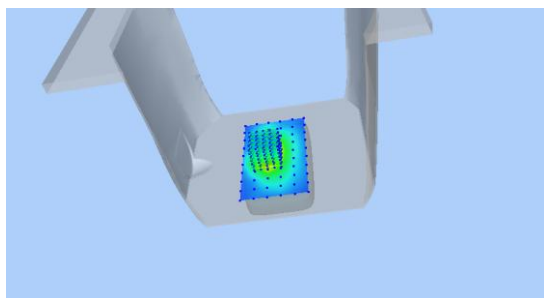

Hot spot position

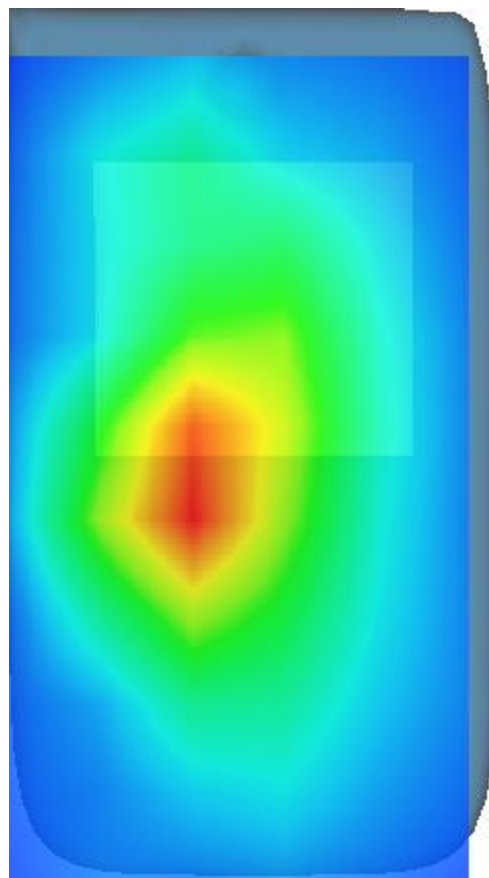

## MEASUREMENT 4

Date of measurement: 22/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>Band5 WCDMA850</u>              |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>WCDMA (Crest factor: 1.0)</u>   |
| <b>ConvF</b>           | <u>1.50</u>                        |


### B. SAR Measurement Results

|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 836.400000 |
| <b>Relative permittivity (real part)</b>      | 40.766674  |
| <b>Relative permittivity (imaginary part)</b> | 19.593307  |
| <b>Conductivity (S/m)</b>                     | 0.910436   |
| <b>Variation (%)</b>                          | -0.380000  |

#### SURFACE SAR

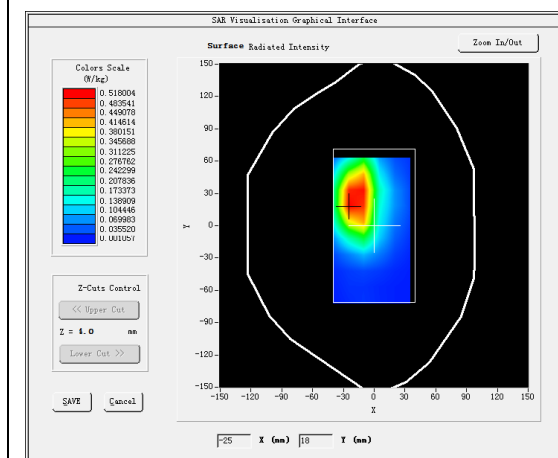


#### VOLUME SAR

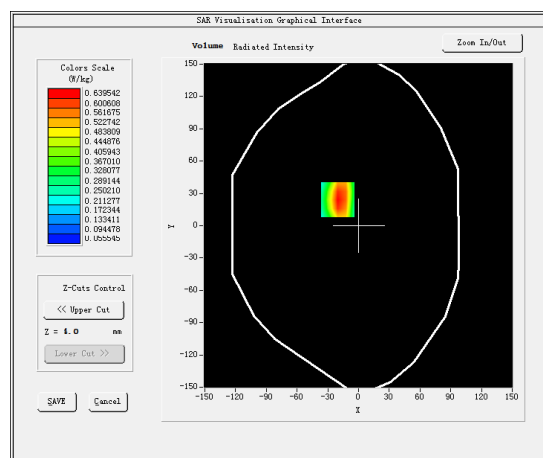


Maximum location: X=-20.00, Y=24.00

SAR Peak: 0.94 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.384384 |
| <b>SAR 1g (W/Kg)</b>  | 0.625767 |

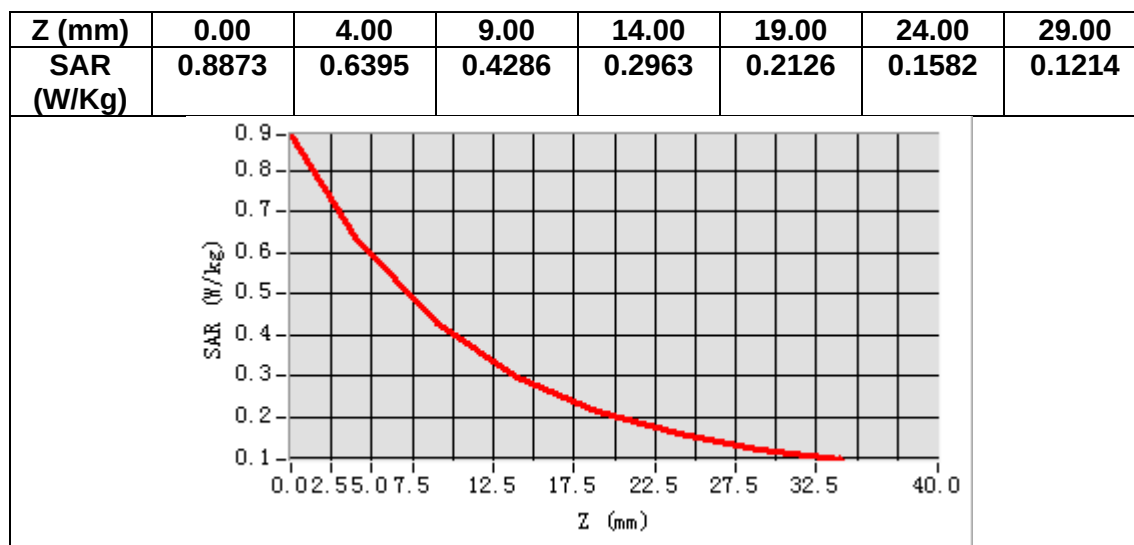

3D screen shot

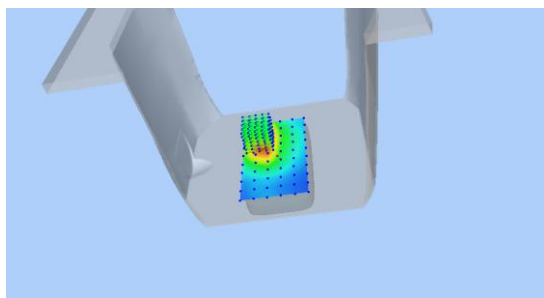

Hot spot position

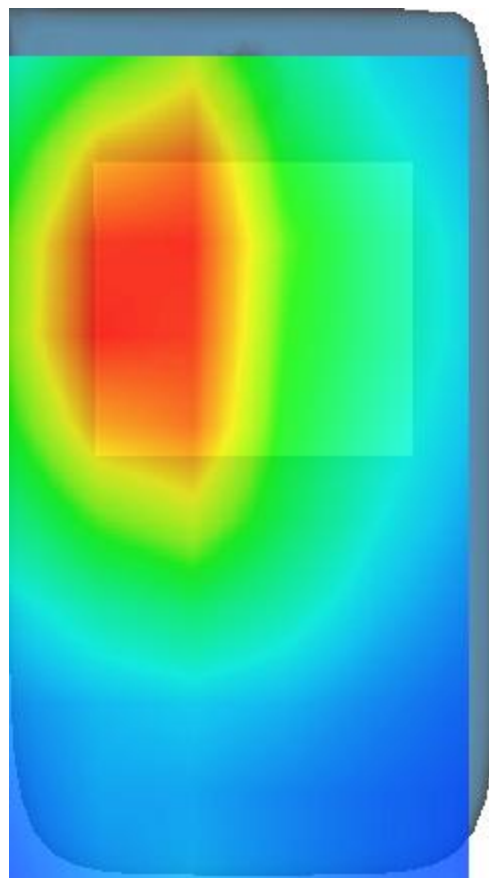

## MEASUREMENT 5

Date of measurement: 6/5/2023


### A. Experimental conditions.

|                        |                                      |
|------------------------|--------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u>   |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>    |
| <b>Phantom</b>         | <u>Validation plane</u>              |
| <b>Device Position</b> | <u>Body</u>                          |
| <b>Band</b>            | <u>IEEE 802.11b ISM</u>              |
| <b>Channels</b>        | <u>Low</u>                           |
| <b>Signal</b>          | <u>IEEE802.b (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>1.98</u>                          |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2412.000000 |
| <b>Relative permittivity (real part)</b>      | 38.167113   |
| <b>Relative permittivity (imaginary part)</b> | 12.927779   |
| <b>Conductivity (S/m)</b>                     | 1.732322    |
| <b>Variation (%)</b>                          | -0.070000   |

#### SURFACE SAR

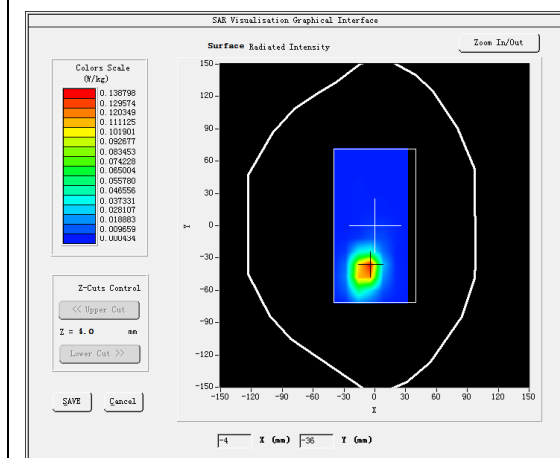


#### VOLUME SAR

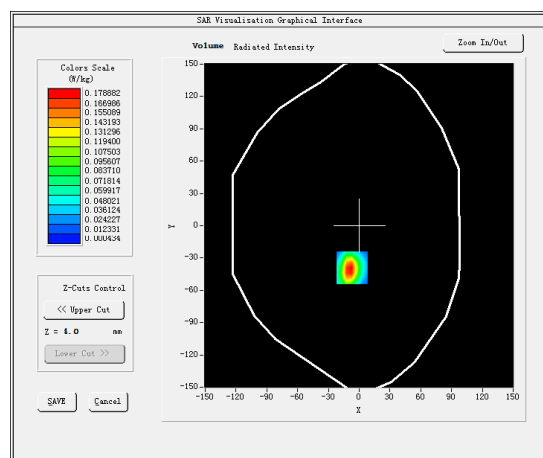


Maximum location: X=-7.00, Y=-39.00

SAR Peak: 0.38 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.060851 |
| <b>SAR 1g (W/Kg)</b>  | 0.172364 |

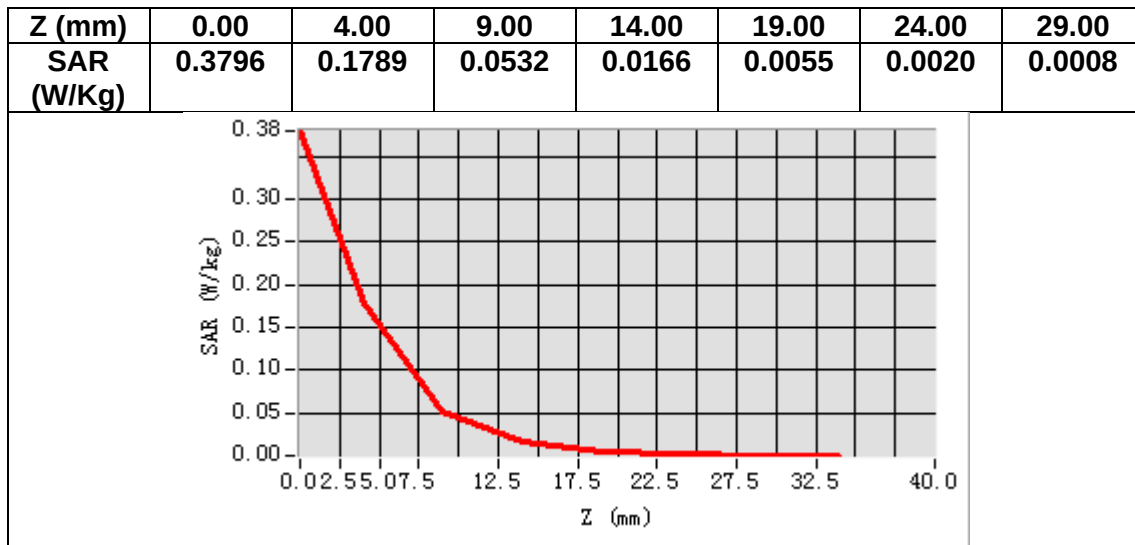

3D screen shot

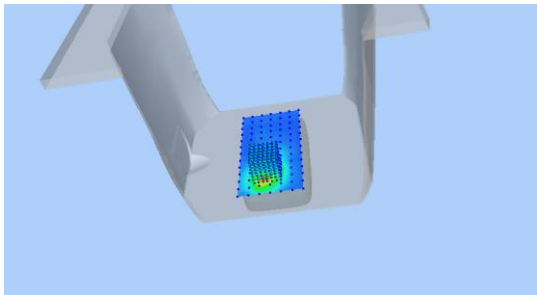

Hot spot position

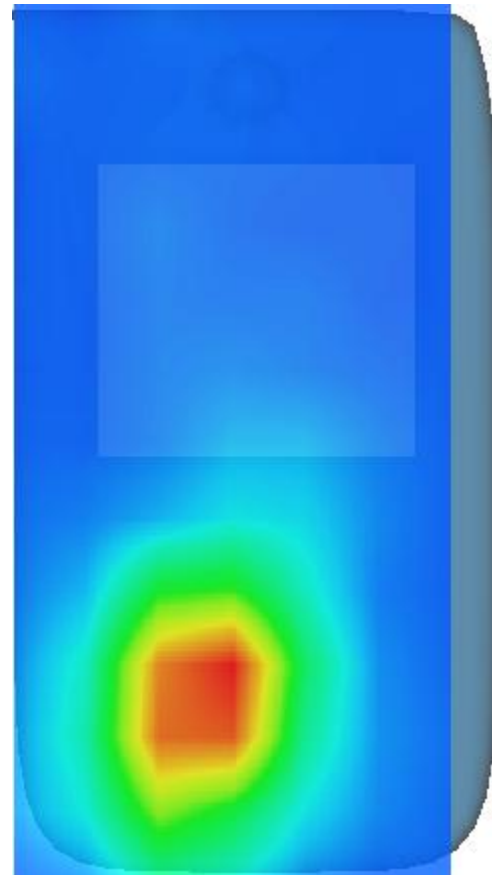

## MEASUREMENT 6

Date of measurement: 18/5/2023


### A. Experimental conditions.

|                        |                                        |
|------------------------|----------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>      |
| <b>Phantom</b>         | <u>Validation plane</u>                |
| <b>Device Position</b> | <u>Body</u>                            |
| <b>Band</b>            | <u>IEEE 802.11n ISM</u>                |
| <b>Channels</b>        | <u>Low</u>                             |
| <b>Signal</b>          | <u>IEEE802.11n (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>1.98</u>                            |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 5190.000000 |
| <b>Relative permittivity (real part)</b>      | 35.306418   |
| <b>Relative permittivity (imaginary part)</b> | 15.733231   |
| <b>Conductivity (S/m)</b>                     | 4.536415    |
| <b>Variation (%)</b>                          | -1.620000   |

#### SURFACE SAR

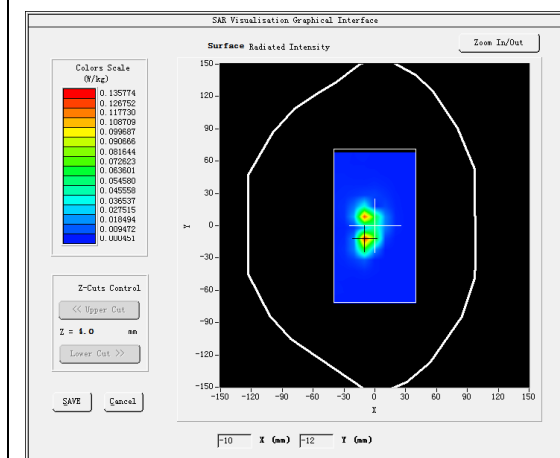



#### VOLUME SAR

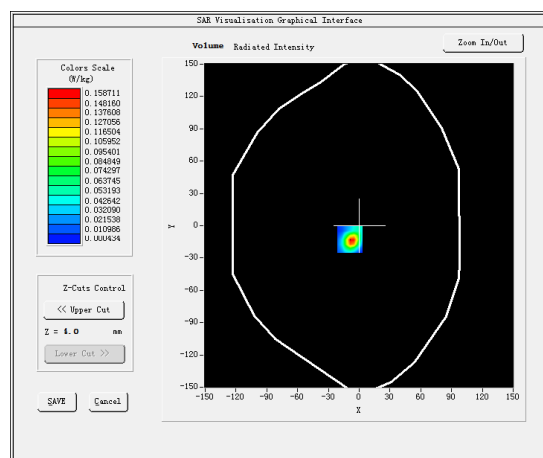

Maximum location: X=-9.00, Y=-13.00

SAR Peak: 0.52 W/kg

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.034881 |
| <b>SAR 1g (W/Kg)</b>  | 0.149094 |

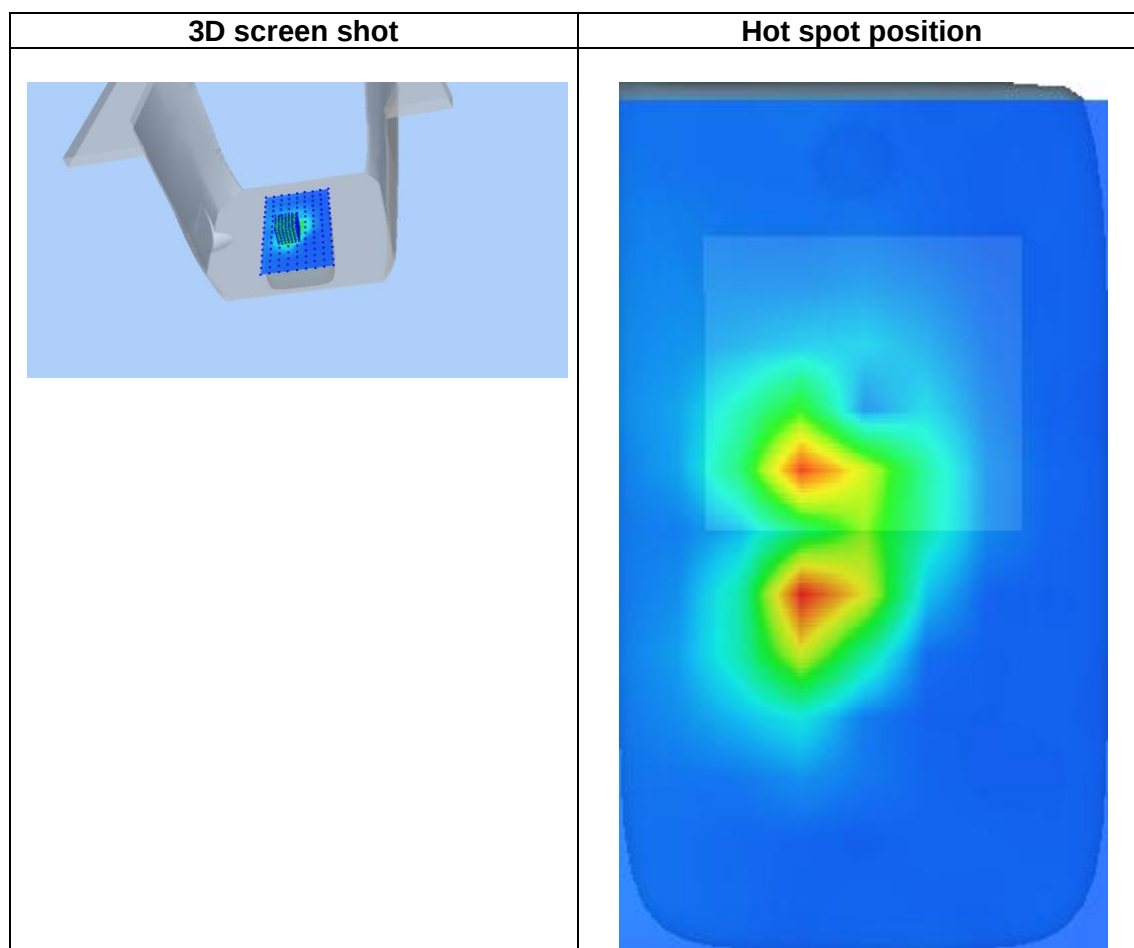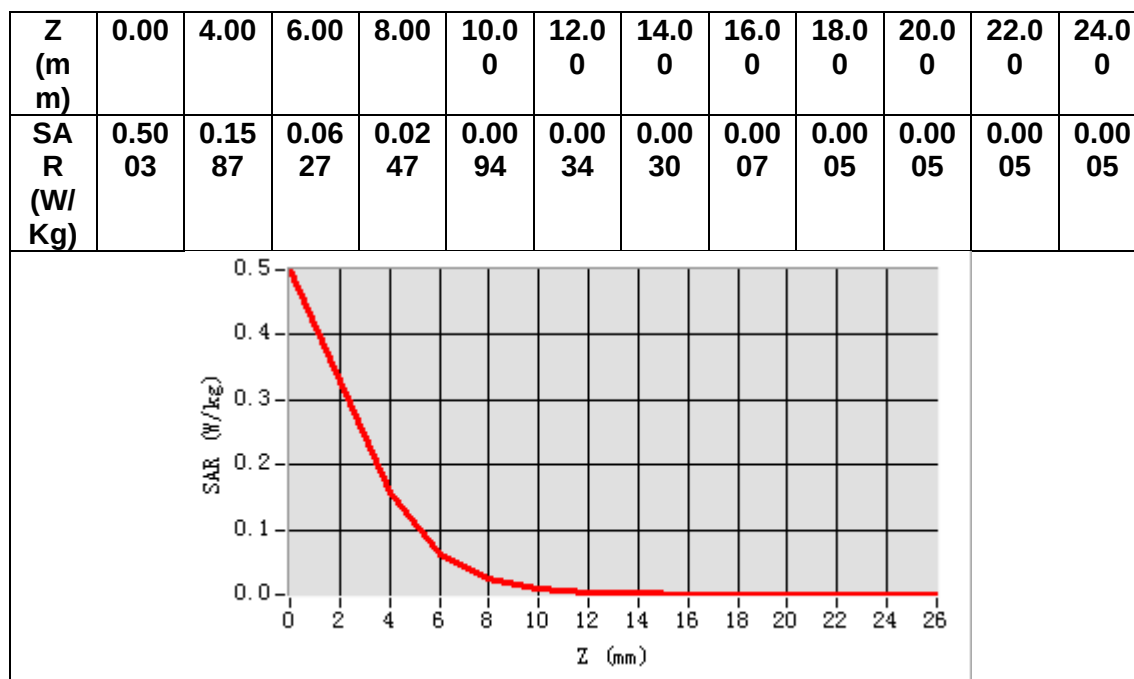

## MEASUREMENT 7

Date of measurement: 19/5/2023


### A. Experimental conditions.

|                        |                                        |
|------------------------|----------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u>     |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>      |
| <b>Phantom</b>         | <u>Validation plane</u>                |
| <b>Device Position</b> | <u>Body</u>                            |
| <b>Band</b>            | <u>IEEE 802.11n ISM</u>                |
| <b>Channels</b>        | <u>Low</u>                             |
| <b>Signal</b>          | <u>IEEE802.11n (Crest factor: 1.0)</u> |
| <b>ConvF</b>           | <u>1.98</u>                            |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 5755.000000 |
| <b>Relative permittivity (real part)</b>      | 34.147815   |
| <b>Relative permittivity (imaginary part)</b> | 15.810142   |
| <b>Conductivity (S/m)</b>                     | 5.054854    |
| <b>Variation (%)</b>                          | -0.400000   |

#### SURFACE SAR

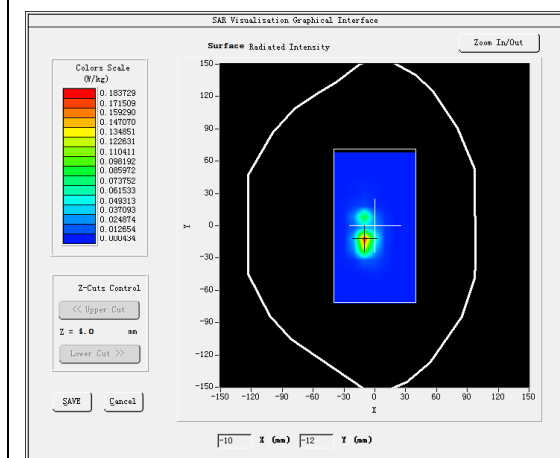



#### VOLUME SAR

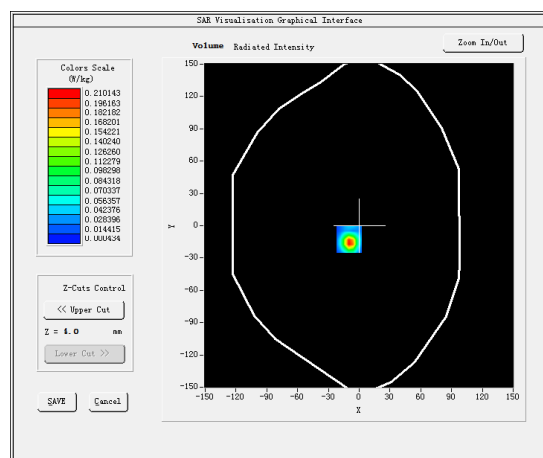

Maximum location: X=-10.00, Y=-13.00

SAR Peak: 0.69 W/kg

|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.045127 |
| <b>SAR 1g (W/Kg)</b>  | 0.194412 |

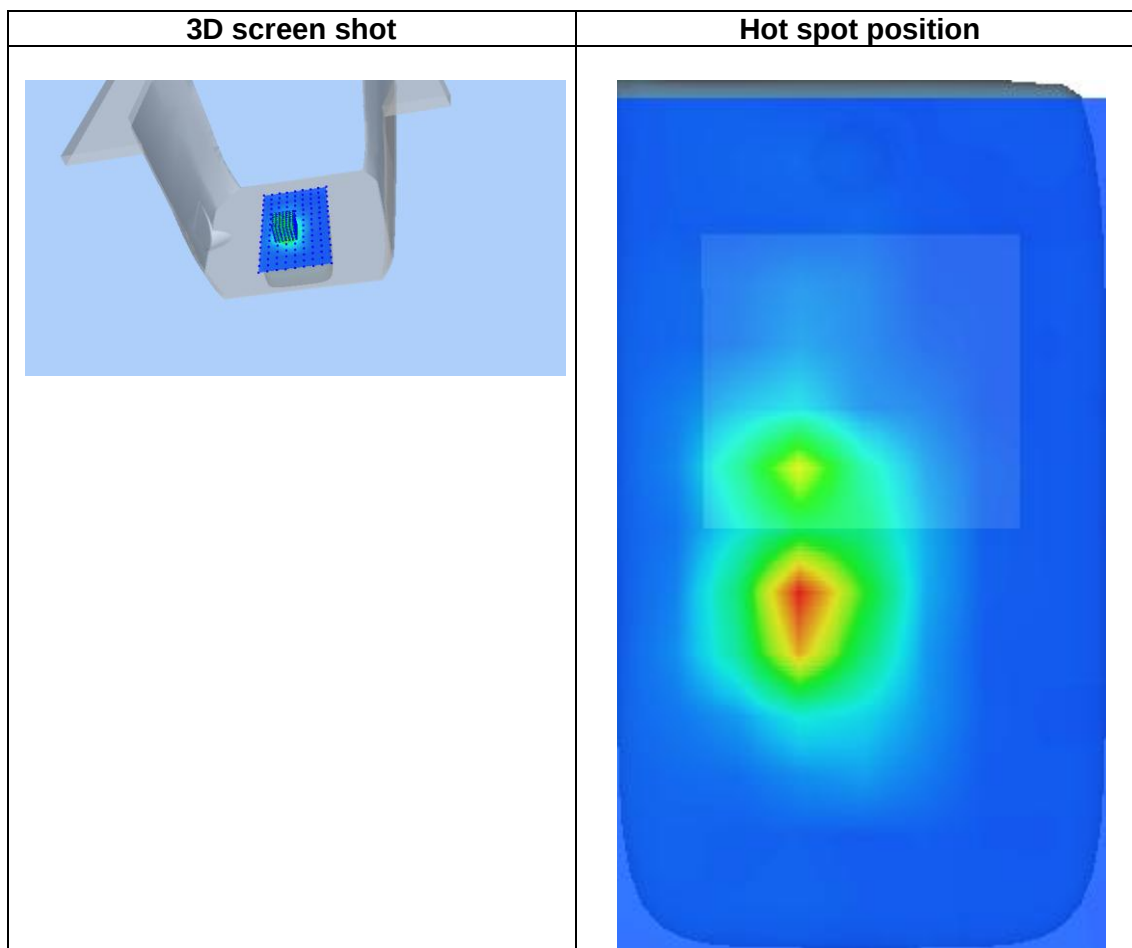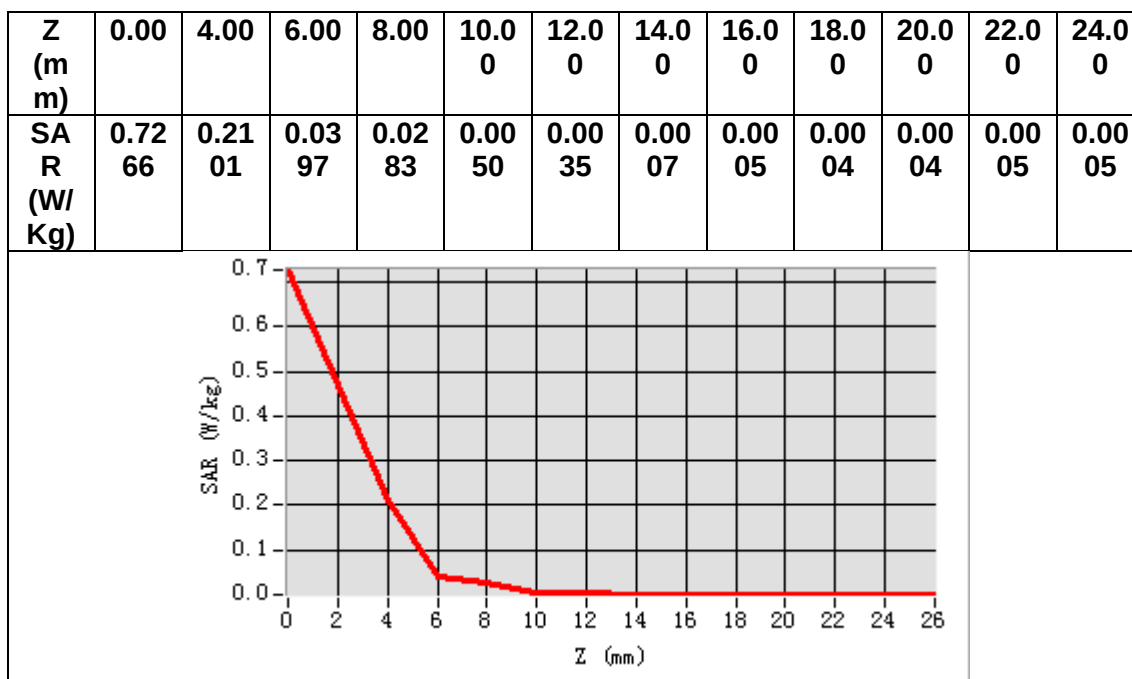

## MEASUREMENT 8

Date of measurement: 23/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 2</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.91</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 1880.000000 |
| <b>Relative permittivity (real part)</b>      | 38.342026   |
| <b>Relative permittivity (imaginary part)</b> | 13.830178   |
| <b>Conductivity (S/m)</b>                     | 1.444485    |
| <b>Variation (%)</b>                          | -0.480000   |

#### SURFACE SAR

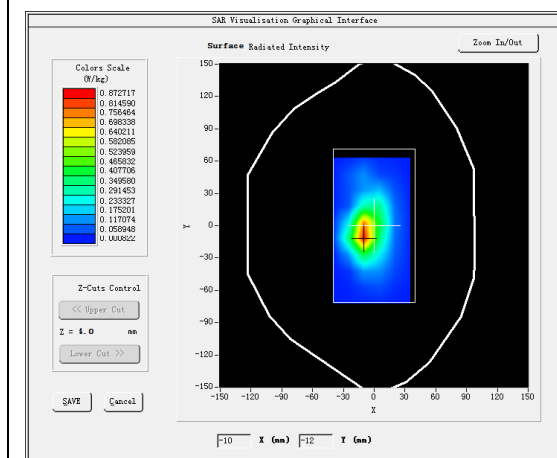


#### VOLUME SAR

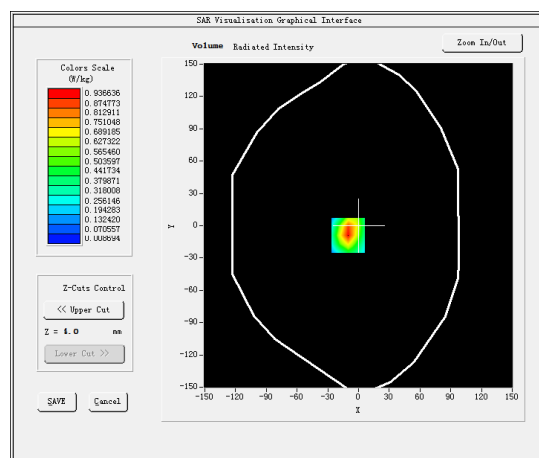


Maximum location: X=-10.00, Y=-9.00

SAR Peak: 1.71 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.406435 |
| <b>SAR 1g (W/Kg)</b>  | 0.912937 |

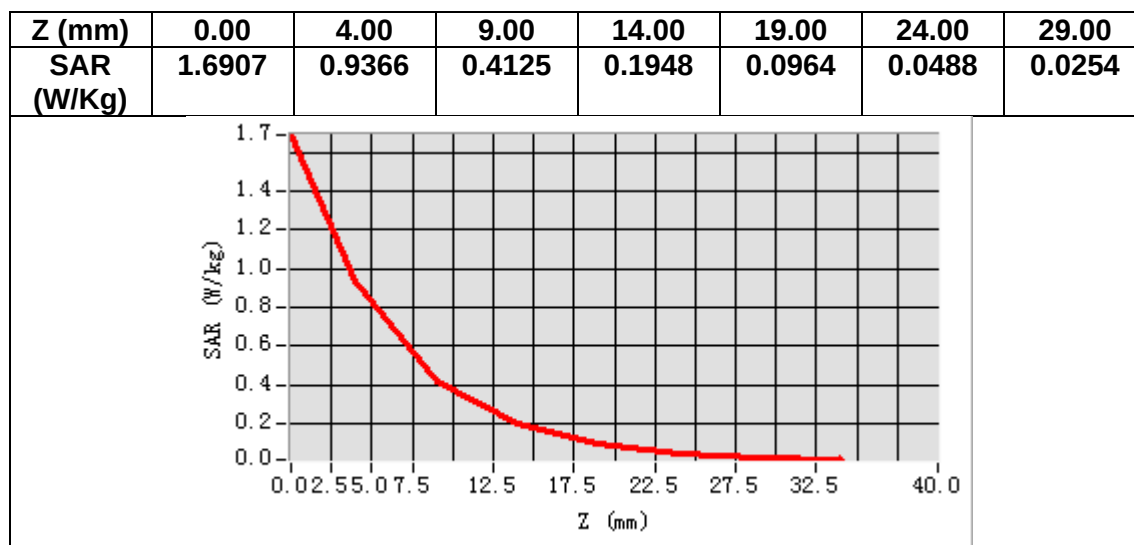

3D screen shot

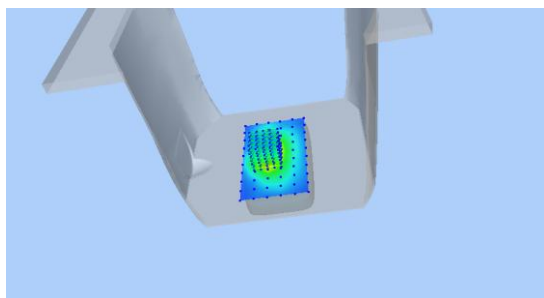

Hot spot position

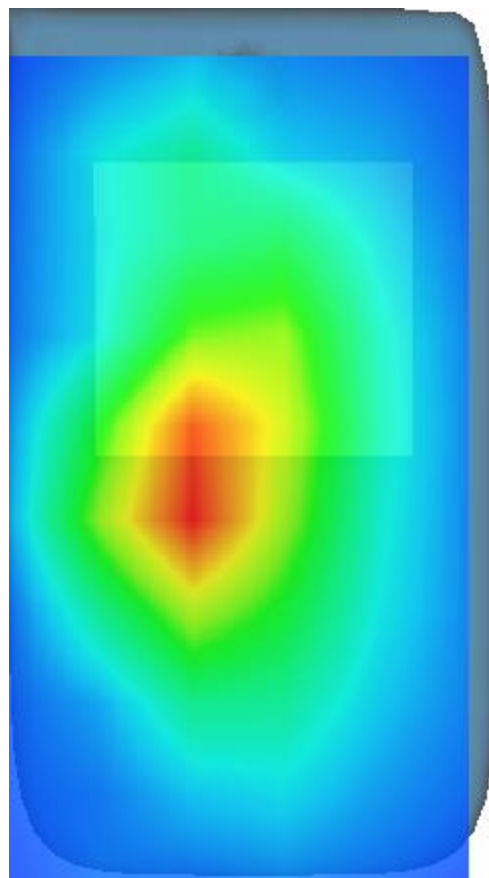

## MEASUREMENT 9

Date of measurement: 22/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 5</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.50</u>                        |


### B. SAR Measurement Results

|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 836.500000 |
| <b>Relative permittivity (real part)</b>      | 40.769264  |
| <b>Relative permittivity (imaginary part)</b> | 19.591967  |
| <b>Conductivity (S/m)</b>                     | 0.910482   |
| <b>Variation (%)</b>                          | -0.690000  |

#### SURFACE SAR

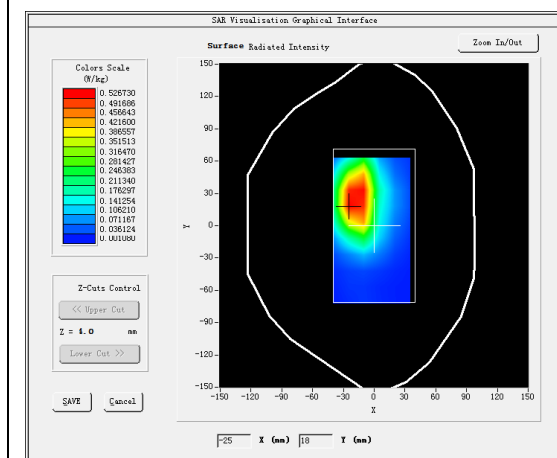


#### VOLUME SAR

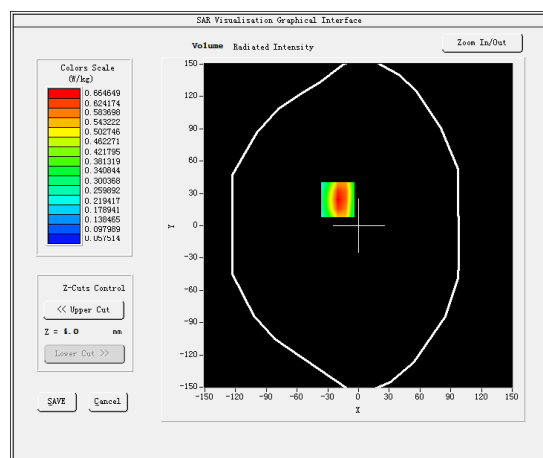


Maximum location: X=-20.00, Y=24.00

SAR Peak: 0.98 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.398991 |
| <b>SAR 1g (W/Kg)</b>  | 0.649855 |

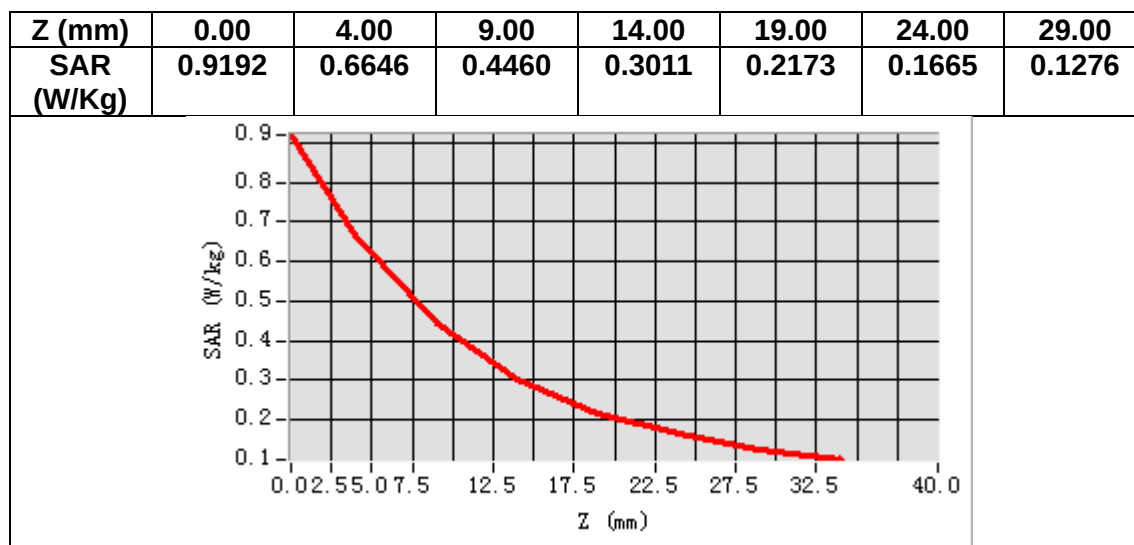

3D screen shot

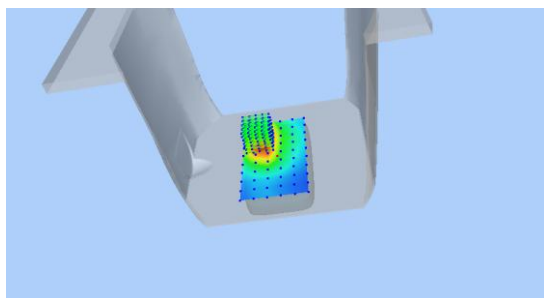

Hot spot position

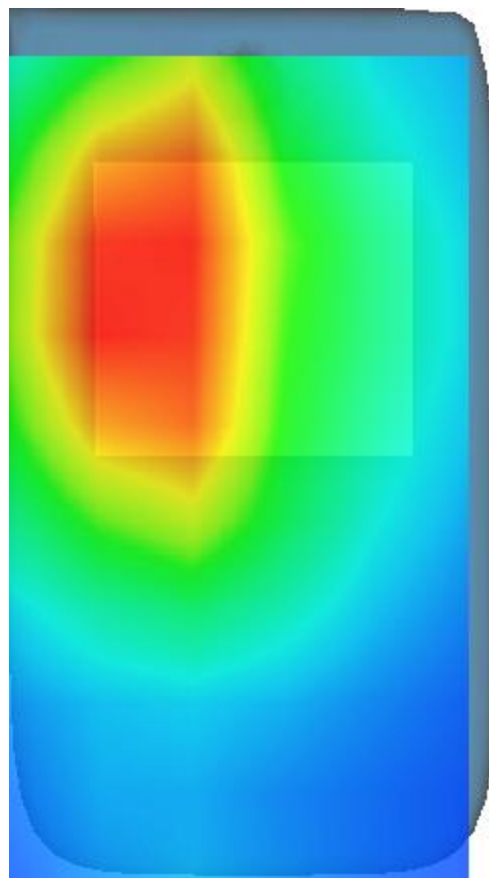

## MEASUREMENT 10

Date of measurement: 17/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 7</u>                  |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.87</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2535.000000 |
| <b>Relative permittivity (real part)</b>      | 38.439041   |
| <b>Relative permittivity (imaginary part)</b> | 13.647807   |
| <b>Conductivity (S/m)</b>                     | 1.922066    |
| <b>Variation (%)</b>                          | -0.450000   |

#### SURFACE SAR

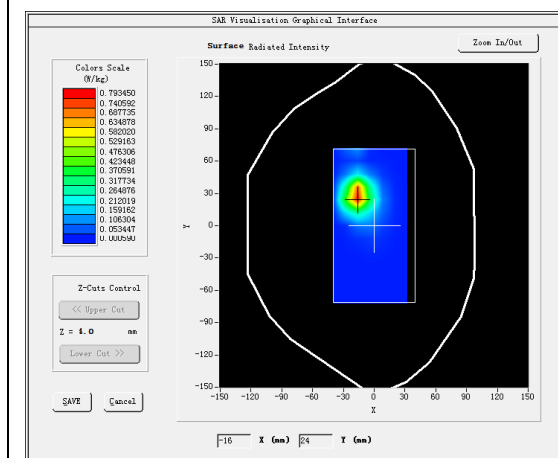


#### VOLUME SAR

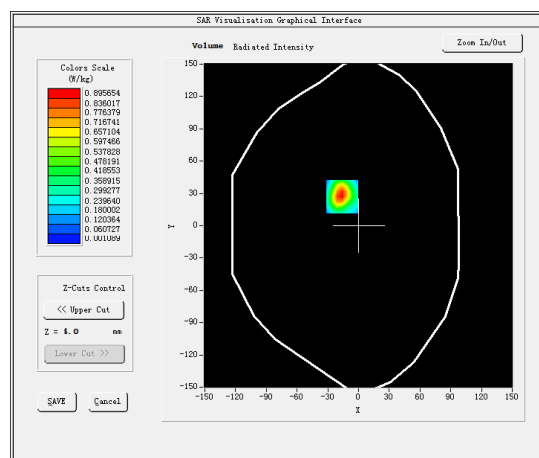


Maximum location: X=-16.00, Y=27.00

SAR Peak: 1.67 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.341708 |
| <b>SAR 1g (W/Kg)</b>  | 0.835488 |

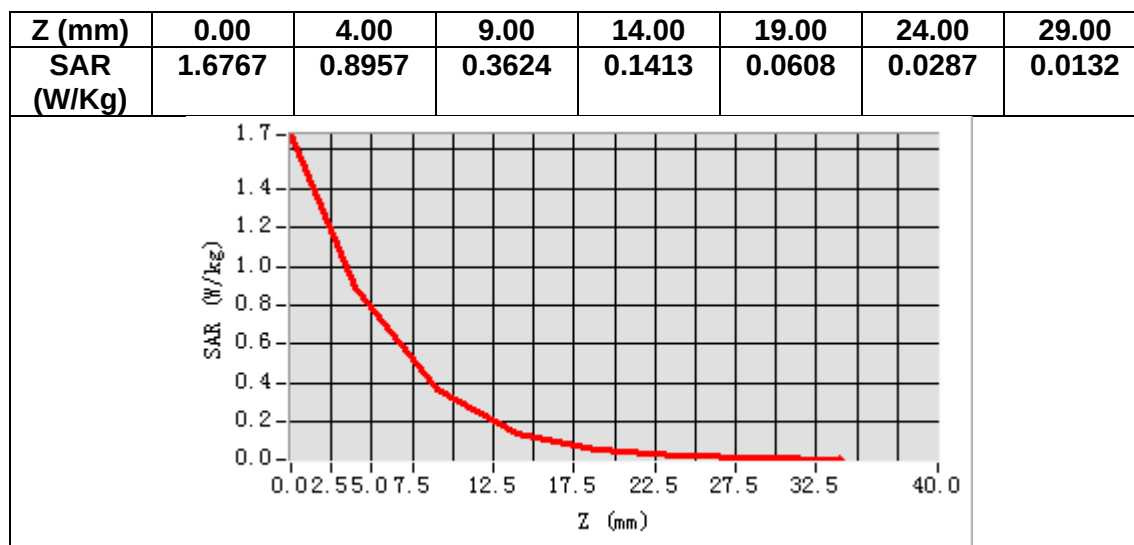

3D screen shot

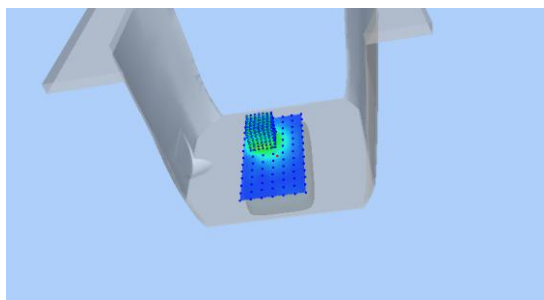

Hot spot position

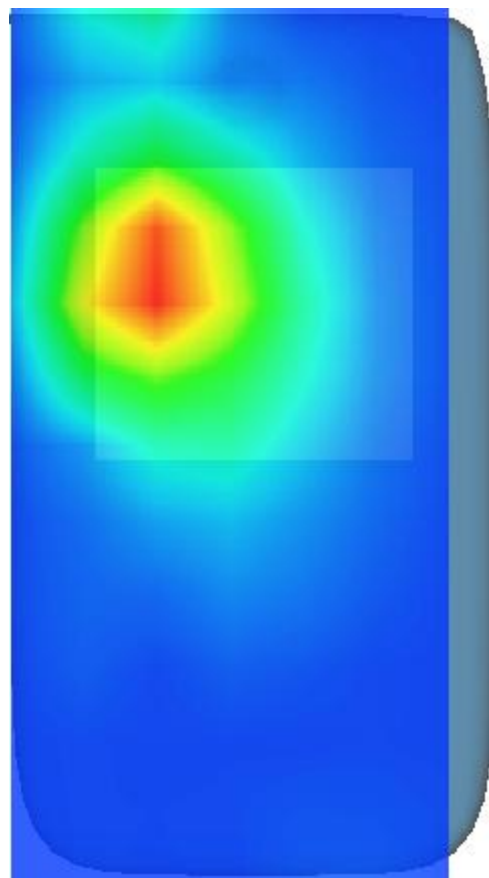

## MEASUREMENT 11

Date of measurement: 11/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7,dx=8mm dy=8mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 12</u>                 |
| <b>Channels</b>        | <u>High</u>                        |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.49</u>                        |


### B. SAR Measurement Results

|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 711.000000 |
| <b>Relative permittivity (real part)</b>      | 41.034977  |
| <b>Relative permittivity (imaginary part)</b> | 21.854786  |
| <b>Conductivity (S/m)</b>                     | 0.863264   |
| <b>Variation (%)</b>                          | 0.390000   |

#### SURFACE SAR

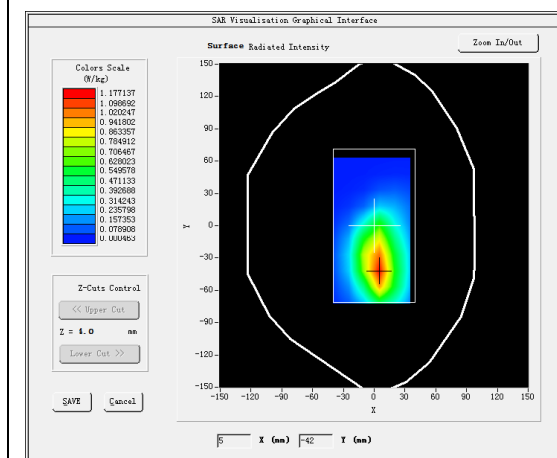


#### VOLUME SAR

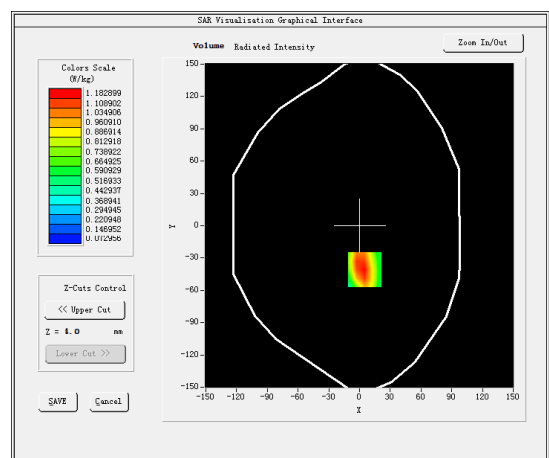


Maximum location: X=5.00, Y=-41.00

SAR Peak: 1.91 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.658587 |
| <b>SAR 1g (W/Kg)</b>  | 1.160115 |

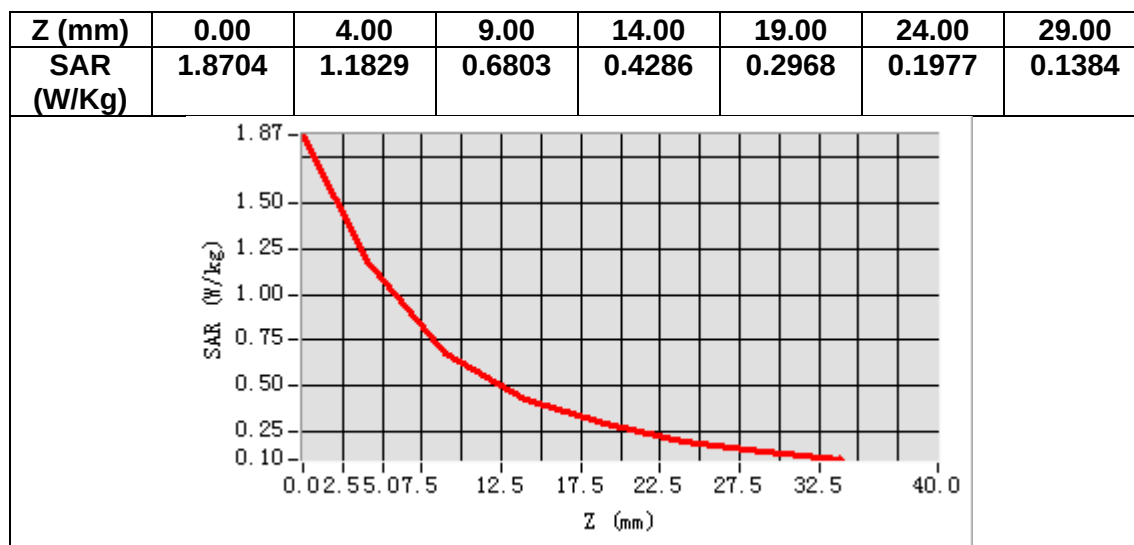

3D screen shot

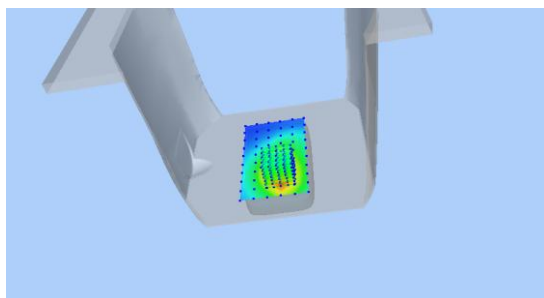

Hot spot position

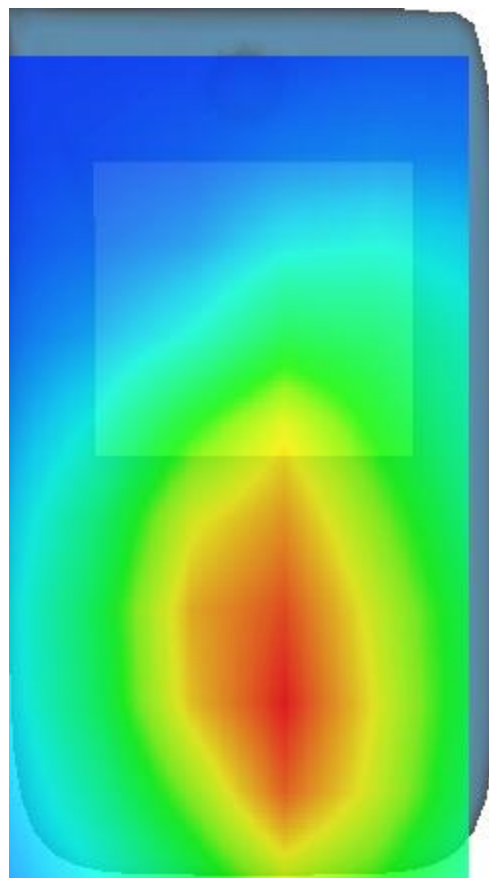

## MEASUREMENT 12

Date of measurement: 11/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=15mm dy=15mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>5x5x7, dx=8mm dy=8mm dz=5mm</u> |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 17</u>                 |
| <b>Channels</b>        | <u>High</u>                        |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.49</u>                        |


### B. SAR Measurement Results

|                                               |            |
|-----------------------------------------------|------------|
| <b>Frequency (MHz)</b>                        | 711.000000 |
| <b>Relative permittivity (real part)</b>      | 41.034977  |
| <b>Relative permittivity (imaginary part)</b> | 21.854786  |
| <b>Conductivity (S/m)</b>                     | 0.863264   |
| <b>Variation (%)</b>                          | -0.300000  |

#### SURFACE SAR

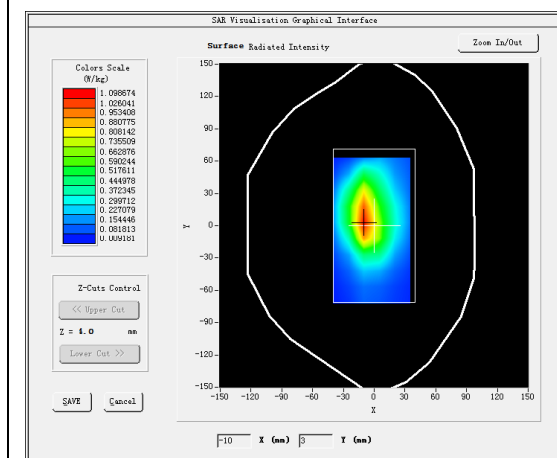


#### VOLUME SAR

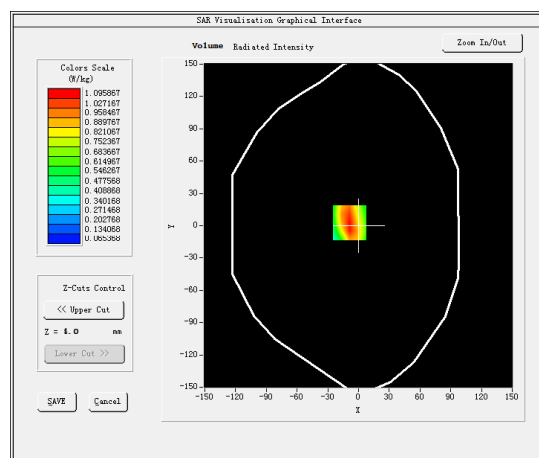


Maximum location: X=-9.00, Y=3.00

SAR Peak: 1.72 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.601891 |
| <b>SAR 1g (W/Kg)</b>  | 1.047881 |

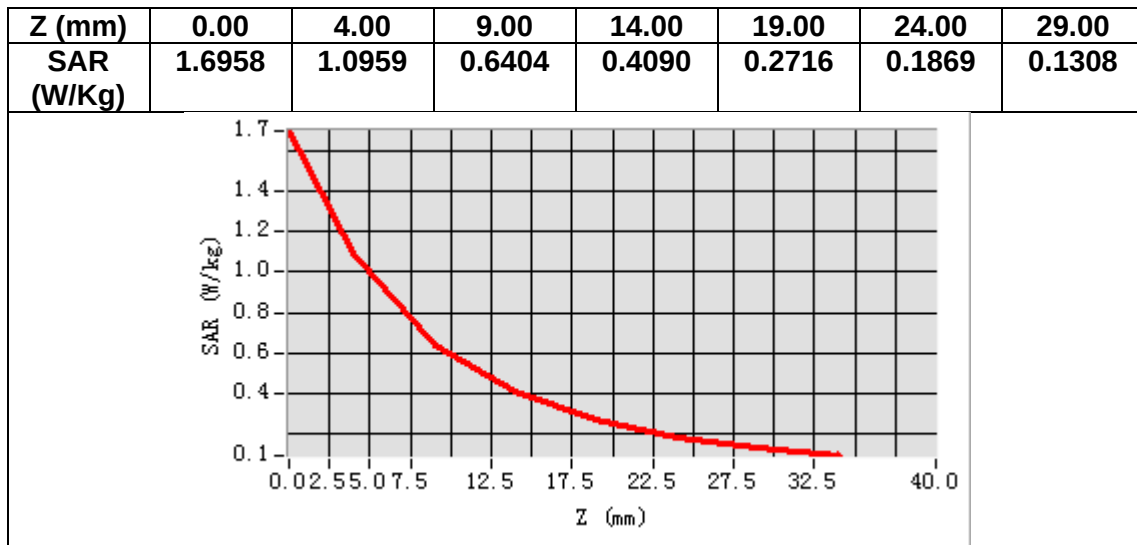

3D screen shot

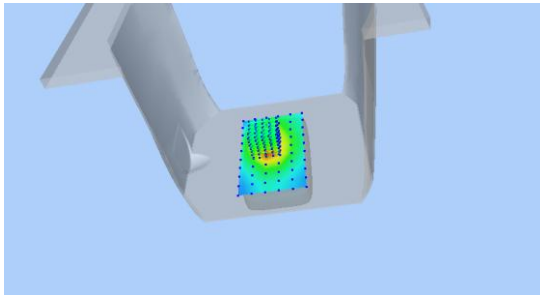

Hot spot position

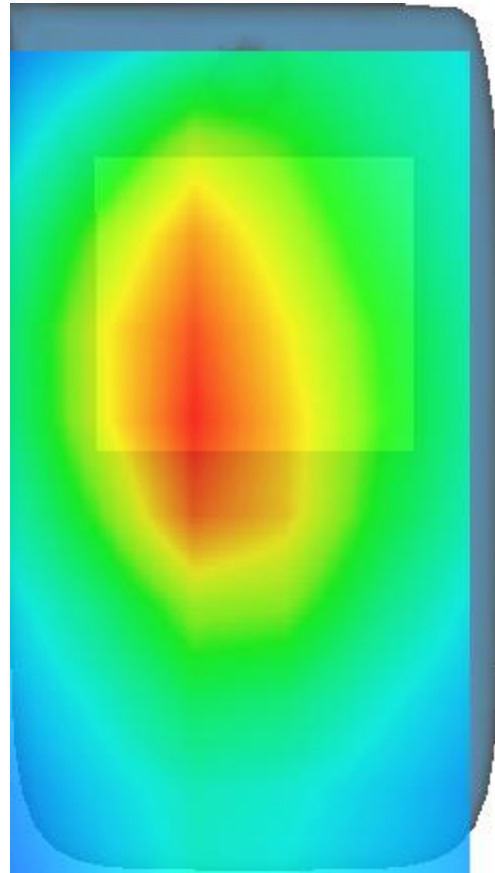

## MEASUREMENT 13

Date of measurement: 17/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 38</u>                 |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.87</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2595.000000 |
| <b>Relative permittivity (real part)</b>      | 38.071140   |
| <b>Relative permittivity (imaginary part)</b> | 13.861607   |
| <b>Conductivity (S/m)</b>                     | 1.998382    |
| <b>Variation (%)</b>                          | -0.750000   |

#### SURFACE SAR

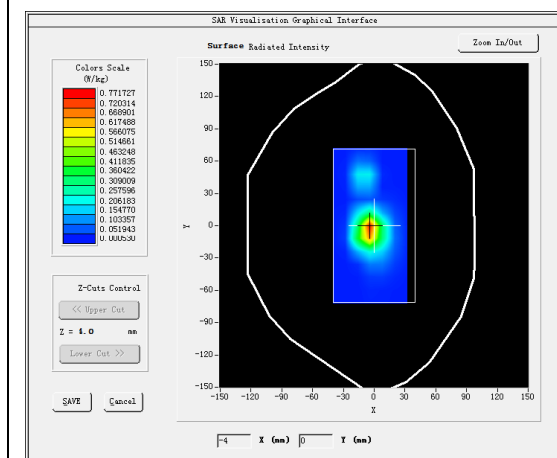


#### VOLUME SAR

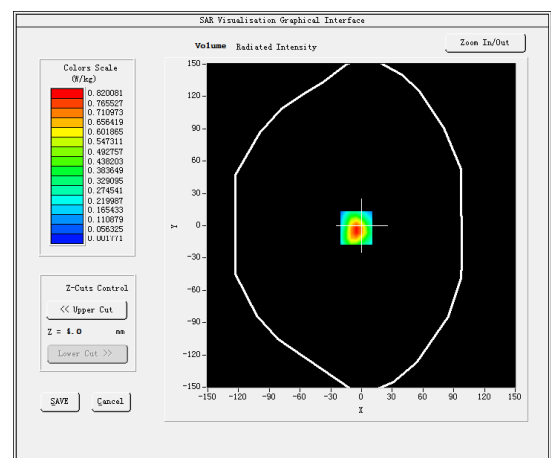


Maximum location: X=-5.00, Y=-2.00

SAR Peak: 1.52 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.321172 |
| <b>SAR 1g (W/Kg)</b>  | 0.772064 |

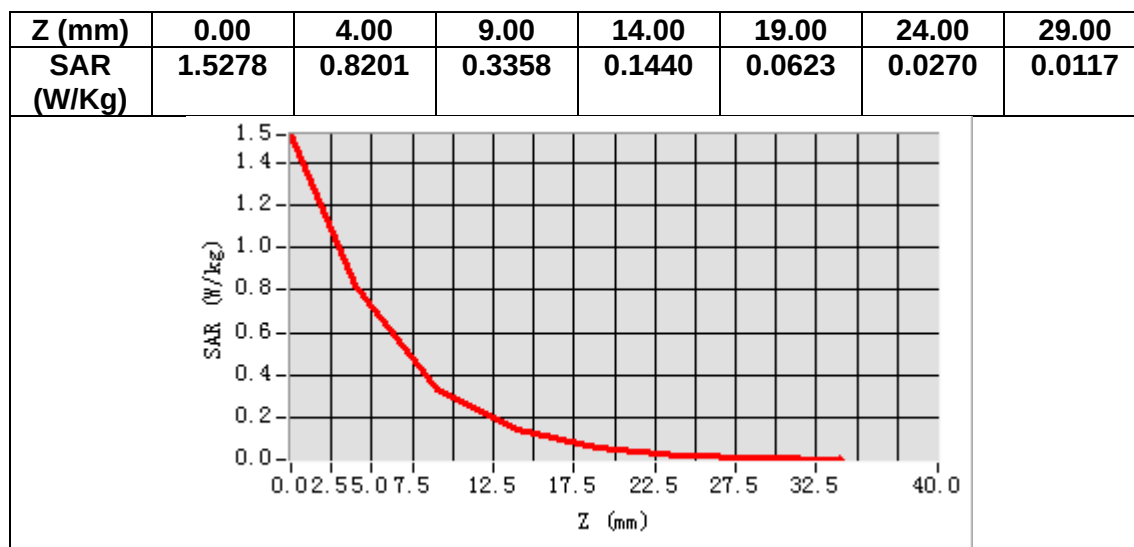

3D screen shot

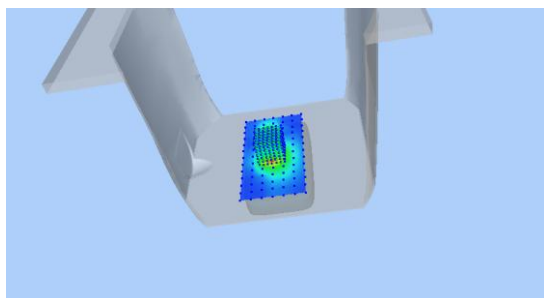

Hot spot position

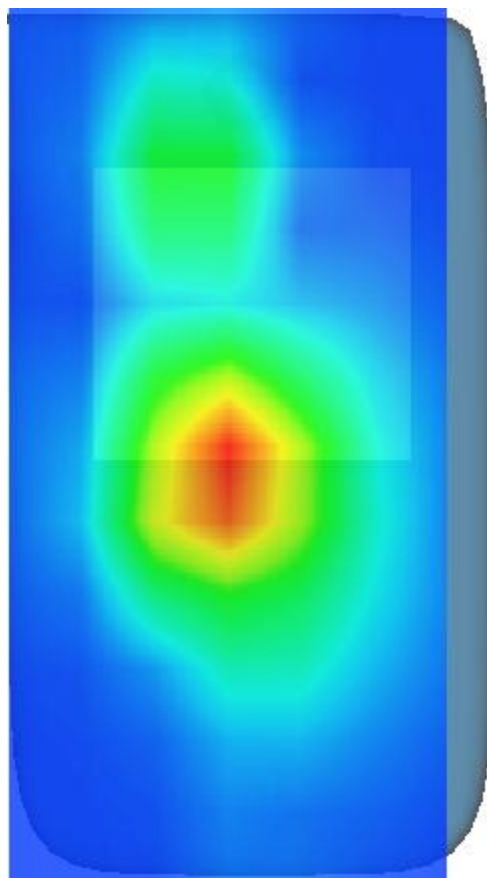

## MEASUREMENT 14

Date of measurement: 17/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <b>Area Scan</b>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <b>ZoomScan</b>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <b>Phantom</b>         | <u>Validation plane</u>            |
| <b>Device Position</b> | <u>Body</u>                        |
| <b>Band</b>            | <u>LTE band 41</u>                 |
| <b>Channels</b>        | <u>Middle</u>                      |
| <b>Signal</b>          | <u>LTE (Crest factor: 1.0)</u>     |
| <b>ConvF</b>           | <u>1.87</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2595.000000 |
| <b>Relative permittivity (real part)</b>      | 38.071142   |
| <b>Relative permittivity (imaginary part)</b> | 13.861607   |
| <b>Conductivity (S/m)</b>                     | 1.998382    |
| <b>Variation (%)</b>                          | -0.670000   |

#### SURFACE SAR

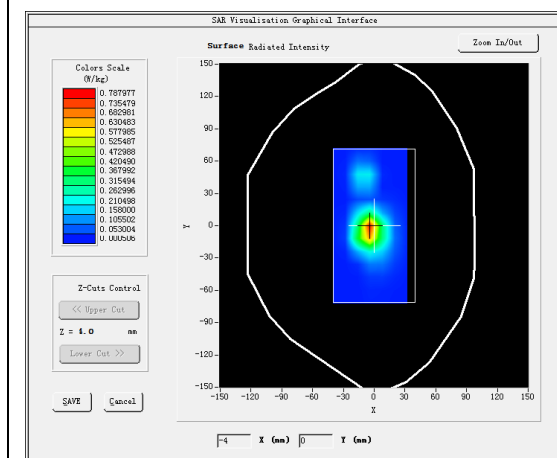


#### VOLUME SAR

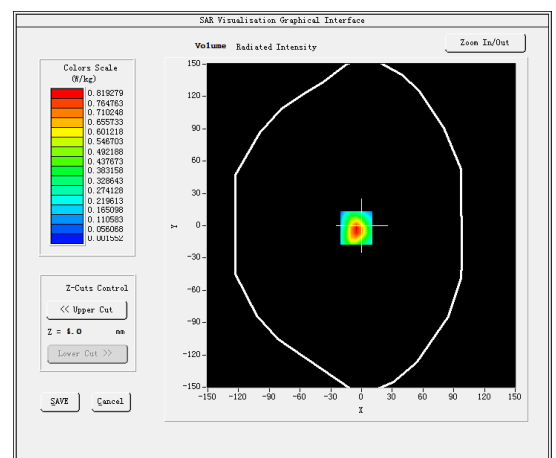


Maximum location: X=-5.00, Y=-2.00

SAR Peak: 1.52 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.318552 |
| <b>SAR 1g (W/Kg)</b>  | 0.765708 |

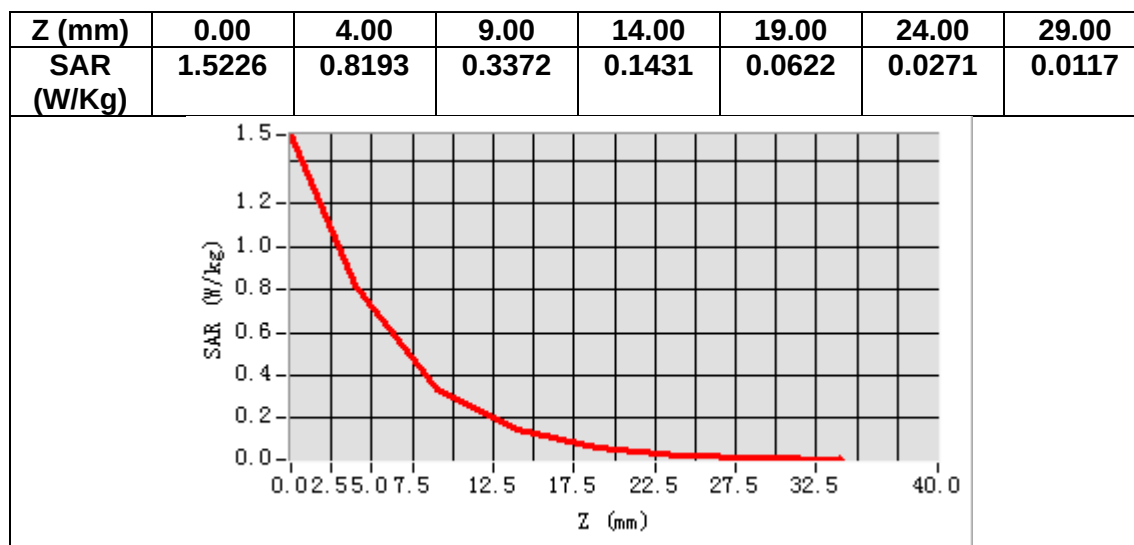

3D screen shot

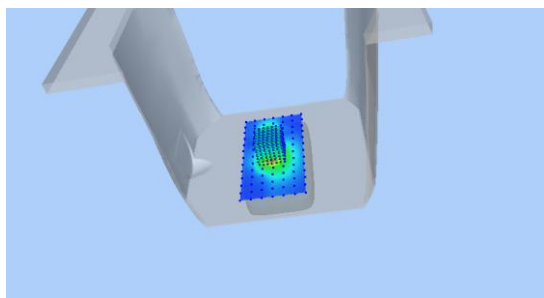

Hot spot position

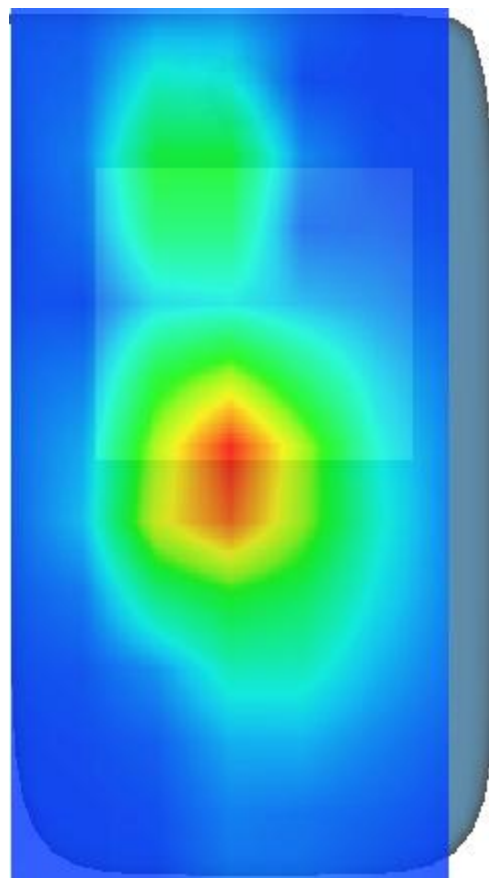

## MEASUREMENT 15

Date of measurement: 16/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Body</u>                        |
| <u>Band</u>            | <u>LTE band 40A</u>                |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>LTE (Crest factor: 1.0)</u>     |
| <u>ConvF</u>           | <u>1.87</u>                        |


### B. SAR Measurement Results

|                                               |             |
|-----------------------------------------------|-------------|
| <b>Frequency (MHz)</b>                        | 2310.000000 |
| <b>Relative permittivity (real part)</b>      | 37.845971   |
| <b>Relative permittivity (imaginary part)</b> | 13.093176   |
| <b>Conductivity (S/m)</b>                     | 1.680291    |
| <b>Variation (%)</b>                          | -0.210000   |

#### SURFACE SAR

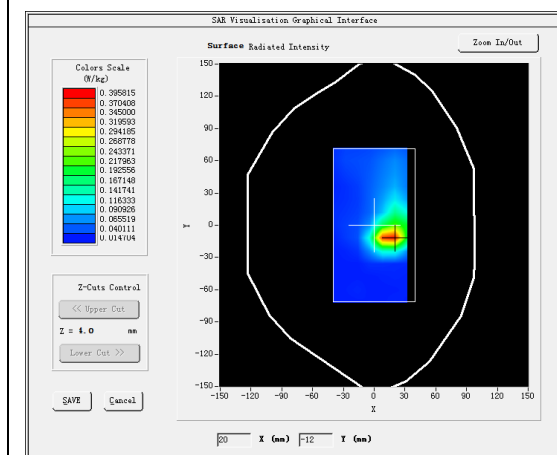


#### VOLUME SAR

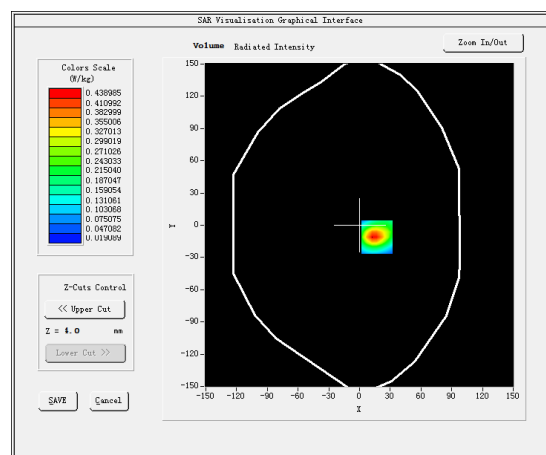


Maximum location: X=17.00, Y=-11.00

SAR Peak: 0.73 W/kg


|                       |          |
|-----------------------|----------|
| <b>SAR 10g (W/Kg)</b> | 0.188361 |
| <b>SAR 1g (W/Kg)</b>  | 0.404913 |

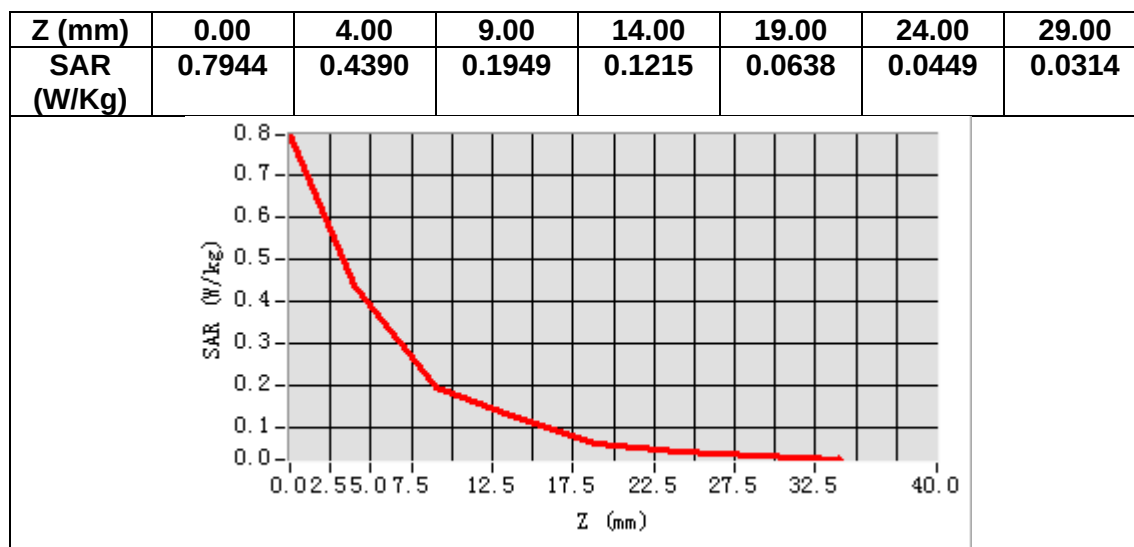

3D screen shot

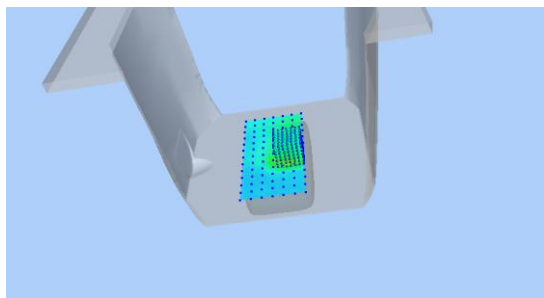

Hot spot position

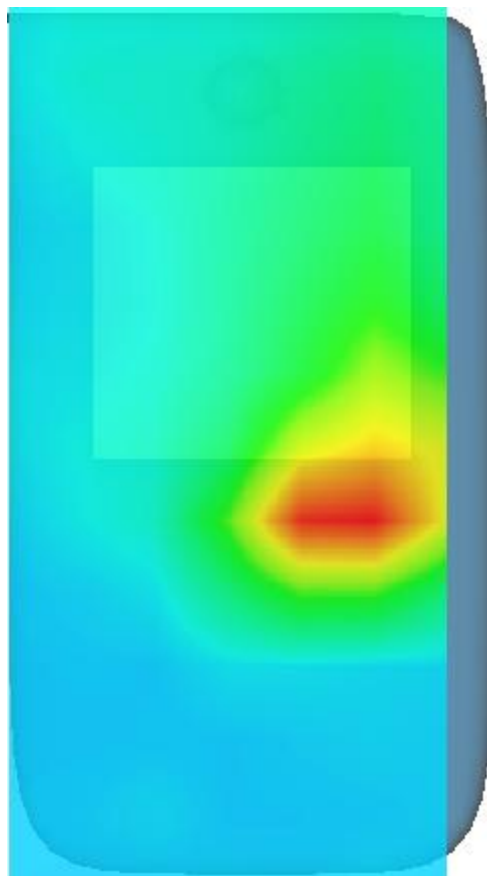

## MEASUREMENT 16

Date of measurement: 16/5/2023


### A. Experimental conditions.

|                        |                                    |
|------------------------|------------------------------------|
| <u>Area Scan</u>       | <u>dx=12mm dy=12mm, h= 5.00 mm</u> |
| <u>ZoomScan</u>        | <u>7x7x7,dx=5mm dy=5mm dz=5mm</u>  |
| <u>Phantom</u>         | <u>Validation plane</u>            |
| <u>Device Position</u> | <u>Body</u>                        |
| <u>Band</u>            | <u>LTE band 40B</u>                |
| <u>Channels</u>        | <u>Middle</u>                      |
| <u>Signal</u>          | <u>LTE (Crest factor: 1.0)</u>     |
| <u>ConvF</u>           | <u>1.87</u>                        |


### B. SAR Measurement Results

|                                        |             |
|----------------------------------------|-------------|
| Frequency (MHz)                        | 2355.000000 |
| Relative permittivity (real part)      | 37.728771   |
| Relative permittivity (imaginary part) | 13.232376   |
| Conductivity (S/m)                     | 1.731236    |
| Variation (%)                          | 0.010000    |

#### SURFACE SAR

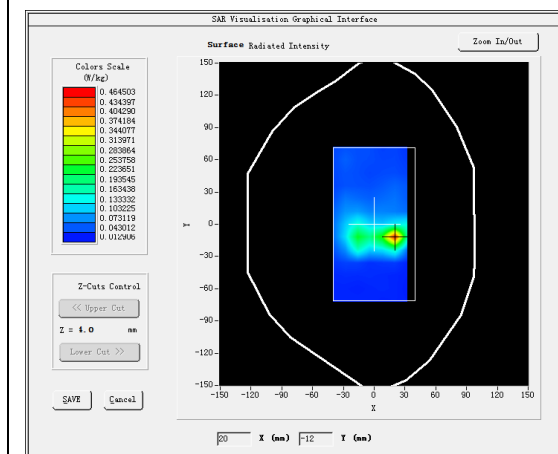


#### VOLUME SAR

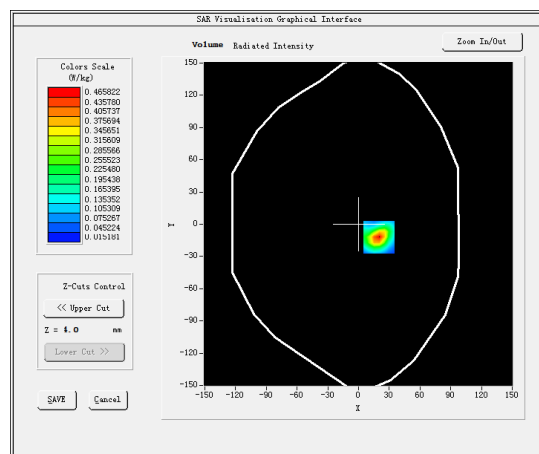


Maximum location: X=20.00, Y=-12.00

SAR Peak: 0.78 W/kg


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.172691 |
| SAR 1g (W/Kg)  | 0.405961 |

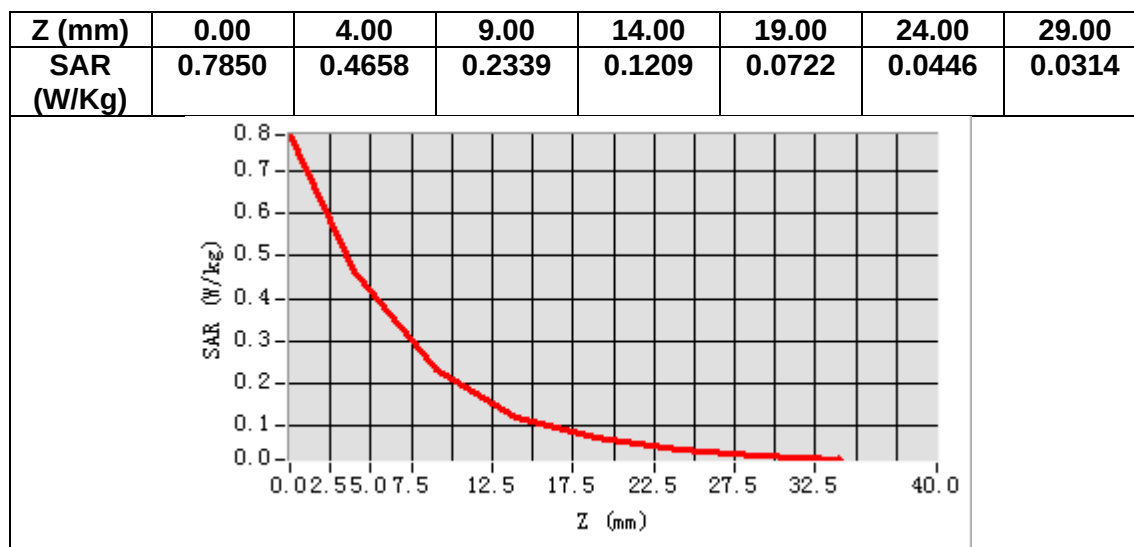

3D screen shot

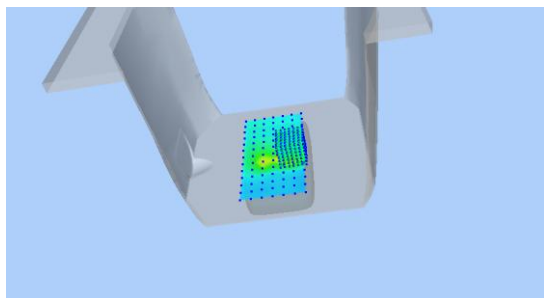

Hot spot position

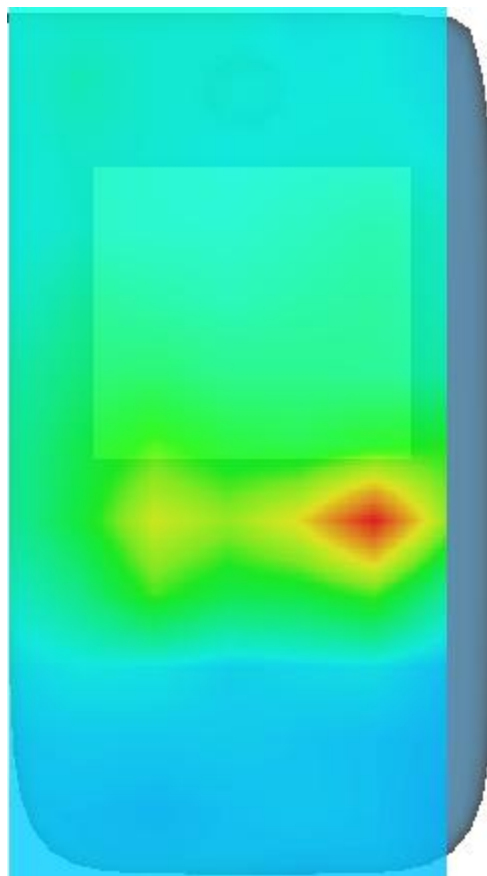

## 14. Appendix D. Calibration Certificate

| Table of contents                        |
|------------------------------------------|
| E Field Probe - SN 08/16 EPGO287         |
| 750 MHz Dipole - SN 03/15 DIP 0G750-355  |
| 835 MHz Dipole - SN 03/15 DIP 0G835-347  |
| 1800 MHz Dipole - SN 03/15 DIP 1G800-349 |
| 1900 MHz Dipole - SN 03/15 DIP 1G900-350 |
| 2300 MHz Dipole - SN 03/16 DIP 2G300-358 |
| 2450 MHz Dipole - SN 03/15 DIP 2G450-352 |
| 2600 MHz Dipole - SN 03/15 DIP 2G600-356 |
| 5000-6000 MHz Dipole - SN 13/14 WGA 33   |
| Extended Calibration Certificate         |



## COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

### SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA  
MVG COMOSAR DOSIMETRIC E-FIELD PROBE  
SERIAL NO.: SN 08/16 EPG0287

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon  
29280 PLOUZANE - FRANCE

Calibration date: 01/10/2023



Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)


#### Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

|               | Name         | Function            | Date      | Signature                                                                           |
|---------------|--------------|---------------------|-----------|-------------------------------------------------------------------------------------|
| Prepared by : | Jérôme Luc   | Technical Manager   | 1/10/2023 |  |
| Checked by :  | Jérôme Luc   | Technical Manager   | 1/10/2023 |  |
| Approved by : | Yann Toutain | Laboratory Director | 1/10/2023 |  |

Modèle d'emploi

2023.01.10

11:27:33

+01'00'

PHILIPS

|                | Customer Name                                       |
|----------------|-----------------------------------------------------|
| Distribution : | SHENZHEN NTEK<br>TESTING<br>TECHNOLOGY<br>CO., LTD. |

| Issue | Name       | Date      | Modifications   |
|-------|------------|-----------|-----------------|
| A     | Jérôme Luc | 1/10/2023 | Initial release |
|       |            |           |                 |
|       |            |           |                 |
|       |            |           |                 |



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

### TABLE OF CONTENTS

|     |                                       |    |
|-----|---------------------------------------|----|
| 1   | Device Under Test .....               | 4  |
| 2   | Product Description .....             | 4  |
| 2.1 | General Information .....             | 4  |
| 3   | Measurement Method .....              | 4  |
| 3.1 | Linearity .....                       | 4  |
| 3.2 | Sensitivity .....                     | 5  |
| 3.3 | Lower Detection Limit .....           | 5  |
| 3.4 | Isotropy .....                        | 5  |
| 3.1 | Boundary Effect .....                 | 5  |
| 4   | Measurement Uncertainty .....         | 6  |
| 5   | Calibration Measurement Results ..... | 6  |
| 5.1 | Sensitivity in air .....              | 6  |
| 5.2 | Linearity .....                       | 7  |
| 5.3 | Sensitivity in liquid .....           | 8  |
| 5.4 | Isotropy .....                        | 9  |
| 6   | List of Equipment .....               | 10 |



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

## 1 DEVICE UNDER TEST

| Device Under Test                        |                                                                         |
|------------------------------------------|-------------------------------------------------------------------------|
| Device Type                              | COMOSAR DOSIMETRIC E FIELD PROBE                                        |
| Manufacturer                             | MVG                                                                     |
| Model                                    | SSE2                                                                    |
| Serial Number                            | SN 08/16 EPG0287                                                        |
| Product Condition (new / used)           | Used                                                                    |
| Frequency Range of Probe                 | 0.15 GHz-6GHz                                                           |
| Resistance of Three Dipoles at Connector | Dipole 1: R1=0.211 MΩ<br>Dipole 2: R2=0.199 MΩ<br>Dipole 3: R3=0.199 MΩ |

## 2 PRODUCT DESCRIPTION

## 2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

|                                            |        |
|--------------------------------------------|--------|
| Probe Length                               | 330 mm |
| Length of Individual Dipoles               | 2 mm   |
| Maximum external diameter                  | 8 mm   |
| Probe Tip External Diameter                | 2.5 mm |
| Distance between dipoles / probe extremity | 1 mm   |

## 3 MEASUREMENT METHOD

The IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

## 3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

### 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

### 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

### 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

### 3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and  $d_{be} + d_{step}$  along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

|                     |                                                                                                                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $SAR_{uncertainty}$ | is the uncertainty in percent of the probe boundary effect                                                                                                                                           |
| $d_{be}$            | is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre                                                                                                |
| $\Delta_{step}$     | is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible |
| $\delta$            | is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;                                               |
| $\Delta SAR_{be}$   | in percent of SAR is the deviation between the measured SAR value, at the distance $d_{be}$ from the boundary, and the analytical SAR value.                                                         |



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).

#### 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

| Uncertainty analysis of the probe calibration in waveguide |                       |                          |         |    |                          |
|------------------------------------------------------------|-----------------------|--------------------------|---------|----|--------------------------|
| ERROR SOURCES                                              | Uncertainty value (%) | Probability Distribution | Divisor | ci | Standard Uncertainty (%) |
| Expanded uncertainty<br>95 % confidence level k = 2        |                       |                          |         |    | 14 %                     |

#### 5 CALIBRATION MEASUREMENT RESULTS

| Calibration Parameters |             |
|------------------------|-------------|
| Liquid Temperature     | 20 +/- 1 °C |
| Lab Temperature        | 20 +/- 1 °C |
| Lab Humidity           | 30-70 %     |

##### 5.1 SENSITIVITY IN AIR

|                                                           |                                                           |                                                           |
|-----------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------|
| Normx dipole<br>1 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normy dipole<br>2 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | Normz dipole<br>3 ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) |
| 0.72                                                      | 0.66                                                      | 0.77                                                      |

|                      |                      |                      |
|----------------------|----------------------|----------------------|
| DCP dipole 1<br>(mV) | DCP dipole 2<br>(mV) | DCP dipole 3<br>(mV) |
| 107                  | 110                  | 110                  |

Calibration curves  $e_i=f(V)$  ( $i=1,2,3$ ) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$



## COMOSAR E-FIELD PROBE CALIBRATION REPORT


Ref: ACR.60.1.21.MVGB.A

### Calibration curves

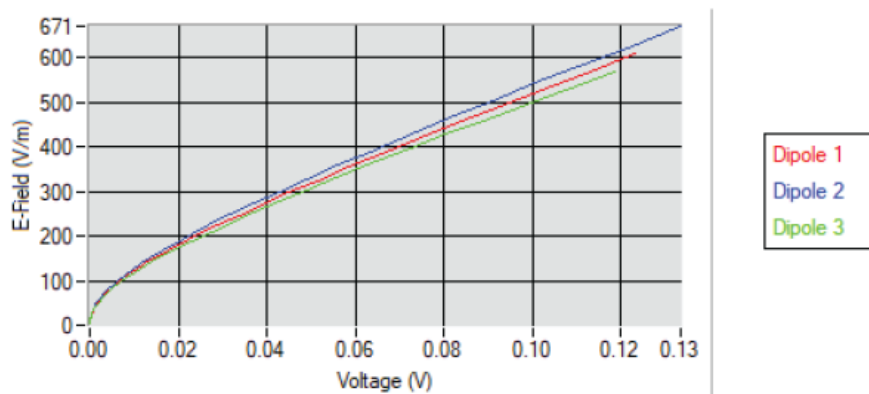

### 5.2 LINEARITY

#### Linearity

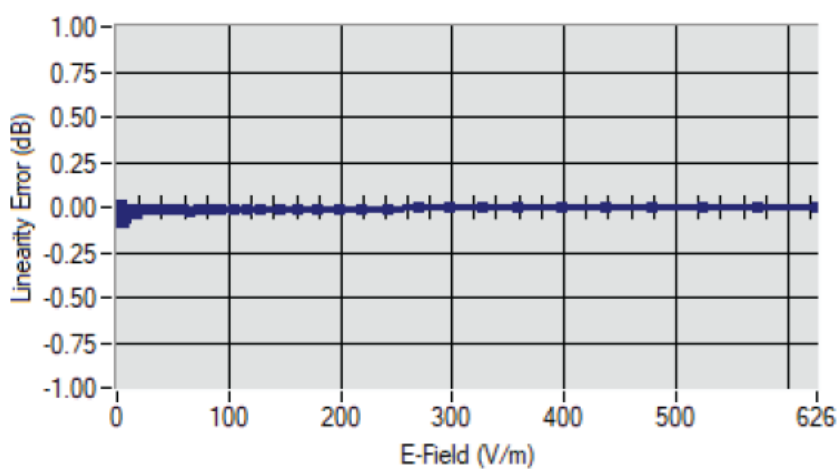

**Linearity:  $\pm 1.90\%$  ( $\pm 0.08\text{dB}$ )**



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.3 SENSITIVITY IN LIQUID

| <u>Liquid</u> | <u>Frequency</u><br><u>(MHz +/-</u><br><u>100MHz)</u> | <u>ConvF</u> |
|---------------|-------------------------------------------------------|--------------|
| HL750         | 750                                                   | 1.49         |
| HL850         | 835                                                   | 1.50         |
| HL900         | 900                                                   | 1.61         |
| HL1800        | 1800                                                  | 1.73         |
| HL1900        | 1900                                                  | 1.91         |
| HL2000        | 2000                                                  | 1.97         |
| HL2300        | 2300                                                  | 1.92         |
| HL2450        | 2450                                                  | 1.98         |
| HL2600        | 2600                                                  | 1.87         |
| HL3300        | 3300                                                  | 1.79         |
| HL3500        | 3500                                                  | 1.85         |
| HL3700        | 3700                                                  | 1.79         |
| HL3900        | 3900                                                  | 2.07         |
| HL4200        | 4200                                                  | 2.21         |
| HL4600        | 4600                                                  | 2.25         |
| HL4900        | 4900                                                  | 2.05         |
| HL5200        | 5200                                                  | 1.80         |
| HL5400        | 5400                                                  | 2.05         |
| HL5600        | 5600                                                  | 2.16         |
| HL5800        | 5800                                                  | 2.07         |

LOWER DETECTION LIMIT: 8mW/kg




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

### 5.4 ISOTROPY

#### HL1800 MHz

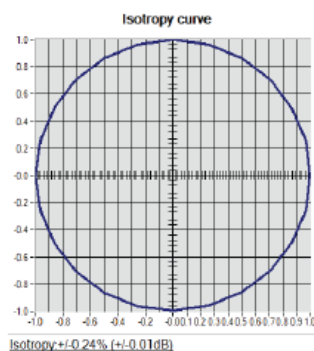



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

## 6 LIST OF EQUIPMENT

| Equipment Summary Sheet            |                         |                    |                                               |                                               |
|------------------------------------|-------------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description              | Manufacturer / Model    | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| Flat Phantom                       | MVG                     | SN-20/09-SAM71     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench                 | Version 3               | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                   | Rohde & Schwarz ZVM     | 100203             | 05/2022                                       | 05/2025                                       |
| Network Analyzer – Calibration kit | Rohde & Schwarz ZV-Z235 | 101223             | 05/2022                                       | 05/2025                                       |
| Multimeter                         | Keithley 2000           | 1160271            | 02/2022                                       | 02/2025                                       |
| Signal Generator                   | Rohde & Schwarz SMB     | 106589             | 04/2022                                       | 04/2025                                       |
| Amplifier                          | Aethercomm              | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                        | NI-USB 5680             | 170100013          | 05/2022                                       | 05/2025                                       |
| Directional Coupler                | Narda 4216-20           | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Waveguide                          | Mega Industries         | 069Y7-158-13-712   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Transition               | Mega Industries         | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Waveguide Termination              | Mega Industries         | 069Y7-158-13-701   | Validated. No cal required.                   | Validated. No cal required.                   |
| Temperature / Humidity Sensor      | Testo 184 H1            | 44220687           | 05/2020                                       | 05/2023                                       |



## SAR Reference Dipole Calibration Report

Ref : ACR.60.2.21.MVGB.A

### SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA  
MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 750 MHZ

SERIAL NO.: SN 03/15 DIP0G750-355

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon  
29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)


#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed at MVG, using the COMOSAR test bench. The test results covered by accreditation are traceable to the International System of Units (SI).



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.60.2.21.MVGB.A

|                      | <i>Name</i>  | <i>Function</i>     | <i>Date</i> | <i>Signature</i>                                                                    |
|----------------------|--------------|---------------------|-------------|-------------------------------------------------------------------------------------|
| <i>Prepared by :</i> | Jérôme Luc   | Technical Manager   | 3/1/2021    |  |
| <i>Checked by :</i>  | Jérôme Luc   | Technical Manager   | 3/1/2021    |  |
| <i>Approved by :</i> | Yann Toutain | Laboratory Director | 3/1/2021    |  |

2021.03.0  
 1 13:08:18  
 +01'00'

|                       | <i>Customer Name</i>                                |
|-----------------------|-----------------------------------------------------|
| <i>Distribution :</i> | SHENZHEN NTEK<br>TESTING<br>TECHNOLOGY<br>CO., LTD. |

| <i>Issue</i> | <i>Name</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|-------------|----------------------|
| A            | Jérôme Luc  | 3/1/2021    | Initial release      |
|              |             |             |                      |
|              |             |             |                      |
|              |             |             |                      |



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.60.2.21.MVGB.A

## TABLE OF CONTENTS

|     |                                      |    |
|-----|--------------------------------------|----|
| 1   | Introduction.....                    | 4  |
| 2   | Device Under Test .....              | 4  |
| 3   | Product Description .....            | 4  |
| 3.1 | General Information .....            | 4  |
| 4   | Measurement Method .....             | 5  |
| 4.1 | Return Loss Requirements .....       | 5  |
| 4.2 | Mechanical Requirements .....        | 5  |
| 5   | Measurement Uncertainty.....         | 5  |
| 5.1 | Return Loss .....                    | 5  |
| 5.2 | Dimension Measurement .....          | 5  |
| 5.3 | Validation Measurement .....         | 5  |
| 6   | Calibration Measurement Results..... | 6  |
| 6.1 | Return Loss and Impedance .....      | 6  |
| 6.2 | Mechanical Dimensions .....          | 6  |
| 7   | Validation measurement .....         | 7  |
| 7.1 | Measurement Condition .....          | 7  |
| 7.2 | Head Liquid Measurement .....        | 7  |
| 7.3 | Measurement Result .....             | 8  |
| 8   | List of Equipment .....              | 10 |



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                  |
|--------------------------------|----------------------------------|
| Device Type                    | COMOSAR 750 MHz REFERENCE DIPOLE |
| Manufacturer                   | MVG                              |
| Model                          | SID750                           |
| Serial Number                  | SN 03/15 DIP0G750-355            |
| Product Condition (new / used) | Used                             |

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



**Figure 1 – MVG COMOSAR Validation Dipole**



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

##### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. A direct method is used with a network analyser and its calibration kit, both with a valid ISO17025 calibration.

##### 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimension's frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness. A direct method is used with a ISO17025 calibrated caliper.

#### 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

##### 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

| Frequency band | Expanded Uncertainty on Return Loss |
|----------------|-------------------------------------|
| 400-6000MHz    | 0.08 LIN                            |

##### 5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

| Length (mm) | Expanded Uncertainty on Length |
|-------------|--------------------------------|
| 0 - 300     | 0.20 mm                        |
| 300 - 450   | 0.44 mm                        |

##### 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

| Scan Volume | Expanded Uncertainty |
|-------------|----------------------|
|-------------|----------------------|

Page: 5/10

Template\_ACR.DDD.N.YY.MVGB.ISSUE\_SAR Reference Dipole vG

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

|      |            |
|------|------------|
| 1 g  | 19 % (SAR) |
| 10 g | 19 % (SAR) |

## 6 CALIBRATION MEASUREMENT RESULTS

### 6.1 RETURN LOSS AND IMPEDANCE

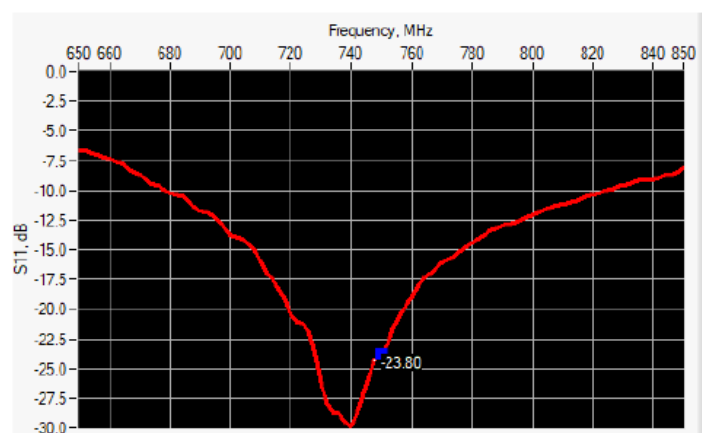

| Frequency (MHz) | Return Loss (dB) | Requirement (dB) | Impedance                      |
|-----------------|------------------|------------------|--------------------------------|
| 750             | -23.80           | -20              | 56.4 $\Omega$ - 0.1 j $\Omega$ |

### 6.2 MECHANICAL DIMENSIONS

| Frequency MHz | L mm             |          | h mm             |          | d mm            |          |
|---------------|------------------|----------|------------------|----------|-----------------|----------|
|               | required         | measured | required         | measured | required        | measured |
| 300           | 420.0 $\pm$ 1 %. |          | 250.0 $\pm$ 1 %. |          | 6.35 $\pm$ 1 %. |          |
| 450           | 290.0 $\pm$ 1 %. |          | 166.7 $\pm$ 1 %. |          | 6.35 $\pm$ 1 %. |          |
| 750           | 176.0 $\pm$ 1 %. | -        | 100.0 $\pm$ 1 %. | -        | 6.35 $\pm$ 1 %. | -        |
| 835           | 161.0 $\pm$ 1 %. |          | 89.8 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 900           | 149.0 $\pm$ 1 %. |          | 83.3 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1450          | 89.1 $\pm$ 1 %.  |          | 51.7 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1500          | 80.5 $\pm$ 1 %.  |          | 50.0 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1640          | 79.0 $\pm$ 1 %.  |          | 45.7 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1750          | 75.2 $\pm$ 1 %.  |          | 42.9 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1800          | 72.0 $\pm$ 1 %.  |          | 41.7 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1900          | 68.0 $\pm$ 1 %.  |          | 39.5 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 1950          | 66.3 $\pm$ 1 %.  |          | 38.5 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 2000          | 64.5 $\pm$ 1 %.  |          | 37.5 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 2100          | 61.0 $\pm$ 1 %.  |          | 35.7 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 2300          | 55.5 $\pm$ 1 %.  |          | 32.6 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |
| 2450          | 51.5 $\pm$ 1 %.  |          | 30.4 $\pm$ 1 %.  |          | 3.6 $\pm$ 1 %.  |          |

Page: 6/10

Template\_ACR.DDD.N.YY.MVGB.ISSUE\_SAR Reference Dipole vG

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

|      |            |  |            |  |           |  |
|------|------------|--|------------|--|-----------|--|
| 2600 | 48.5 ±1 %. |  | 28.8 ±1 %. |  | 3.6 ±1 %. |  |
| 3000 | 41.5 ±1 %. |  | 25.0 ±1 %. |  | 3.6 ±1 %. |  |
| 3500 | 37.0±1 %.  |  | 26.4 ±1 %. |  | 3.6 ±1 %. |  |
| 3700 | 34.7±1 %.  |  | 26.4 ±1 %. |  | 3.6 ±1 %. |  |

## 7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

## 7.1 MEASUREMENT CONDITION

|                                           |                                                         |
|-------------------------------------------|---------------------------------------------------------|
| Software                                  | OPENSAR V5                                              |
| Phantom                                   | SN 13/09 SAM68                                          |
| Probe                                     | SN 41/18 EPG0333                                        |
| Liquid                                    | Head Liquid Values: $\epsilon_r$ : 41.8 $\sigma$ : 0.82 |
| Distance between dipole center and liquid | 15.0 mm                                                 |
| Area scan resolution                      | dx=8mm/dy=8mm                                           |
| Zoon Scan Resolution                      | dx=8mm/dy=8mm/dz=5mm                                    |
| Frequency                                 | 750750 MHz                                              |
| Input power                               | 20 dBm                                                  |
| Liquid Temperature                        | 20 +/- 1 °C                                             |
| Lab Temperature                           | 20 +/- 1 °C                                             |
| Lab Humidity                              | 30-70 %                                                 |

## 7.2 HEAD LIQUID MEASUREMENT

| Frequency<br>MHz | Relative permittivity ( $\epsilon_r$ ) |          | Conductivity ( $\sigma$ ) S/m |          |
|------------------|----------------------------------------|----------|-------------------------------|----------|
|                  | required                               | measured | required                      | measured |
| 300              | 45.3 ±10 %                             |          | 0.87 ±10 %                    |          |
| 450              | 43.5 ±10 %                             |          | 0.87 ±10 %                    |          |
| 750              | 41.9 ±10 %                             | 41.8     | 0.89 ±10 %                    | 0.82     |
| 835              | 41.5 ±10 %                             |          | 0.90 ±10 %                    |          |
| 900              | 41.5 ±10 %                             |          | 0.97 ±10 %                    |          |
| 1450             | 40.5 ±10 %                             |          | 1.20 ±10 %                    |          |
| 1500             | 40.4 ±10 %                             |          | 1.23 ±10 %                    |          |
| 1640             | 40.2 ±10 %                             |          | 1.31 ±10 %                    |          |
| 1750             | 40.1 ±10 %                             |          | 1.37 ±10 %                    |          |
| 1800             | 40.0 ±10 %                             |          | 1.40 ±10 %                    |          |
| 1900             | 40.0 ±10 %                             |          | 1.40 ±10 %                    |          |
| 1950             | 40.0 ±10 %                             |          | 1.40 ±10 %                    |          |
| 2000             | 40.0 ±10 %                             |          | 1.40 ±10 %                    |          |

Page: 7/10

Template\_ACR.DDD.N.YY.MVGB.ISSUE\_SAR Reference Dipole vG

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref. ACR.60.2.21.MVGB.A

|      |            |  |            |  |
|------|------------|--|------------|--|
| 2100 | 39.8 ±10 % |  | 1.49 ±10 % |  |
| 2300 | 39.5 ±10 % |  | 1.67 ±10 % |  |
| 2450 | 39.2 ±10 % |  | 1.80 ±10 % |  |
| 2600 | 39.0 ±10 % |  | 1.96 ±10 % |  |
| 3000 | 38.5 ±10 % |  | 2.40 ±10 % |  |
| 3500 | 37.9 ±10 % |  | 2.91 ±10 % |  |

## 7.3 MEASUREMENT RESULT


The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

| Frequency<br>MHz | 1 g SAR (W/kg/W) |             | 10 g SAR (W/kg/W) |             |
|------------------|------------------|-------------|-------------------|-------------|
|                  | required         | measured    | required          | measured    |
| 300              | 2.85             |             | 1.94              |             |
| 450              | 4.58             |             | 3.06              |             |
| 750              | 8.49             | 8.53 (0.85) | 5.55              | 5.56 (0.56) |
| 835              | 9.56             |             | 6.22              |             |
| 900              | 10.9             |             | 6.99              |             |
| 1450             | 29               |             | 16                |             |
| 1500             | 30.5             |             | 16.8              |             |
| 1640             | 34.2             |             | 18.4              |             |
| 1750             | 36.4             |             | 19.3              |             |
| 1800             | 38.4             |             | 20.1              |             |
| 1900             | 39.7             |             | 20.5              |             |
| 1950             | 40.5             |             | 20.9              |             |
| 2000             | 41.1             |             | 21.1              |             |
| 2100             | 43.6             |             | 21.9              |             |
| 2300             | 48.7             |             | 23.3              |             |
| 2450             | 52.4             |             | 24                |             |
| 2600             | 55.3             |             | 24.6              |             |
| 3000             | 63.8             |             | 25.7              |             |
| 3500             | 67.1             |             | 25                |             |



# SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

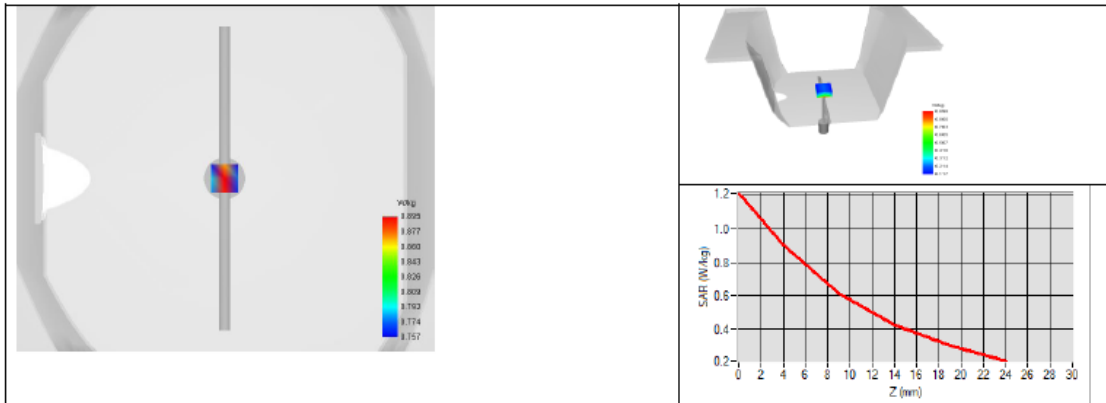



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.2.21.MVGB.A

## 8 LIST OF EQUIPMENT

| Equipment Summary Sheet            |                         |                    |                                               |                                               |
|------------------------------------|-------------------------|--------------------|-----------------------------------------------|-----------------------------------------------|
| Equipment Description              | Manufacturer / Model    | Identification No. | Current Calibration Date                      | Next Calibration Date                         |
| SAM Phantom                        | MVG                     | SN-13/09-SAM68     | Validated. No cal required.                   | Validated. No cal required.                   |
| COMOSAR Test Bench                 | Version 3               | NA                 | Validated. No cal required.                   | Validated. No cal required.                   |
| Network Analyzer                   | Rohde & Schwarz ZVM     | 100203             | 05/2019                                       | 05/2022                                       |
| Network Analyzer – Calibration kit | Rohde & Schwarz ZV-Z235 | 101223             | 05/2019                                       | 05/2022                                       |
| Calipers                           | Mitutoyo                | SN 0009732         | 10/2019                                       | 10/2022                                       |
| Reference Probe                    | MVG                     | EPGO333 SN 41/18   | 05/2020                                       | 05/2021                                       |
| Multimeter                         | Keithley 2000           | 1160271            | 02/2020                                       | 02/2023                                       |
| Signal Generator                   | Rohde & Schwarz SMB     | 106589             | 04/2019                                       | 04/2022                                       |
| Amplifier                          | Aethercomm              | SN 046             | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Power Meter                        | NI-USB 5680             | 170100013          | 05/2019                                       | 05/2022                                       |
| Directional Coupler                | Narda 4216-20           | 01386              | Characterized prior to test. No cal required. | Characterized prior to test. No cal required. |
| Temperature / Humidity Sensor      | Testo 184 H1            | 44220687           | 05/2020                                       | 05/2023                                       |



## SAR Reference Dipole Calibration Report

Ref : ACR.60.3.21.MVGB.A

### SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI  
COMMUNITY, XIXIANG STREET,  
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA

#### MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 03/15 DIP0G835-347

#### Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon

29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814  
Scope available on [www.cofrac.fr](http://www.cofrac.fr)


#### Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed at MVG, using the COMOSAR test bench. The test results covered by accreditation are traceable to the International System of Units (SI).



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.3.21.MVGB.A

|                      | <i>Name</i>  | <i>Function</i>     | <i>Date</i> | <i>Signature</i>                                                                    |
|----------------------|--------------|---------------------|-------------|-------------------------------------------------------------------------------------|
| <i>Prepared by :</i> | Jérôme Luc   | Technical Manager   | 3/1/2021    |  |
| <i>Checked by :</i>  | Jérôme Luc   | Technical Manager   | 3/1/2021    |  |
| <i>Approved by :</i> | Yann Toutain | Laboratory Director | 3/1/2021    |  |

Made d'emploi: 2021.03.0  
 1 13:09:12  
 +01'00'  
 PHILIPS

|                       | <i>Customer Name</i>                                |
|-----------------------|-----------------------------------------------------|
| <i>Distribution :</i> | SHENZHEN NTEK<br>TESTING<br>TECHNOLOGY<br>CO., LTD. |

| <i>Issue</i> | <i>Name</i> | <i>Date</i> | <i>Modifications</i> |
|--------------|-------------|-------------|----------------------|
| A            | Jérôme Luc  | 3/1/2021    | Initial release      |
|              |             |             |                      |
|              |             |             |                      |
|              |             |             |                      |



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.3.21.MVGB.A

## TABLE OF CONTENTS

|     |                                       |    |
|-----|---------------------------------------|----|
| 1   | Introduction.....                     | 4  |
| 2   | Device Under Test .....               | 4  |
| 3   | Product Description .....             | 4  |
| 3.1 | General Information .....             | 4  |
| 4   | Measurement Method .....              | 5  |
| 4.1 | Return Loss Requirements .....        | 5  |
| 4.2 | Mechanical Requirements .....         | 5  |
| 5   | Measurement Uncertainty .....         | 5  |
| 5.1 | Return Loss .....                     | 5  |
| 5.2 | Dimension Measurement .....           | 5  |
| 5.3 | Validation Measurement .....          | 5  |
| 6   | Calibration Measurement Results ..... | 6  |
| 6.1 | Return Loss and Impedance .....       | 6  |
| 6.2 | Mechanical Dimensions .....           | 6  |
| 7   | Validation measurement .....          | 7  |
| 7.1 | Measurement Condition .....           | 7  |
| 7.2 | Head Liquid Measurement .....         | 7  |
| 7.3 | Measurement Result .....              | 8  |
| 8   | List of Equipment .....               | 10 |



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.60.3.21.MVGB.A

## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

| Device Under Test              |                                  |
|--------------------------------|----------------------------------|
| Device Type                    | COMOSAR 835 MHz REFERENCE DIPOLE |
| Manufacturer                   | MVG                              |
| Model                          | SID835                           |
| Serial Number                  | SN 03/15 DIP0G835-347            |
| Product Condition (new / used) | Used                             |

## 3 PRODUCT DESCRIPTION

### 3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



**Figure 1 – MVG COMOSAR Validation Dipole**