



Report No.: TW2106158E File reference No.: 2021-06-22

Applicant: Shenzhen Swetz Sound Technology Co., Limited

Product: TWS Earphone

Model No.: TW056B, MIUONO T1

Brand Name: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 22, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2106158E Page 2 of 66

Date: 2021-06-22



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Report No.: TW2106158E

Date: 2021-06-22



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	14
6.5	Test Result.	15
7.0	Band Edge	31
7.1	Test Method and Test Procedure.	31
7.2	Radiated Test Setup.	31
7.3	Configuration of the EUT.	31
7.4	EUT Operating Condition.	31
7.5	Band Edge Limit.	31
7.6	Band Edge Test Result.	32
8.0	Antenna Requirement	40
9.0	20dB bandwidth measurement.	41
10.0	FCC ID Label	53
11.0	Photo of Test Setup and EUT View	54

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-06-22



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Swetz Sound Technology Co., Limited

Address: No.18, Xiantian Road, Xinsheng Community, Longgang Street, Longgang District, Shenzhen,

China

Telephone: -Fax: --

1.3 Description of EUT

Product: TWS Earphone

Manufacturer: Shenzhen Swetz Sound Technology Co., Limited

Address: No.18, Xiantian Road, Xinsheng Community, Longgang Street, Longgang

District, Shenzhen, China

Brand Name: N/A

Model Number: TW056B
Additional Model Name MIUONO T1

Hardware Version: V1.1 Software Version: V1.0

Rating: DC5V input or Built-in DC3.7V, 50mAh Li-ion battery for Earphone; DC5V

input or Built-in DC3.7V, 300mAh Li-ion battery for charger base

Modulation Type: GFSK, Pi/4D-QPSK Operation Frequency: 2402-2480MHz

Channel Separate: 1MHz Channel Number: 79

Antenna Designation PCB antenna with gain 0.45dBi Max for left earbud and 0.60dBi for right

earbud (Get from the antenna specification provided by the applicant)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2106158E Page 5 of 66

Date: 2021-06-22



1.4 Submitted Sample: 2 pcs

1.5 Test Duration

2021-06-11 to 2021-06-23

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 66

Report No.: TW2106158E

Date: 2021-06-22



2.0 Test Equipment	2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22			
LISN	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22			
LISN	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22			
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22			
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24			
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22			
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22			
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08			
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22			
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22			
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03			
9*6*6 Anechoic			N/A	2020-07-06	2021-07-05			
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22			
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22			
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22			
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22			
Spectrum	RS	FSP	1164.4391.38	2021-01-16	2022-01-15			
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2020-06-23	2021-06-22			
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22			
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22			
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22			
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22			
LISN	SCHAFFNER	NNB42	00012	2021-01-06	2022-01-05			

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 66

Date: 2021-06-22



3.0 Technical Details

3.1 Summary of test results

Report No.: TW2106158E

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TW2106158E

Date: 2021-06-22



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

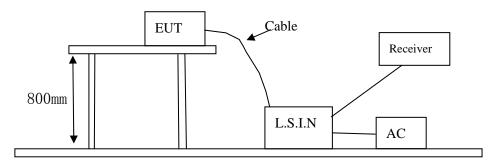

5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID	
TWC Fambona	Shenzhen Swetz Sound Technology	TW056B,	24 OVV TW056D	
TWS Earphone	Co., Limited	MIUONO T1	2AOKX-TW056B	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2106158E Page 9 of 66

Date: 2021-06-22



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB \(\mu \)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

The report refers only to the sample tested and does not apply to the bulk.

Date: 2021-06-22




A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Model: TW056B Results: PASS

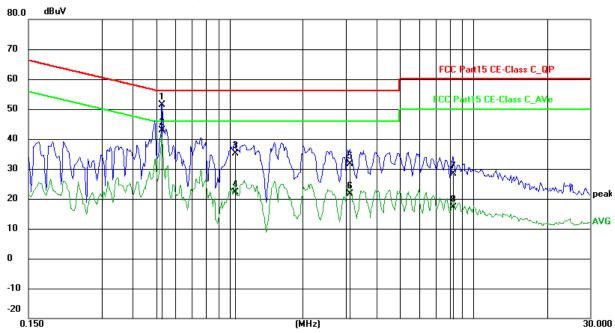

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5283	41.49	9.77	51.26	56.00	-4.74	QP	Р
2	0.5283	33.05	9.77	42.82	46.00	-3.18	AVG	Р
3	1.0509	25.39	9.79	35.18	56.00	-20.82	QP	Р
4	1.0509	12.27	9.79	22.06	46.00	-23.94	AVG	Р
5	3.1170	21.90	9.85	31.75	56.00	-24.25	QP	Р
6	3.1170	11.88	9.85	21.73	46.00	-24.27	AVG	Р
7	8.2260	18.19	10.07	28.26	60.00	-31.74	QP	Р
8	8.2260	7.05	10.07	17.12	50.00	-32.88	AVG	Р

Date: 2021-06-22




B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

Model: TW056B Results: Pass

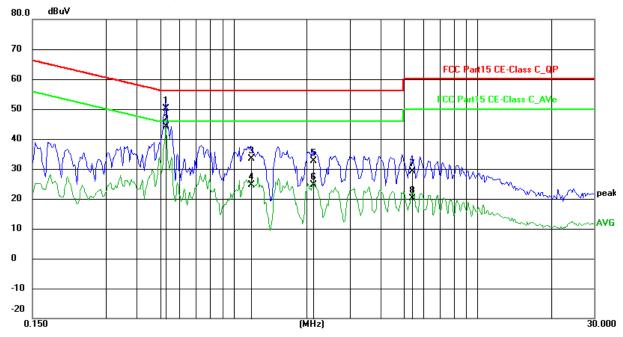

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5283	40.27	9.77	50.04	56.00	-5.96	QP	Р
2	0.5283	34.35	9.77	44.12	46.00	-1.88	AVG	Р
3	1.1835	23.57	9.79	33.36	56.00	-22.64	QP	Р
4	1.1835	14.76	9.79	24.55	46.00	-21.45	AVG	Р
5	2.1195	22.78	9.81	32.59	56.00	-23.41	QP	Р
6	2.1195	14.84	9.81	24.65	46.00	-21.35	AVG	Р
7	5.3868	19.17	9.95	29.12	60.00	-30.88	QP	Р
8	5.3868	10.23	9.95	20.18	50.00	-29.82	AVG	Р

Report No.: TW2106158E Page 12 of 66

Date: 2021-06-22




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

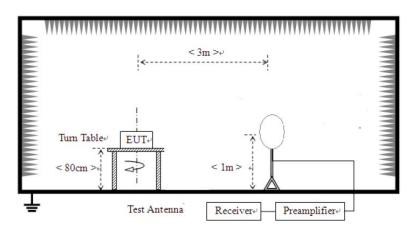


Page 13 of 66

Report No.: TW2106158E


Date: 2021-06-22



For radiated emissions from 30MHz to1GHz

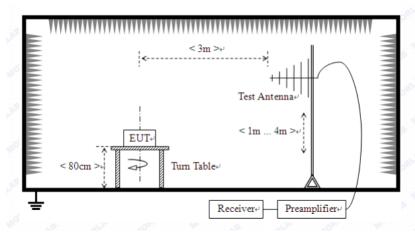

For radiated emissions above 1GHz

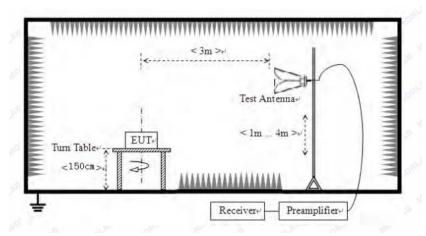

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No.: TW2106158E Page 14 of 66

Date: 2021-06-22



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)		
(MHz)	mV/m	dBuV/m		uV/m	dBuV/m	
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. Battery full charged during tests.
- 7. The two modulation modes of GFSK and Pi/4D-QPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2106158E Page 15 of 66

Date: 2021-06-22




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data - Left Earphone

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

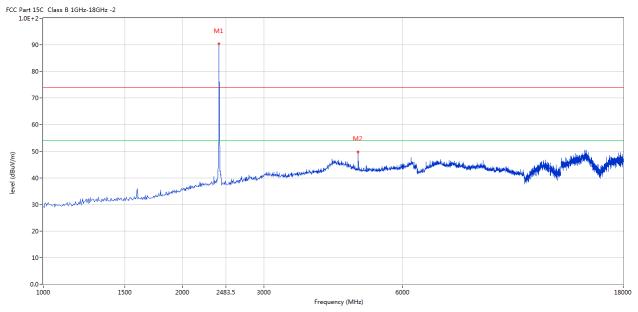


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.149	90.34	-3.57	114.0	-23.66	Peak	111.00	100	Horizontal	Pass
2	4802.799	49.63	3.12	74.0	-24.37	Peak	312.00	100	Horizontal	Pass

Report No.: TW2106158E Page 16 of 66

Date: 2021-06-22



Vertical

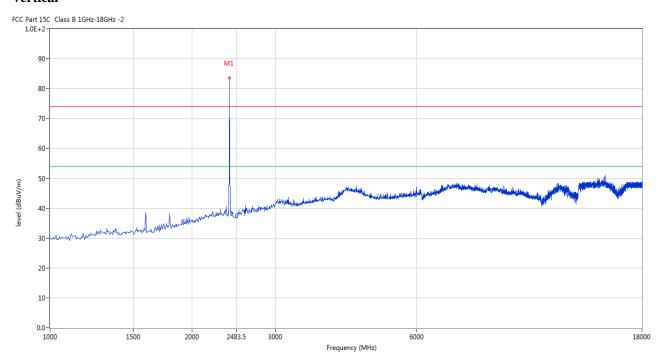

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	83.59	-3.57	114.0	-30.41	Peak	328.00	100	Vertical	Pass


Report No.: TW2106158E Page 17 of 66

Date: 2021-06-22



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

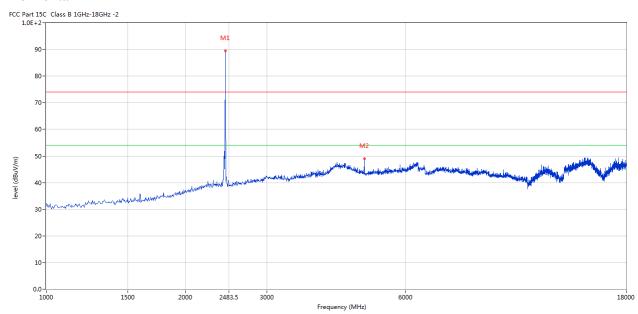


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	89.41	-3.57	114.0	-24.59	Peak	109.00	100	Horizontal	Pass
2	4879.280	49.02	3.20	74.0	-24.98	Peak	304.00	100	Horizontal	Pass

Report No.: TW2106158E Page 18 of 66

Date: 2021-06-22



Vertical

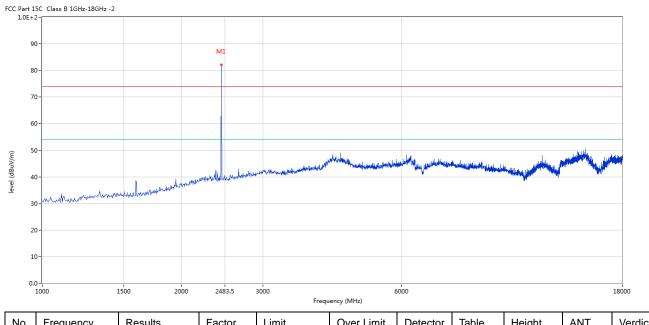

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	82.11	-3.57	114.0	-31.89	Peak	105.00	100	Vertical	Pass


Report No.: TW2106158E Page 19 of 66

Date: 2021-06-22



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

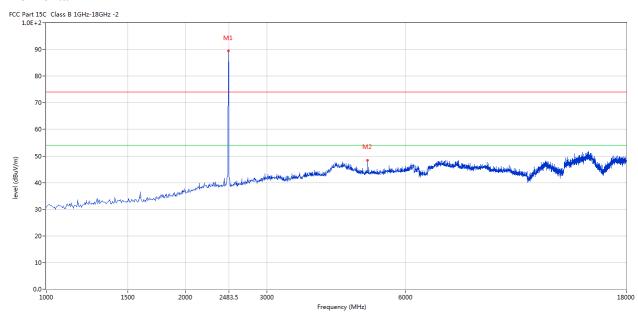

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	89.44	-3.57	114.0	-24.56	Peak	301.00	100	Horizontal	Pass
2	4960.010	48.45	3.36	74.0	-25.55	Peak	161.00	100	Horizontal	Pass


Page 20 of 66

Report No.: TW2106158E

Date: 2021-06-22



Vertical

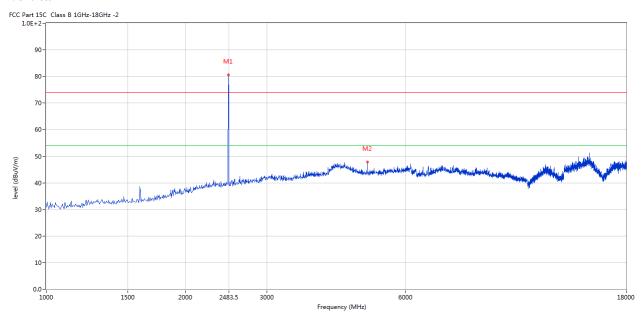

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	80.70	-3.57	114.0	-33.3	Peak	32.00	100	Vertical	Pass
2	4960.010	47.89	3.36	74.0	-26.11	Peak	69.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2106158E Page 21 of 66


Date: 2021-06-22



A Fundamental & Harmonics Radiated Emission Data - Right Earphone

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

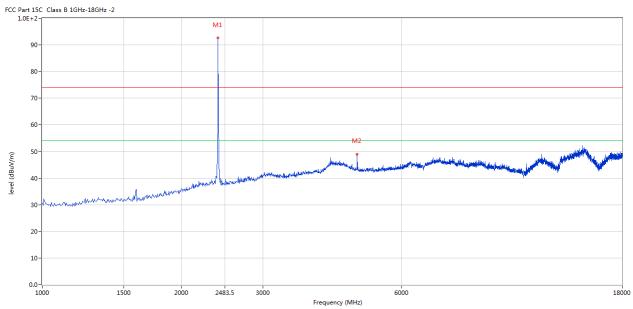


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402.149	92.58	-3.57	114.0	-21.42	Peak	312.00	100	Horizontal	Pass
2	4802.799	49.05	3.12	74.0	-24.95	Peak	327.00	100	Horizontal	Pass

Report No.: TW2106158E Page 22 of 66

Date: 2021-06-22



Vertical

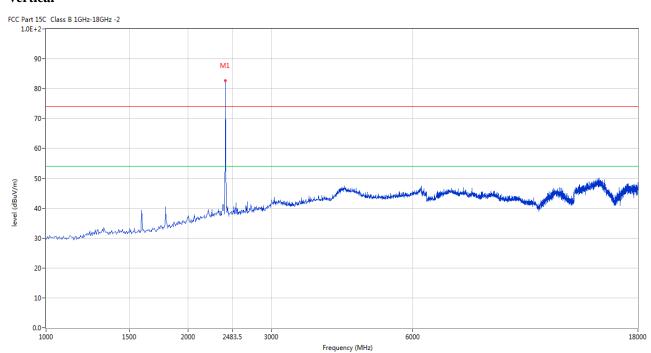

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	82.70	-3.57	114.0	-31.3	Peak	331.00	100	Vertical	Pass


Report No.: TW2106158E Page 23 of 66

Date: 2021-06-22



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

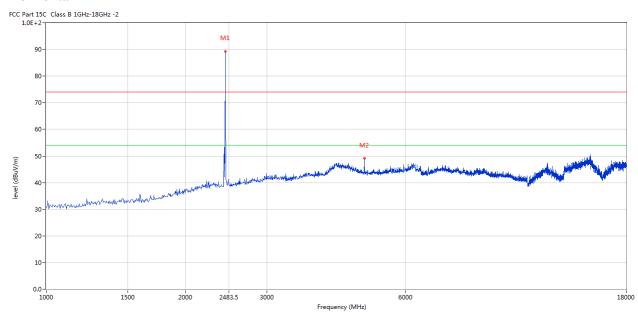


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	89.30	-3.57	114.0	-24.7	Peak	299.00	100	Horizontal	Pass
2	4883.529	49.18	3.20	74.0	-24.82	Peak	110.00	100	Horizontal	Pass

Report No.: TW2106158E Page 24 of 66

Date: 2021-06-22



Vertical

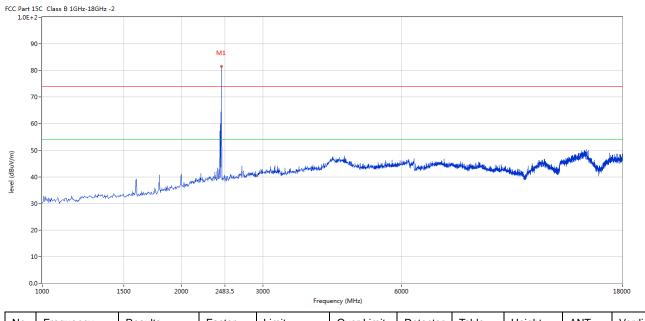

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440.390	81.55	-3.57	114.0	-32.45	Peak	106.00	100	Vertical	Pass


Report No.: TW2106158E Page 25 of 66

Date: 2021-06-22



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

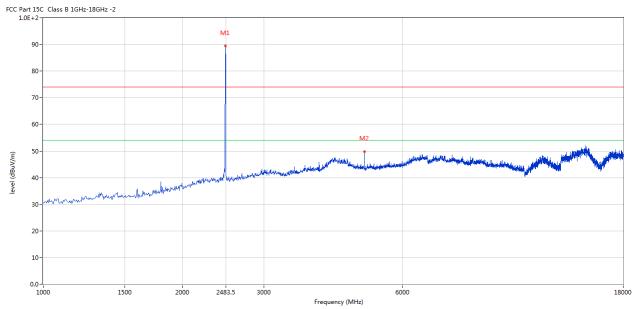


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	89.37	-3.57	114.0	-24.63	Peak	305.00	100	Horizontal	Pass
2	4960.010	49.73	3.36	74.0	-24.27	Peak	230.00	100	Horizontal	Pass

Report No.: TW2106158E Page 26 of 66

Date: 2021-06-22



Vertical

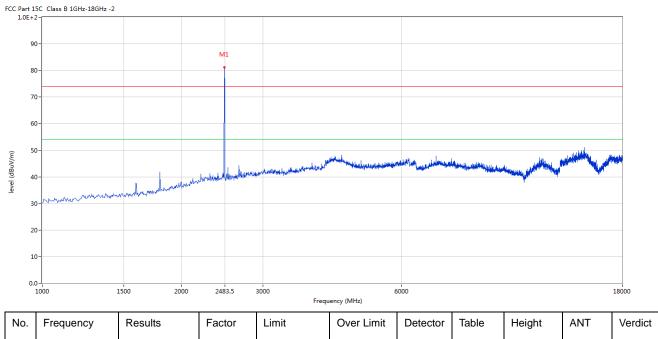

N	lo.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1		2479.630	81.09	-3.57	114.0	-32.91	Peak	222.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2106158E Page 27 of 66


Date: 2021-06-22



B. General Radiated Emission Data - Left Earphone Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

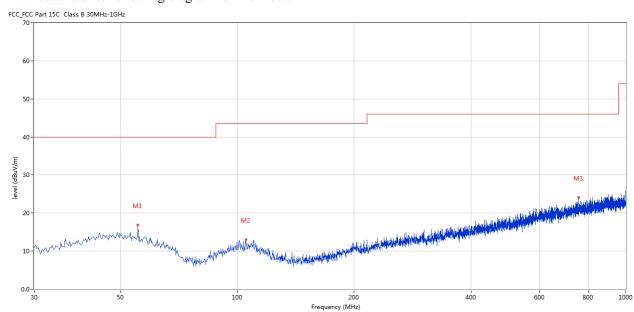

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	55.456	16.85	-11.89	40.0	-23.15	Peak	0.00	100	Horizontal	Pass
2	105.156	13.10	-13.23	43.5	-30.40	Peak	40.00	100	Horizontal	Pass
3	757.318	24.19	-3.32	46.0	-21.81	Peak	73.00	100	Horizontal	Pass

Report No.: TW2106158E Page 28 of 66


Date: 2021-06-22



Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

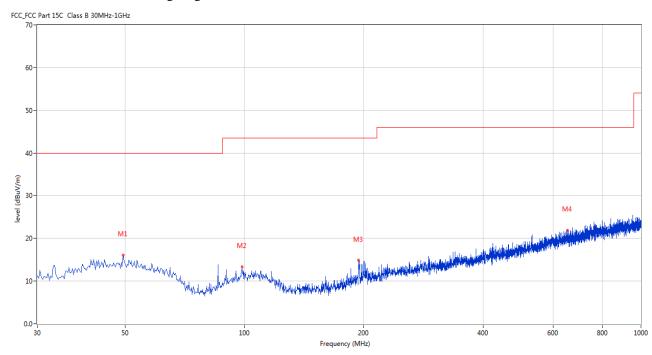

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	49.395	16.04	-11.28	40.0	-23.96	Peak	276.00	100	Vertical	Pass
2	98.610	13.29	-13.70	43.5	-30.21	Peak	313.00	100	Vertical	Pass
3	194.131	14.84	-13.84	43.5	-28.66	Peak	325.00	100	Vertical	Pass
4	651.857	21.90	-4.68	46.0	-24.10	Peak	300.00	100	Vertical	Pass

Report No.: TW2106158E Page 29 of 66


Date: 2021-06-22



B. General Radiated Emission Data - Right Earphone Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

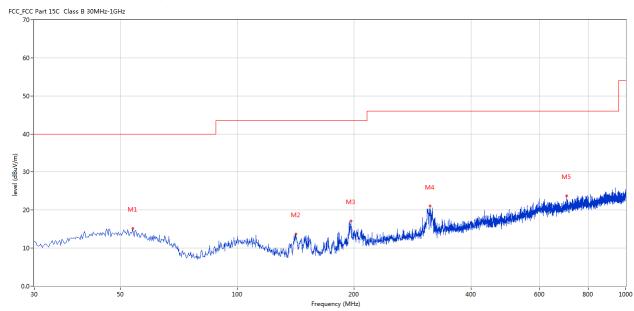

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	53.759	15.19	-11.53	40.0	-24.81	Peak	30.00	100	Horizontal	Pass
2	141.522	13.67	-17.28	43.5	-29.83	Peak	188.00	100	Horizontal	Pass
3	196.313	17.11	-13.59	43.5	-26.39	Peak	113.00	100	Horizontal	Pass
4	313.169	21.03	-10.82	46.0	-24.97	Peak	103.00	100	Horizontal	Pass
5	704.466	23.69	-4.16	46.0	-22.31	Peak	170.00	100	Horizontal	Pass

Report No.: TW2106158E Page 30 of 66


Date: 2021-06-22



Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

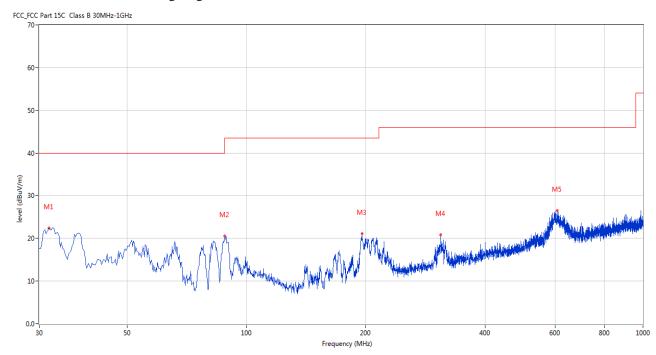

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	31.455	21.77	-14.57	40.0	-18.23	Peak	360.00	100	Vertical	Pass
2	88.185	20.56	-15.59	43.5	-22.94	Peak	232.00	100	Vertical	Pass
3	195.344	21.06	-13.74	43.5	-22.44	Peak	339.00	100	Vertical	Pass
4	308.805	20.79	-10.85	46.0	-25.21	Peak	309.00	100	Vertical	Pass
5	607.248	26.52	-5.05	46.0	-19.48	Peak	177.00	100	Vertical	Pass

Report No.: TW2106158E

Date: 2021-06-22




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

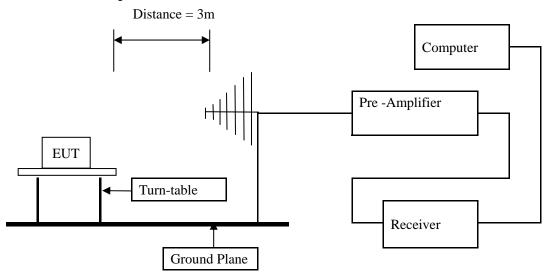

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2106158E Page 32 of 66


Date: 2021-06-22



7.6 Test Result

Left Earphone

Product:	TWS Earphone	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

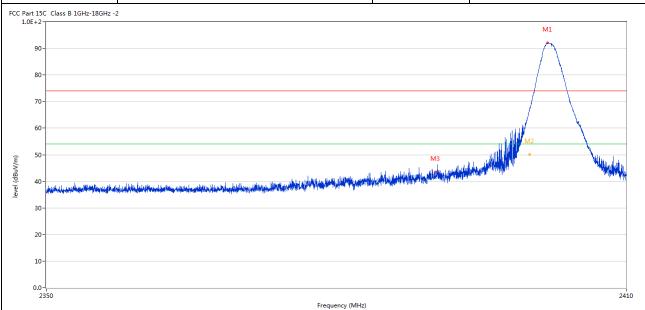

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2399.993	64.52	-3.57	74.0	-9.48	Peak	313.00	100	Horizontal	Pass
2**	2399.993	50.18	-3.57	54.0	-3.82	AV	313.00	100	Horizontal	Pass
3	2390.115	43.44	-3.53	74.0	-30.56	Peak	313.00	100	Horizontal	Pass

Report No.: TW2106158E Page 33 of 66

Date: 2021-06-22

3

2390.010

38.76

-3.53

74.0



Pı	roduct:		TWS Ear	phone]	Detector		Ve	rtical	
]	Mode	K	eeping Tra	nsmitting	Te	est Voltage		DC	23.7V	
Ten	nperature		24 deg	H	Humidity		569	% RH		
Tes	st Result:		Pass	3						
90- 80-		-2						N	11	
60 - 50 - 40 - 30 -			alizabed political disposition.	net yakiyaka asan kasayi bilanga k			Haria da	•		ha/Allina
50- 40- 30- 20- 10- 0.0- 23	350				equency (MHz)		pringly in the contract of the	•		2410
50- 40- 30- 20- 10- 0.0- 23	waa palanda da d	Results	Factor	Fr Limit		Detector	Table	Height	ANT	2410
50- 40- 30- 20- 10- 0.0- 23	350			Fr	equency (MHz)		Table (o)	Height (cm)	,	2410
50- 40- 30- 20- 10- 0.0- 23	Frequency	Results	Factor	Fr Limit	equency (MHz) Over Limit				,	

-35.24

Peak

206.00

100

Vertical

Pass

Report No.: TW2106158E Page 34 of 66

Date: 2021-06-22



	Product:		TWS Ea	rphone		Polarity		He	orizontal	
	Mode	K	eeping Tra	ansmitting	,	Test Voltag	ge	Ι	DC3.7V	
Γ	Temperature		24 de	g. C,		Humidity	7	5	6% RH	
-	Test Result:		Pas	ss						
	rt 15C Class B 1GHz-18GHz	:-2					•			
	90 - 80 - 70 -									
level (dBuV/m)	50- 40- 30-			No.	and the second s	illand kanpungan lingd	idigi baka basha,	kadikal pamanan di manaki kanaka kanaka di pa	k blandik wasith dahiri a sejik,	Regione, which when
level (dbuv/m)	50- 40-			No. Apr	A STATE OF THE PARTY OF THE PAR	alifania kanananana dinasia	ndelega kelenderakan,	માં માટે જ તાલ કર્યા છે. જે તે કે તે ક જે તે કે	halloonide voorsterdeid voorste	Regards and solvens
ievei (abuv/m)	50- 40 30-	projektele kalende kal		No. Alexander	And the same production of the same	abilanta termingah pada pada pada pada pada pada pada pa	ndekka kelanterakerakera	tight or an earlier with the first training	hallocatile ser state believe service.	والمجتمع بالمتعادية
(apny/m)	30- 20-			No. Option		عاظمانك المستواد فيسترين فالمناور وأ	i deligi kalendari kandari kan	મેમ્પ્રેલિફાનકાર કિલ્સન લેકિસ્તુ નો ક્લામે કિલ્સને કિલ્સન લેકિસ્તુ નો કિલ્સને કિલ્સને કિલ્સને કિલ્સને કિલ્સને	h Brookh wasta dald daysh	R. Chapter of the Market of the State of the
(m/vindu) ievei (ubuv/m)	50 - 40 - 30 - 20 -			2483.5		alikan da kanan na	n deligi kedisi kendensi ken,	મેમીએડ્રાન્કાર વિભાગીડાનો મહેની 	h lleanth an steabhle a siù h	2500
No	30 - 20 - 2470	Results	Factor			Detector	Table	Height	ANT	

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
2	2483.437	55.56	-3.57	74.0	-18.44	Peak	303.00	100	Horizontal	Pass
2**	2483.437	48.32	-3.57	54.0	-5.68	AV	303.00	100	Horizontal	Pass

Page 35 of 66

Report No.: TW2106158E

Date: 2021-06-22



	Product:		TWS Ear	phone		Detector		Vei	tical	
	Mode	Ke	eping Trar	nsmitting		Test Voltage		DC	3.7V	
Te	emperature		24 deg.	C,		Humidity		56%	6 RH	
Т	est Result:		Pass							
FCC Part 1.0E	15C Class B 1GHz-18GHz -2	!								
	90-									
	80-									
	70-									
	60-									
(w//	50-									
level (dBuV/m)	40 - Landa Majara in Language Para				And some production of the second	Adama william and the children of the children		ndaya bada daya ke daya da		
	30-									
	20-									
	10-									
	0.0- 2470			2483.5	Frequency (MHz)					2500
No.	Frequency	Results	Factor	Limit	Over Li	mit Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2483.234	50.75	-3.57	74.0	-23.25	Peak	217.00	100	Vertical	Pass

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. The two modulation modes of GFSK and Pi/4D-QPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2106158E Page 36 of 66


Date: 2021-06-22



Test Result

Right Earphone

Product:	TWS Earphone	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

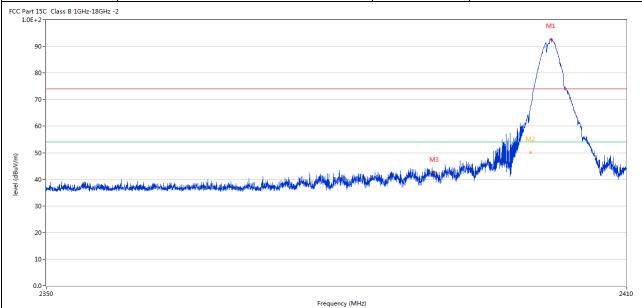

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	2399.993	63.96	-3.57	74.0	-10.04	Peak	324.00	100	Horizontal	Pass
2**	2399.993	50.09	-3.57	54.0	-3.91	AV	324.00	100	Horizontal	Pass
3	2390.010	42.59	-3.53	74.0	-31.41	Peak	310.00	100	Horizontal	Pass

Report No.: TW2106158E Page 37 of 66

Date: 2021-06-22



F	Product:		TWS Ear	phone]	Detector		Ve	rtical	
	Mode	K	eeping Tra	nsmitting	Te	st Voltage		DC	23.7V	
Teı	mperature		24 deg	. C,	I	Humidity		569	% RH	
Te	est Result:		Pass	s						
Part 15 1.0E+2	5C Class B 1GHz-18GHz -	2								
90	0-									
0.0								M A	11 •	
80									1	
70	0-									
								- /	\	
60	0-								\	
								M2		
	0-	hosh sa baas al odd dagla a.	words this last on the ac-	Latras a latras tr	and the second	M3		M2 •		l Internal
50 40	O-Wildelphammandalvikuml	material desirent and sould be particular.	المعادرة أفيالة المبادلة المتاعل	Judi delperadojah eserend	والمعالمة	M3		•	\	Antolia.
50 40 30		readility of the standard to be played		Judh Arten adalah mengahat	المردانة فرياما أمريسه أردافاء	M3		•	- the	Marie Marie
50 40		recition and reliable has become	Mari Alafildo Annala Anger	Judhilon da belanish d	بالمرابة فالمراجعة في المعالمة المرابعة في المرابعة في المرابعة في المرابعة في المرابعة في المرابعة في المرابعة	Ma	MAN MANAGERA PARA	•		Harmind dy.
50 40 30		verblen, geskind fre her en beren	jedis kilolokova kanada, kanada	والمالية وال	المرابعة أوراه المرابعة أوراها	M ²	HAN HANDARA PARA	M2	h _h h	Haminish
50 40 30 20 10		vasidis et likuva pakinas kirk kapinagas		Judi dispondajed nongold,	olding france of help white he		Marie de la compansión de	•	h _i	2410
50 40 30 20 10		vojda, ozdani godini iz koja konsta			equency (MHz)	Ma	HATE DE LA PARTICIONA D	712	happy the second	2410
500 400 300 200 100 0.0.0.2		Results	Factor			Detector	Table	Height	ANT	ı
500 400 300 200 100 0.0.0.2				Fre	equency (MHz)		Table (o)	Height (cm)	ANT	ı
500 400 300 200 100 100 100 100 100 100 100 100 1	Frequency	Results	Factor	Fre Limit	equency (MHz) Over Limit			_	ANT Vertical	2410 Verdi
50 40 30 20 10	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	over Limit	Detector	(o)	(cm)		Verd

Report No.: TW2106158E Page 38 of 66

Date: 2021-06-22

2**

2483.407

48.92

-3.57

54.0



		1					-			
P	Product:		TWS Ea	rphone		Polarity		Н	orizontal	
	Mode	K	eeping Tra	ansmitting	1	Test Voltag	ge	Γ	OC3.7V	
Ter	mperature		24 de	g. C,		Humidity	7	5	6% RH	
Tes	st Result:		Pas	SS						
C Part 15 1.0E+2	5C Class B 1GHz-18GHz -	2								
90	0-		المسايح	1						
80	0-									
70	0-									
60	0-		/	M						
			<u>r</u>	M	<u> </u>					
. 50				M	The state of the later of the l	house of the	. h			
50	Land to the last of the last o		, 	M	Now Address of the Lot	likeansk diraktikalaraska kilo				ophisolal Li
40				MZ	Proposition and state of	llipromodel particular production de la constitución de la constitució	and the second live to	addd y olyglyngo ball farol argh	KANANISA Abada sabada sabada sabada sa	and the second second
40	0-	AND THE PROPERTY OF THE PROPER		Man	The same of the sa	librari di paritale pristabili.	nd play of the play the	ndddyrfyllyn y bell fan Leydi	h. 1986 o i sel obrah asha iyo o obbabisi	of the state of the last
30	0-			Mich	Proposition in the state of the	likeman kepuntukan dan kebil	فالمطافع ويأفرها لافع	adde de de constituente de la cons	k ili ku safa ka	, desired to
40 30 20)-)-			Man	The same of the sa	Maran de partir de partir de la	nd physical distribution of the confession of th	ntible deplease have been been been	h fla ei sel abud seb siya sebhasis	- Accordant
40 30 20 10)-)-			2483.5		Maran de partir de propriedo de la constante d	nd physical distribution	edeble depleses best best best	h. Plan o red about out-open or who have	2500
40 30 20 10 0.0 2)-)-	Results	Factor	2483.5	i	Detector	Table	Height	ANT	2500
40 30 20 10	0		Factor (dB)	2483.5	Frequency (MHz)					

ΑV

300.00

100

Horizontal

Pass

-5.08

Report No.: TW2106158E Page 39 of 66



	Product:		TWS Ear	phone	Ι	Detector		Vei	rtical	
	Mode	Ke	eping Trai	nsmitting	Tes	st Voltage		DC	3.7V	
Т	Temperature		24 deg.	. С,	Н	lumidity		56%	6 RH	
7	Test Result:		Pass	;						
	rt 15C Class B 1GHz-18GHz	-2								
	90-									
	80-		M							
	70-									
	60-									
(E)	50-	ممخله لا فه رور ر	•	M						
level (dBuV/m)	40-			•	Marie de la company de la comp	ماريد المارانية المستهدية بمنهاب	A STATE OF THE STA	Hillian de de la company de la	Palaring dalamentik	alah kadali
_	30-									
	20-									
	20-									
				2483.5	equency (MHz)					2500
No	0.0	Results	Factor		equency (MHz) Over Limit	Detector	Table	Height	ANT	2500 Verdict
No	0.0	Results (dBuV/m)	Factor (dB)	Fre	1	Detector	Table (o)	Height (cm)	ANT	

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. The three modulation modes of GFSK and Pi/4D-QPSKwere tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2106158E Page 40 of 66

Date: 2021-06-22



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain 0.45dBi Max for left earbud and 0.60dBi for right earbud. It fulfills the requirement of this section.

Test Result: Pass

Report No.: TW2106158E Page 41 of 66



FSK Modulation -	Left Earphone	<u> </u>								
Product:	TW	/S Earpho	ne		Te	st Mode:		Keep tra	nsmittir	ıg
Mode	Keepi	ng Transm	nitting		Tes	st Voltage		DC:	3.7V	
Temperature		24 deg. C,			Н	lumidity		56%	RH	
Test Result:		Pass			Γ	Detector		P	K	
dB Bandwidth	8	35.67kHz	Z					-	-	
Ref Lvl	Delta 1		.28 dB		3W 3W	30 k		RF Att	30	dВ
10 dBm	835	5.671342			νΤ	8.5 m		Jnit		dBm
10						v ₁	[T1]	-2	1.73	dBm _
			,	,				2.4015		
0			^			<u>1</u>	[T1]		0.28	dB
				$\backslash \bigwedge$		∇ 2		35.6713		CHZ
-10			-	~ \	\	V 2	[T1]	- 4020		dBm
-20 <u>D1 21 24</u>		1 1	\mathcal{N}		M	1		2.4020	301 (÷HZ
1MAX	dBm-					The state of the s				1:
- 30	~	j ⁱ					٦			
-40							1	M		
50	V						lo _t	/ \	Uww.yy	٠, الم
-60										
-70										
-80										
-90										
Center 2.40	2 GHz		300	kHz/				Spa	an 3 N	/IHz

Page 42 of 66

Report No.: TW2106158E



Product:		TW	S Earphon	ie		T	est Mode:		Keep tr	ansmitting	
Mode		Keepin	g Transmi	tting		Te	est Voltage	;		C3.7V	
Temperature			4 deg. C,				Humidity		56	% RH	
Test Result:			Pass				Detector		PK		
20dB Bandwidth		83	85.67kHz								
		Delta 1	[T1]		RI	ЗW	30 k	Hz :	RF Att	30 dB	
Ref Lvl			0.	17 dB	VE	ВW	100 k	Hz			
10 dBm		835	6.671342	268 kHz	SV	T	8.5 m	s ·	Unit	dBm	ı
10							v ₁	[T1]	-2	1.99 dBm	
									2.4405	5413 GHz	Α
0				^			<u>^</u> 1	[T1]		0.17 dB	
					$\backslash \Lambda$		▽ 2	[T1]	335.67134		
-10					\ \	١	* 2	[11]	2.44099	1.75 dBm 9699 GHz	
				\mathcal{N}		7	\				
-20 —D1 -21.	75 dBm		\ \\				W				
1MAX			ل				7				1M2
-30		^	/				\sim				
		N						7			
-40								<u> </u>			
\		<i></i>						\ \	~~		
-50	The Market of the Contract of	\bigvee						7			
m Julia									- ~	holmoly	
-60						\dashv				vw	
-70											
-80											
-90										_	
Center 2	.441 GI	Hz		300	kHz/				Spa	an 3 MHz	

Page 43 of 66

Report No.: TW2106158E



Product:			S Earphon	Δ		т	est Mode			Keen tre	ansmitting	
Mode			g Transmi	tting			est Voltag	-			23.7V	
Temperature		24	4 deg. C,				Humidity				% RH	
Test Result:			Pass				Detector		PK			
20dB Bandwidth		82	23.65kHz									
Ŕ		Delta 1	[T1]		R	BW	30]	кНz	R	F Att	30 dB	
Ref Lvl			0.	75 dB	V	BW	100	кНz				
10 dBm		823	3.647294	59 kHz	S	WT	8.5 r	ns	U	nit	dBr	n
10							v ₁	[T	1]	-22	2.27 dBm	
										2.47957	014 GHz	A
0				2			<u>^</u> 1	[T	1]	(.75 dB	1
				\sim	\ Λ					23.64729	459 kHz	3
-10					HV.	<u>_</u>	∇2	[T	1]	-2	.44 dBn	0
				\mathcal{N}	·	4				2.48000	301 GHz	3
-20			<u> </u>				1					
_D122.	48 dBm		- /				7					1MA
-30			لہر				\					
-30		_					V	\bigvee				
		\sim						1				
-40									7			
\ <u>.</u>	M	/								μΛ		
-50	, \ <u>\</u>	\forall							$\rightarrow \forall$			
W. M.											mary	
-60											V ()	4
												Ī
-70												1
-80												
-90 Center 2	.48 GH:			300	kHz/			1		Spa	an 3 MHz	
-					-/					~100		

Page 44 of 66

Report No.: TW2106158E



Product:		TW	'S Earpho	ne		Te	est Mode:		Keep tra	nsmitting
Mode		Keepir	ng Transm	itting		Te	st Voltage	e	DC:	3.7V
Cemperature		2	24 deg. C,			I	Iumidity		56%	RH
Test Result:			Pass]	Detector		P	K
lB Bandwidth		7	63.53kHz							
\	De	lta 1	[T1]		RI	ЗW	30 }	CHZ	RF Att	30 dB
Ref Lvl			0.	34 dB	VI	ВW	100 }	KHZ		
10 dBm		763	.527054	lll kHz	SI	TV	8.5 r	ns	s Unit	
10							v ₁	[T1]	-2	0.45 dBm
				2					2.4016	2425 GHz
0				No. 3	_		<u></u> 1	[T1]		0.34 dB
					\bigvee		∇ 2	[T1]	763.5270	I I
10				. (` \~	\	<u> </u>	LTT	2.4019	1.28 dBm 9699 GHz
			1/	~		V	1			
20 -D1 -20.2	8 dBm						<u></u>			
30 1MAX			لمر							
							·	$\sqrt{}$		
40								1		
5.0	~~~	<i>/</i> ′							7	
50	V W								V Chan	man,
60										* W
70										
80										
90										
Center 2.	402 GHz			300	kHz/				Spa	an 3 MHz

Page 45 of 66

Report No.: TW2106158E



Product:		TW	S Earphon	ie		T	est Mode:		Keep tra	ansmitting	
Mode		Keepin	g Transmi	tting		Те	est Voltage	;	DC	C3.7V	
Temperature			4 deg. C,				Humidity		569	% RH	
Test Result:			Pass				Detector		PK		
0dB Bandwidth		82	29.66kHz								
/s de		Delta 1	[T1]		R	BW	30 k	Hz F	RF Att	30 dB	
Ref Lvl			0.	89 dB	V	VBW 100 kH		Hz			
10 dBm		829	.659318	864 kHz	S	WТ	8.5 m	s t	Jnit	dBm	ı
10							v ₁	[T1]	-21	l.89 dBm	
					9				2.44056	413 GHz	A
0				^			<u>^</u> 1	[T1]	(.89 dB	
					$\backslash \bigwedge$		▽ 2	8 [T1]	29.65931 	.864 kHz 1.73 dBm	
-10					, v	1	* 2	[11]	2.44099	1.73 asm 9699 GHz	
			_ /	\sim		V	1				
-20 -D1 -21.	73 dBm		\				\				1M2
1max			لمه				~~				±M7
-30		^	/				\sim				
		~/						Thy .			
-40								- 4-			
\	\wedge	/						ζ.	m		
-50	/ m	W						1	H /~		
March									1	Munny	
-60										V	
-70											
-80											
-90											•
Center 2	.441 GI	Hz		300	kHz/				Spa	an 3 MHz	

Page 46 of 66

Report No.: TW2106158E



Product:		TW	S Earphon	ie		T	est Mode:		Keep tr	ansmitting	
Mode		Keepin	g Transmi	tting		Те	est Voltage	;	DC	C3.7V	
Temperature			4 deg. C,				Humidity		569	% RH	
Test Result:			Pass				Detector		PK		
20dB Bandwidth		82	29.66kHz								
		Delta 1	[T1]		Rl	BW	30 k	Hz :	RF Att	30 dB	
Ref Lvl			1.	12 dB	V)	BW	100 k	Hz			
10 dBm		829	0.659318	864 kHz	SI	ИT	8.5 m	s	Unit	dBm	ı
10							v ₁	[T1]	-2:	2.74 dBm	A
									2.47956	413 GHz	
0				^			<u>^</u> 1	[T1]		1.12 dB	
					$\backslash \bigwedge$		▽ 2	[T1]	329.65931 	1864 kHz 2.50 dBm	
-10					~ h	١		[11]	2.47999	2.30 ав 9699 GHz	
			/	N		7	1				
-20 -D1 -22.	5 dBm-						<u></u>				1M2
1							M				IMA
-30			/				$\overline{\lambda}$				
								\mathcal{I}			
-40								-η			
	\wedge								m		
-50	Jw/ \^	$\sqrt{}$						<u> </u>			
1 miles									- M	why	
-60											
-70											
-80											
-90 <u> </u>										2	
Center 2	.48 GH:	Z		300	kHz/				Spa	an 3 MHz	

Page 47 of 66

Report No.: TW2106158E



Pi/4D-QPSK M	Aodulati o	on - Left I	Earphone							
Product:		TW	S Earphon	e		Test Mode:		Keep tra	ansmitting	
Mode		Keepin	g Transmi	tting		Test Voltage	e	DC	23.7V	
Temperature		2	4 deg. C,			Humidity		569	% RH	
Test Result:			Pass			Detector]	PK	
20dB Bandwidth		1.	.214MHz							
R)		Marker	1 [T1 n	ndB]	RBI	W 30 k	Hz R	F Att	30 dB	
Ref Lvl		ndB		00 dB	VBI					
10 dBm		BW 1	L.214428	886 MHz	SW	r 8.5 m	ns U	nit	dBm	
10						v ₁	[T1]	-1	.26 dBm	A
0				1				2.40199	699 GHz	
				\wedge /		nd! BW	8	20 1.21442	0.00 dB	
1.0					_	o P _T	 [T1]	-21	886 MHz	
-10			\sim	~ \\	~ W	m hy		2.40137	776 GHz	
		T	\int			\psi \psi \psi \psi \psi \psi \psi \psi	[] [T1]	-21	.39 dBm	
-20		7				1	\	2.40259	218 GHz	1MA
							٦			
-30										
-40							\			
	٨٨	$\wedge \sqrt{}$					M			
-50	~~							Will	Mund	
-60										
-70										
-80										
-90 Court on 2	400.5			300	1-11- /				2 2 2	
Center 2				300	kHz/			Spa	n 3 MHz	
Date: 22	2.JUN.2	021 16	:30:05							

Page 48 of 66

Report No.: TW2106158E



Product:		TW	S Earphon	e		Γ	est Mode:		Keep tra	ansmitting	
Mode		Keepin	g Transmi	tting		T	est Voltage		DC	23.7V	
Temperature			4 deg. C,	-		+	Humidity		569	% RH	
Test Result:			Pass			+	Detector		l	PK	
dB Bandwidth		1.	214MHz								
€ >	I	Marker	1 [T1 n	ndB]	F	RBW	30 k	Hz Rl	F Att	30 dB	
Ref Lvl	1	ndB	20.	00 dB	7	JBW	100 k	Hz			
10 dBm	1	BW 1	1.214428	886 MHz	S	SWT	8.5 m	s Uı	nit	dBm	1
10							v ₁	[T1]	-1	.66 dBm	A
]					2.44099	699 GHz	
0				^ /			ndB		20	.00 dB	
1.0				$ \ \ \ $	\		BW ∇_{T1}	[T1]	1.21442	.56 dBm	
-10			\w\	\frac{1}{2}		M	m_		2.44037		
		T	\checkmark				$\Delta \sqrt{T_3}$	[T1]	-21	.77 dBm	
-20 1MAX								<u></u>	2.44159	218 GHz	1M
-30											
-40		W							^		
-50									<u> </u>	way way M	
-60											
-70											
-80											
-90 Center 2					kHz/	/			Spa	ın 3 MHz	

Page 49 of 66

Report No.: TW2106158E



Product:		TW	S Earphon	ie		Т	est Mode:		Keep tra	nsmitting	
Mode			g Transmi			Te	est Voltage			3.7V	
Temperature			4 deg. C,	_			Humidity			6 RH	
Test Result:			Pass				Detector		PK		
dB Bandwidth		1	.214MHz								
<u> </u>	ı	Marker	1 [T1 n	ndB]	R	BW	30 kH	z Rl	7 Att	30 dB	
Ref Lvl		ndB		00 dB	V	BW	100 kH	z			
10 dBm		BW	1.214428	886 MHz	S	WT	8.5 ms	Uı	nit	dBm	ı
10							v ₁	[T1]	-2	.48 dBm	
									2.47999	699 GHz	A
0				0 /	ĺ		ndB		20	.00 dB	
				/\ /	\		BW $m{ abla}_{T1}$	[T1]	1.21442	886 MHz	
-10			220		\sim	M	My .	[11]	2.47937	776 GHz	
						~	A. 2. 3.	[T1]	-22	.39 dBm	
-20 1MAX		y Y	~				4		2.48059	218 GHz	1M
IMAX		/					\	1			IN
-30											
-40	Λ./							M	\wedge		
-50								`	V WY	Month	
-60											
-70											
-80											
-90											
Center 2	.48 GH:	z	•	300	kHz/		· · · · · · · · · · · · · · · · · · ·		Spa	n 3 MHz	

Page 50 of 66

Report No.: TW2106158E



Product: TWS Earphone Mode Keeping Transmitting						Γ	est Mode:		Keep transmitting			
					Test Voltage			;	DC3.7V			
			4 deg. C,				Humidity		56% RH			
Test Result:		Pass				_	Detector		PK			
OdB Bandwidth		1.214MHz										
<u> </u>	Marker 1 [T1 ndB]					RBW	30 k	Hz R	z RF Att 30 c		lB	
Ref Lvl		ndB	20.	00 dB	7	VBW	100 k	Hz				
10 dBm		BW 3	1.214428	886 MHz	,	SWT	8.5 m	s U	nit	dBm	ı	
10							v ₁	[T1]	-1	.26 dBm		
									2.40200	301 GHz	A	
0				^ /			ndE	3	20	.00 dB		
				$ \ \ \ $	\		BW ∇_{T}	5	1.21442			
-10			MM	77	_~	M	My	[T1]	2.40137	.04 dBm		
							$^{\triangle}$	L [T1]	-21	.46 dBm		
-20		7					+	<u> </u>	2.40259	218 GHz		
1MAX		/						4			1M	
-30												
-40	$\wedge \wedge$	W						M	\wedge			
-50	"\"\									an warm		
-60												
-70												
-80												
-90 Center 2	.402 GH	Iz	ı	300	kHz,	/			Spa	ın 3 MHz		
Date: 22	2.JUN.2		5:34:10									

Page 51 of 66

Report No.: TW2106158E



Product: TWS Earphone						T	est Mode:	Keep transmitting DC3.7V			
Mode Keeping Transm				tting		Test Voltage					
Temperature		24 deg. C,					Humidity		56% RH		
Test Result:	Pass 1.214MHz					Detector 		PK			
20dB Bandwidth											
Ŕ	Marker 1 [T1 ndB]					BW	30 kH	z RF Att 30		30 dB	dВ
Ref Lvl		ndB		00 dB	V	BW	100 kH				
10 dBm		BW 1	1.214428	86 MHz	S	WT	8.5 ms	Ur	nit	dBm	1
10							v ₁ [[T1]	-1	.72 dBm	A
				1					2.44099	699 GHz	
0				^ /			ndB		20	.00 dB	
					\		BW VT1	[T1]	1.21442	886 MHz .67 dBm	
-10			MM	7	Δ	\mathcal{L}	My		2.44037		
					· ·		V ₇ ,2	[T1]	-22	.13 dBm	
-20		7	<u> </u>				<u>†12</u>		2.44159	218 GHz	
-30							\	1			1M2
-30											
-40	\wedge	N						V.	n./\		
-50	<u> </u>							·	//w	Uhum	
-60											
-70											
-80											
-90 Center 2	441 CI	- Iz		300	kHz/				Sna	n 3 MHz	

Page 52 of 66

Report No.: TW2106158E



Product: TWS Earphone Mode Keeping Transmitting						T	est Mode:	Keep transmitting			
						Test Voltage Humidity		DC3.7V 56% RH			
			24 deg. C,								
Test Result:			Pass		Detector			PK			
dB Bandwidth	1.214MHz										
6 m		Marker	1 [T1 n	ndB]	R	BW	30 kH	z Rl	7 Att	30 dB	
Ref Lvl		ndB	20.	00 dB	V	BW	100 kH	z			
10 dBm		BW 3	1.214428	886 MHz	S	WT	8.5 ms	Uı	nit	dBm	l
10							v ₁	T1]	-2	.50 dBm	A
				-					2.47999	699 GHz	A
0				^ /			ndB		20	.00 dB	
				/\ /	\		BW V _T 1	[T1]	1.21442	886 MHz	
-10			~~~	77	\sim	M	My 2	[+ +]	2.47937	776 GHz	
					· ·		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	[T1]	-22	.42 dBm	
-20		7	~				1		2.48059	218 GHz	1M2
		/					\	\			
-30											
-40	\wedge	\sim						Ly.			
-50	i-www bal								how.	hay haylandin	
-60											
-70											
-80											
-90 Center 2	.48 GH	z		300	kHz/				Spa	n 3 MHz	

Report No.: TW2106158E Page 53 of 66

Date: 2021-06-22




10.0 FCC ID Label

FCC ID: 2AOKX-TW056B

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

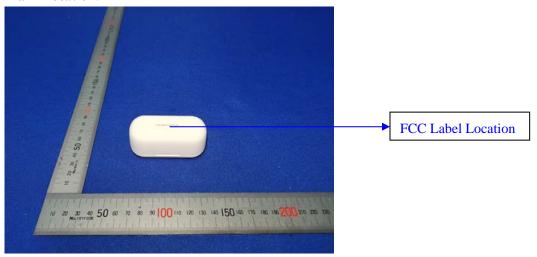

Page 54 of 66


Report No.: TW2106158E

Date: 2021-06-22



11.0 Photo of testing

11.1 Conducted test View--

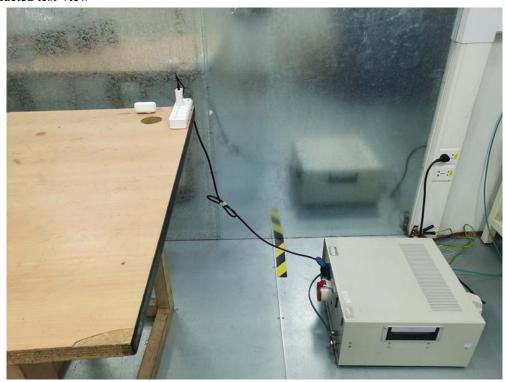

Page 55 of 66

Report No.: TW2106158E

Date: 2021-06-22



Radiated emission test view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2021-06-22



11.2 Photographs – EUT



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-06-22



Photographs - EUT

Outside View-Charger Base

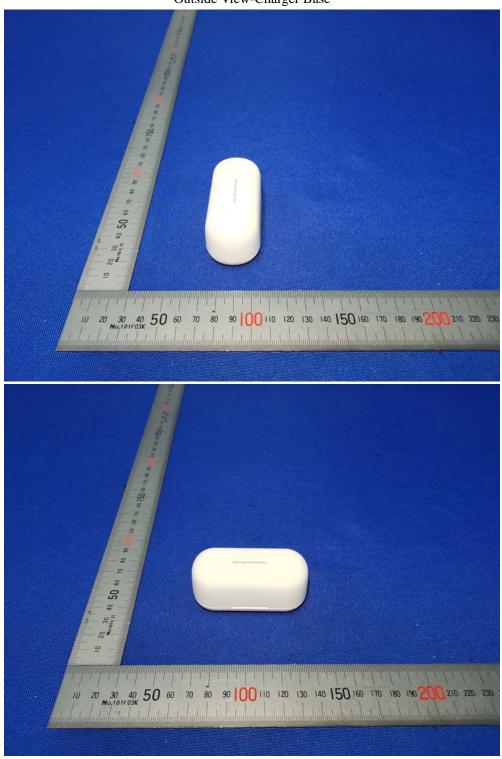

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-06-22



Inside View-Charger Base

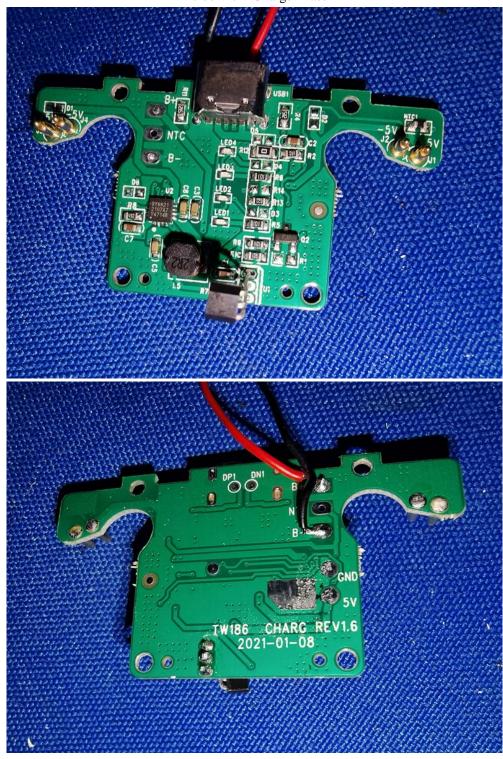

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 59 of 66 Report No.: TW2106158E




Inside View-Charger Base



Date: 2021-06-22



Outside View - Left Earphone

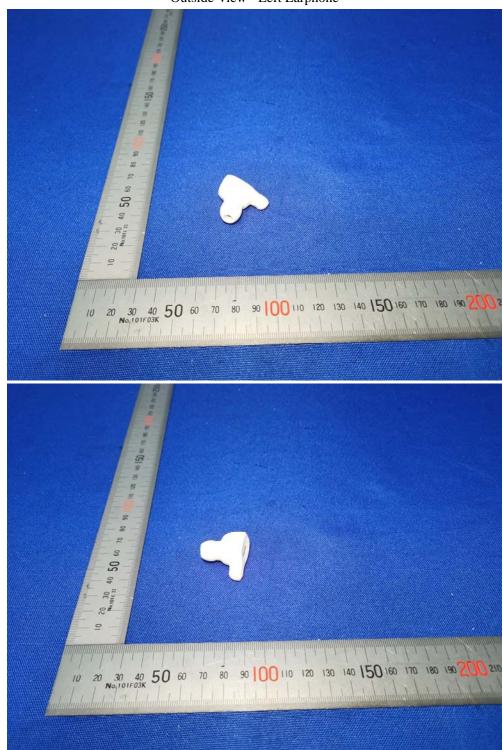

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2021-06-22



Outside View - Left Earphone

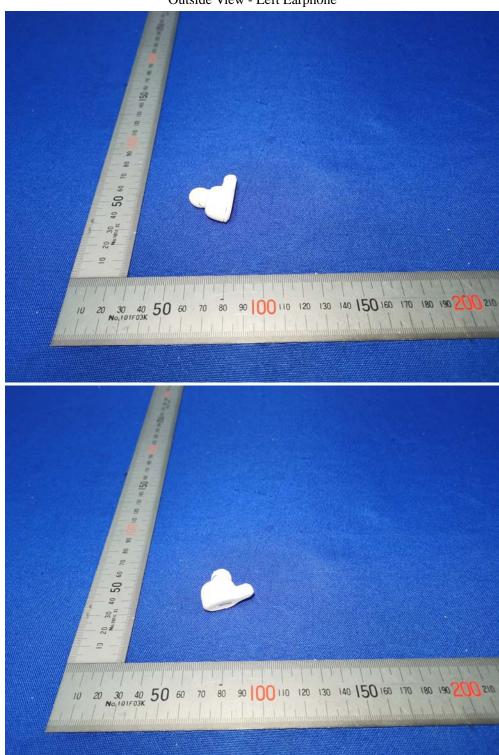

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 62 of 66

Report No.: TW2106158E

Date: 2021-06-22



Inside view - Left Earphone

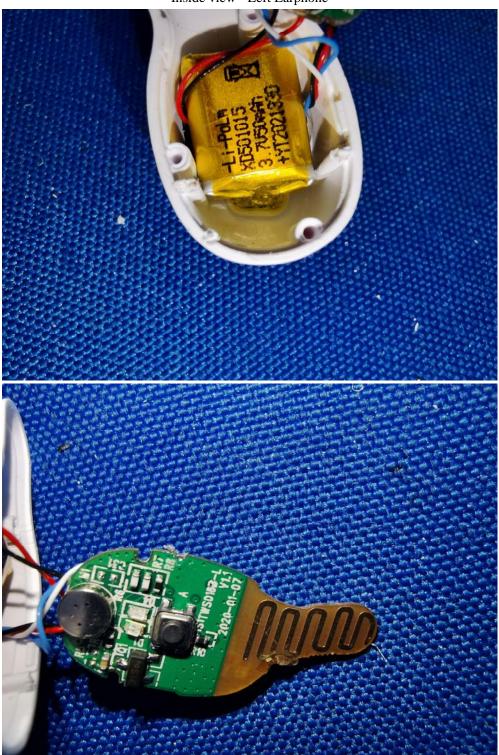

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: TW2106158E Page 63 of 66




Inside view - Left Earphone

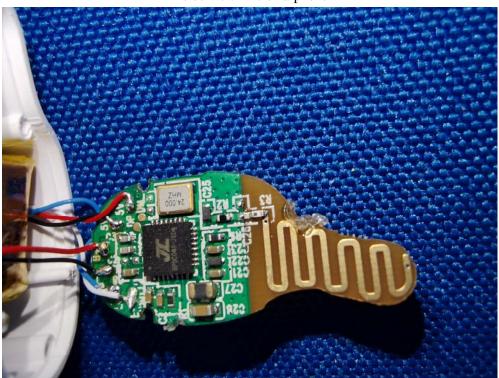

Date: 2021-06-22



Outside View - Right Earphone

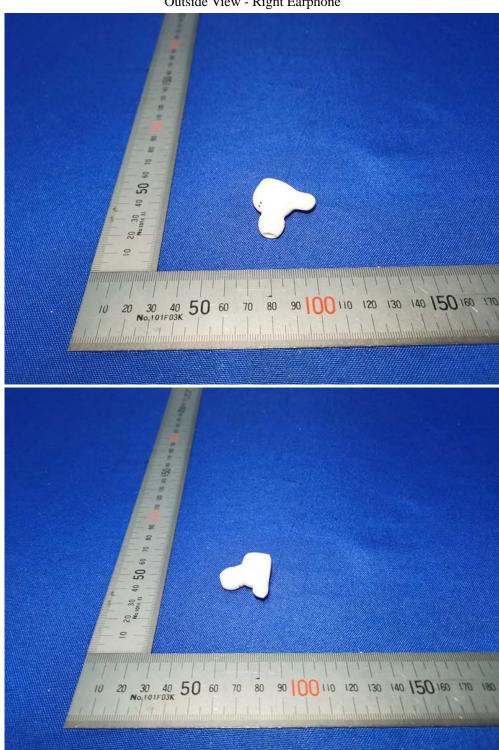

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2021-06-22



Outside View - Right Earphone

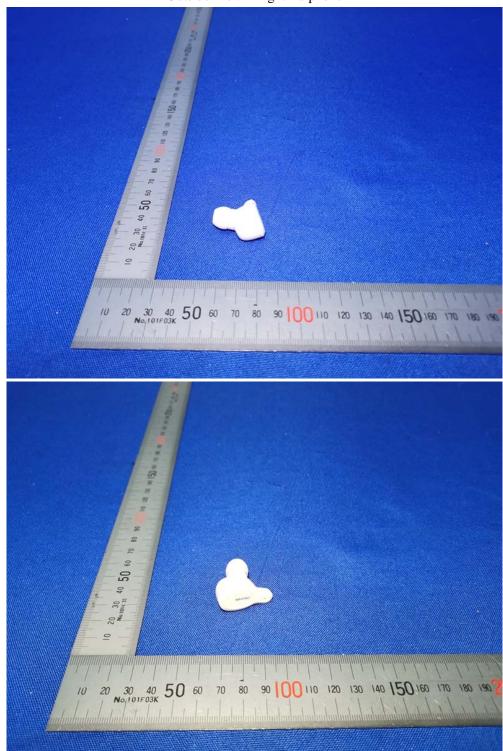

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2021-06-22



Inside view - Right Earphone

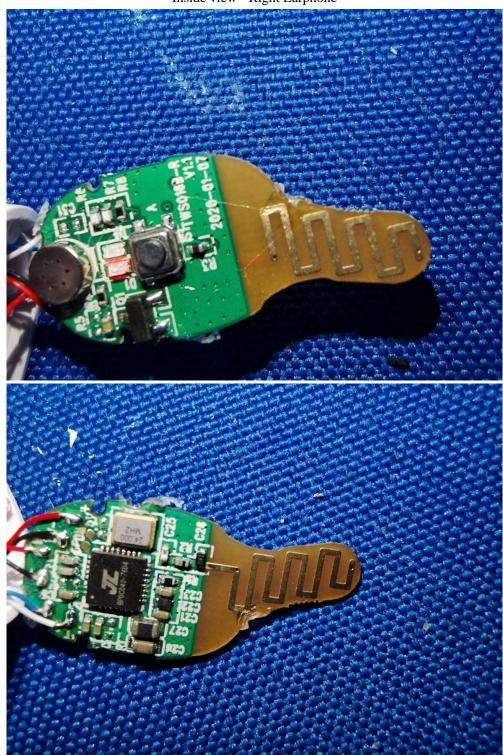

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to