



**FCC 47 CFR PART 15 SUBPART C 15.247**

**TEST REPORT**

**FOR**

**ADSL2+/VDSL2 Wi-Fi Modem Router**

**Model : NV-720S, NV-720XX(X=A-Z,X=0~9 or Blank)**

**Trade Name : Netsys**

**Issued to**

**National Enhance Technology Corp.**

**9F, No. 208, Sec. 3, Tatung Rd., Hsi Chih Dist., New Taipei City 221, Taiwan, R.O.C.**

**Issued by**

**WH Technology Corp.**



<b>Open Site</b>	<b>No.120, Ln. 5, Hudong St., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)</b>	
<b>EMC Test Site</b>	<b>Xizhi Office and Lab</b>	<b>7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)</b>
<b>Tel.: +886-2-7729-7707 Fax: +886-2- 8648-1311</b>		

*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. Personnel only, and shall be noted in the revision section of the document.*



---

## Contents

### Appendix A.

<b>1. General Information .....</b>	<b>3</b>
<b>2. Report of Measurements and Examinations .....</b>	<b>4</b>
2.1 List of Measurements and Examinations .....	5
<b>3. Test Configuration of Equipment under Test .....</b>	<b>6</b>
3.1 Description of the tested samples .....	6
3.2 Carrier Frequency of Channels .....	7
3.3 Test Mode and Test Software .....	8
3.4 TEST Methodology & General Test Procedures .....	9
3.5 Measurement Uncertainty .....	10
3.6 Description of the Support Equipments .....	10
<b>4. Test and measurement equipment .....</b>	<b>10</b>
4.1 calibration .....	11
4.2 equipment .....	11
<b>5. Antenna Requirements .....</b>	<b>14</b>
5.1 Standard Applicable .....	14
5.2 Antenna Construction and Directional Gain .....	14
<b>6. Test of Conducted Emission .....</b>	<b>15</b>
6.1 Test Limit .....	15
6.2 Test Procedures .....	15
6.3 Typical Test Setup .....	16
6.4 Test Result and Data .....	17
<b>7. Test of Radiated Emission .....</b>	<b>19</b>
7.1 Test Limit .....	19
7.2 Test Procedures .....	19
7.3 Typical Test Setup .....	21
7.4 Test Result and Data (9kHz ~ 30MHz) .....	22
7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found) .....	22
7.6 Test Result and Data (Above 1GHz) .....	24
<b>8. 6dB Bandwidth Measurement Data .....</b>	<b>28</b>
8.1 Test Limit .....	28
8.2 Test Procedures .....	28
8.3 Test Setup Layout .....	28
8.4 Test Result and Data .....	29
<b>9. Maximum Peak and Average Output Power .....</b>	<b>36</b>
9.1 Test Limit .....	36
9.2 Test Procedures .....	36



---

9.3	Test Setup Layout .....	36
9.4	Test Result and Data .....	37
<b>10.</b>	<b>Power Spectral Density .....</b>	<b>42</b>
10.1	Test Limit .....	42
10.2	Test Procedures .....	42
10.3	Test Setup Layout .....	42
10.4	Test Result and Data .....	43
<b>11.</b>	<b>Band Edges Measurement .....</b>	<b>50</b>
11.1	Test Limit .....	50
11.2	Test Procedure .....	50
11.3	Test Setup Layout .....	50
11.4	Test Result and Data .....	51
11.5	Restrict Band Emission Measurement Data .....	56
<b>12.</b>	<b>Restricted Bands of Operation .....</b>	<b>60</b>
12.1	Labeling Requirement .....	60



## 1. General Information

**Applicant** : National Enhance Technology Corp.

**Address** : 9F, No. 208, Sec. 3, Tatung Rd., Hsi Chih Dist., New Taipei City 221, Taiwan, R.O.C.

**Manufacturer** : National Enhance Technology Corp.

**Address** : 9F, No. 208, Sec. 3, Tatung Rd., Hsi Chih Dist., New Taipei City 221, Taiwan, R.O.C.

**EUT** : ADSL2+/VDSL2 Wi-Fi Modem Router

**Model Name** : NV-720S, NV-720XX(X=A-Z,X=0~9 or Blank)

**Model Differences** : For marketing purpose

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.10:2013. The said equipment in the configuration described in this report shows the maximum emission levels emanating

### FCC part 15 subpart C

Receipt Date : 12/14/2017

Final Test Date : 02/21/2018

**Tested By:**

**Reviewed by:**

Feb. 21, 2018

**Date**

Bell Wei/ Engineer

Feb. 21, 2018

**Date**

Mike Lee / Manager  
Designation Number: TW2954



## 2. Report of Measurements and Examinations

### 2.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

### 3G and 4G tested and evaluated in below reports.

SIM7100A	美國/USA	FCC	( LGA ) FCC ID : UDV-SIM7100A Report No. : UL15820141117FCC036
SIM7100A	美國/USA	FCC	( PCIE ) FCC ID : UDV-SIM7100A Report No. : UL15820141117FCC036



### 3. Test Configuration of Equipment under Test

#### 3.1 Description of the tested samples

EUT Name : ADSL2+/VDSL2 Wi-Fi Modem Router

Model Number : NV-720S

FCCID : 2AOKZNV720XX

Receipt Date : 12/14/2017

Input Voltage : AC 110V

Power From : Inside Outside  
Adaptor Battery AC Power Source DC Power Source  
Support Unit PC

Operate Frequency : Refer to the channel list as described below (2.412 ~2.462 GHz)

Modulation Technique : 802.11b : 11 Mbps  
802.11g : 54 Mbps  
802.11n HT20 : 130 Mbps  
802.11n HT40 : 135 Mbps

Number of Channels : 802.11b, 802.11g, 802.11n, HT20 : 11  
802.11n, HT40 : 7

Channel spacing : N/A  5 MHz

Operating Mode : Simplex Half Duplex

Antenna Type : dipole antenna

Channel bandwidth : 5 MHz

Antenna gain : 2 dBi



### 3.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n, HT 40 (2422MHz~2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
03	2422	07	2442
04	2427	08	2447
05	2432	09	2452
06	2437	---	---



### **3.3 Test Mode and Test Software**

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive "QATool.exe" under WIN7 was executed to keep transmitting and receiving data via Wireless.
- d. The following test modes were performed for test:
  - 802.11b/g/n HT20: CH01: 2412MHz, CH06: 2437MHz, CH11: 2462MHz
  - 802.11n HT40: CH03: 2422MHz, CH06: 2437MHz, CH09: 2452MHz





## 3.4 TEST Methodology & General Test Procedures

All testing as described bellowed were performed in accordance with ANSI C63.10 and FCC CFR 47 Part 15 Subpart C.

### Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.10. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

### Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

- 1) Putting the EUT on the platform and turning on the EUT (on/off button on the bottom of the EUT).
- 2) Setting test channel described as “Channel setting and operating condition”, and testing channel by channel.
- 3) For the maximum output power measurement, we followed the method of measurement KDB558074 D01.
- 4) For the spurious emission test based on ANSI(2014), at the frequency where below 1GHz used quasi-peak detector mode; where above 1GHz used the peak and average detector mode. IF the peak value may be under average limit, the average mode will not be performed.



### 3.5 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated emission	$\pm 4.11$ dB
Peak Output Power(conducted)	$\pm 1.38$ dB
Peak Output Power(Radiated)	$\pm 1.70$ dB
Power Spectral Density	$\pm 1.39$ dB
Radiated emission(3m)	$\pm 4.11$ dB
Radiated emission(10m)	$\pm 3.89$ dB

### 3.6 Description of the Support Equipments

#### Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

#### Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	Notebook	HSTNN-Q95 C	5CD5514J LJ	R3A304	HP	N/A	Unshielded 1.8m
INSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	AC ADAPTER	Yes12W	N/A	N/A	N/A	N/A	N/A

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.

## 4. Test and measurement equipment



#### **4.1 calibration**

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

#### **4.2 equipment**

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.



## TABLELIST OF TEST AND MEASUREMENT EQUIPMENT

Test Site	Instrument	Manufacturer	Model No.	S/N	Next Cal. Date
Conduction	Spectrum (9K--3GHz)	R&S	FSP3	833387/010	2018/12/07
	EMI Receiver	R&S	ESHS10	830223/008	2018/06/06
	LISN	Rolf Heine Hochfrequenztechnik	NNB-2/16z	98062	2018/06/11
	ISN	Schwarzbeck	8-Wire ISN CAT5	CAT5-8158-0094	2018/10/19
	RF Cable	N/A	N/A	EMI-3	2018/10/17
Radiation	Bilog antenna(30M-1G)	ETC	MCTD2786B	BLB16M04004/JB-5-004	2018/05/18
	Double Ridged Guide Horn antenna(1G-18G)	ETC	MCTD 1209	DRH15N02009	2018/11/28
	Horn antenna (18G-26G)	com-power	AH-826	81000	2018/08/16
	LOOP Antenna (Below 30M)	com-power	AL-130	17117	2018/11/12
	Pre amplifier (30M-1G)	EMC INSTRUMENT	EMC9135	980334	2018/05/03
	Microwave Preamplifier (1G-18G)	EMC INSTRUMENT	EMC051845	980108&A T -18001	2018/11/27
	Pre amplifier (18G~26G)	MITEQ	JS4-18002600-30-5A	808329	2018/08/09
	EMI Test	R&S	ESVS30	826006/002	2018/11/07



---

	Receiver		(20M-1000MHz)		
	RF Cable (open site)	EMCI	N male on end of both sides (EMI4)	30m	2018/11/09
	RF CABLE (1~26G)	HARBOUT INDUSTRIES	LL142MI(4M+4M)	NA	2017/04/17
	RF CABLE (1~26G)	HARBOUR INDUSTRIES	LL142MI(7M)	NA	2018/08/09
	Spectrum (9K--7GHz)	R&S	FSP7	830180/006	2018/04/14
	Spectrum (9K--40GHz)	AGILENT	8564EC	4046A0032	2018/03/01
Software	e3	AUDIX	N/A	N/A	N/A
SG	SINGAL GENERATOR (100k-1GHz)	HP	8648A	3619U0042 6	N/A

**\*CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR**



## **5. Antenna Requirements**

### **5.1 Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **5.2 Antenna Construction and Directional Gain**

#### **802.11b/g/n:**

Antenna Type:dipole antenna

Antenna Gain: 2 dBi



## 6. Test of Conducted Emission

### 6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2014 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 6.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



### 6.3 Typical Test Setup

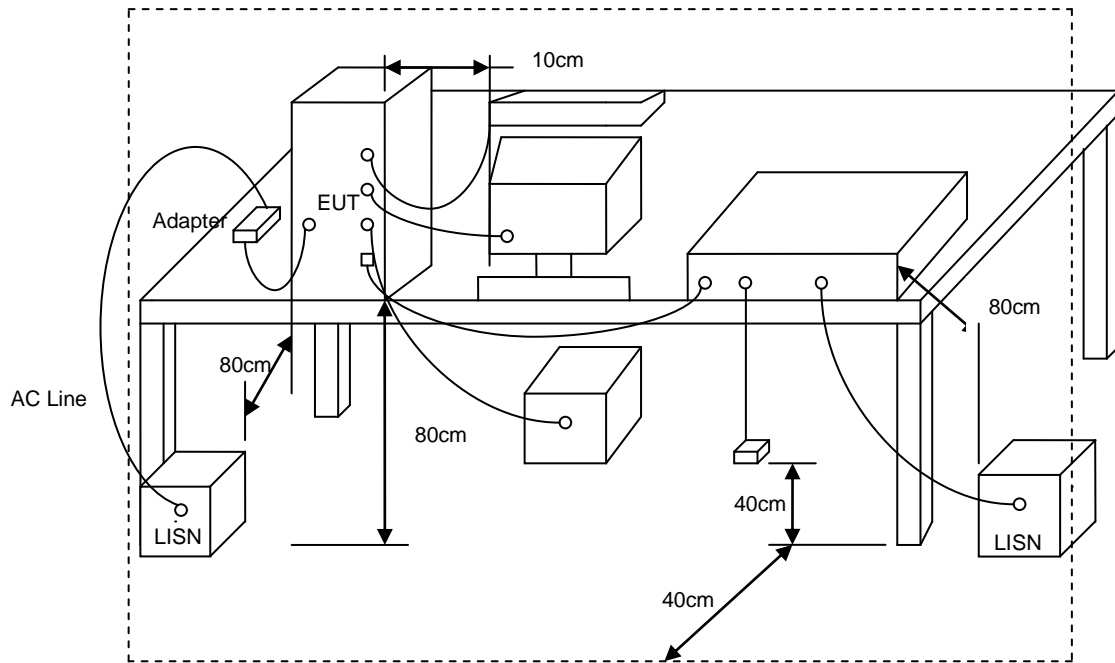






**6.4 Test Result and Data**

Power	: AC 110V	Pol/Phase	: LINE
Test Mode	: TX b CH11 2462MHz	Temperature	: 18 °C
Memo	:	Humidity	: 53 %

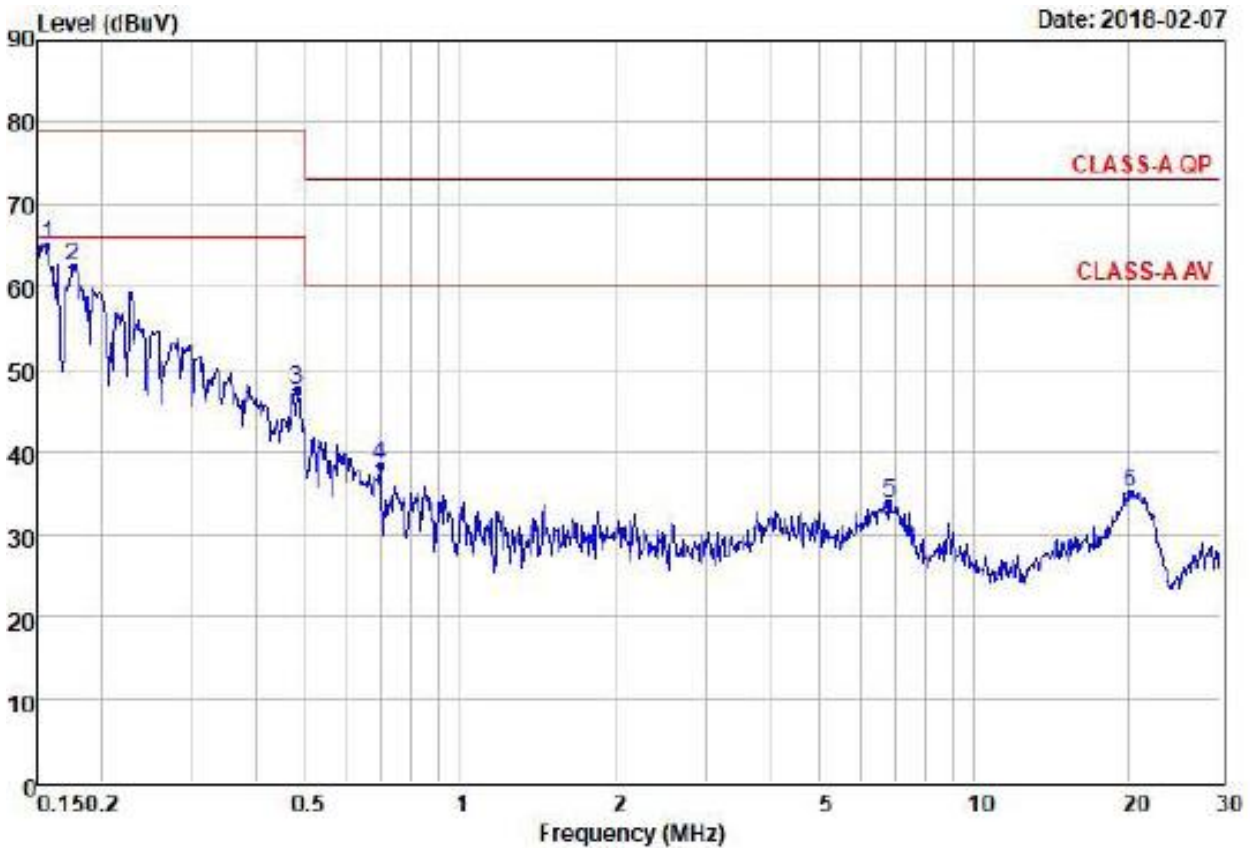


Remarks:

: Factor=Insertion loss+Cable loss

	Read	Over	Limit			
Freq	Level	Level	Factor	Limit	Line	Remark
MHz	dBuV	dBuV	dB	dB	dBuV	
1	55.10	65.22	10.12	-13.78	79.00	Peak
2	52.36	62.48	10.12	-16.52	79.00	Peak
3	37.34	47.48	10.14	-31.52	79.00	Peak
4	28.24	38.39	10.15	-34.61	73.00	Peak
5	23.45	33.82	10.37	-39.18	73.00	Peak
6	24.47	35.10	10.63	-37.90	73.00	Peak



Power	: AC 110V	Pol/Phase	: NEUTRAL
Test Mode	: TX b CH11 2462MHz	Temperature	: 18 °C
Memo	:	Humidity	: 53 %

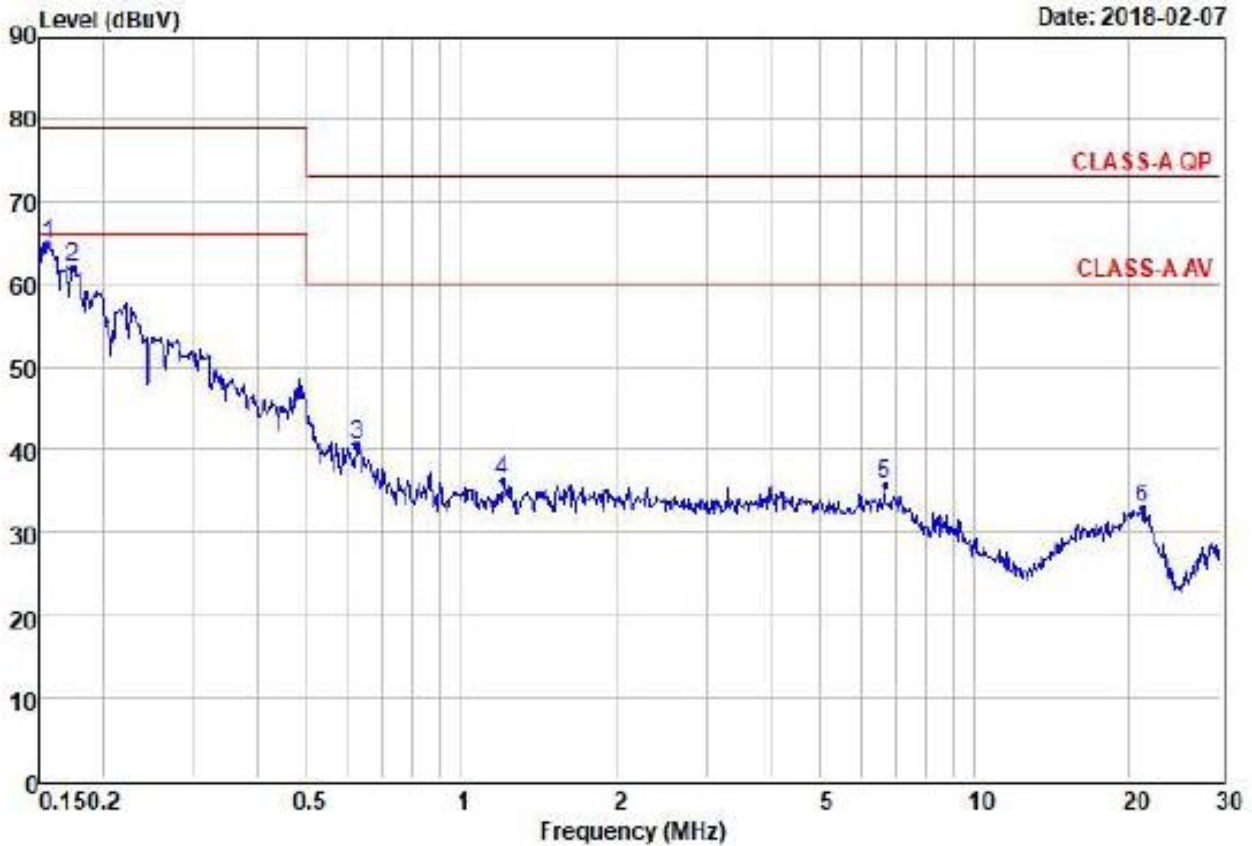

Remarks:

: Factor=Insertion loss+Cable loss

	Read	Over	Limit			
Freq	Level	Level	Factor	Limit	Line	Remark
MHz	dBuV	dBuV	dB	dB	dBuV	
1	54.72	64.91	10.19	-14.09	79.00	Peak
2	51.90	62.10	10.20	-16.90	79.00	Peak
3	30.41	40.65	10.24	-32.35	73.00	Peak
4	25.84	36.12	10.28	-36.88	73.00	Peak
5	25.30	35.82	10.52	-37.18	73.00	Peak
6	22.02	32.78	10.76	-40.22	73.00	Peak



## 7. Test of Radiated Emission

### 7.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 7.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than




average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




### 7.3 Typical Test Setup


For radiated emissions below 30MHz

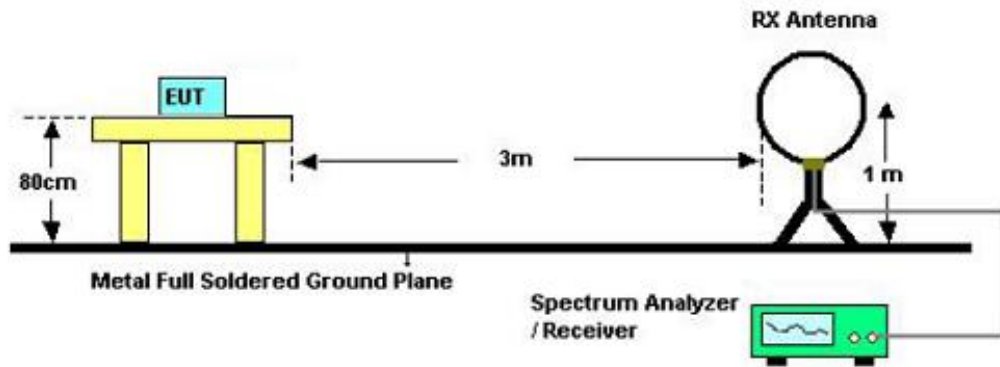

For radiated emissions above 30MHz

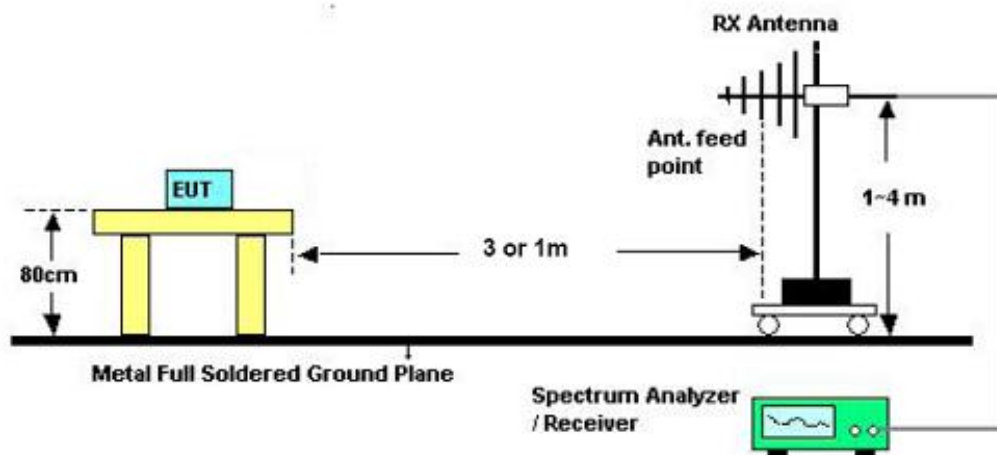

For radiated emissions above 1GHz

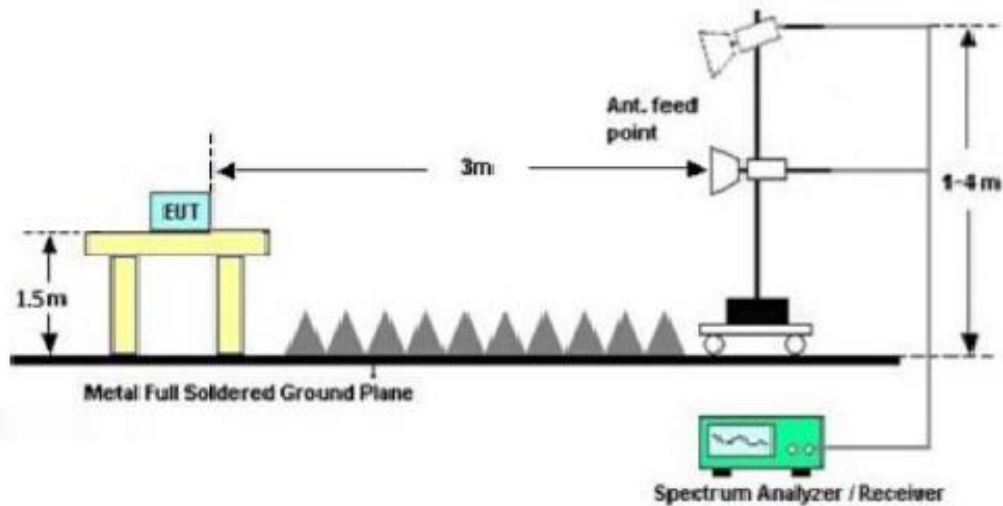




**7.4 Test Result and Data (9kHz ~ 30MHz)**

The 9kHz - 30MHz spurious emission is under limit 20dB more.

VERTICAL

**7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)**

Power	: AC 110V	Pol/Phase	: HORIZONTAL
Test Mode	: TX b CH11 2462MHz	Temperature	: 16 °C
Memo	:	Humidity	: 73 %

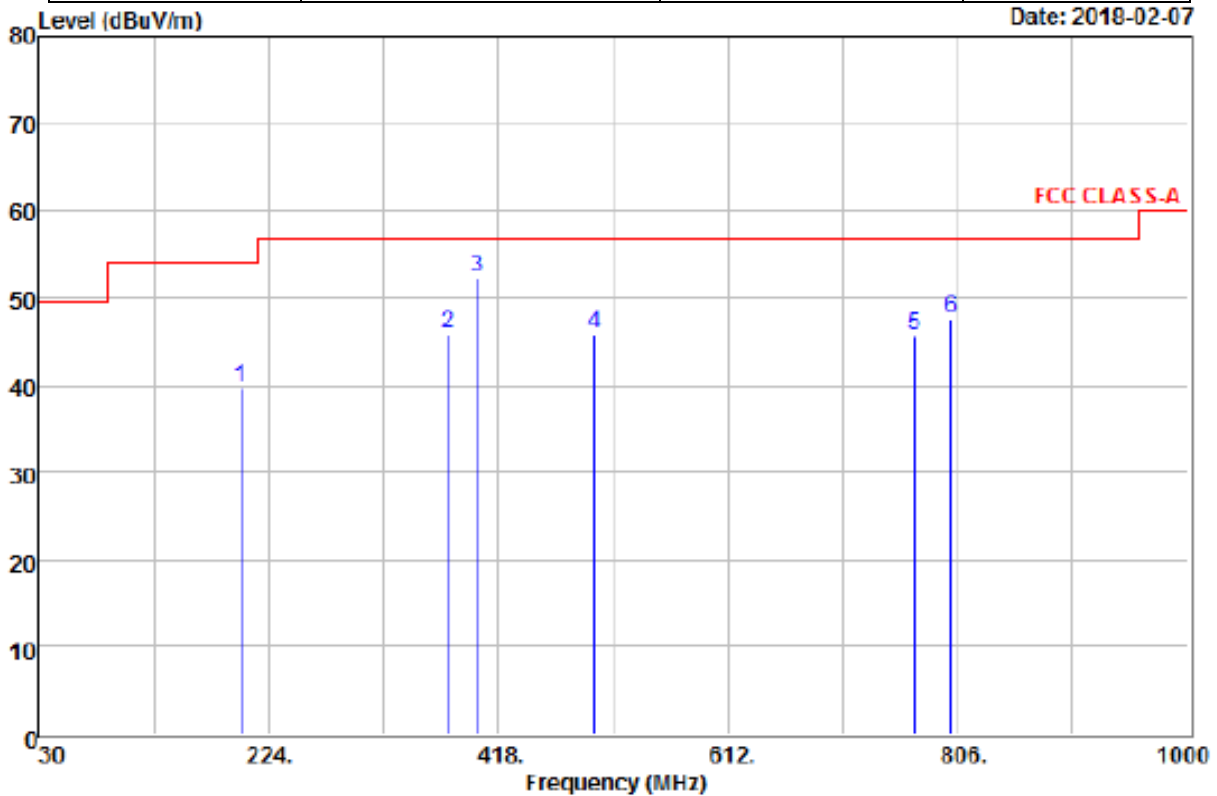


**Remarks:**  
 : 1.Result=Read Value+ Factor  
 : 2.Factor=Antenna Factor+Cable loss-  
 : Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	200.720	58.27	-18.59	39.68	54.00	-14.32	QP
2	375.320	57.57	-11.74	45.83	56.90	-11.07	QP
3 @	400.540	63.36	-10.99	52.37	56.90	-4.53	QP
4	499.480	55.43	-9.54	45.89	56.90	-11.01	QP
5	769.140	51.56	-5.98	45.58	56.90	-11.32	QP
6	800.180	53.00	-5.37	47.63	56.90	-9.27	QP



Power	: AC 110V	Pol/Phase	: VERTICAL
Test Mode	: TX b CH11 2462MHz	Temperature	: 16 °C
Memo	:	Humidity	: 73 %

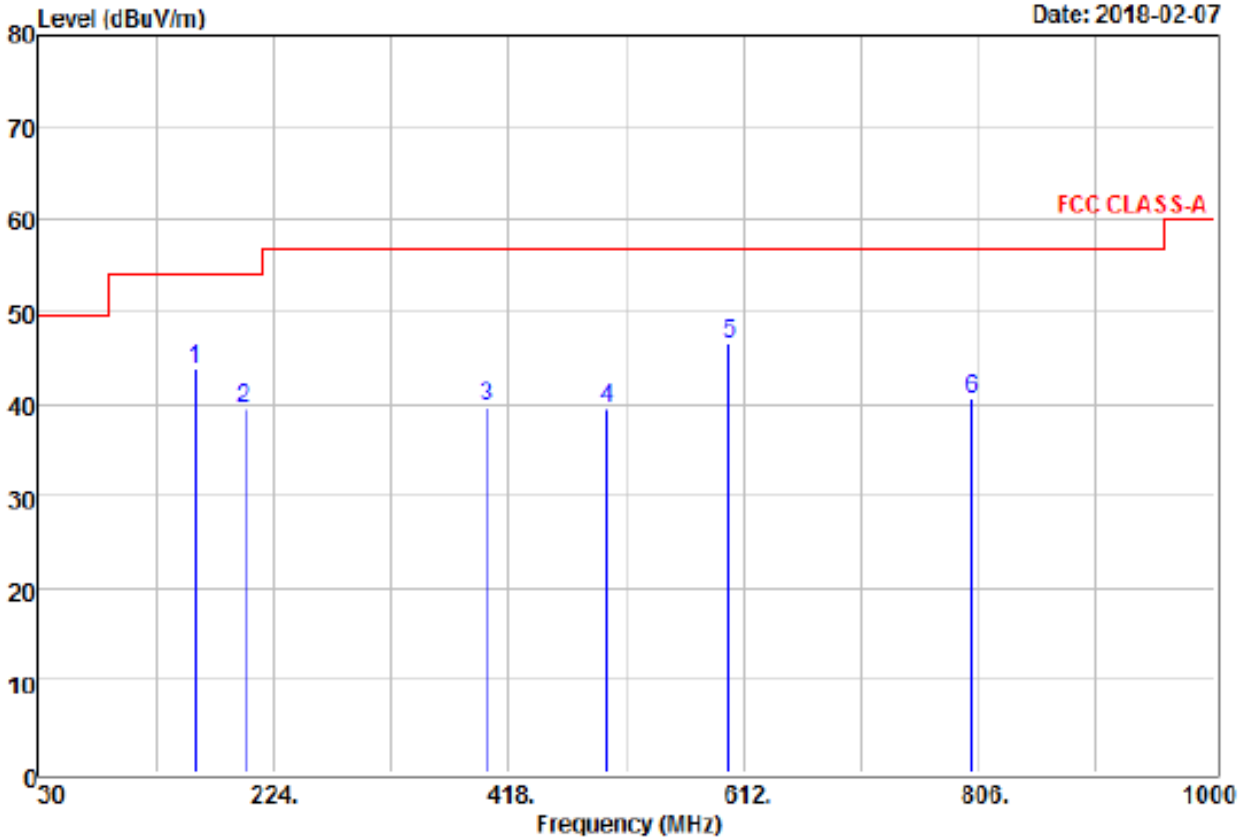

**Remarks:**       : 1.Result=Read Value+Factor  
                       : 2.Factor=Antenna Factor+Cable loss-  
                       : Amplifier Factor

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 @	159.980	60.92	-17.23	43.69	54.00	-10.31	QP
2	200.720	58.04	-18.59	39.45	54.00	-14.55	QP
3	400.540	50.76	-10.99	39.77	56.90	-17.13	QP
4	499.480	49.06	-9.54	39.52	56.90	-17.38	QP
5	600.360	55.43	-8.88	46.55	56.90	-10.35	QP
6	800.180	45.83	-5.37	40.46	56.90	-16.44	QP



**7.6 Test Result and Data (Above 1GHz)**

Power	: AC 110V	Test Date	: 2018/02/07
Temperature	: 16 °C	Humidity	: 73 %
Test Mode	802.11b		

**1GHz—25GHz Radiated emission Test result**

Channel 1		Fundamental Frequency: 2412 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4824.00	H	56.96	-6.37	50.59	Peak	74	54	-23.41
---	H	---	---	---	Ave	74	54	---
4824.00	V	55.30	-6.37	48.93	Peak	74	54	-25.07
---	V	---	---	---	Ave	74	54	---
Channel 6		Fundamental Frequency: 2437 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4874.00	H	56.92	-6.22	50.70	Peak	74	54	-23.30
---	H	---	---	---	Ave	74	54	---
4874.00	V	55.86	-6.22	49.64	Peak	74	54	-24.36
---	V	---	---	---	Ave	74	54	---
Channel 11		Fundamental Frequency: 2462 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4924.00	H	56.47	-6.07	50.40	Peak	74	54	-23.60
---	H	---	---	---	Ave	74	54	---
4924.00	V	55.32	-6.07	49.25	Peak	74	54	-24.75
---	V	---	---	---	Ave	74	54	---

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. Measuring frequency from 1GHz to 25GHz
4. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
6. Peak detector measurement data will represent the worst case results.
7. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
8. The other emission levels were 20dB below the limit.





Power	: AC 110V	Test Date	: 2018/02/07
Temperature	: 16 °C	Humidity	: 73 %
Test Mode	802.11g		

## 1GHz—25GHz Radiated emission Test result

Channel 1		Fundamental Frequency: 2412 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4824.00	H	56.16	-6.37	49.79	Peak	74	54	-24.21
---	H	---	---	---	Ave	74	54	---
4824.00	V	55.23	-6.37	48.86	Peak	74	54	-24.78
---	V	---	---	---	Ave	74	54	---
Channel 6		Fundamental Frequency: 2437 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4874.00	H	56.44	-6.22	50.22	Peak	74	54	-24.78
---	H	---	---	---	Ave	74	54	---
4874.00	V	55.44	-6.22	49.22	Peak	74	54	-24.36
---	V	---	---	---	Ave	74	54	---
Channel 11		Fundamental Frequency: 2462 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4924.00	H	55.68	-6.07	49.61	Peak	74	54	-24.21
---	H	---	---	---	Ave	74	54	---
4924.00	V	54.67	-6.07	48.60	Peak	74	54	-25.40
---	V	---	---	---	Ave	74	54	---

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. Measuring frequency from 1GHz to 25GHz
4. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
6. Peak detector measurement data will represent the worst case results.
7. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
8. The other emission levels were 20dB below the limit.



Power	: AC 110V	Test Date	: 2018/02/07
Temperature	: 16 °C	Humidity	: 73 %
Test Mode	802.11n HT20		

## 1GHz—25GHz Radiated emission Test result

Channel 1		Fundamental Frequency: 2412 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4824.00	H	56.41	-6.37	50.04	Peak	74	54	-23.96
---	H	---	---	---	Ave	74	54	---
4824.00	V	55.14	-6.37	48.77	Peak	74	54	-25.23
---	V	---	---	---	Ave	74	54	---
Channel 6		Fundamental Frequency: 2437 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4874.00	H	56.47	-6.22	50.25	Peak	74	54	-23.75
---	H	---	---	---	Ave	74	54	---
4874.00	V	55.41	-6.22	49.19	Peak	74	54	-24.81
---	V	---	---	---	Ave	74	54	---
Channel 11		Fundamental Frequency: 2462 MHz						
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4924.00	H	55.90	-6.07	49.83	Peak	74	54	-24.17
---	H	---	---	---	Ave	74	54	---
4924.00	V	54.55	-6.07	48.48	Peak	74	54	-25.52
---	V	---	---	---	Ave	74	54	---

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. Measuring frequency from 1GHz to 25GHz
4. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
6. Peak detector measurement data will represent the worst case results.
7. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
8. The other emission levels were 20dB below the limit.



Power	: AC 110V	Test Date	: 2018/02/07
Temperature	: 16 °C	Humidity	: 73 %
Test Mode	802.11n HT40		

## 1GHz—25GHz Radiated emission Test result

Channel 3

Fundamental Frequency: 2422 MHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4844.00	H	55.35	-6.31	49.04	Peak	74	54	-24.96
---	H	---	---	---	Ave	74	54	---
4844.00	V	54.77	-6.31	48.46	Peak	74	54	-25.54
---	V	---	---	---	Ave	74	54	---

Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4874.00	H	55.98	-6.22	49.76	Peak	74	54	-24.24
---	H	---	---	---	Ave	74	54	---
4874.00	V	55.40	-6.22	49.18	Peak	74	54	-24.82
---	V	---	---	---	Ave	74	54	---

Channel 9

Fundamental Frequency: 2452 MHz

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
4904.00	H	55.38	-6.13	49.25	Peak	74	54	-24.75
---	H	---	---	---	Ave	74	54	---
4904.00	V	54.33	-6.13	48.20	Peak	74	54	-25.80
---	V	---	---	---	Ave	74	54	---

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. Measuring frequency from 1GHz to 25GHz
4. Measurements above 1000 MHz, Peak detector setting: 1 MHz RBW with 1 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10Hz VBW.
6. Peak detector measurement data will represent the worst case results.
7. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
8. The other emission levels were 20dB below the limit.



## 8. 6dB Bandwidth Measurement Data


### 8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and  $VBW \geq 3x RBW$ .
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

### 8.3 Test Setup Layout





#### 8.4 Test Result and Data

Test Date: Feb. 07, 2018

Temperature: 18°C

Atmospheric pressure: 1002 pha


Humidity: 57%

Modulation Standard	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
802.11b (11Mbps)	01	2412	10
	06	2437	10
	11	2462	10
802.11g (6Mbps)	01	2412	16.5
	06	2437	16.5
	11	2462	16.5
802.11n HT20 (6.5Mbps)	01	2412	17.7
	06	2437	17.7
	11	2462	17.7
802.11n HT40 (13.5Mbps)	03	2422	36.32
	06	2437	36.32
	09	2452	36.32




Modulation Standard: 802.11b (11Mbps)

Channel: 01

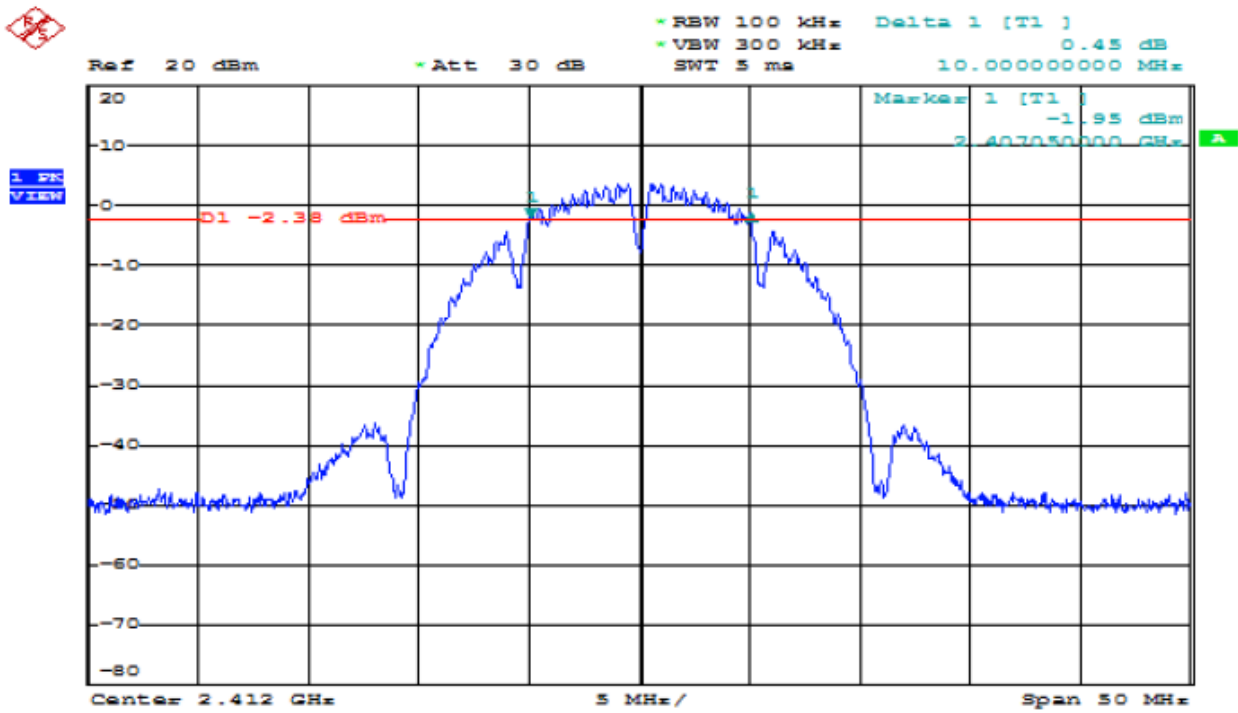

Modulation Standard: 802.11b (11Mbps)


Channel: 06

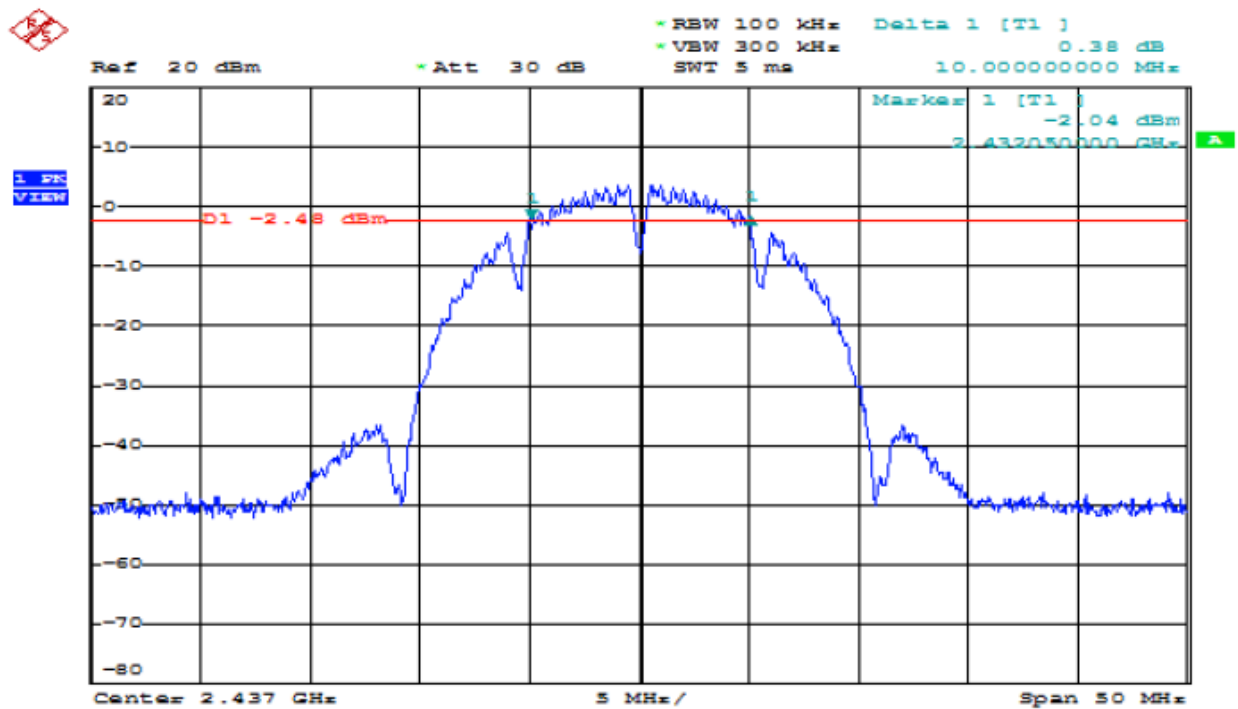




Modulation Standard: 802.11b (11Mbps)

Channel: 11

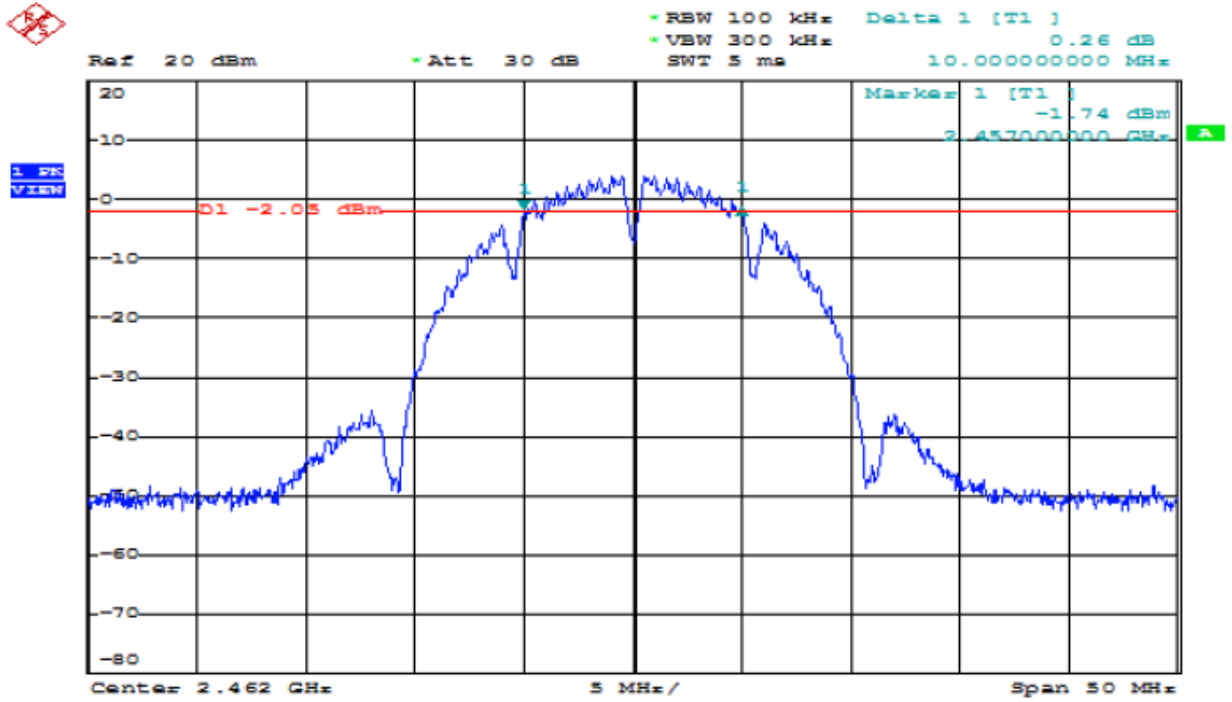

Modulation Standard: 802.11g (6Mbps)


Channel: 01

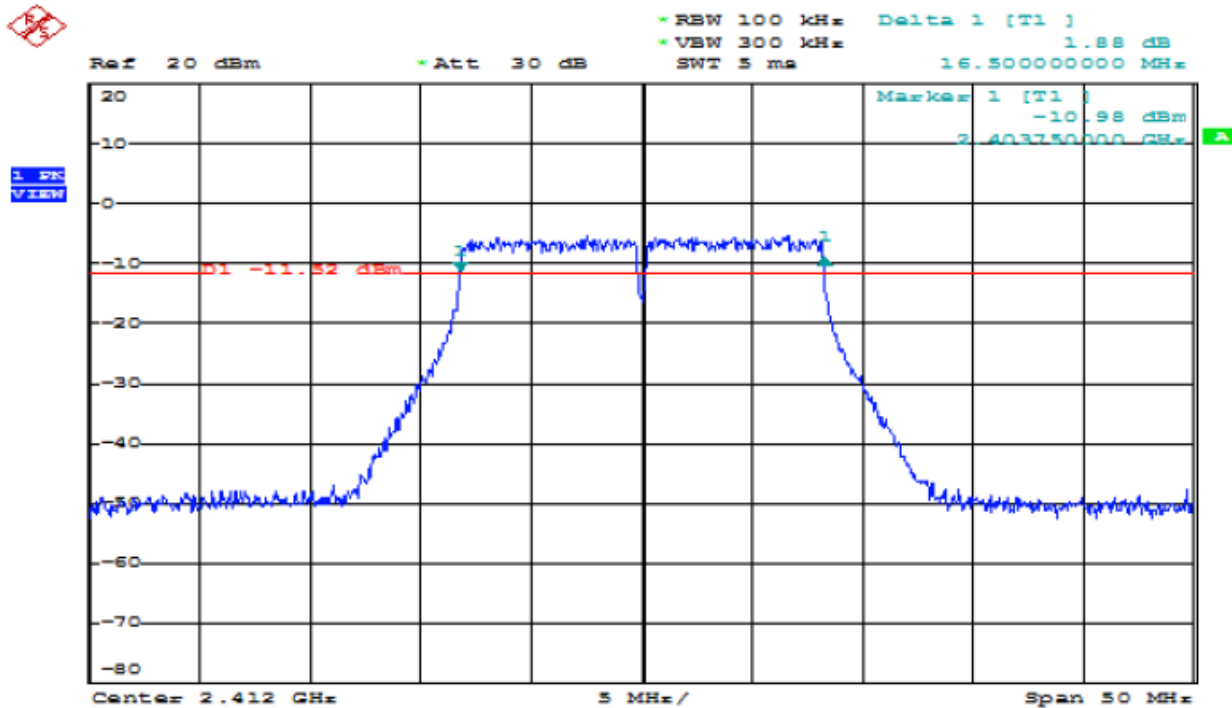




Modulation Standard: 802.11g (6Mbps)

Channel: 06

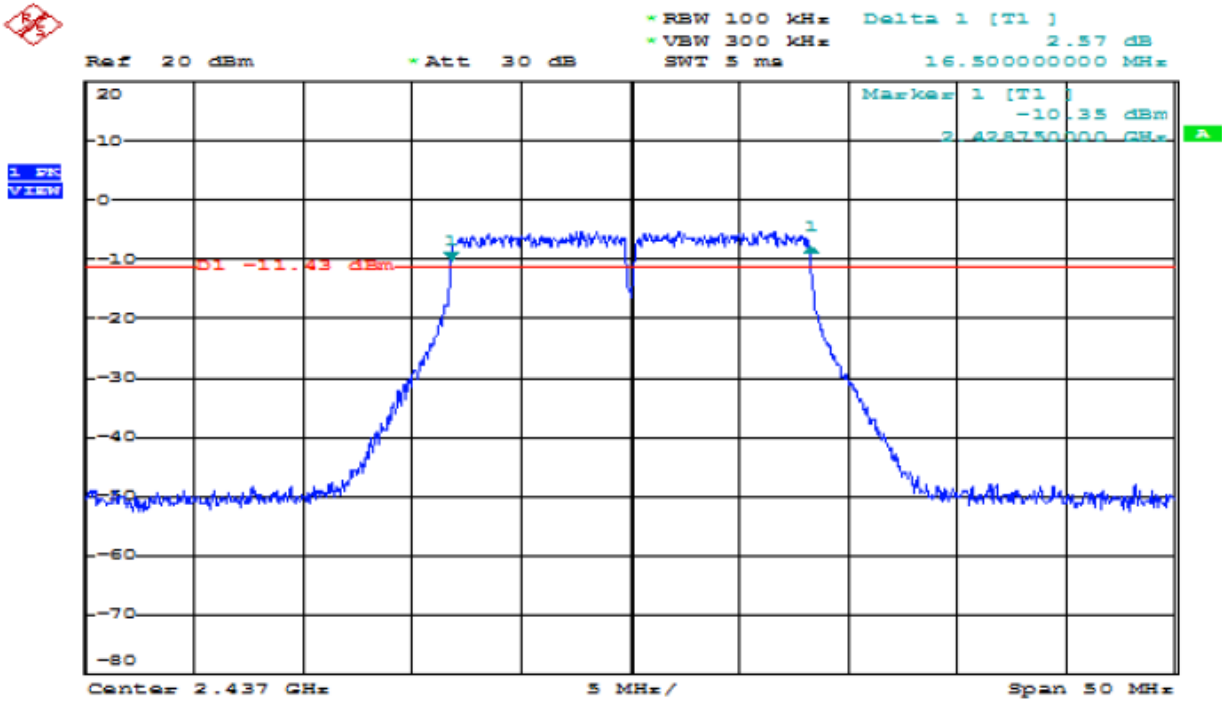

Modulation Standard: 802.11g (6Mbps)


Channel: 11

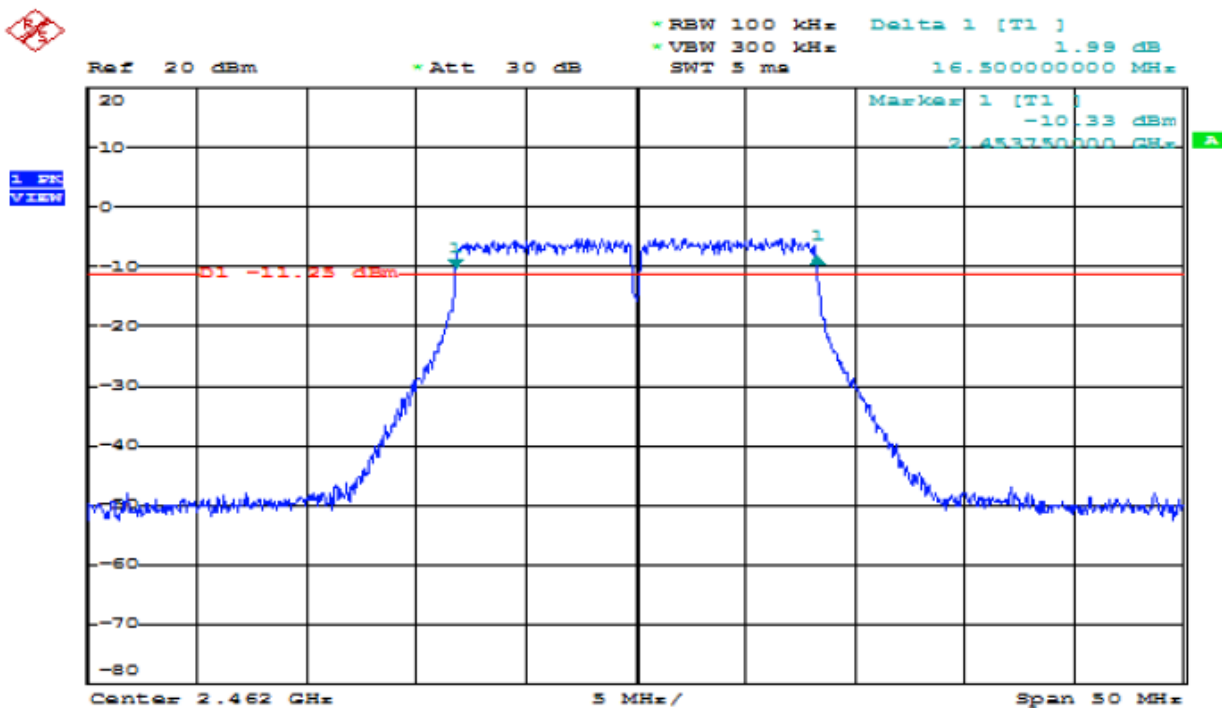






Modulation Standard: 802.11n HT20 (6.5Mbps)  
Channel: 01

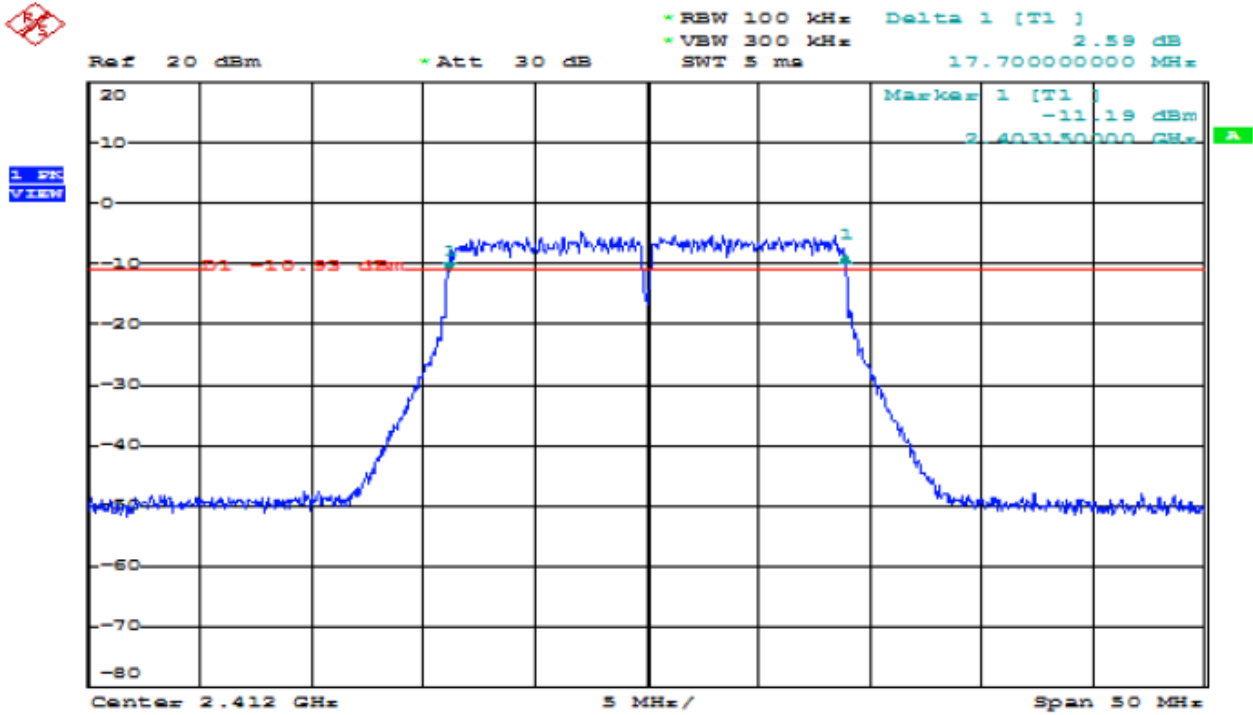


Modulation Standard: 802.11n HT20 (6.5Mbps)  
Channel: 06

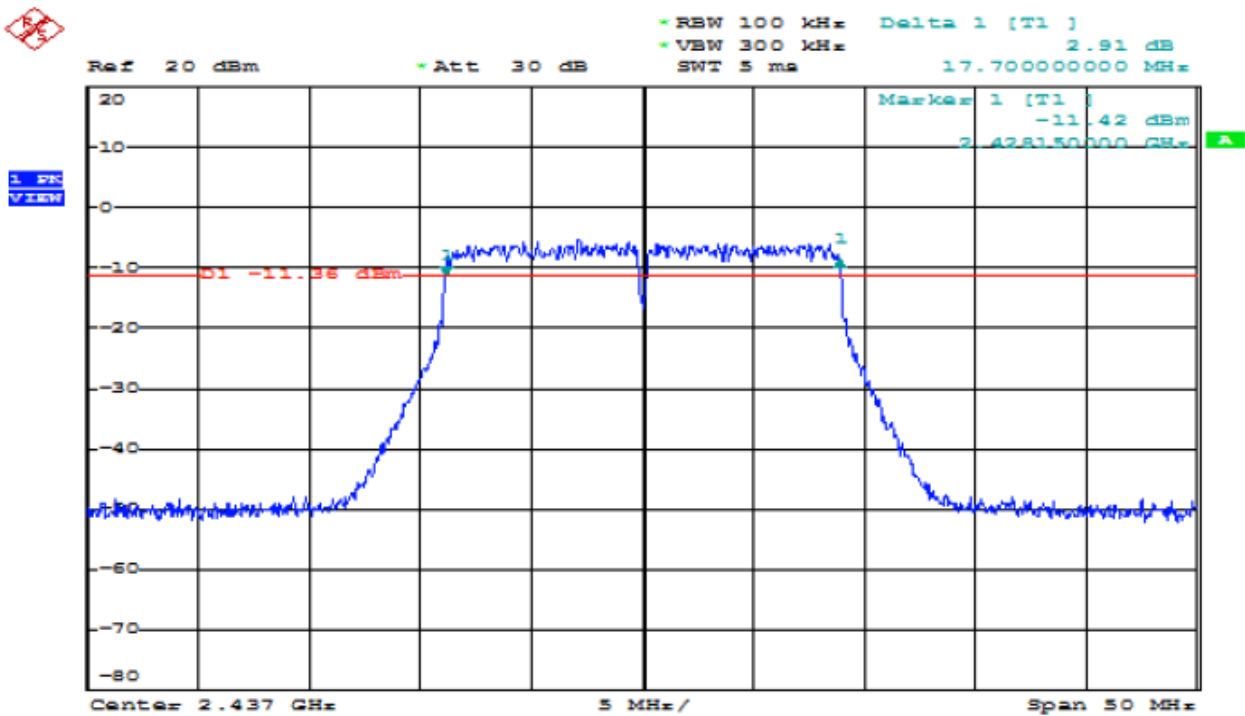




Modulation Standard: 802.11n HT20 (6.5Mbps)

Channel: 11

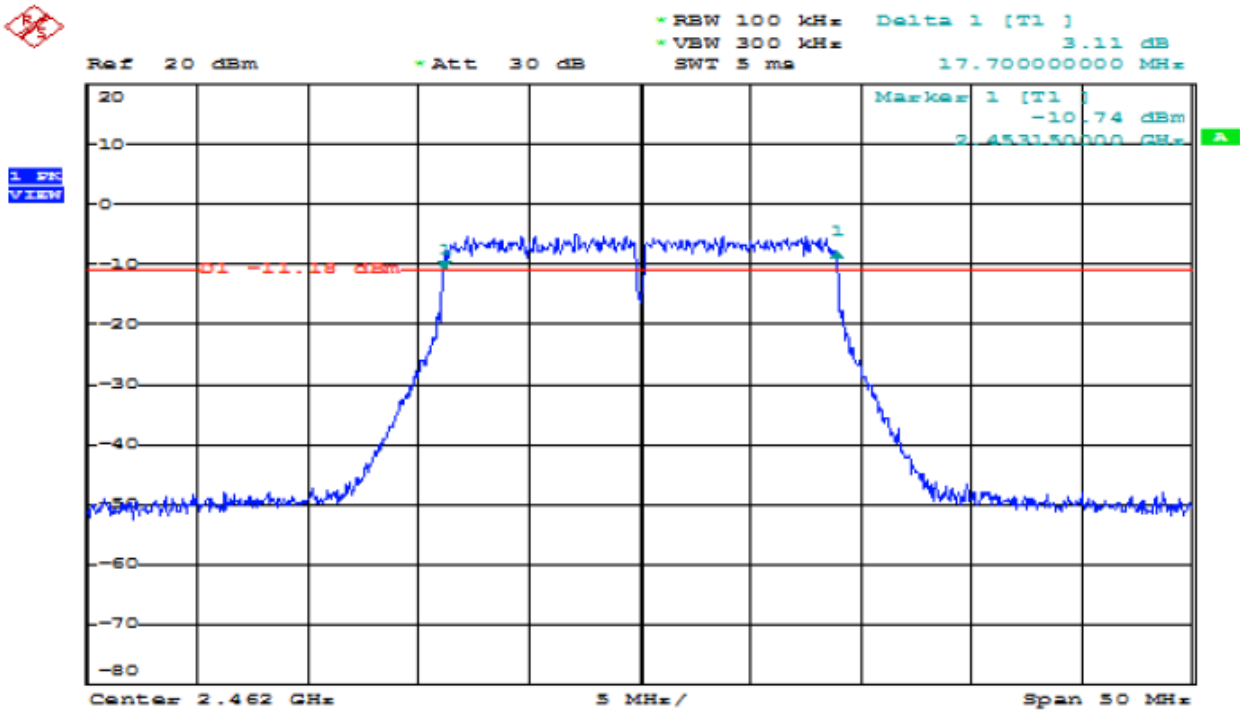

Modulation Standard: 802.11n HT40 (13.5Mbps)


Channel: 03

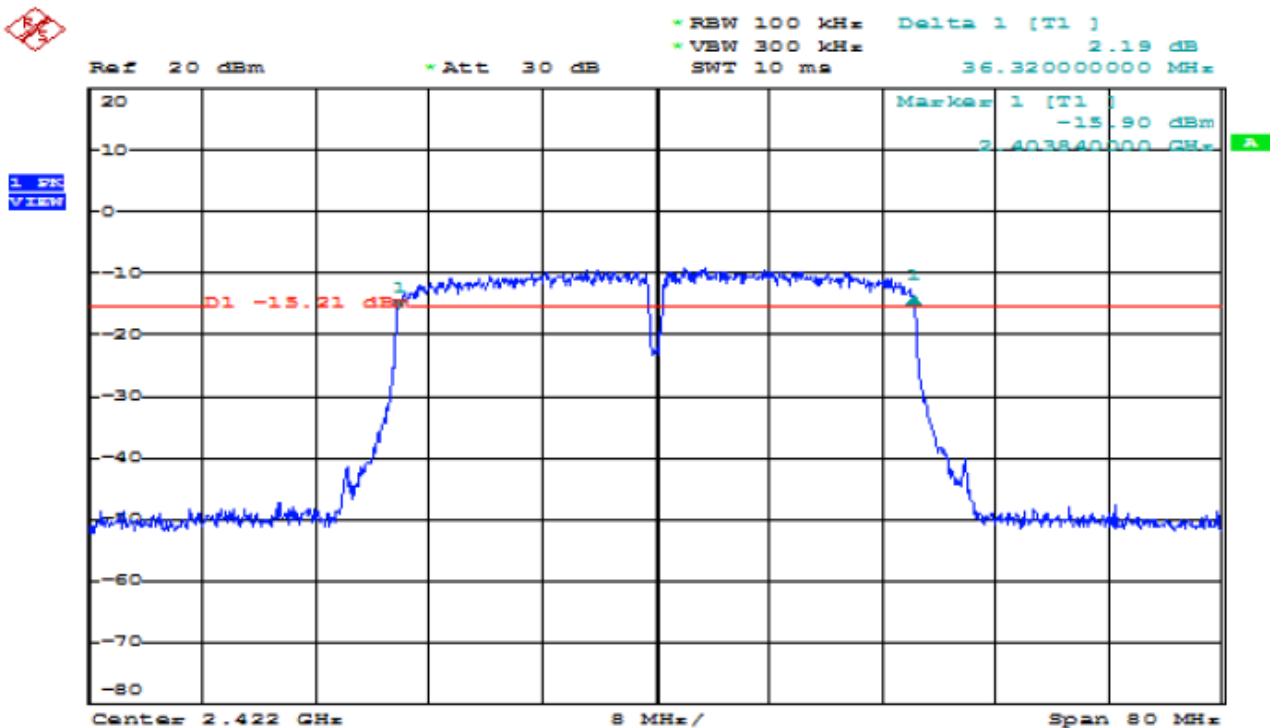




Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 06

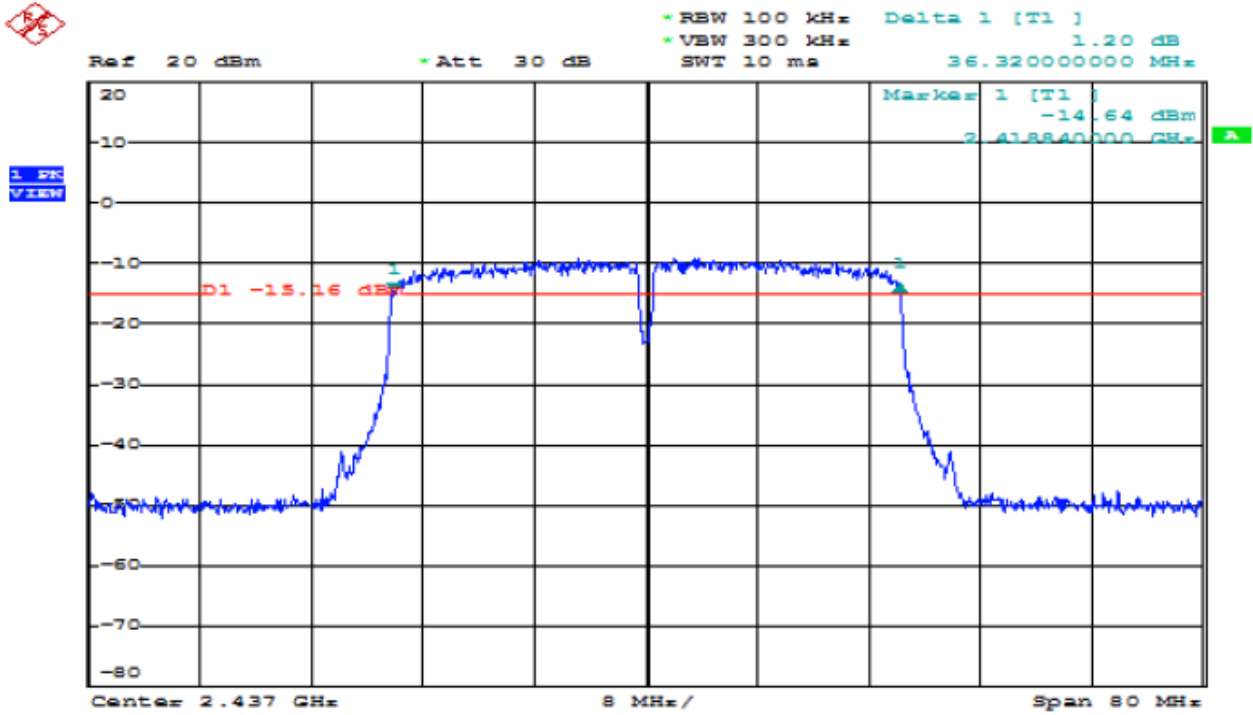

Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 09

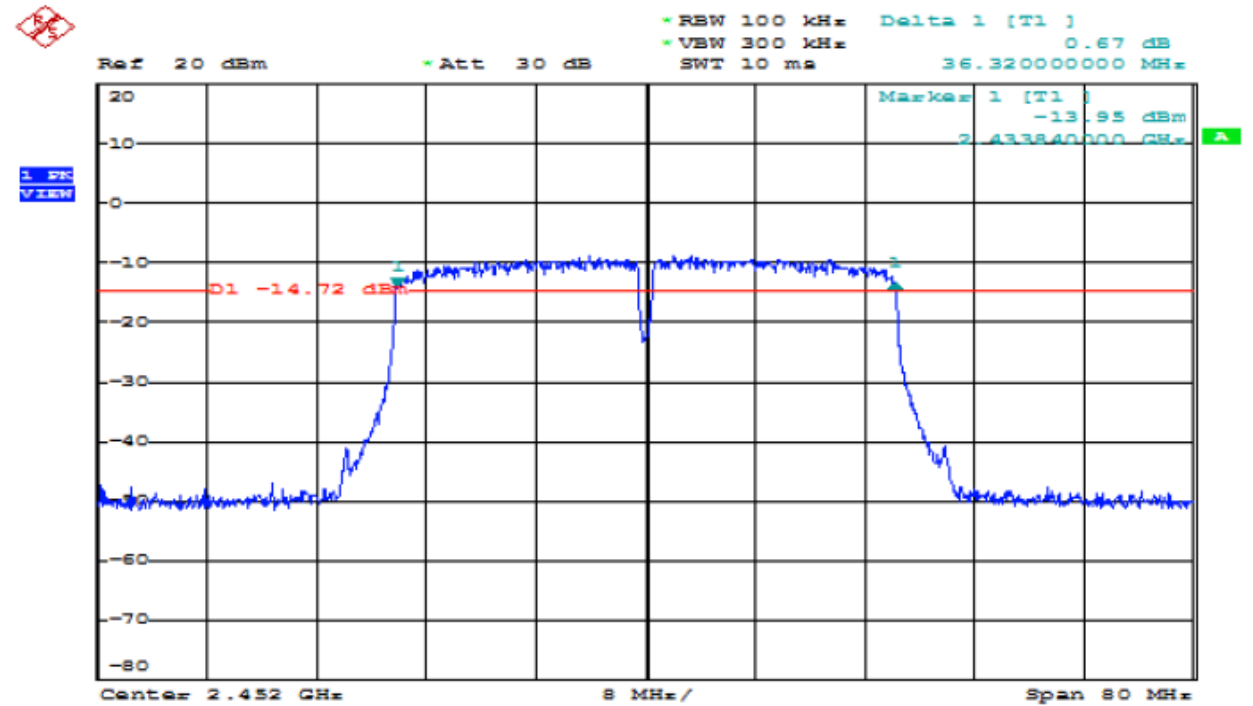



## 9. Maximum Peak Output Power


### 9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

### 9.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 1MHz RBW and 3MHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector).
- d. Employ trace averaging in power averaging (RMS) mode over a minimum of 100 traces.
- e. Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges.
- f. The peak and average output power was measured and recorded.

### 9.3 Test Setup Layout





## 9.4 Test Result and Data

Test Date: Feb. 07, 2018

Temperature: 18°C

Atmospheric pressure: 1002 pha

Humidity: 57%

Modulation Standard	Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output(W)
802.11b (11Mbps)	01	2412	17.23	0.052803
	06	2437	17.74	0.059416
	11	2462	18.09	0.064417
802.11g (6Mbps)	01	2412	16.31	0.042793
	06	2437	16.76	0.047441
	11	2462	17.20	0.052584


Modulation Standard	Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (W)
802.11n HT20 (6.5Mbps)	01	2412	16.65	0.046217
	06	2437	17.01	0.050250
	11	2462	17.36	0.054456
802.11n HT40 (13.5Mbps)	03	2422	15.83	0.038249
	06	2437	16.19	0.041625
	09	2452	16.44	0.044022



## Peak Output Power


Modulation Standard: 802.11b (11Mbps)

Channel: 01

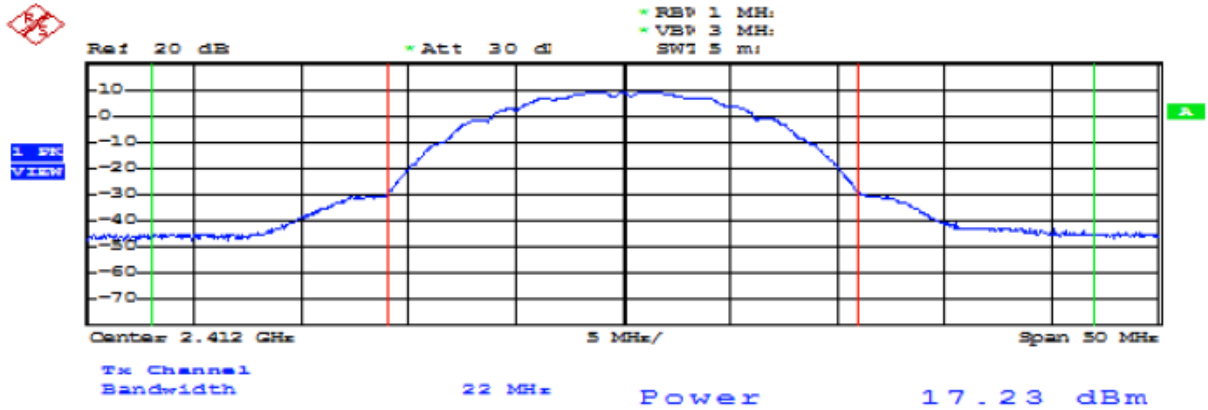


Modulation Standard: 802.11b (11Mbps)

Channel: 06

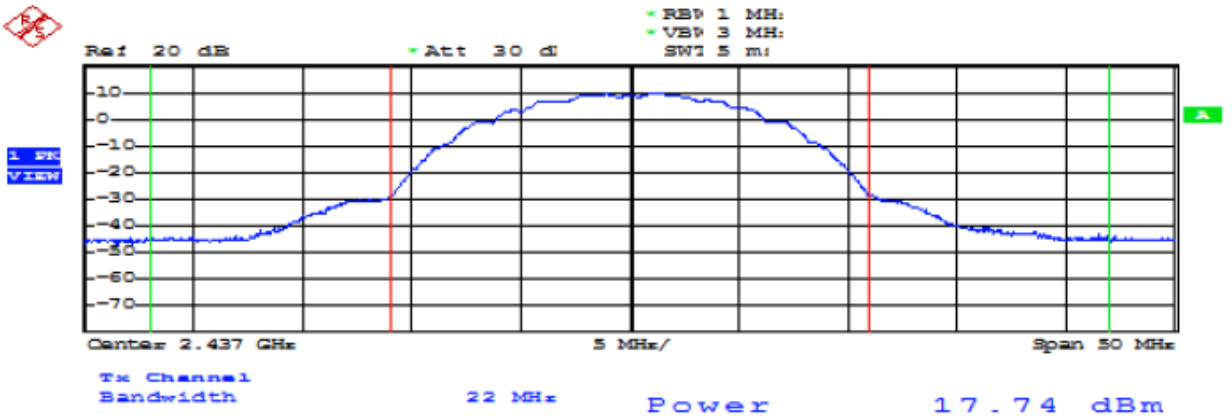

Modulation Standard: 802.11b (11Mbps)


Channel: 11

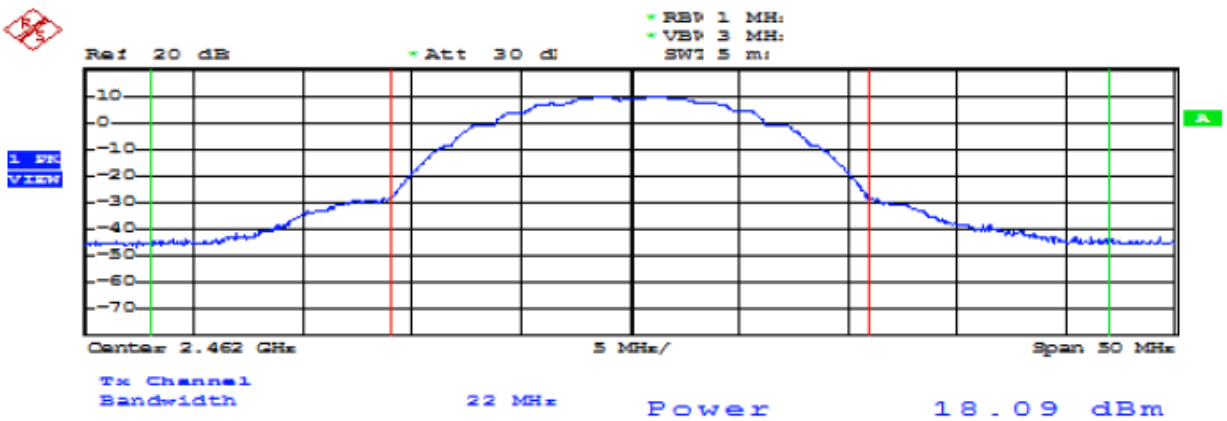




Modulation Standard: 802.11g (6Mbps)

Channel: 01

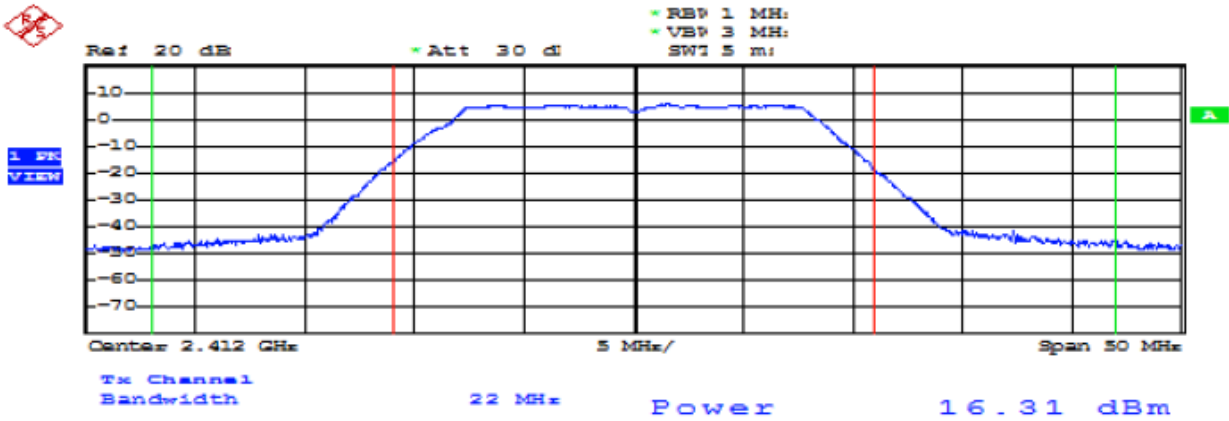


Modulation Standard: 802.11g (6Mbps)

Channel: 06

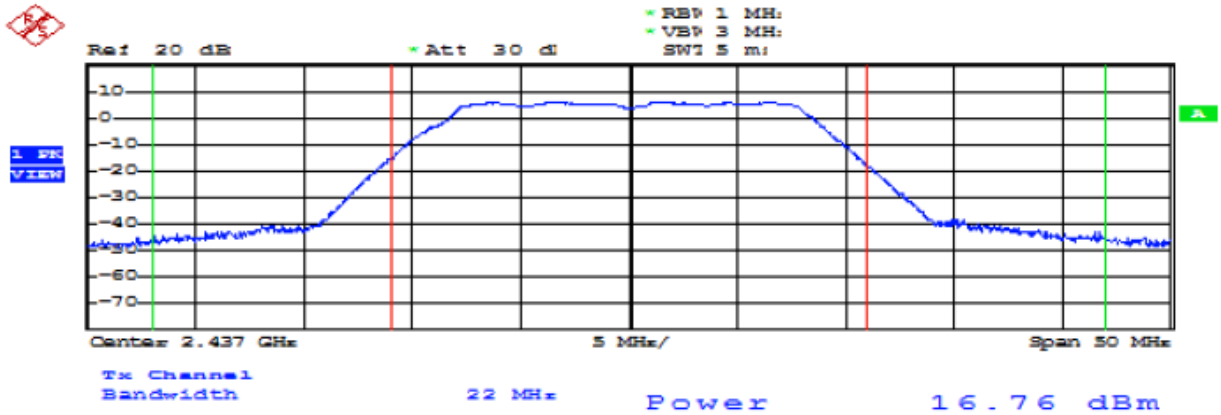

Modulation Standard: 802.11g (6Mbps)


Channel: 11

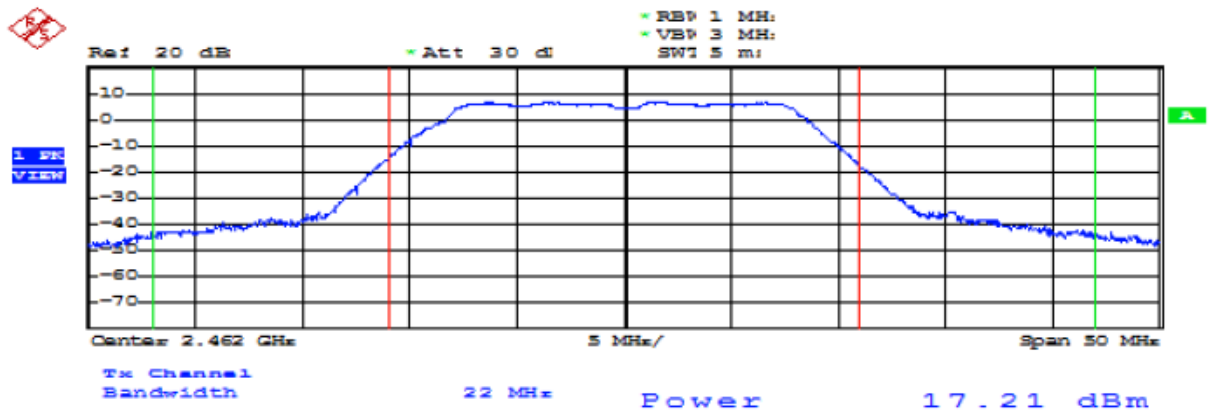




Modulation Standard: 802.11n HT20 (6.5Mbps)

Channel: 01

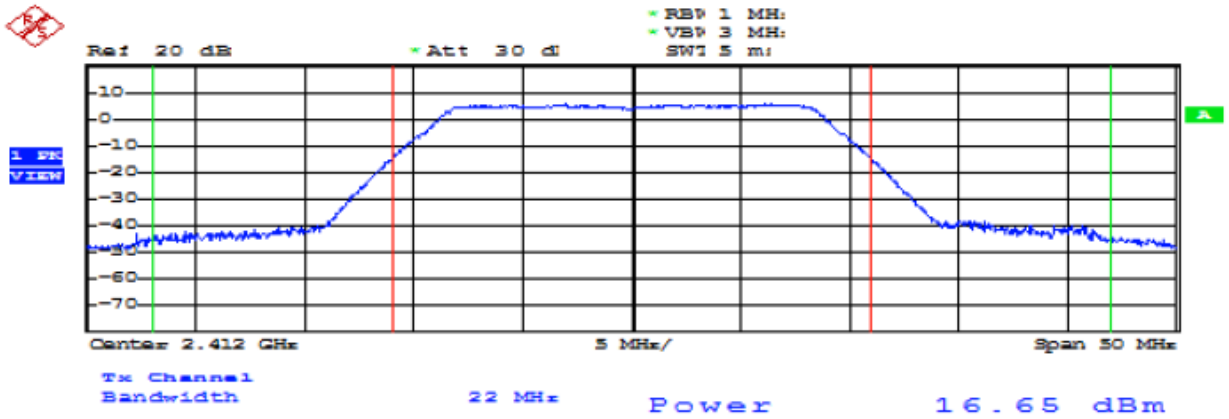


Modulation Standard: 802.11n HT20 (6.5Mbps)

Channel: 06

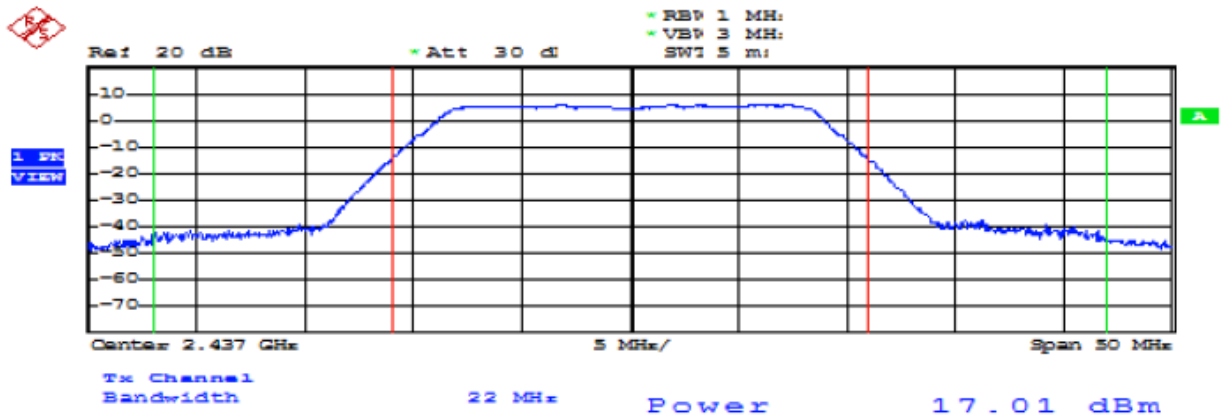

Modulation Standard: 802.11n HT20 (6.5Mbps)

Channel: 11

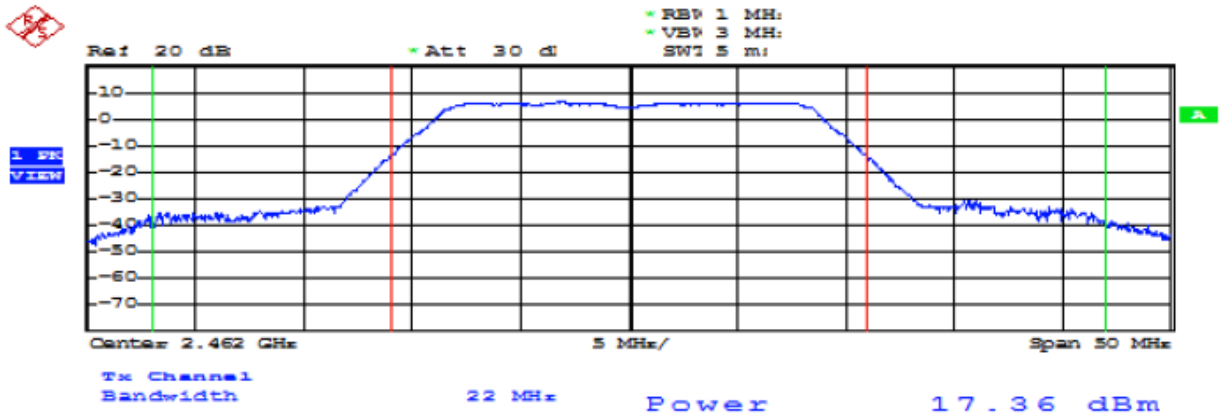







Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 03

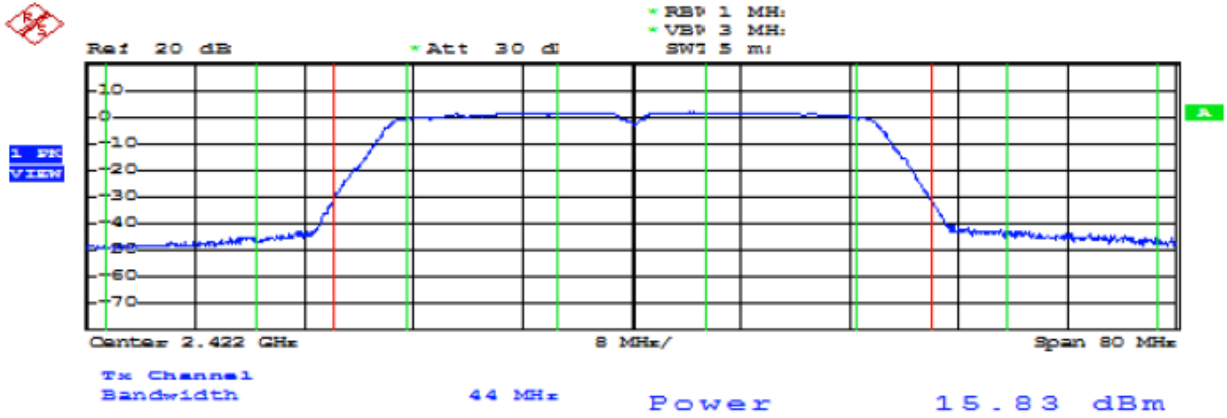


Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 06

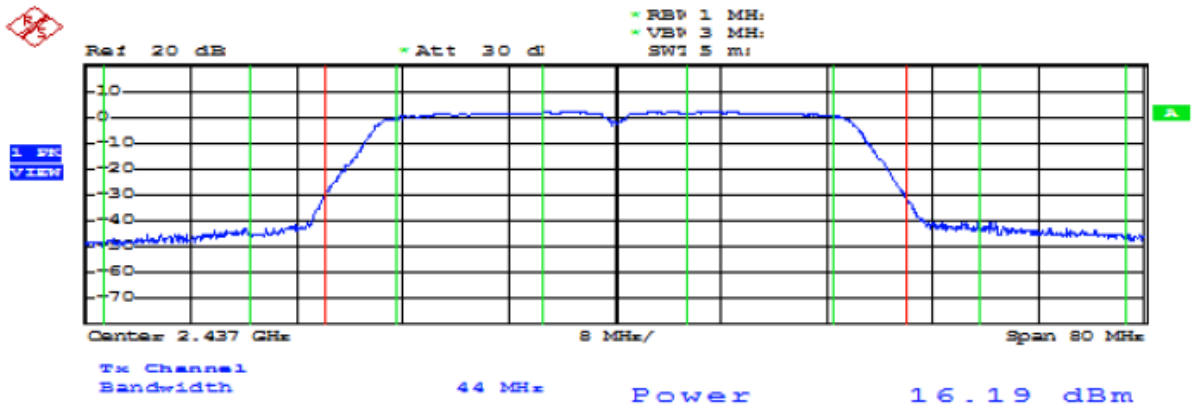

Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 09

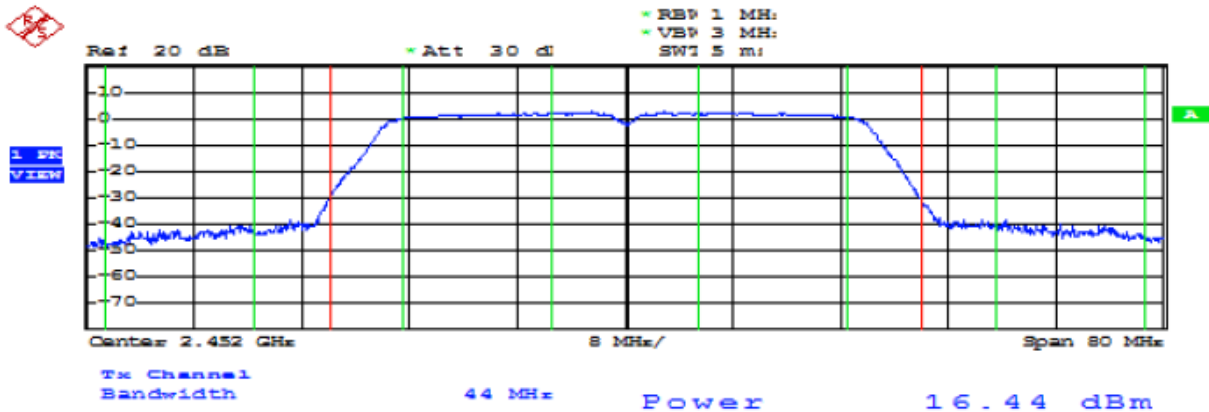



## 10. Power Spectral Density


### 10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm

### 10.2 Test Procedures

- g. The transmitter output was connected to spectrum analyzer.
- h. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- i. The power spectral density was measured and recorded.

### 10.3 Test Setup Layout





## 10.4 Test Result and Data

Test Date: Feb. 07, 2018

Temperature: 18°C

Atmospheric pressure: 1002 pha

Humidity: 57%


Modulation Standard	Channel	Frequency (MHz)	Measured Power Density (dBm)
802.11b (11Mbps)	01	2412	-13.33
	06	2437	-14.00
	11	2462	-14.60
802.11g (6Mbps)	01	2412	-16.66
	06	2437	-17.80
	11	2462	-18.47

Modulation Standard	Channel	Frequency (MHz)	Measured Power Density (dBm)
802.11n HT20 (6.5Mbps)	01	2412	-16.77
	06	2437	-17.74
	11	2462	-18.93
802.11n HT40 (13.5Mbps)	03	2422	-17.44
	06	2437	-20.26
	09	2452	-18.07



Modulation Standard: 802.11b (11Mbps)


Channel: 01

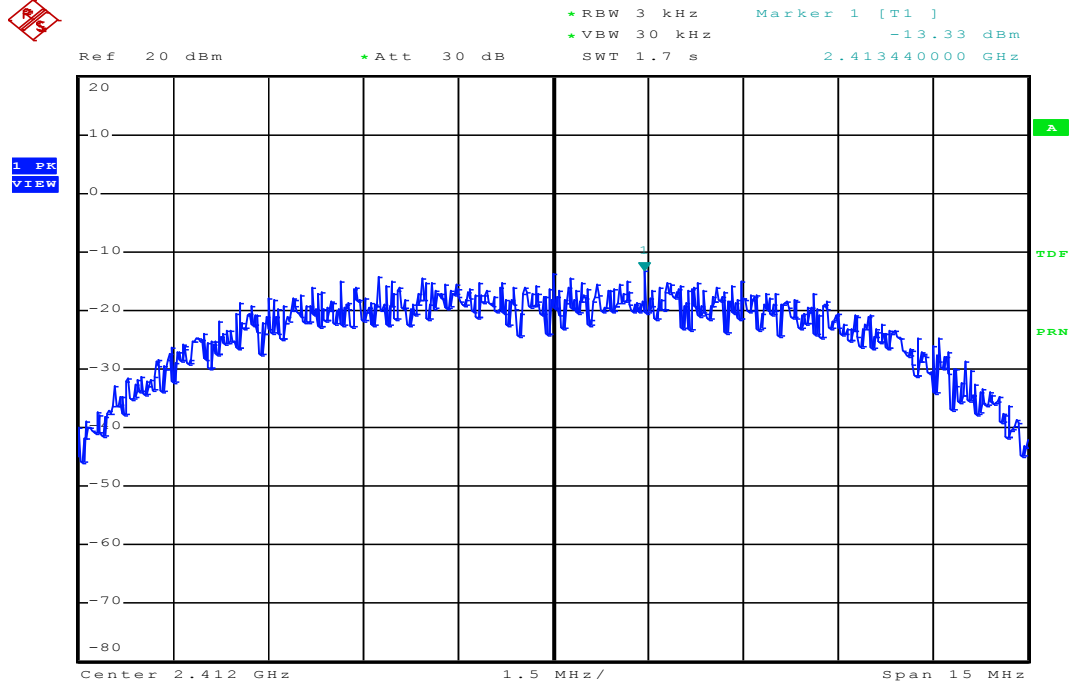

Date: 16.FEB.2015 16:02:37

Modulation Standard: 802.11b (11Mbps)

Channel: 06

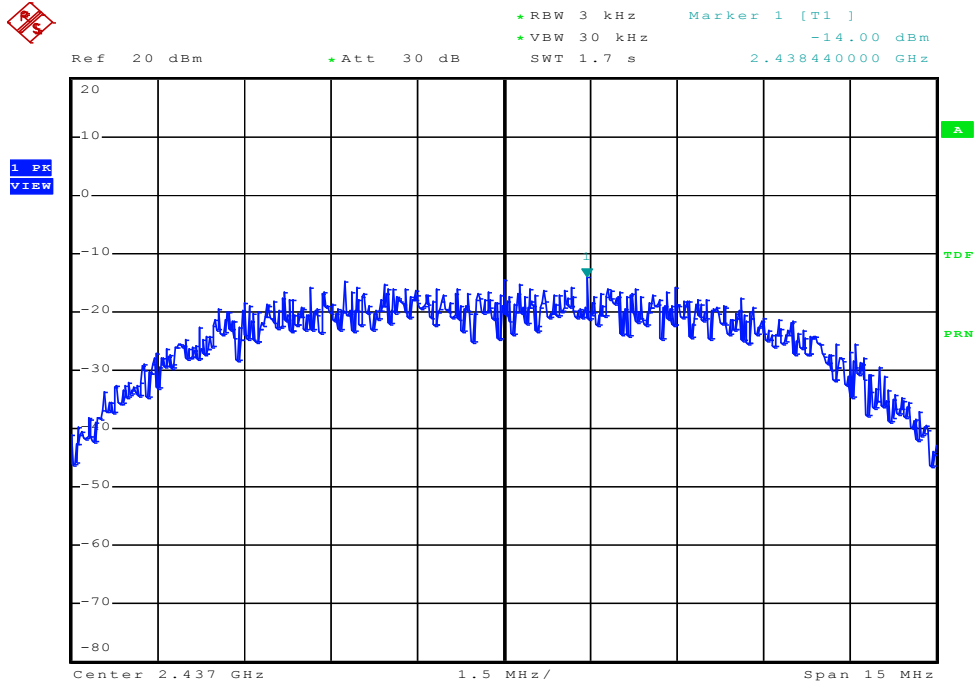


Date: 16.FEB.2015 16:03:19



Modulation Standard: 802.11b (11Mbps)


Channel: 11

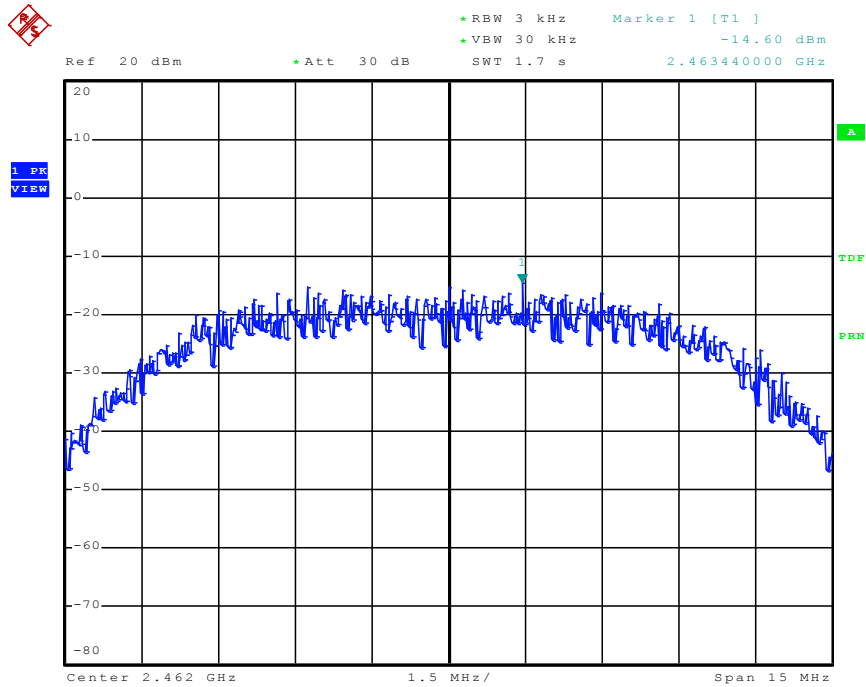

Date: 16.FEB.2015 16:04:05

Modulation Standard: 802.11g (6Mbps)

Channel: 01

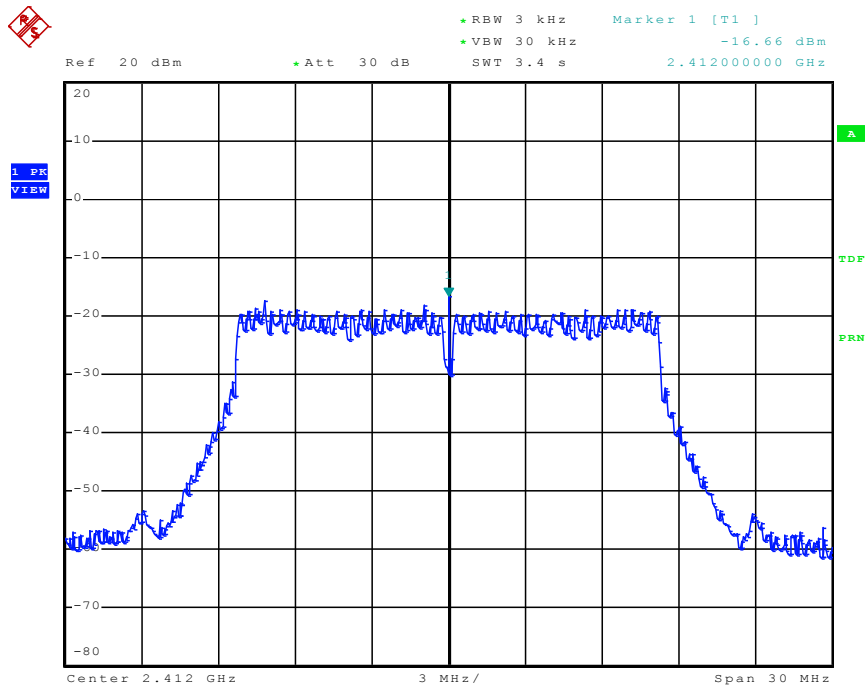


Date: 16.FEB.2015 16:06:08



Modulation Standard: 802.11g (6Mbps)


Channel: 06

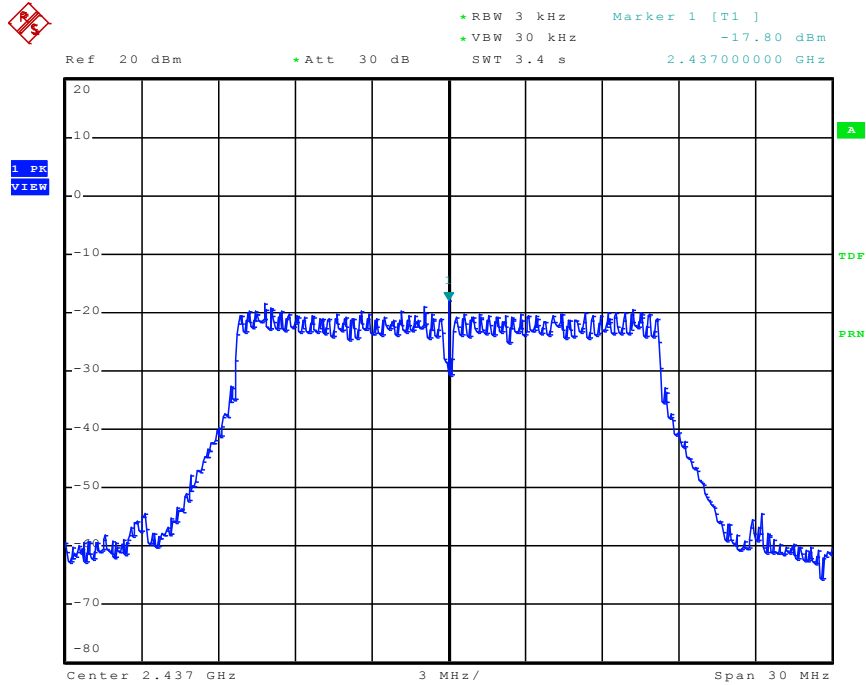

Date: 16.FEB.2015 16:08:45

Modulation Standard: 802.11g (6Mbps)

Channel: 11

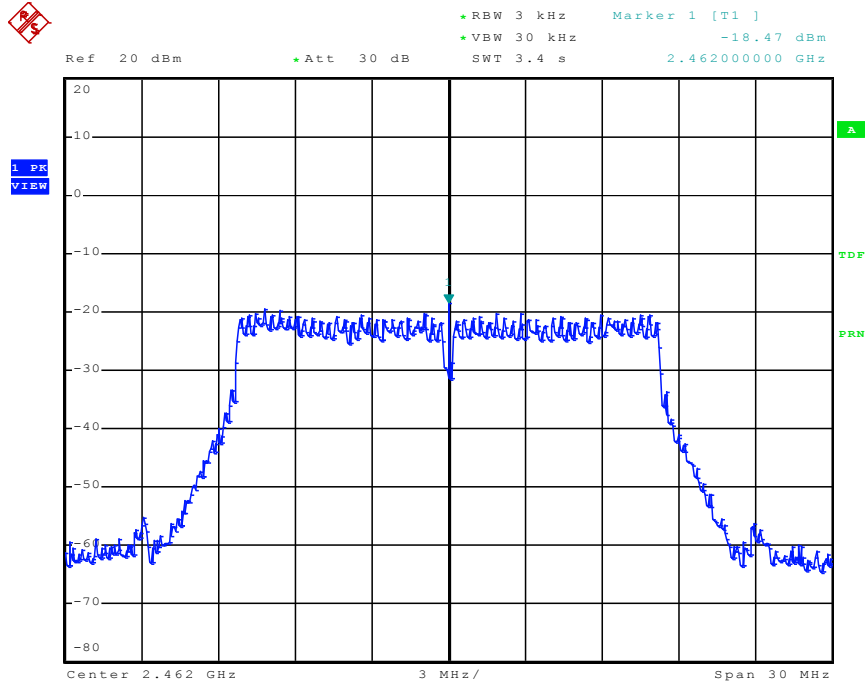


Date: 16.FEB.2015 16:09:34



Modulation Standard: 802.11n HT20 (6.5Mbps)


Channel: 01

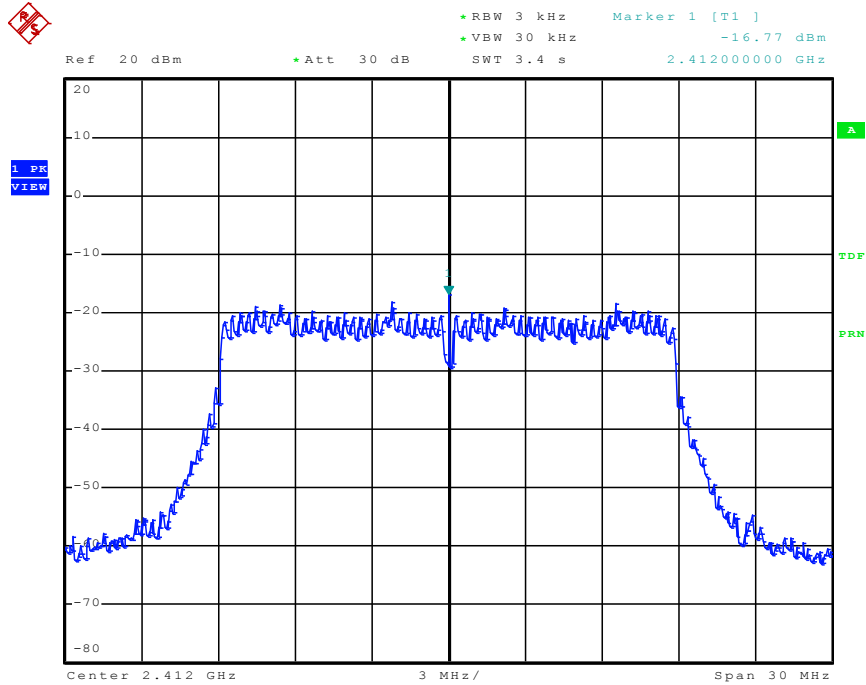

Date: 16.FEB.2015 16:11:03

Modulation Standard: 802.11n HT20 (6.5Mbps)

Channel: 06

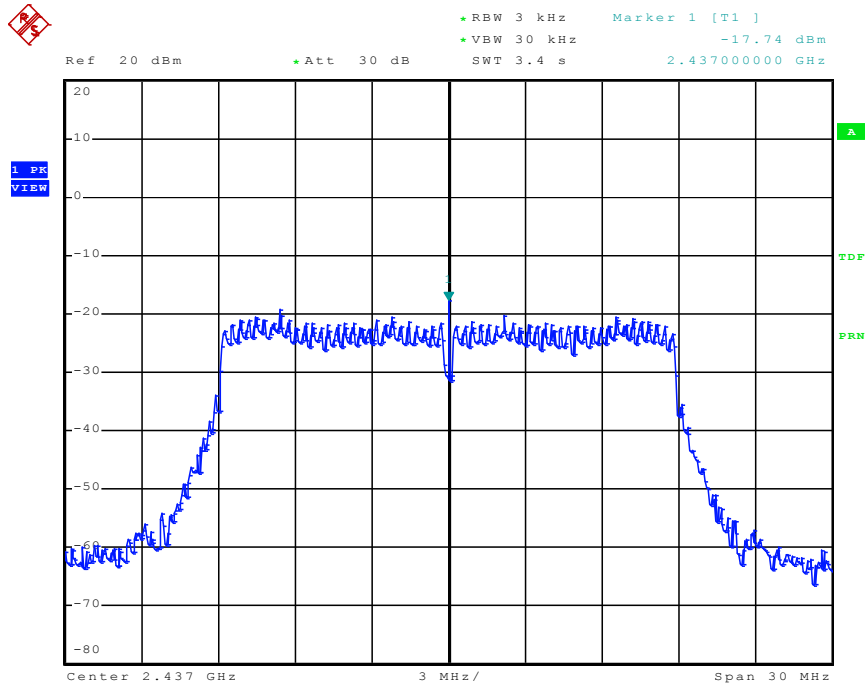


Date: 16.FEB.2015 16:20:38



Modulation Standard: 802.11n HT20 (6.5Mbps)


Channel: 11

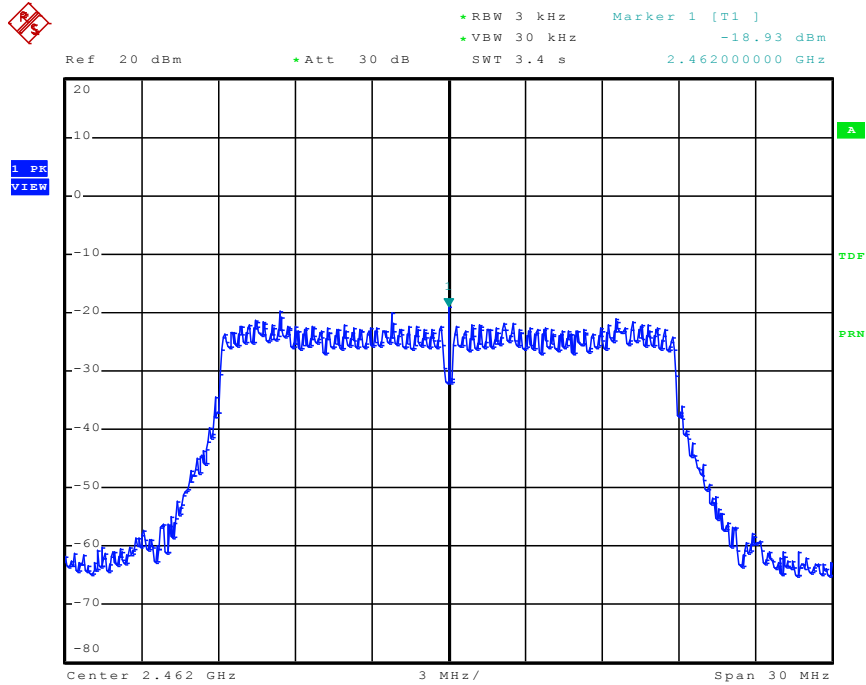

Date: 16.FEB.2015 16:21:50

Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 03

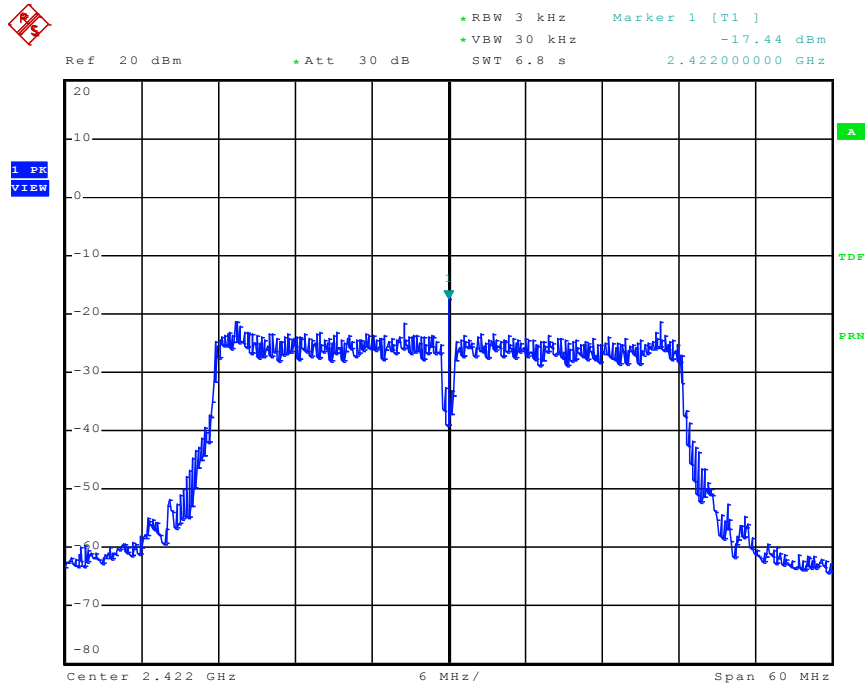


Date: 16.FEB.2015 16:23:55





Modulation Standard: 802.11n HT40 (13.5Mbps)


Channel: 06

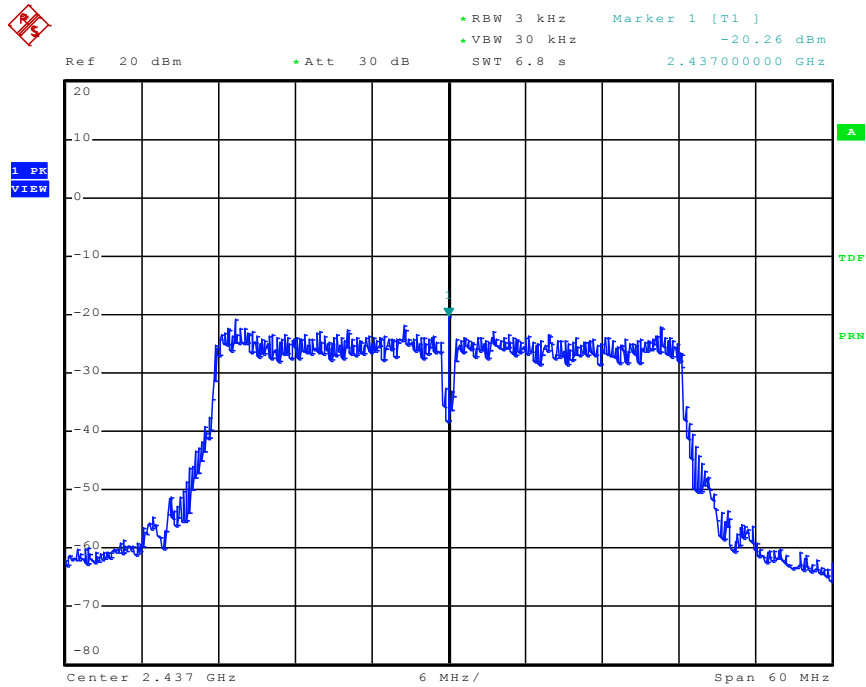

Date: 24.FEB.2015 11:20:36

Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 09

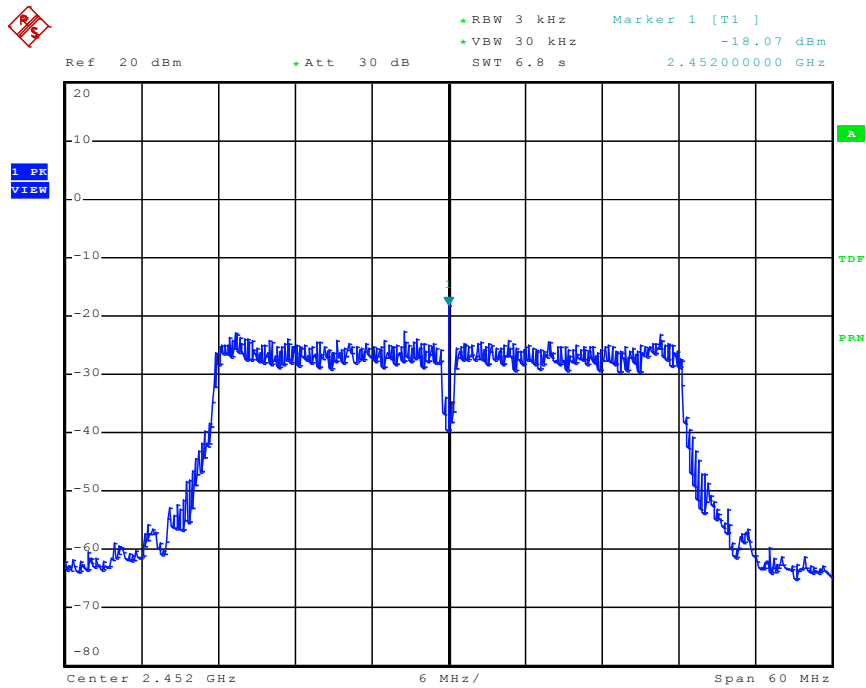

Date: 16.FEB.2015 16:26:08



## 11. Band Edges Measurement


### 11.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 11.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 11.3 Test Setup Layout





## 11.4 Test Result and Data

Test Date: Feb. 07, 2018

Temperature: 18°C

Atmospheric pressure: 1002 pha


Humidity: 57%

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value (dBm)
802.11b (11Mbps)	01	2412	2400.0	-34.74
	11	2462	2505.7	-46.97
802.11g (6Mbps)	01	2412	2400.0	-43.30
	11	2462	2483.6	-47.72
802.11n HT20 (6.5Mbps)	01	2412	2400.0	-42.68
	11	2462	2499.4	-46.57
802.11n HT40 (13.5Mbps)	03	2422	2400.0	-43.60
	09	2452	2500.7	-47.64




Modulation Standard: 802.11b (11Mbps)

Channel: 01

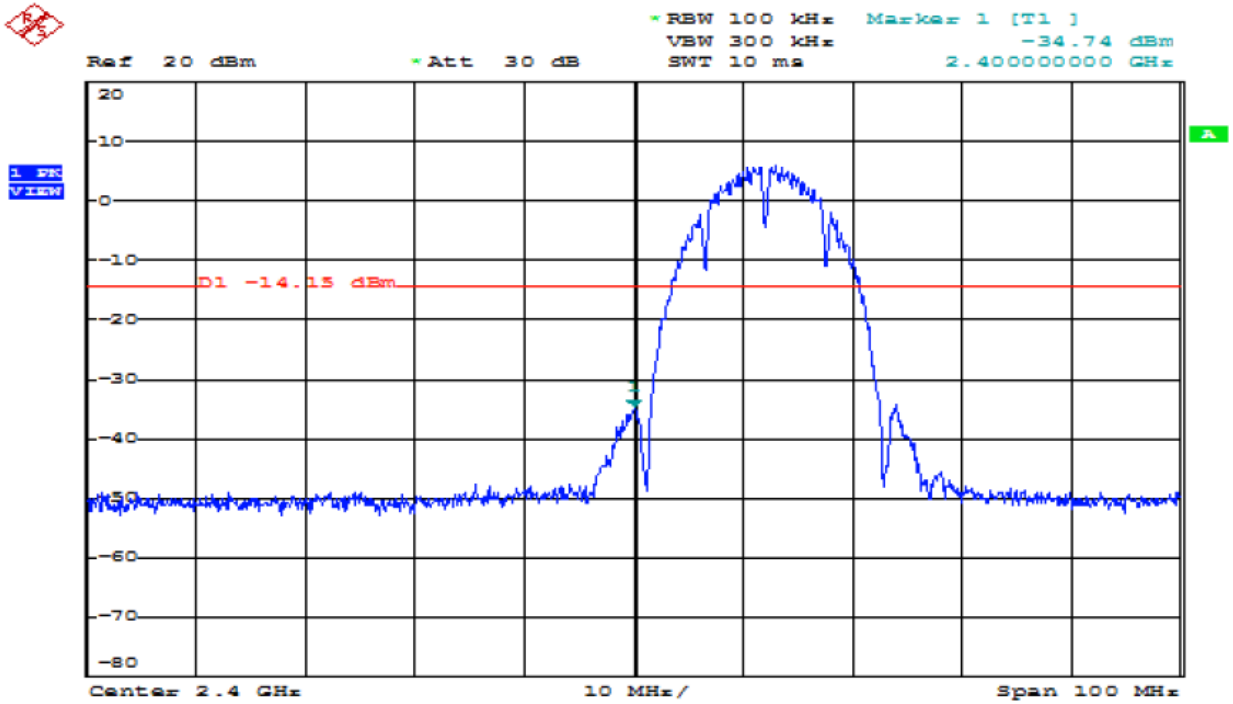

Modulation Standard: 802.11b (11Mbps)


Channel: 11

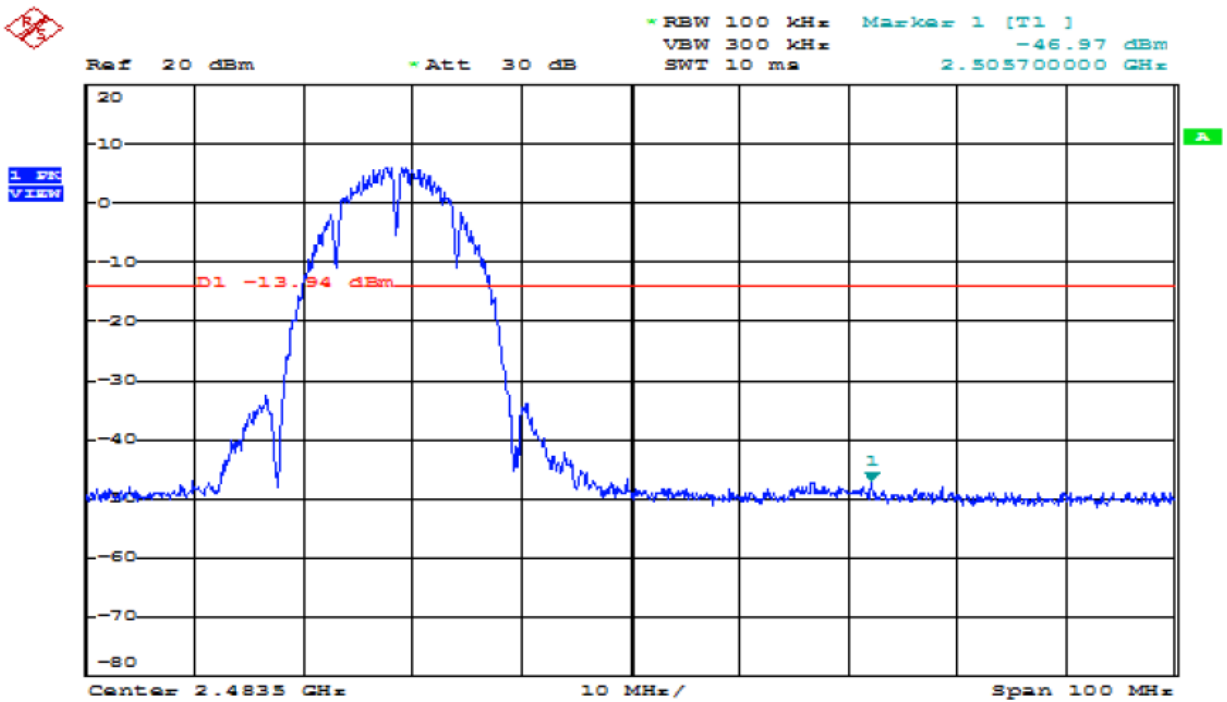




Modulation Standard: 802.11g (6Mbps)

Channel: 01

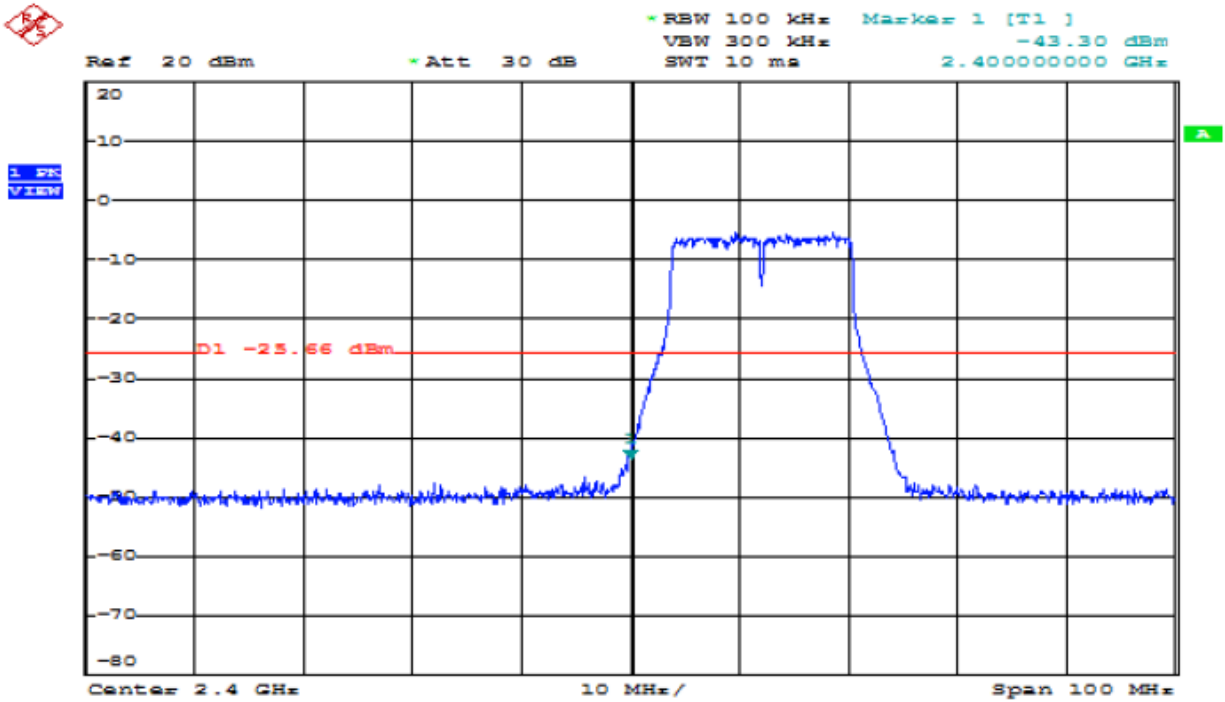

Modulation Standard: 802.11g (6Mbps)


Channel: 11

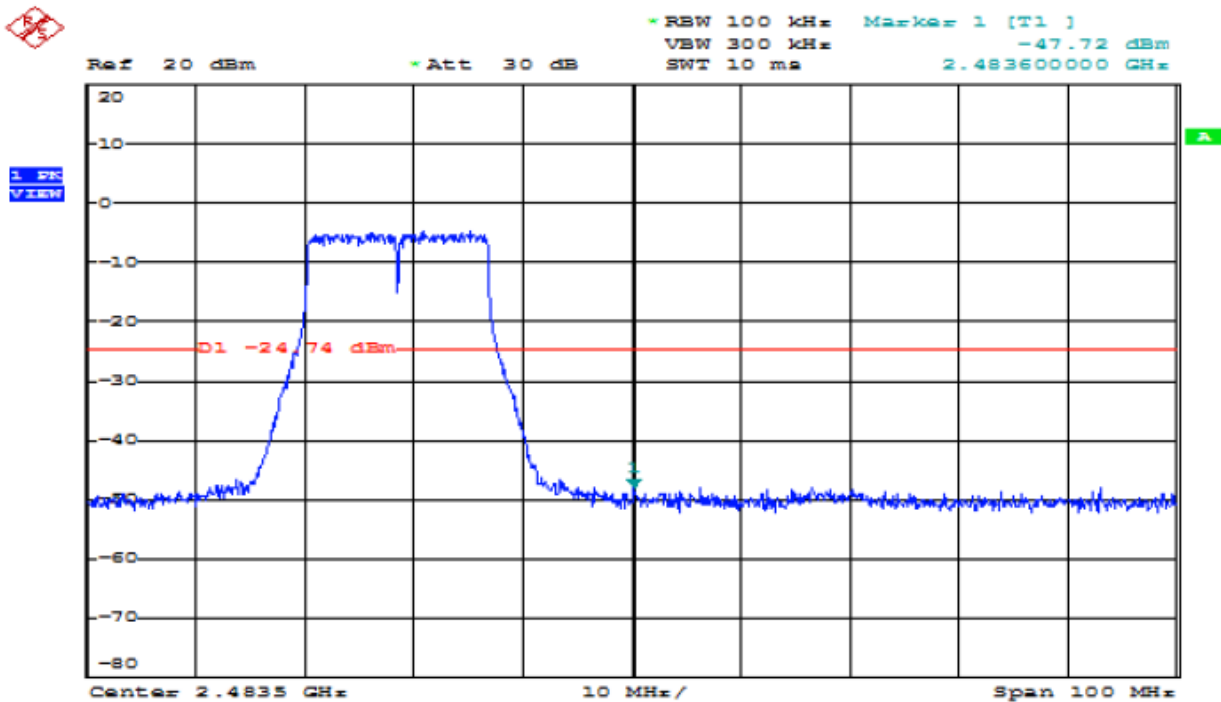




Modulation Standard: 802.11n HT20 (6.5Mbps)

Channel: 01

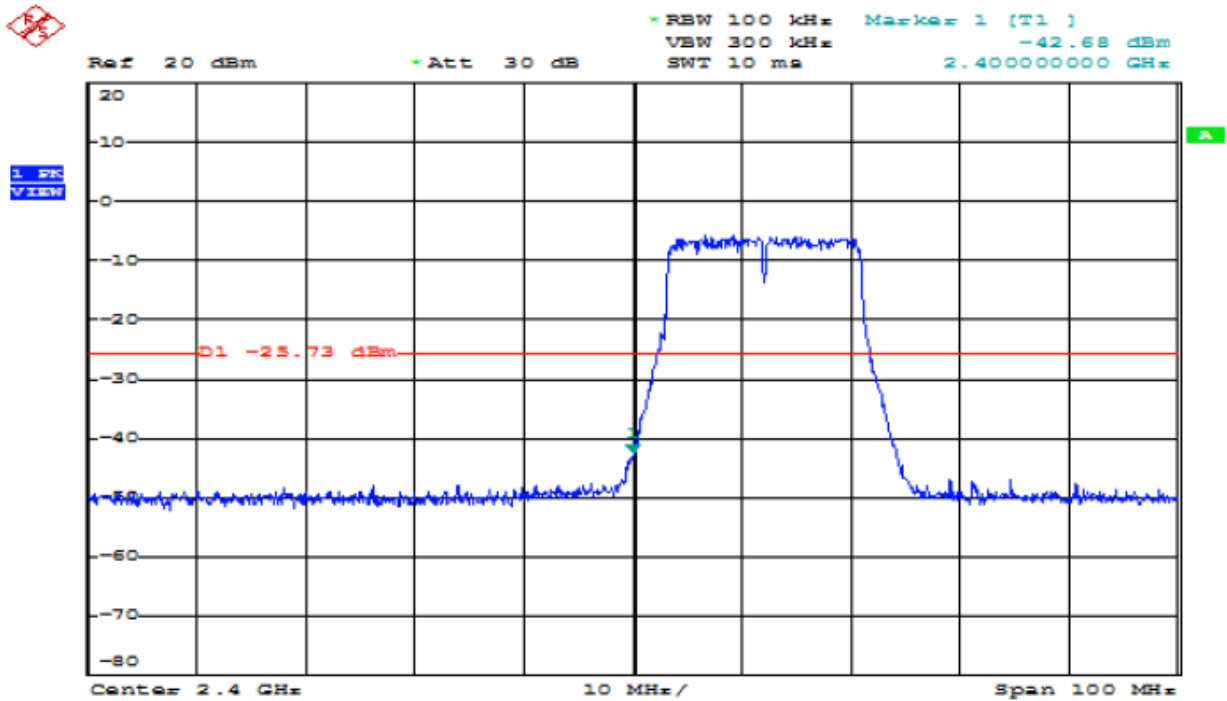

Modulation Standard: 802.11n HT20 (6.5Mbps)


Channel: 11

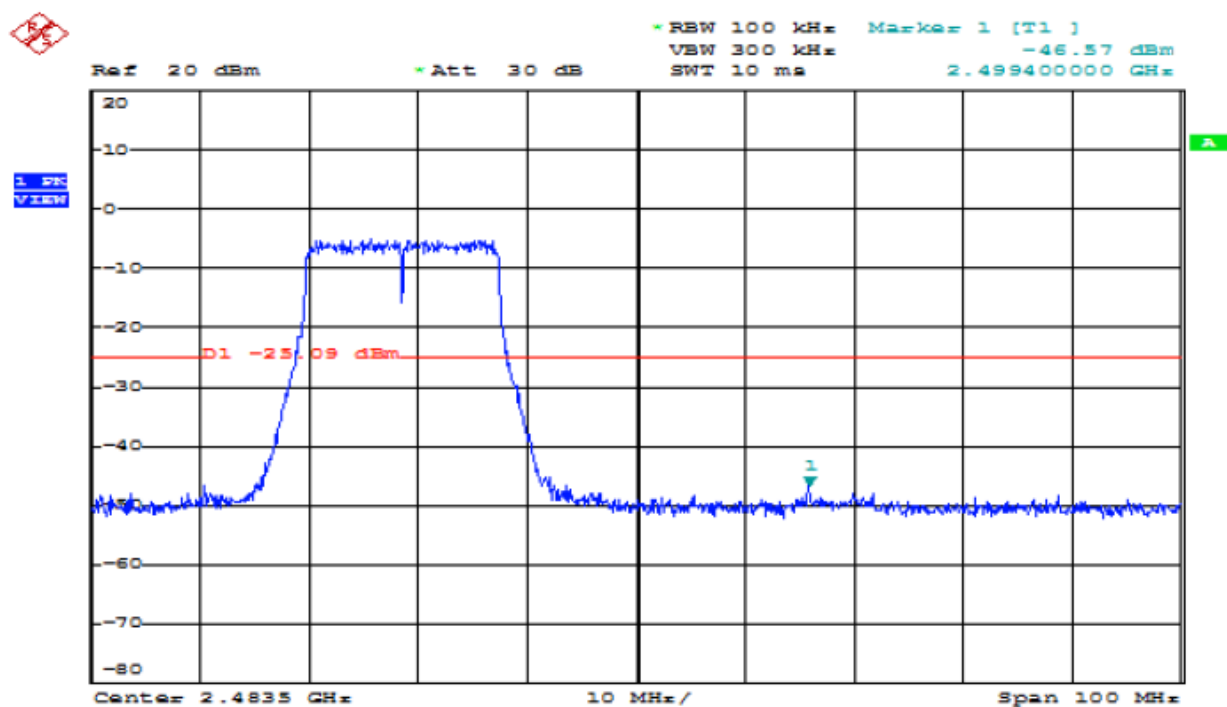




Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 03

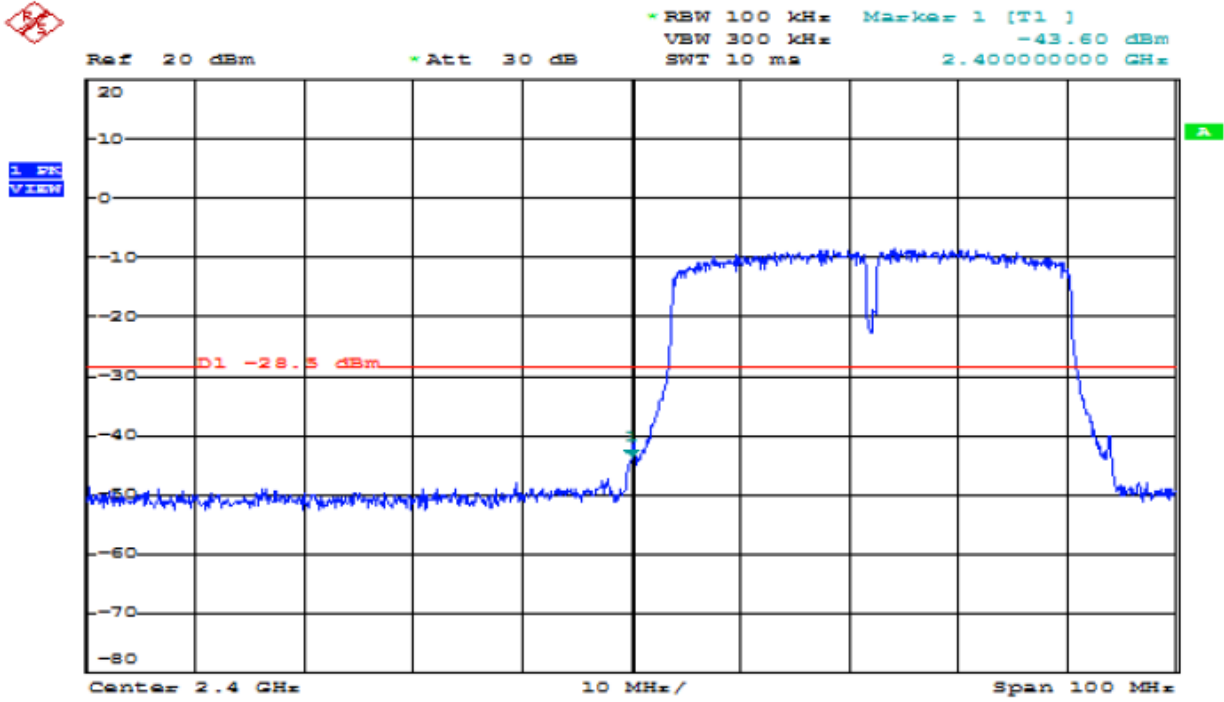

Modulation Standard: 802.11n HT40 (13.5Mbps)

Channel: 09

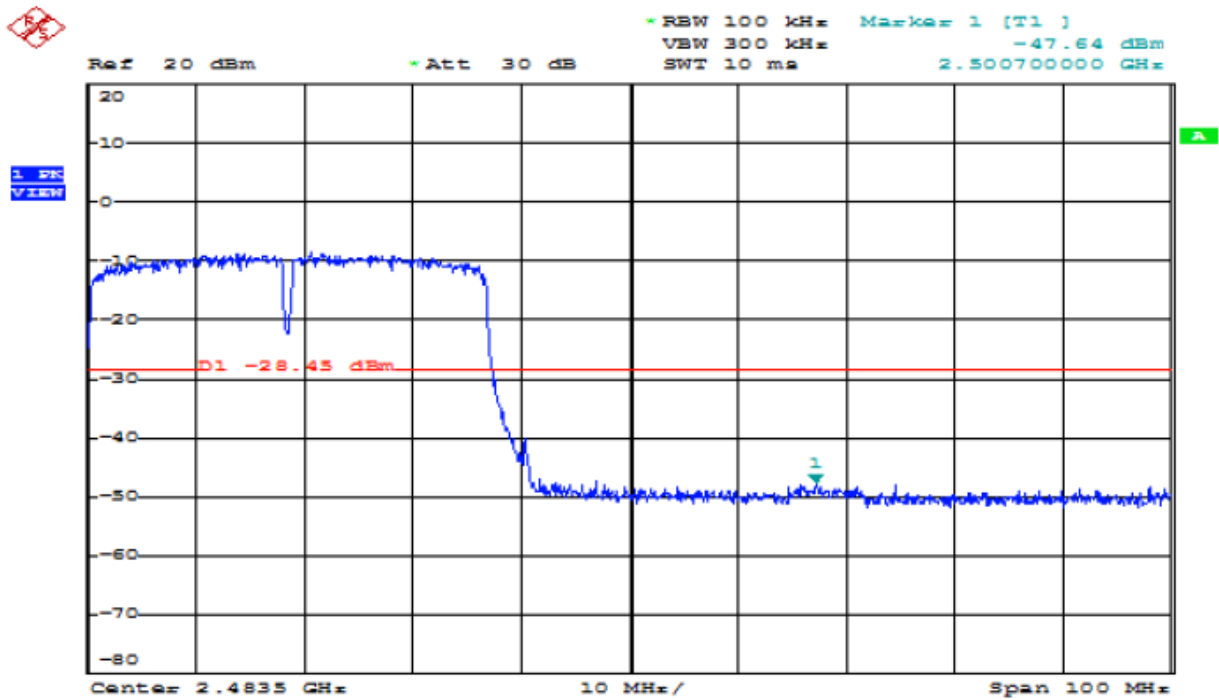



11.5 Restrict Band Emission Measurement Data

Power	: AC 110V	Pol/Phase	: H/V
Test Mode	: 802.11b	Temperature	: 18 °C
Memo	:	Humidity	: 57 %

Channel 1						Fundamental Frequency: 2412 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2390.00	H	61.66	-14.00	47.66	Peak	74	54	-26.34
---	H	---	---	---	Ave	74	54	---
2390.00	V	59.82	-14.00	45.82	Peak	74	54	-28.18
---	V	---	---	---	Ave	74	54	---

Channel 11						Fundamental Frequency: 2462 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2483.50	H	60.07	-13.69	46.38	Peak	74	54	-27.62
---	H	---	---	---	Ave	74	54	---
2483.50	V	58.62	-13.69	44.93	Peak	74	54	-29.07
---	V	---	---	---	Ave	74	54	---





Power	: AC 110V	Pol/Phase	: H/V
Test Mode	: 802.11g	Temperature	: 18 °C
Memo	:	Humidity	: 57 %

Channel 1						Fundamental Frequency: 2412 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2390.00	H	61.16	-14.00	47.16	Peak	74	54	-26.84
---	H	---	---	---	Ave	74	54	---
2390.00	V	59.76	-14.00	45.76	Peak	74	54	-28.24
---	V	---	---	---	Ave	74	54	---

Channel 11						Fundamental Frequency: 2462 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2483.50	H	59.40	-13.69	45.71	Peak	74	54	-28.29
---	H	---	---	---	Ave	74	54	---
2483.50	V	58.54	-13.69	44.85	Peak	74	54	-29.15
---	V	---	---	---	Ave	74	54	---



Power	: AC 110V	Pol/Phase	: H/V
Test Mode	: 802.11n HT20	Temperature	: 18 °C
Memo	:	Humidity	: 57 %

Channel 1						Fundamental Frequency: 2412 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2390.00	H	62.62	-14.00	48.62	Peak	74	54	-25.38
---	H	---	---	---	Ave	74	54	---
2390.00	V	60.11	-14.00	46.11	Peak	74	54	-27.89
---	V	---	---	---	Ave	74	54	---

Channel 11						Fundamental Frequency: 2462 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2483.50	H	60.28	-13.69	46.59	Peak	74	54	-27.41
---	H	---	---	---	Ave	74	54	---
2483.50	V	58.72	-13.69	45.03	Peak	74	54	-28.97
---	V	---	---	---	Ave	74	54	---



Power	: AC 110V	Pol/Phase	: H/V
Test Mode	: 802.11n HT40	Temperature	: 18 °C
Memo	:	Humidity	: 57 %

Channel 3						Fundamental Frequency: 2422 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2390.00	H	64.37	-14.00	50.37	Peak	74	54	-23.63
---	H	---	---	---	Ave	74	54	---
2390.00	V	60.63	-14.00	49.63	Peak	74	54	-24.37
---	V	---	---	---	Ave	74	54	---
Channel 9						Fundamental Frequency: 2452 MHz		
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)
						Peak	Ave	
2483.50	H	62.23	-13.69	48.54	Peak	74	54	-25.46
---	H	---	---	---	Ave	74	54	---
2483.50	V	60.96	-13.69	47.27	Peak	74	54	-26.73
---	V	---	---	---	Ave	74	54	---

Note:

9. Emission level = Reading level + Correction factor
10. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
11. Measurements above 1000 MHz, Peak detector setting:  
1 MHz RBW with 1 MHz VBW.
12. Measurements above 1000 MHz, Average detector setting:  
1 MHz RBW with 10Hz VBW.
13. Peak detector measurement data will represent the worst case results.
14. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
15. The other emission levels were 20dB below the limit.



## 12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

### 12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.