

Nemko Korea Co., Ltd.

165-51, Yurim-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17042, Republic of Korea

TEL: +82 31 330-1700

FAX: +82 31 322 2332

FCC EVALUATION REPORT FOR CERTIFICATION

Project No. : NK-24-R-256**Dates of receipt :** June 13, 2024**Applicant :** Olive Union inc**Dates of Issue :** September 12, 20245, 6th floor, 24, Banpo-daero 28-gil,
Seocho-gu, Seoul, Korea, Republic of**Test Site :**
Nemko Korea Co., Ltd.**FCC ID :**

2AOLH-OU0P030303

Applicant :

Olive Union inc

Brand Name :**Olive Air****Model:**

OU0P030303

Additional Model(s):OU0P030103, OU0P030203, OU0P030403,
OU0P030503, OU0P030603, OU0P030703,
OU0P030803, OU0P030903, OU0P031003,
OU0P031103, OU0P031203**EUT Type:**

Hearing Aids

Classification:

FCC Part 15 Spread Spectrum Transmitter (DSS)

Date of Test:

August 9, 2024 ~ August 21, 2024

Applied Standard:

FCC 47 CFR Part 15.247

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.
This test report is prepared according to the requirements of ISO / IEC 17025



Tested By : Jaehyong Lee

Test Engineer

Reviewed By : Hoonpyo Lee

Technical Manager

Revision History

Rev.	Issue Date	Revisions	Revised By
00	September 12, 2024	Initial issue	Jaehyong Lee

TABLE OF CONTENTS

1. INTRODUCTION	5
1.1 Test facility	5
2.2 Accreditation and listing	5
2. EUT INFORMATION & TEST CONDITIONS	6
2.1 EUT Information	6
2.2 Operation During Test	7
2.3 Support Equipment	9
2.4 Setup Drawing	10
3. ANTENNA REQUIREMENTS	11
4. SUMMARY OF TEST RESULTS	12
5. TEST METHODOLOGY	12
6. DESCRIPTION OF TESTS	13
6.1 Duty Cycle	13
6.2 20 dB Bandwidth	14
6.3 Carrier Frequency Separation	15
6.4 Transmitter Average Time of Occupancy	16
6.5 Number of Hopping Channels	16
6.6 Peak Output Power	17
6.7 Conducted Spurious Emissions	17
6.8 Radiated Emissions	18
6.9 AC Line Conducted Emissions	19
7. TEST DATA	20
7.1 Duty Cycle	20
7.2 20 dB Bandwidth	23
7.3 Carrier Frequency Separation	28
7.4 Transmitter Average Time of Occupancy	31
7.5 Number of Hopping Channels	33
7.6 Peak Output Power	35
7.7 Conducted Spurious Emissions	42
7.8 Radiated Spurious Emissions	55
7.9 Radiated Band Edge	64
7.10 Radiated Emissions_Below 1GHz	69
7.11 AC Line Conducted Emissions	71

8. TEST EQUIPMENT	72
9. ACCURACY OF MEASUREMENT & DECISION RULE	73
9.1 Uncertainty Calculation.....	73
9.2 Decision rule	73

1. INTRODUCTION







1.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2014), the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in determining radiated and conducted emissions emanating.

These measurement tests were conducted at **Nemko Korea Co., Ltd.**

The site address 165-51, Yurim-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, 17042, Rep. of Korea.

2.2 Accreditation and listing

Accreditation type		Accreditation number
	CAB Accreditation for DOC	Designation No. KR0026
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)	Registration No. KT155
	Canada IC Registered site	Site No. 29506
	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
	EMC CBTL	TL124
	KCC(RRL)Designated Lab.	Registration No. KR0026

2. EUT INFORMATION & TEST CONDITIONS

2.1 EUT Information

2.1.1 Specifications:

EUT Type	Hearing Aids
Model Name	OU0P030303
Frequency of Operation	2 402 MHz ~ 2 480 MHz
Peak Output Power (Conducted)	Left_Bluetooth: 6.59 dBm Left_Bluetooth LE: 6.33 dBm Right_Bluetooth: 6.64 dBm Right_Bluetooth LE: 6.41 dBm
Number of Channels	Bluetooth: 79 CH Bluetooth LE: 40 CH
Modulations	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK Bluetooth LE: GFSK
Antenna Gain (peak)	Left: -4.12 dBi Right: -3.46 dBi
Antenna Setup	1TX / 1RX
EUT Test Voltage	DC 3.85 V
Temperature Range	0 °C ~ +50 °C
Remarks	-

2.2 Operation During Test

The EUT is the transceiver which is Bluetooth v5.1 supporting Bluetooth BR/EDR/LE-1Mbps /LE-2Mbps/LE-Coded mode.

The Laptop PC was used to control the EUT to transmit the wanted TX channel continuously (duty cycle < 98%) by the testing program (RTLBTAPP V5.2.2.93).

The operating voltage of EUT was 3.85 Vdc supplied from DC power supply.

The EUT was tested at the lowest, middle and the highest channels with the maximum output power in accordance with the manufacturer's specifications. The worst data were recorded in the report.

2.2.1 Table of Test power setting

- Left

Frequency	Mode	Modulation	Power setting Level
2 402 MHz ~ 2 480 MHz	BDR	GFSK	3f
2 402 MHz ~ 2 480 MHz	EDR	$\pi/4$ DQPSK	3f
2 402 MHz ~ 2 480 MHz	EDR	8DPSK	3f

- Right

Frequency	Mode	Modulation	Power setting Level
2 402 MHz ~ 2 480 MHz	BDR	GFSK	42
2 402 MHz ~ 2 480 MHz	EDR	$\pi/4$ DQPSK	42
2 402 MHz ~ 2 480 MHz	EDR	8DPSK	42

2.2.2 Table of Test frequency

Frequency band	Modulation	Test Channel (CH)	Frequency (MHz)
2.4 GHz	GFSK, $\pi/4$ DQPSK, 8DPSK	0	2 402
		39	2 441
		78	2 480

2.2.3 Antenna Information

Frequency band	Modulation	Antenna TX mode	Support CDD	Support MIMO
2.4 GHz	GFSK, $\pi/4$ DQPSK, 8DPSK	<input checked="" type="checkbox"/> 1TX, <input type="checkbox"/> 2TX	<input type="checkbox"/> Yes, <input checked="" type="checkbox"/> No	<input type="checkbox"/> Yes, <input checked="" type="checkbox"/> No

2.2.4 Additional Information Related to Testing

The cable and attenuator loss from 30 MHz to 26.5 GHz was reflected in spectrum analyzer with correction factor for all conducted testing.

2.2.5 Worst-case Configuration and Mode

Radiated emission below 1GHz was performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The emissions (Band-edge & spurious emissions) were investigated in three orthogonal orientations X, Y and Z.

Accordingly, the orientation was determined and tested as shown in the table below:

- Left

Test Items	X	Y	Z
Band-edge	O	-	-
Spurious emissions	O	-	-

- Right

Test Items	X	Y	Z
Band-edge	O	-	-
Spurious emissions	O	-	-

GFSK, $\pi/4$ DQPSK, 8DPSK mode peak power were all investigated, GFSK, 8DPSK power were the worst case. Radiated emission and conducted test plots were based on this mode to showing compliance.

The highest power of GFSK is 1-DH1, $\pi/4$ DQPSK is 2-DH1, 8DPSK is 3-DH1.

2.2.6 Additional model covered by this report


- The variant models shall use materials and electric circuits that are the same as the basic model.
- The difference between basic and variant models are product color as below table.

Basic model name		Description (product color)	
OU0P030303		Black	
Variant model name	Description	Variant model name	Description
OU0P030301	Natural	OU0P030308	Pink
OU0P030302	White	OU0P030309	Sliver
OU0P030304	Orange	OU0P030310	Yellow
OU0P030305	Blue	OU0P030311	Gold
OU0P030306	Red	OU0P030312	Green
OU0P030307	Grey	-	

2.3 Support Equipment

EUT	Olive Union inc Model : OU0P030303	S/N: N/A Identical Proto-type
Laptop Computer	LG Model : LG15Z90N	FCC DOC S/N : 003NZSJ038878
AC Adapter	APD Shenzhen DK Inc. Model : WA-48B19FS	FCC DOC S/N : AKDS764889301B539

2.4 Setup Drawing

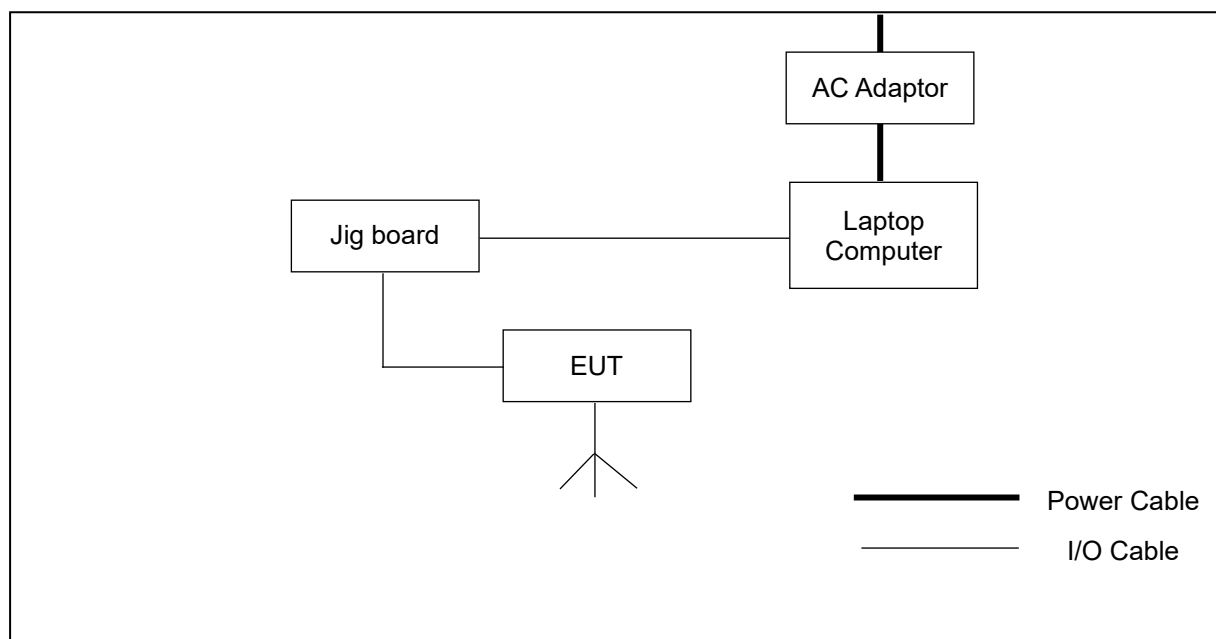

3. ANTENNA REQUIREMENTS

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.

§15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the EUT and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

The transmitter has permanently attached FPCB antenna (Internal antenna) on board.

Used Antenna	
Model name	2 402 MHz ~ 2 480 MHz
	Max. peak gain (dBi)
Olive Air Earbuds Antenna Left	-4.12
Olive Air Earbuds Antenna Right	-3.46

4. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	Test Limit	Test Condition	Result	Remark
20 dB Bandwidth	15.247(a)(1)	-	Conducted	Complies	-
Peak Output Power	15.247(a)(1)	< 125 mW		Complies	-
Carrier Frequency Separation	15.247(a)(1)	> two-thirds of the 20 dB bandwidth		Complies	-
Number of Hopping Channel	15.247(a)(1)(iii)	More than 15 channels		Complies	-
Transmitter Average Time of Occupancy	15.247(a)(1)(iii)	< 0.4 s		Complies	-
Band Edge / Conducted Spurious Emission	15.247(d)	\geq 20 dBc		Complies	-
Radiated Spurious Emission	15.205, 15.209	< 74 dB μ V/m (PK) < 54 dB μ V/m (AV) Radiated limits detailed in 15.209	Radiated	Complies	-
AC Line Conducted Emission	15.207	FCC 15.207 Limits	Line Conducted	Complies	-

5. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

6. DESCRIPTION OF TESTS

6.1 Duty Cycle

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 11.6

Test Procedure

EUTs Duty Cycle is measured at middle channel with a spectrum analyzer connected to the antenna terminal while the EUTs operating at its maximum power control level.

The spectrum analyzer setting is as follows.

RBW \geq OBW

RBW \geq VBW

Span = zero span

Detector = Peak

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100.

6.2 20 dB Bandwidth

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 6.9.2

Test Procedure

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer.

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 1% to 5% of the OBW

VBW = approximately 3 x RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow trace to fully stabilize.

The bandwidth measurement function on the spectrum analyzer is used to measure the 20 dB bandwidth.

6.3 Carrier Frequency Separation

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 7.8.2

Test Procedure

The EUT must have its hopping function enabled. The following spectrum analyzer setting is used.

Span = wide enough to capture the peaks of two adjacent channels

RBW \geq approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel

VBW \geq RBW

Sweep = auto


Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.4 Transmitter Average Time of Occupancy

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 7.8.4

Test Procedure

The transmitter output is connected to a spectrum analyzer. The following spectrum analyzer setting is used.

Span = Zero span, centered on a hopping channel

RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = Peak

Trace = Single sweep

Use the marker-delta function to determine the width of pulse

6.5 Number of Hopping Channels

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 7.8.3

Test Procedure

Span = The frequency band of operation.

RBW = less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW \geq RBW

Sweep = Auto


Detector function = Peak

Trace = Max hold

Allow trace to fully stabilize.

6.6 Peak Output Power

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 7.8.5

Test Procedure

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > 20 dB bandwidth of the emission being measured

VBW ≥ RBW


Sweep = auto

Detector function = peak

Trace = max hold

6.7 Conducted Spurious Emissions

Test Setup



Test Measurement Method

ANSI C63.10-2013, Section 7.8.6, 7.8.8

Test Procedure

Measurements are made over the 30 MHz to 26.5 GHz range with the transmitter set to the Lowest, middle and highest channels.

RBW = 100kHz

VBW = 300kHz

Sweep = auto

Detector function = peak

Trace = max hold

6.8 Radiated Emissions

Test Measurement Method

ANSI C63.10-2013, Section 6.6.4.3, Section 11.11, Section 11.12

Test Procedure

The measurement was performed at the test site that is specified in accordance with ANSI C63.10-2013. The spurious emission was scanned from 9 kHz to 30 MHz using Loop Antenna and 30 to 1000 MHz using Trilog broadband test antenna. Above 1 GHz, Horn antenna was used.

For emissions testing at below 1GHz, The test equipment was placed on turntable with 0.8 m above ground. For emission measurements above 1 GHz, The test equipment was placed on turntable with 1.5 m above ground. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The EUT, cable, wire arrangement and mode of operation that has the highest amplitude relative to the limit was selected. Then, the turn table was rotated from 0° to 360° and an antenna mast was moved from 1 m to 4 m height to maximize the suspected highest amplitude signal. The final maximized level was recorded.

At frequencies below 1000 MHz, measurements performed using the CISPR quasi-peak detection. At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in ANSI 63.10-2013 section 11.12. Peak emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 3 MHz, Detector = Peak, Trace mode = max hold. Average emission levels were measured by setting the analyzer RBW = 1 MHz, VBW = 10 kHz, Detector = Peak, Trace mode = max hold. Allow max hold to run for at least 50 times (1/duty cycle) traces.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88–216	150	3
216–960	200	3
Above 960	500	3

Radiated Emissions Limits per 47 CFR 15.209(a)

6.9 AC Line Conducted Emissions

Test Measurement Method

ANSI C63.10-2013, Section 6.2

Test Procedure

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6. A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room. Rohde & Schwarz (ENV216) of the 50 ohm/50 μ H Line Impedance Stabilization Network (LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN. Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2 ". If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs, All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1 meter length. Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time. The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCI). The detector functions were set to CISPR quasi-peak mode & average mode. The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

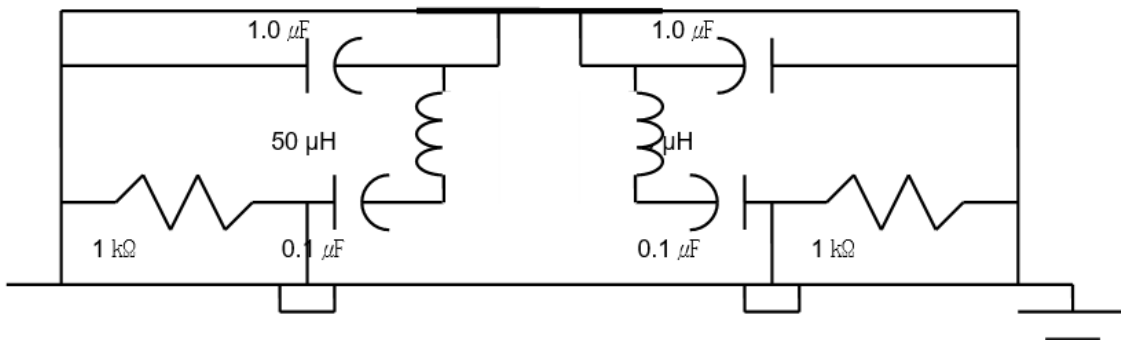


Fig. 2. LISN Schematic Diagram

7. TEST DATA

7.1 Duty Cycle

For reporting purposes only.

Result

- Left


Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum CBW [kHz]
BDR (DH1)	0.380	1.225	0.310	31.00	5.09	2.63
EDR (3-DH1)	0.387	1.234	0.314	31.36	5.04	2.58

- Right

Mode	On time [msec]	Period [msec]	Duty cycle x [Linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum CBW [kHz]
BDR (DH1)	0.379	1.225	0.310	30.96	5.09	2.64
EDR (3-DH1)	0.387	1.234	0.313	31.33	5.04	2.58

PLOTS OF EMISSIONS

Left, Duty Cycle, BDR, Lowest Channel (2 402 MHz)

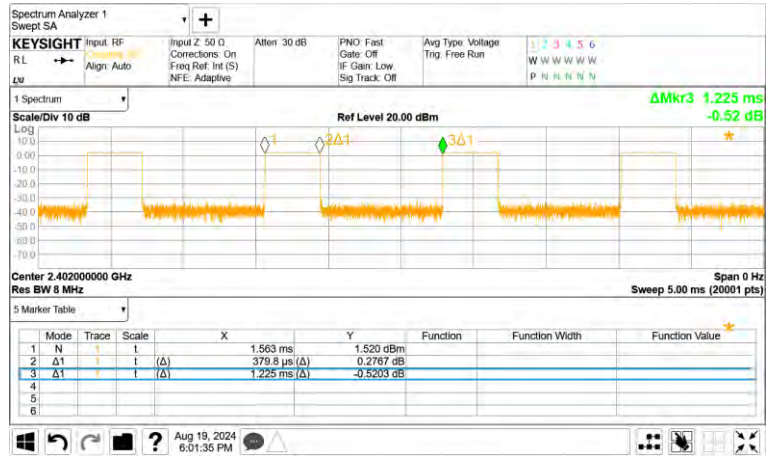

Left, Duty Cycle, EDR, Lowest Channel (2 402 MHz)



Right, Duty Cycle, BDR, Lowest Channel (2 402 MHz)



Right, Duty Cycle, EDR, Lowest Channel (2 402 MHz)



7.2 20 dB Bandwidth

FCC §15.247(a)(2)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

- Left


Modulation	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK (DH1)	Lowest	2 402	0.93
	Middle	2 441	0.93
	Highest	2 480	0.93
8DPSK (3-DH1)	Lowest	2 402	1.22
	Middle	2 441	1.22
	Highest	2 480	1.22

- Right

Modulation	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK (DH1)	Lowest	2 402	0.93
	Middle	2 441	0.93
	Highest	2 480	0.93
8DPSK (3-DH1)	Lowest	2 402	1.22
	Middle	2 441	1.22
	Highest	2 480	1.22

PLOTS OF EMISSIONS

Left, GFSK, 20 dB Bandwidth, Lowest Channel (2 402 MHz)

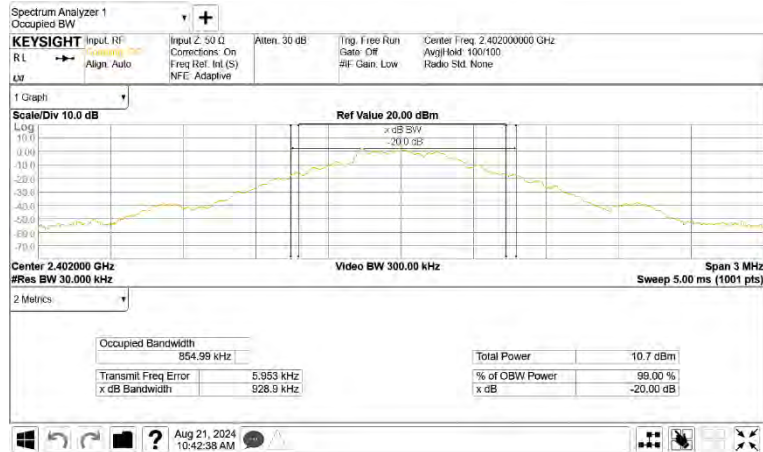


Left, GFSK, 20 dB Bandwidth, Middle Channel (2 441 MHz)



Left, GFSK, 20 dB Bandwidth, Highest Channel (2 480 MHz)




Left, 8DPSK, 20 dB Bandwidth, Lowest Channel (2 402 MHz)

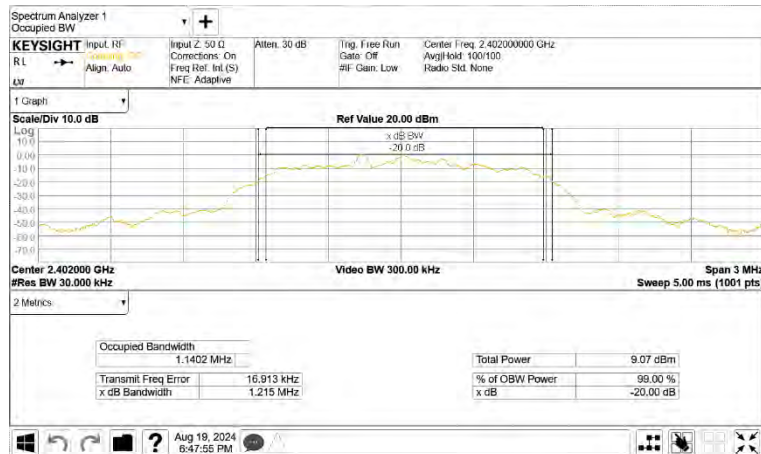


Left, 8DPSK, 20 dB Bandwidth, Middle Channel (2 441 MHz)




Left, 8DPSK, 20 dB Bandwidth, Highest Channel (2 480 MHz)

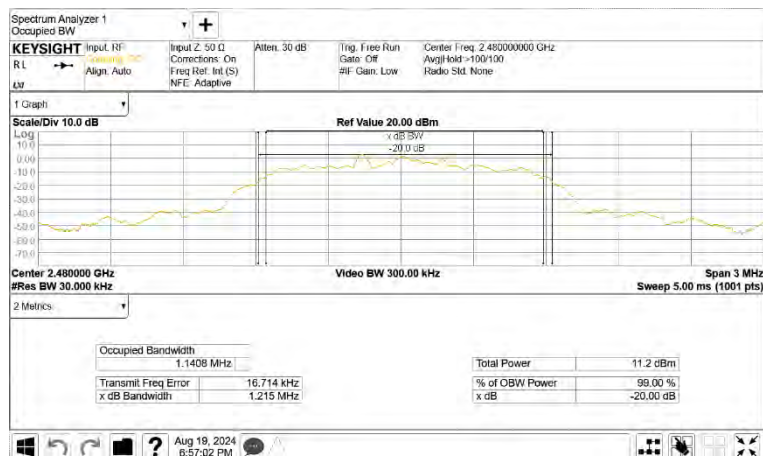

Right, GFSK, 20 dB Bandwidth, Lowest Channel (2 402 MHz)

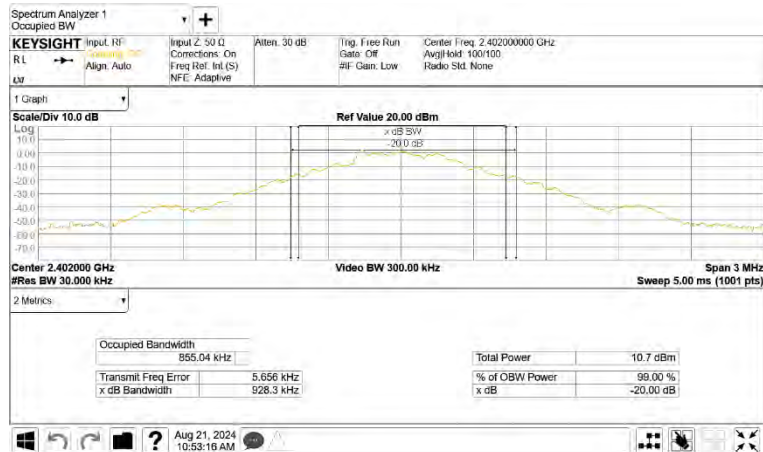

Right, GFSK, 20 dB Bandwidth, Middle Channel (2 441 MHz)

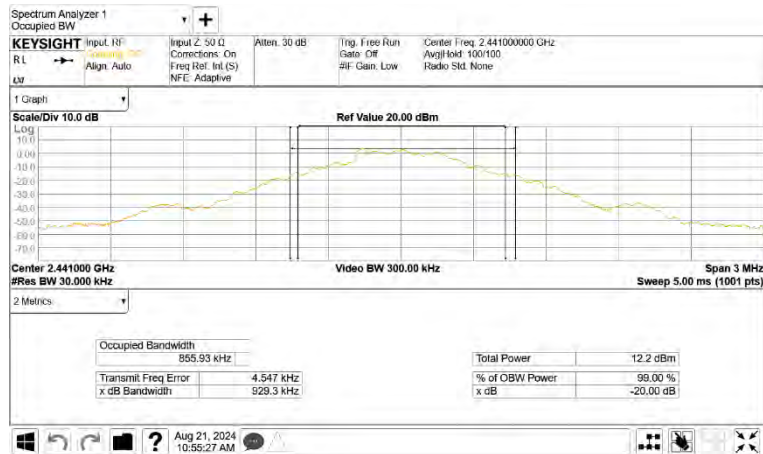


Right, GFSK, 20 dB Bandwidth, Highest Channel (2 480 MHz)




Right, 8DPSK, 20 dB Bandwidth, Lowest Channel (2 402 MHz)



Right, 8DPSK, 20 dB Bandwidth, Middle Channel (2 441 MHz)

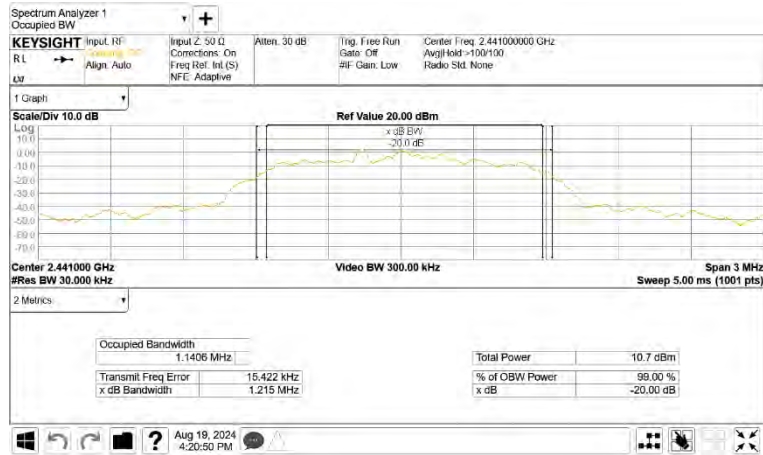

Right, 8DPSK, 20 dB Bandwidth, Highest Channel (2 480 MHz)

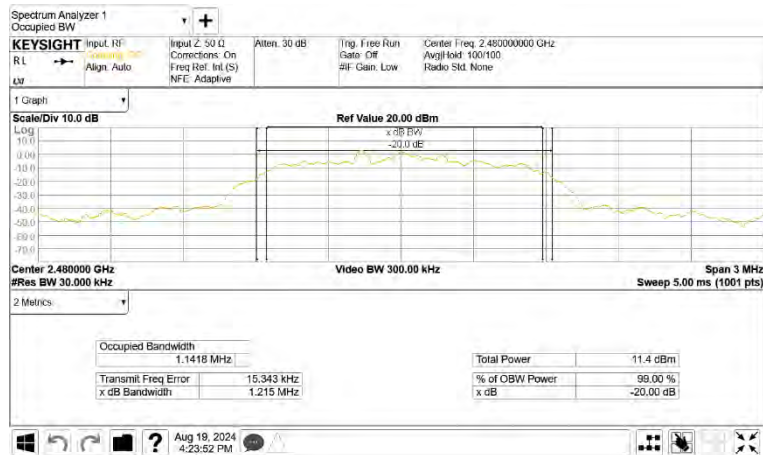

7.3 Carrier Frequency Separation

FCC §15.247(a)(1)

Test Mode : Set to Hopping mode

Result

- Left

Modulation	Carrier Frequency Separation (MHz)	Limit (2/3 of 20dB Bandwidth) (MHz)
GFSK (DH1)	1.00	0.62
8DPSK (3-DH1)	1.00	0.81

- Right

Modulation	Carrier Frequency Separation (MHz)	Limit (2/3 of 20dB Bandwidth) (MHz)
GFSK (DH1)	1.00	0.62
8DPSK (3-DH1)	1.00	0.81

Note:


The EUT complies with the minimum channel separation requirement when it is operating **1x/EDR mode using 79 channels** and when operating in **AFH mode using 20 channels**.

PLOTS OF EMISSIONS


Left, Carrier Frequency Separation, GFSK modulation




Left, Carrier Frequency Separation, 8DPSK modulation

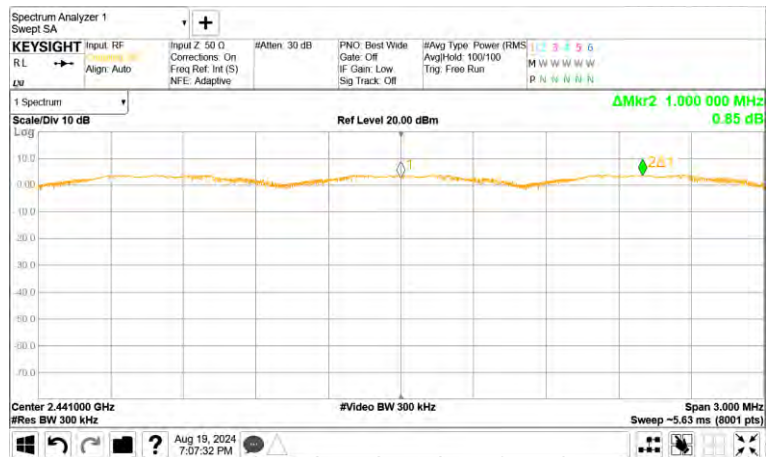

Right, Carrier Frequency Separation, GFSK modulation

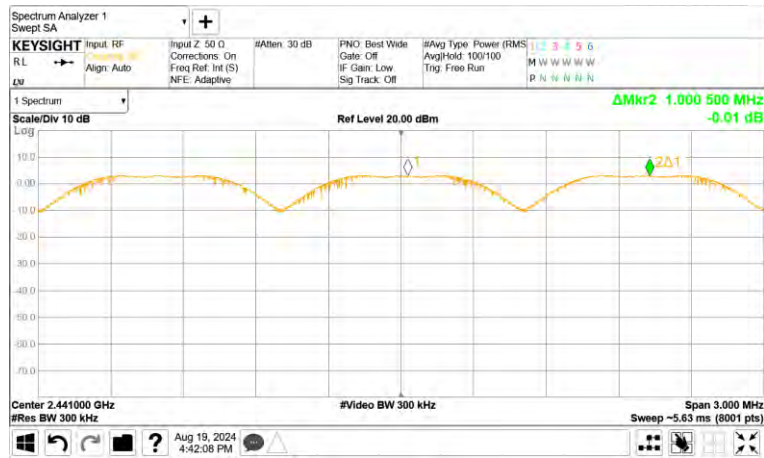

Right, Carrier Frequency Separation, 8DPSK modulation

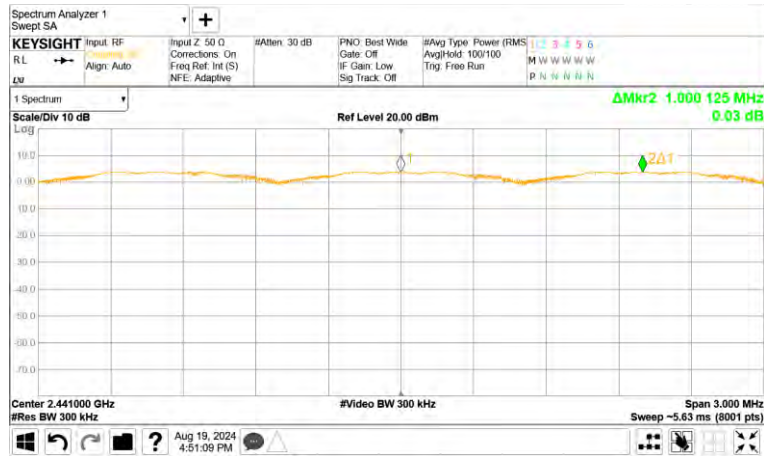

7.4 Transmitter Average Time of Occupancy

FCC §15.247(a)(1)

Test Mode : Set to Hopping mode

Result

- Left

Mode	Pulse width (ms)	*)Numbers of slots	**) Average time of Occupancy (ms)	Limit (ms)	Margin (ms)
1x/EDR	2.88	106.67	307.21	400	92.79
AFH	2.88	53.33	153.59	400	246.41

- Right

Mode	Pulse width (ms)	*)Numbers of slots	**) Average time of Occupancy (ms)	Limit (ms)	Margin (ms)
1x/EDR	2.88	106.67	307.21	400	92.79
AFH	2.88	53.33	153.59	400	246.41

1x/EDR mode


- 1) This result was measured at DH5 mode in **1x/EDR mode**, which has longest time in one transmission burst.
- 2) Bluetooth 1x/EDR mode has a channel hopping rate of 1 600 hops/s and 79 hopping channels.
- 3) The average time of occupancy in the specified 31.6 second period (79 channels x 0.4 s) is equal to pulse width x (hopping rate / 6) / 79 x (0.4 x hopping channels).
- 4) *) Numbers of slots in 31.6 sec = $(1\ 600 / 6) / 79 \times 31.6 = 106.67$
- 5) **) Average time of Occupancy = Pulse width x 106.67

AFH mode


- 1) This result was measured at DH5 mode in **AFH mode**, which has longest time in one transmission burst.
- 2) Bluetooth AFH mode has a channel hopping rate of 800 hops/s and 20 hopping channels.
- 3) The average time of occupancy in the specified 8 second period (20 channels x 0.4 s) is equal to pulse width x (hopping rate / 6) / 20 x (0.4 x hopping channels).
- 4) *) Numbers of slots in 20 sec = $(800 / 6) / 20 \times 8 = 53.33$
- 5) **) Average time of Occupancy = Pulse width x 53.33.

PLOTS OF EMISSIONS

Left, Pules width, DH5

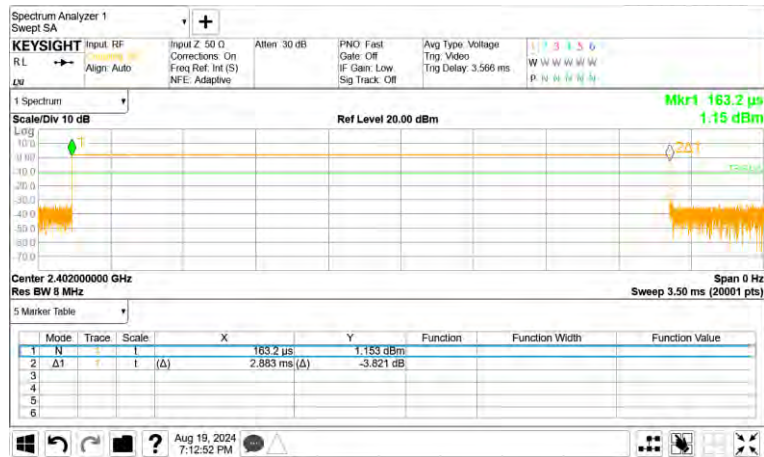

Right, Pules width, DH5

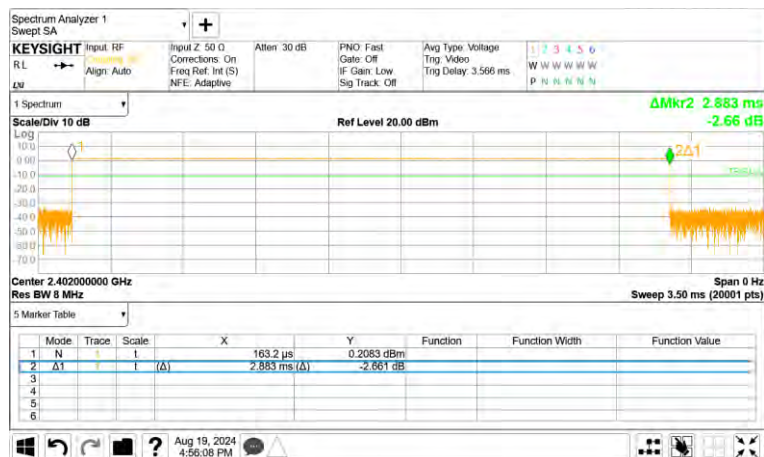

7.5 Number of Hopping Channels

FCC §15.247(a)(1)(iii)

Test Mode : Set to Hopping mode


Result

The EUT complies with the minimum of 15 hopping channels when it is operating 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels

Left, Number of hopping channels, GFSK (DH1)




Left, Number of hopping channels, 8DPSK (3-DH1)

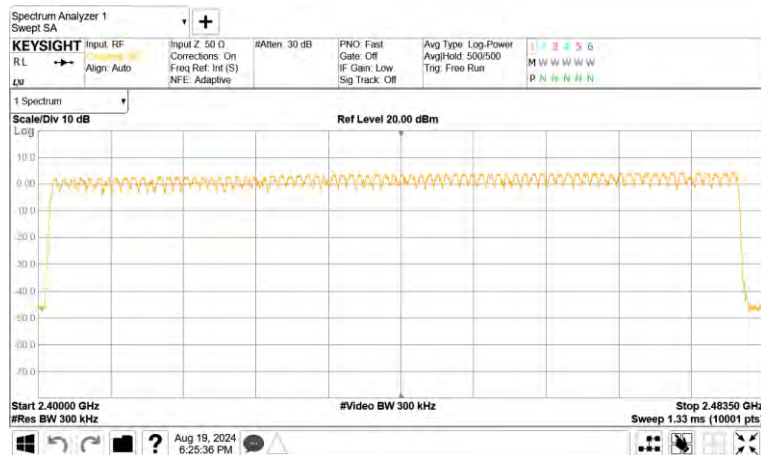

Right, Number of hopping channels, GFSK (DH1)



Right, Number of hopping channels, 8DPSK (3-DH1)

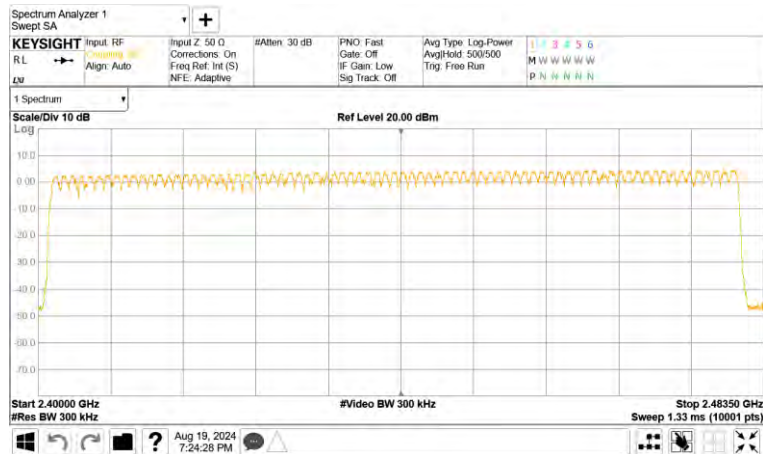

7.6 Peak Output Power

FCC §15.247(b)(3)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

- Left

Modulation	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GFSK (DH1)	Lowest	2 402	4.28	20.97
	Middle	2 441	5.66	20.97
	Highest	2 480	6.31	20.97
$\pi/4$ DQPSK (2-DH1)	Lowest	2 402	3.86	20.97
	Middle	2 441	5.35	20.97
	Highest	2 480	6.02	20.97
8DPSK (3-DH1)	Lowest	2 402	4.46	20.97
	Middle	2 441	5.92	20.97
	Highest	2 480	6.59	20.97

- Right

Modulation	Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
GFSK (DH1)	Lowest	2 402	4.25	20.97
	Middle	2 441	5.69	20.97
	Highest	2 480	6.34	20.97
$\pi/4$ DQPSK (2-DH1)	Lowest	2 402	3.87	20.97
	Middle	2 441	5.40	20.97
	Highest	2 480	6.03	20.97
8DPSK (3-DH1)	Lowest	2 402	4.48	20.97
	Middle	2 441	6.00	20.97
	Highest	2 480	6.64	20.97


Notes:

1. The following equation was used for spectrum offset:

$$\text{Spectrum offset (dB)} = \text{Attenuator (dB)} + \text{Cable Loss (dB)} + \text{SMA Type Connector Loss (dB)}$$

PLOTS OF EMISSIONS


Left, Maximum Peak Output Power, GFSK, Lowest Channel

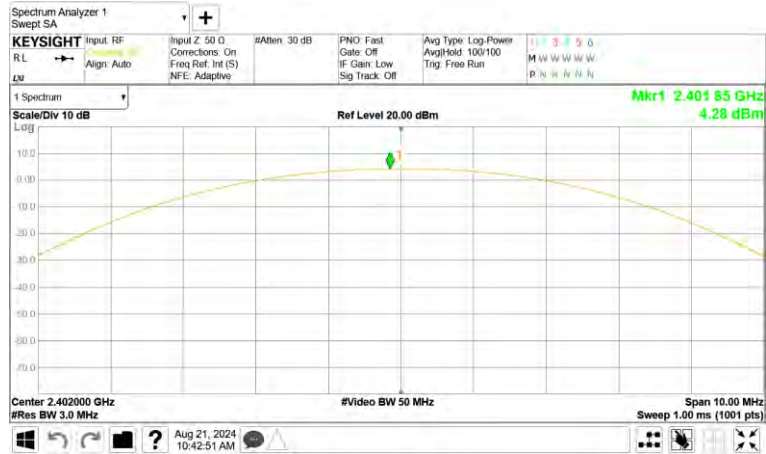


Left, Maximum Peak Output Power, GFSK, Middle Channel




Left, Maximum Peak Output Power, GFSK, Highest Channel

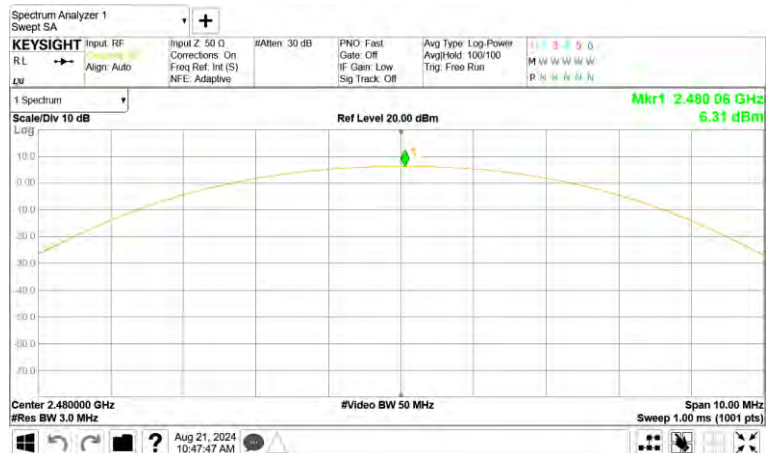


Left, Maximum Peak Output Power, $\pi/4$ DQPSK, Lowest Channel

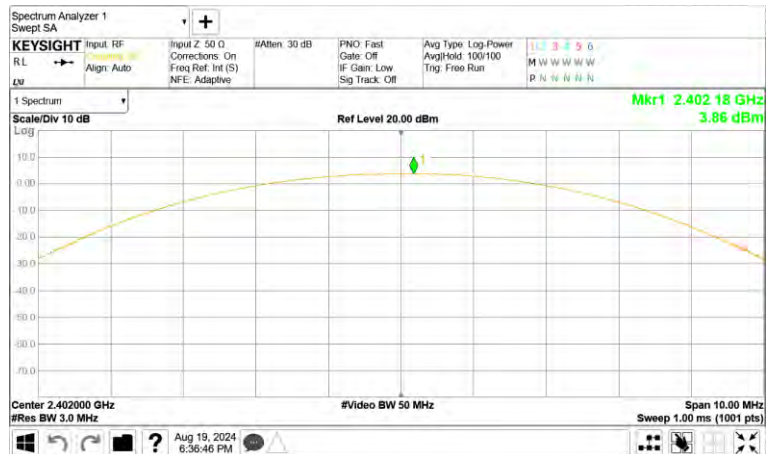


Left, Maximum Peak Output Power, $\pi/4$ DQPSK, Middle Channel

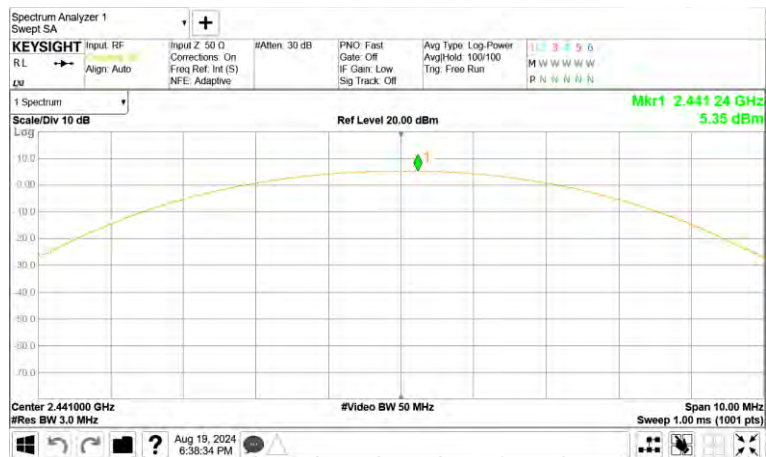


Left, Maximum Peak Output Power, $\pi/4$ DQPSK, Highest Channel

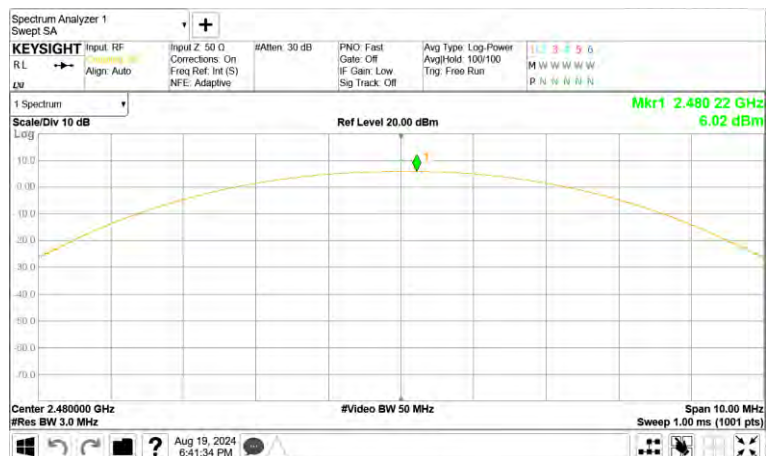

Left, Maximum Peak Output Power, 8DPSK, Lowest Channel

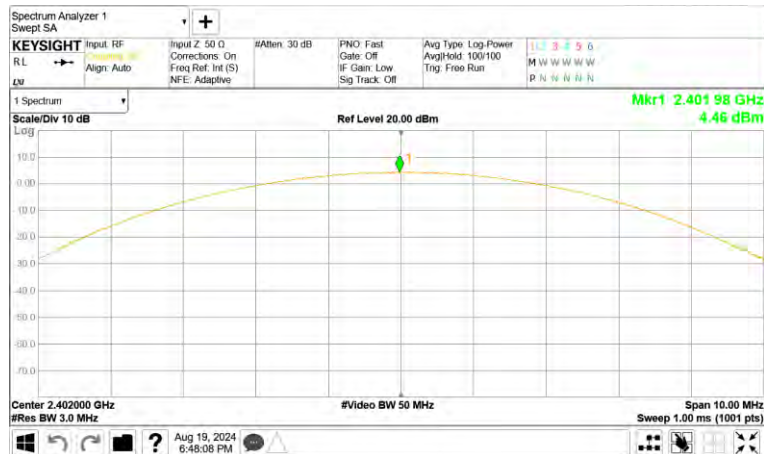


Left, Maximum Peak Output Power, 8DPSK, Middle Channel

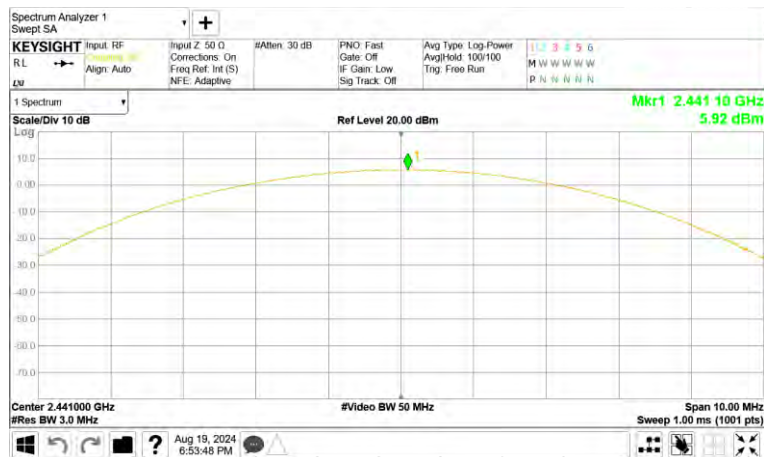

Left, Maximum Peak Output Power, 8DPSK, Highest Channel




Right, Maximum Peak Output Power, GFSK, Lowest Channel

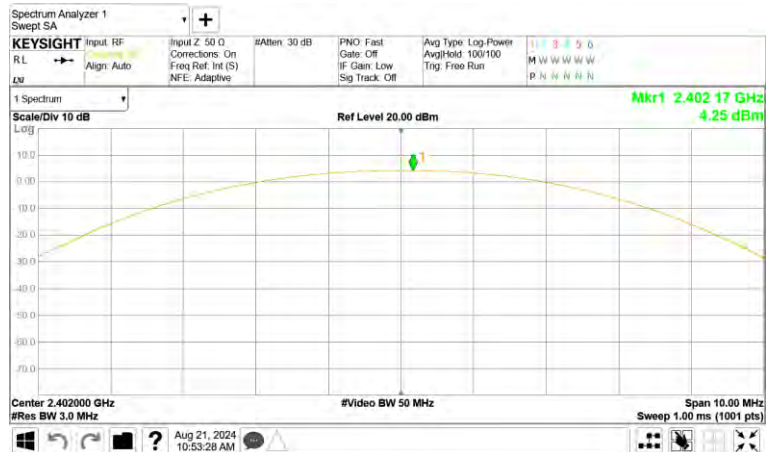


Right, Maximum Peak Output Power, GFSK, Middle Channel




Right, Maximum Peak Output Power, GFSK, Highest Channel

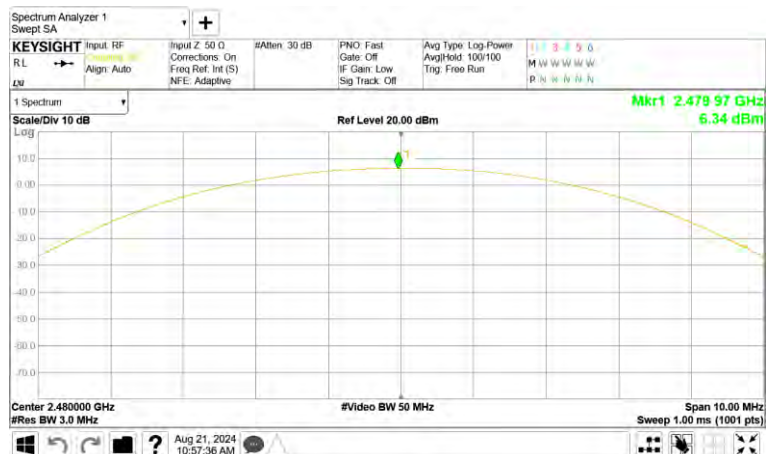


Right, Maximum Peak Output Power, $\pi/4$ DQPSK, Lowest Channel

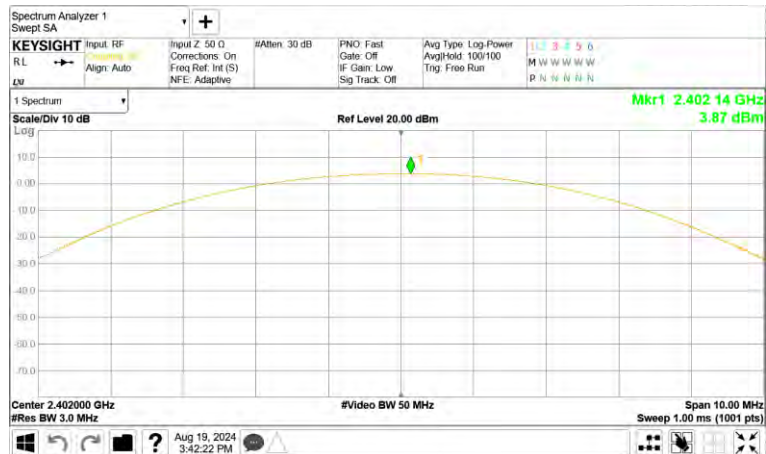

Right, Maximum Peak Output Power, $\pi/4$ DQPSK, Middle Channel

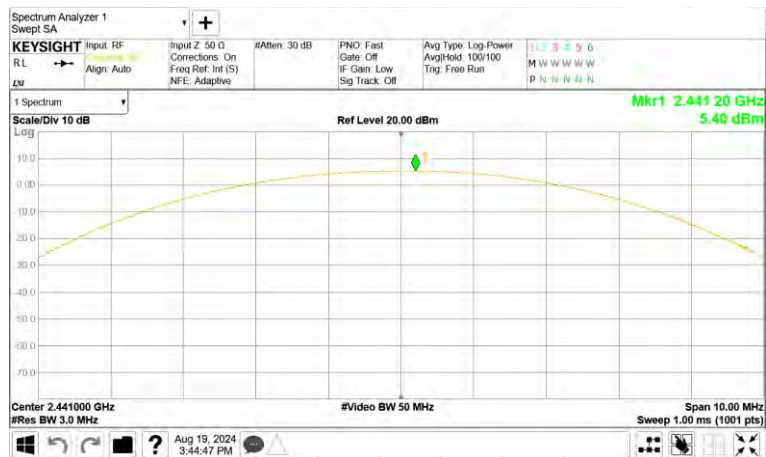

Right, Maximum Peak Output Power, $\pi/4$ DQPSK, Highest Channel

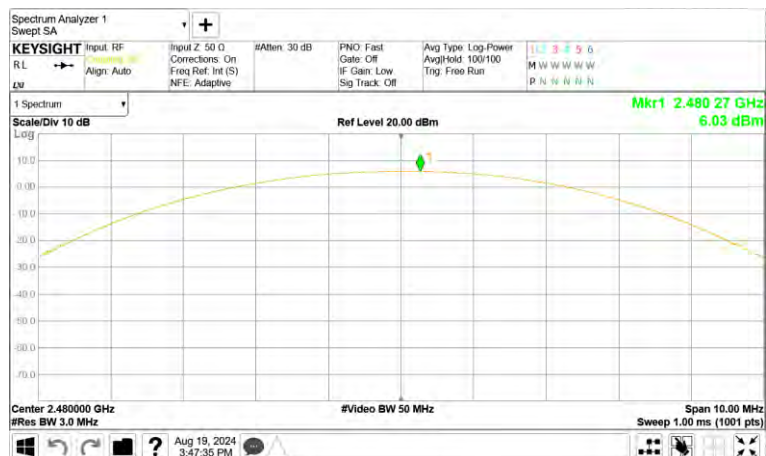

Right, Maximum Peak Output Power, 8DPSK, Lowest Channel



Right, Maximum Peak Output Power, 8DPSK, Middle Channel



Right, Maximum Peak Output Power, 8DPSK, Highest Channel



7.7 Conducted Spurious Emissions

FCC §15.247(e)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result


Modulation	Channel	Frequency (MHz)	Conducted Spurious Emissions (dBc)	Limit (dBc)
GFSK (DH1)	Lowest	2 402	More than 20 dBc	20
	Middle	2 441	More than 20 dBc	20
	Highest	2 480	More than 20 dBc	20
8DPSK (3-DH1)	Lowest	2 402	More than 20 dBc	20
	Middle	2 441	More than 20 dBc	20
	Highest	2 480	More than 20 dBc	20

Notes:


The cable and attenuator loss from 30 MHz to 26.5 GHz was reflected in spectrum analyzer with correction factor for the spurious emissions test.

PLOTS OF EMISSIONS


Left, Band Edge, GFSK, Lowest Channel (2 402 MHz)

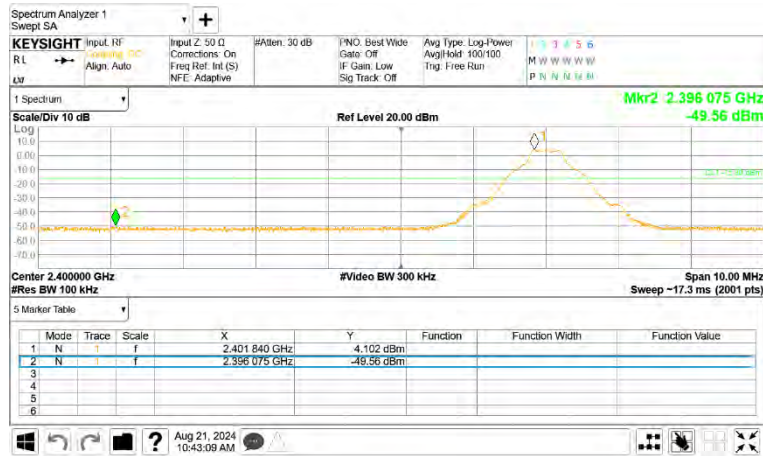


Left, Band Edge, Hopping mode, GFSK, Lowest Channel (2 402 MHz)

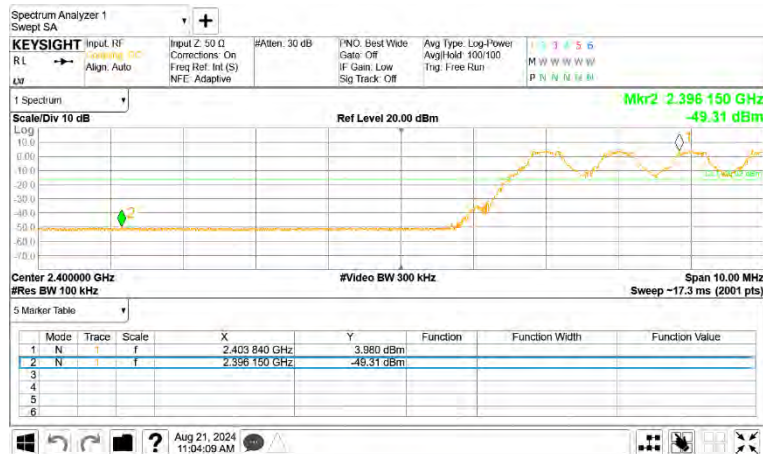


Left, Reference Level, GFSK, Middle Channel (2 441 MHz)

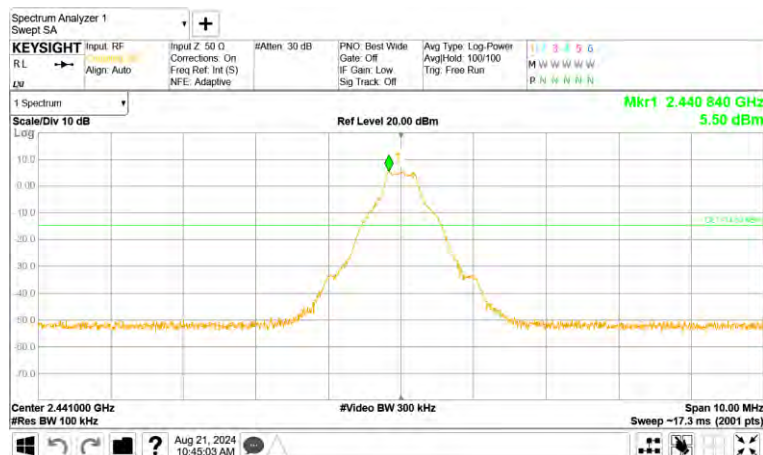


Left, Band Edge, GFSK, Highest Channel (2 480 MHz)

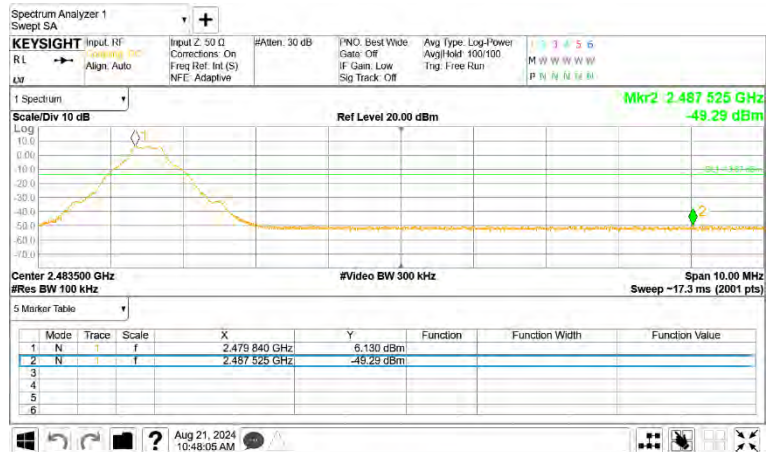

Left, Band Edge, Hopping mode, GFSK, Highest Channel (2 480 MHz)

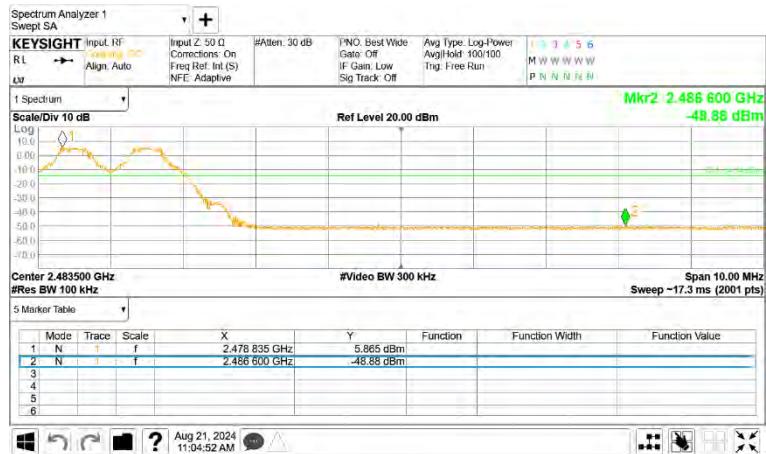


Left, Band Edge, 8DPSK, Lowest Channel (2 402 MHz)

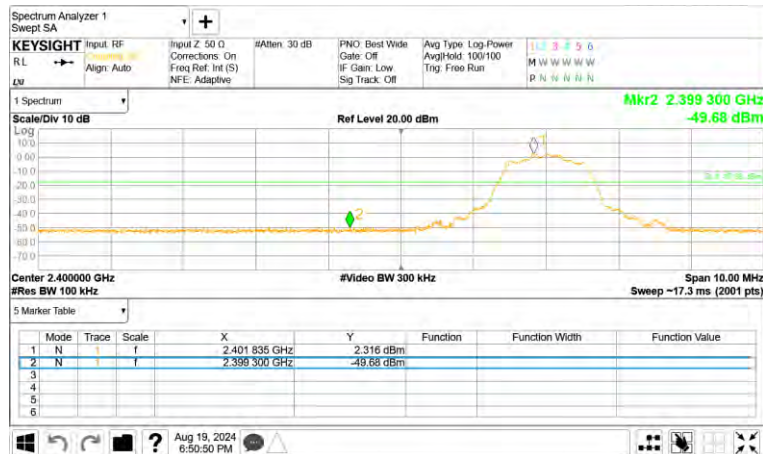


Left, Band Edge, Hopping mode, 8DPSK, Lowest Channel (2 402 MHz)



Left, Reference Level, 8DPSK, Middle Channel (2 441 MHz)

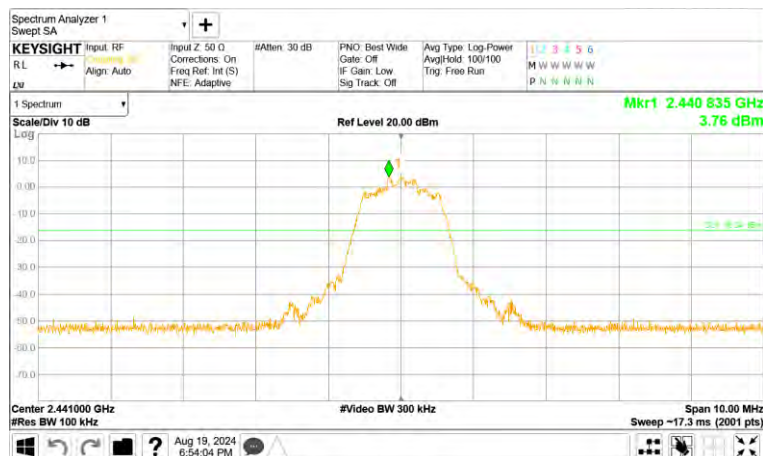


Left, Band Edge, 8DPSK, Highest Channel (2 480 MHz)

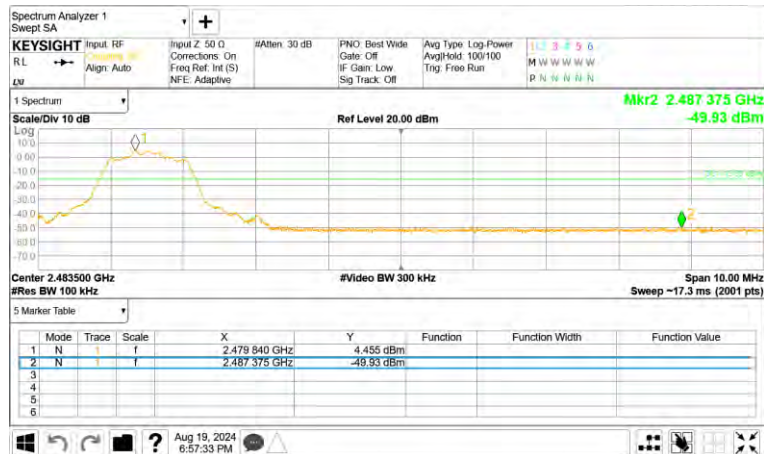


Left, Band Edge, Hopping mode, 8DPSK, Highest Channel (2 480 MHz)




Right, Band Edge, GFSK, Lowest Channel (2 402 MHz)

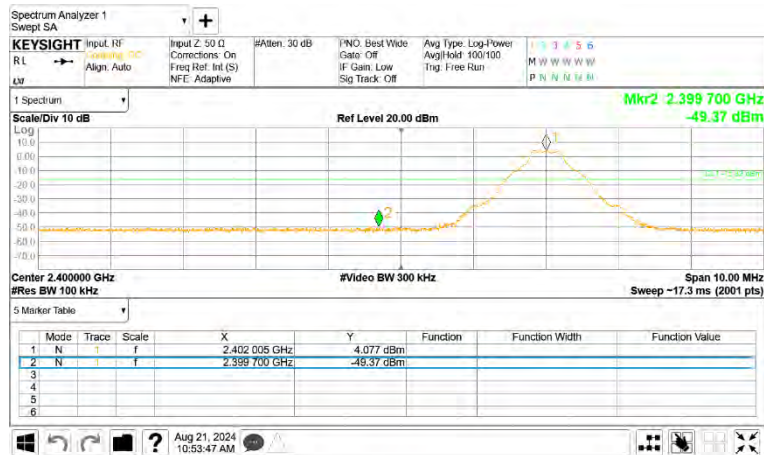


Right, Band Edge, Hopping mode, GFSK, Lowest Channel (2 402 MHz)

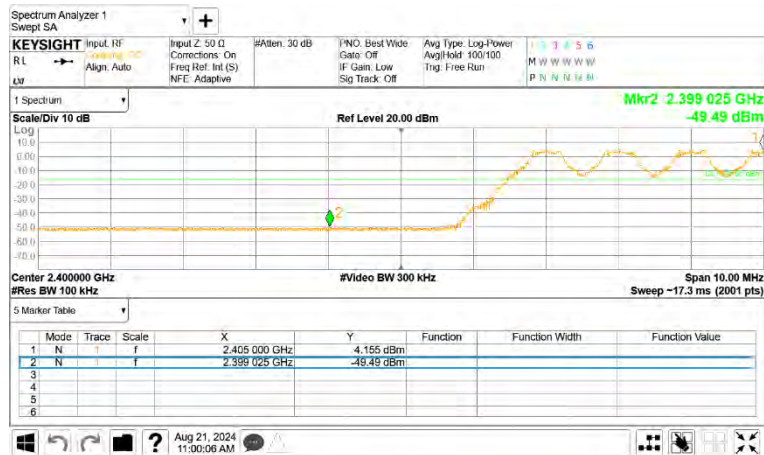

Right, Reference Level, GFSK, Middle Channel (2 441 MHz)

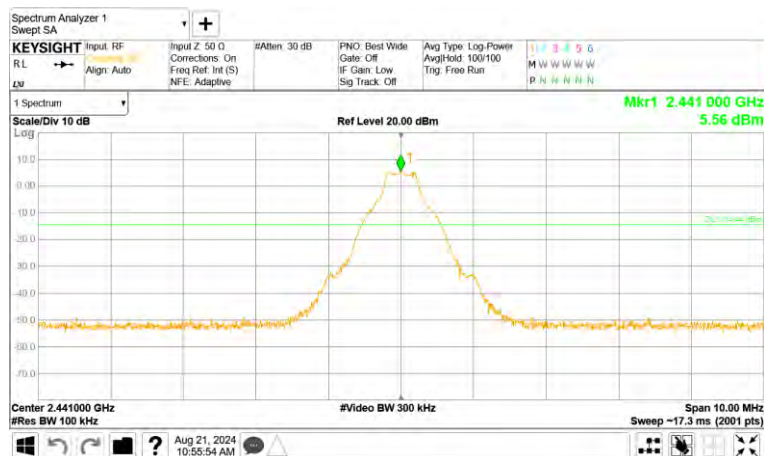

Right, Band Edge, GFSK, Highest Channel (2 480 MHz)

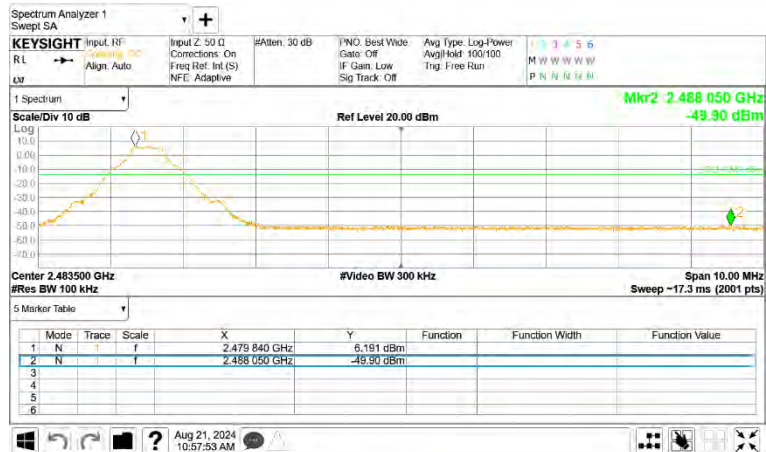


Right, Band Edge, Hopping mode, GFSK, Highest Channel (2 480 MHz)




Right, Band Edge, 8DPSK, Lowest Channel (2 402 MHz)




Right, Band Edge, Hopping mode, 8DPSK, Lowest Channel (2 402 MHz)

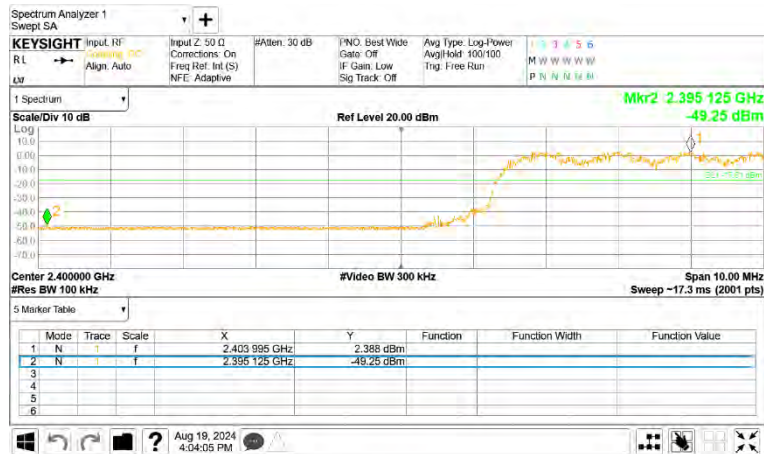


Left, Reference Level, 8DPSK, Middle Channel (2 441 MHz)

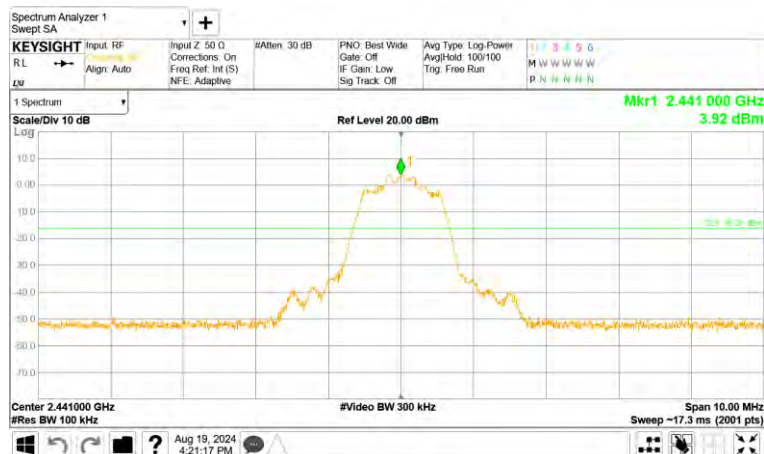

Right, Band Edge, 8DPSK, Highest Channel (2 480 MHz)

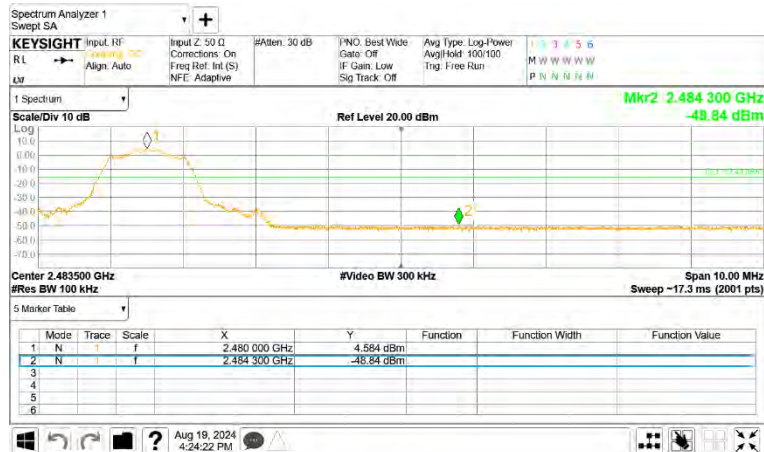


Right, Band Edge, Hopping mode, 8DPSK, Highest Channel (2 480 MHz)

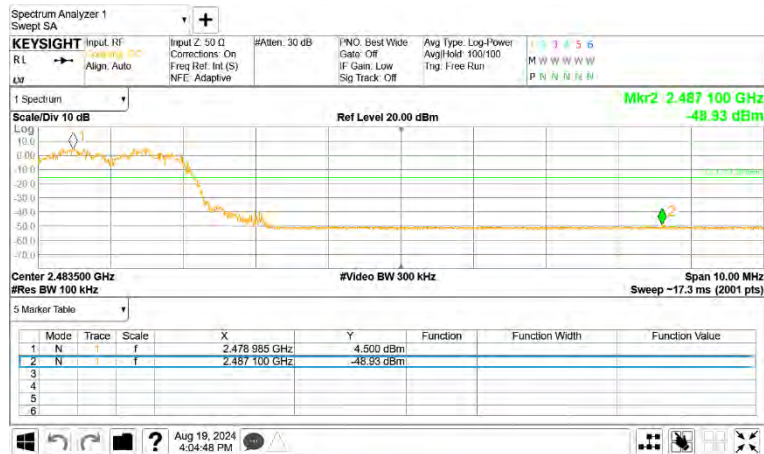

PLOTS OF EMISSIONS


Left, Conducted Spurious Emissions, GFSK, Lowest Channel (2 402 MHz)

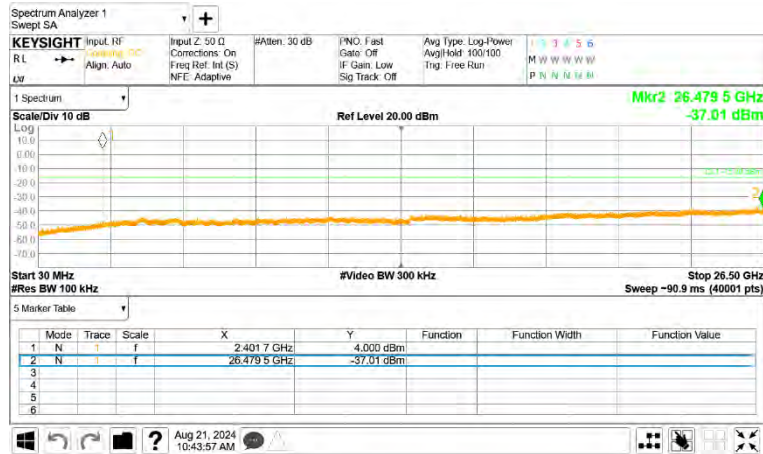


Left, Conducted Spurious Emissions, GFSK, Middle Channel (2 441 MHz)



Left, Conducted Spurious Emissions, GFSK, Highest Channel (2 480 MHz)

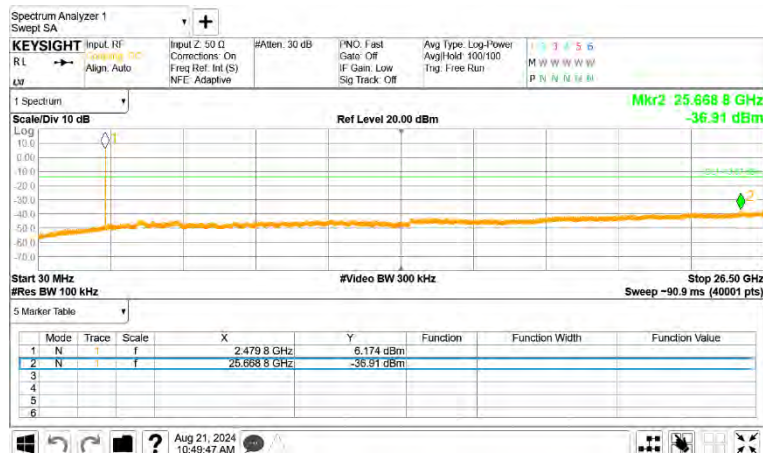


Left, Conducted Spurious Emissions, 8DPSK, Lowest Channel (2 402 MHz)

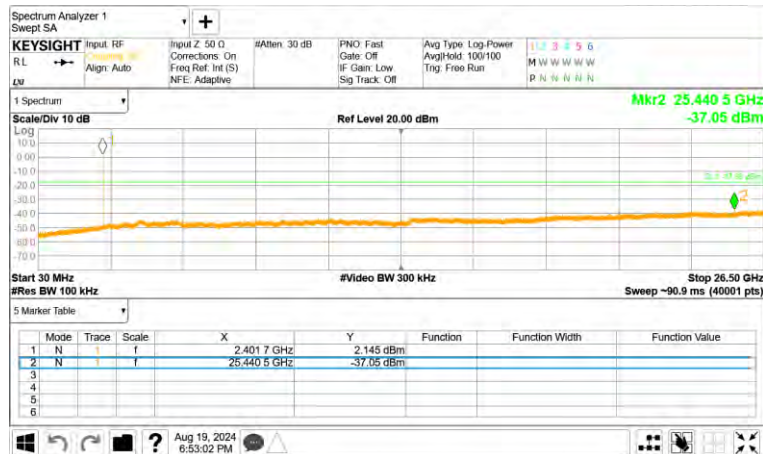

Left, Conducted Spurious Emissions, 8DPSK, Middle Channel (2 441 MHz)




Left, Conducted Spurious Emissions, 8DPSK, Highest Channel (2 480 MHz)

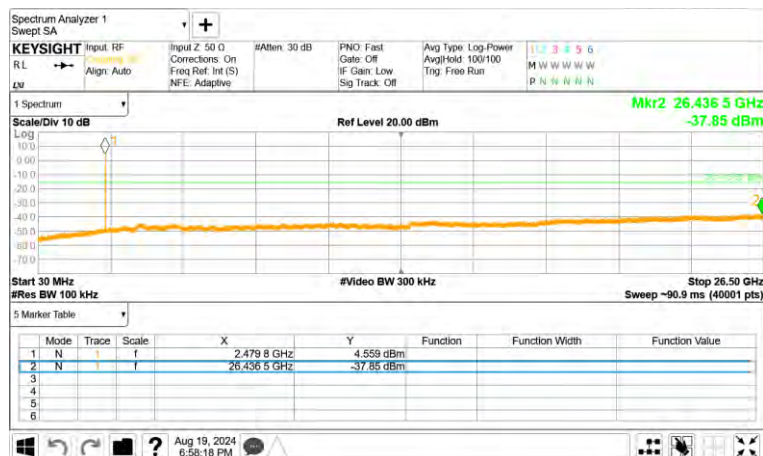

Right, Conducted Spurious Emissions, GFSK, Lowest Channel (2 402 MHz)




Right, Conducted Spurious Emissions, GFSK, Middle Channel (2 441 MHz)

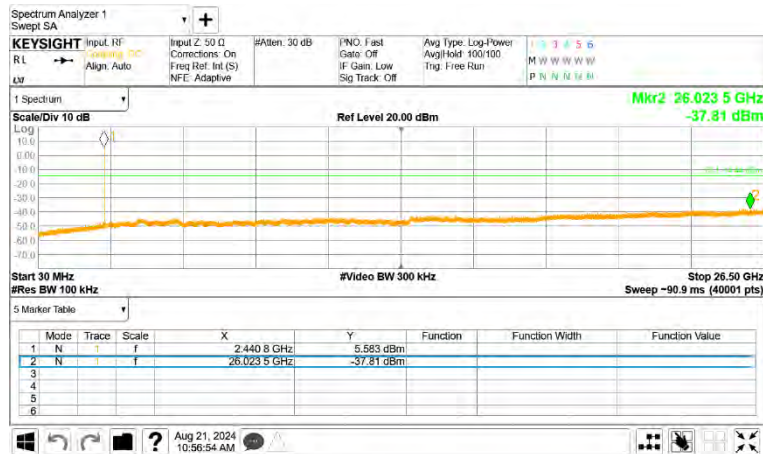

Right, Conducted Spurious Emissions, GFSK, Highest Channel (2 480 MHz)




Right, Conducted Spurious Emissions, 8DPSK, Lowest Channel (2 402 MHz)

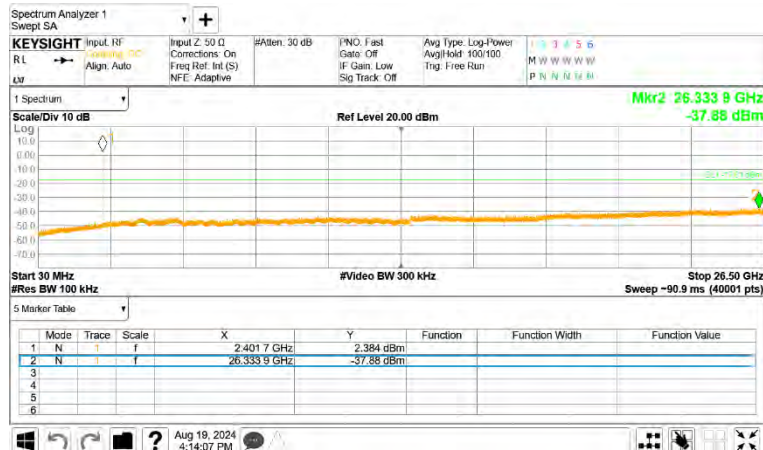

Right, Conducted Spurious Emissions, 8DPSK, Middle Channel (2 441 MHz)



Right, Conducted Spurious Emissions, 8DPSK, Highest Channel (2 480 MHz)

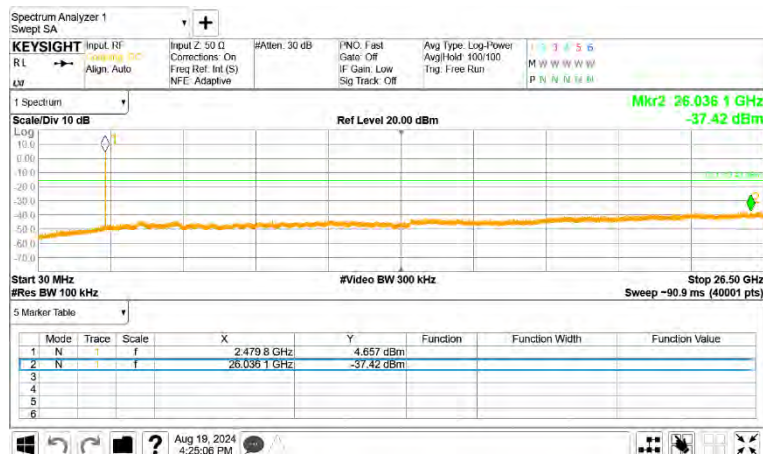

7.8 Radiated Spurious Emissions

FCC §15.247(d)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result

Left, GFSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.73	56.79	H	PK	-10.1	46.69	74.00	27.31
1 549.73	56.79	H	AV	-10.1	46.69	54.00	7.31
4 263.47	46.75	V	PK	1.7	48.45	74.00	25.55
4 263.47	46.75	V	AV	1.7	48.45	54.00	5.55
6 405.20	43.83	H	PK	8.4	52.23	74.00	21.77
6 405.20	43.83	H	AV	8.4	52.23	54.00	1.77
11 309.43	37.19	V	PK	19.6	56.79	74.00	17.21
11 431.72	25.86	H	AV	19.6	45.46	54.00	8.54

Left, GFSK modulation_Middle channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 462.20	62.12	H	PK	-9.7	52.42	74.00	21.58
1 462.20	62.12	H	AV	-9.7	52.42	54.00	1.58
2 163.13	62.04	H	PK	-6.0	56.04	74.00	17.96
2 163.13	62.04	H	AV	-6.0	56.04	54.00	7.96
6 511.87	42.53	H	PK	8.9	51.43	74.00	22.57
6 511.87	42.53	H	AV	8.9	51.43	54.00	2.57
12 526.13	36.92	V	PK	19.6	56.52	74.00	17.48
11 512.98	25.82	H	AV	19.8	45.62	54.00	8.38

Left, GFSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.87	57.06	H	PK	-10.1	46.96	74.00	27.04
1 549.87	57.06	H	AV	-10.1	46.96	54.00	7.04
2 130.73	53.77	H	PK	-6.5	47.27	74.00	26.73
2 130.73	53.77	H	AV	-6.5	47.27	54.00	6.73
6 393.87	42.91	V	PK	8.5	51.41	74.00	22.59
6 393.87	42.91	V	AV	8.5	51.41	54.00	2.59
6 613.33	40.78	H	PK	9.3	50.08	74.00	23.92
6 613.33	40.78	H	AV	9.3	50.08	54.00	3.92
11 370.77	37.75	V	PK	19.6	57.35	74.00	16.65
11 879.83	25.99	H	AV	19.5	45.49	54.00	8.51

Left, 8DPSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.87	57.27	H	PK	-10.1	47.17	74.00	26.83
1 549.87	57.27	H	AV	-10.1	47.17	54.00	6.83
***6 406.27	42.77	H	PK	8.4	51.17	74.00	22.83
11 883.09	37.06	V	PK	19.5	56.56	74.00	17.44
11 883.09	37.06	V	AV	19.5	56.56	54.00	7.44
12 675.25	25.74	H	AV	20.1	45.84	54.00	8.16

Left, 8DPSK modulation_Middle channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.87	57.81	H	PK	-10.1	47.71	74.00	26.29
1 549.87	57.81	H	AV	-10.1	47.71	54.00	6.29
***6 509.20	42.30	H	PK	8.8	51.10	74.00	22.90
11 390.32	36.97	V	PK	19.5	56.47	74.00	17.53
11 861.05	26.17	V	AV	19.5	45.67	54.00	8.33

Left, 8DPSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.73	56.87	H	PK	-10.1	46.77	74.00	27.23
1 549.73	56.87	H	AV	-10.1	46.77	54.00	7.23
***6 613.20	42.30	H	PK	9.3	51.60	74.00	22.40
11 530.62	37.10	H	PK	19.8	56.90	74.00	17.10
10 981.88	26.44	H	AV	19.3	45.74	54.00	8.26

Right, GFSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4 804.00	39.68	V	PK	3.6	43.28	74.00	30.72
4 804.00	39.68	V	AV	3.6	43.28	54.00	10.72
***6 405.47	46.26	H	PK	8.4	54.66	74.00	19.34
11 407.57	35.81	H	PK	19.5	55.31	74.00	18.69
11 407.76	26.84	H	AV	19.5	46.34	54.00	7.66

Right, GFSK modulation_Middle channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.73	56.03	H	PK	-10.1	45.93	74.00	28.07
1 549.73	56.03	H	AV	-10.1	45.93	54.00	8.07
***6 456.80	45.41	H	PK	8.5	53.91	74.00	20.09
11 745.28	37.71	V	PK	19.4	57.11	74.00	16.89
11 626.07	25.82	H	AV	19.7	45.52	54.00	8.48

Right, GFSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.93	56.59	H	PK	-10.1	46.49	74.00	27.51
1 549.93	56.59	H	AV	-10.1	46.49	54.00	7.51
***6 613.33	44.70	H	PK	9.3	54.00	74.00	20.00
11 101.09	37.33	H	PK	19.2	56.53	74.00	17.47
11 521.42	25.81	H	AV	19.8	45.61	54.00	8.39

Right, 8DPSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.87	56.58	H	PK	-10.1	46.48	74.00	27.52
1 549.87	56.58	H	AV	-10.1	46.48	54.00	7.52
***6 405.47	44.74	H	PK	8.4	53.14	74.00	20.86
10 922.84	37.22	V	PK	19.5	56.72	74.00	17.28
11 423.28	25.99	V	AV	19.5	45.49	54.00	8.51

Right, 8DPSK modulation_Middle channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 549.87	56.64	H	PK	-10.1	46.54	74.00	27.46
1 549.87	56.64	H	AV	-10.1	46.54	54.00	7.46
***6 509.47	44.02	H	PK	8.8	52.82	74.00	21.18
11 353.33	36.86	V	PK	19.6	56.46	74.00	17.54
11 611.12	25.99	V	AV	19.8	45.79	54.00	8.21

Right, 8DPSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 550.07	56.24	H	PK	-10.1	46.14	74.00	27.86
1 550.07	56.24	H	AV	-10.1	46.14	54.00	7.86
***6 396.13	45.12	V	PK	8.5	53.62	74.00	20.38
***6 613.33	44.60	H	PK	9.3	53.90	74.00	20.10
10 889.49	37.37	H	PK	19.6	56.97	74.00	17.03
11 817.54	26.72	H	AV	19.4	46.12	54.00	7.88


Notes:

- *Pol. : H = Horizontal, V = Vertical, Mode : PK = Peak, AV = Average
- **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
- Average measurement was not performed when peak-detected emission complies with the average limit.
- Other spurious was under 20 dB below Fundamental. (**Non-restricted band)
- 8DPSK(Left) lowest channel and GFSK(Right) lowest channel were the worst condition.
- The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization.
- Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.
- Average emissions were measured using RBW = 1 MHz, VBW = 3 kHz, Detector = Peak.
- The spectrum was measured from 1 GHz to 10th harmonic and the worst-case emissions were reported.


PLOTS OF EMISSIONS

Worst Case


Left, 8DPSK, Lowest Channel : 1 GHz to 7 GHz_Peak

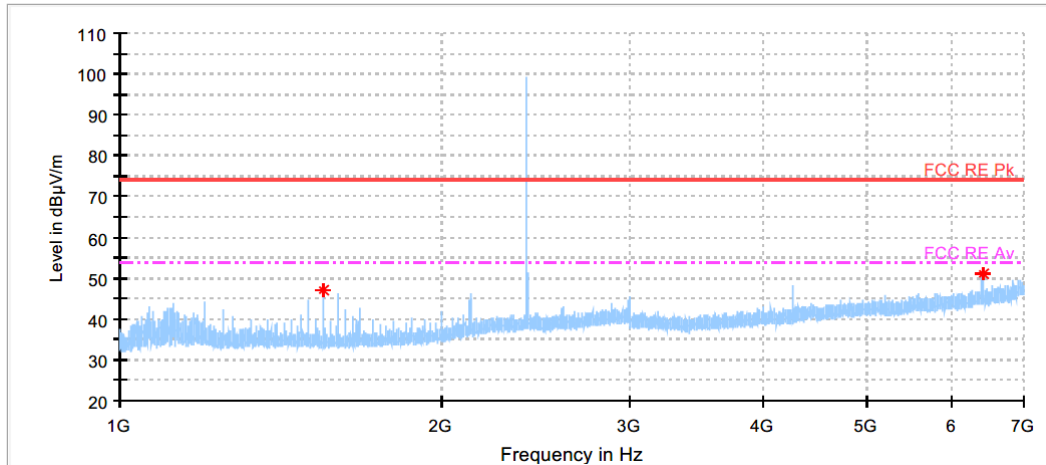


Left, 8DPSK, Lowest Channel : 7 GHz to 12.75 GHz_Peak

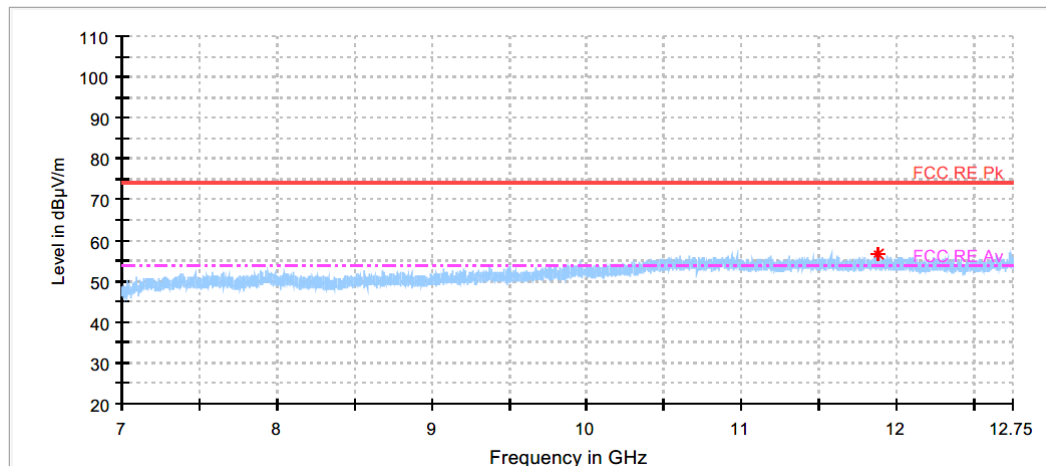


Left, 8DPSK, Lowest Channel : 1 GHz to 7 GHz_Average

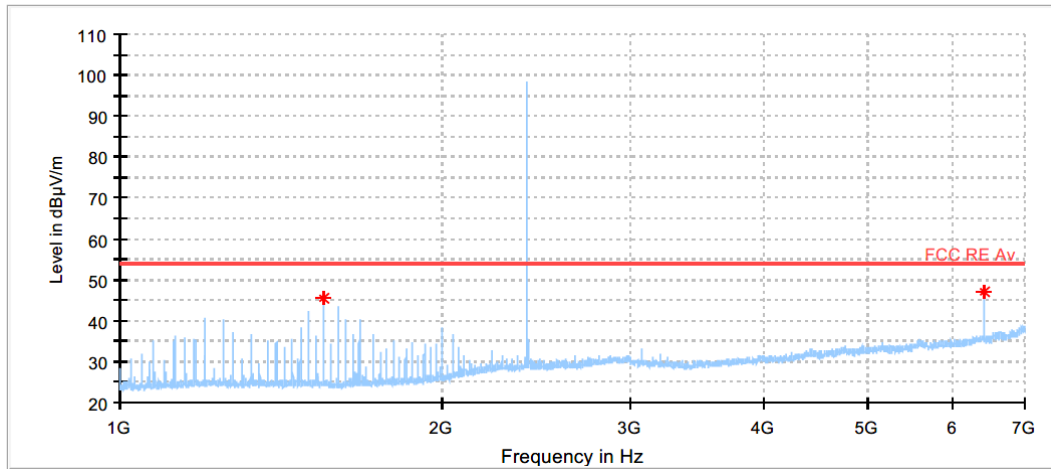


Left, 8DPSK, Lowest Channel : 7 GHz to 12.75 GHz_Average

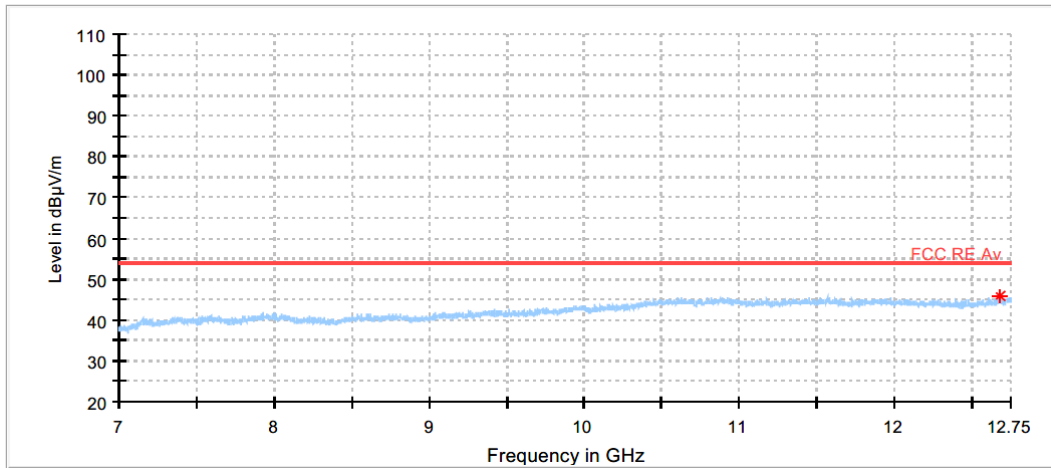


Right, GFSK, Lowest Channel : 1 GHz to 7 GHz_Peak

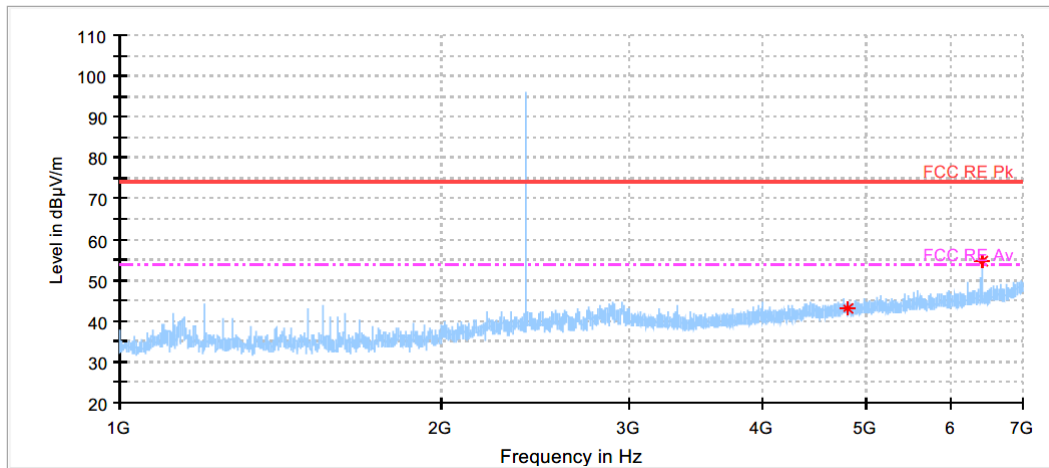


Right, GFSK, Lowest Channel : 7 GHz to 12.75 GHz_Peak

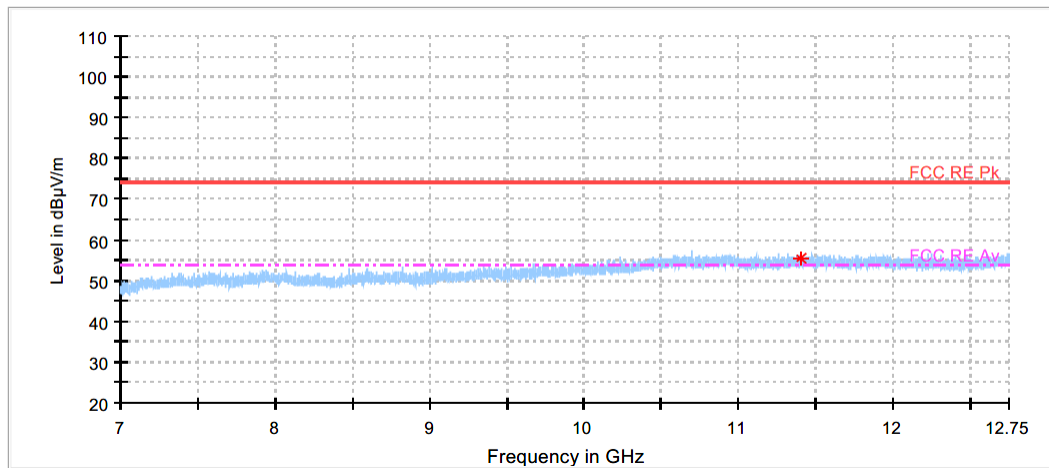

Right, GFSK, Lowest Channel : 1 GHz to 7 GHz_Average

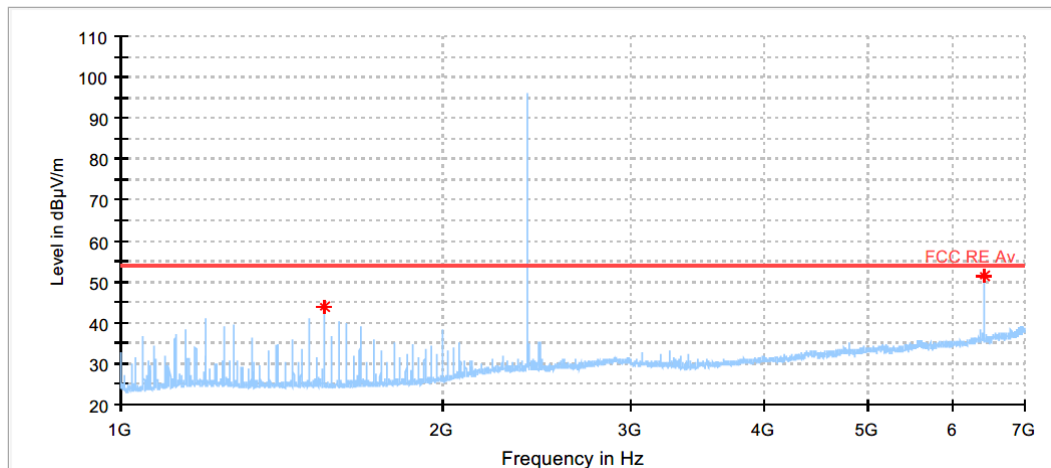

Right, GFSK, Lowest Channel : 7 GHz to 12.75 GHz_Average

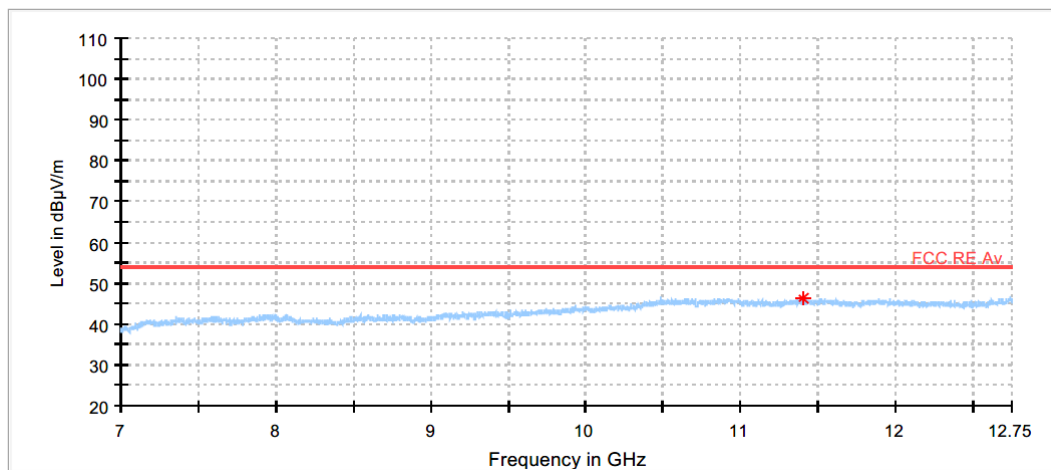

Notes:

- Emission was scanned up to 26 GHz.
 - No emissions were detected

7.9 Radiated Band Edge

FCC §15.247(d)

Test Mode : Set to Lowest channel and Highest channel

Result

Left, GFSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 389.11	47.50	H	PK	-5.4	42.10	74.00	31.90
2 389.11	47.50	H	AV	-5.4	42.10	54.00	11.90
2 390.00	44.07	H	PK	-5.4	38.67	74.00	35.33
2 390.00	44.07	H	AV	-5.4	38.67	54.00	15.33

Left, GFSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	42.75	H	PK	-5.3	37.45	74.00	36.55
2 483.50	42.75	H	AV	-5.3	37.45	54.00	16.55
2 485.69	47.39	H	PK	-5.3	42.09	74.00	31.91
2 485.69	47.39	H	AV	-5.3	42.09	54.00	11.91

Left, 8DPSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 389.59	46.91	V	PK	-5.4	41.51	74.00	32.49
2 389.59	46.91	V	AV	-5.4	41.51	54.00	12.49
2 390.00	43.94	H	PK	-5.4	38.54	74.00	35.46
2 390.00	43.94	H	AV	-5.4	38.54	54.00	15.46

Left, 8DPSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	48.73	H	PK	-5.3	43.43	74.00	30.57
2 483.50	48.73	H	AV	-5.3	43.43	54.00	10.57
2 483.72	55.50	H	PK	-5.3	50.20	74.00	23.80
2 483.72	55.50	H	AV	-5.3	50.20	54.00	3.80

Right, GFSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 315.27	47.54	H	PK	-5.5	42.04	74.00	31.96
2 315.27	47.54	H	AV	-5.5	42.04	54.00	11.96
2 390.00	43.85	H	PK	-5.4	38.45	74.00	35.55
2 390.00	43.85	H	AV	-5.4	38.45	54.00	15.55

Right, GFSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.51	49.16	H	PK	-5.3	43.86	74.00	30.14
2 483.51	49.16	H	AV	-5.3	43.86	54.00	10.14
2 484.08	49.96	H	PK	-5.3	44.66	74.00	29.34
2 484.08	49.96	H	AV	-5.3	44.66	54.00	9.34

Right, 8DPSK modulation_Lowest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 384.45	46.57	H	PK	-5.4	41.17	74.00	32.83
2 384.45	46.57	H	AV	-5.4	41.17	54.00	12.83
2 390.00	43.48	V	PK	-5.4	38.08	74.00	35.92
2 390.00	43.48	V	AV	-5.4	38.08	54.00	15.92

Right, 8DPSK modulation_Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 483.50	42.90	H	PK	-5.3	37.60	74.00	36.40
2 483.50	42.90	H	AV	-5.3	37.60	54.00	16.40
2 485.63	56.53	H	PK	-5.3	51.23	74.00	22.77
2 485.63	56.53	H	AV	-5.3	51.23	54.00	2.77
2 497.70	56.56	H	PK	-5.5	51.06	74.00	22.94
2 497.70	56.56	H	AV	-5.5	51.06	54.00	2.94


Notes:

1. *Pol. : H = Horizontal, V = Vertical, Mode : PK = Peak, AV = Average
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Average measurement was not performed when peak-detected emission complies with the average limit.
4. Other spurious was under 20 dB below Fundamental.
5. 8DPSK(Left) and 8DPSK(Right) were the worst condition.
6. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization.
7. Peak emissions were measured using RBW = 1 MHz, VBW = 3 MHz, Detector = Peak.


PLOTS OF EMISSIONS

Worst Case


Left, 8DPSK modulation, Lowest Channel_Peak

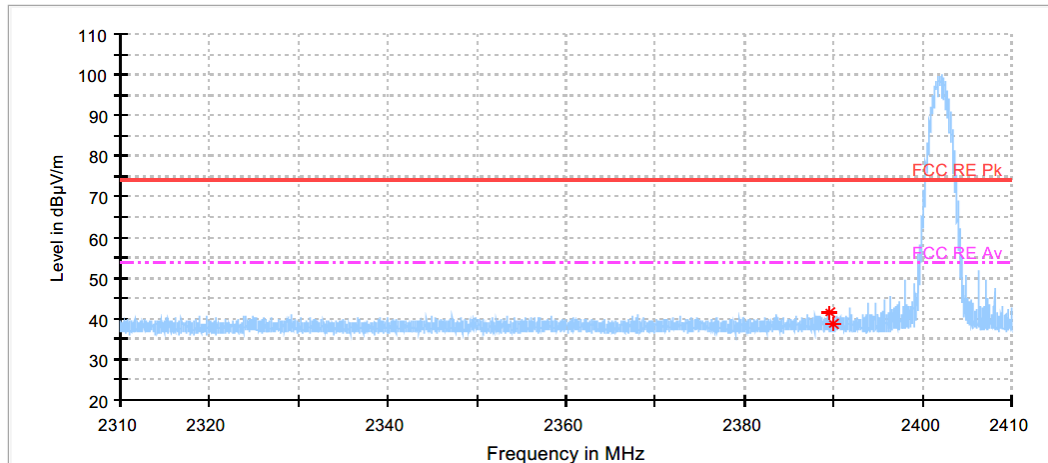


Left, 8DPSK modulation, Lowest Channel_Peak

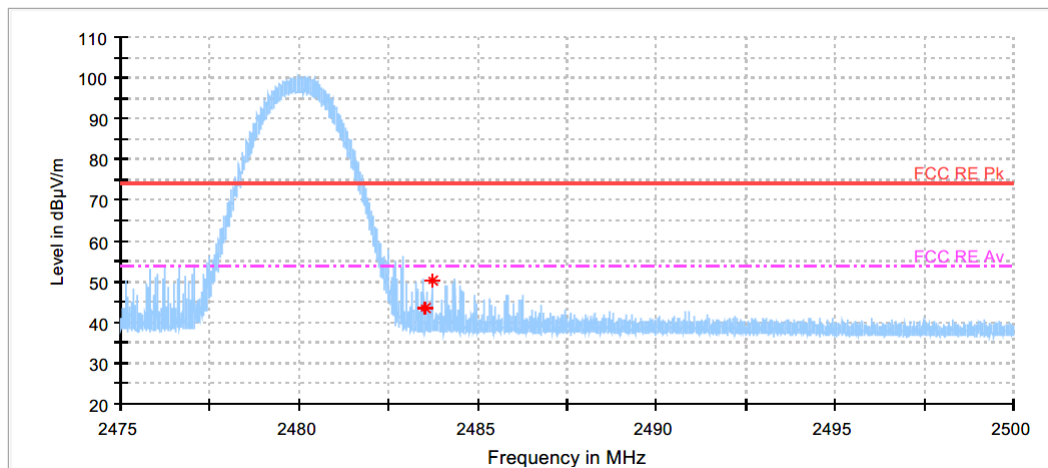

Right, 8DPSK modulation, Lowest Channel_Peak

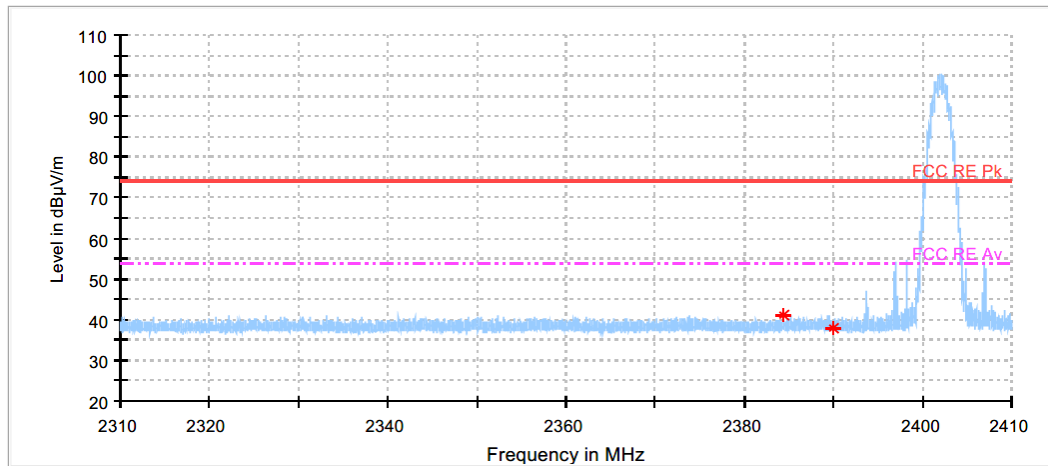

Right, 8DPSK modulation, Lowest Channel_Peak

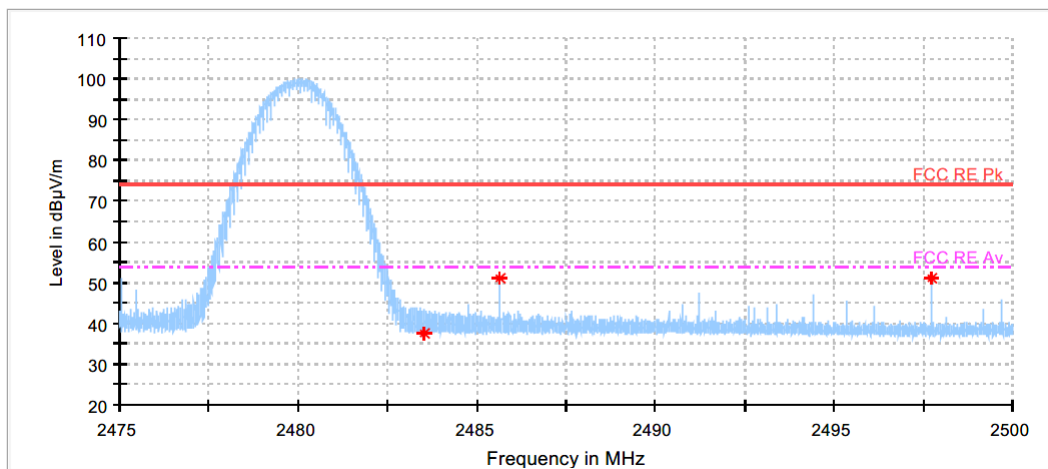

7.10 Radiated Emissions_Below 1GHz

FCC §15.209

Result

Left, 8DPSK, Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
60.39	52.97	V	QP	-21.2	31.77	40.00	8.23
86.15	52.18	H	QP	-25.3	26.88	40.00	13.12
400.00	52.69	H	QP	-16.7	35.99	46.00	10.01
549.97	51.20	H	QP	-14.2	37.00	46.00	9.00
599.98	50.90	H	QP	-12.6	38.30	46.00	7.70
624.93	45.48	H	QP	-12.7	32.78	46.00	13.22

Radiated Measurements at 3meters

Right, 8DPSK, Highest channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	Mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
59.80	52.05	V	QP	-21.1	30.95	40.00	9.05
60.72	52.74	V	QP	-21.2	31.54	40.00	8.46
84.21	52.72	H	QP	-25.8	26.92	40.00	13.08
400.00	53.45	V	QP	-16.7	36.75	46.00	9.25
549.97	51.18	H	QP	-14.2	36.98	46.00	9.02
599.93	49.21	H	QP	-12.6	36.61	46.00	9.39

Radiated Measurements at 3meters


Notes:

1. The worst-case emission was reported.
2. *Pol. H = Horizontal, V = Vertical
3. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
4. Measurements using CISPR quasi-peak mode below 1 GHz.
5. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst data was recorded.
6. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
Per FCC part 15.31(o), test results were not reported.
Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.
7. The limit is on the FCC §15.209.
8. Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).


PLOTS OF EMISSIONS

Worst Case

Radiated emission below 1GHz, Left, 8DPSK, Highest Channel

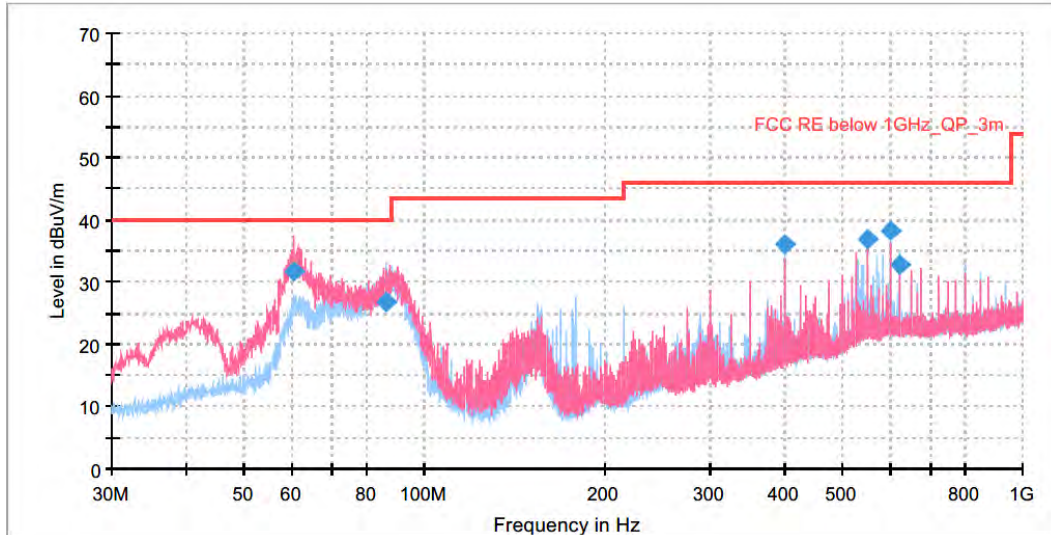

Radiated emission below 1GHz, Right, 8DPSK, Highest Channel

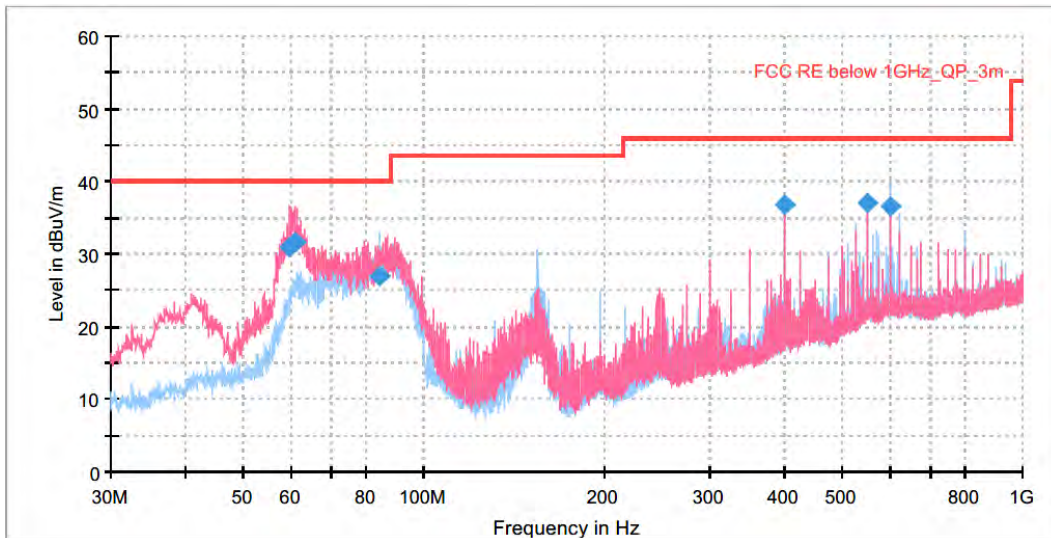

7.11 AC Line Conducted Emissions

FCC §15.207

Result : N/P

Note : The AC power line test was not performed because the EUT does not operate Bluetooth mode while charging.

8. TEST EQUIPMENT

No.	Instrument	Manufacture	Model	Serial No.	Calibration Date	Next Calibration Date
1	DIGITAL MULTIMETER	EZ DIGITAL	DM-334	2111395	2023-10-11	2024-10-11
2	Humidity Temperature Recoder	Lutron	MHB-382SD	AK.26553	2023-10-18	2024-10-18
3	Signal & Spectrum Analyzer	KEYSIGHT	N9030B	MY57144248	2024-03-27	2025-03-27
4	10 dB Attenuator	API technologies corp	40A2W-10	1914	2024-07-03	2025-07-03
5	System DC Power Supply	H.P	6574A	US36340190	2024-07-02	2025-07-02
6	Signal Generator	R&S	SMB100A	175861	2024-03-29	2025-03-29
7	Vector Signal Generator	R&S	SMBV100A	257152	2023-10-11	2024-10-11
8	Signal & Spectrum Analyzer	R&S	FSW43	104084	2024-03-27	2025-03-27
9	EMI TEST RECEIVER	R&S	ESR7	102802	2024-01-08	2025-01-08
10	TRILOG Broadband Test Antenna	Schwarzbeck	VULB 9163	01432	2023-06-16	2025-06-16
11	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-508	2024-07-09	2025-07-09
12	Horn Antenna	Q-par Angus	QSH20S20	8179	2024-07-09	2025-07-09
13	Horn Antenna	Q-par Angus	QSH22K20	8180	2024-07-09	2025-07-09
14	AMPLIFIER	Sonoma Instrument	315	420127	2024-07-02	2025-07-02
15	Signal Conditioning Unit	R&S	SCU-18F	180025	2024-03-27	2025-03-27
16	Signal Conditioning Unit	R&S	SCU-26	10011	2024-07-05	2025-07-05
17	WiFi Filter Bank	R&S	U083	N/A	N/A	N/A
18	High Pass Filter	R&S	HPF 1.2G	N/A	2024-03-27	2025-03-27
19	EMI TEST RECEIVER	R&S	ESW44	103318	2024-01-08	2025-01-08
20	AMPLIFIER	H.P	8447F	2805A03406	2024-01-09	2025-01-09
21	Active Loop Antenna	R&S	HFH2-Z2E	101190	2024-01-11	2025-01-11
22	BIAS UNIT	R&S	IN 600	101621	N/A	N/A

9. ACCURACY OF MEASUREMENT & DECISION RULE

9.1 Uncertainty Calculation

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

PARAMETER	UNCERTAINTY
Radiated Disturbance, Below 30 MHz	4.5 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.4 dB
Radiated Disturbance, 1 GHz to 18 GHz	3.7 dB
Radiated Disturbance, 18 GHz to 26.5 GHz	4.9 dB

9.2 Decision rule

The choice of whether or not to include the measurement uncertainty of the measuring system used in the test in the conformance determination.:

- ☐ Application of internal procedures used in type testing where traceability of measurement uncertainty is established.
- ☒ Applying the decision that the standard used for type testing does not require it.

END REPORT