



# TEST REPORT

<b>KCTL Inc.</b> 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 <a href="http://www.kctl.co.kr">www.kctl.co.kr</a>	Report No.: <b>KR21-SRF0076-A</b> Page (1) of (67)	
<b>1. Client</b> <ul style="list-style-type: none"> <li>◦ Name : Olive Union inc</li> <li>◦ Address : 4F, 38, Seocho-daero 52-gil, Seocho-gu, Seoul, Republic of Korea</li> <li>◦ Date of Receipt : 2021-01-18</li> </ul>		
<b>2. Use of Report</b> : Certification		
<b>3. Name of Product / Model</b> : Olive SmartEar Plus / OSE300MW		
<b>4. Manufacturer / Country of Origin</b> : BLUECOM / Vietnam		
<b>5. FCC ID</b> : 2AOLHOSE300M		
<b>6. Date of Test</b> : 2021-02-09 to 2021-05-06		
<b>7. Location of Test</b> : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)		
<b>8. Test method used</b> : FCC Part 15 Subpart C, 15.247		
<b>9. Test Result</b> : Refer to the test result in the test report		
Affirmation	Tested by  Name : Euijung Kim (Signature)	Technical Manager  Name : Heesu Ahn (Signature)
2021-05-28		
<h2>KCTL Inc.</h2>		
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.		

**REPORT REVISION HISTORY**

Date	Revision	Page No
2021-05-27	Originally issued	-
2021-05-28	Updated	5

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.*

**General remarks for test reports**

**Statement concerning the uncertainty of the measurement systems used for the tests**

(may be required by the product standard or client)

**Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

**Procedure number, issue date and title:**

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

**Statement not required by the standard or client used for type testing**

## CONTENTS

1.	General information.....	4
2.	Device information.....	4
2.1.	Accessory information .....	4
2.2.	Duty Cycle Correction Factor.....	5
2.3.	Frequency/channel operations.....	6
2.4.	RF power setting in TEST SW.....	7
3.	Antenna requirement .....	7
4.	Summary of tests .....	8
5.	Measurement uncertainty .....	9
6.	Measurement results explanation example .....	10
7	Test results.....	11
7.1.	Maximum peak output power.....	11
7.2.	Carrier frequency separation.....	13
7.3.	20dB channel bandwidth .....	17
7.4.	Number of hopping channels.....	21
7.5.	Time of occupancy(Dwell time) .....	24
7.6.	Radiated spurious emissions & band edge.....	31
7.7.	Conducted Spurious Emission .....	62
8.	Measurement equipment .....	67

## 1. General information

Client : Olive Union inc  
 Address : 4F, 38, Seocho-daero 52-gil, Seocho-gu, Seoul, Republic of Korea  
 Manufacturer : BLUECOM  
 Address : 116, Venture-ro, Yeonsu-gu, Incheon, 22013, Korea  
 Laboratory : KCTL Inc.  
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132  
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056  
 CAB Identifier: KR0040, ISED Number: 8035A  
 KOLAS No.: KT231

## 2. Device information

Equipment under test : Olive SmartEar Plus  
 Model : OSE300MW  
 Derivative model : OSE300M  
 Modulation technique : Bluetooth(BDR/EDR)\_GFSK,  $\pi/4$ DQPSK, 8DPSK  
 Bluetooth(BLE)\_GFSK  
 Number of channels : Bluetooth(BDR/EDR)\_79 ch / Bluetooth(BLE)\_40 ch  
 Power source : DC 3.7 V  
 Antenna specification : FPCB Antenna  
 Antenna gain : Left ear: 1.99 dBi, Right ear: 0.62 dBi  
 Frequency range : Bluetooth(BDR/EDR/BLE)\_2 402 MHz ~ 2 480 MHz  
 Software version : REV1.0  
 Hardware version : REV1.0  
 Test device serial No. : N/A  
 Operation temperature : -20 °C ~ 50 °C

**Note.** The Product equality letter includes detailed information about the differences between basic and derivative model.

### 2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
N/A	-	-	-	-

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (5) of (67)



## 2.2. Duty Cycle Correction Factor

Test mode	Period (ms)	On time (ms)	Reduced VBW (Hz)
GFSK	1.225	0.379	2 637.62
8DPSK	1.234	0.387	2 586.85

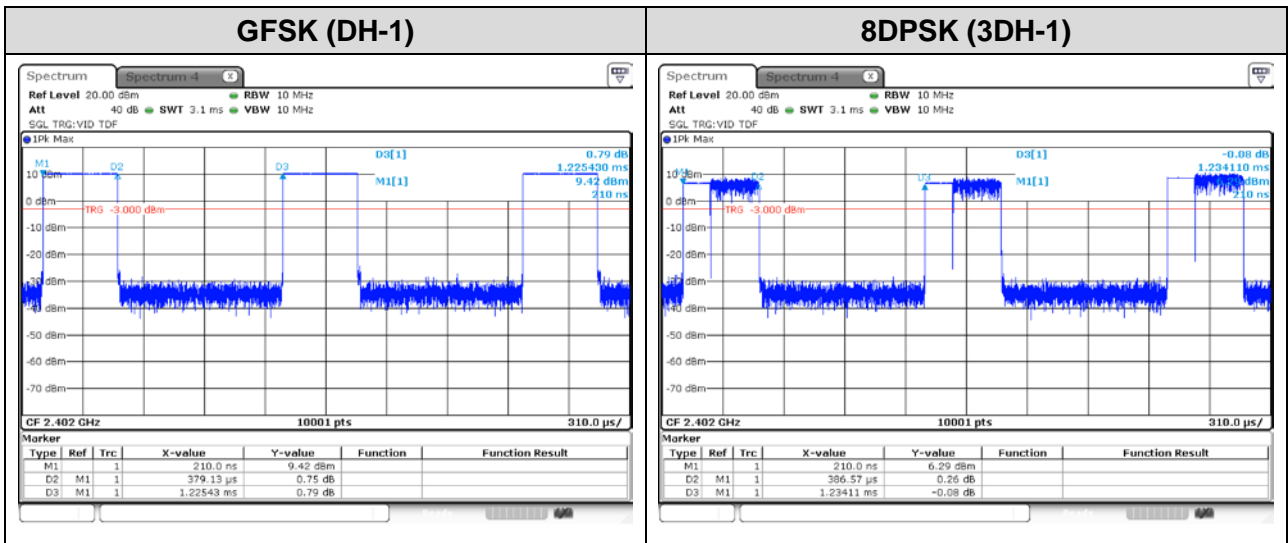

**2.3. Frequency/channel operations**

This device contains the following capabilities:  
 Bluetooth (BDR/EDR/BLE)

Ch.	Frequency (MHz)
00	2 402
.	.
39	2 441
.	.
78	2 480

Table 2.2.1. Bluetooth(BDR/EDR) mode

15.247 Requirements for Bluetooth transmitter:

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
  - 1) This system is hopping pseudo-randomly.
  - 2) Each frequency is used equally on the average by each transmitter.
  - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
  - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

## 2.4. RF power setting in TEST SW

Mode	Frequency(MHz)	RF Power setting value
DH1,3,5	2 402	0x46
	2 441	
	2 480	
2-DH1,3,5	2 402	0x49
	2 441	
	2 480	
3-DH1,3,5	2 402	0x49
	2 441	
	2 480	

## 3. Antenna requirement

Requirement of FCC part section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached FPCB Antenna (Internal antenna) on board.

#### 4. Summary of tests

FCC Part section(s)	Parameter	Test condition	Test results
15.247(b)(1), (4)	Maximum Peak Output Power	Conducted	Pass
15.247(a)(1)	Carrier frequency separation		Pass
15.247(a)(1)	20dB Channel Bandwidth		Pass
15.247(a)(iii) 15.247(b)(1)	Number of hopping channel		Pass
15.247(a)(iii)	Time of occupancy(dwel time)		Pass
15.247(d)	Spurious emission & Band-edge		Pass
15.207(a)	AC Conducted Emissions		N/A <sup>3)</sup>
15.205(a), 15.209(a), 15.247(d)	Spurious emission	Radiated	Pass
	Band-edge, restricted band		Pass

**Notes:**

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The AC power line test was not performed because the EUT does not operate while charging.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
- The worst-case data rate were: BDR packet type DH-1, EDR packet type 3DH-1
- The test procedure(s) in this report were performed in accordance as following.
  - ◆ ANSI C63.10-2013
  - ◆ KDB 558074 D01 v05r02



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (9) of (67)



## 5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ( $\pm$ )	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.6 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.3 dB
	30 MHz ~ 300 MHz	2.2 dB
	300 MHz ~ 1 000 MHz	5.6 dB
	Above 1 GHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	3.7 dB
	150 kHz ~ 30 MHz	3.3 dB

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (10) of (67)



## 6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.84	9 000	12.07
50	10.01	10 000	12.18
100	10.07	11 000	12.31
200	10.18	12 000	12.42
300	10.25	13 000	12.44
400	10.32	14 000	12.60
500	10.38	15 000	12.85
600	10.41	16 000	12.85
700	10.48	17 000	13.06
800	10.52	18 000	13.08
900	10.58	19 000	13.19
1 000	10.60	20 000	13.25
2 000	10.92	21 000	13.40
3 000	11.15	22 000	13.58
4 000	11.35	23 000	13.58
5 000	11.60	24 000	13.69
6 000	11.66	25 000	13.79
7 000	11.86	26 000	13.94
8 000	11.99	26 500	13.96


**Note.**

Offset(dB) = RF cable loss(dB) + Power Divider(dB) + Attenuator (dB)

## 7 Test results

### 7.1. Maximum peak output power

#### Test setup



#### Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), for frequency hopping systems operating in the 2 400-2 483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725-5 850 MHz band: 1 watt. For all other frequency hopping systems in the 2 400-2 483.5 MHz band: 0.125 watts.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Test procedure

ANSI C63.10-2013 - Section 7.8.5

#### Test settings

The test follows ANSI C63.10-2013 – Section 7.8.5. Using the power sensor instead of a spectrum analyzer.

#### Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (12) of (67)

**KCTL****Test results****- Left**


Frequency(MHz)	2 402 MHz		2 441 MHz		2 480 MHz		Limit (dBm)
	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	
DH 1	8.13	7.94	8.64	8.45	8.80	8.61	30.00
DH 3	7.89	7.66	8.48	8.25	8.64	8.42	
DH 5	7.80	7.57	8.39	8.17	8.61	8.38	
2-DH 1	9.30	7.17	9.80	7.71	10.04	7.94	
2-DH 3	9.20	6.81	9.56	7.19	9.74	7.37	
2-DH 5	9.10	6.62	9.53	7.08	9.76	7.32	
3-DH 1	9.92	7.26	10.37	7.79	10.56	7.98	
3-DH 3	9.62	6.72	10.05	7.18	10.39	7.52	
3-DH 5	9.62	6.70	10.11	7.23	10.27	7.38	

**- Right**

Frequency(MHz)	2 402 MHz		2 441 MHz		2 480 MHz		Limit (dBm)
	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	
DH 1	8.76	8.55	8.96	8.74	8.55	8.36	30.00
DH 3	8.62	8.36	8.82	8.58	8.39	8.16	
DH 5	8.63	8.38	8.76	8.52	8.41	8.18	
2-DH 1	9.81	7.79	10.03	8.06	9.76	7.75	
2-DH 3	9.75	7.49	9.97	7.78	9.61	7.41	
2-DH 5	9.79	7.41	9.99	7.67	9.67	7.37	
3-DH 1	10.39	7.81	10.52	8.05	10.19	7.69	
3-DH 3	10.44	7.31	10.47	7.75	10.05	7.34	
3-DH 5	10.25	7.46	10.37	7.65	10.03	7.31	

## 7.2. Carrier frequency separation

### Test setup



### Limit

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test procedure

ANSI C63.10-2013 - Section 7.8.2

### Test settings

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (14) of (67)

**Test results****- Left**

Frequency(MHz)	Data rate(Mbps)	Carrier frequency separation(MHz)	Limit(MHz)
2 402	1	1.002	0.717
2 441	1	1.002	0.651
2 480	1	1.001	0.643
2 402	3	1.002	0.915
2 441	3	1.002	0.901
2 480	3	1.002	0.925

**- Right**

Frequency(MHz)	Data rate(Mbps)	Carrier frequency separation(MHz)	Limit(MHz)
2 402	1	1.004	0.653
2 441	1	1.001	0.643
2 480	1	1.007	0.645
2 402	3	1.002	0.905
2 441	3	1.005	0.905
2 480	3	1.002	0.905


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (15) of (67)



- Left

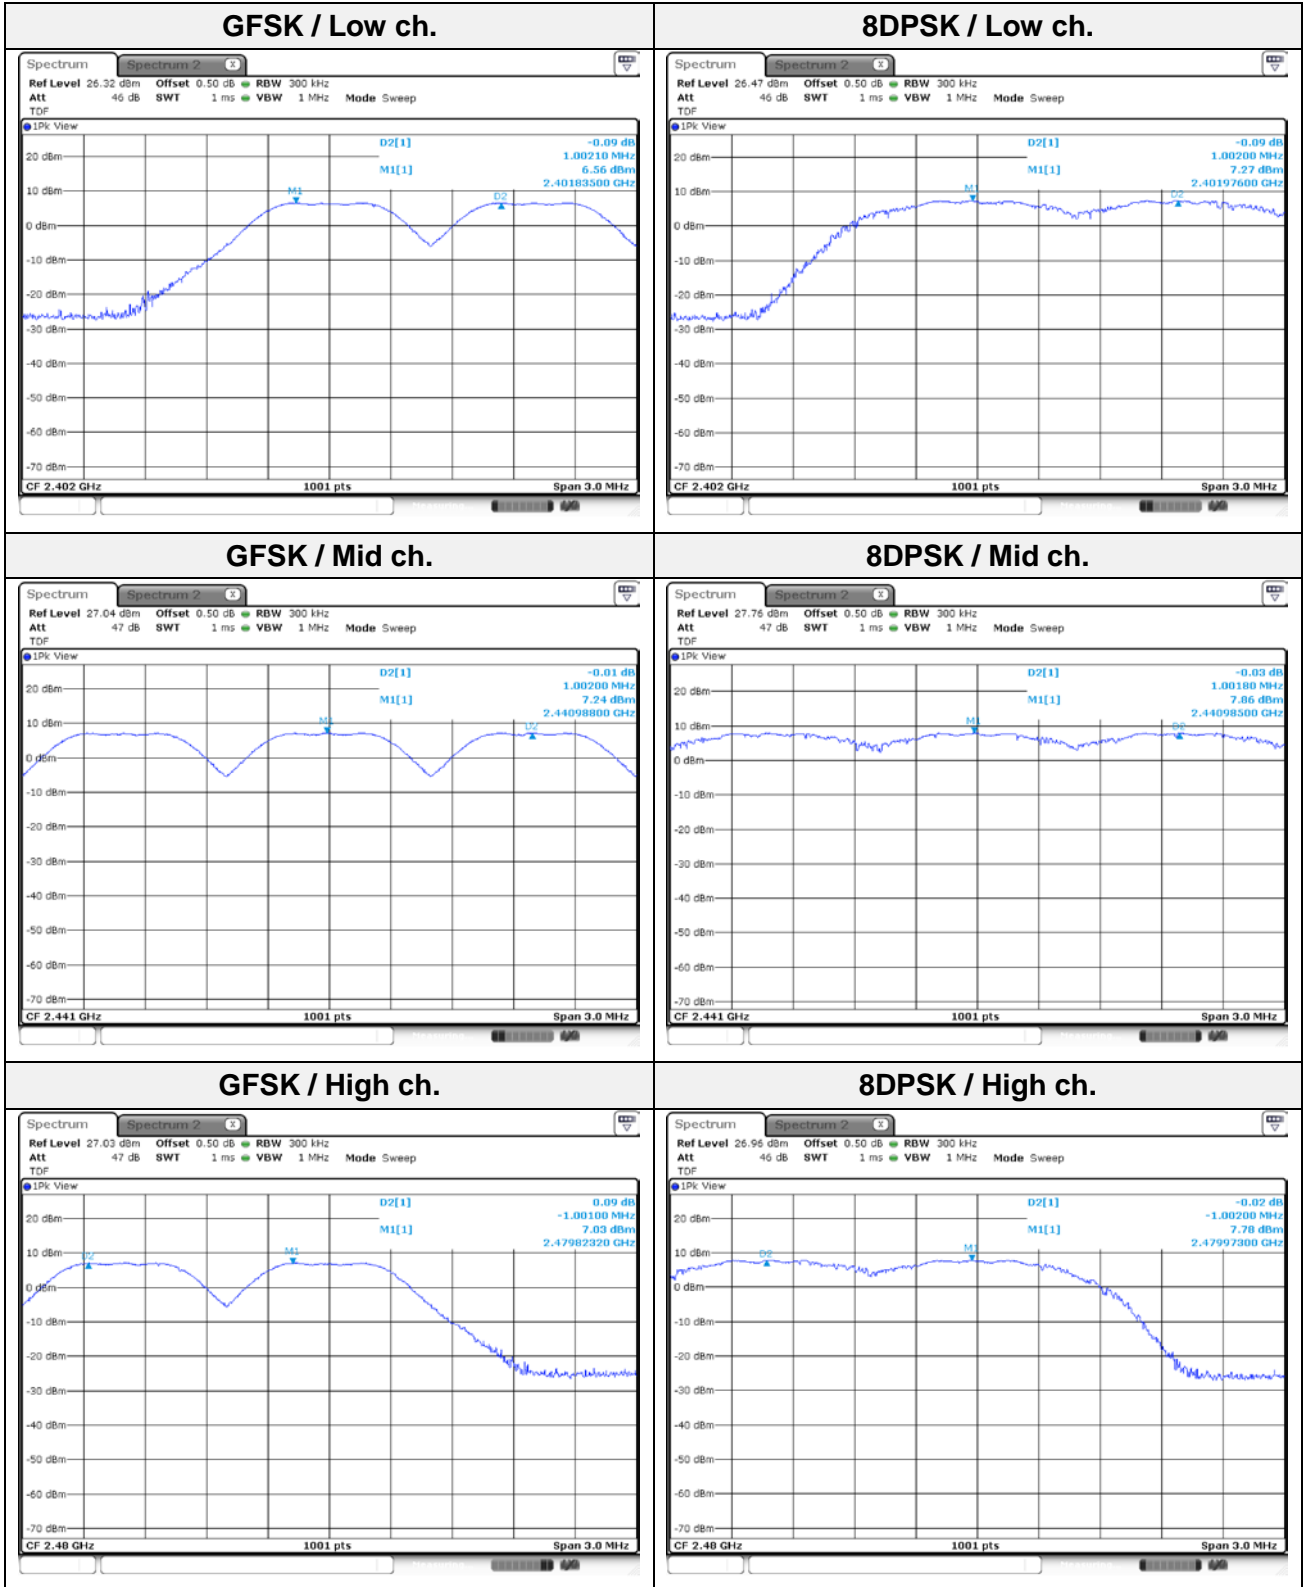


- Right

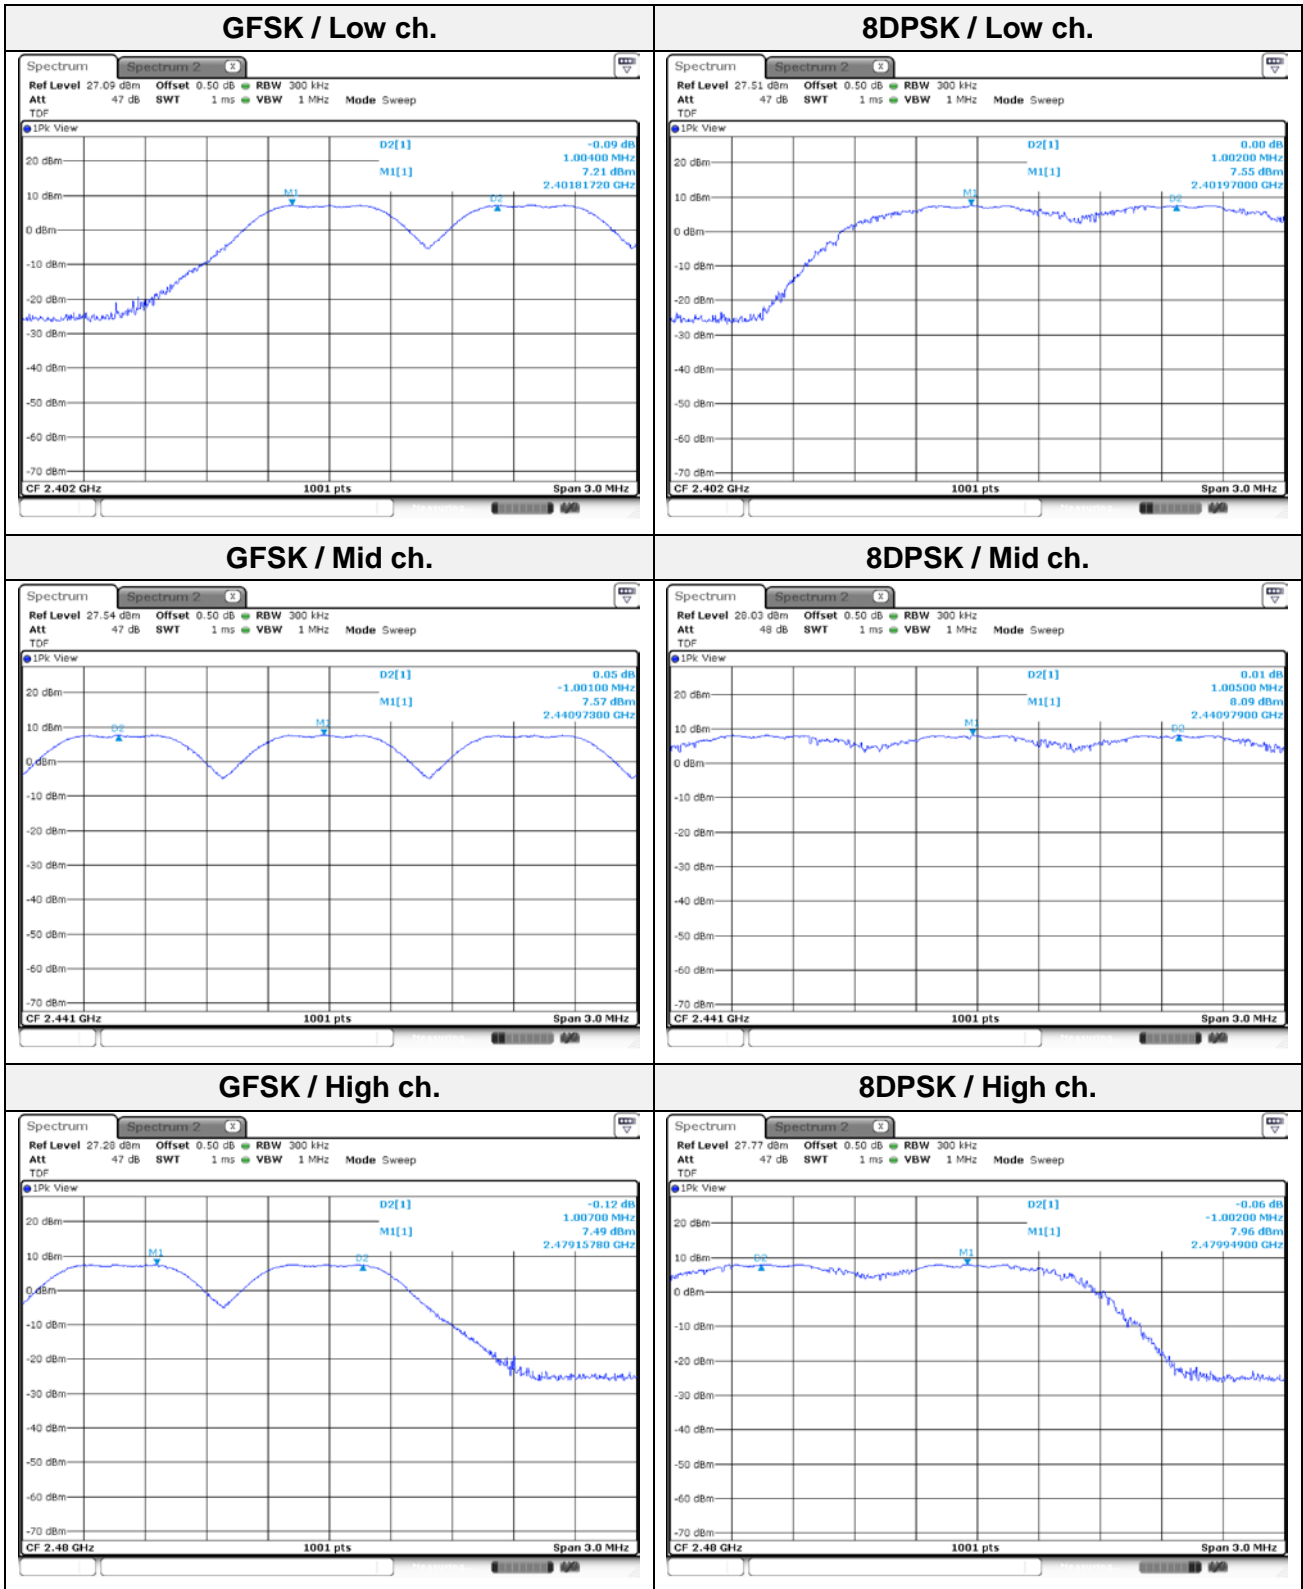



### 7.3. 20dB channel bandwidth

#### Test setup



#### Limit

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2 400-2 483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### Test procedure

ANSI C63.10-2013 - Section 6.9.2

#### Test settings

##### 20dB channel bandwidth and Occupied bandwidth

The occupied bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
- b) Span: Two times and five times the OBW.
- c) RBW = 1 % to 5 % of the OBW and VBW ≥ 3 x RBW
- d) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Detector: peak
- g) Trace mode: max hold.
- h) Allow the trace to stabilize.
- i) Determine the “-xx dB down amplitude” using ((reference value) - xx). Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- j) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- k) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (18) of (67)



between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

**Test results****- Left**

Frequency(MHz)	Data rate (Mbps)	20 dB Bandwidth (MHz)
2 402	1	1.076
2 441	1	0.977
2 480	1	0.965
2 402	3	1.373
2 441	3	1.352
2 480	3	1.388

**- Right**

Frequency(MHz)	Data rate (Mbps)	20 dB Bandwidth (MHz)
2 402	1	0.980
2 441	1	0.965
2 480	1	0.968
2 402	3	1.358
2 441	3	1.358
2 480	3	1.358


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (19) of (67)



- Left

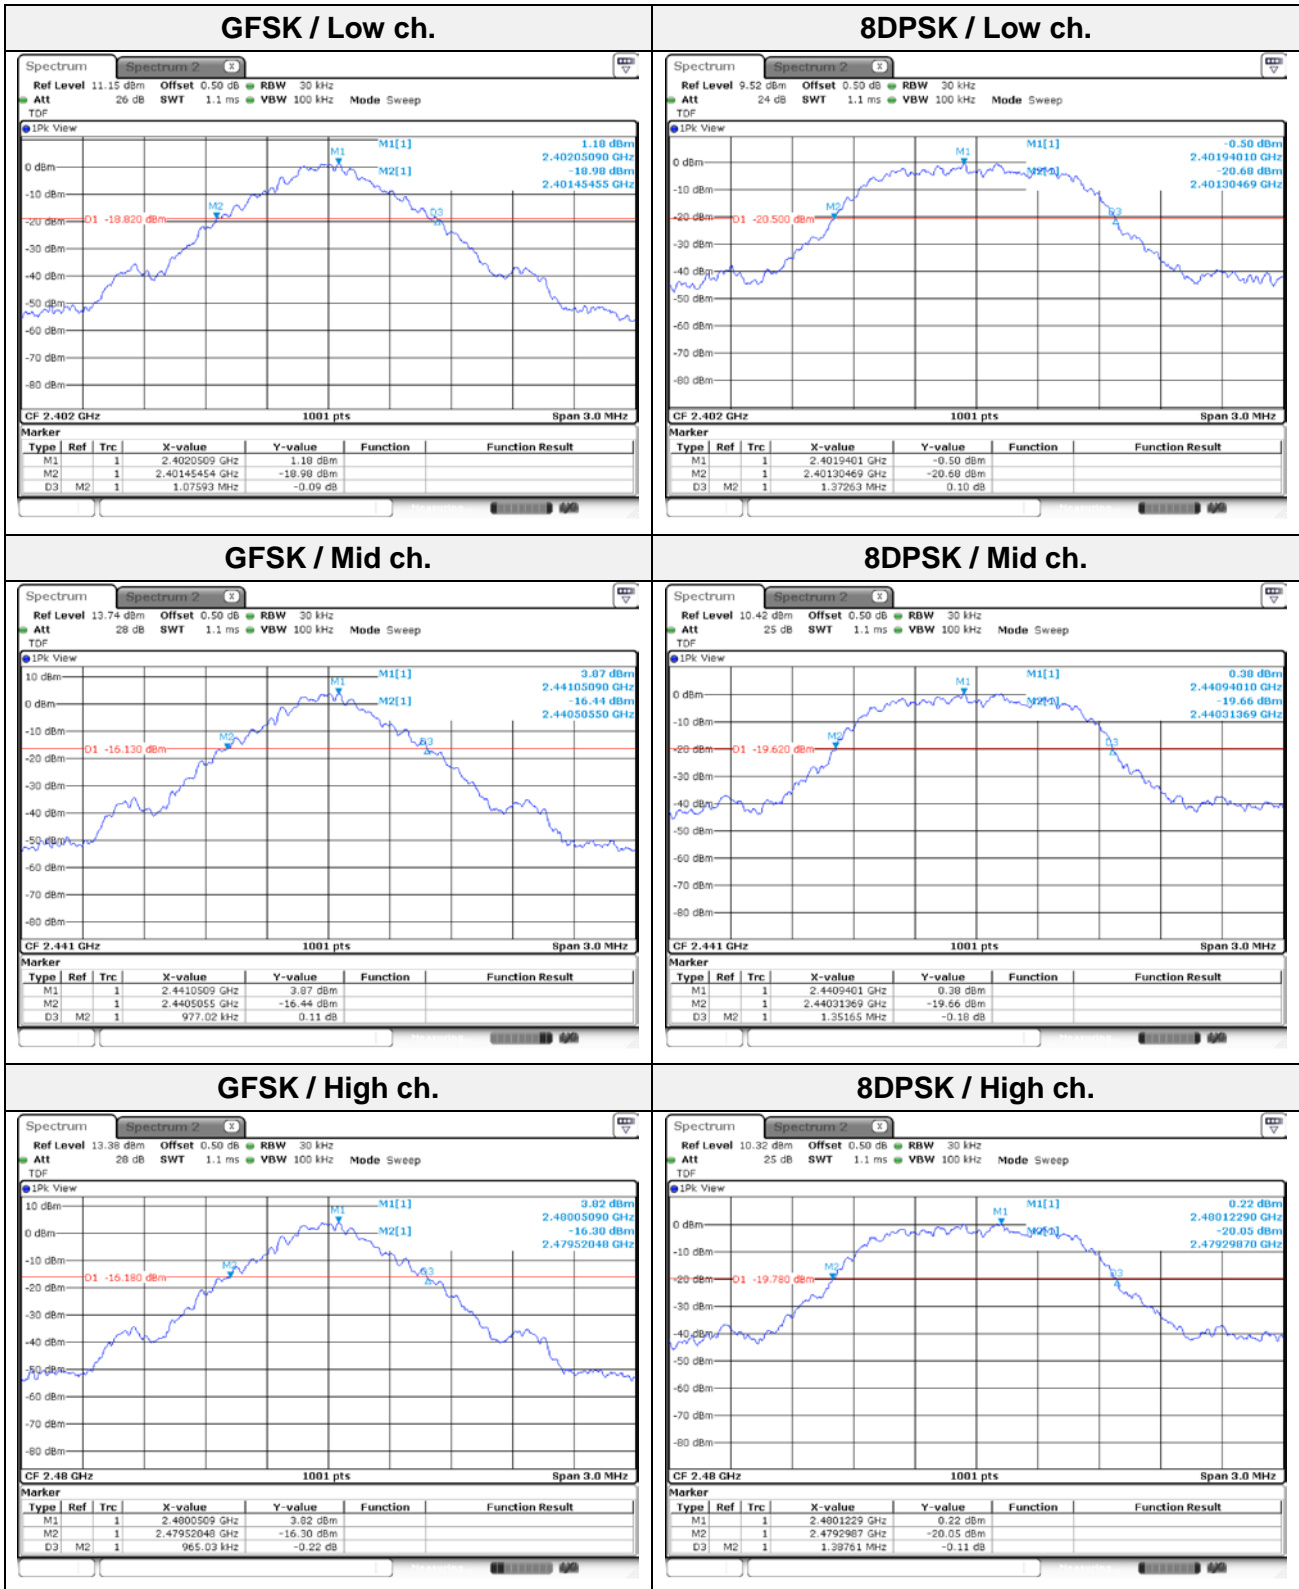


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (20) of (67)




- Right

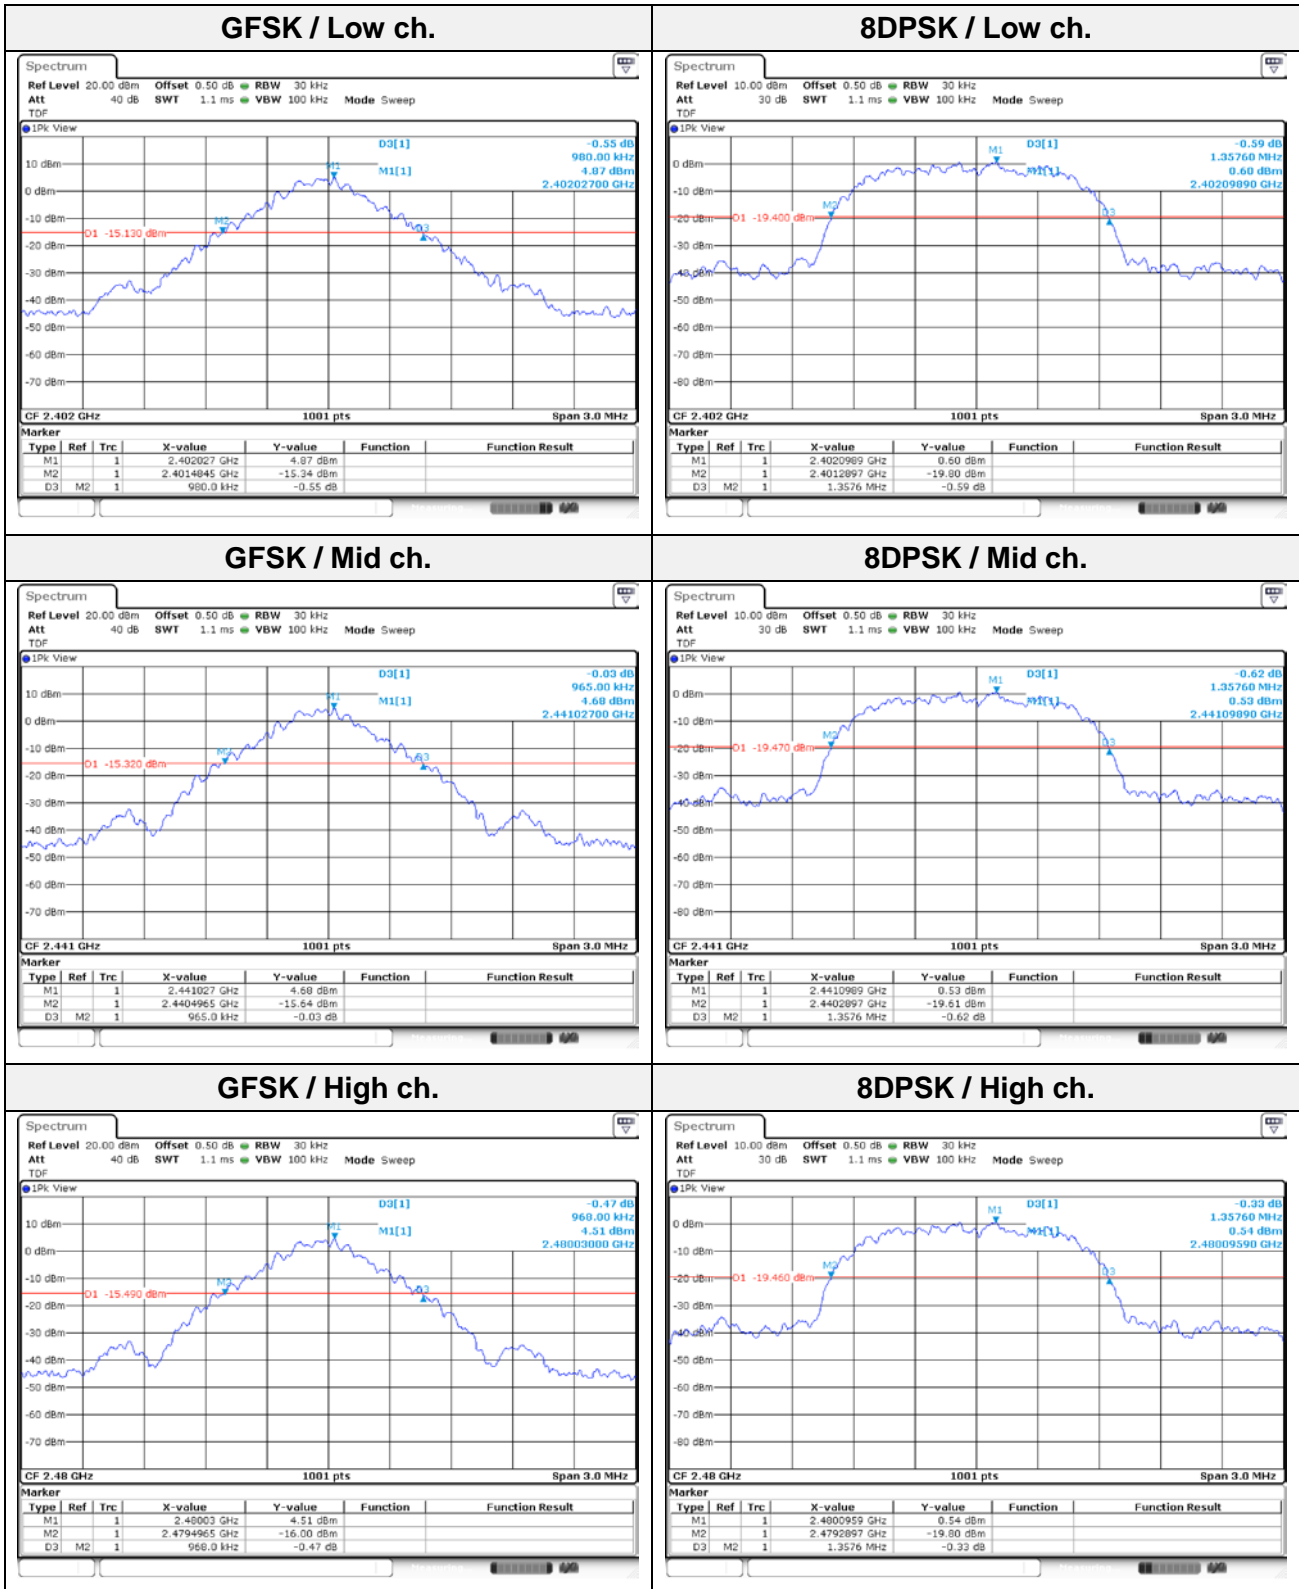

## 7.4. Number of hopping channels

### Test setup



### Limit

According to §15.247(a)(1)(iii), frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels.

### Test procedure

ANSI C63.10-2013 - Section 7.8.3

### Test settings

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

### Test results

#### - Left

Mode	Number of hopping channel	Limit
GFSK	79	$\geq 15$
$\pi/4$ DQPSK	79	$\geq 15$
8DPSK	79	$\geq 15$

#### - Right

Mode	Number of hopping channel	Limit
GFSK	79	$\geq 15$
$\pi/4$ DQPSK	79	$\geq 15$
8DPSK	79	$\geq 15$

### Notes:

In case of AFH mode, minimum number of hopping channels is 20.


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (22) of (67)



## - Left

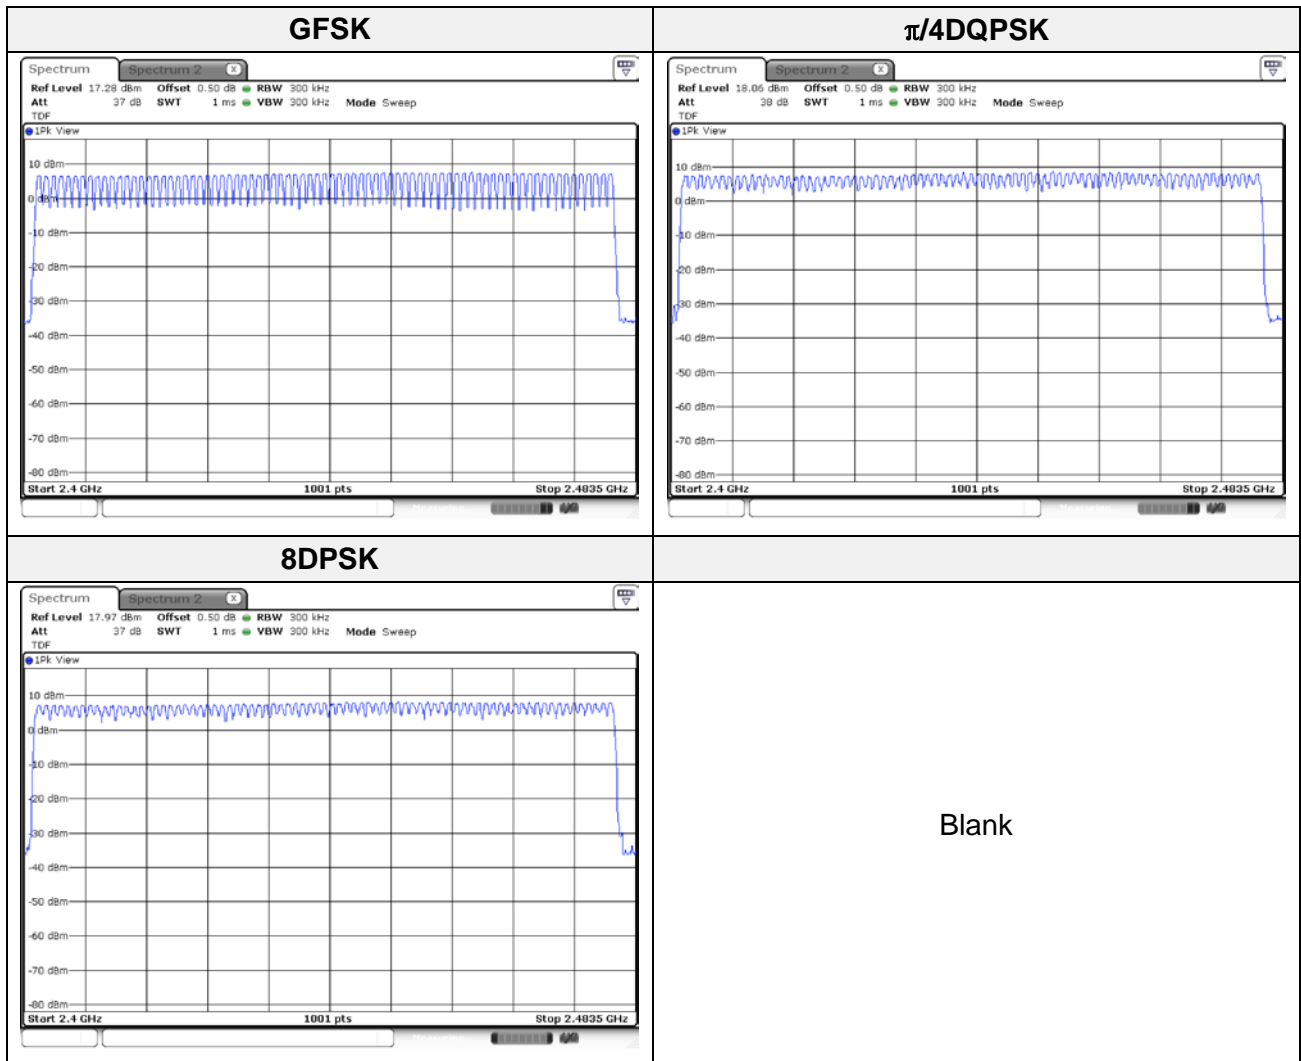


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (23) of (67)




## - Right

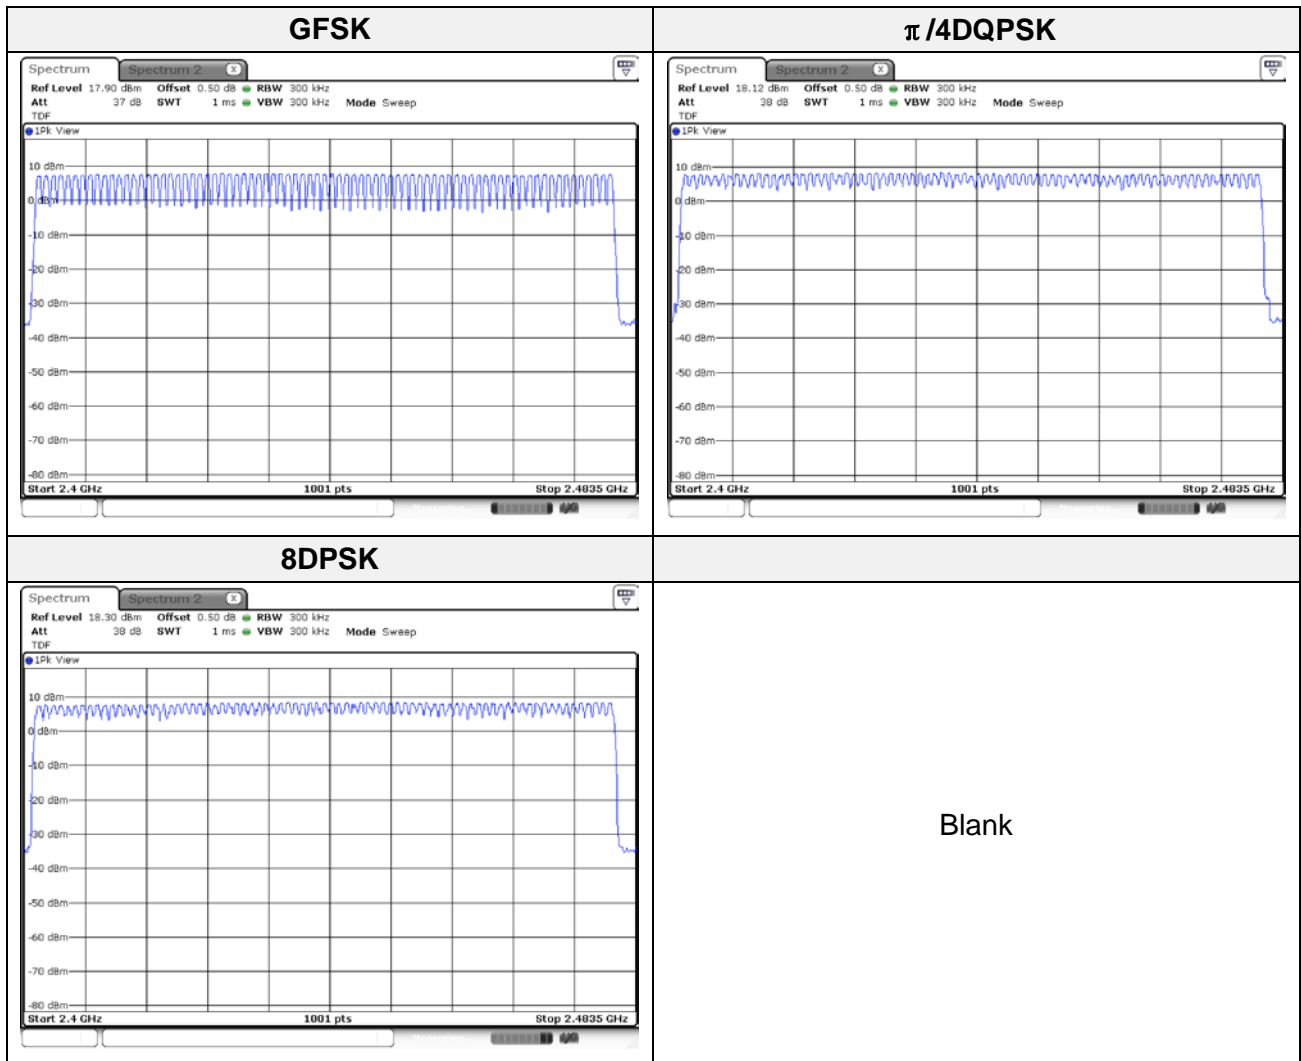

## 7.5. Time of occupancy(Dwell time)

### Test setup



### Limit

According to §15.247(a)(1)(iii), frequency hopping systems in the 2 400-2 483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test procedure

ANSI C63.10-2013 - Section 7.8.4

### Test settings

- a) Span: Zero span, centered on a hopping channel.
- b) RBW  $\leq$  channel spacing and  $\gg 1 / T$ , where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.
- f) Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.



**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (25) of (67)

**KCTL****Test results****- Left****Non-AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.382	800.000	79	0.122	0.400
DH3		1.638	400.000		0.262	
DH5		2.884	266.667		0.308	
2-DH1		0.391	800.000		0.125	
2-DH3		1.642	400.000		0.263	
2-DH5		2.888	266.667		0.308	
3-DH1		0.391	800.000		0.125	
3-DH3		1.640	400.000		0.262	
3-DH5		2.891	266.667		0.308	

**AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.382	400.000	20	0.061	0.400
DH3		1.638	200.000		0.131	
DH5		2.884	133.333		0.154	
2-DH1		0.391	400.000		0.062	
2-DH3		1.642	200.000		0.131	
2-DH5		2.888	133.333		0.154	
3-DH1		0.391	400.000		0.062	
3-DH3		1.640	200.000		0.131	
3-DH5		2.891	133.333		0.154	

**Notes:**

## 1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

## 2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (26) of (67)



- Right

**Non-AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.382	800.000	79	0.122	0.400
DH3		1.638	400.000		0.262	
DH5		2.884	266.667		0.308	
2-DH1		0.391	800.000		0.125	
2-DH3		1.642	400.000		0.263	
2-DH5		2.888	266.667		0.308	
3-DH1		0.391	800.000		0.125	
3-DH3		1.640	400.000		0.262	
3-DH5		2.891	266.667		0.308	

**AFH**

Modulation	Frequency (MHz)	Pulse Width (ms)	Hopping rate (hop/s)	Number of Channels	Result (s)	Limit (s)
DH1	2 441	0.382	400.000	20	0.061	0.400
DH3		1.638	200.000		0.131	
DH5		2.884	133.333		0.154	
2-DH1		0.391	400.000		0.062	
2-DH3		1.642	200.000		0.131	
2-DH5		2.888	133.333		0.154	
3-DH1		0.391	400.000		0.062	
3-DH3		1.640	200.000		0.131	
3-DH5		2.891	133.333		0.154	

**Notes:**

1. Non-AFH

- Period Time: 0.4 sec x 79 channels = 31.6 sec
- Result (s)= (Hopping rate (hop/s/slot) / 79 channels) x 31.6 sec x Pulse width (ms)

2. AFH

- Period Time: 0.4 sec x 20 channels = 8 sec
- Result (s)= (Hopping rate (hop/s/slot) / 20 channels) x 8 sec x Pulse width (ms)


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (27) of (67)



## - Left (Non-AFH)

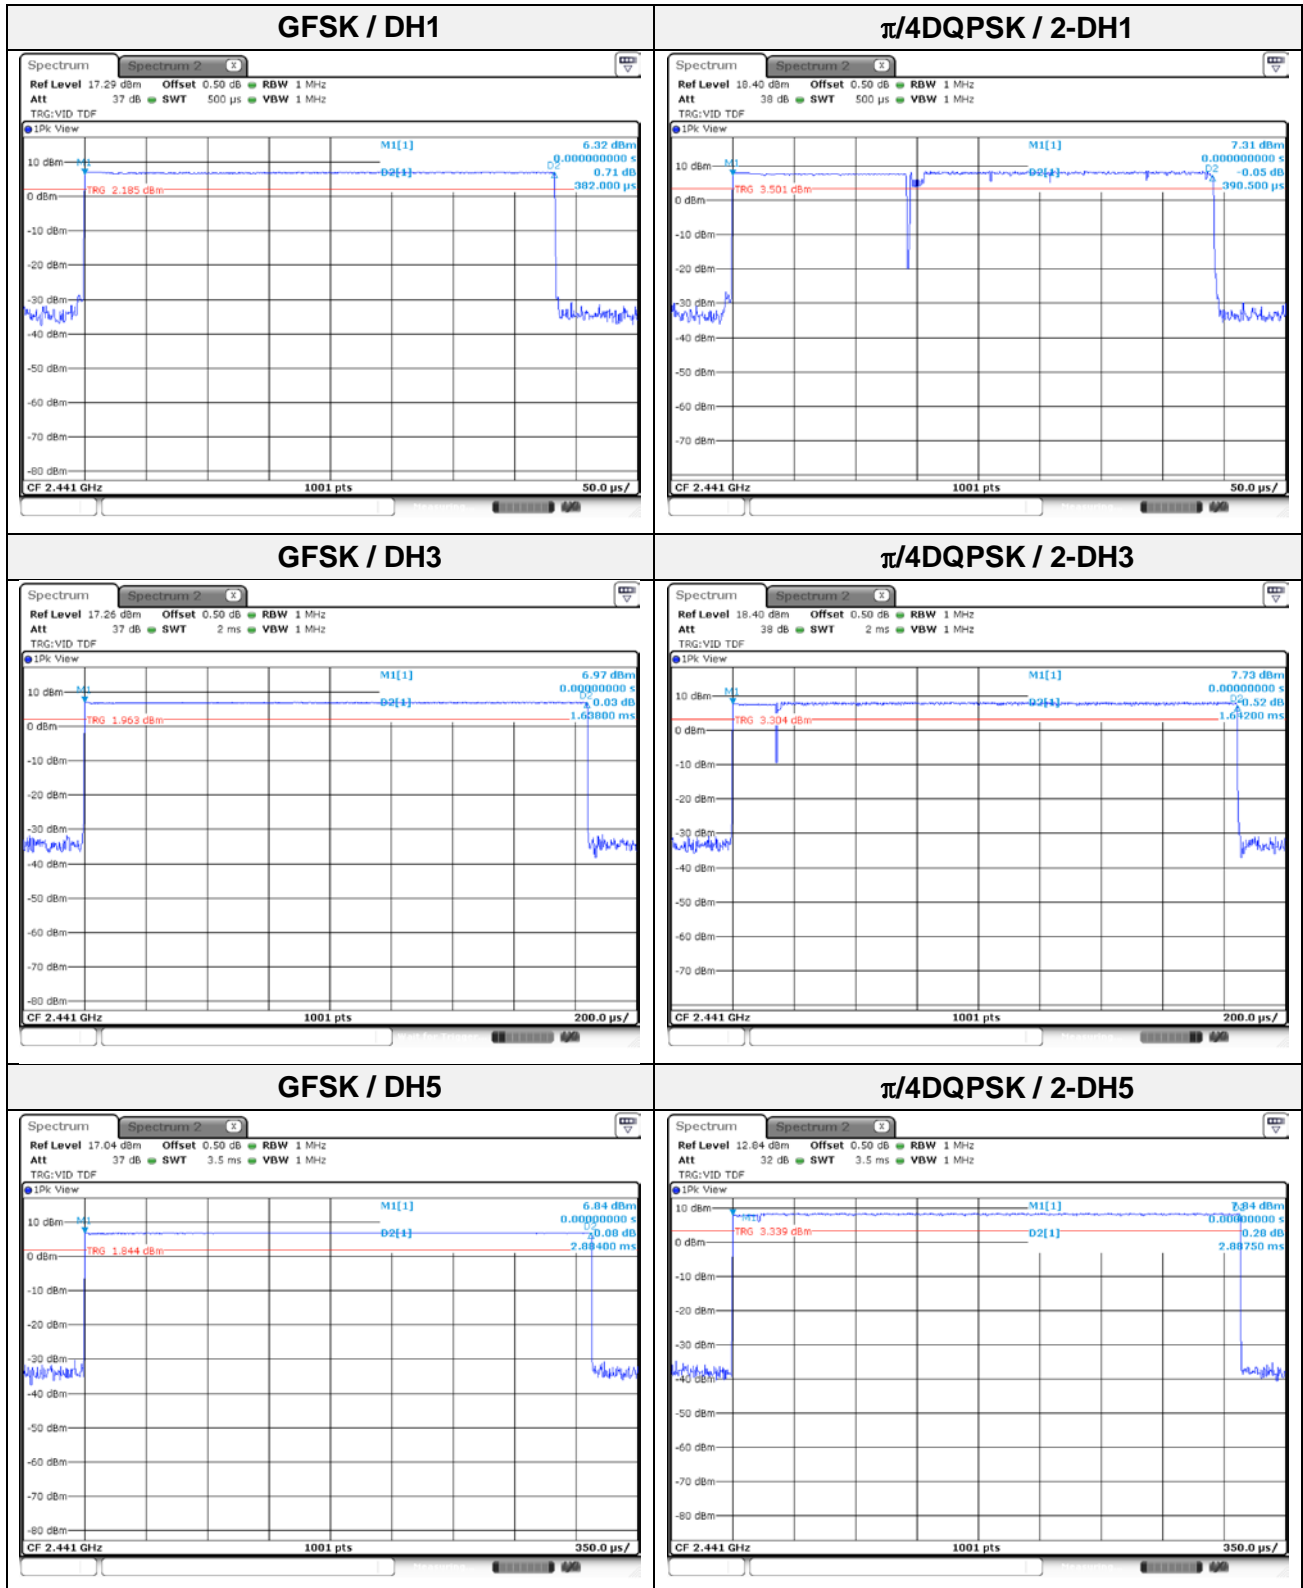


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (28) of (67)




## 8DPSK / 3-DH1

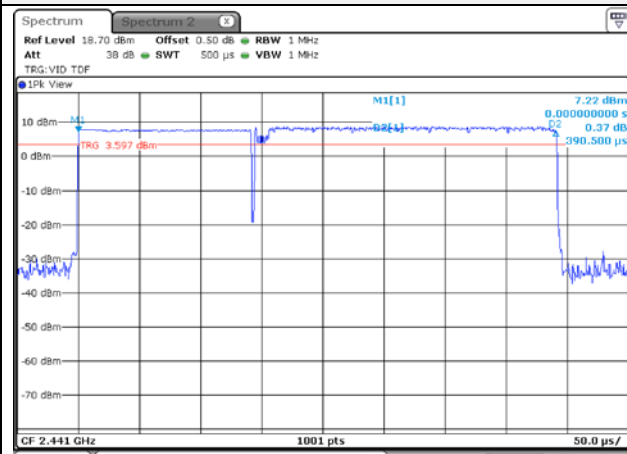

## 8DPSK / 3-DH3

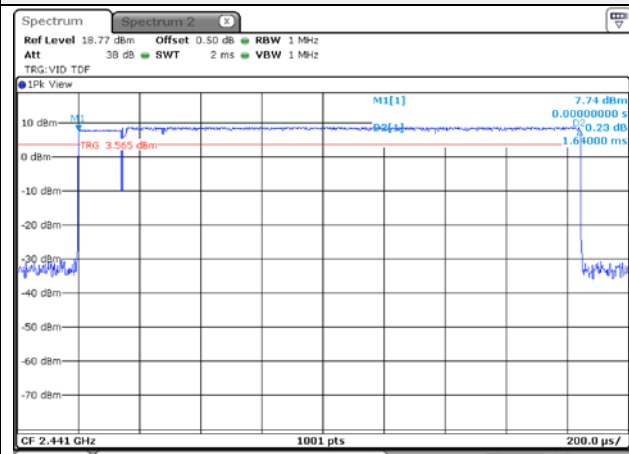


## 8DPSK / 3-DH5

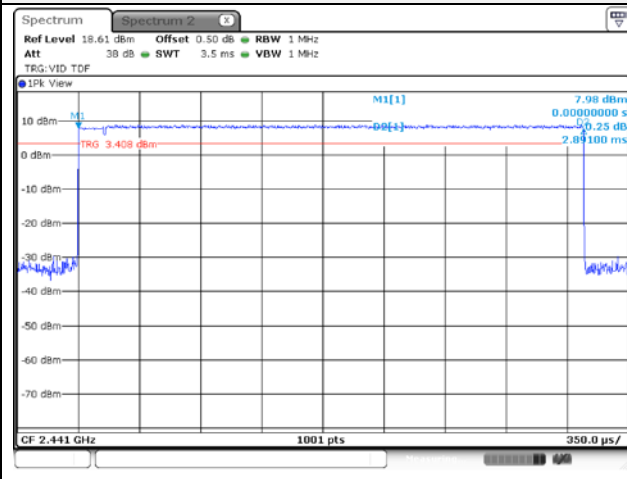

Blank

- Right (Non-AFH)

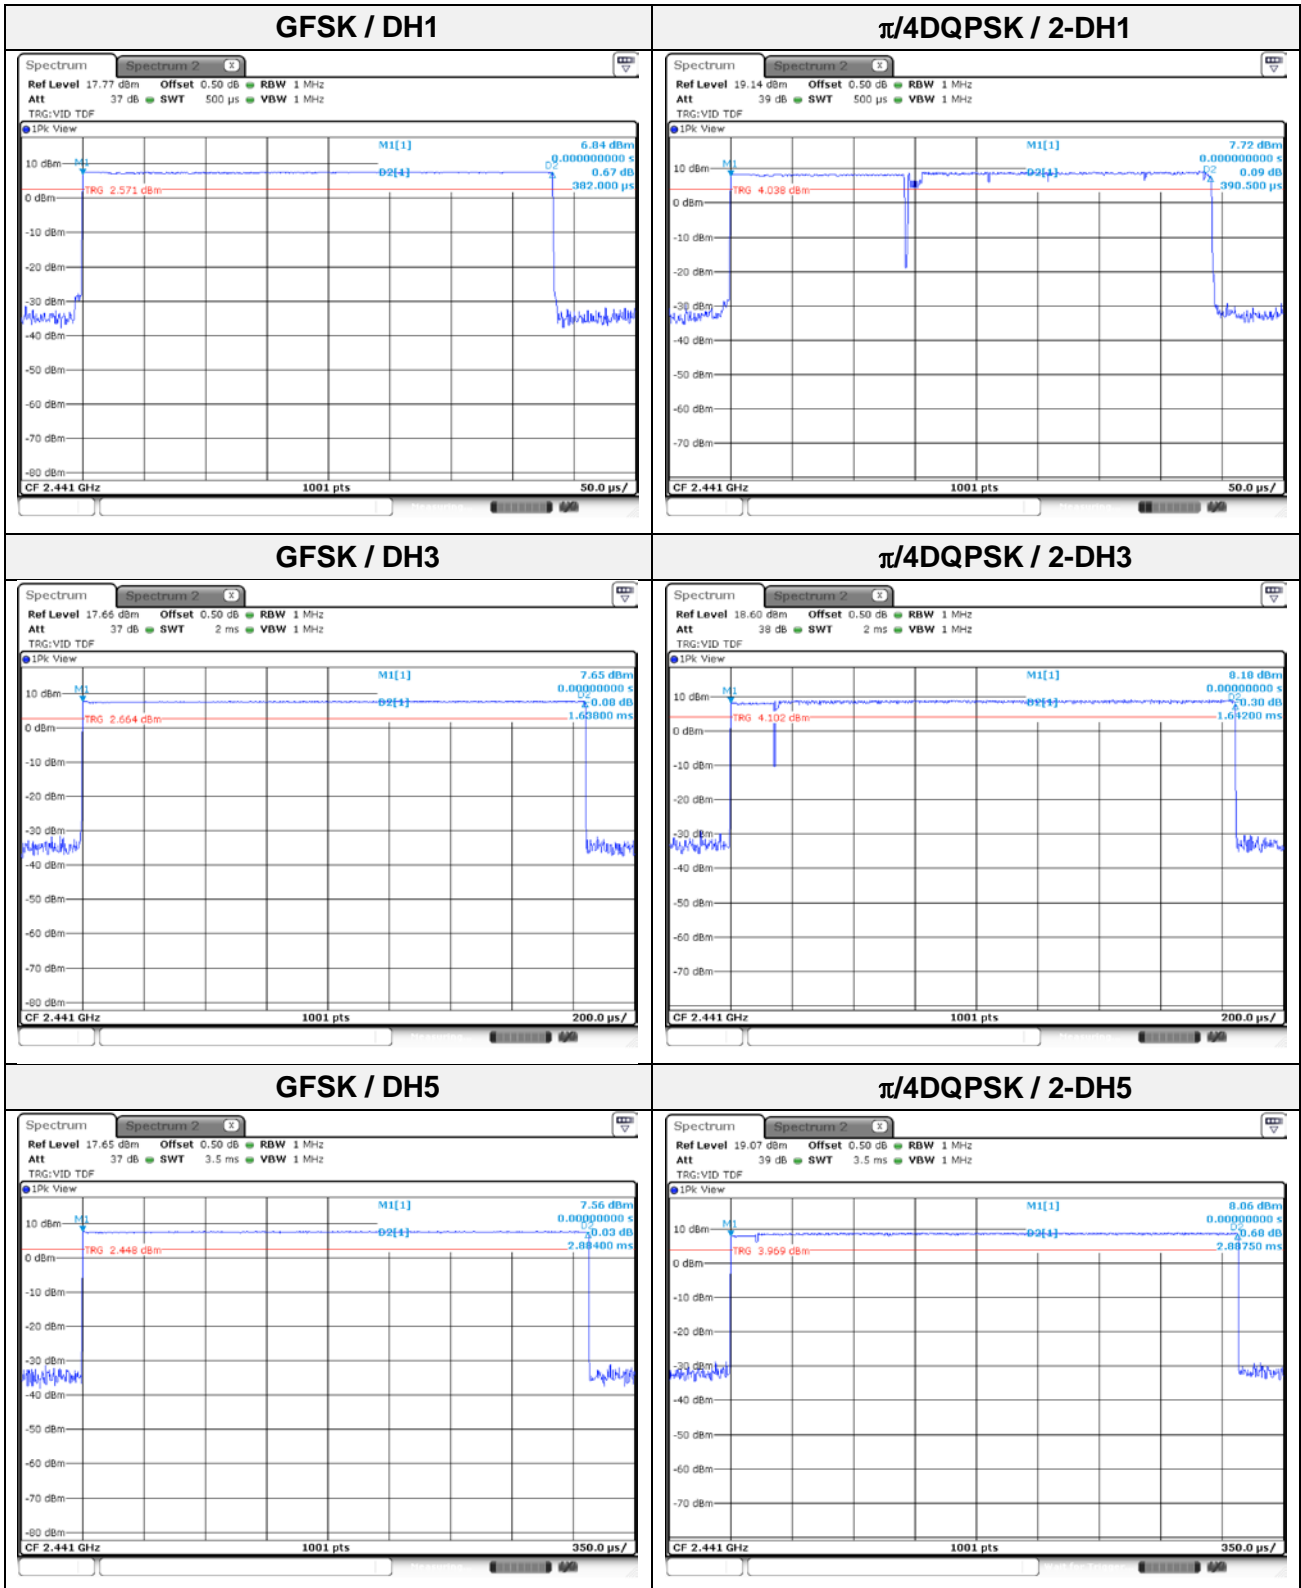


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (30) of (67)




## 8DPSK / 3-DH1

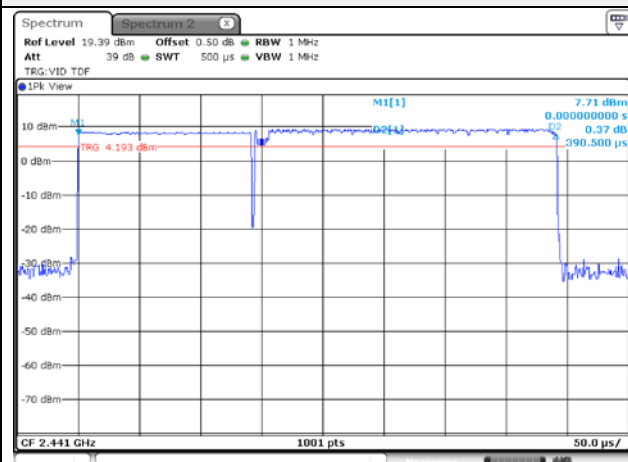

## 8DPSK / 3-DH3

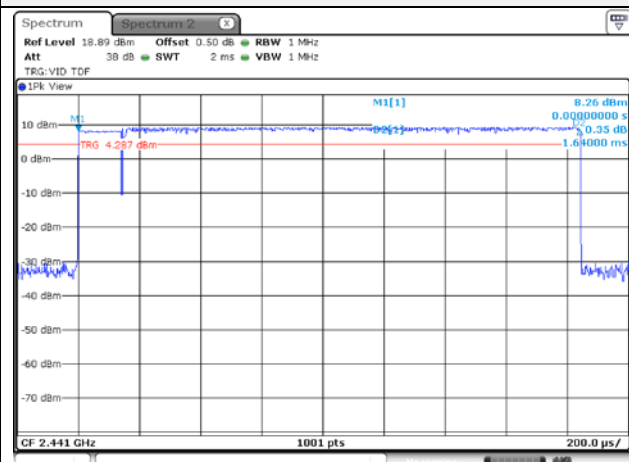

## 8DPSK / 3-DH5

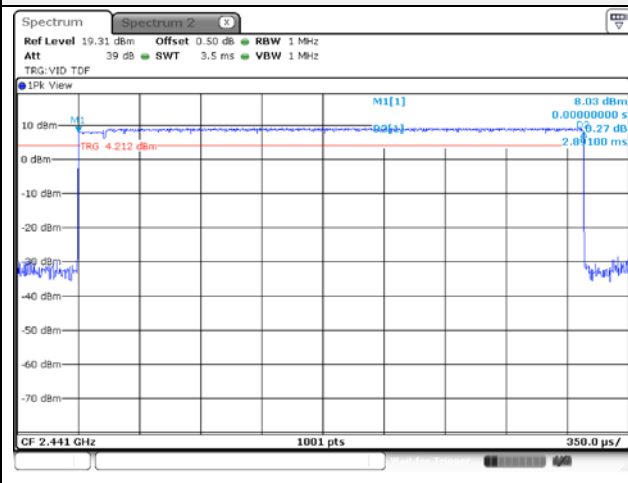


Blank


## 7.6. Radiated spurious emissions & band edge

### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

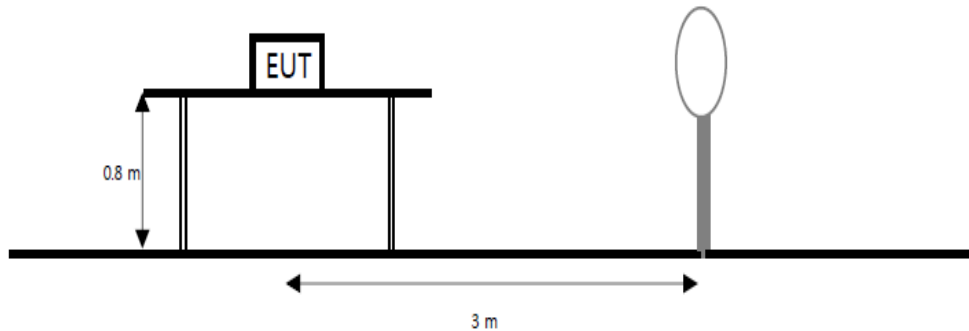

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

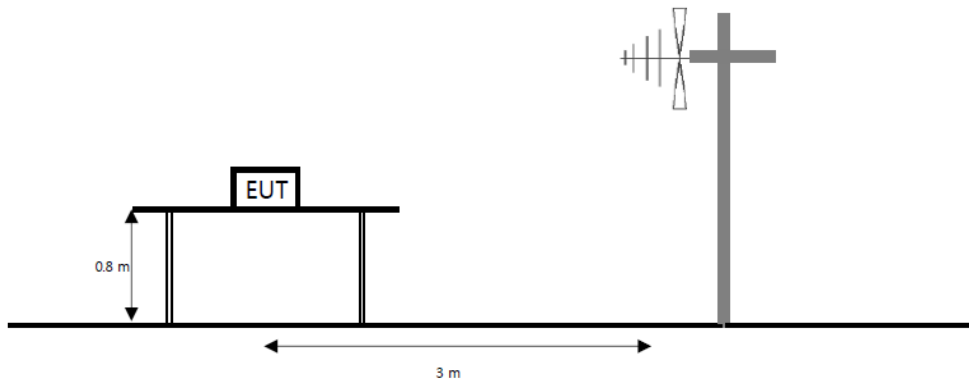

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

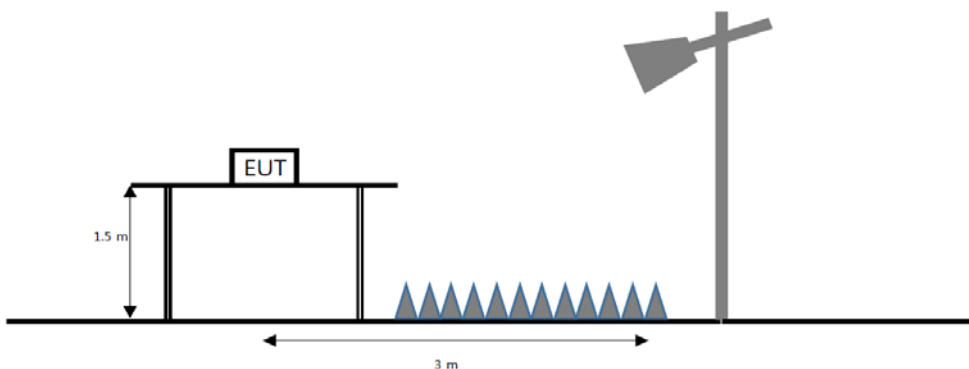

**Limit**

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.



**Test procedure**

ANSI C63.10-2013

**Test settings****Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW  $\geq$  (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

**Table. RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

**Average field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW =  $1/T \geq 1$  Hz
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times(1/duty cycle) traces

**Notes:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz( $\geq 1/T$ ) for Average detection (AV) at frequency above 1 GHz.
2.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40\log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20\log(D_m/D_s)$   
 Where:  
 $F_d$ = Distance factor in dB  
 $D_m$ = Measurement distance in meters  
 $D_s$ = Specification distance in meters
3. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
4. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
5. Average test would be performed if the peak result were greater than the average limit.
6. <sup>1)</sup> means restricted band.

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (34) of (67)




## - Left

### Test results (Below 30 MHz) – Worst case: 8DPSK 2 402 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	Distance Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu V$ ))	(dB)	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

### Horizontal/Vertical

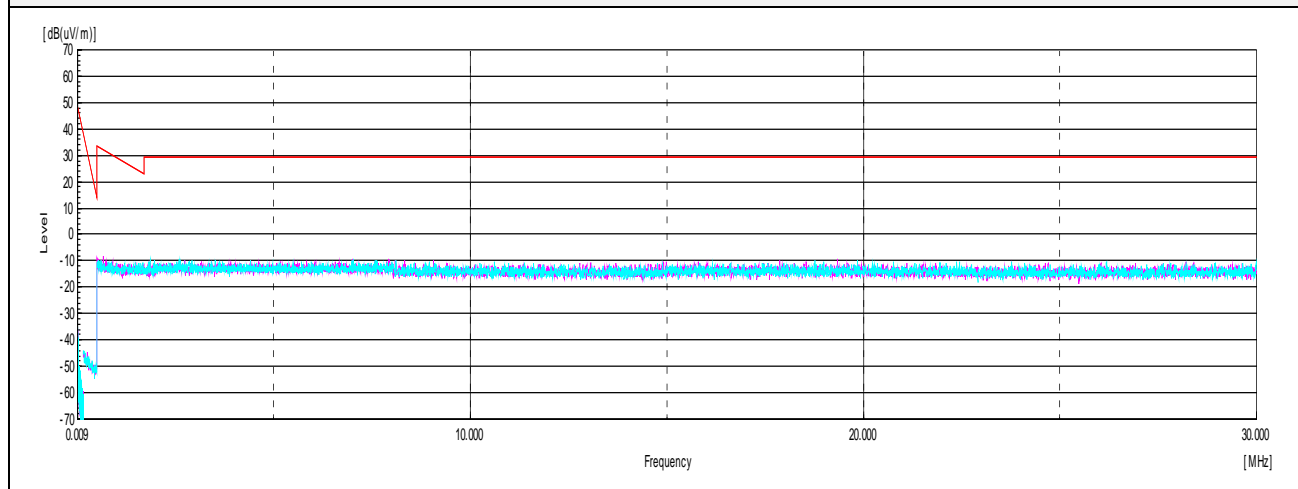

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (35) of (67)



## Test results (Below 1 000 MHz) – Worst case: 8DPSK 2 402 MHz

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Quasi peak data</b>								
46.98	V	28.80	15.29	-30.05	-	14.04	40.00	25.96
58.37	V	27.90	12.56	-29.80	-	10.66	40.00	29.34
61.89	V	26.10	12.30	-29.73	-	8.67	40.00	31.33
74.26 <sup>1)</sup>	V	25.40	12.60	-29.49	-	8.51	40.00	31.49
134.15 <sup>1)</sup>	V	23.90	17.43	-28.53	-	12.80	43.50	30.70
142.28	V	23.50	17.06	-28.41	-	12.15	43.50	31.35

## Horizontal/Vertical

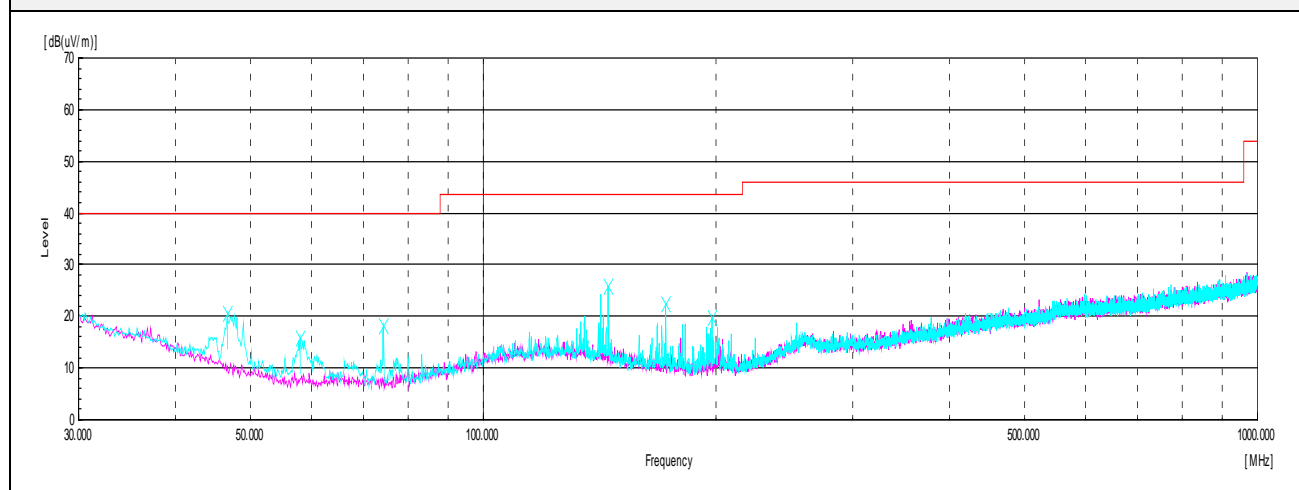

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (36) of (67)




## Test results (Above 1 000 MHz)

### GFSK Lowest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 389.33 <sup>1)</sup>	H	39.81	32.00	-27.88	-	43.93	74.00	30.07
4 261.25 <sup>1)</sup>	V	66.63	33.31	-53.28	-	46.66	74.00	27.34
6 405.44	H	66.84	35.30	-51.41	-	50.73	74.00	23.27
7 200.67	H	62.02	35.30	-50.79	-	46.53	74.00	27.47
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

### Horizontal/Vertical for Band-edge

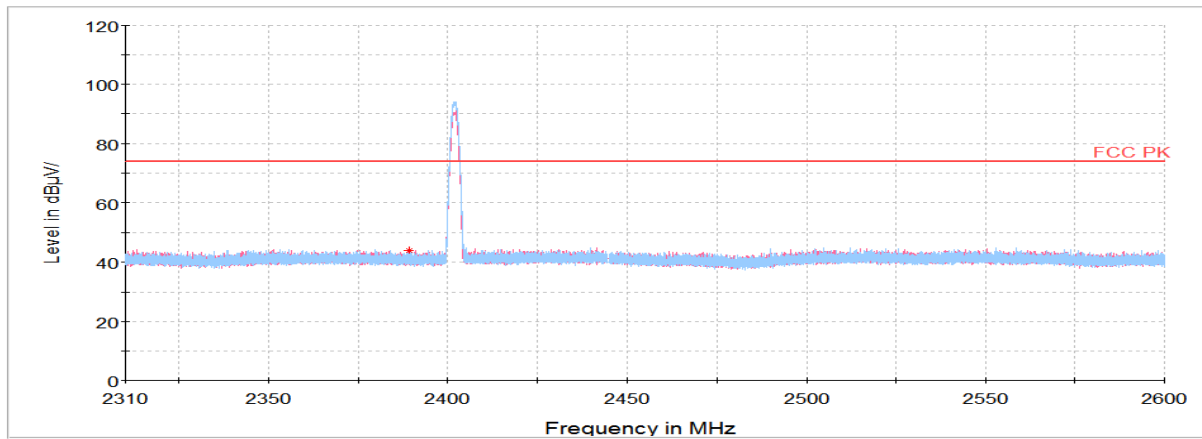


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (37) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

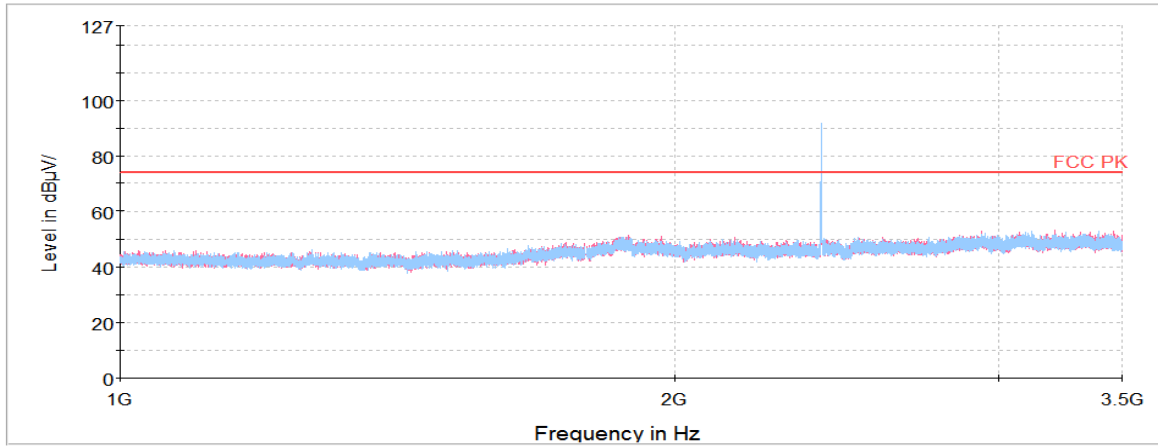

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

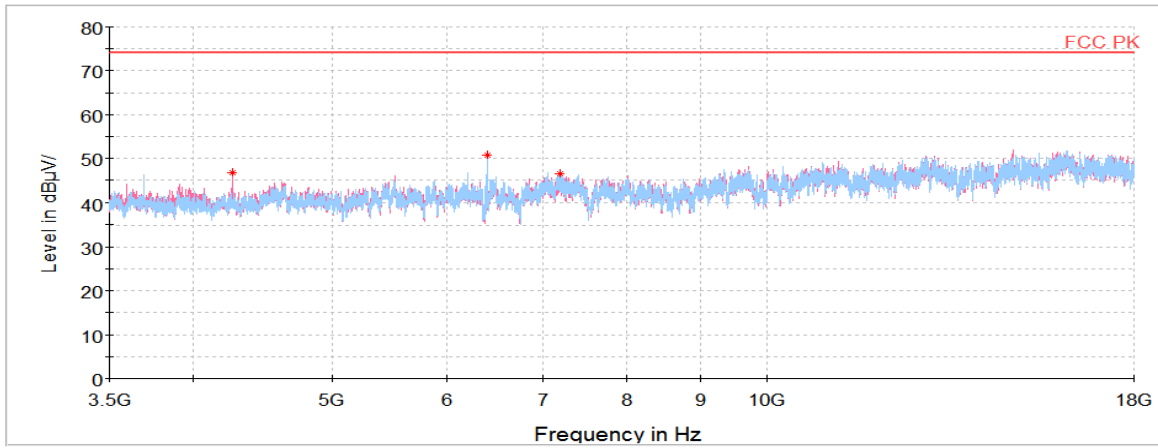

## Horizontal/Vertical for 18 GHz ~ 26 GHz

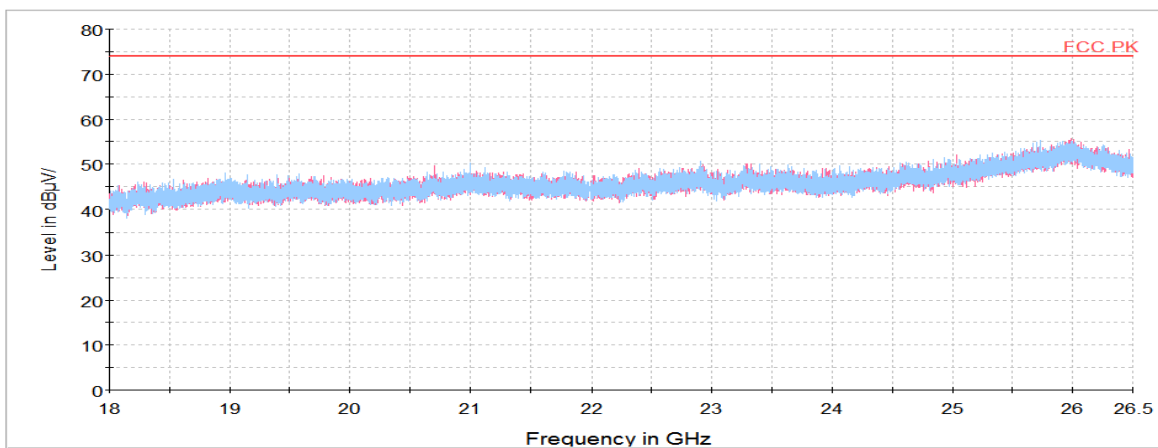

**KCTL Inc.**


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (38) of (67)


**GFSK\_Middle Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
6 509.20	H	67.64	35.30	-51.24	-	51.70	74.00	22.30
7 288.58 <sup>1)</sup>	V	61.62	35.30	-50.77	-	46.15	74.00	27.85
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

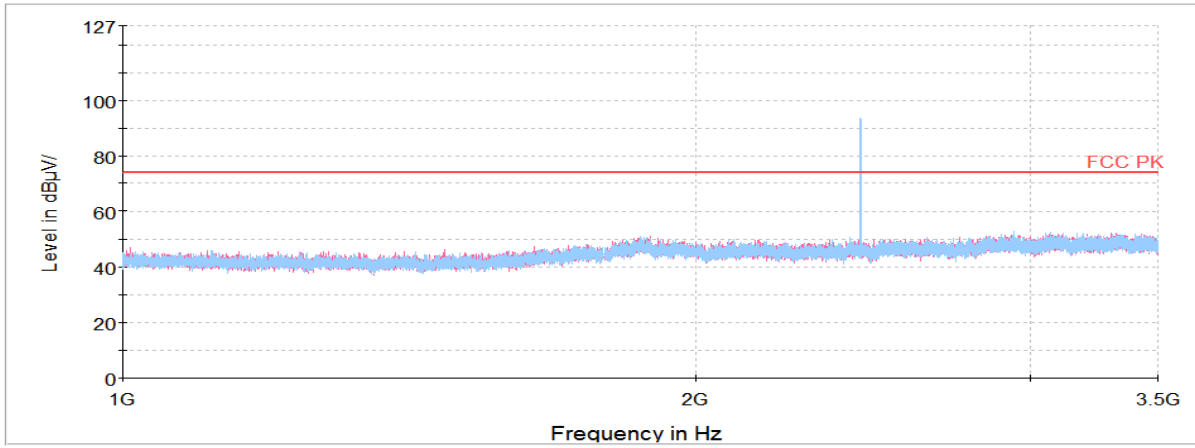

**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

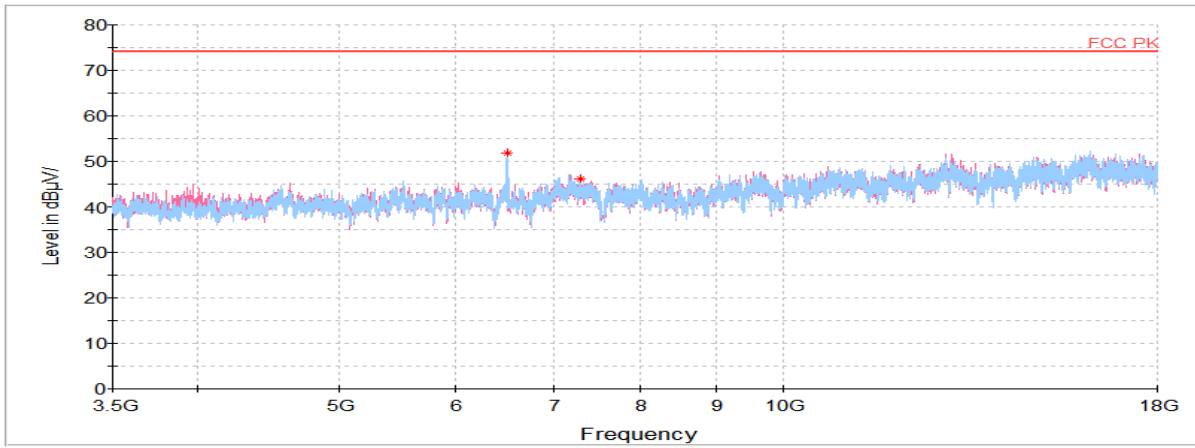

**Horizontal/Vertical for 18 GHz ~ 26 GHz**

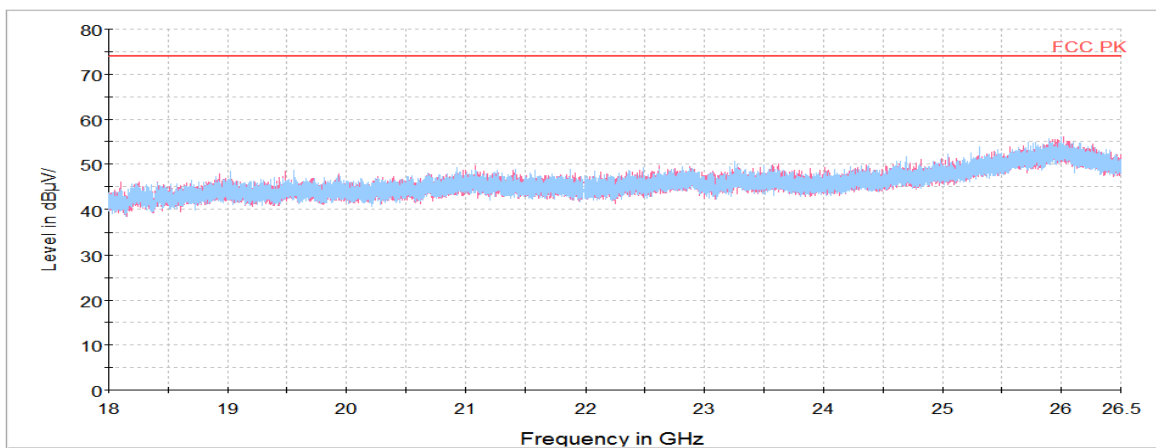

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (40) of (67)



## GFSK\_Highest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 496.37 <sup>1)</sup>	V	40.45	32.19	-27.97	-	44.67	74.00	29.33
6 613.88	H	66.16	35.30	-51.15	-	50.31	74.00	23.69
7 403.67 <sup>1)</sup>	V	61.57	35.30	-50.74	-	46.13	74.00	27.87
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

## Horizontal/Vertical for Band-edge

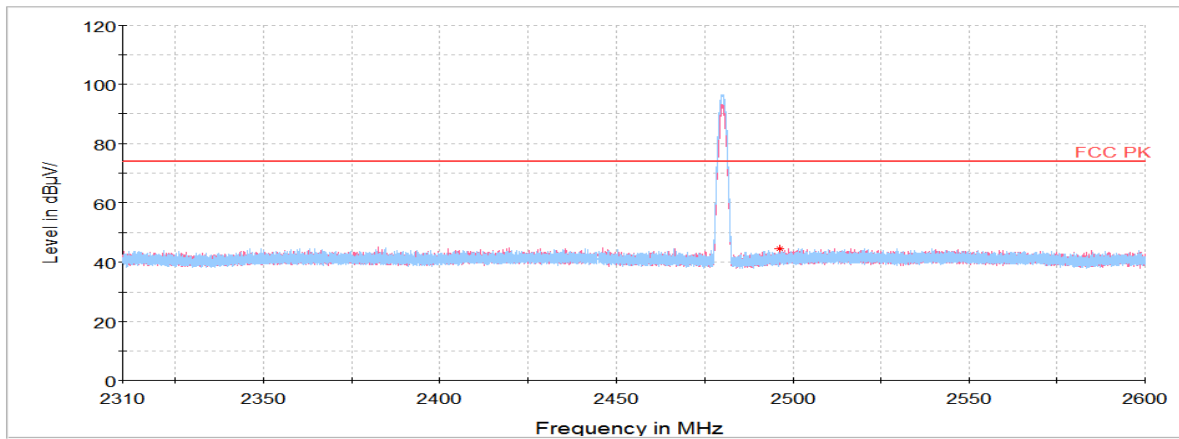




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (41) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

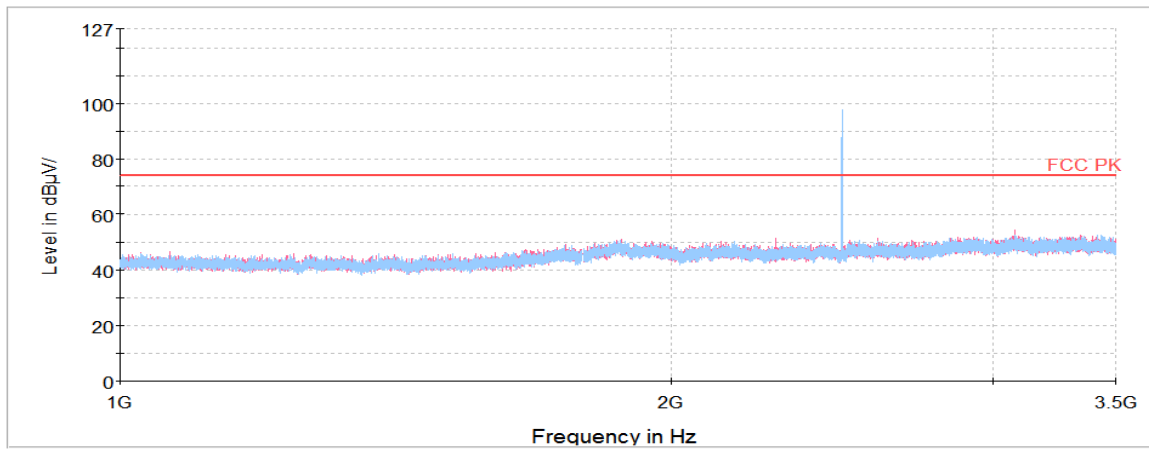

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

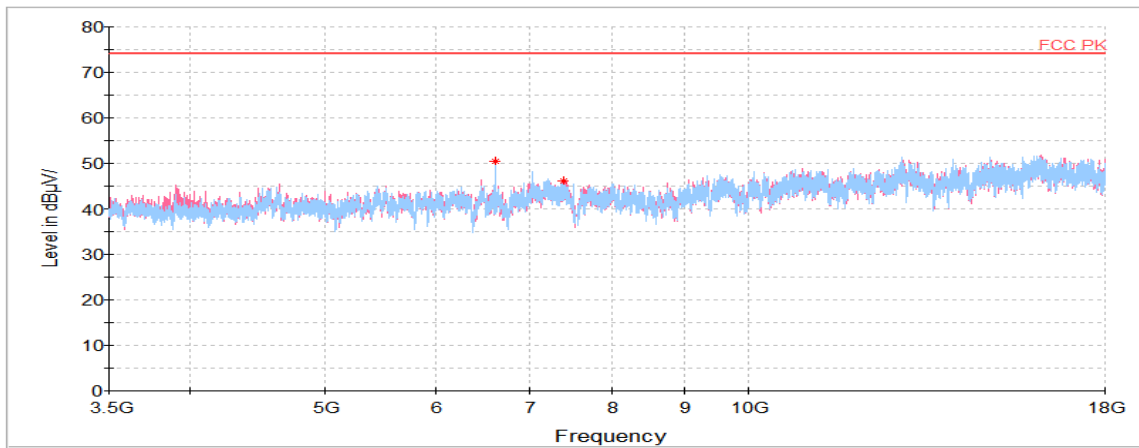

## Horizontal/Vertical for 18 GHz ~ 26 GHz

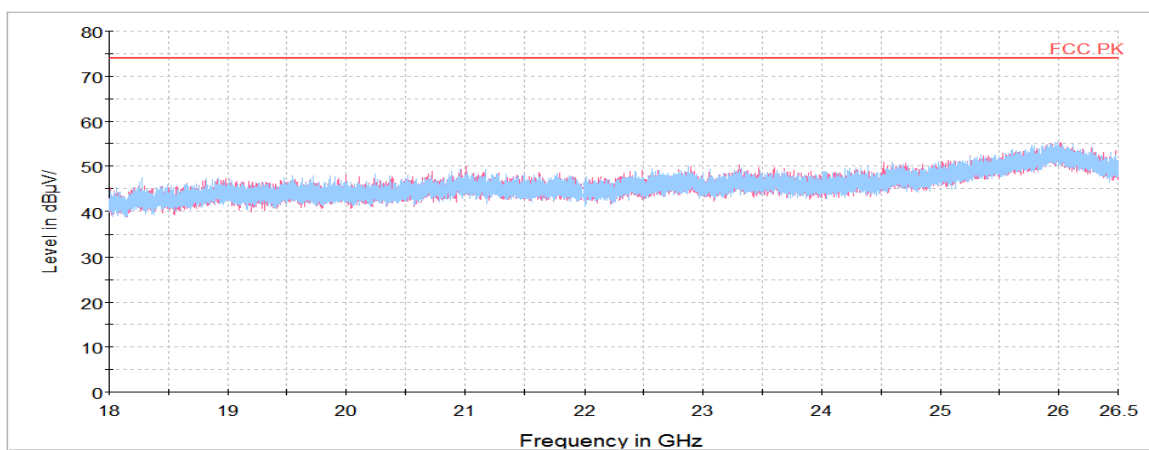

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (42) of (67)



## 8DPSK\_Lowest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 387.45 <sup>1)</sup>	H	40.02	32.00	-27.89	-	44.13	74.00	29.87
6 404.98	H	67.69	35.30	-51.41	-	51.58	74.00	22.42
7 193.88	V	62.04	35.30	-50.79	-	46.55	74.00	27.45
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

## Horizontal/Vertical for Band-edge

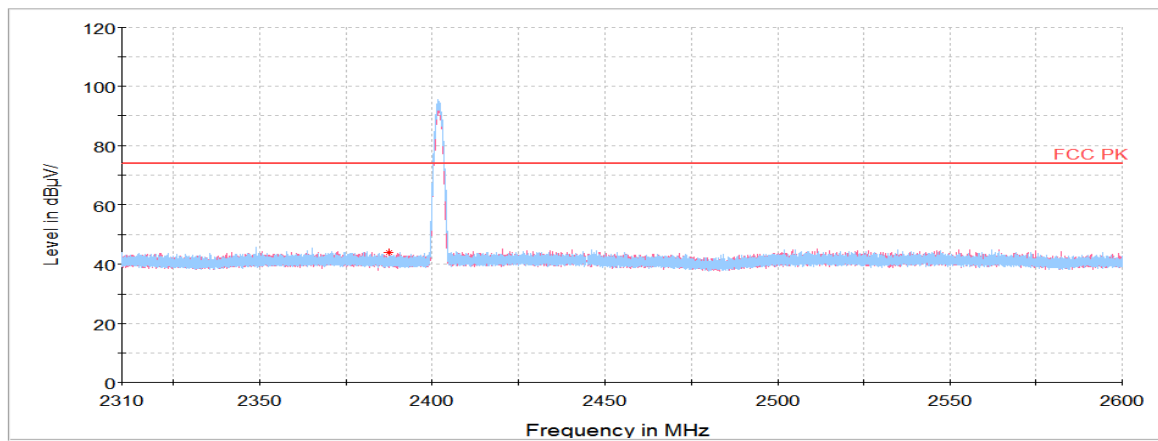


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (43) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

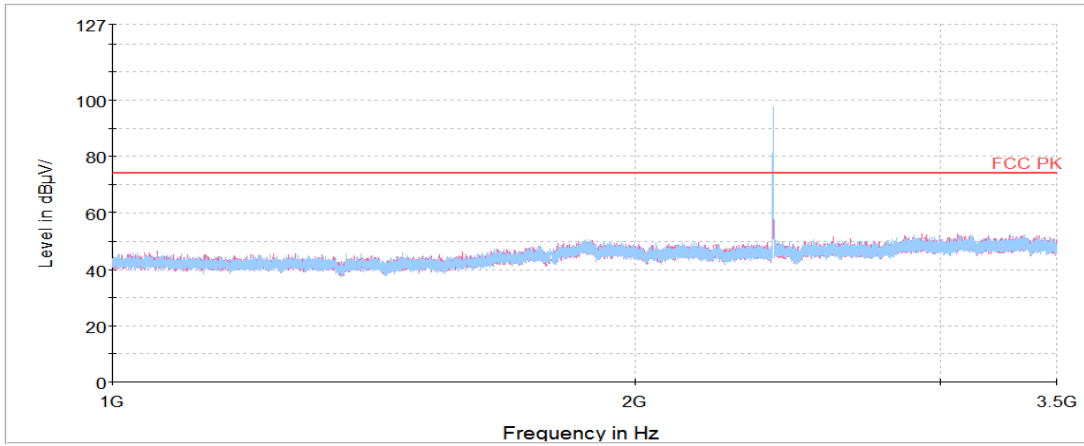

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

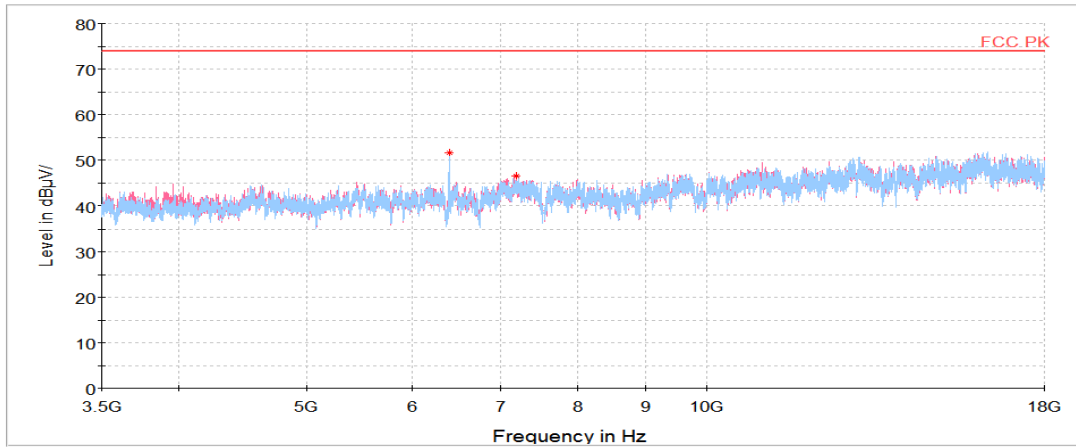

## Horizontal/Vertical for 18 GHz ~ 26 GHz

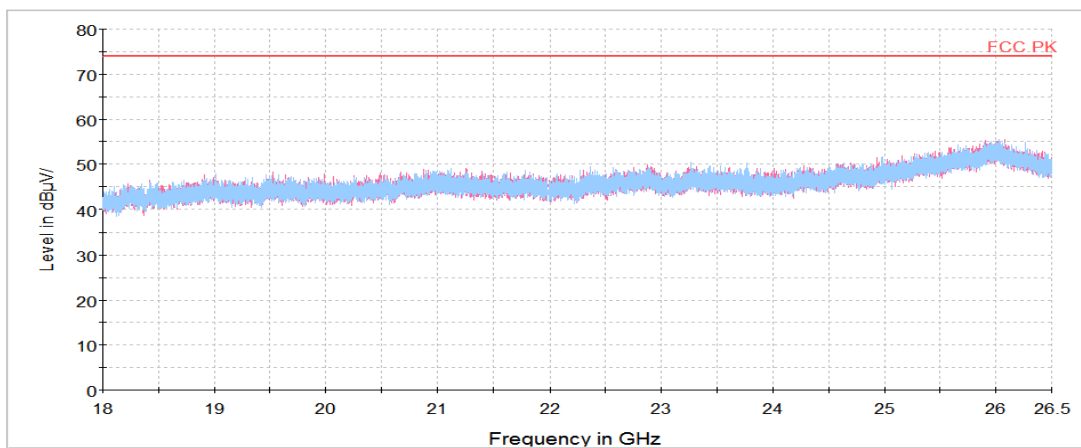

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (44) of (67)

**8DPSK\_Middle Channel**

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu V$ ))	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
<b>Peak data</b>								
6 212.86	H	64.02	35.30	-51.74	-	47.58	74.00	26.42
6 509.20	H	66.88	35.30	-51.24	-	50.94	74.00	23.06
7 200.67	H	63.14	35.30	-50.79	-	47.65	74.00	26.35
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (45) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

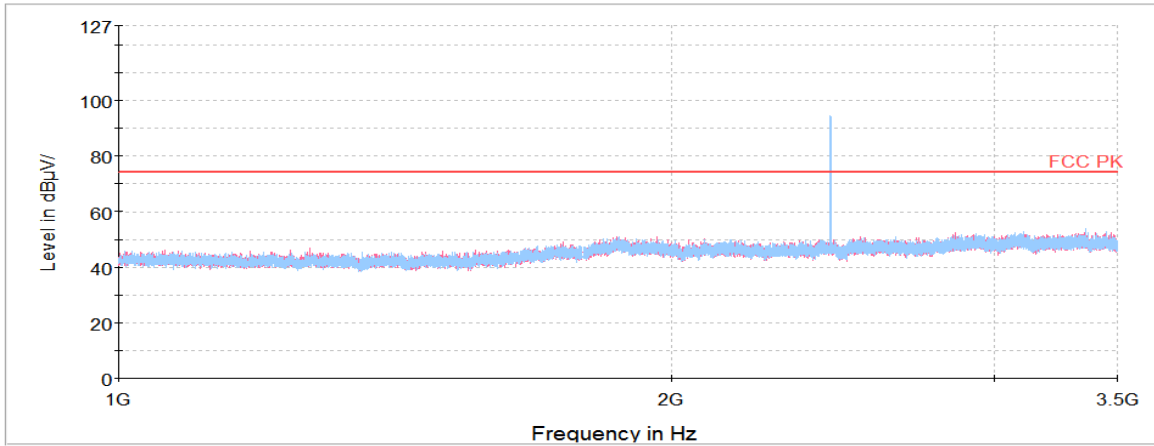

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

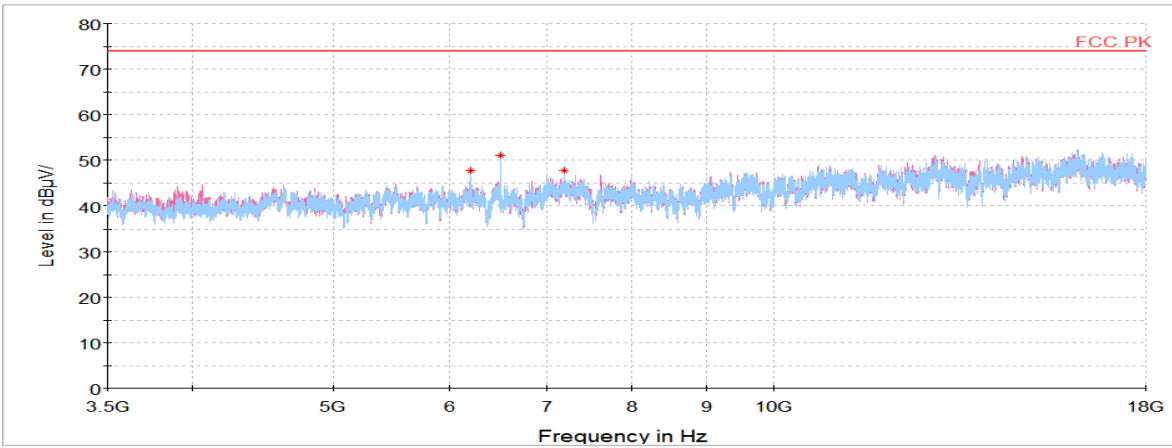

## Horizontal/Vertical for 18 GHz ~ 26 GHz

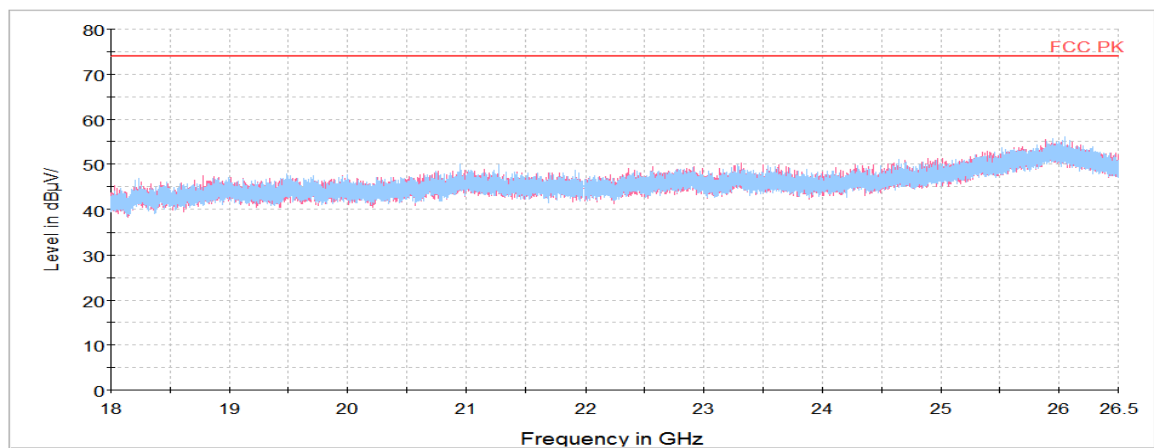

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (46) of (67)




## 8DPSK\_Highest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 498.52 <sup>1)</sup>	V	39.79	32.20	-27.98	-	44.01	74.00	29.99
6 210.14	H	66.61	35.30	-51.74	-	50.17	74.00	23.83
6 612.97	H	65.50	35.30	-51.15	-	49.65	74.00	24.35
7 415.00 <sup>1)</sup>	V	62.36	35.30	-50.74	-	46.92	74.00	27.08
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								


## Horizontal/Vertical for Band-edge

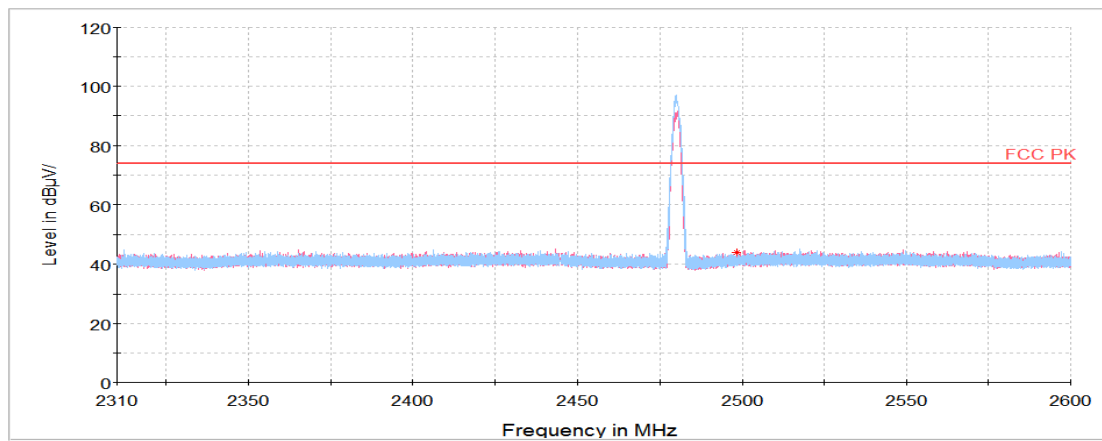


**Horizontal/Vertical for 1 GHz ~ 3.5 GHz**

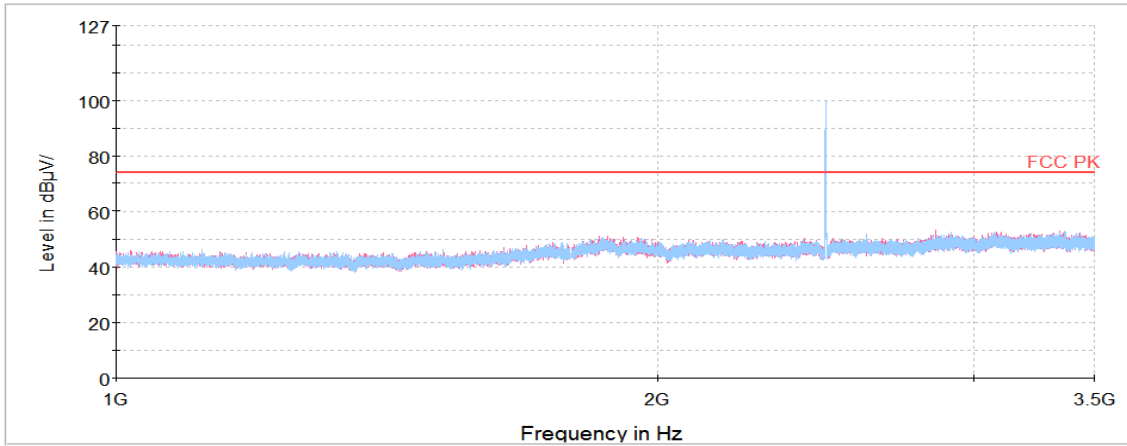

**Horizontal/Vertical for 3.5 GHz ~ 18 GHz**

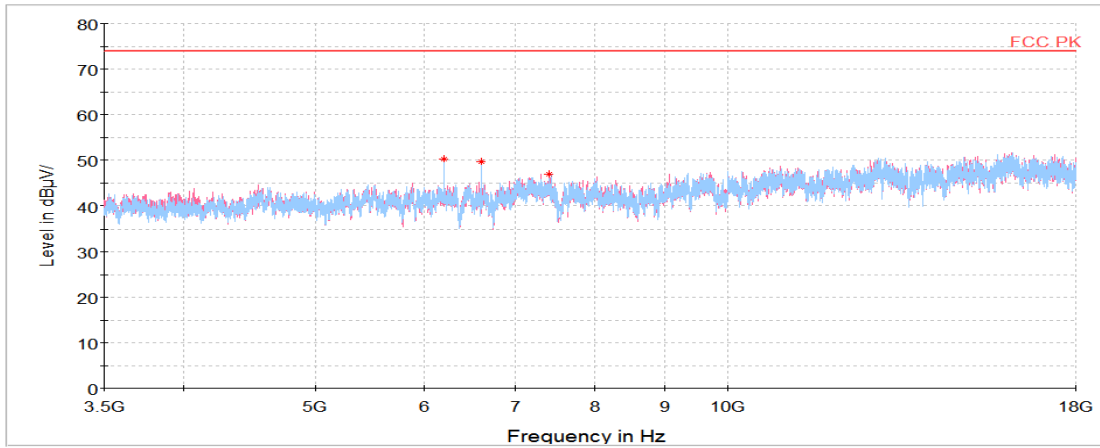

**Horizontal/Vertical for 18 GHz ~ 26 GHz**

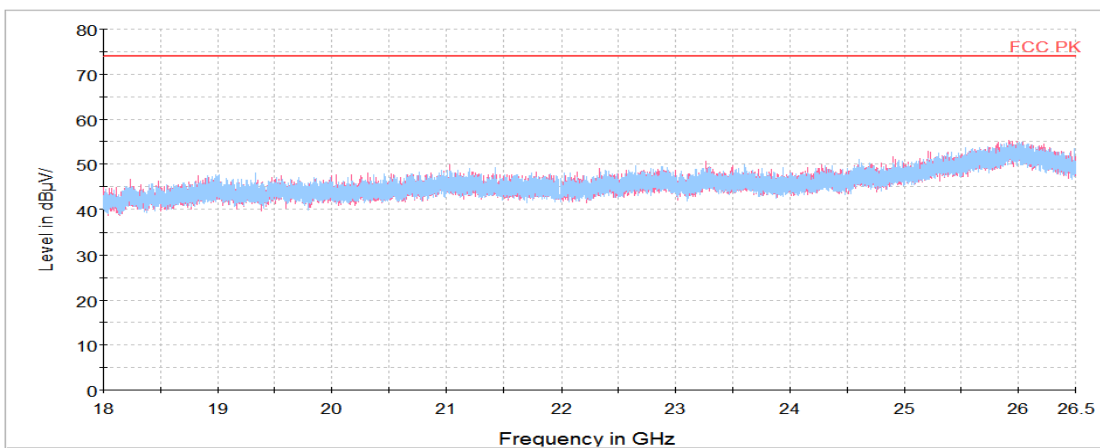

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (48) of (67)




## - Right

### Test results (Below 30 MHz) – Worst case: 8DPSK 2 441 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	Distance Factor	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu V$ ))	(dB)	(dB)	(dB)	(dB)	(dB( $\mu V/m$ ))	(dB( $\mu V/m$ ))	(dB)
No spurious emissions were detected within 20 dB of the limit.									

### Horizontal/Vertical

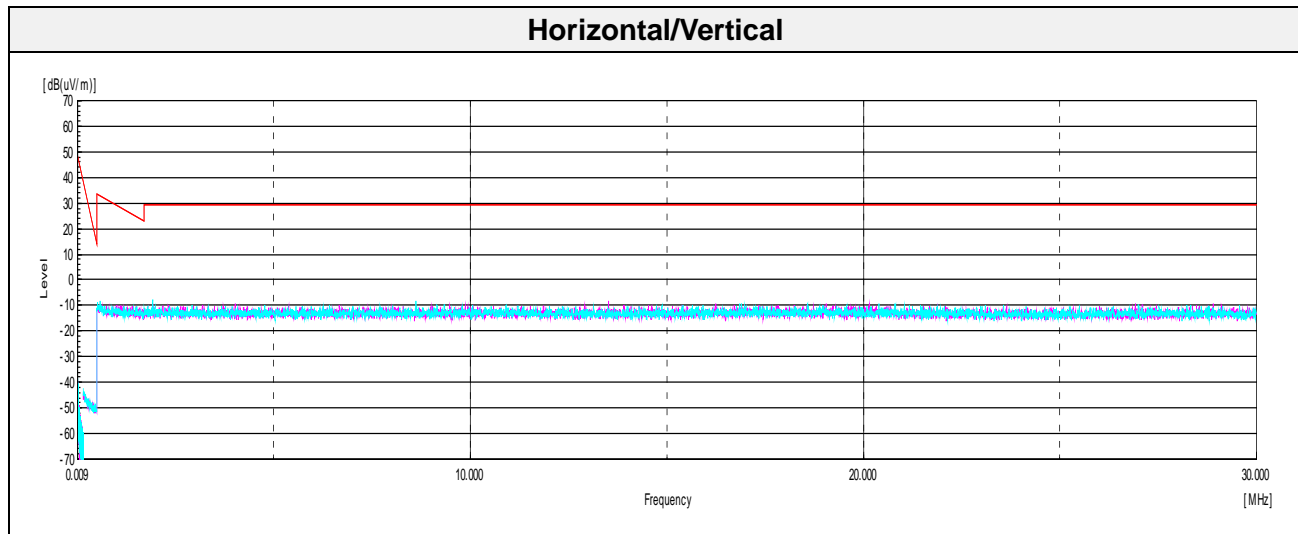



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (49) of (67)



## Test results (Below 1 000 MHz) – Worst case: 8DPSK 2 441 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Quasi peak data</b>								
46.98	V	30.30	15.29	-30.05	-	15.54	40.00	24.46
58.74	V	27.50	12.50	-29.80	-	10.20	40.00	29.80
74.14 <sup>1)</sup>	V	26.10	12.59	-29.49	-	9.20	40.00	30.80
142.40	V	23.80	17.06	-28.41	-	12.45	43.50	31.05
181.20	V	24.00	14.92	-27.97	-	10.95	43.50	32.55
200.48	V	23.40	15.23	-27.69	-	10.94	43.50	32.56

## Horizontal/Vertical

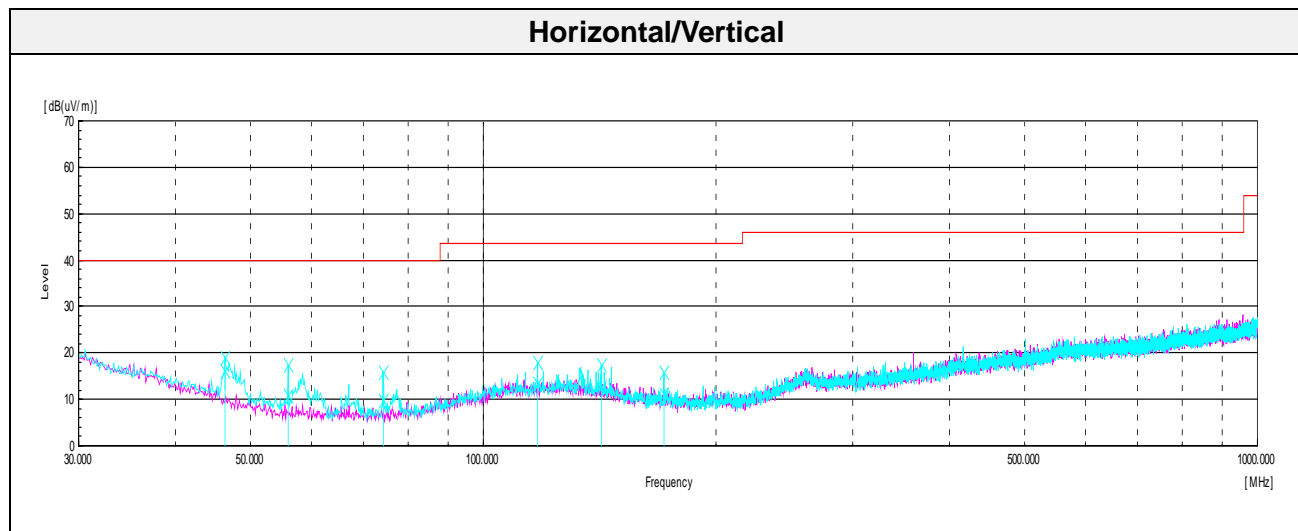

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (50) of (67)




## Test results (Above 1 000 MHz)

### GFSK Lowest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 382.84 <sup>1)</sup>	V	40.59	31.99	-27.91	-	44.67	74.00	29.33
6 405.44	V	71.47	35.30	-51.41	-	55.36	74.00	18.64
7 200.22	H	61.14	35.30	-50.79	-	45.65	74.00	28.35
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

### Horizontal/Vertical for Band-edge

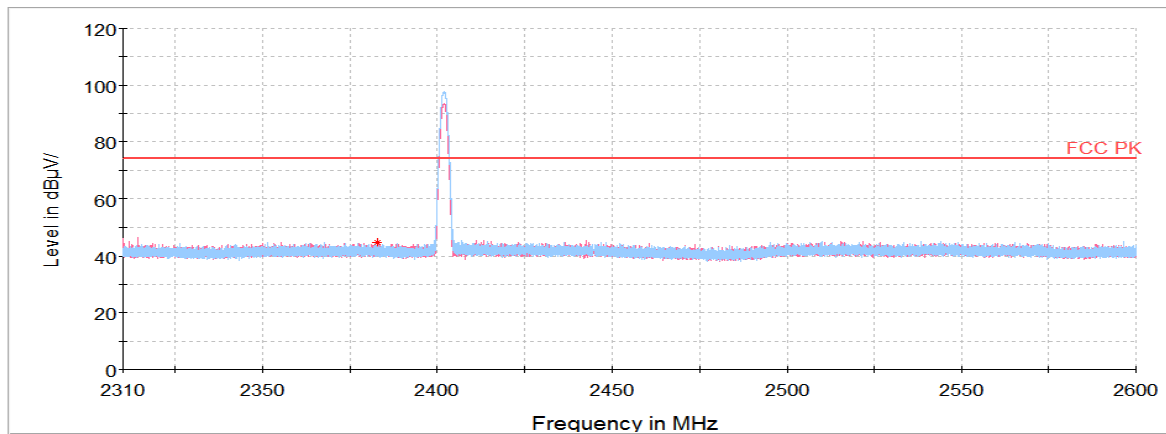


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (51) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

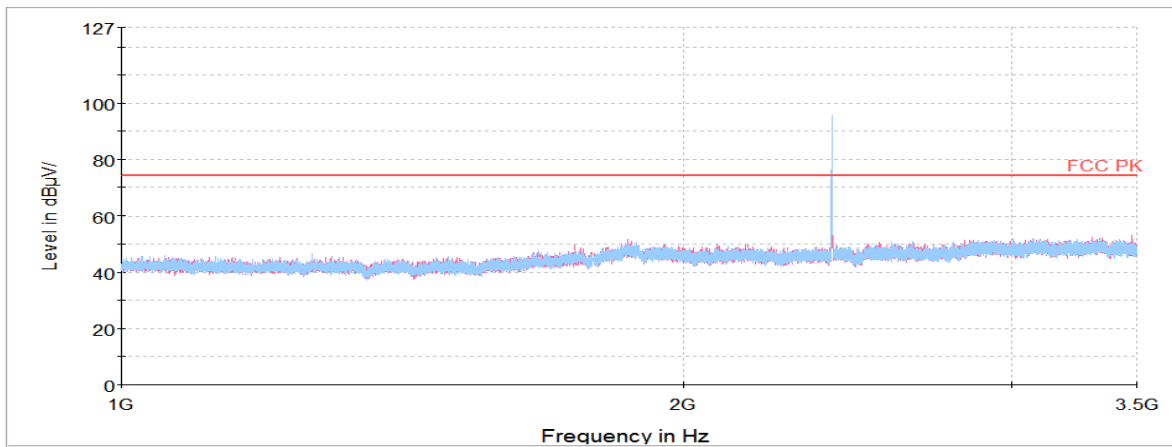

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

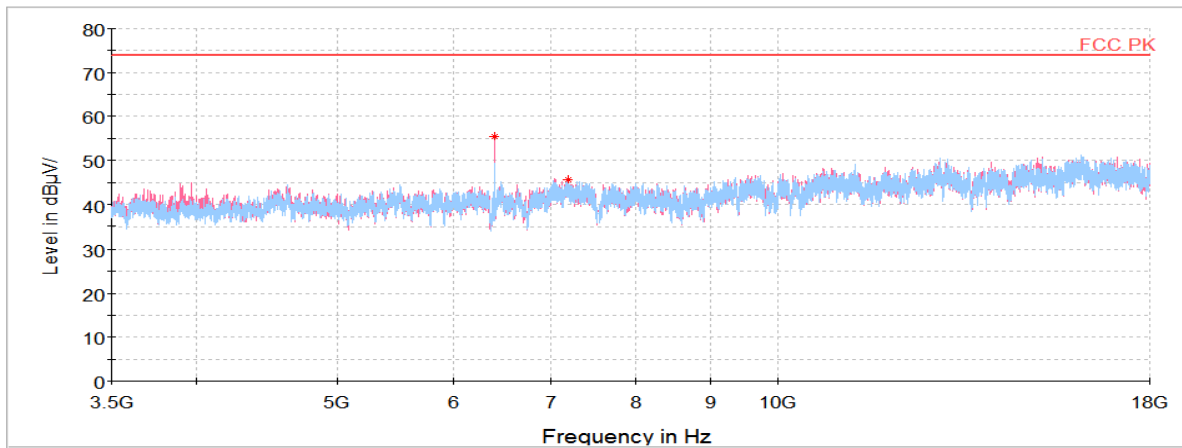

## Horizontal/Vertical for 18 GHz ~ 26 GHz

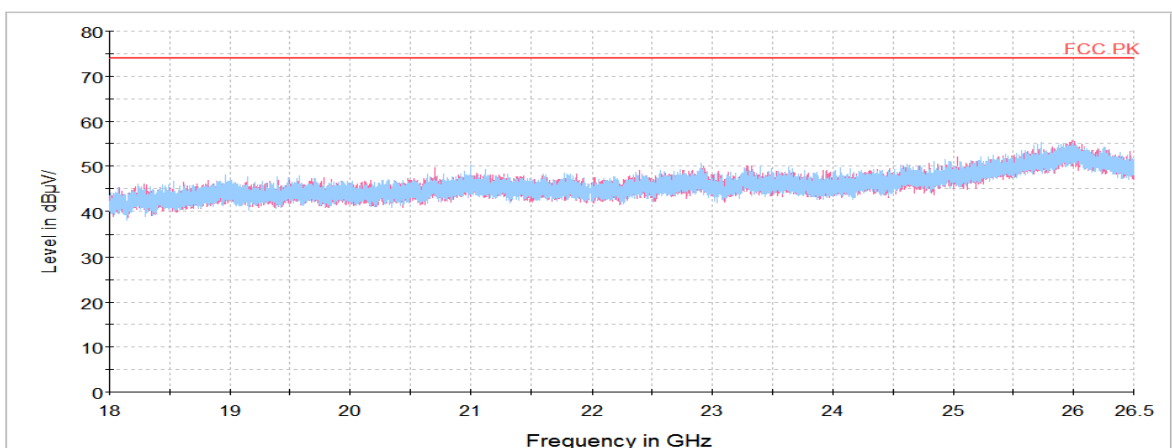

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (52) of (67)




## GFSK\_Middle Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB(μV))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
<b>Peak data</b>								
6 509.20	V	71.33	35.30	-51.24	-	55.39	74.00	18.61
7 359.72	H	62.40	35.30	-50.75	-	46.95	74.00	27.05
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

### Horizontal/Vertical for 1 GHz ~ 3.5 GHz

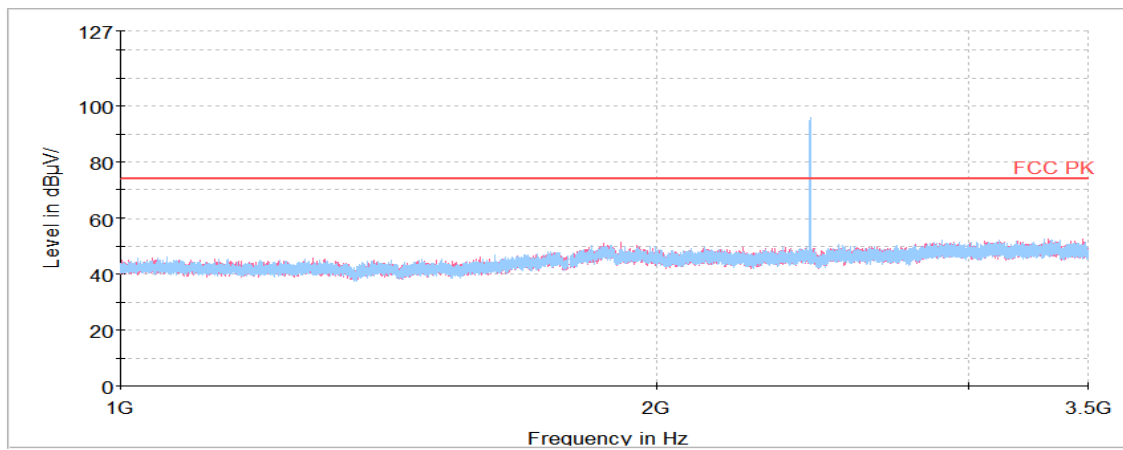

### Horizontal/Vertical for 3.5 GHz ~ 18 GHz

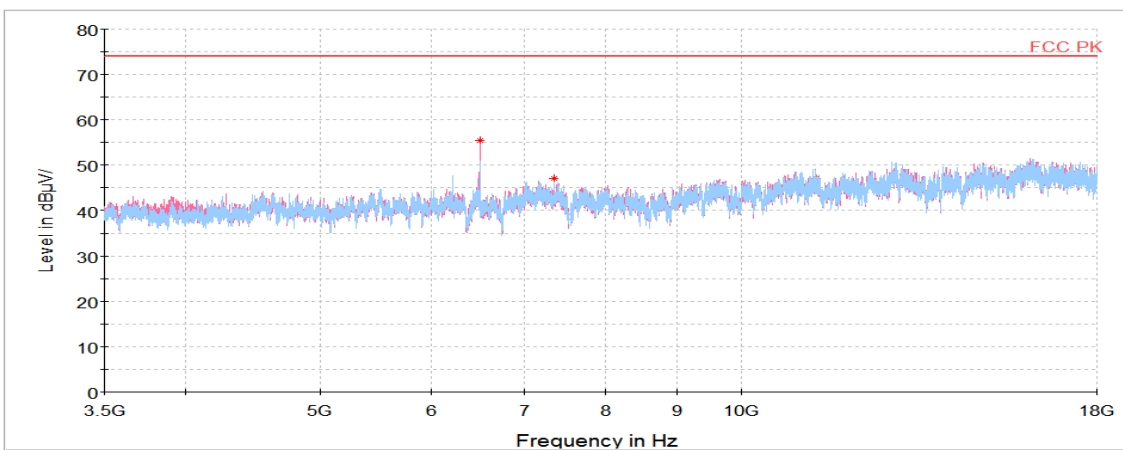


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (53) of (67)



## Horizontal/Vertical for 18 GHz ~ 26 GHz

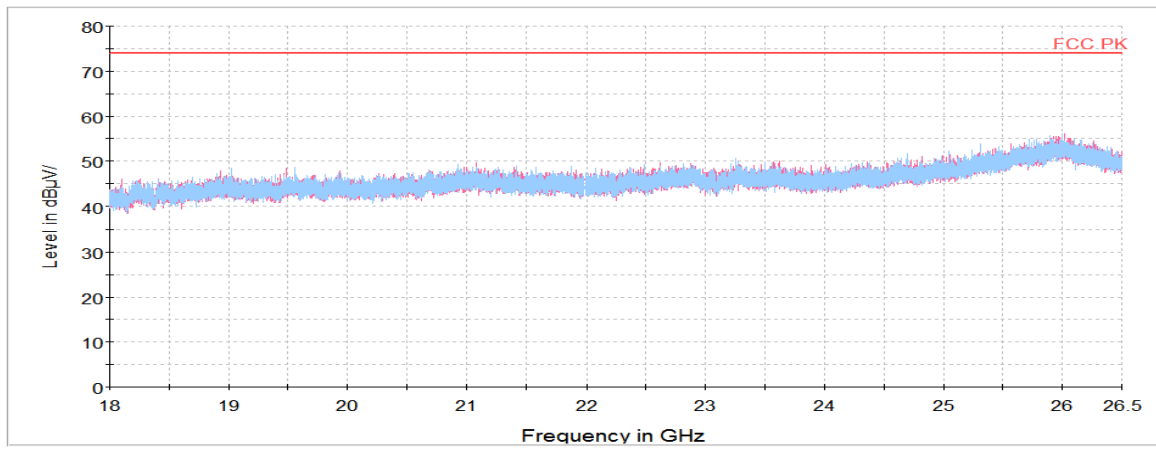


**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (54) of (67)

**GFSK\_Highest Channel**

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 492.82 <sup>1)</sup>	H	41.22	32.19	-27.97	-	45.44	74.00	28.56
6 614.78	V	69.81	35.30	-51.15	-	53.96	74.00	20.04
7 440.38 <sup>1)</sup>	H	63.37	35.30	-50.74	-	47.93	74.00	26.07
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

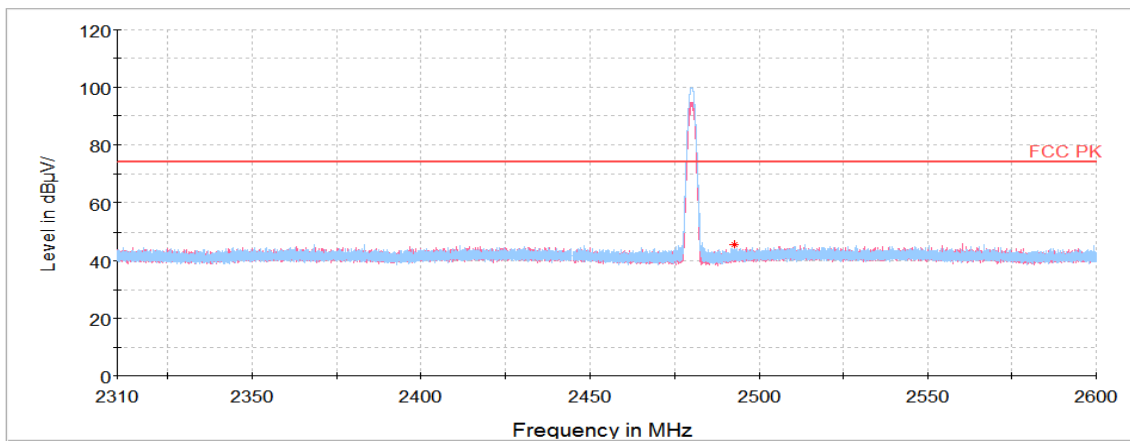**Horizontal/Vertical for Band-edge**


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (55) of (67)



## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

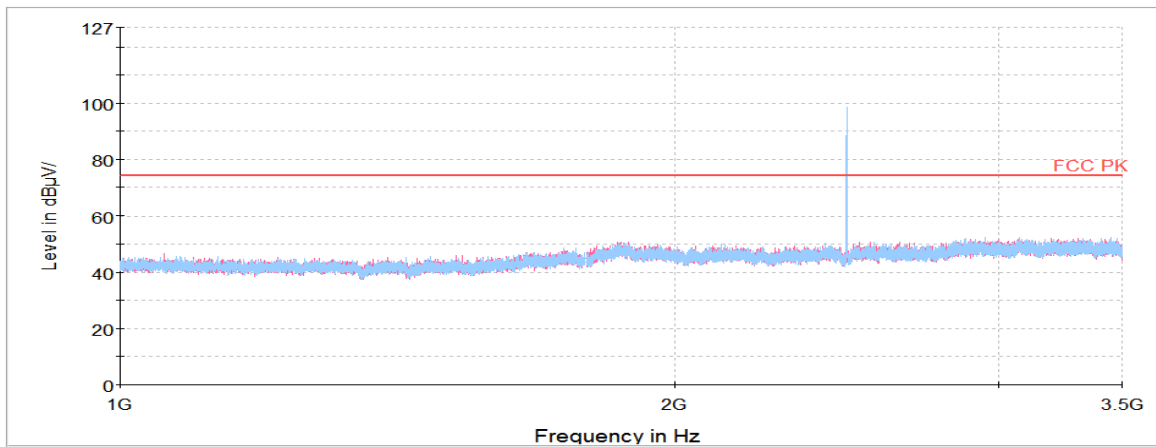

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

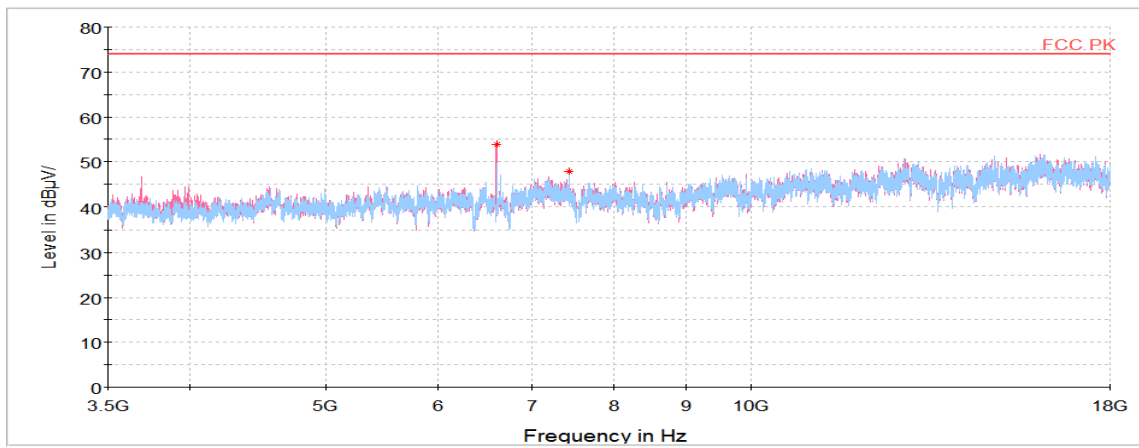

## Horizontal/Vertical for 18 GHz ~ 26 GHz



# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (56) of (67)



## 8DPSK\_Lowest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 382.62 <sup>1)</sup>	V	41.39	31.99	-27.92	-	45.46	74.00	28.54
6 405.44	H	70.62	35.30	-51.41	-	54.51	74.00	19.49
7 213.81	V	61.00	35.30	-50.78	-	45.52	74.00	28.48
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

## Horizontal/Vertical for Band-edge

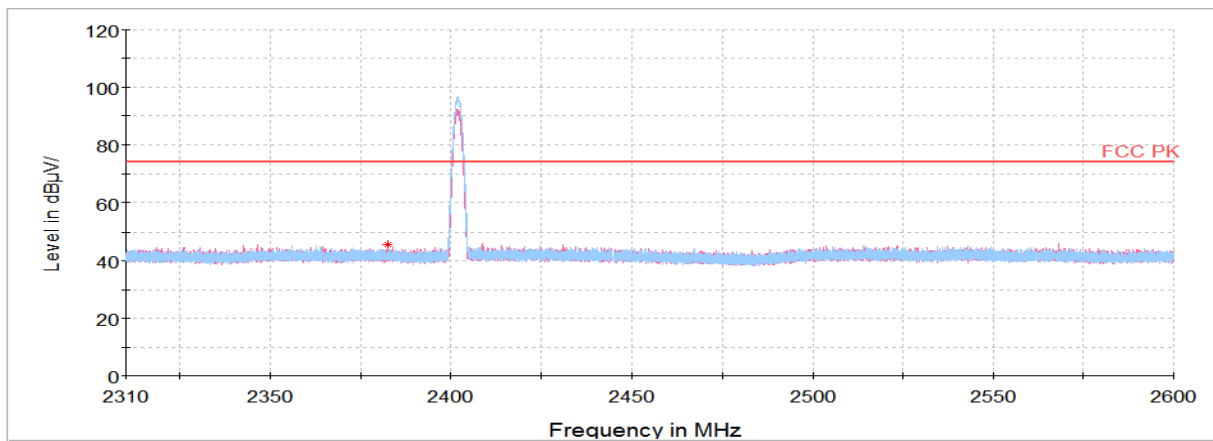




# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (57) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

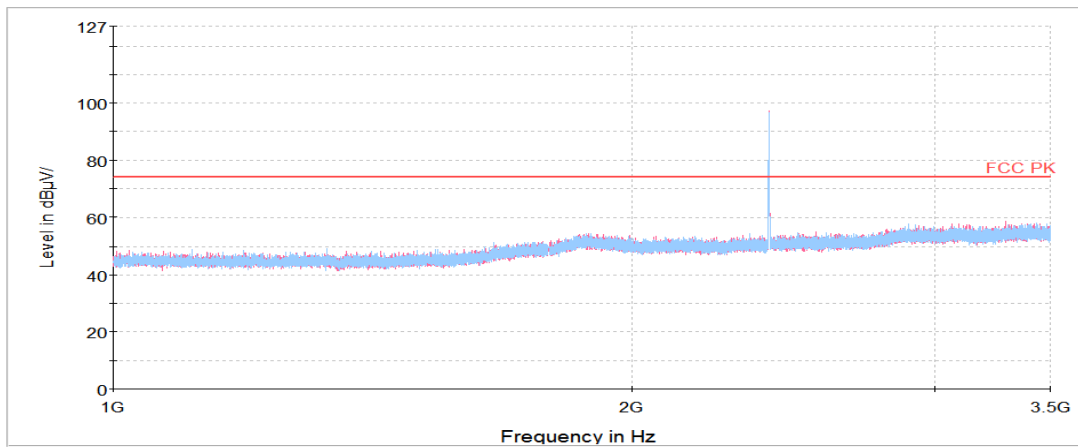

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

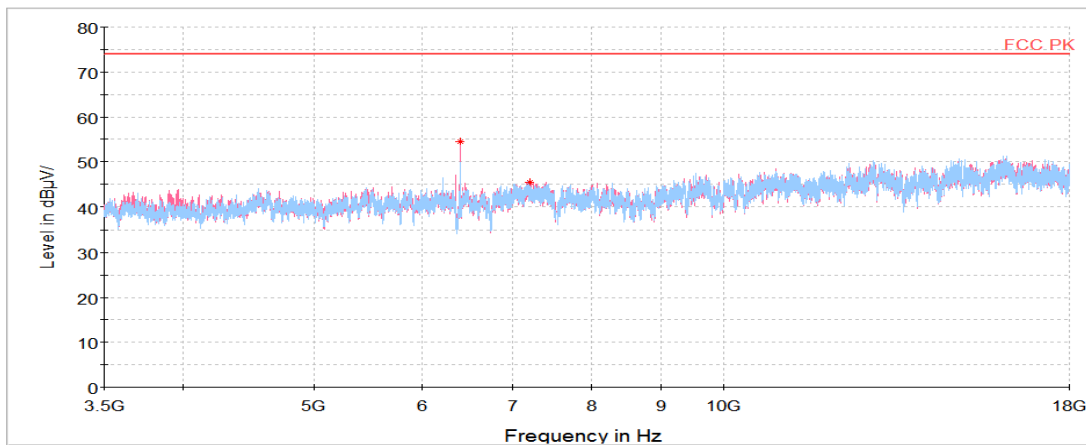

## Horizontal/Vertical for 18 GHz ~ 26 GHz

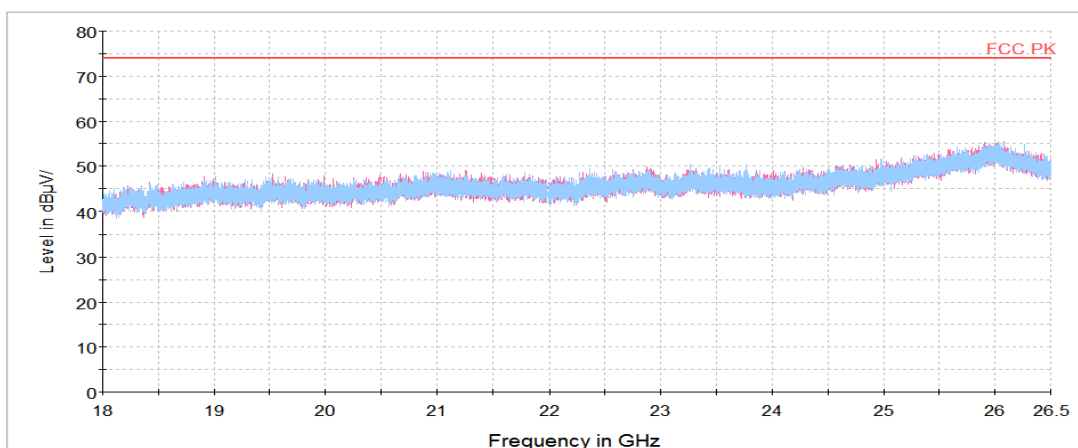

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (58) of (67)




## 8DPSK\_Middle Channel

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCCF	Result	Limit	Margin
(MHz)	(V/H)	(dB( $\mu$ V))	(dB)	(dB)	(dB)	(dB( $\mu$ V/m))	(dB( $\mu$ V/m))	(dB)
<b>Peak data</b>								
3 698.02 <sup>1)</sup>	V	67.91	33.06	-53.27	-	47.70	74.00	26.30
6 509.66	V	70.34	35.30	-51.24	-	54.40	74.00	19.60
7 288.13 <sup>1)</sup>	H	61.20	35.30	-50.77	-	45.73	74.00	28.27
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

### Horizontal/Vertical for 1 GHz ~ 3.5 GHz

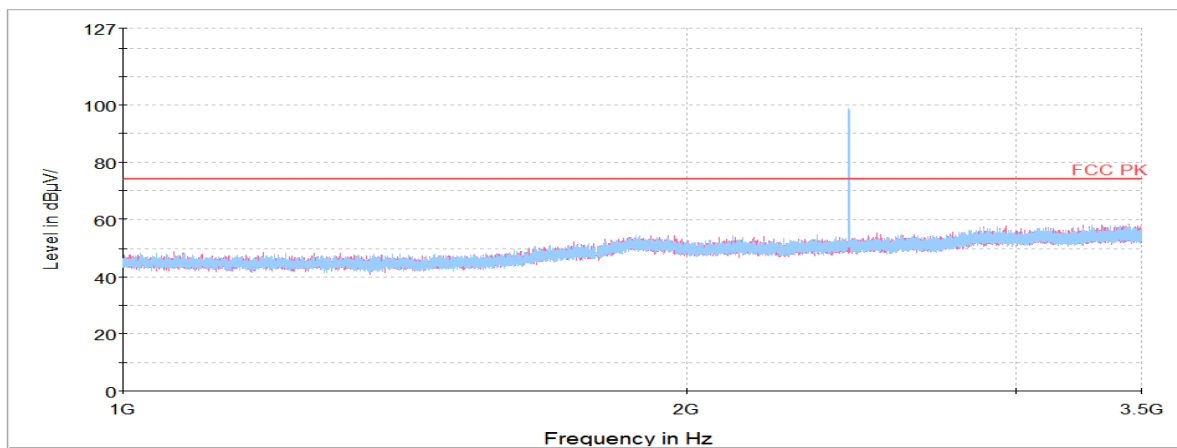

### Horizontal/Vertical for 3.5 GHz ~ 18 GHz

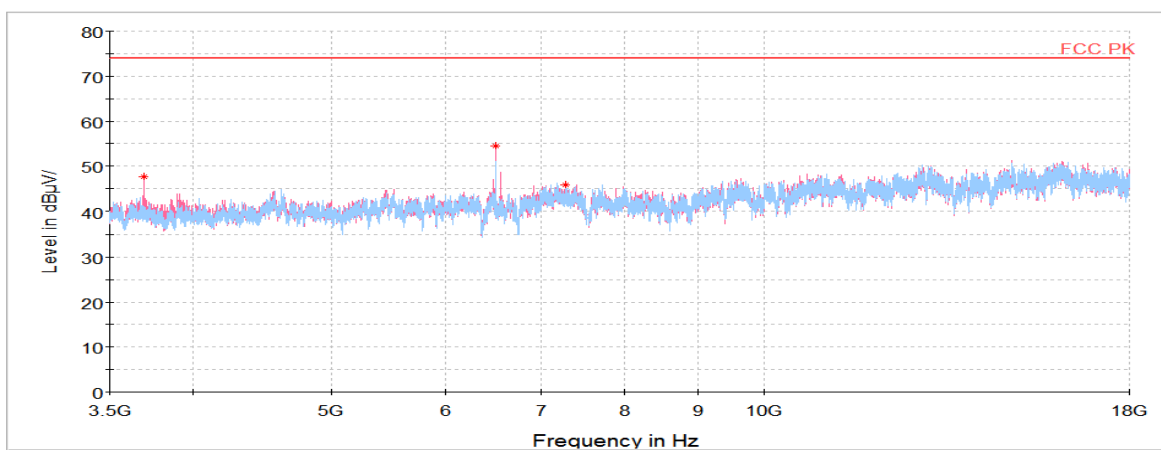


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (59) of (67)



## Horizontal/Vertical for 18 GHz ~ 26 GHz

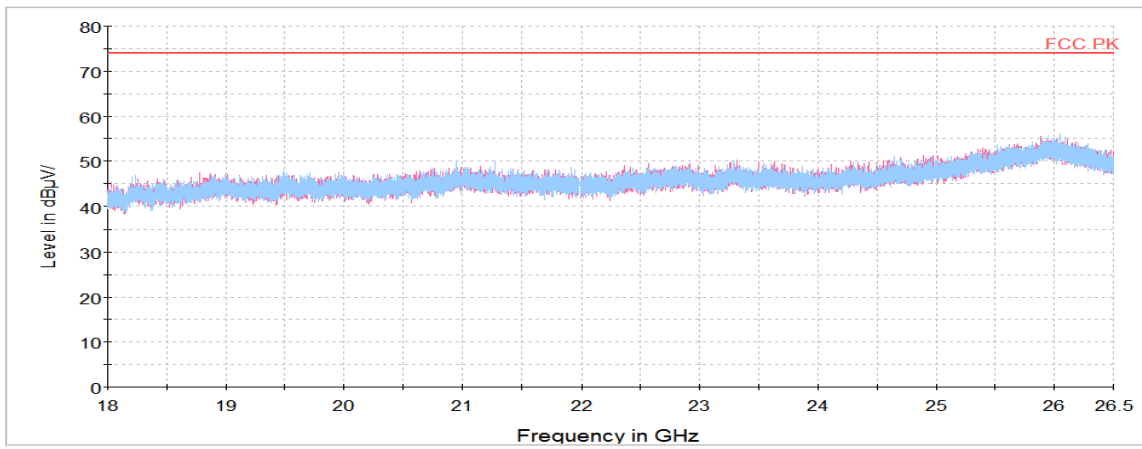

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (60) of (67)



## 8DPSK\_Highest Channel

Frequency (MHz)	Pol. (V/H)	Reading (dB( $\mu$ V))	Ant. Factor (dB)	Amp. + Cable (dB)	DCCF (dB)	Result (dB( $\mu$ V/m))	Limit (dB( $\mu$ V/m))	Margin (dB)
<b>Peak data</b>								
2 483.65 <sup>1)</sup>	H	43.59	32.17	-27.95	-	47.81	74.00	26.19
6 223.73	V	69.16	35.30	-51.72	-	52.74	74.00	21.26
6 613.42	V	69.13	35.30	-51.15	-	53.28	74.00	20.72
7 439.92 <sup>1)</sup>	V	64.43	35.30	-50.74	-	48.99	74.00	25.01
<b>Average Data</b>								
No spurious emissions were detected within 20 dB of the limit.								

## Horizontal/Vertical for Band-edge

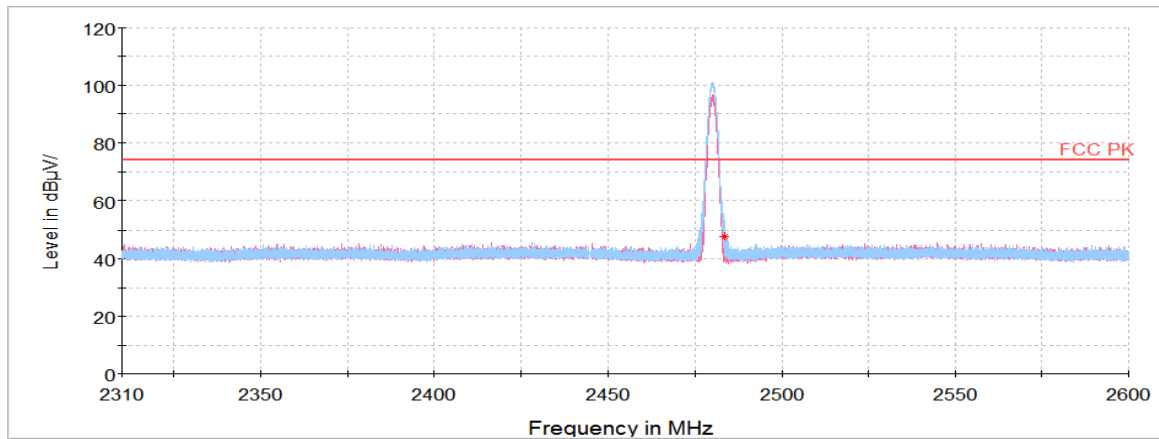


# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (61) of (67)




## Horizontal/Vertical for 1 GHz ~ 3.5 GHz

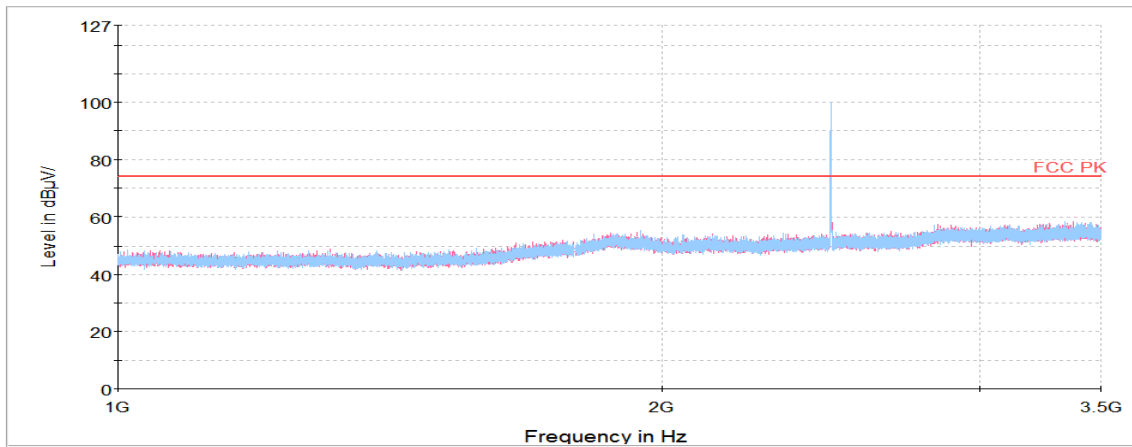

## Horizontal/Vertical for 3.5 GHz ~ 18 GHz

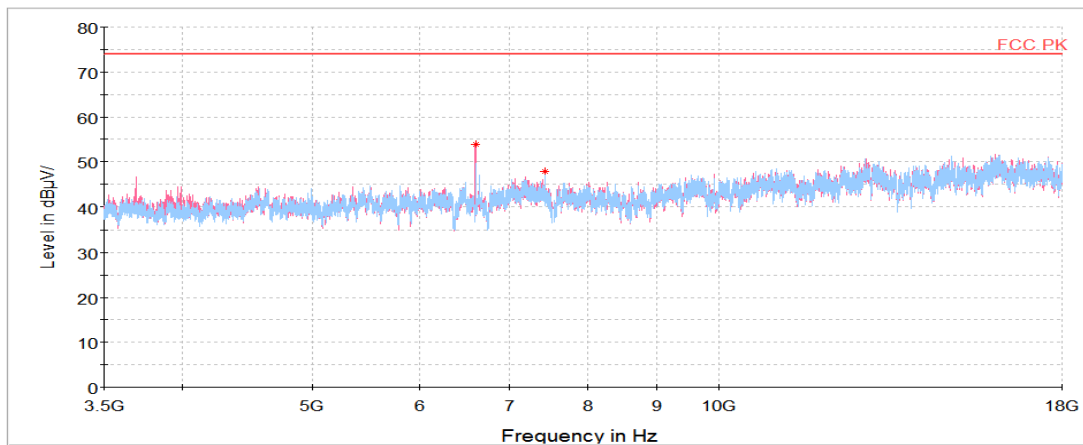


## Horizontal/Vertical for 18 GHz ~ 26 GHz

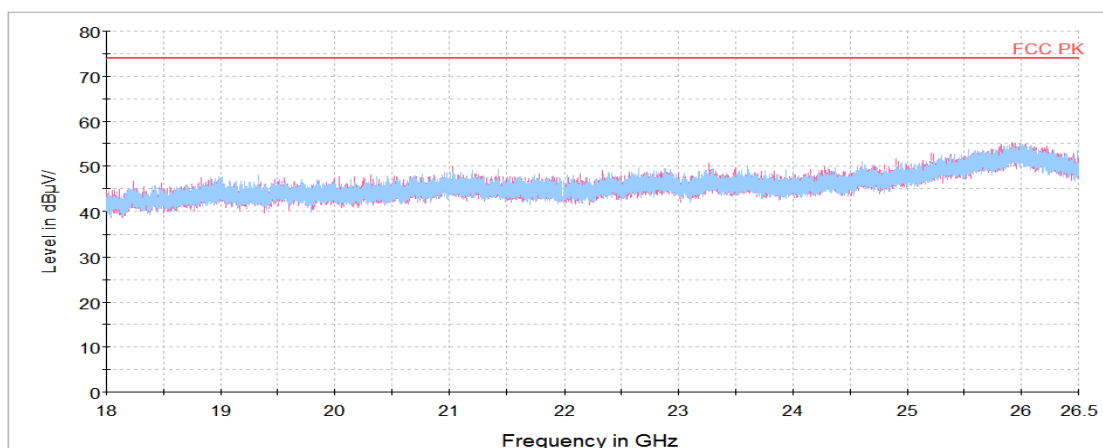

## 7.7. Conducted Spurious Emission

### Test setup



### Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operation, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation specified in §15.209(a) is not required. In addition, radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limit : 20 dBc

### Test procedure

ANSI C63.10-2013 - Section 6.10.4, 7.8.8

### Test settings

#### ▪ Band-edge

- 1) Span : Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level : As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log(\text{OBW}/\text{RBW})]$  below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred)
- 4) Sweep time = Coupled
- 5) RBW : 100 kHz
- 6) VBW : 300 kHz
- 7) Detector : Peak
- 8) Trace : Max hold

#### ▪ Spurious emissions

- 1) Span : 30 MHz to 10 times the operating frequency in GHz
- 2) RBW : 100 kHz
- 3) VBW : 300 kHz
- 4) Sweep time : Coupled
- 5) Detector : Peak

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR21-SRF0076-A  
Page (63) of (67)



## Test results

- Left

### GFSK

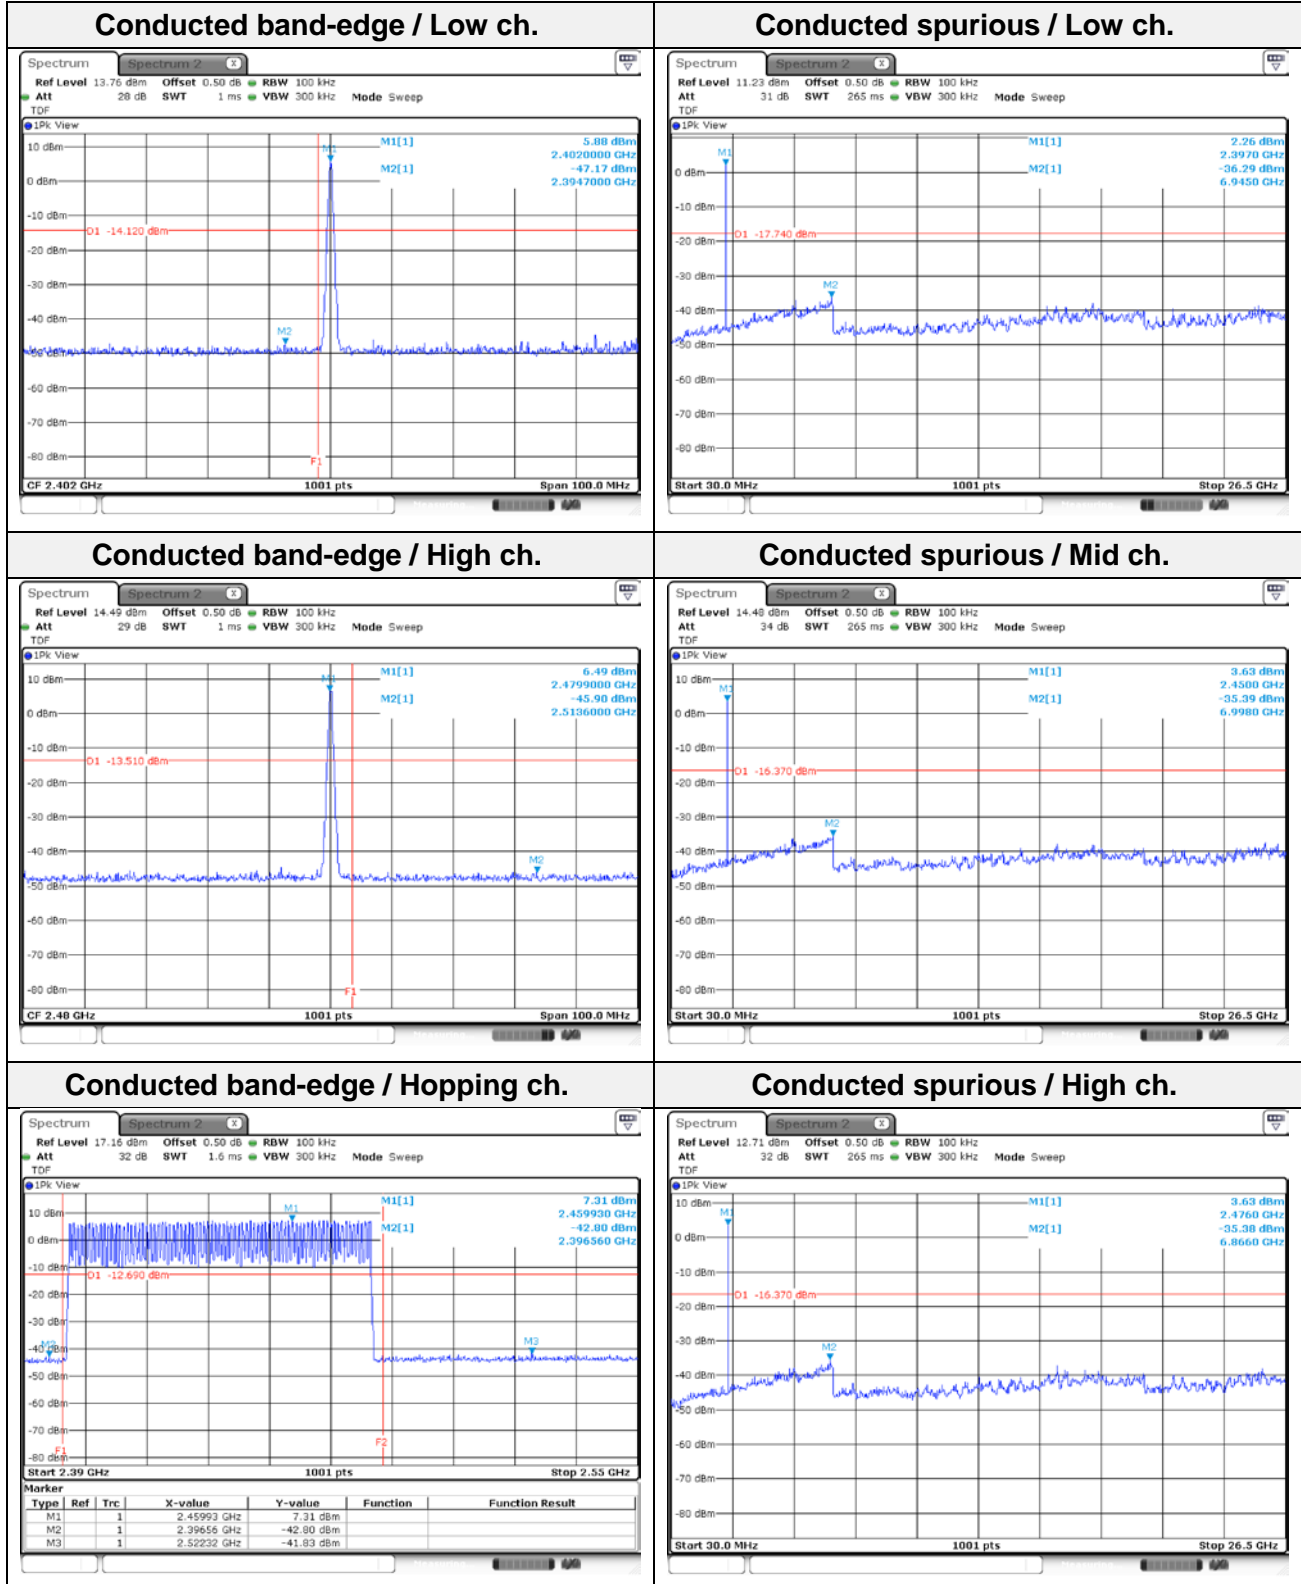

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (64) of (67)




## 8DPSK


### Conducted band-edge / Low ch.

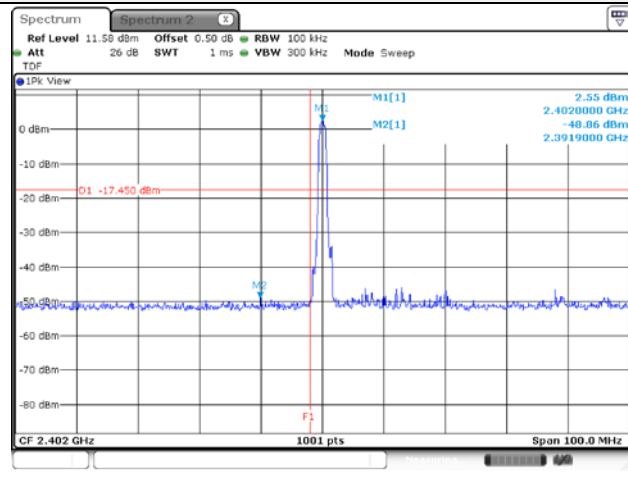


### Conducted spurious / Low ch.

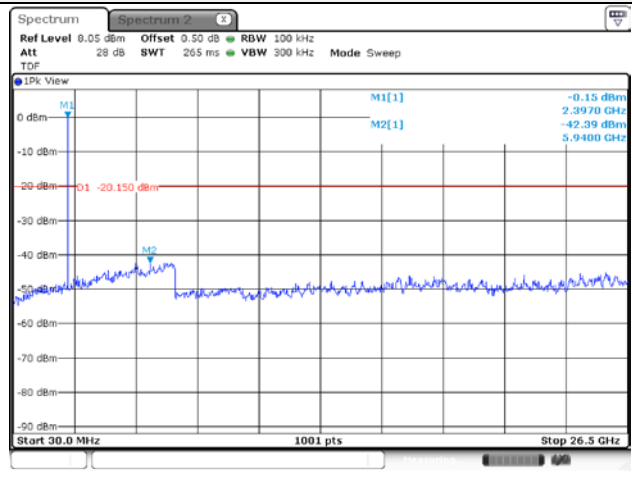


### Conducted band-edge / High ch.

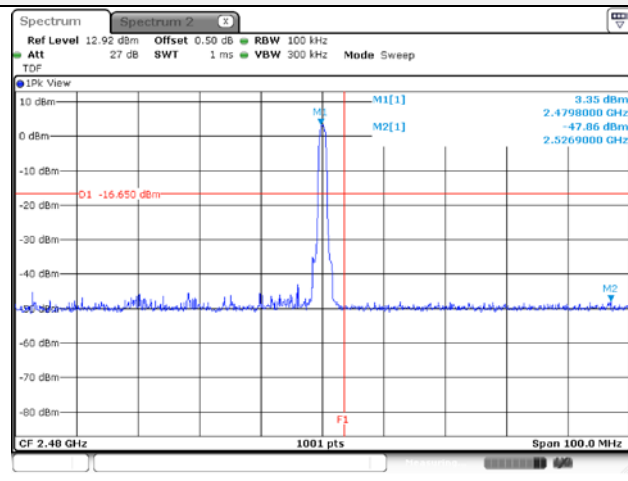


### Conducted spurious / Mid ch.

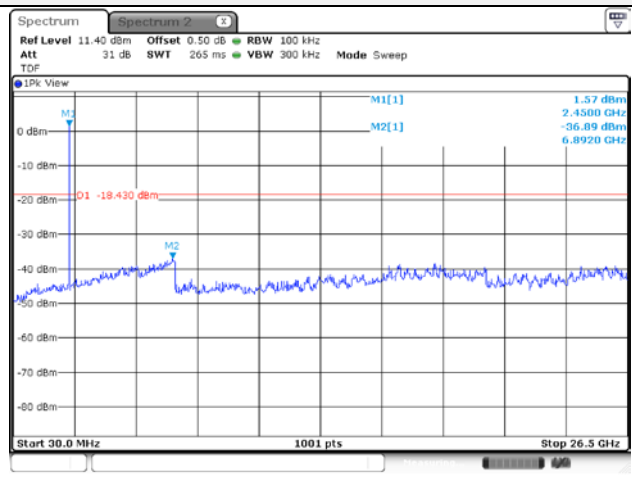

### Conducted band-edge / Hopping ch.

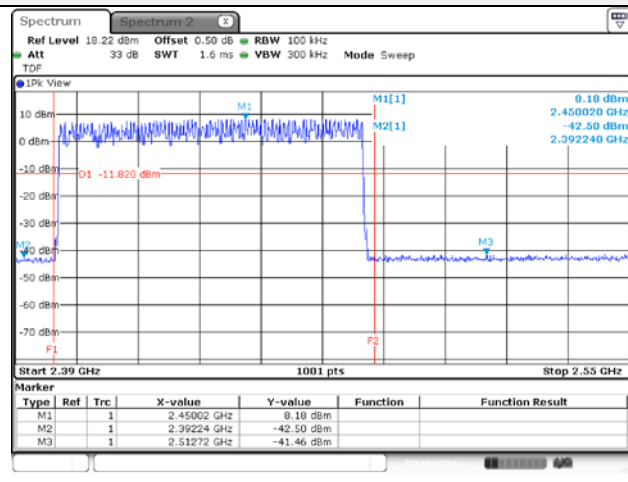

### Conducted spurious / High ch.

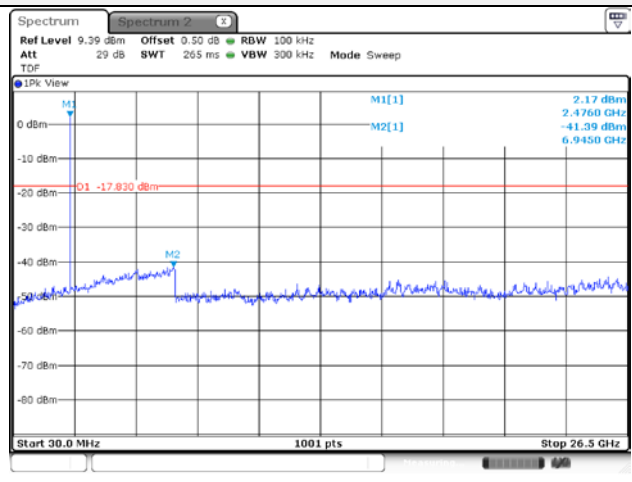



# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (65) of (67)



- Right

## GFSK

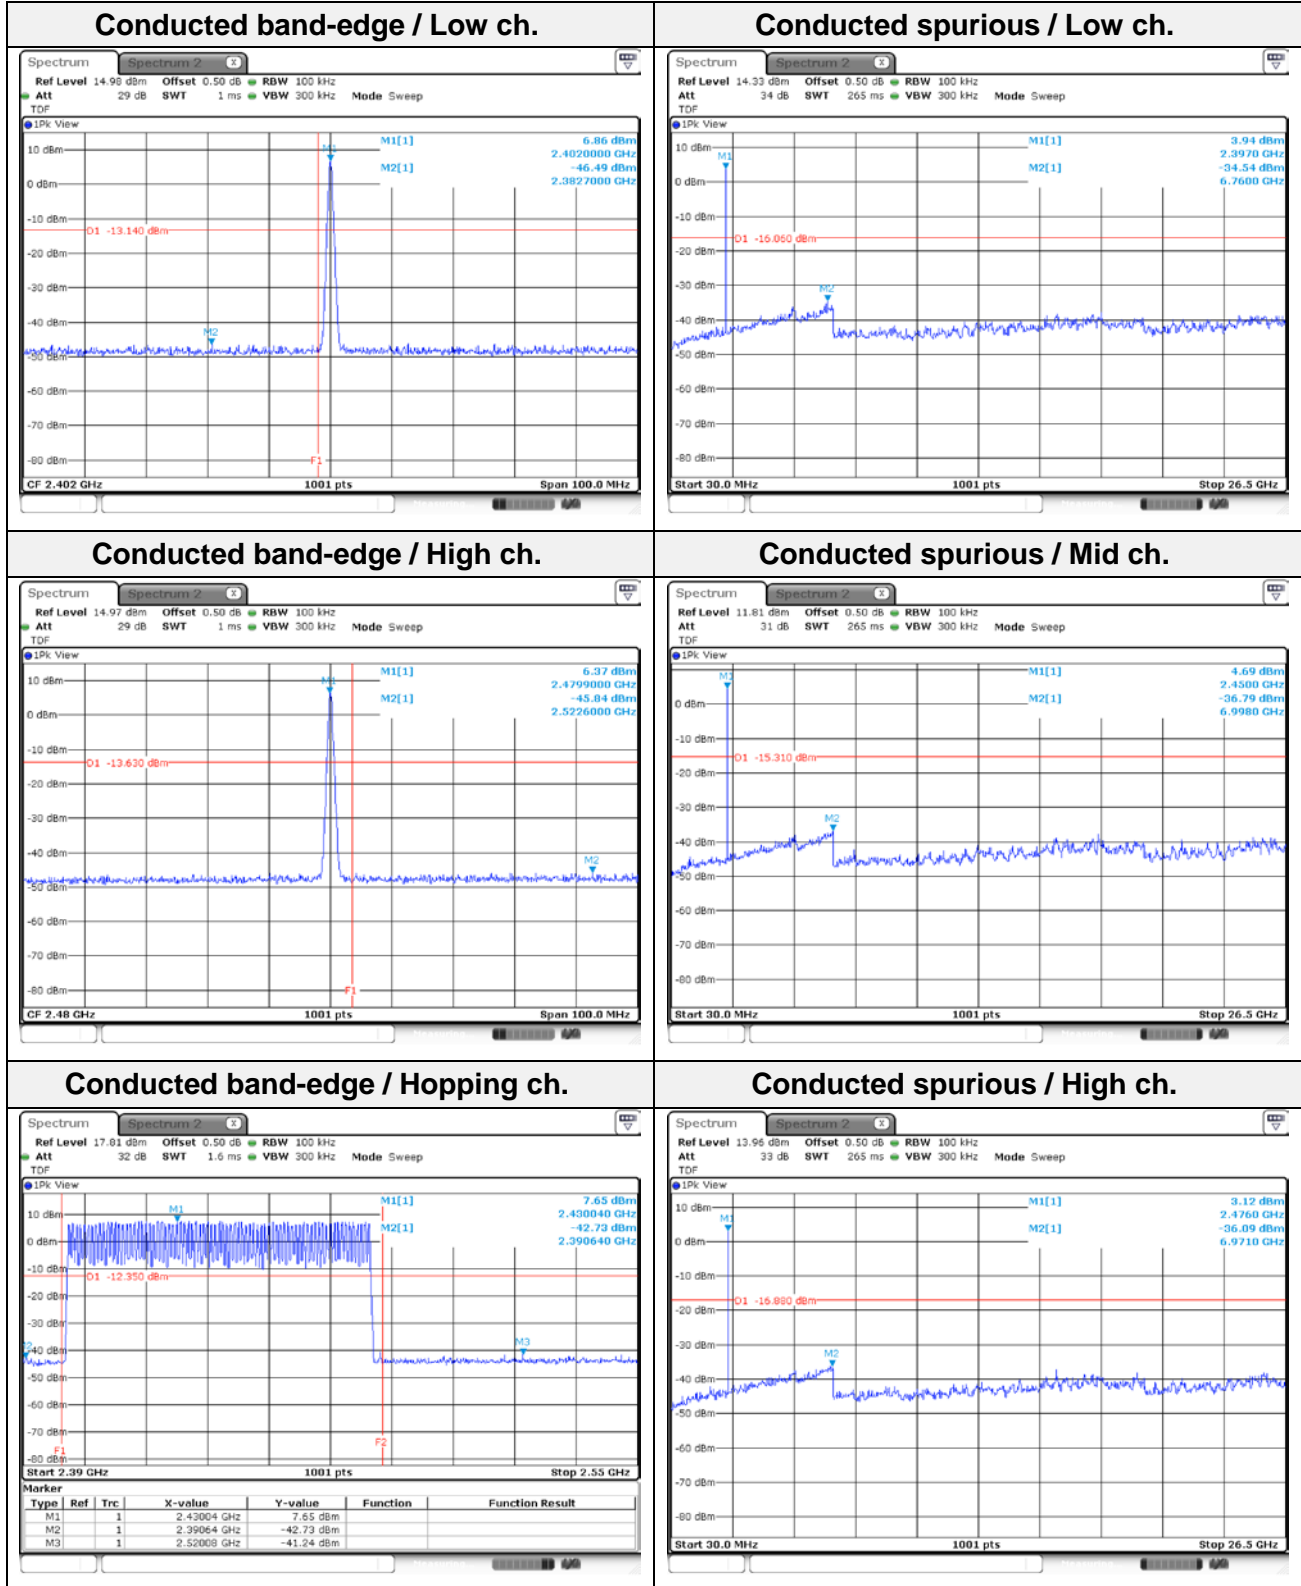

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (66) of (67)




## 8DPSK


### Conducted band-edge / Low ch.

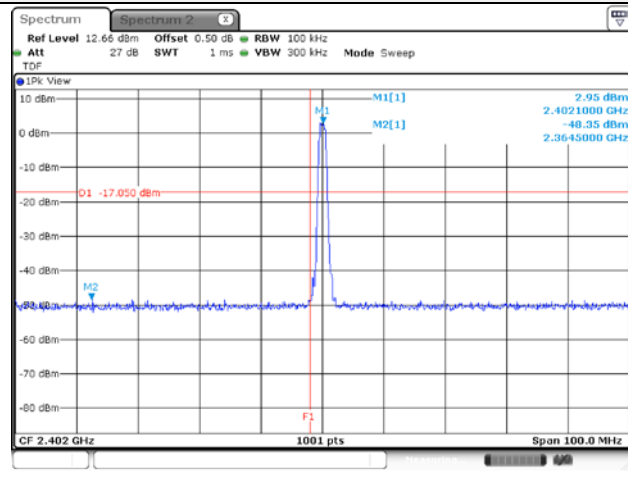


### Conducted spurious / Low ch.

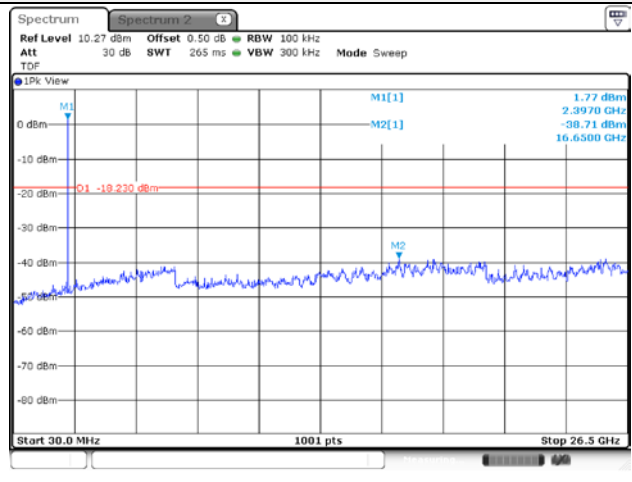


### Conducted band-edge / High ch.

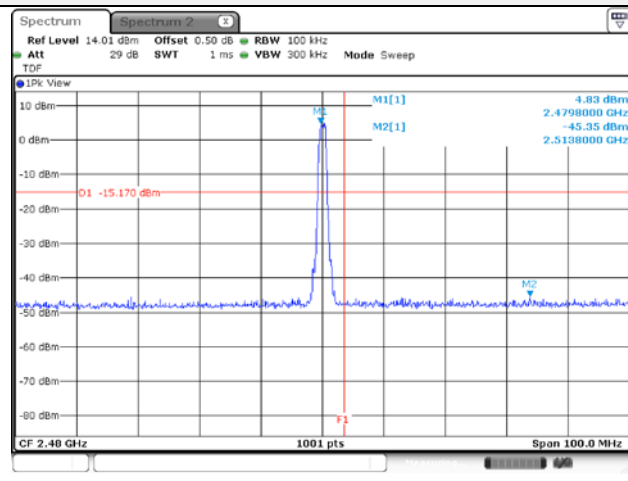


### Conducted spurious / Mid ch.

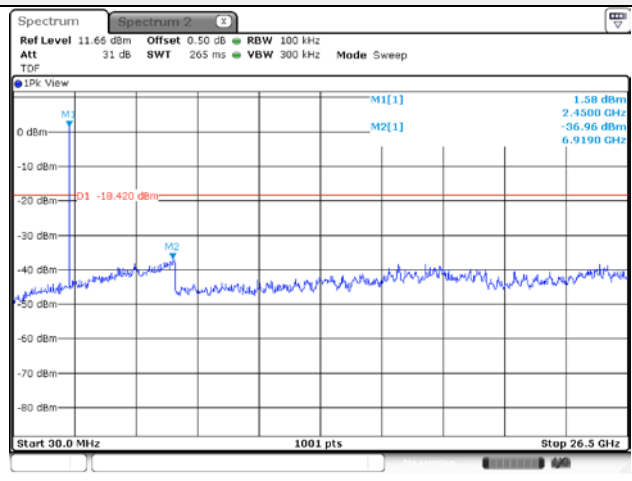

### Conducted band-edge / Hopping ch.

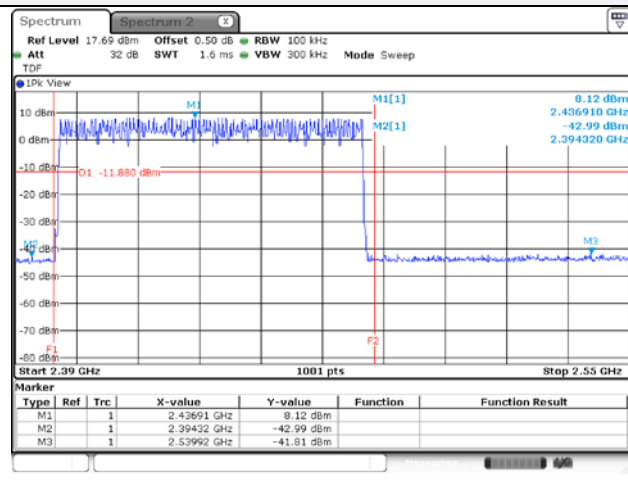

### Conducted spurious / High ch.

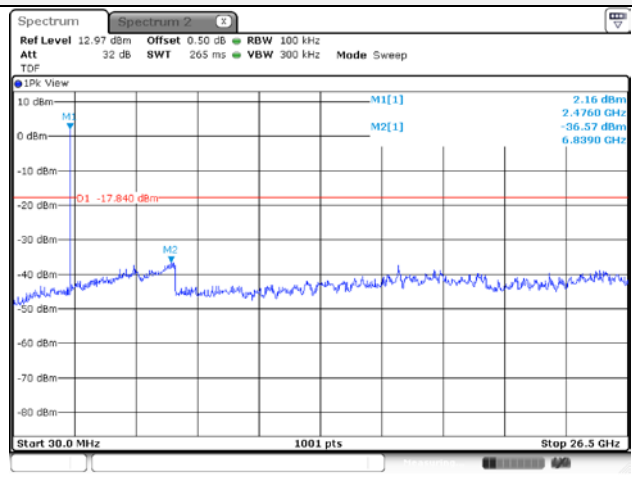

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR21-SRF0076-A  
Page (67) of (67)

**KCTL****8. Measurement equipment**

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	101437	21.07.29
Spectrum Analyzer	R&S	FSV40	100989	21.12.23
Pulse Power Meter	ANRITSU	ML2495A	1608009	21.07.29
EMI TEST RECEIVER	R&S	ESCI7	100732	22.03.05
Bi-Log Antenna	SCHWARZBECK	VULB9168	583	22.04.23
Amplifier	SONOMA INSTRUMENT	310N	284608	21.08.20
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	22.04.23
Horn antenna	ETS.lindgren	3117	155787	21.10.28
Horn antenna	ETS.lindgren	3116	86632	22.01.29
Attenuator	API Inmet	40AH2W-10	12	22.05.11
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	21.07.28
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800-22-10P	2003683	21.08.28
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	22.01.21
LOOP Antenna	R&S	HFH2-Z2	100355	22.08.21
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
Highpass Filter	WT	WT-A1698-HS	WT160411001	22.05.10
TWO-LINE V - NETWORK	R&S	ENV216	101358	21.09.29
EMI TEST RECEIVER	R&S	ESCI	100001	21.08.20
Vector Signal Generator	R&S	SMBV100A	257566	21.07.13
Signal Generator	R&S	SMB100A	176206	22.01.20

**End of test report**