

FCC TEST REPORT

For

DONGGUAN CITY BLUEMAN ELECTRONIC TECHNOLOGY CO., LTD.

Bluetooth Speaker

Model No.: BT-Z1, BT-Z2, BT-Z3, BT-Z4, BT-Z5, BT-Z6, BT-Z7, BT-Z8, BT-Z9

Prepared For : DONGGUAN CITY BLUEMAN ELECTRONIC TECHNOLOGY CO., LTD.
Address : No. 5, ShunXing 5th Road, Dajingtou 2nd Industrial Zone, Dalang Town
Dongguan Guangdong China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0217110068W2
Date of Test : Oct. 11~Nov. 13, 2017
Date of Report : Dec. 11, 2017

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. List of channels.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	9
1.8. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	24
4.1. Test Standard and Limit.....	24
4.2. Test Setup.....	24
4.3. Test Procedure.....	25
4.4. Test Data.....	26
5. Maximum Peak Output Power Test.....	37
5.1. Test Standard and Limit.....	37
5.2. Test Setup.....	37
5.3. Test Procedure.....	37
5.4. Test Data.....	37
6. 6DB Occupy Bandwidth Test.....	40
6.1. Test Standard and Limit.....	40
6.2. Test Setup.....	40
6.3. Test Procedure.....	40
6.4. Test Data.....	40
7. Power Spectral Density Test.....	43
7.1. Test Standard and Limit.....	43
7.2. Test Setup.....	43
7.3. Test Procedure.....	43
7.4. Test Data.....	43
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	46
8.1. Test Standard and Limit.....	46
8.2. Test Setup.....	46
8.3. Test Procedure.....	46
8.4. Test Data.....	46
9. Antenna Requirement.....	50
9.1. Test Standard and Requirement.....	50

9.2. Antenna Connected Construction.....	50
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	51
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	53
APPENDIX III -- INTERNAL PHOTOGRAPH.....	54

Anbotech

TEST REPORT

Applicant : DONGGUAN CITY BLUEMAN ELECTRONIC TECHNOLOGY CO., LTD.
Manufacturer : DONGGUAN CITY BLUEMAN ELECTRONIC TECHNOLOGY CO., LTD.
Product Name : Bluetooth Speaker
Model No. : BT-Z1, BT-Z2, BT-Z3, BT-Z4, BT-Z5, BT-Z6, BT-Z7, BT-Z8, BT-Z9
Trade Mark : **BLUEMAN**
Rating(s) : Input:DC 16V, 3A (with DC 11.1V, 2200 mAh Battery inside)
BX-1603000 (via adapter input:AC 100~240V,50/60Hz, 1.5A; output:16V 3A)
BI65-160300-E2 (via adapter input:AC 100~240V, 50/60Hz, 2A; output:16V 3A)
BSG-60W1603000 (via adapter input:AC 100~240V, 50/60Hz, 1.5A; output:16V 3A)
Test Standard(s) : **FCC Part15 Subpart C 2017, Section 15.247**
Test Method(s) : **ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v04**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 11~Nov. 13, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Tangcy. T.

(Project Manager / Tangcy. T)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	DONGGUAN CITY BLUEMAN ELECTRONIC TECHNOLOGY CO., LTD.
Address	:	No. 5, ShunXing 5th Road, Dajingtou 2nd Industrial Zone, Dalang Town Dongguan Guangdong China
Manufacturer	:	DONGGUAN CITY BLUEMAN ELECTRONIC TECHNOLOGY CO., LTD.
Address	:	No. 5, ShunXing 5th Road, Dajingtou 2nd Industrial Zone, Dalang Town Dongguan Guangdong China

1.2. Description of Device (EUT)

Product Name	:	Bluetooth Speaker	
Model No.	:	BT-Z1, BT-Z2, BT-Z3, BT-Z4, BT-Z5, BT-Z6, BT-Z7, BT-Z8, BT-Z9 (Note: All samples are the same except the model number and colour, so we prepare "BT-Z1" for test only.)	
Trade Mark	:	BLUEMAN	
Test Power Supply	:	AC 120V, 60Hz for adapter/AC 240V, 60Hz for adapter DC 11.1V Battery inside	
Product Description	:	Operation Frequency:	2402MHz-2480MHz
	:	Transfer Rate:	1 Mbits/s
	:	Number of Channel:	40 Channel
	:	Modulation Type:	GFSK
	:	Antenna Type:	PCB Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	BX-1603000: input:AC 100~240V, 50/60Hz, 1.5A; output:16V 3A BI65-160300-E2: input:AC 100~240V, 50/60Hz, 2A; output:16V 3A) BSG-60W1603000: input:AC 100~240V, 50/60Hz, 1.5A; output:16V 3A)
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39
Mode 4	Keeping TX mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH19
Mode 3	CH39

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.



1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.6. Description Of Test Setup

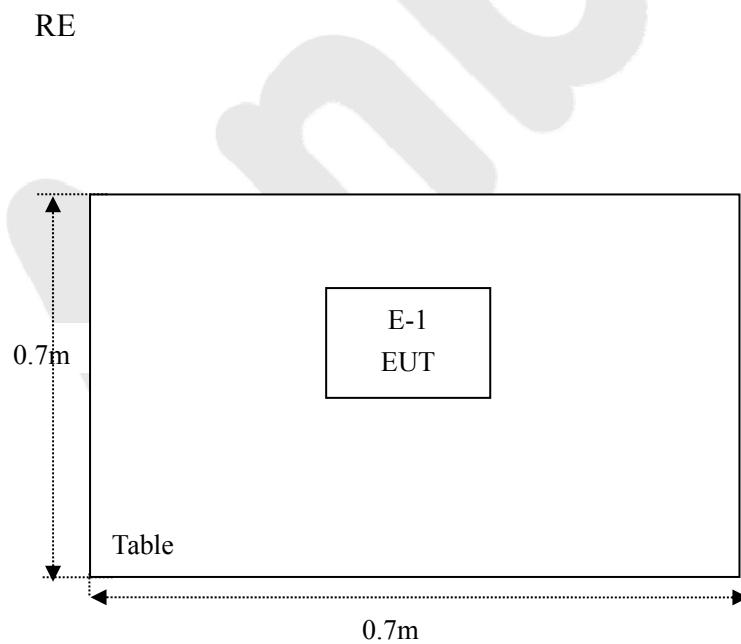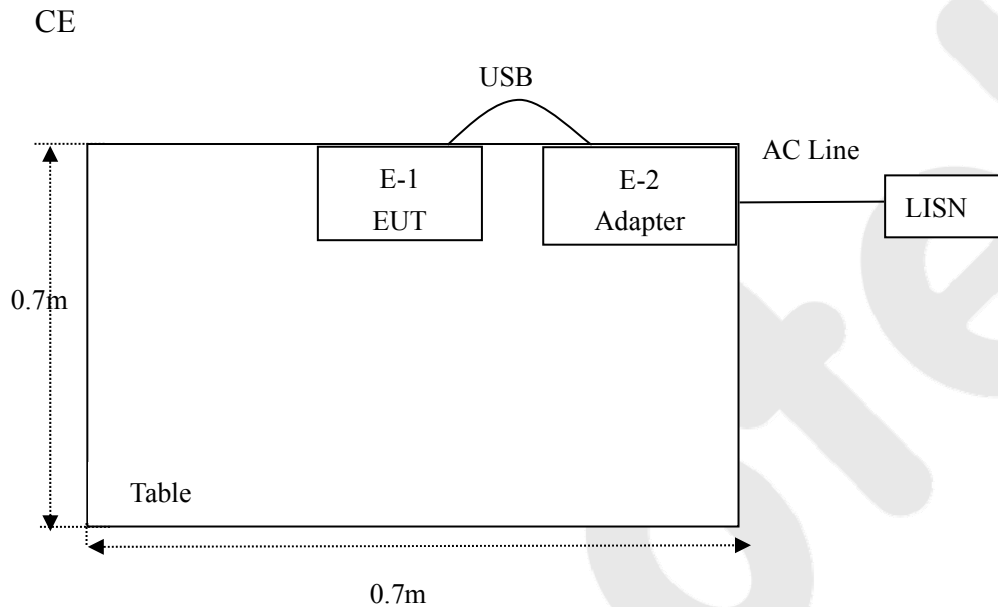

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	May 27, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 27, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 27, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	May 27, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	May 27, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	May 27, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	May 27, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 31, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 31, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Apr. 03, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	May 27, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	May 27, 2017	1 Year
13.	Pre-amplifier	SKET Electronic	BK1G40G50 A	KD25352	May 27, 2017	1 Year
14.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	May 27, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	May 27, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	May 27, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	May 27, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	May 27, 2017	1 Year
20.	DC Power supply	IVYTECH	IV6003	1601D6030007	May 26, 2017	1 Year
21.	TEMP&HUMI PROGRAMMABLE CHAMBER	Sertep	ZJ-HWHS80 B	ZJ-17042804	Mar. 03, 2017	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: “N/A” is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

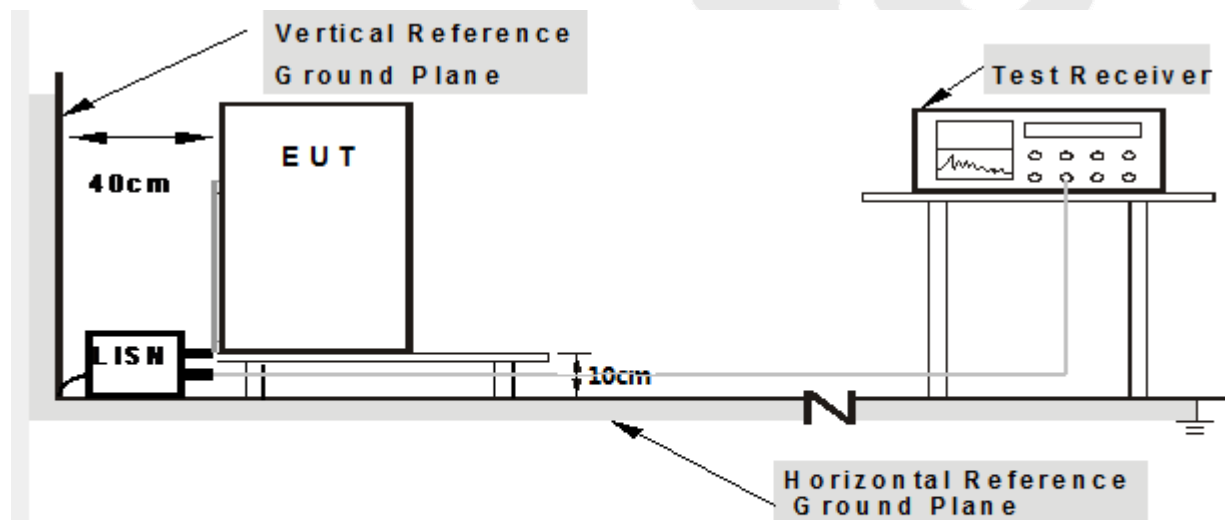

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%
Remark: Its for Model BX-1603000

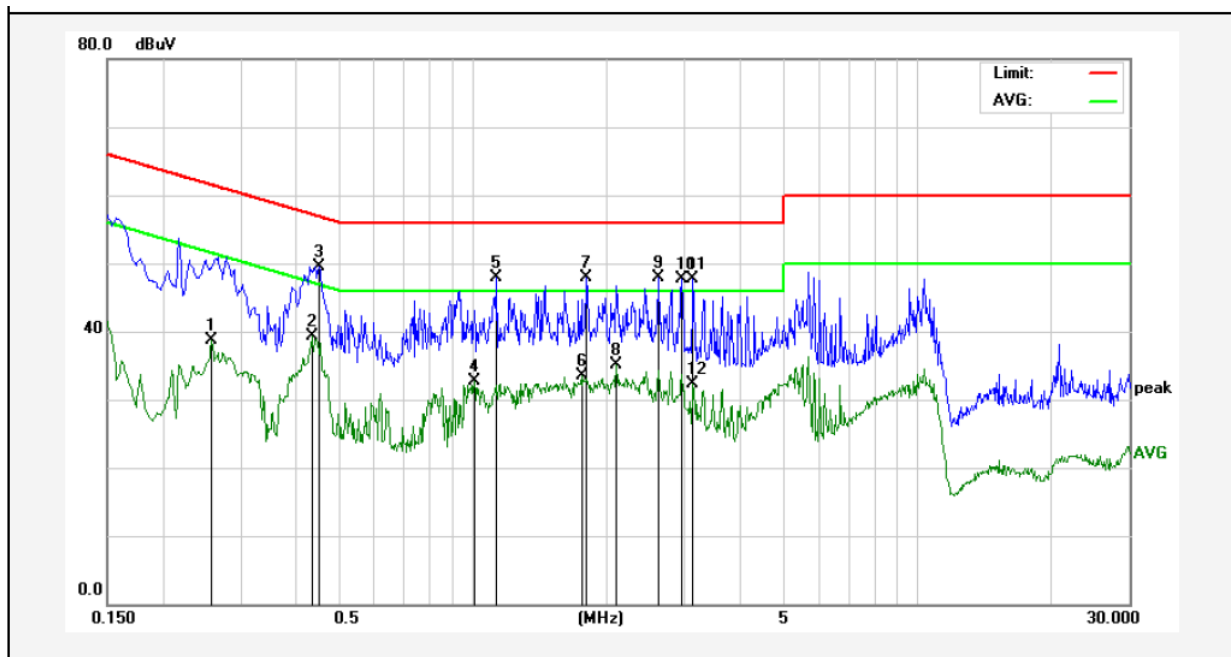

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2580	18.78	19.89	38.67	51.49	-12.82	AVG	
2	0.4339	19.44	19.95	39.39	47.18	-7.79	AVG	
3	0.4500	29.55	19.96	49.51	56.87	-7.36	QP	
4	1.0060	12.60	20.12	32.72	46.00	-13.28	AVG	
5	1.1298	27.88	20.12	48.00	56.00	-8.00	QP	
6	1.7580	13.32	20.14	33.46	46.00	-12.54	AVG	
7	1.7980	27.77	20.14	47.91	56.00	-8.09	QP	
8	2.1018	14.92	20.14	35.06	46.00	-10.94	AVG	
9	2.6179	27.74	20.15	47.89	56.00	-8.11	QP	
10	2.9539	27.46	20.16	47.62	56.00	-8.38	QP	
11	3.1259	27.53	20.16	47.69	56.00	-8.31	QP	
12	3.1259	12.19	20.16	32.35	46.00	-13.65	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.:25°C Hum.:50%

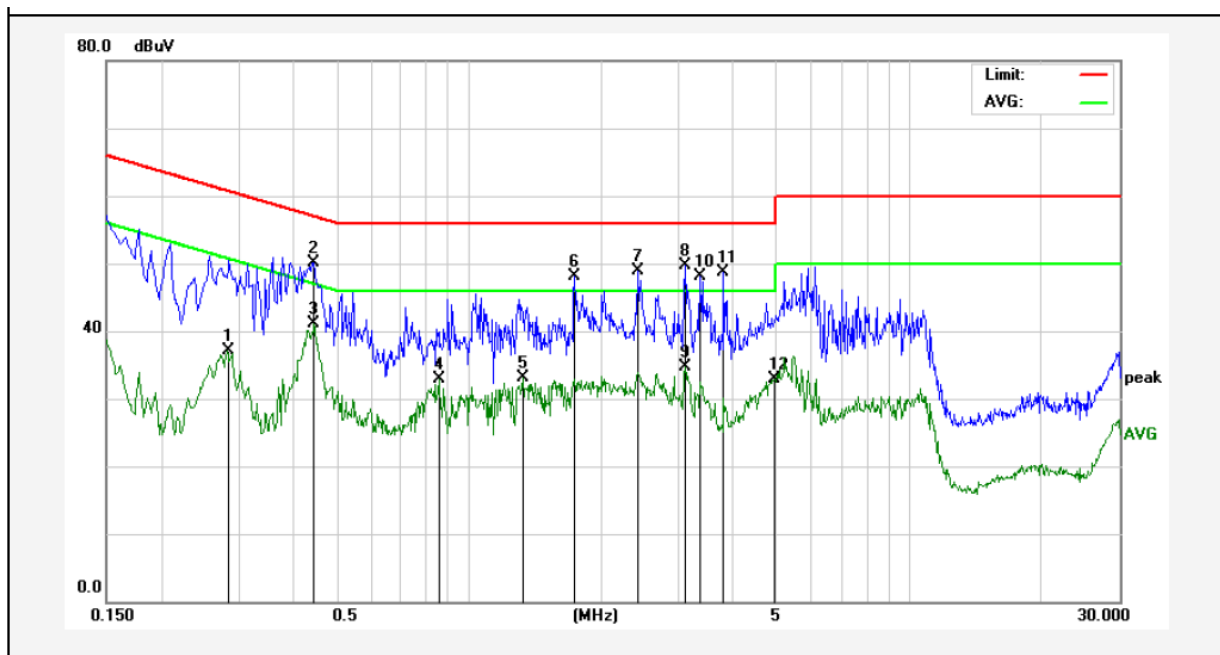

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2819	17.28	19.89	37.17	50.76	-13.59	AVG	
2	0.4460	30.23	19.96	50.19	56.95	-6.76	QP	
3	0.4460	21.20	19.96	41.16	46.95	-5.79	AVG	
4	0.8539	12.73	20.08	32.81	46.00	-13.19	AVG	
5	1.3260	12.95	20.13	33.08	46.00	-12.92	AVG	
6	1.7379	27.93	20.13	48.06	56.00	-7.94	QP	
7	2.4219	28.71	20.15	48.86	56.00	-7.14	QP	
8	3.1018	29.47	20.16	49.63	56.00	-6.37	QP	
9	3.1018	14.46	20.16	34.62	46.00	-11.38	AVG	
10	3.3540	27.97	20.17	48.14	56.00	-7.86	QP	
11	3.7860	28.57	20.18	48.75	56.00	-7.25	QP	
12	4.9298	12.72	20.20	32.92	46.00	-13.08	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%

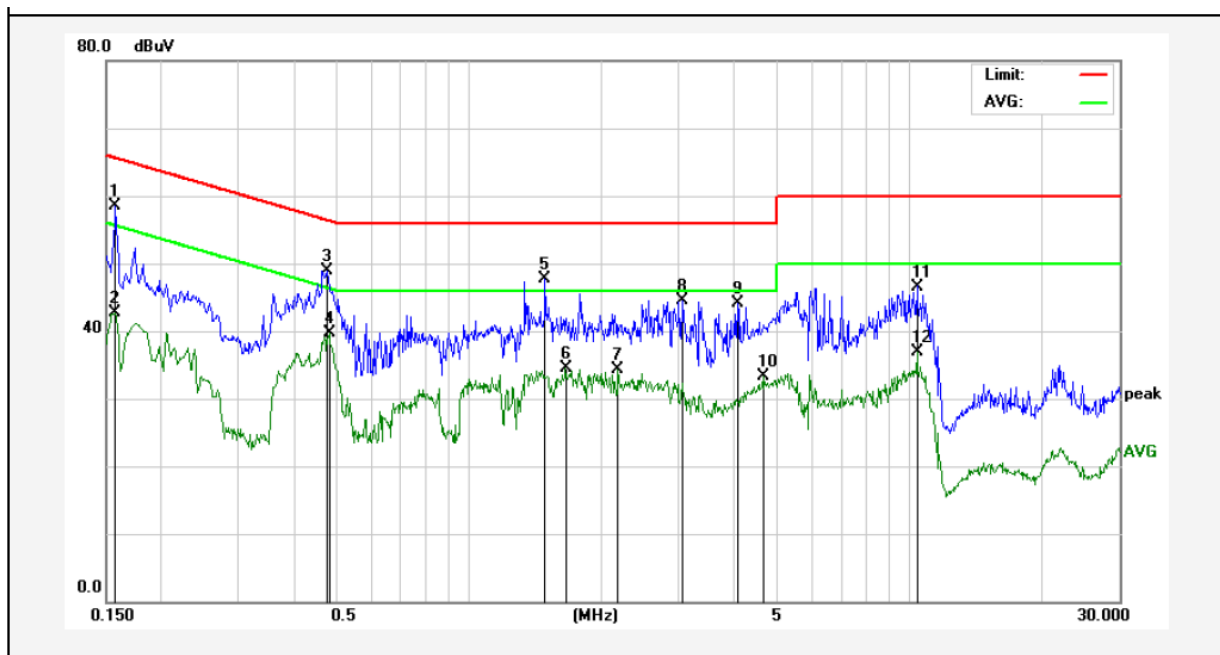

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	38.63	19.90	58.53	65.56	-7.03	QP	
2	0.1580	22.72	19.90	42.62	55.56	-12.94	AVG	
3	0.4778	29.00	19.97	48.97	56.38	-7.41	QP	
4	0.4818	19.74	19.97	39.71	46.31	-6.60	AVG	
5	1.4939	27.54	20.13	47.67	56.00	-8.33	QP	
6	1.6538	14.43	20.13	34.56	46.00	-11.44	AVG	
7	2.1859	14.15	20.14	34.29	46.00	-11.71	AVG	
8	3.0619	24.35	20.16	44.51	56.00	-11.49	QP	
9	4.0777	23.97	20.18	44.15	56.00	-11.85	QP	
10	4.6539	13.06	20.20	33.26	46.00	-12.74	AVG	
11	10.4298	26.27	20.33	46.60	60.00	-13.40	QP	
12	10.4298	16.58	20.33	36.91	50.00	-13.09	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.:25°C Hum.:50%

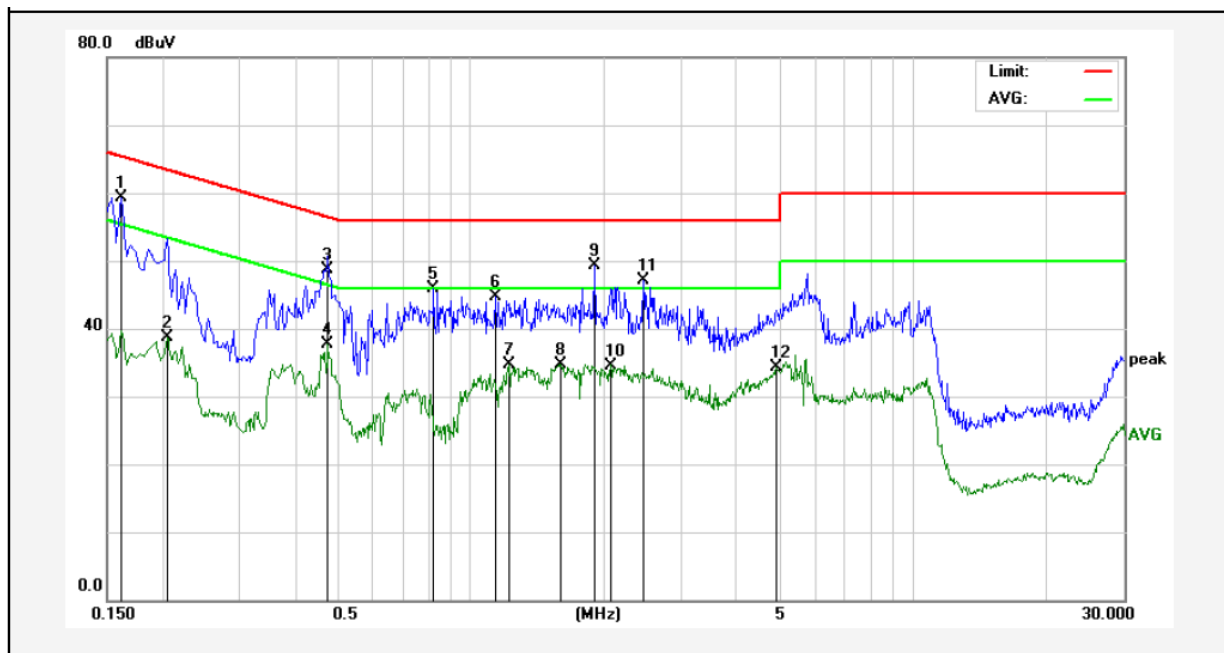

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1620	39.42	19.90	59.32	65.36	-6.04	QP	
2	0.2059	18.74	19.90	38.64	53.37	-14.73	AVG	
3	0.4739	28.65	19.97	48.62	56.45	-7.83	QP	
4	0.4739	17.79	19.97	37.76	46.45	-8.69	AVG	
5	0.8219	25.76	20.07	45.83	56.00	-10.17	QP	
6	1.1379	24.59	20.12	44.71	56.00	-11.29	QP	
7	1.2179	14.68	20.12	34.80	46.00	-11.20	AVG	
8	1.5980	14.61	20.13	34.74	46.00	-11.26	AVG	
9	1.9019	29.14	20.14	49.28	56.00	-6.72	QP	
10	2.0698	14.46	20.14	34.60	46.00	-11.40	AVG	
11	2.4500	26.93	20.15	47.08	56.00	-8.92	QP	
12	4.9138	14.15	20.20	34.35	46.00	-11.65	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%
Remark: Its for Model BI65-160300-E2

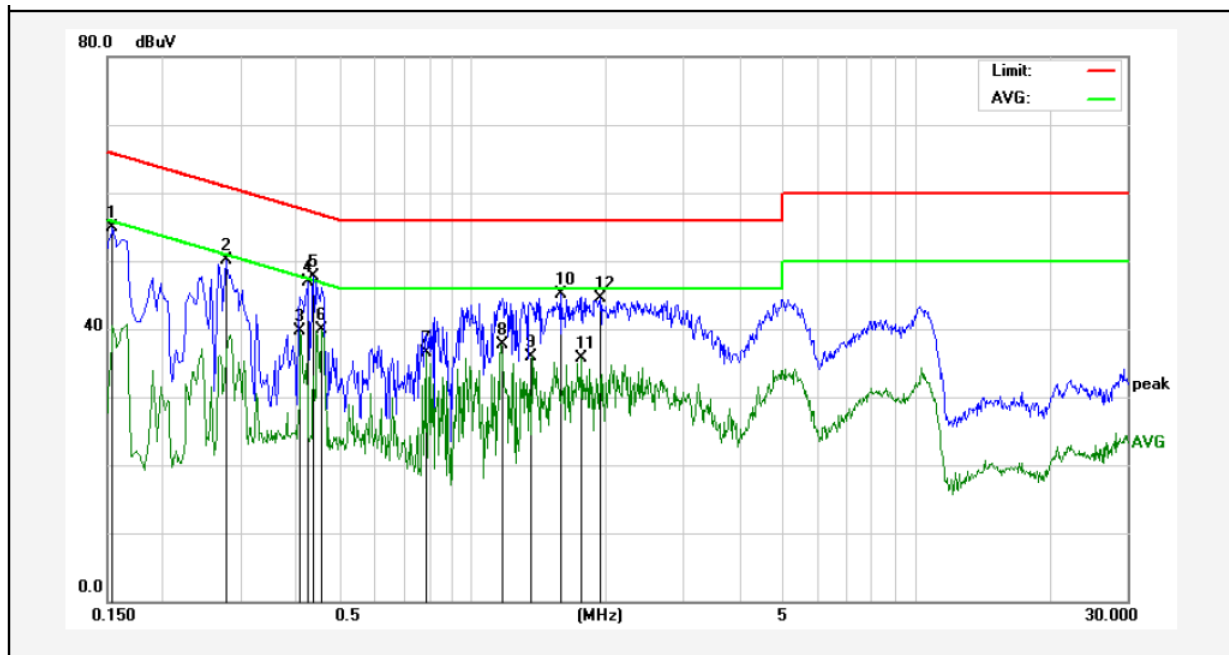

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	35.07	19.90	54.97	65.78	-10.81	QP	
2	0.2779	30.17	19.89	50.06	60.88	-10.82	QP	
3	0.4098	19.73	19.94	39.67	47.65	-7.98	AVG	
4	0.4259	26.87	19.95	46.82	57.33	-10.51	QP	
5	0.4380	27.81	19.95	47.76	57.10	-9.34	QP	
6	0.4580	19.86	19.96	39.82	46.73	-6.91	AVG	
7	0.7860	16.51	20.06	36.57	46.00	-9.43	AVG	
8	1.1618	17.60	20.12	37.72	46.00	-8.28	AVG	
9	1.3619	15.83	20.13	35.96	46.00	-10.04	AVG	
10	1.5859	24.99	20.13	45.12	56.00	-10.88	QP	
11	1.7700	15.64	20.14	35.78	46.00	-10.22	AVG	
12	1.9458	24.43	20.14	44.57	56.00	-11.43	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

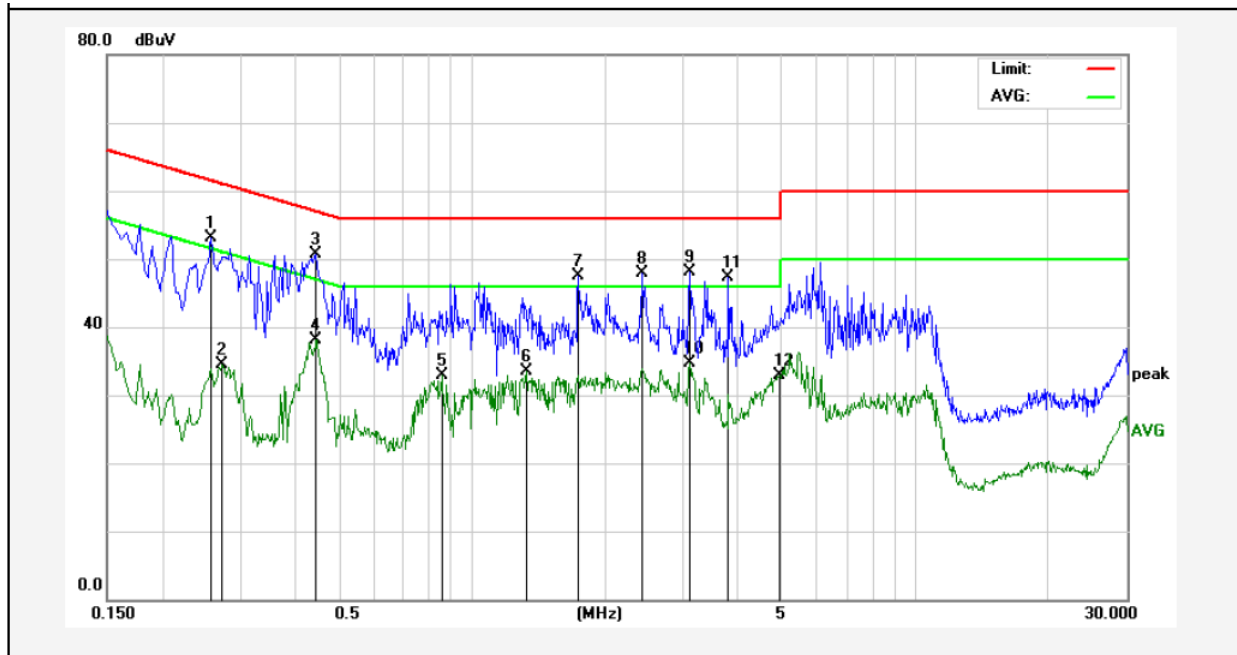

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2580	33.14	19.89	53.03	61.49	-8.46	QP	
2	0.2740	14.61	19.89	34.50	50.99	-16.49	AVG	
3	0.4460	30.73	19.96	50.69	56.95	-6.26	QP	
4	0.4460	18.20	19.96	38.16	46.95	-8.79	AVG	
5	0.8539	12.73	20.08	32.81	46.00	-13.19	AVG	
6	1.3260	13.45	20.13	33.58	46.00	-12.42	AVG	
7	1.7379	27.43	20.13	47.56	56.00	-8.44	QP	
8	2.4219	27.71	20.15	47.86	56.00	-8.14	QP	
9	3.1018	27.97	20.16	48.13	56.00	-7.87	QP	
10	3.1018	14.46	20.16	34.62	46.00	-11.38	AVG	
11	3.7860	27.07	20.18	47.25	56.00	-8.75	QP	
12	4.9298	12.72	20.20	32.92	46.00	-13.08	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.:25°C Hum.:50%

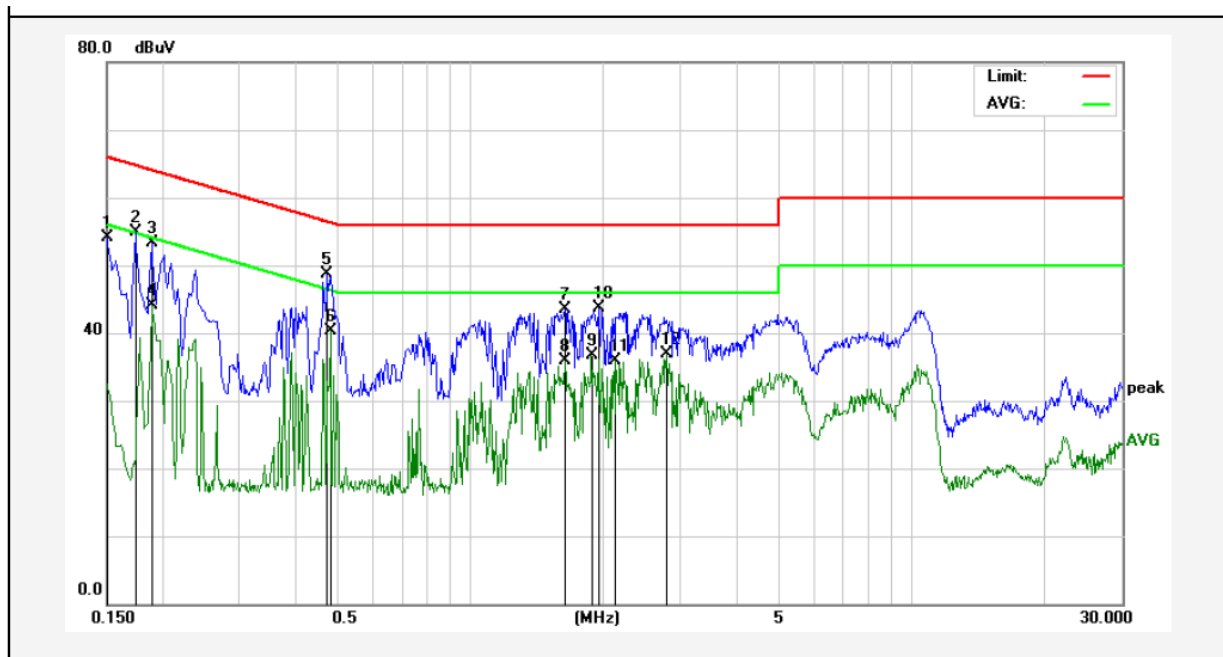

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	34.26	19.90	54.16	66.00	-11.84	QP	
2	0.1739	35.08	19.90	54.98	64.77	-9.79	QP	
3	0.1900	33.43	19.90	53.33	64.03	-10.70	QP	
4	0.1900	24.18	19.90	44.08	54.03	-9.95	AVG	
5	0.4739	28.69	19.97	48.66	56.45	-7.79	QP	
6	0.4819	20.30	19.97	40.27	46.31	-6.04	AVG	
7	1.6419	23.34	20.13	43.47	56.00	-12.53	QP	
8	1.6419	15.75	20.13	35.88	46.00	-10.12	AVG	
9	1.8779	16.64	20.14	36.78	46.00	-9.22	AVG	
10	1.9579	23.55	20.14	43.69	56.00	-12.31	QP	
11	2.1419	15.68	20.14	35.82	46.00	-10.18	AVG	
12	2.7940	16.67	20.16	36.83	46.00	-9.17	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

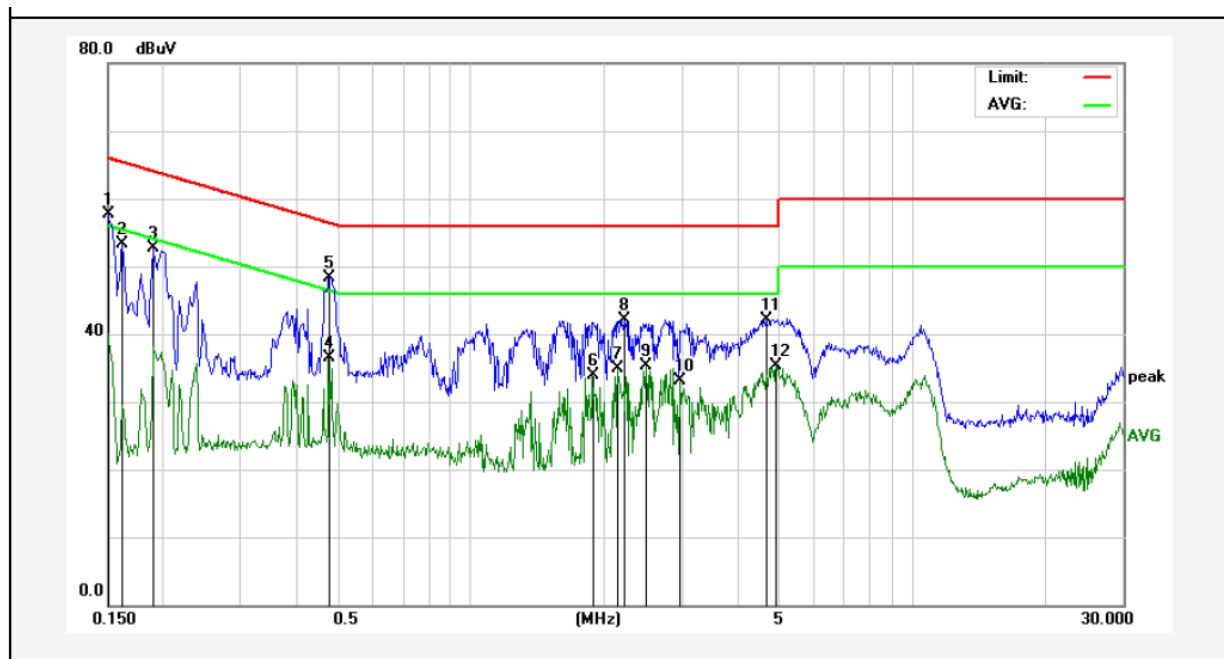

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	37.79	19.90	57.69	66.00	-8.31	QP	
2	0.1620	33.31	19.90	53.21	65.36	-12.15	QP	
3	0.1900	32.86	19.90	52.76	64.03	-11.27	QP	
4	0.4738	16.46	19.97	36.43	46.45	-10.02	AVG	
5	0.4779	28.37	19.97	48.34	56.38	-8.04	QP	
6	1.8858	13.72	20.14	33.86	46.00	-12.14	AVG	
7	2.1499	14.77	20.14	34.91	46.00	-11.09	AVG	
8	2.2259	21.90	20.14	42.04	56.00	-13.96	QP	
9	2.4900	15.20	20.15	35.35	46.00	-10.65	AVG	
10	2.9660	12.94	20.16	33.10	46.00	-12.90	AVG	
11	4.6539	21.93	20.20	42.13	56.00	-13.87	QP	
12	4.9019	15.14	20.20	35.34	46.00	-10.66	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.:25℃ Hum.:50%
Remark: Its for Model BSG-60W1603000

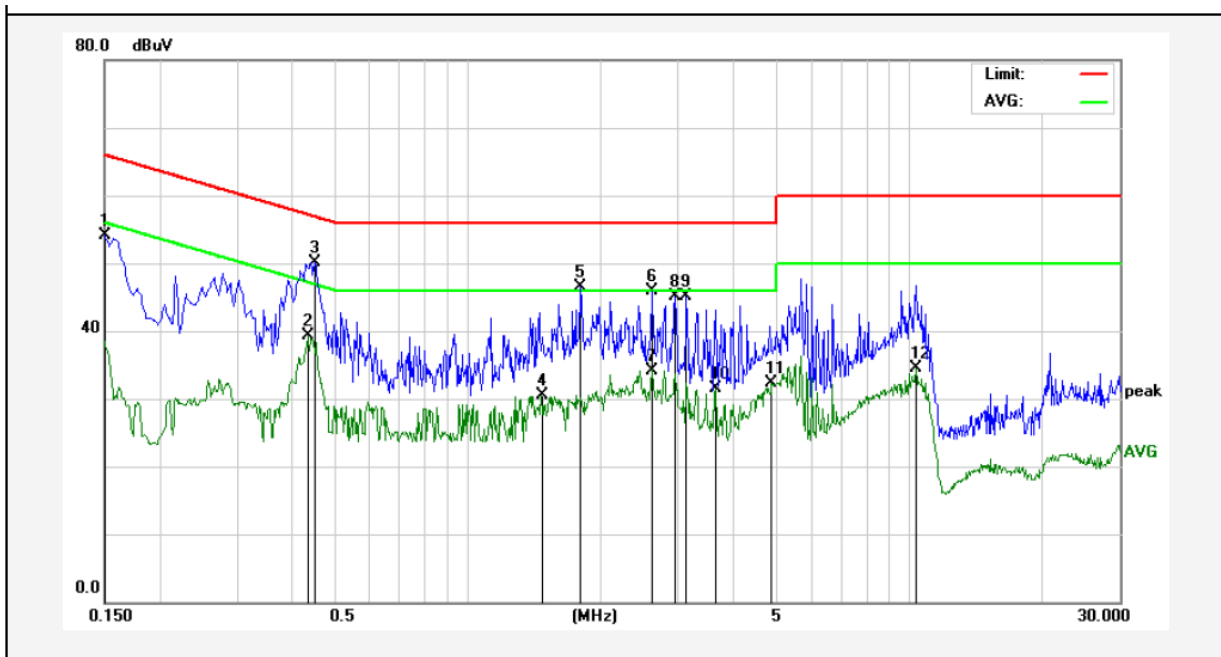

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	34.22	19.90	54.12	66.00	-11.88	QP	
2	0.4339	19.44	19.95	39.39	47.18	-7.79	AVG	
3	0.4500	30.05	19.96	50.01	56.87	-6.86	QP	
4	1.4699	10.41	20.13	30.54	46.00	-15.46	AVG	
5	1.7980	26.27	20.14	46.41	56.00	-9.59	QP	
6	2.6179	25.74	20.15	45.89	56.00	-10.11	QP	
7	2.6179	14.05	20.15	34.20	46.00	-11.80	AVG	
8	2.9539	24.96	20.16	45.12	56.00	-10.88	QP	
9	3.1259	25.03	20.16	45.19	56.00	-10.81	QP	
10	3.6419	11.42	20.17	31.59	46.00	-14.41	AVG	
11	4.8897	12.14	20.20	32.34	46.00	-13.66	AVG	
12	10.3459	14.14	20.33	34.47	50.00	-15.53	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

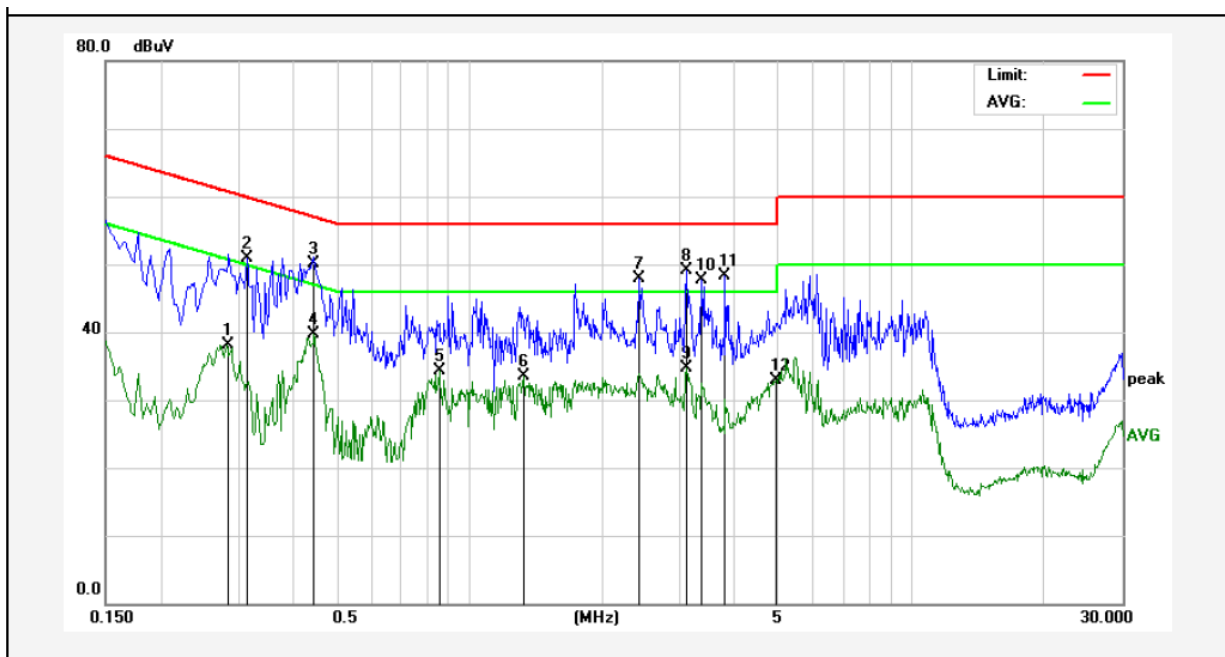

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.2819	18.28	19.89	38.17	50.76	-12.59	AVG	
2	0.3140	31.10	19.90	51.00	59.86	-8.86	QP	
3	0.4460	30.23	19.96	50.19	56.95	-6.76	QP	
4	0.4460	19.70	19.96	39.66	46.95	-7.29	AVG	
5	0.8539	14.23	20.08	34.31	46.00	-11.69	AVG	
6	1.3260	13.45	20.13	33.58	46.00	-12.42	AVG	
7	2.4219	27.71	20.15	47.86	56.00	-8.14	QP	
8	3.1018	28.97	20.16	49.13	56.00	-6.87	QP	
9	3.1018	14.46	20.16	34.62	46.00	-11.38	AVG	
10	3.3540	27.47	20.17	47.64	56.00	-8.36	QP	
11	3.7860	28.07	20.18	48.25	56.00	-7.75	QP	
12	4.9298	12.72	20.20	32.92	46.00	-13.08	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.:25°C Hum.:50%

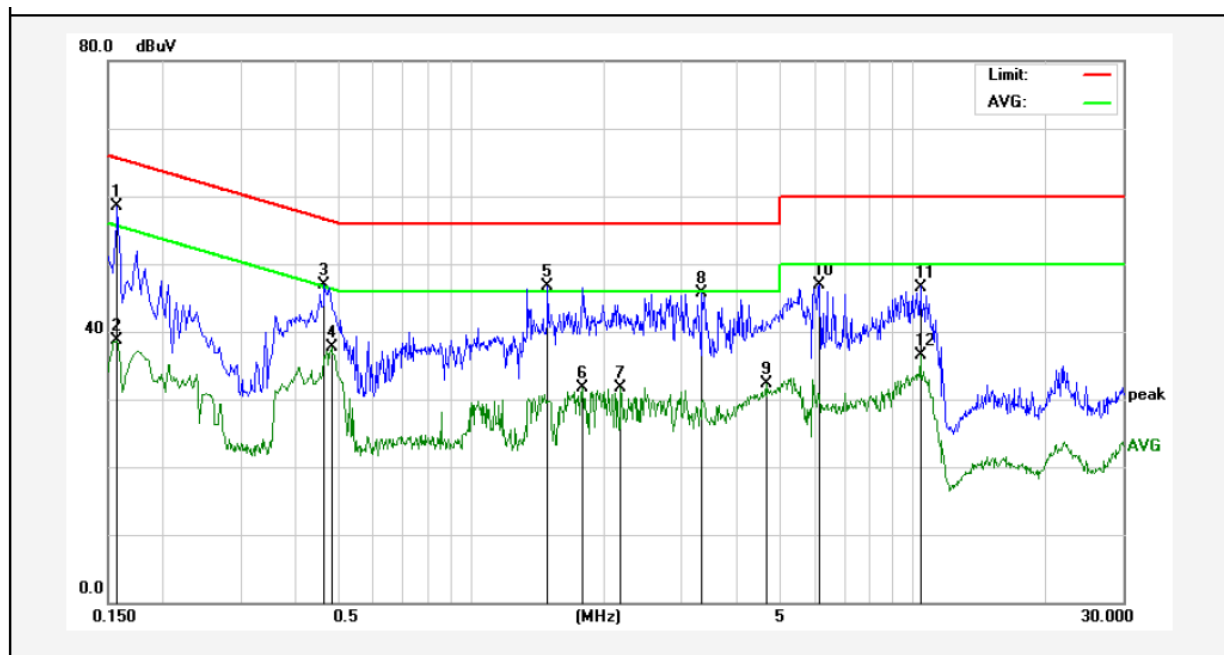

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1580	38.63	19.90	58.53	65.56	-7.03	QP	
2	0.1580	18.72	19.90	38.62	55.56	-16.94	AVG	
3	0.4660	26.92	19.96	46.88	56.58	-9.70	QP	
4	0.4818	17.74	19.97	37.71	46.31	-8.60	AVG	
5	1.4939	26.54	20.13	46.67	56.00	-9.33	QP	
6	1.7860	11.65	20.14	31.79	46.00	-14.21	AVG	
7	2.1859	11.65	20.14	31.79	46.00	-14.21	AVG	
8	3.3420	25.59	20.17	45.76	56.00	-10.24	QP	
9	4.6539	12.06	20.20	32.26	46.00	-13.74	AVG	
10	6.1619	26.66	20.24	46.90	60.00	-13.10	QP	
11	10.4298	26.27	20.33	46.60	60.00	-13.40	QP	
12	10.4298	16.08	20.33	36.41	50.00	-13.59	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Keeping TX mode
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.:25℃ Hum.:50%

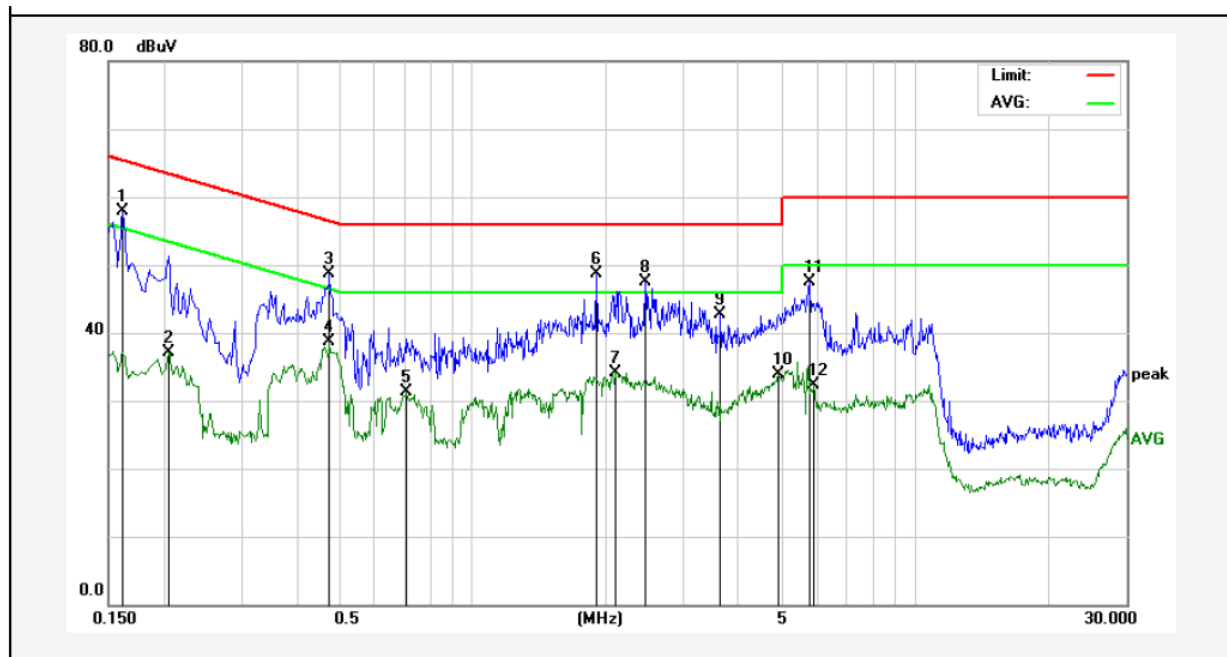

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1620	37.92	19.90	57.82	65.36	-7.54	QP	
2	0.2059	17.24	19.90	37.14	53.37	-16.23	AVG	
3	0.4739	28.65	19.97	48.62	56.45	-7.83	QP	
4	0.4739	18.79	19.97	38.76	46.45	-7.69	AVG	
5	0.7099	11.33	20.04	31.37	46.00	-14.63	AVG	
6	1.9019	28.64	20.14	48.78	56.00	-7.22	QP	
7	2.1099	14.02	20.14	34.16	46.00	-11.84	AVG	
8	2.4500	27.43	20.15	47.58	56.00	-8.42	QP	
9	3.6379	22.55	20.17	42.72	56.00	-13.28	QP	
10	4.9138	13.65	20.20	33.85	46.00	-12.15	AVG	
11	5.7738	27.29	20.23	47.52	60.00	-12.48	QP	
12	5.9179	12.08	20.23	32.31	50.00	-17.69	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

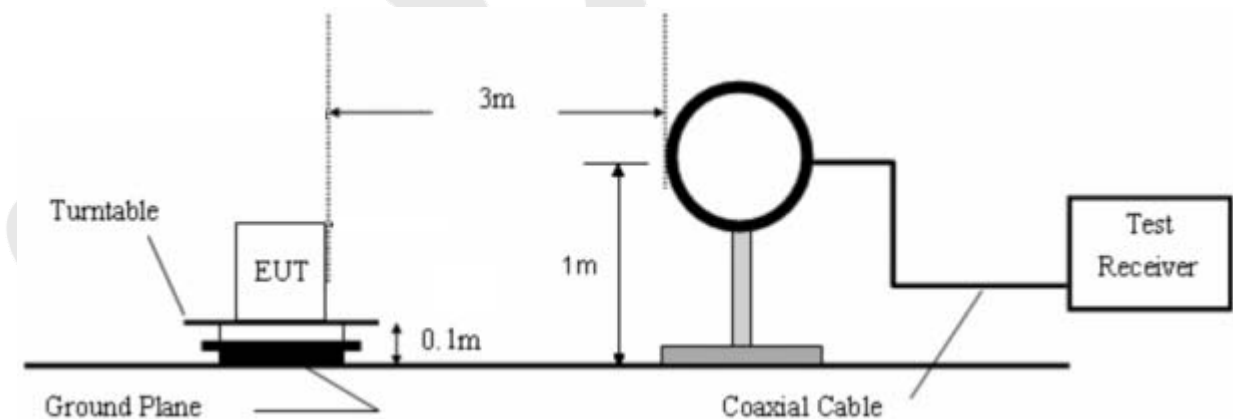


Figure 1. Below 30MHz

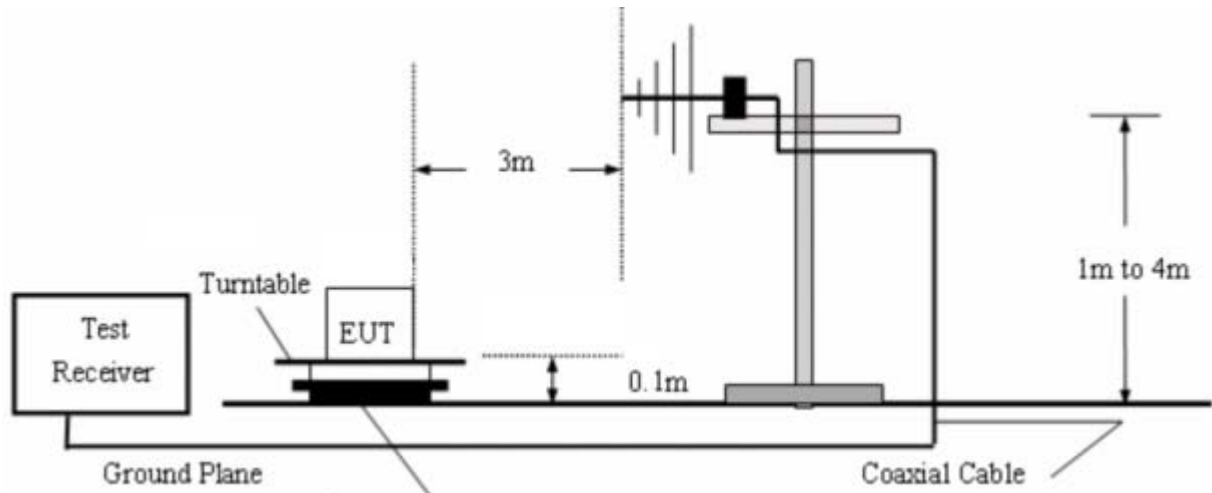


Figure 2. 30MHz to 1GHz

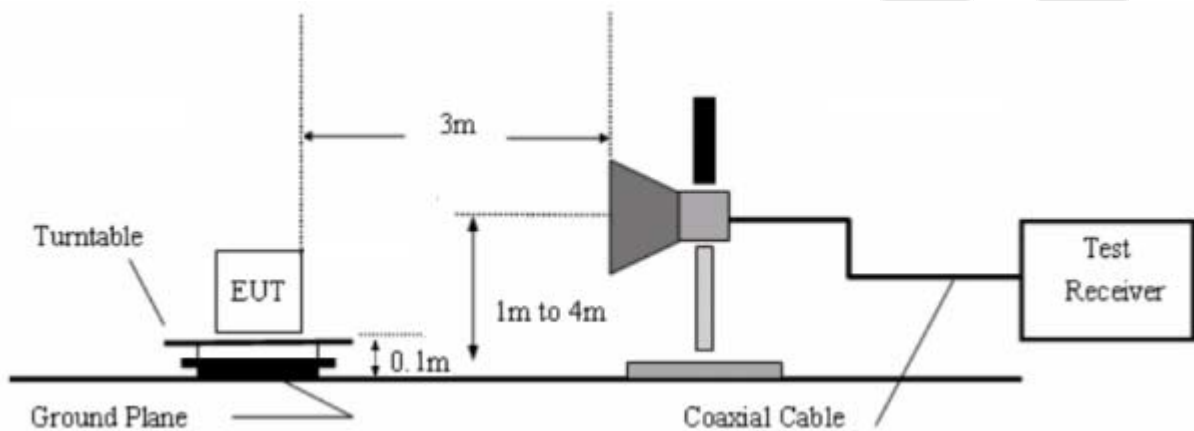


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz,Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz,Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: R0217110068W2 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 11.1V Battery inside
Test Mode: TX Mode Polarization: Horizontal
Remark: Its for Model BX-1603000

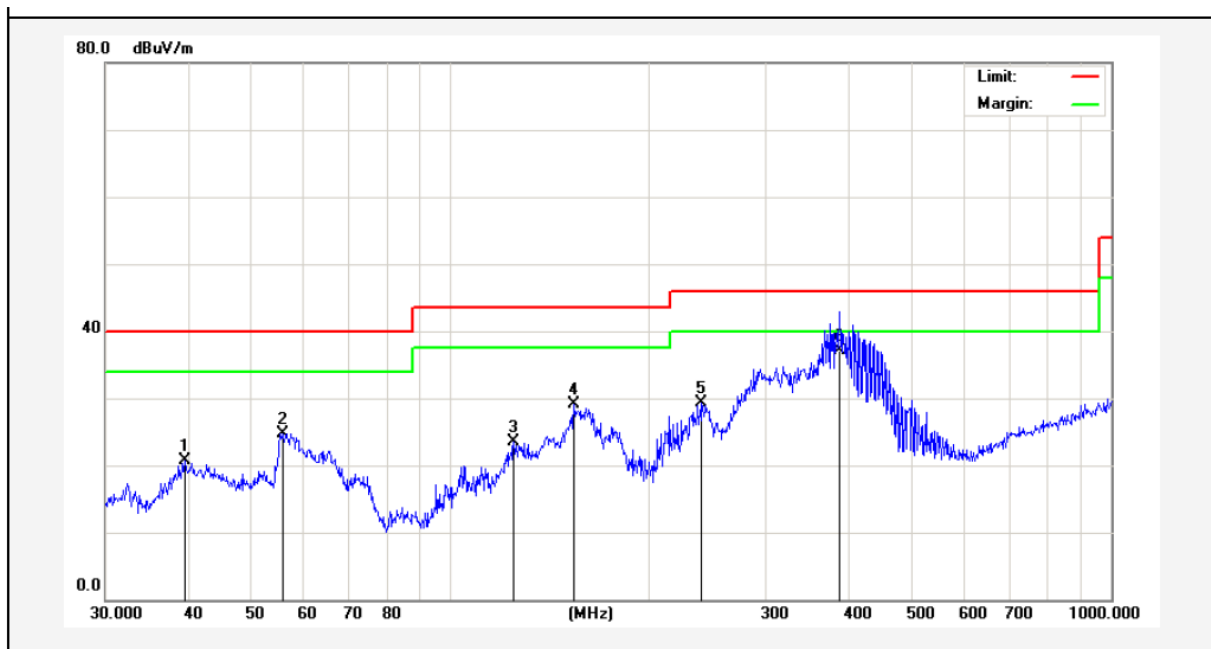

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.5757	35.30	-14.53	20.77	40.00	-19.23	QP	300	16	
2	55.8047	39.78	-15.00	24.78	40.00	-15.22	QP	300	66	
3	124.5690	45.44	-22.01	23.43	43.50	-20.07	QP	300	145	
4	153.7385	52.30	-23.17	29.13	43.50	-14.37	QP	300	214	
5	239.9874	47.43	-18.09	29.34	46.00	-16.66	QP	300	225	
6	387.9920	50.27	-13.11	37.16	46.00	-8.84	QP	300	279	

Test Results (30~1000MHz)


Job No.: R0217110068W2 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 11.1V Battery inside
Test Mode: TX Mode Polarization: Vertical

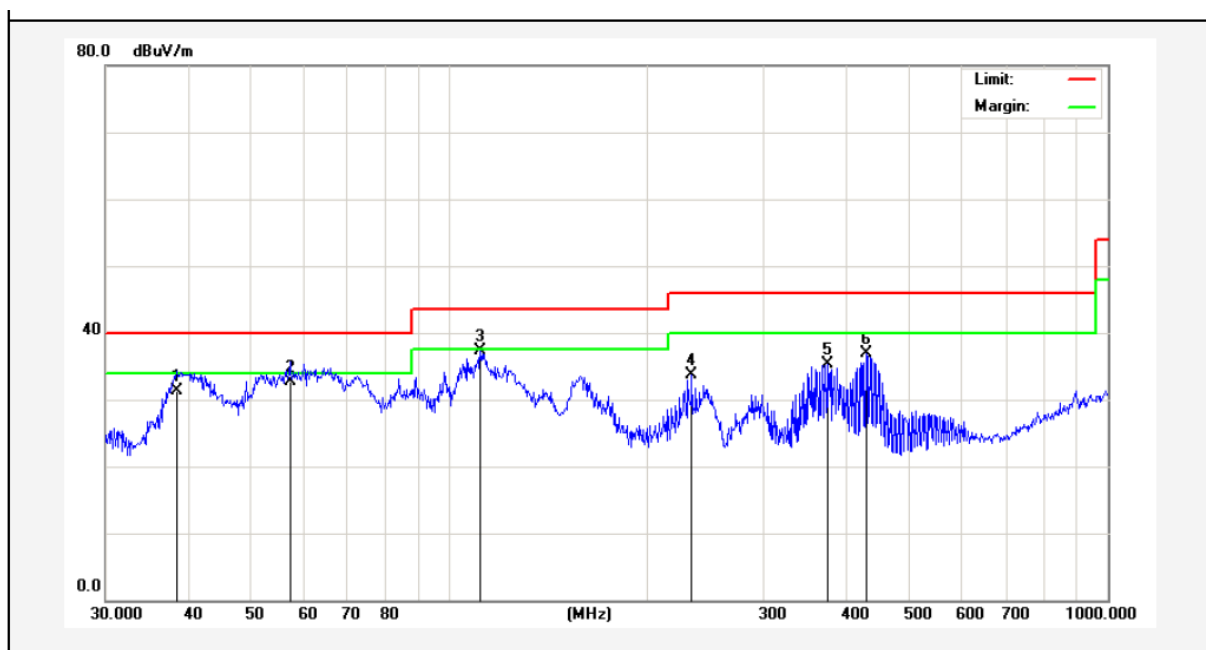

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.4809	46.21	-14.95	31.26	40.00	-8.74	QP	300	13	
2	57.1914	47.77	-15.13	32.64	40.00	-7.36	QP	300	77	
3	111.3468	53.03	-15.72	37.31	43.50	-6.19	QP	300	145	
4	233.3487	48.17	-14.43	33.74	46.00	-12.26	QP	300	197	
5	374.6225	47.64	-12.38	35.26	46.00	-10.74	QP	300	214	
6	429.5228	48.06	-11.24	36.82	46.00	-9.18	QP	300	255	


Test Results (30~1000MHz)

Job No.: R0217110068W2 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 11.1V Battery inside
Test Mode: TX Mode Polarization: Horizontal
Remark: Its for Model BI65-160300-E2

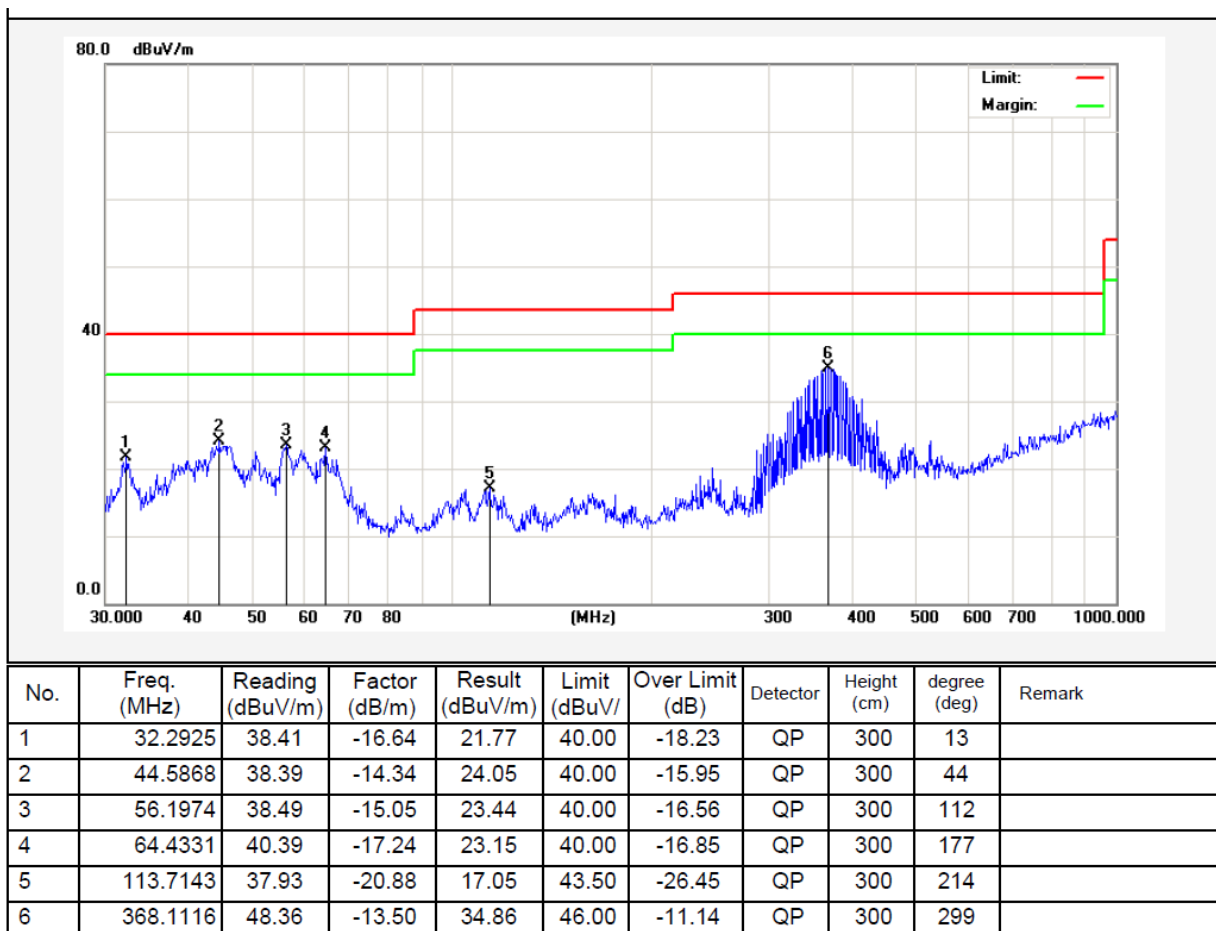


Test Results (30~1000MHz)

Job No.: R0217110068W2 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 11.1V Battery inside
Test Mode: TX Mode Polarization: Vertical

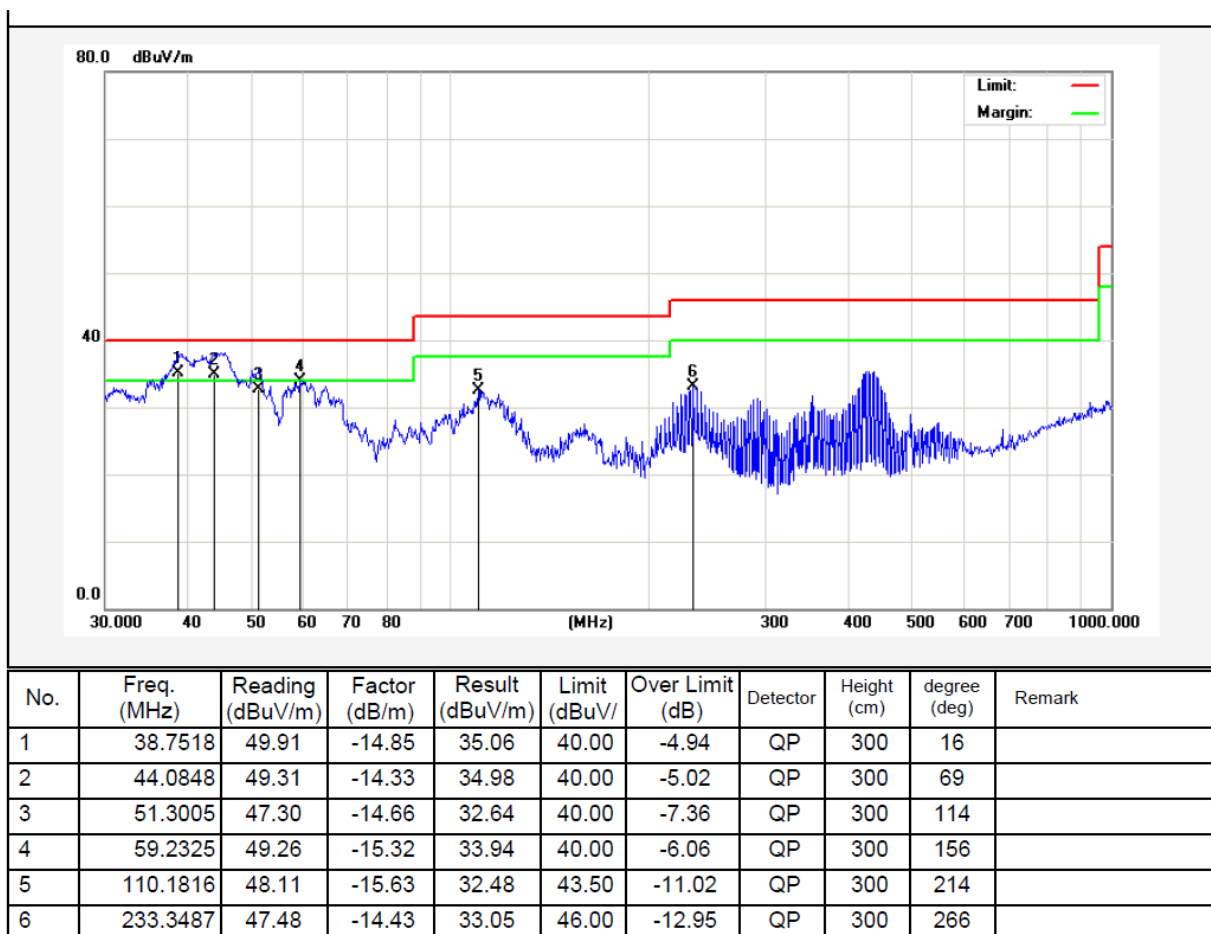

Test Results (30~1000MHz)


Job No.: R0217110068W2 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 11.1V Battery inside
Test Mode: TX Mode Polarization: Horizontal
Remark: Its for Model BSG-60W1603000

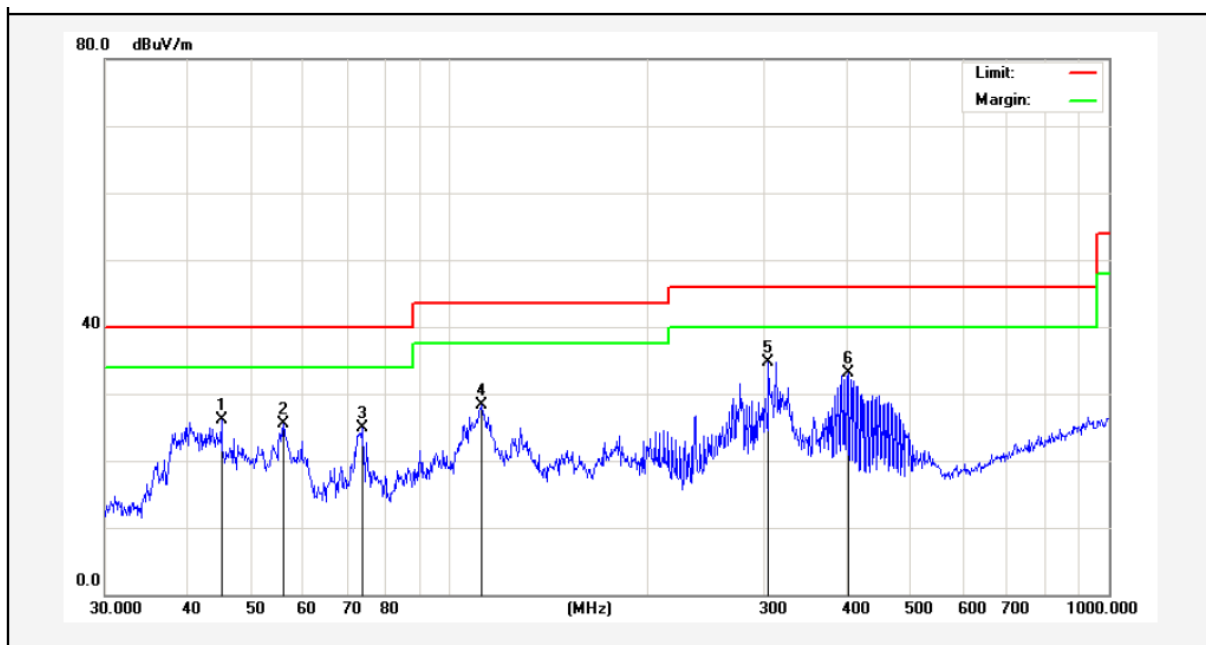

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.0583	43.73	-17.57	26.16	40.00	-13.84	QP	300	16	
2	56.0007	43.54	-18.07	25.47	40.00	-14.53	QP	300	96	
3	73.6170	47.62	-22.75	24.87	40.00	-15.13	QP	300	145	
4	111.7377	51.64	-23.34	28.30	43.50	-15.20	QP	300	169	
5	304.6099	55.43	-20.65	34.78	46.00	-11.22	QP	300	210	
6	403.2500	49.11	-16.08	33.03	46.00	-12.97	QP	300	276	

Test Results (30~1000MHz)

Job No.: R0217110068W2 Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: DC 11.1V Battery inside
Test Mode: TX Mode Polarization: Vertical

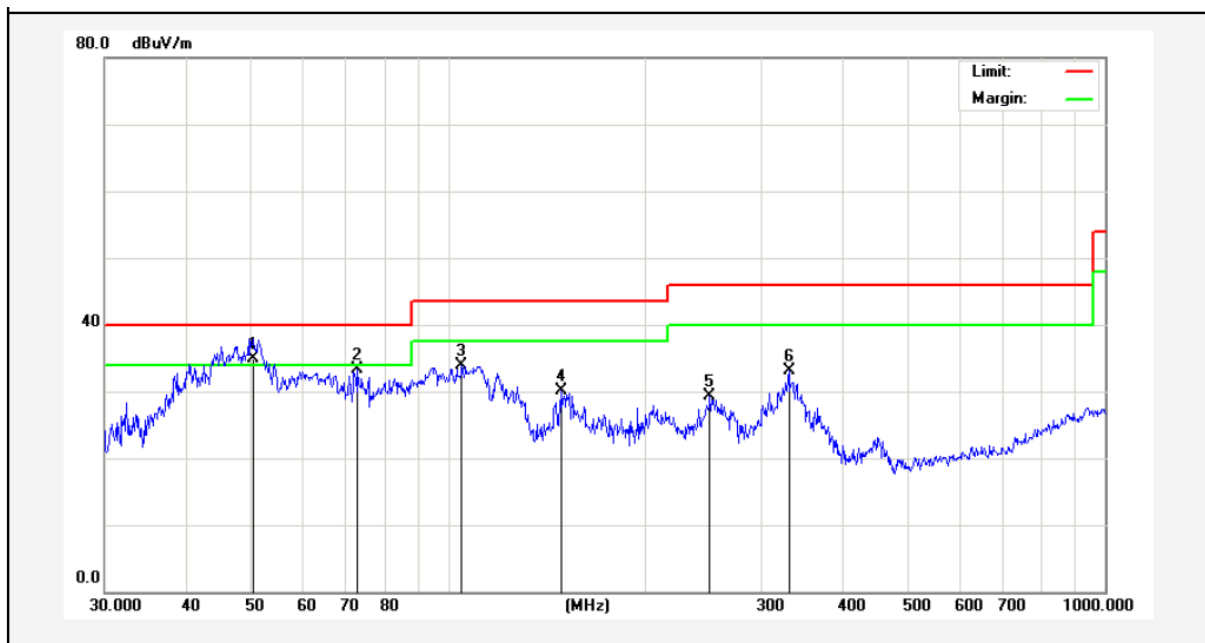

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	50.5859	51.76	-16.81	34.95	40.00	-5.05	QP	300	16	
2	72.8465	54.93	-21.64	33.29	40.00	-6.71	QP	300	79	
3	104.9033	50.50	-16.62	33.88	43.50	-9.62	QP	300	112	
4	148.9625	50.74	-20.70	30.04	43.50	-13.46	QP	300	164	
5	250.3009	46.10	-16.88	29.22	46.00	-16.78	QP	300	197	
6	330.1949	50.31	-17.28	33.03	46.00	-12.97	QP	300	214	

Test Results (1GHz-25GHz)

Test Mode: TX Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	37.87	34.04	6.58	34.09	44.40	74.00	-29.60	V
7206.00	32.21	37.11	7.73	34.50	42.55	74.00	-31.45	V
9608.00	31.80	39.31	9.23	34.79	45.55	74.00	-28.45	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	42.28	34.04	6.58	34.09	48.81	74.00	-25.19	H
7206.00	34.01	37.11	7.73	34.50	44.35	74.00	-29.65	H
9608.00	31.28	39.31	9.23	34.79	45.03	74.00	-28.97	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	26.58	34.04	6.58	34.09	33.11	54.00	-20.89	V
7206.00	20.83	37.11	7.73	34.50	31.17	54.00	-22.83	V
9608.00	19.87	39.31	9.23	34.79	33.62	54.00	-20.38	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	30.87	34.04	6.58	34.09	37.40	54.00	-16.60	H
7206.00	23.04	37.11	7.73	34.50	33.38	54.00	-20.62	H
9608.00	19.65	39.31	9.23	34.79	33.40	54.00	-20.60	H
12010.00	*					54.00		H
14412.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: TX Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	36.49	34.38	6.69	34.09	43.47	74.00	-30.53	V
7320.00	31.29	37.22	7.78	34.53	41.76	74.00	-32.24	V
9760.00	30.99	39.46	9.35	34.80	45.00	74.00	-29.00	V
12200.00	*					74.00		V
14640.00	*					74.00		V
4880.00	40.61	34.38	6.69	34.09	47.59	74.00	-26.41	H
7320.00	32.98	37.22	7.78	34.53	43.45	74.00	-30.55	H
9760.00	30.34	39.46	9.35	34.80	44.35	74.00	-29.65	H
12200.00	*					74.00		H
14640.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	25.47	34.38	6.69	34.09	32.45	54.00	-21.55	V
7320.00	20.08	37.22	7.78	34.53	30.55	54.00	-23.45	V
9760.00	19.20	39.46	9.35	34.80	33.21	54.00	-20.79	V
12200.00	*					54.00		V
14640.00	*					54.00		V
4880.00	29.61	34.38	6.69	34.09	36.59	54.00	-17.41	H
7320.00	22.20	37.22	7.78	34.53	32.67	54.00	-21.33	H
9760.00	18.87	39.46	9.35	34.80	32.88	54.00	-21.12	H
12200.00	*					54.00		H
14640.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: TX Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	36.09	34.72	6.79	34.09	43.51	74.00	-30.49	V
7440.00	31.02	37.34	7.82	34.57	41.61	74.00	-32.39	V
9920.00	30.75	39.62	9.46	34.81	45.02	74.00	-28.98	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	40.12	34.72	6.79	34.09	47.54	74.00	-26.46	H
7440.00	32.67	37.34	7.82	34.57	43.26	74.00	-30.74	H
9920.00	30.06	39.62	9.46	34.81	44.33	74.00	-29.67	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.18	34.72	6.79	34.09	32.60	54.00	-21.40	V
7440.00	19.88	37.34	7.82	34.57	30.47	54.00	-23.53	V
9920.00	19.03	39.62	9.46	34.81	33.30	54.00	-20.70	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	29.28	34.72	6.79	34.09	36.70	54.00	-17.30	H
7440.00	21.98	37.34	7.82	34.57	32.57	54.00	-21.43	H
9920.00	18.66	39.62	9.46	34.81	32.93	54.00	-21.07	H
12400.00	*					54.00		H
14880.00	*					54.00		H

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

Test Mode: GFSK					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	46.17	29.15	3.41	34.01	44.72	74.00	-29.28	H
2400.00	63.43	29.16	3.43	34.01	62.01	74.00	-11.99	H
2390.00	47.04	29.15	3.41	34.01	45.59	74.00	-28.41	V
2400.00	65.82	29.16	3.43	34.01	64.40	74.00	-9.60	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	35.98	29.15	3.41	34.01	34.53	54.00	-19.47	H
2400.00	47.41	29.16	3.43	34.01	45.99	54.00	-8.01	H
2390.00	36.16	29.15	3.41	34.01	34.71	54.00	-19.29	V
2400.00	44.37	29.16	3.43	34.01	42.95	54.00	-11.05	V

Test Mode: GFSK					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	48.67	29.28	3.53	34.03	47.45	74.00	-26.55	H
2500.00	47.21	29.30	3.56	34.03	46.04	74.00	-27.96	H
2483.50	50.06	29.28	3.53	34.03	48.84	74.00	-25.16	V
2500.00	48.53	29.30	3.56	34.03	47.36	74.00	-26.64	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.85	29.28	3.53	34.03	37.63	54.00	-16.37	H
2500.00	36.38	29.30	3.56	34.03	35.21	54.00	-18.79	H
2483.50	40.33	29.28	3.53	34.03	39.11	54.00	-14.89	V
2500.00	36.57	29.30	3.56	34.03	35.40	54.00	-18.60	V

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.


1. Set the RBW $\geq$ DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data


Test Item : Max. peak output power
Test Voltage : DC 11.1V Battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24°C
Humidity : 55%RH


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
2402	-1.367	30	PASS
2440	-0.530	30	PASS
2480	-1.506	30	PASS

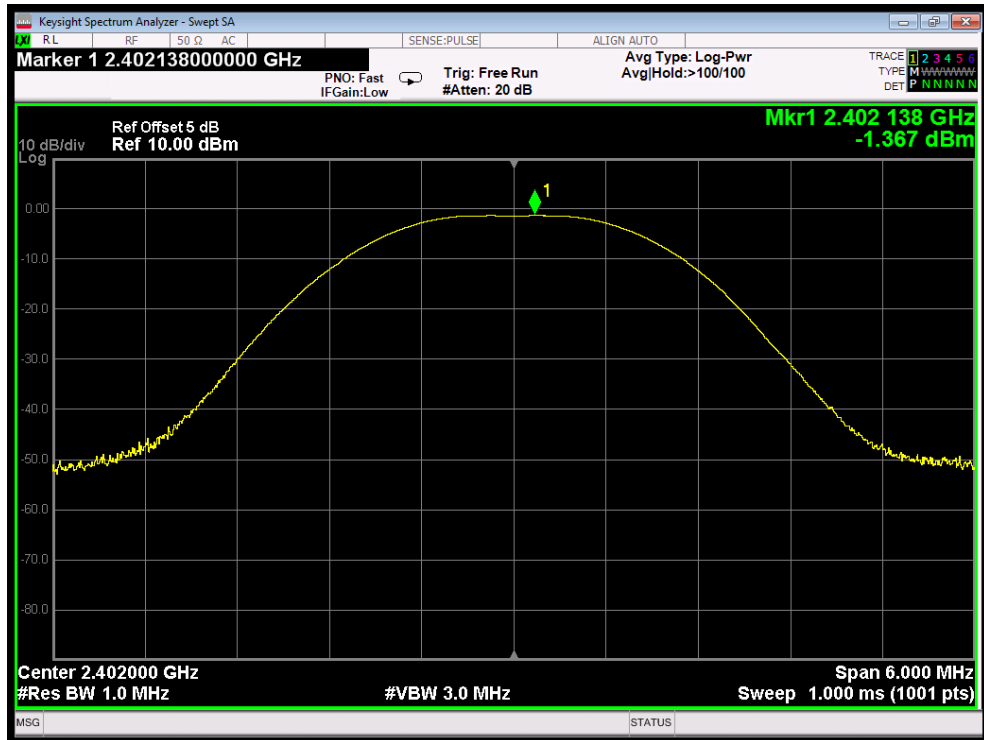

CH: Low

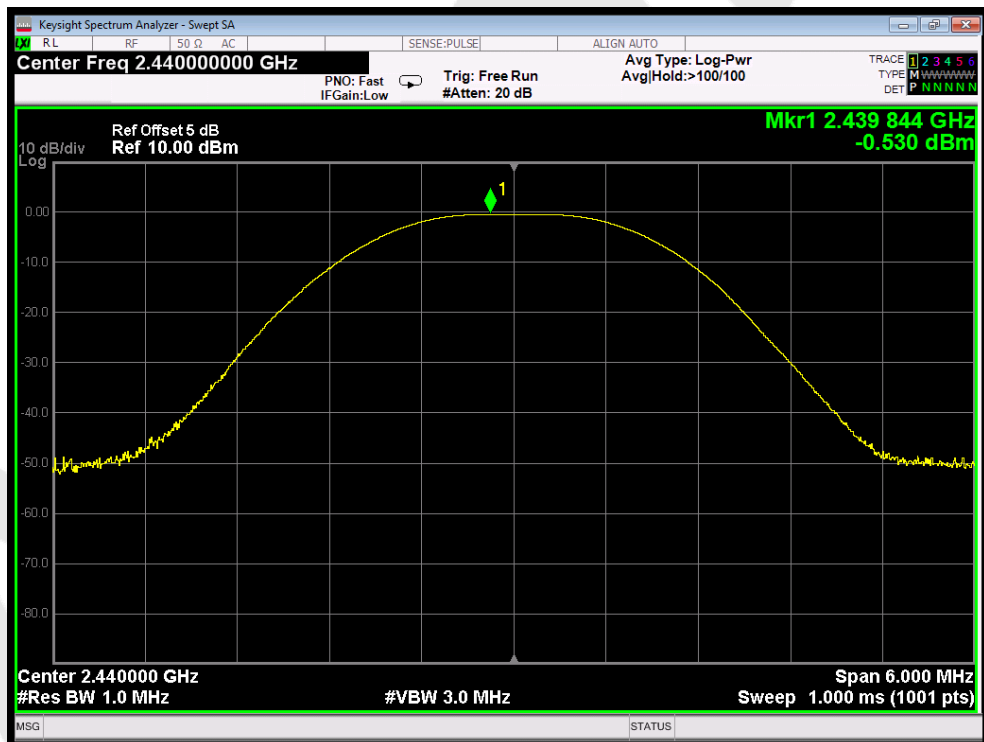

CH: Middle

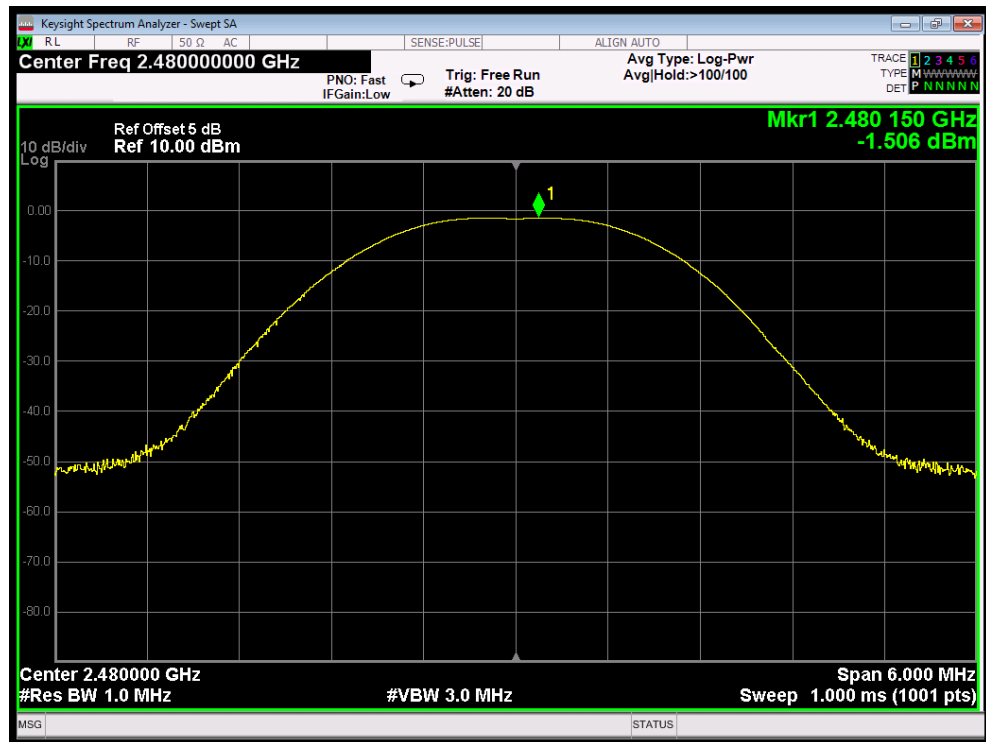


CH: High

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup



6.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz,
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

6.4. Test Data


Test Item : 6dB Bandwidth
Test Voltage : DC 11.1V Battery inside
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24℃
Humidity : 55%RH


Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
Low	2402	689.8	>500	PASS
Middle	2440	693.0		PASS
High	2480	693.1		PASS

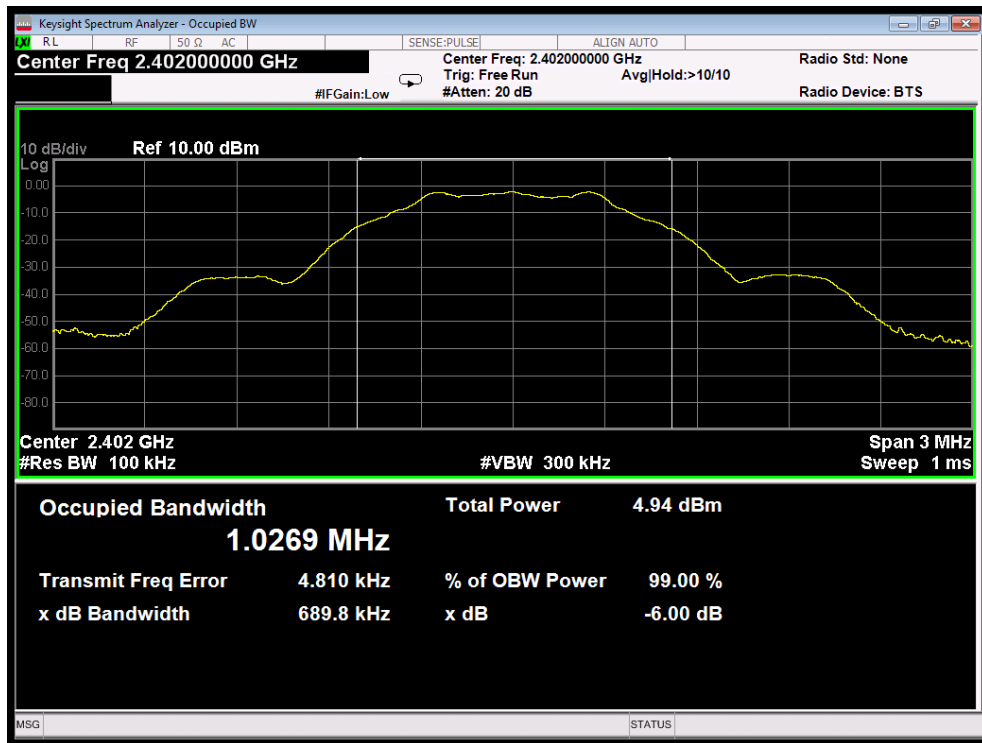

CH: Low

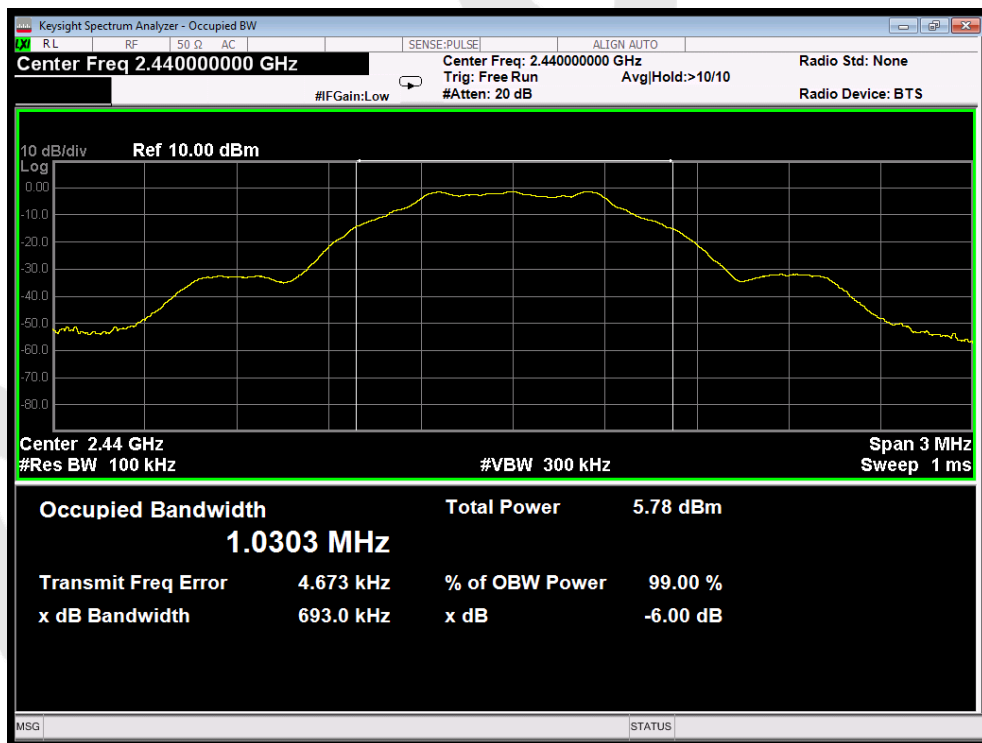

CH: Middle

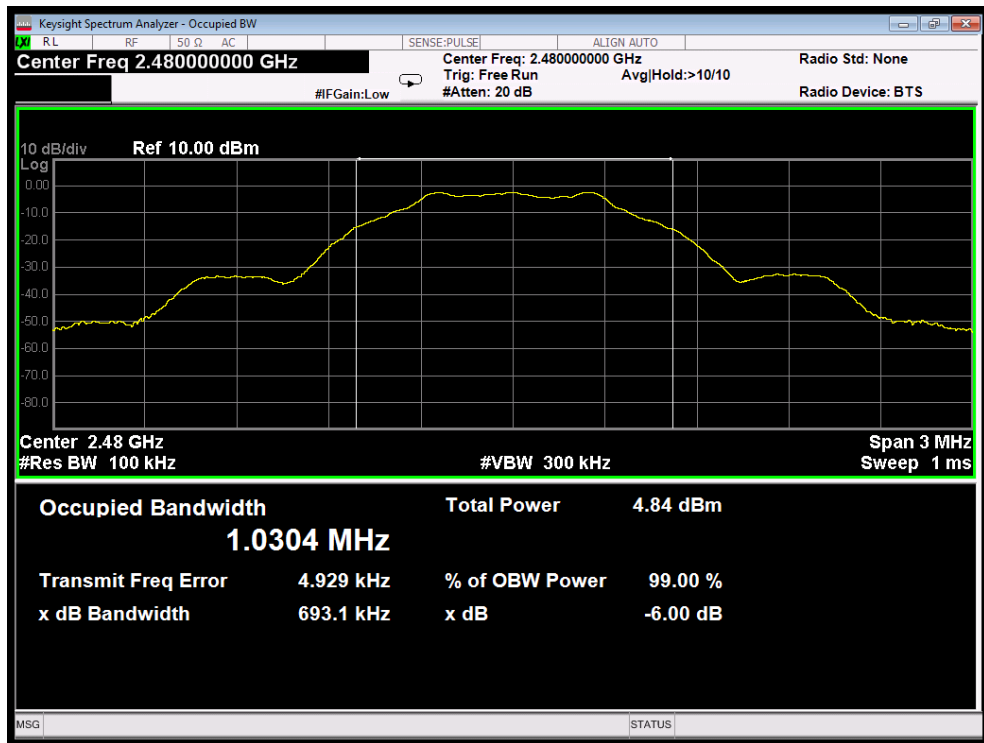


CH: High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm

7.2. Test Setup




7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.


7.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 11.1V Battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
Low	2402	-16.863	8.00	PASS
Middle	2440	-16.221	8.00	PASS
High	2480	-16.766	8.00	PASS

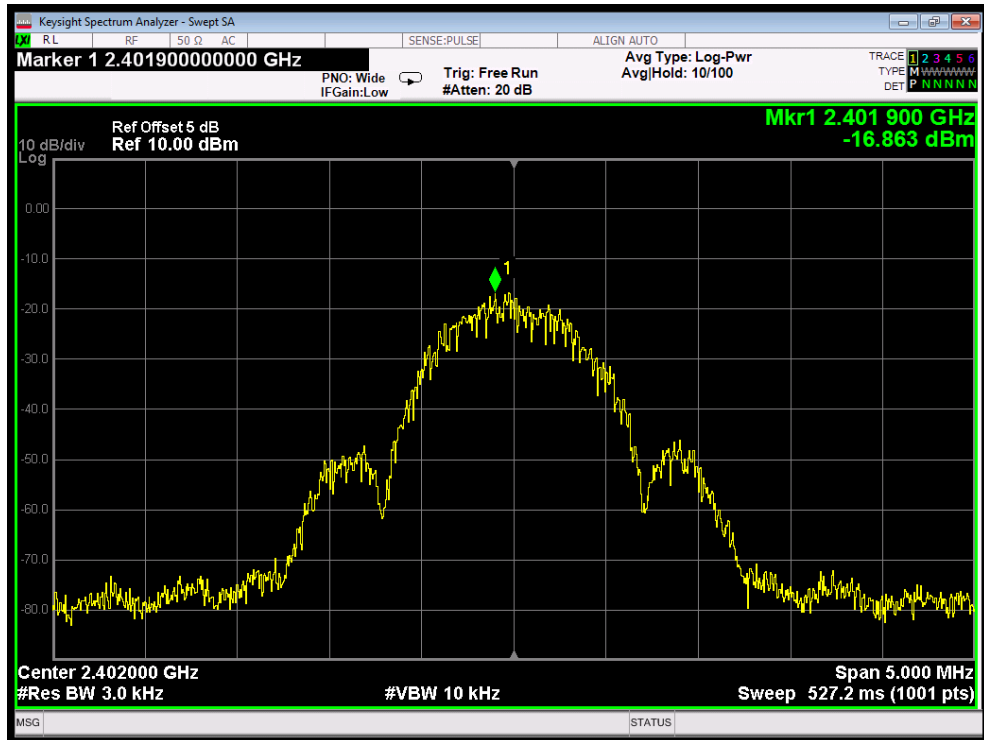

CH: Low

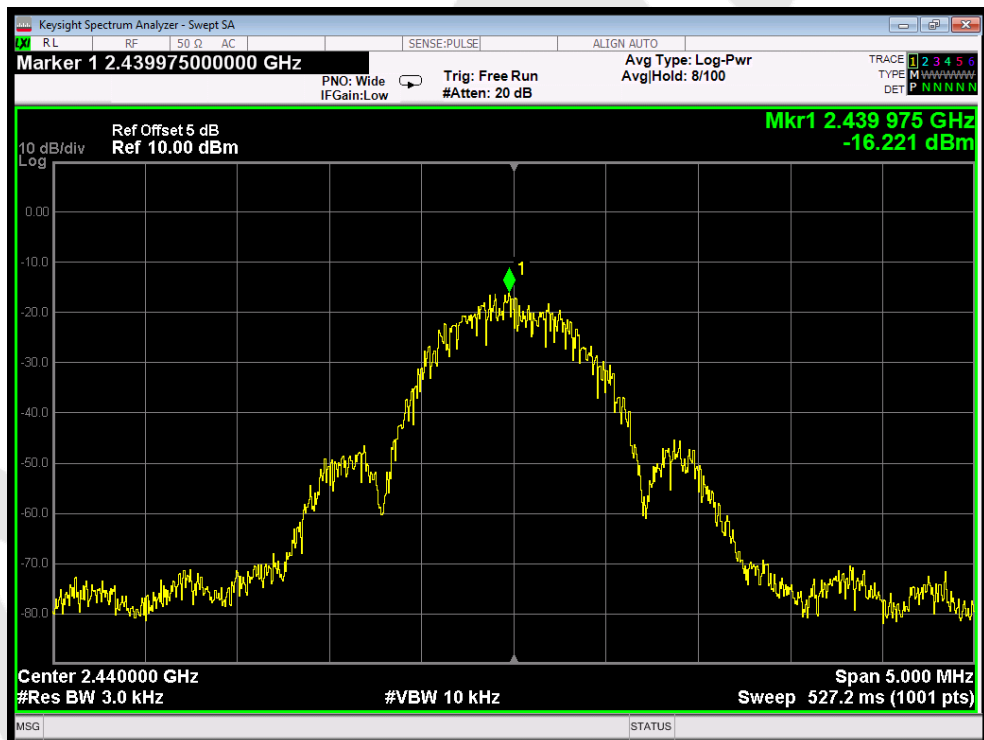

CH: Middle




CH: High

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2. Test Setup



8.3. Test Procedure


Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


8.4. Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 11.1V Battery inside	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH

Frequency Band (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Results
2400	57.869	>20	PASS
2483.5	59.144	>20	PASS

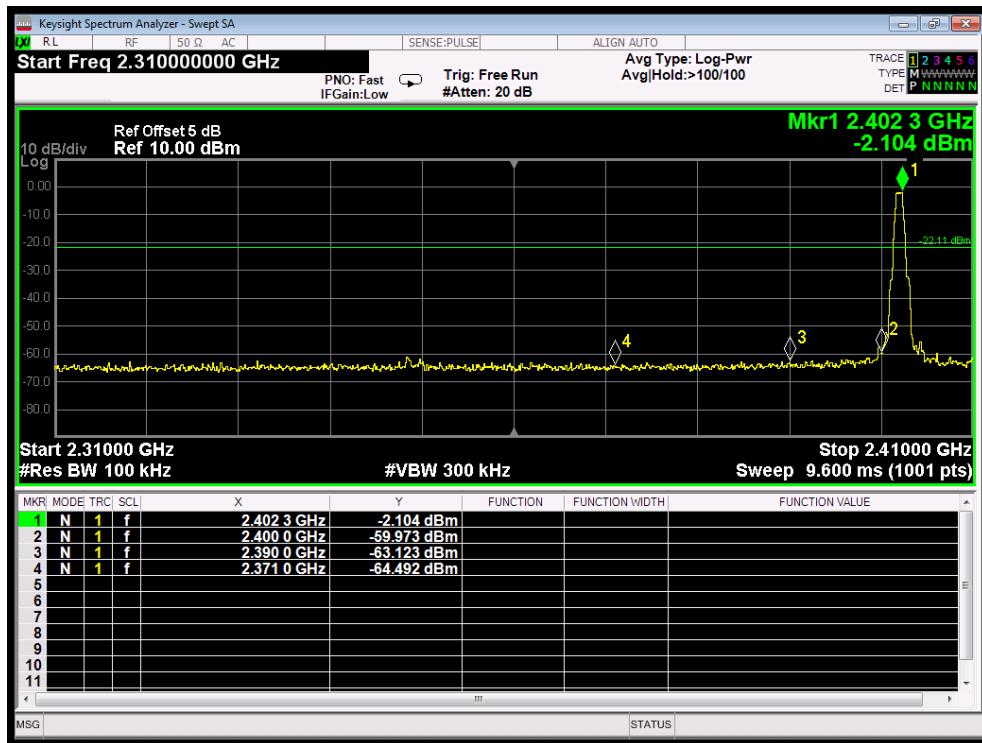


CH: Low

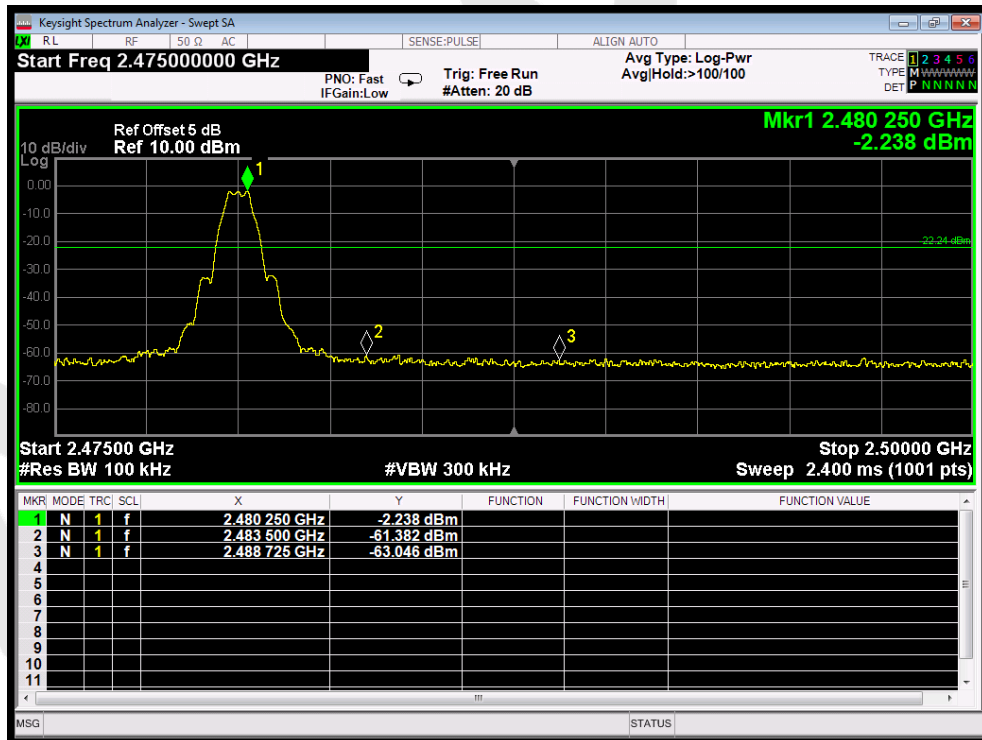

CH: High


Conducted Emission Method

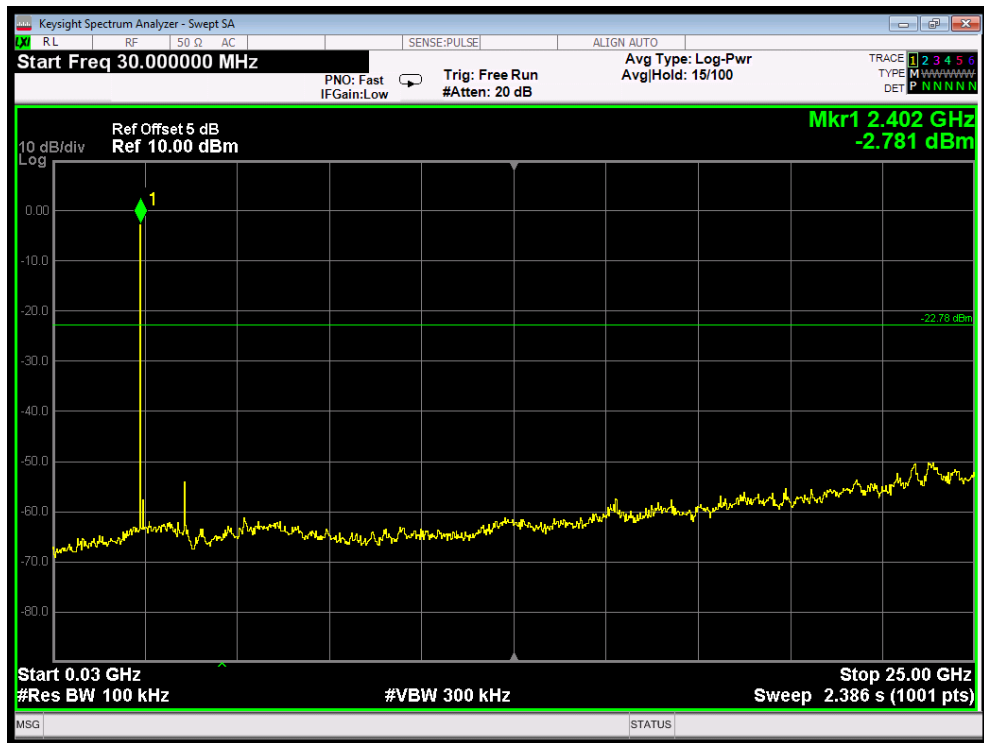

CH: Low



CH: Middle

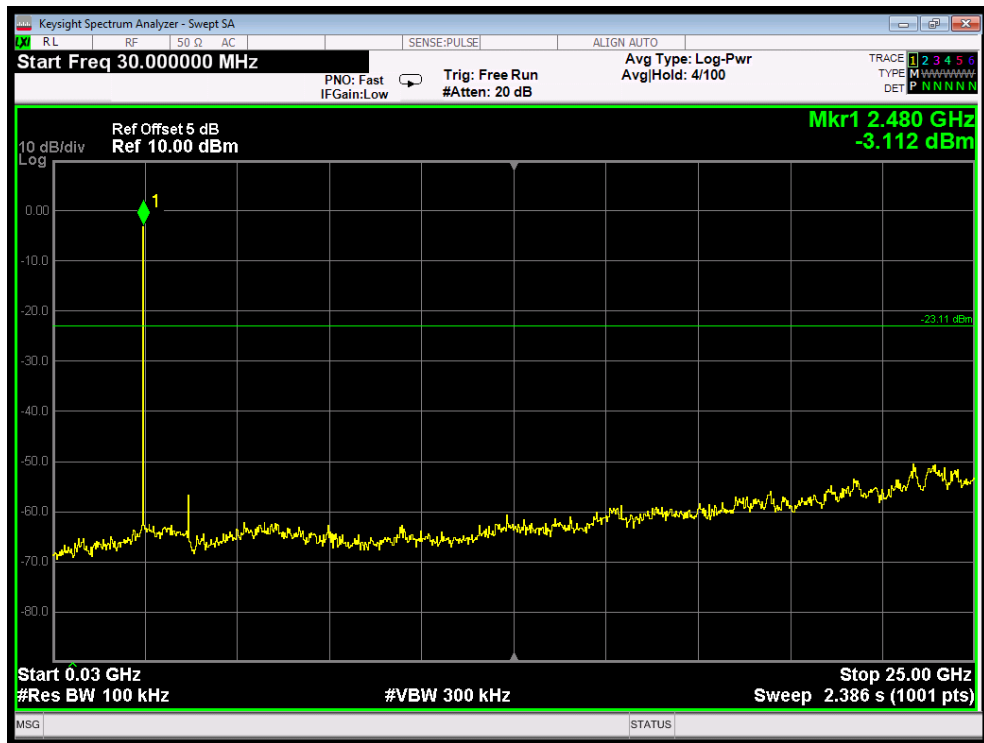

CH: High


9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The BT antenna is a PCB Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

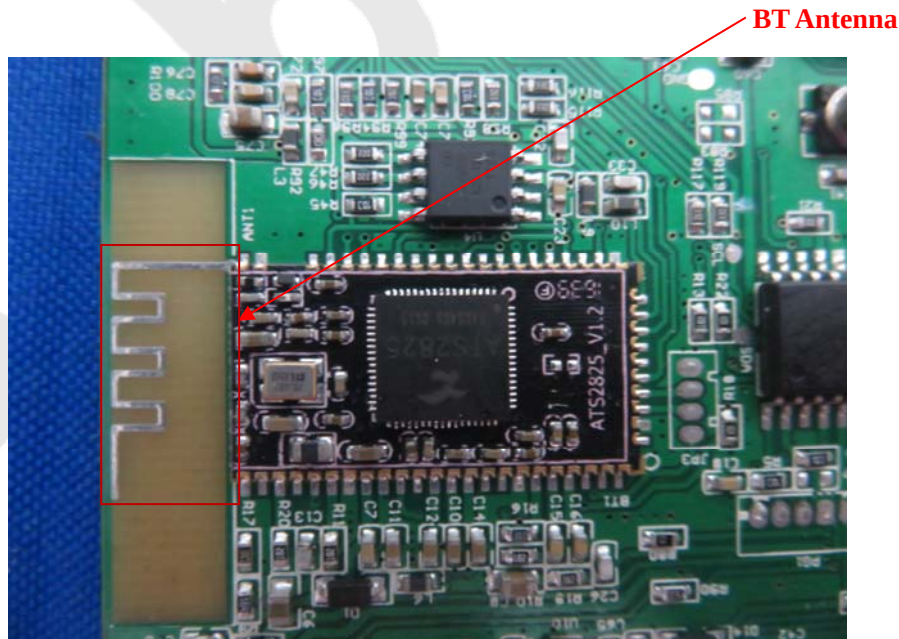


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Test



Photo of Radiation Emission Test



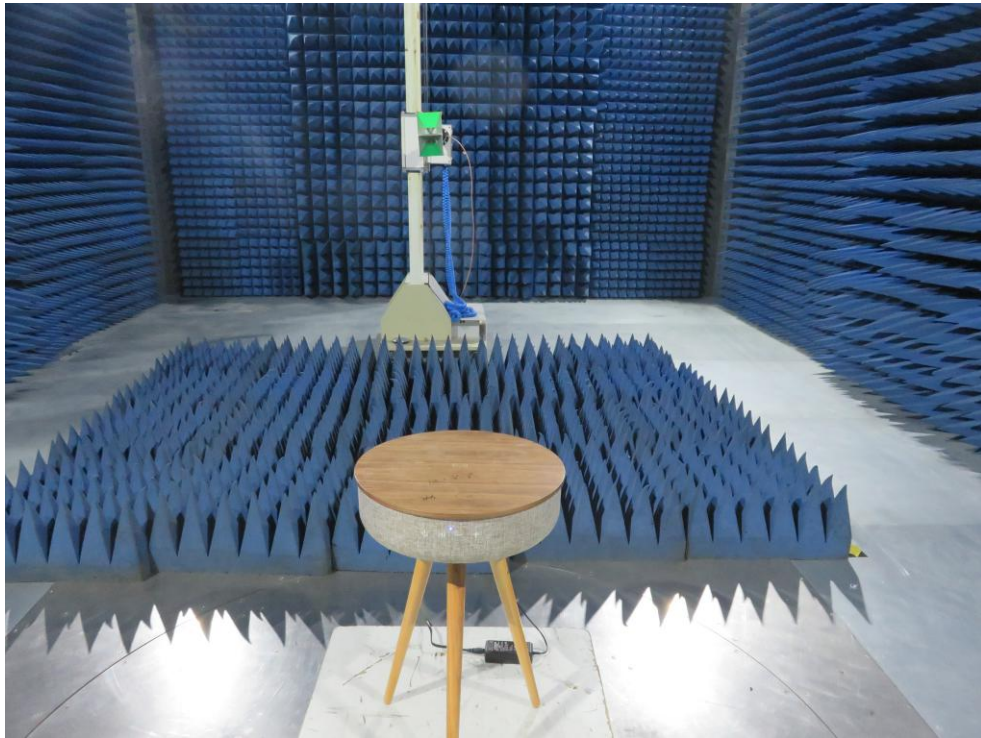

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please see the test report of R0217110068W1

Anbotek

APPENDIX III -- INTERNAL PHOTOGRAPH

Please see the test report of R0217110068W1

Anbotek

End of Report