



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159  
Tel: +82-31-323-6008 Fax: +82-31-323-6010  
<http://www.ltalab.com>

Dates of Tests: August 10 2022 ~ September 08, 2022  
Test Report S/N: LR500112211E  
Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2AON5A811-L**

APPLICANT

**Apulsetech Co., Ltd.**

<b>Equipment Class</b>	:	<b>Digital Transmission System (DTS)</b>
<b>Manufacturing Description</b>	:	<b>RFID Reader</b>
<b>Manufacturer</b>	:	<b>Apulsetech Co., Ltd.</b>
<b>Model name</b>	:	<b>a811-L</b>
<b>Test Device Serial No.:</b>	:	<b>Identical prototype</b>
<b>Rule Part(s)</b>	:	<b>FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013</b>
<b>Frequency Range</b>	:	<b>2412 ~ 2462 MHz</b>
<b>Max. Output Power</b>	:	<b>Max 7.19 dBm - Conducted</b>
<b>Data of issue</b>	:	<b>September 08, 2022</b>

This test report is issued under the authority of:

The test was supervised by:

Ja-Beom Koo, Manager

Eun-Hwan Jung, Test Engineer

**This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.**



NVLAP LAB Code.: 200723-0

---

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	11
3.2.3 POWER SPECTRAL DENSITY	-----	15
3.2.4 BAND EDGE	-----	19
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	24
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	28
<b>APPENDIX</b>		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	41

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2022-09-28	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2023-01-25	FCC CAB
VCCI	JAPAN	C-4948,	2023-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2023-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2023-08-15	VCCI registration
VCCI	JAPAN	G-847	2022-12-13	VCCI registration
IC	CANADA	5799A-1	2022-10-18	IC filing

## 2. Information about test item

### 2-1 Client & Manufacturer

Client Company name : Apulsetech Co., Ltd.  
 Address : C-1211, Gwangmyeongtechnopark, 60, Haan-ro, Gwangmyeong-si, Gyeonggi-do , Republic of Korea  
 Tel / Fax : +82-10-9573-2073 / +82-70-4222-5686  
 Manufacturer : Apulsetech Co., Ltd.  
 Address : C-1211, Gwangmyeongtechnopark, 60, Haan-ro, Gwangmyeong-si, Gyeonggi-do , Republic of Korea  
 Tel / Fax : +82-10-9573-2073 / +82-70-4222-5686

### 2-2 Equipment Under Test (EUT)

Model name : a811-L  
 Serial number : Identical prototype  
 Date of receipt : August 10 2022  
 EUT condition : Pre-production, not damaged  
 Antenna type : PIFA Antenna (Max Gain : 2.2 dBi)  
 Frequency Range : 2412 ~ 2462MHz  
 RF output power : Max 7.19 dBm – Conducted  
 Type of Modulation : CCK, DSSS, BPSK for OFDM  
 Power Source : DC 3.7 V

### 2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz) BLE	2412	2442	2462

### 2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	-	MS-1736	MSI

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	C
15.247(b)	Transmitter Peak Output Power		C
15.247(e)	Transmitter Power Spectral Density		C
15.247(d)	Band Edge & Conducted Spurious emission		C
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	N/A
15.203	Antenna requirement	-	C

N/A : This product is battery-enabled and excludes the test.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement

Apulsetech Co., Ltd. FCC ID: 2AON5A811-L unit complies with the requirement of §15.203.

The antenna type is FPCB Antenna

## 3.2 Technical Characteristics Test

### 3.2.1 6 dB Bandwidth

#### Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ( as close as possible to ) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 3 X RBW

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

**Measurement Data : Complies**

#### 802.11 b Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (kHz)	Result
2412	10.507	Complies
2442	10.478	Complies
2462	10.709	Complies

#### 802.11 g Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2412	16.758	Complies
2442	16.729	Complies
2462	16.729	Complies

#### 802.11 n Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2412	17.916	Complies
2442	17.974	Complies
2462	17.916	Complies

- See next pages for actual measured spectrum plots.

**Minimum Standard:**

---

6 dB Bandwidth  $\geq$  500 kHz

---

**Measurement Setup**




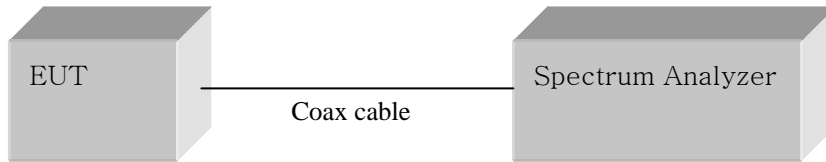





Figure 1: Measurement setup for the carrier frequency separation

### 802.11 b


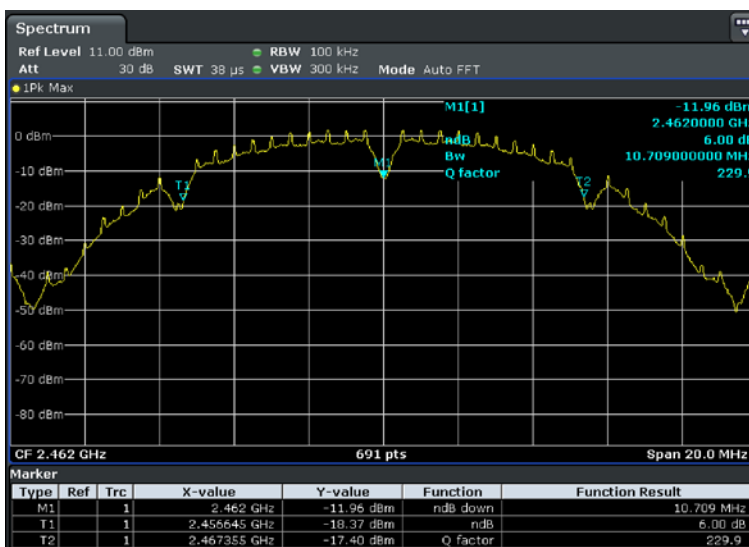
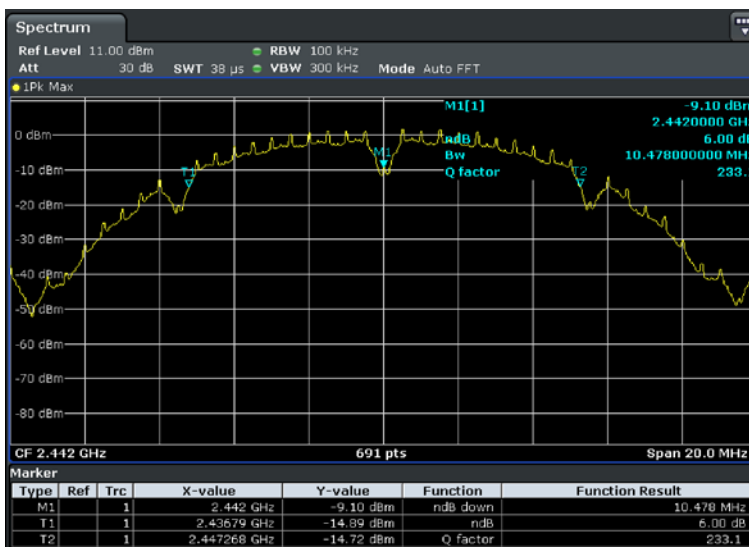


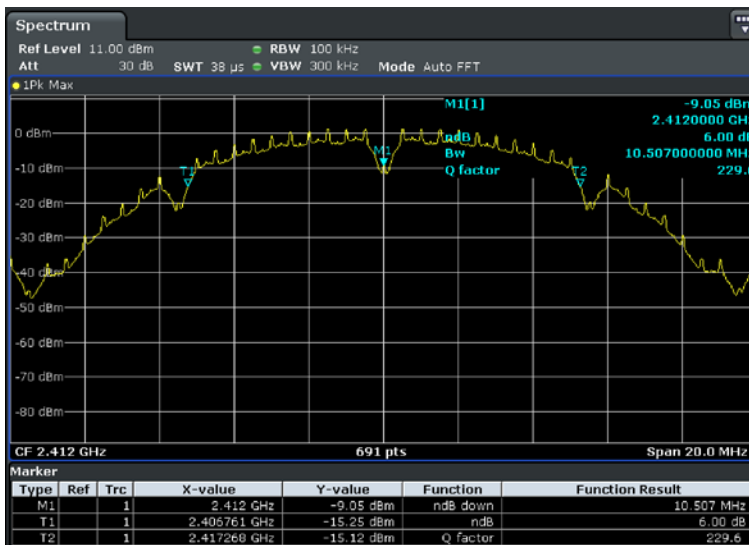

# 802.11 g

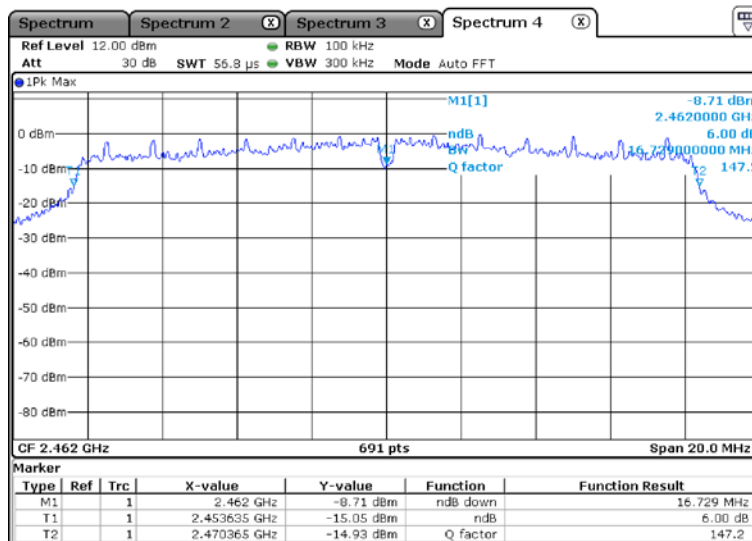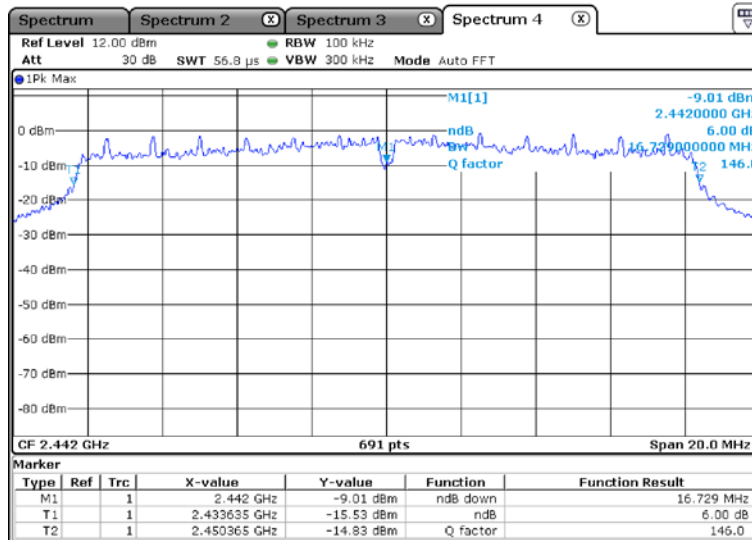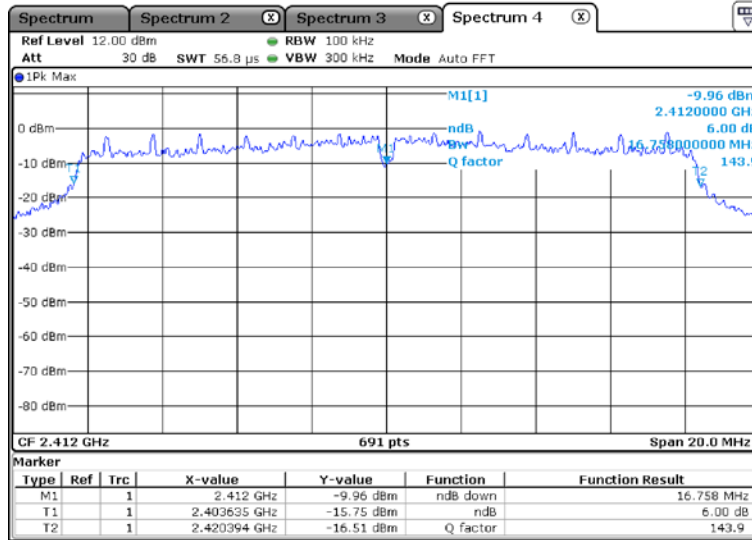

# 802.11 n

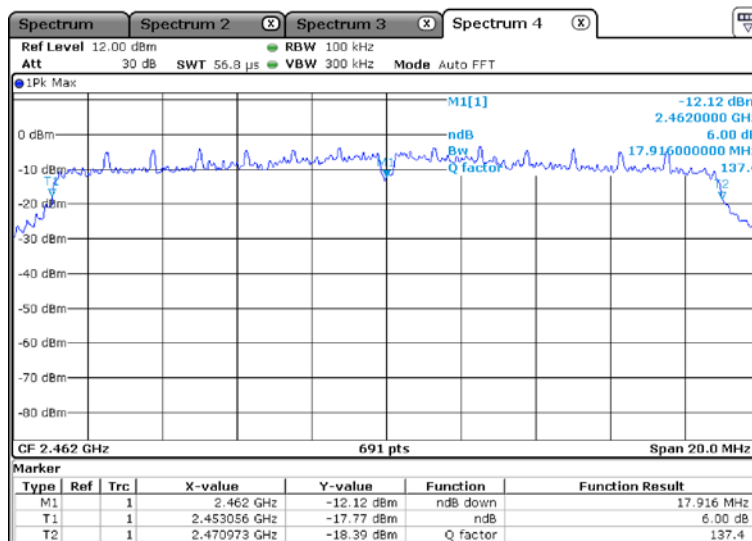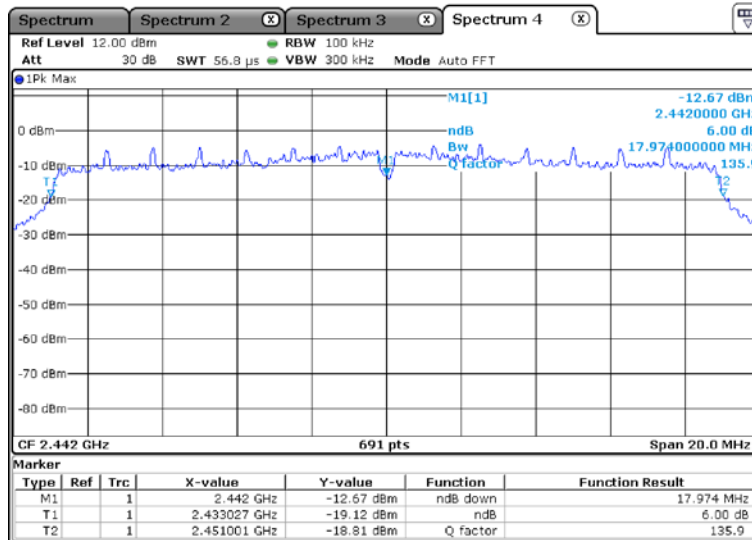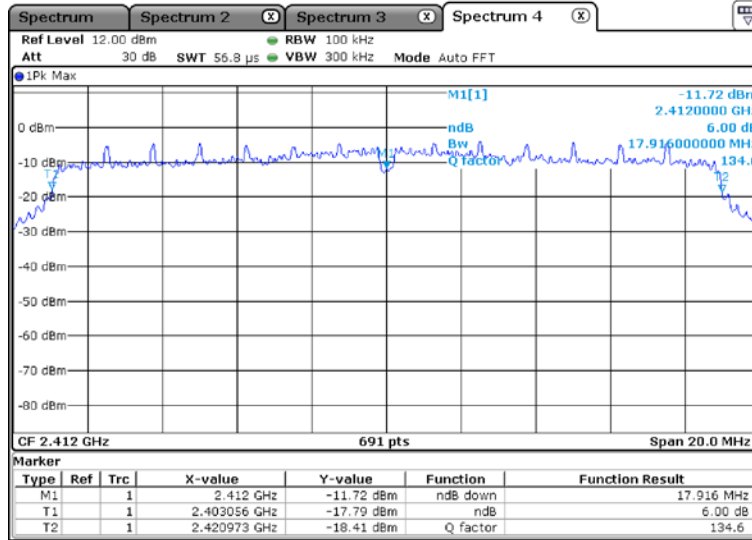

### 3.2.2 Peak Output Power Measurement

#### Procedure:

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth :

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW  $\geq$  DTS Bandwidth

Span  $\geq 3 \times$  RBW

VBW = 3 X RBW

Sweep = auto

Detector function = peak

**Measurement Data : Complies**

#### 802.11 b Mode

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2412	5.69	Complies
2442	6.22	Complies
2462	6.52	Complies

#### 802.11 g Mode

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2412	6.67	Complies
2442	6.57	Complies
2462	7.19	Complies

#### 802.11 g Mode

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2412	5.98	Complies
2442	6.17	Complies
2462	6.85	Complies

- See next pages for actual measured spectrum plots.




#### Minimum Standard:

Peak output power	$\leq 1 \text{ W}(30 \text{ dBm})$
-------------------	------------------------------------




#### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

# 802.11 b

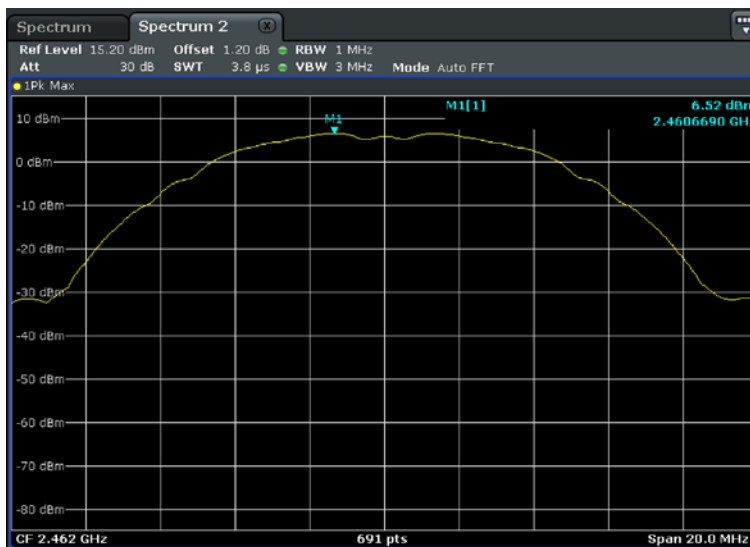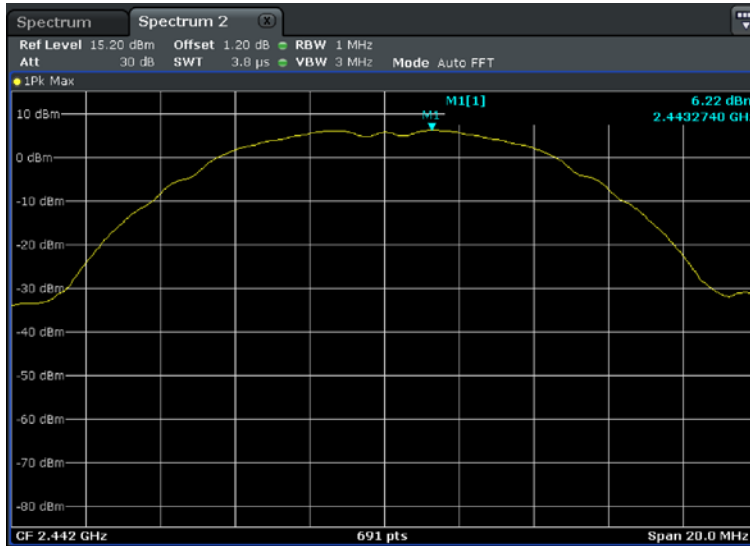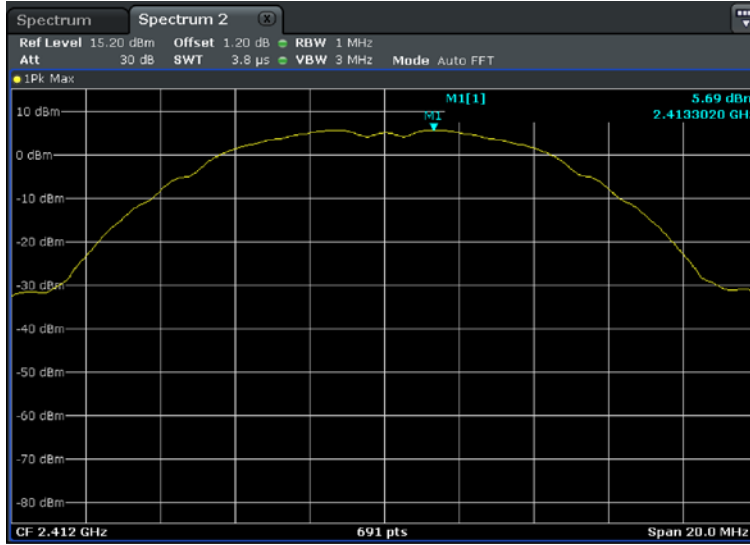

# 802.11 g

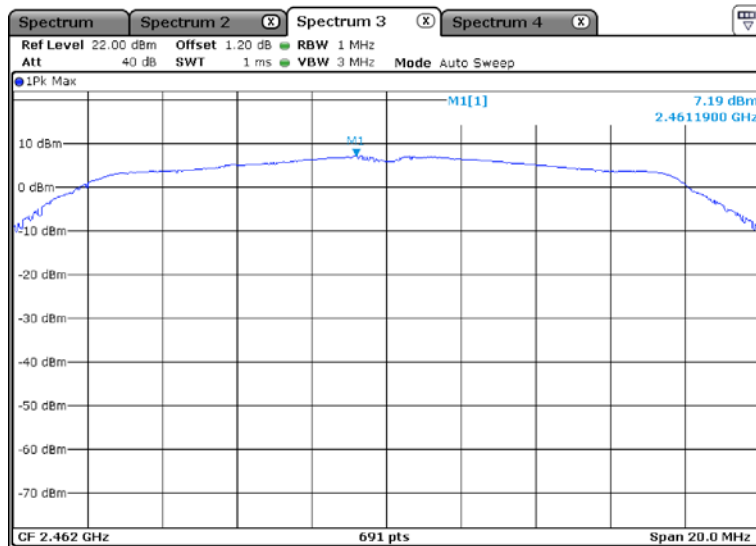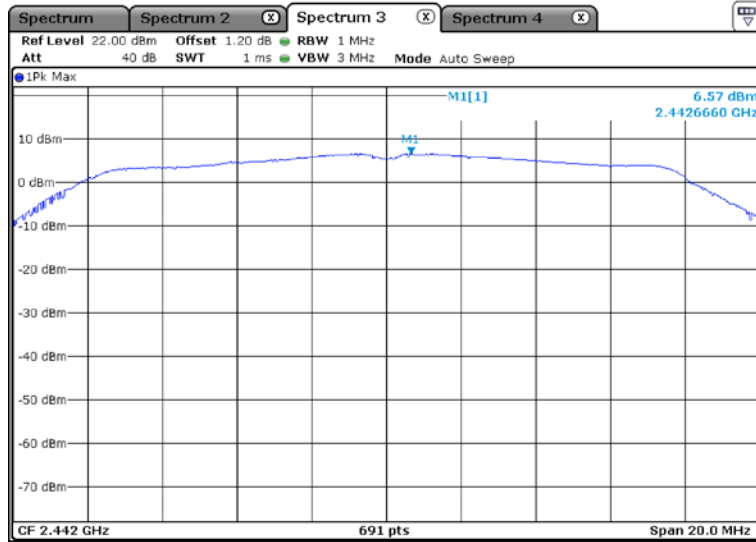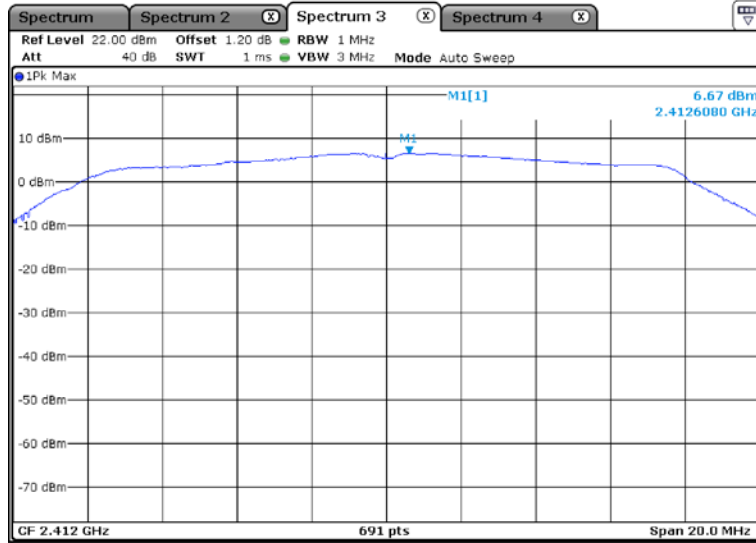



### 3.2.3 Power Spectral Density

#### Procedure:

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The spectrum analyzer is set to:

RBW = 3 kHz ( $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ )

Span  $\geq 1.5$  times the DTS bandwidth

VBW = 3 X RBW

Sweep = auto

Detector function = peak

Trace = max hold

**Measurement Data : Complies**

#### 802.11 b Mode

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2412	-8.48	Complies
2442	-8.34	Complies
2462	-8.97	Complies

#### 802.11 g Mode

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2412	-14.58	Complies
2442	-14.49	Complies
2462	-13.98	Complies

#### 802.11 n Mode

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2412	-15.87	Complies
2442	-15.87	Complies
2462	-15.03	Complies

- See next pages for actual measured spectrum plots.




#### Minimum Standard:

Power Spectral Density	$\leq 8 \text{ dBm @ } 3 \text{ kHz BW}$
------------------------	--

#### Measurement Setup




Same as the Chapter 3.2.1 (Figure 1)

# 802.11 b

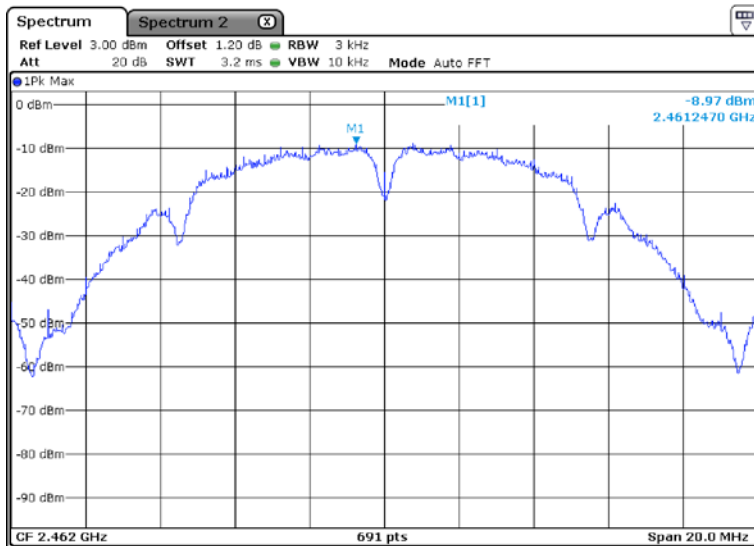
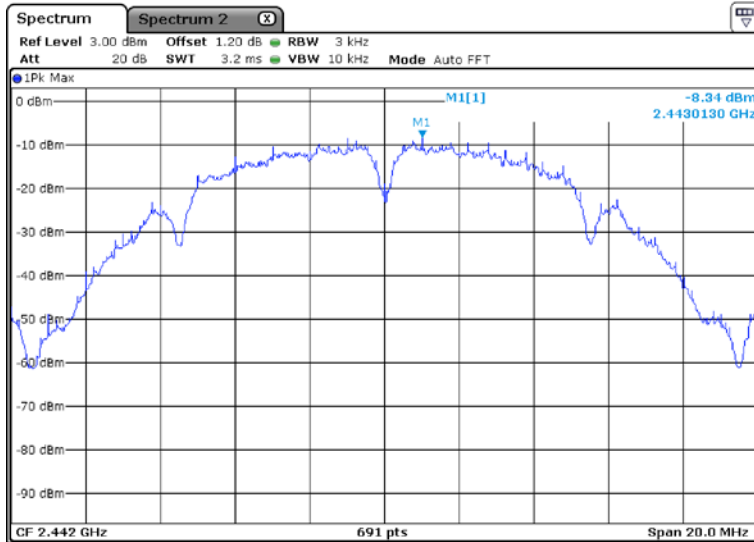
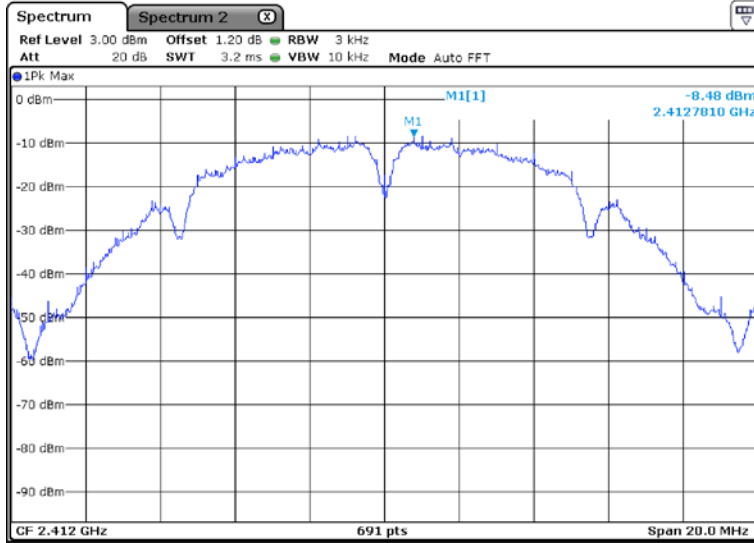




# 802.11 g

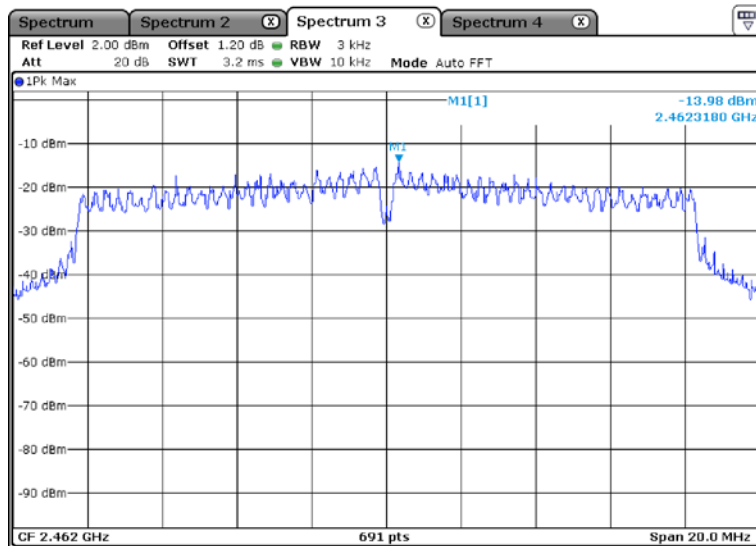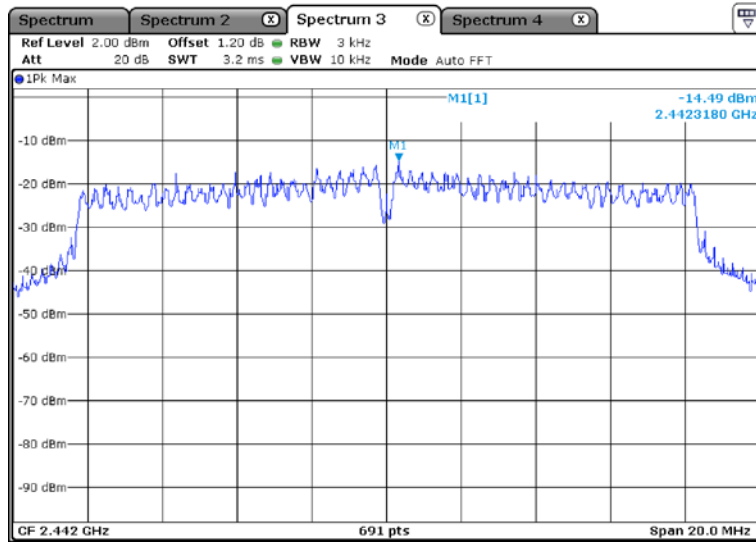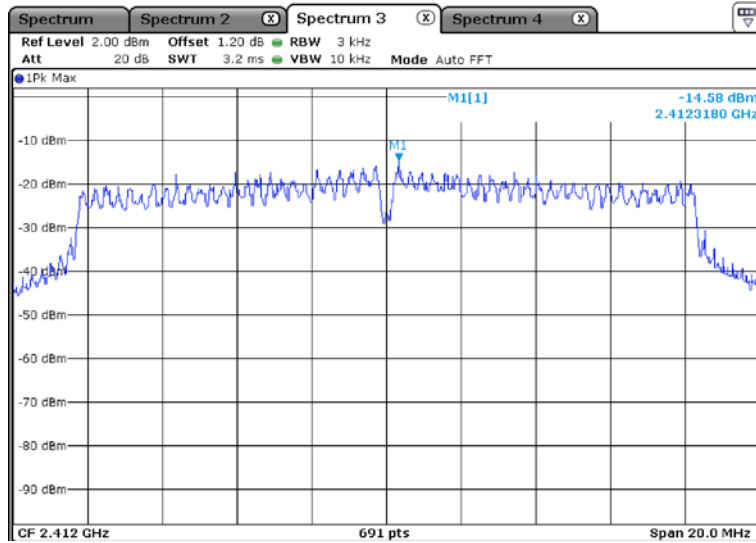

# 802.11 n

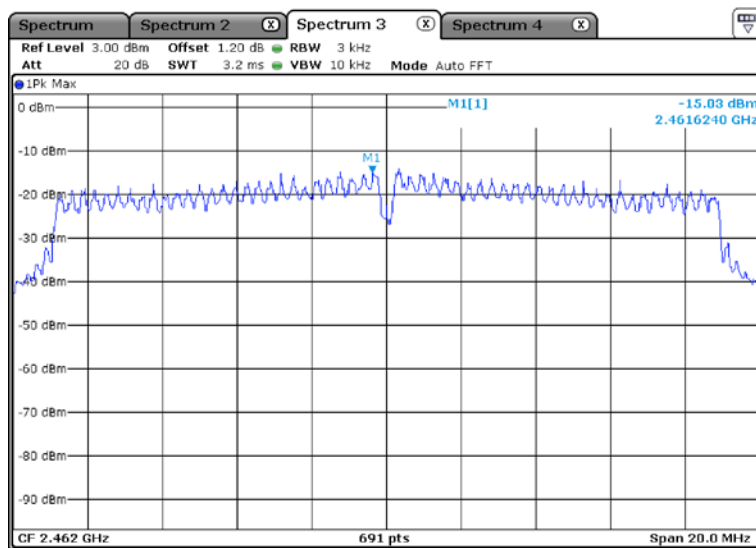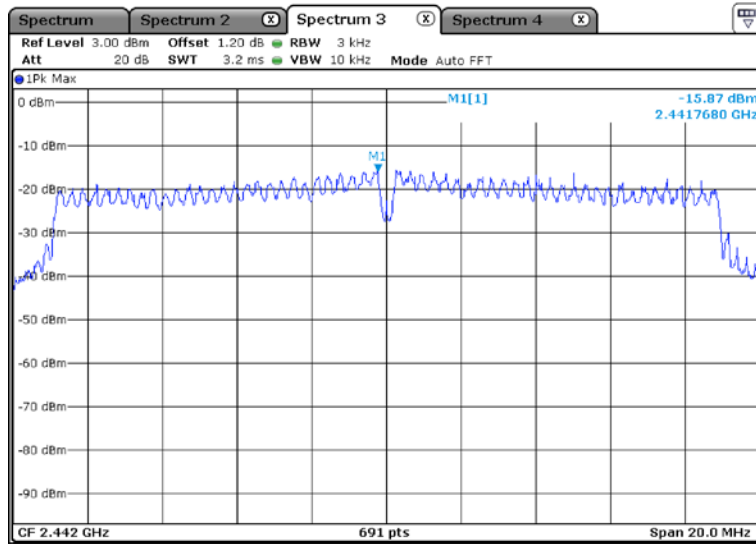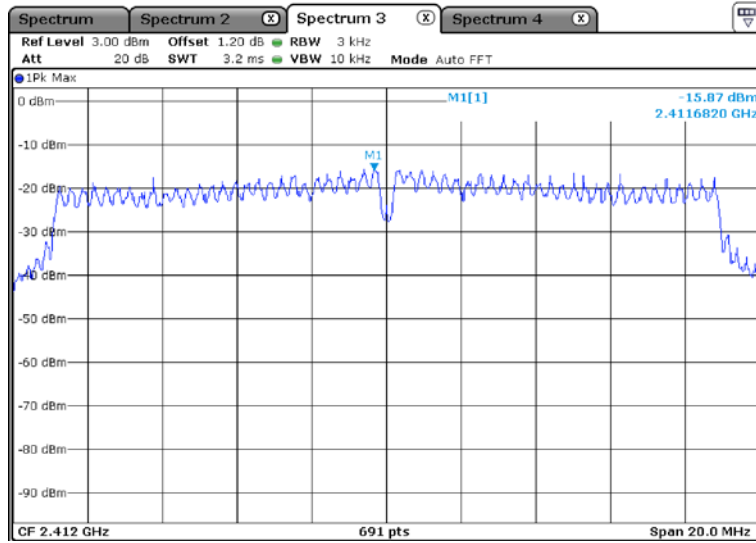

### 3.2.4 Band Edge

#### Procedure:

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB..

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

VBW  $\geq$  3 X RBW

Detector function = peak

Trace = max hold

Sweep = auto

**Measurement Data: Complies**

#### 802.11 b

Frequency (MHz)	Test Results	
	dBc	Result
Low edge	45.31	Complies
High edge	61.24	Complies

#### 802.11 g

Frequency (MHz)	Test Results	
	dBc	Result
Low edge	38.19	Complies
High edge	50.87	Complies



#### 802.11 n

Frequency (MHz)	Test Results	
	dBc	Result
Low edge	41.07	Complies
High edge	50.18	Complies



- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
  
- See next pages for actual measured spectrum plots.

<b>Minimum Standard:</b>	$\leq 20$ dBc
--------------------------	---------------



### 802.11 b

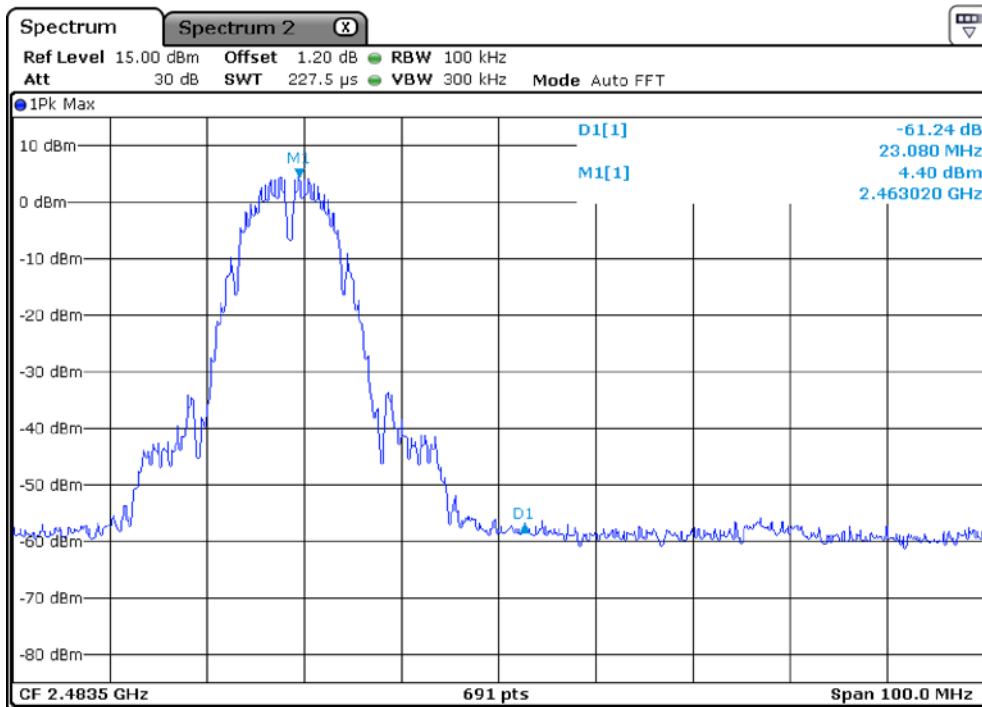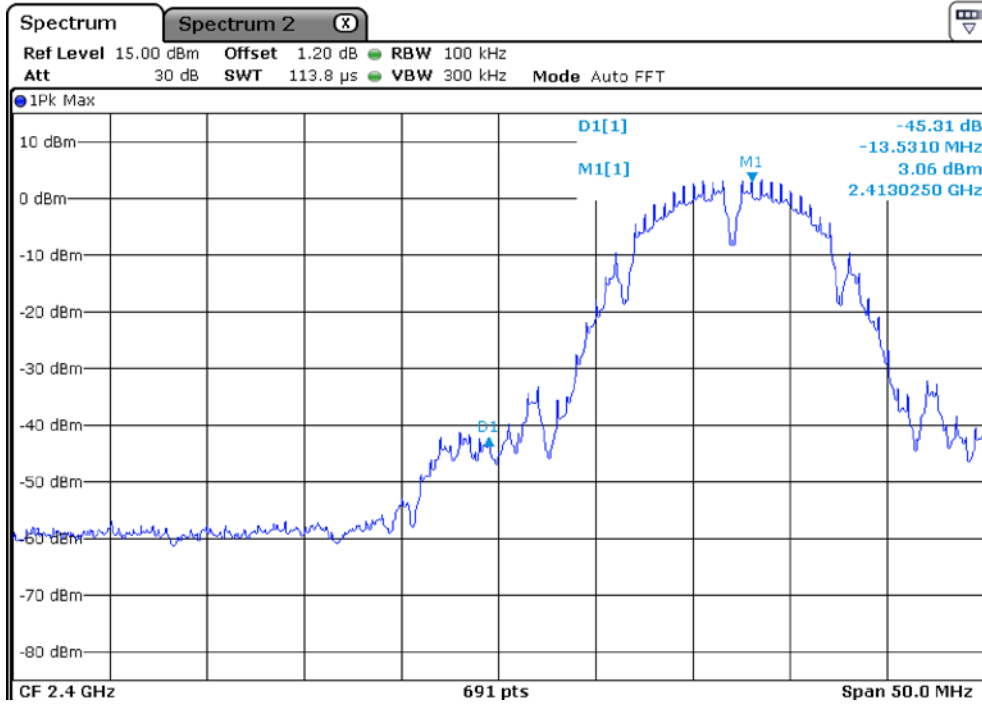

### 802.11 g

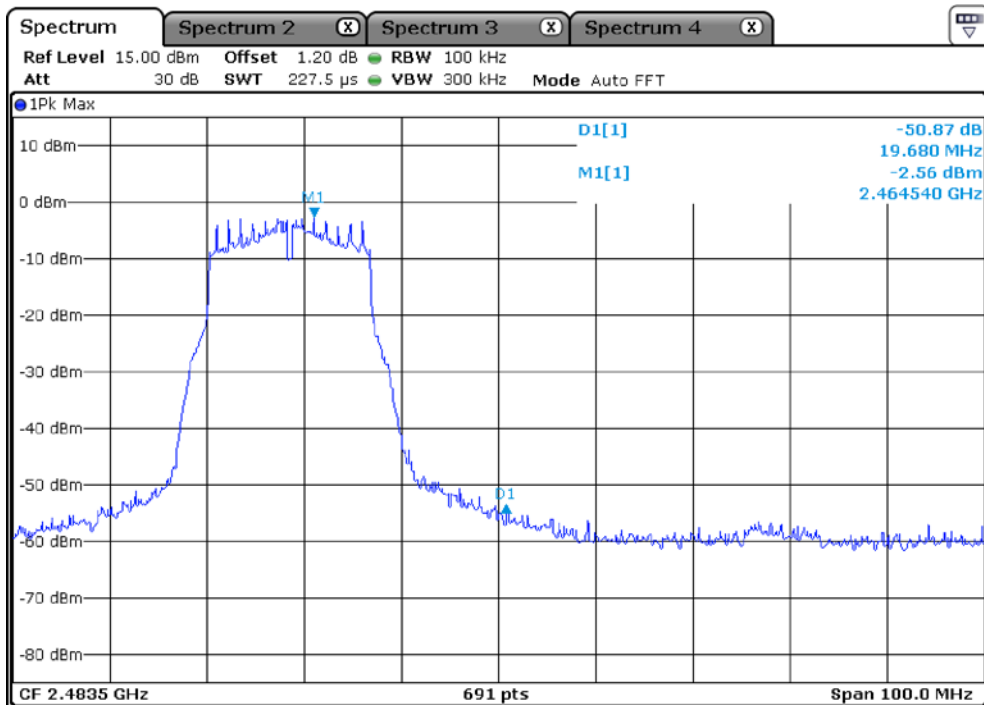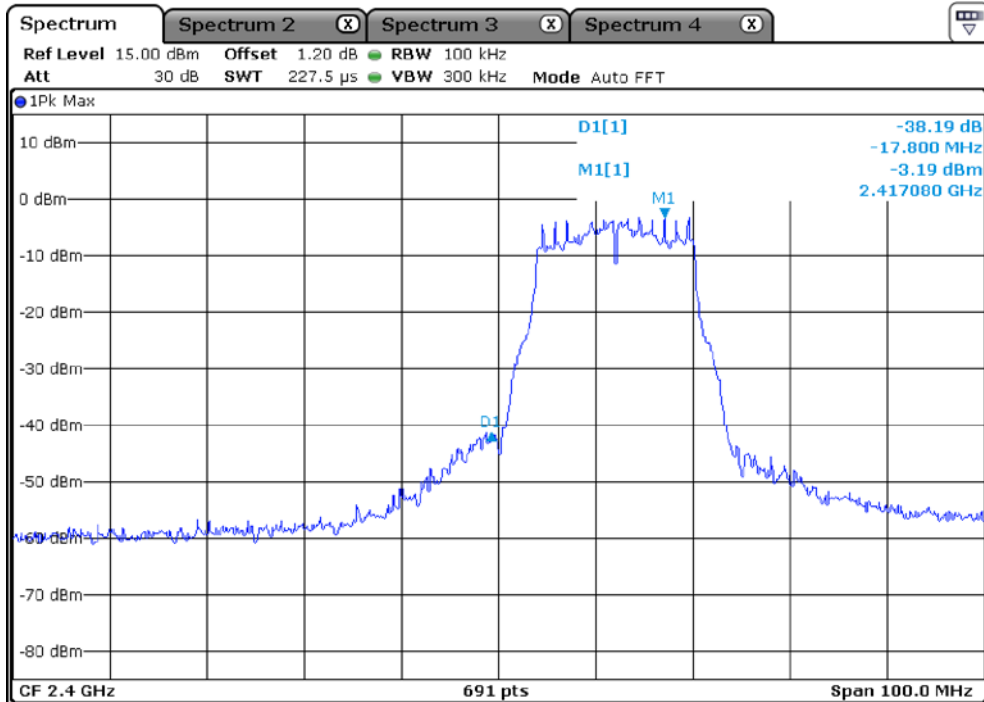

### 802.11 n

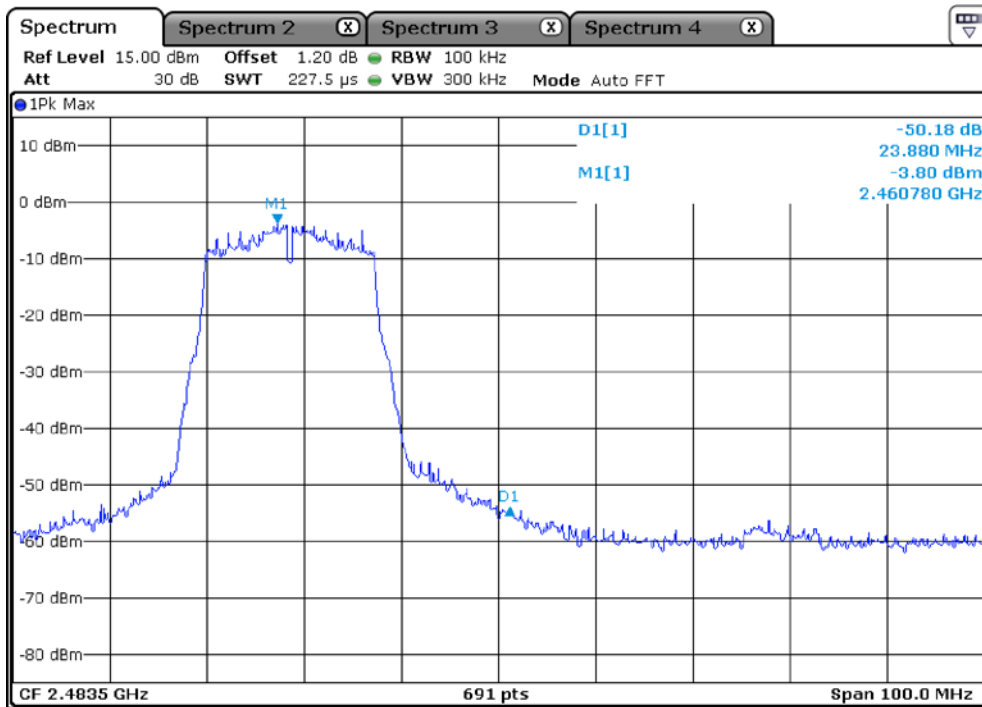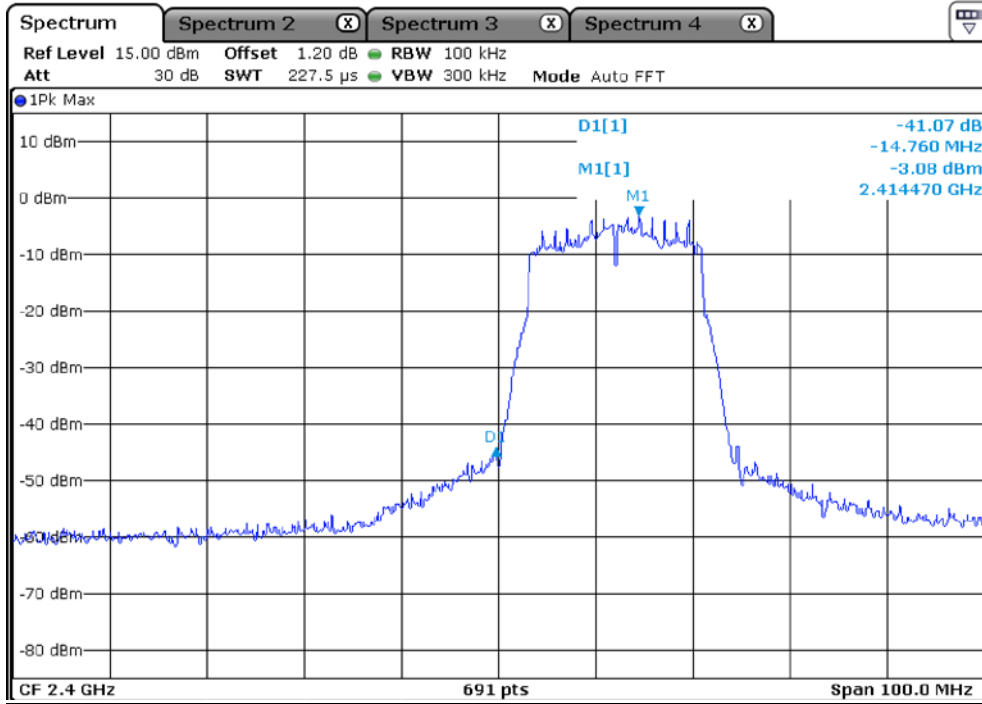

### 3.2.5 Conducted Spurious Emissions

#### Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, set the marker on the peak of any spurious emission recorded.

#### The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

**Measurement Data: Complies**

#### 802.11 b

Frequency (MHz)	Test Results	
	dBc	Result
2412	54.11	Complies
2442	54.90	Complies
2462	52.62	Complies

#### 802.11g

Frequency (MHz)	Test Results	
	dBc	Result
2412	47.93	Complies
2442	47.40	Complies
2462	52.31	Complies

#### 802.11n

Frequency (MHz)	Test Results	
	dBc	Result
2412	47.24	Complies
2442	45.88	Complies
2462	46.92	Complies






- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

<b>Minimum Standard:</b>	$\geq 20$ dBc
--------------------------	---------------




### Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

**Unwanted Emission – 802.11 b (Low,Middle,High)**

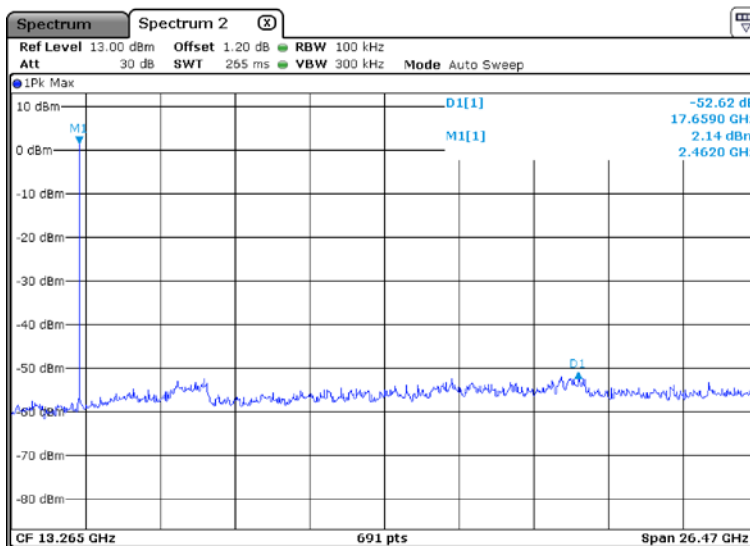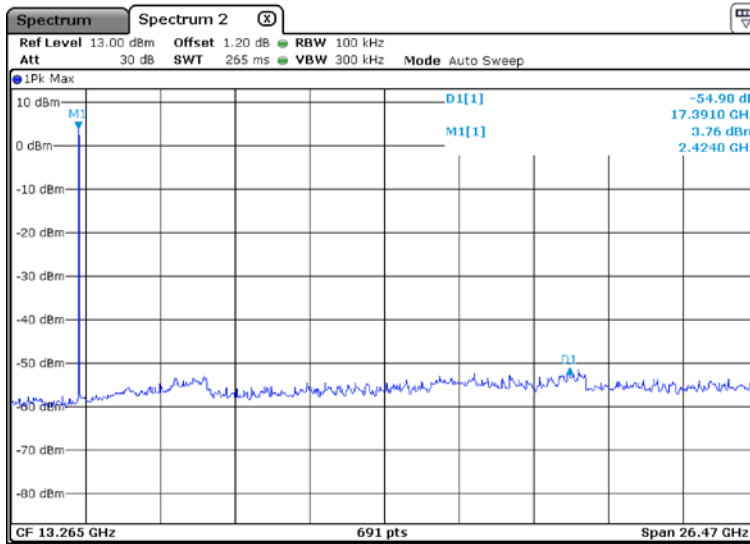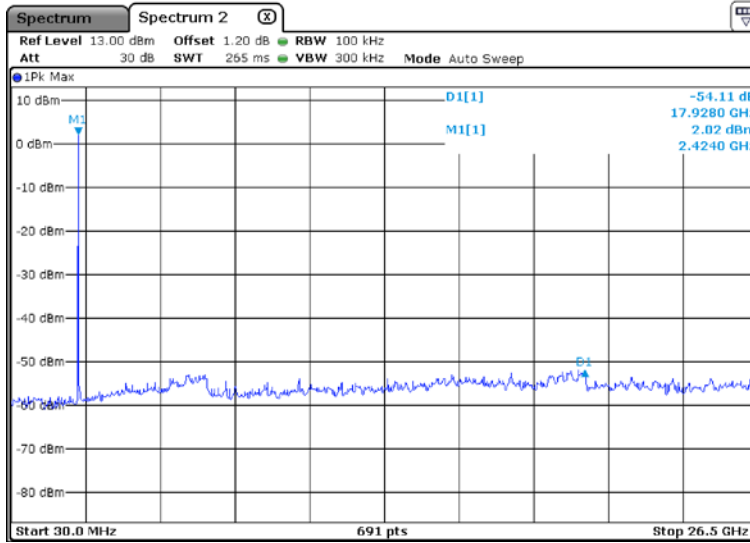

**Unwanted Emission – 802.11 g (Low,Middle,High)**

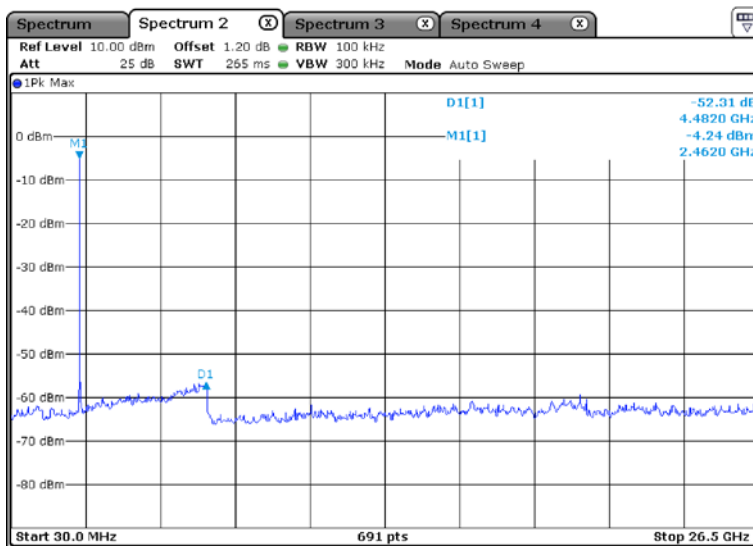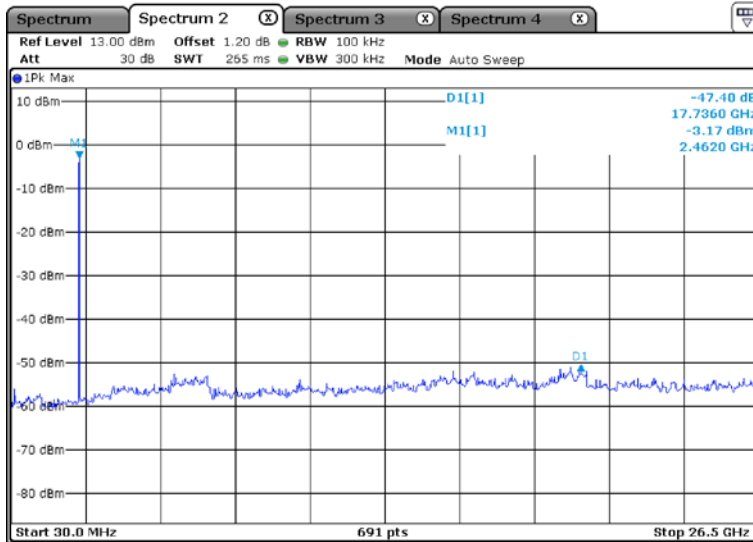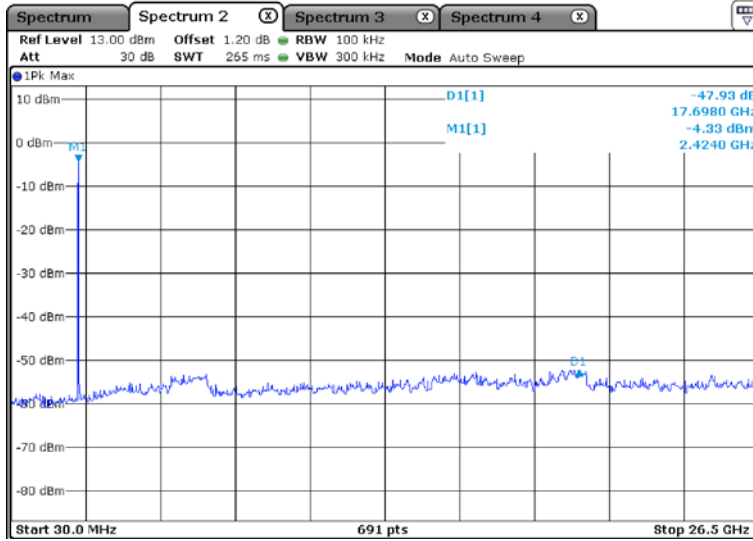

### 3.2.6 Radiated Spurious Emissions

#### Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz ( 30 MHz ~ 1 GHz)

VBW  $\geq$  RBW

= 1 MHz ( 1 GHz ~ 10<sup>th</sup> harmonic )

Trace = max hold


Detector function = peak

Sweep = auto


**Duty cycle : 98.89 %**

**The EUT configureal to transmit continuously(D  $\geq$  98%)/ Duty Factor = 0**


**below 30 MHz**

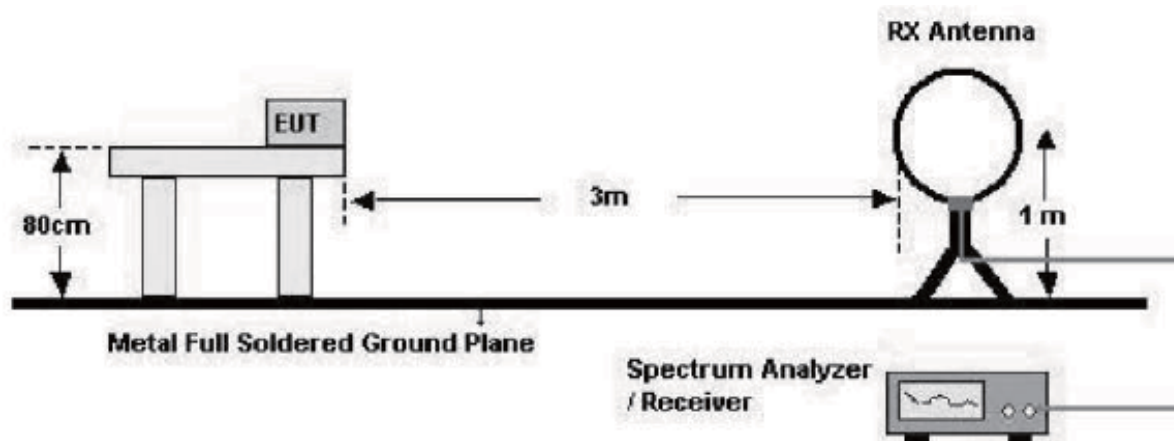

below 1 GHz (30 MHz to 1 GHz)

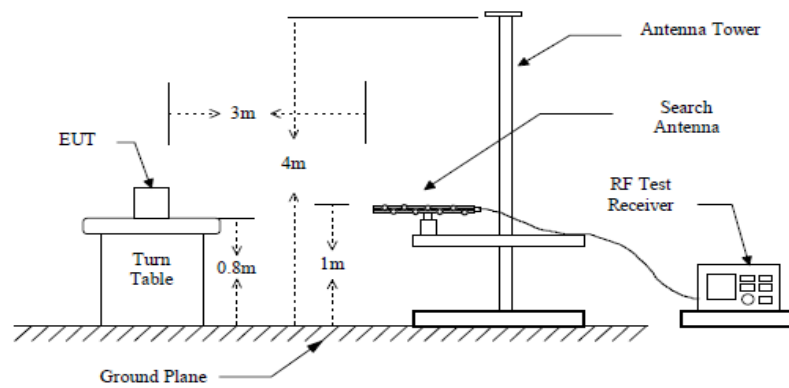

above 1 GHz

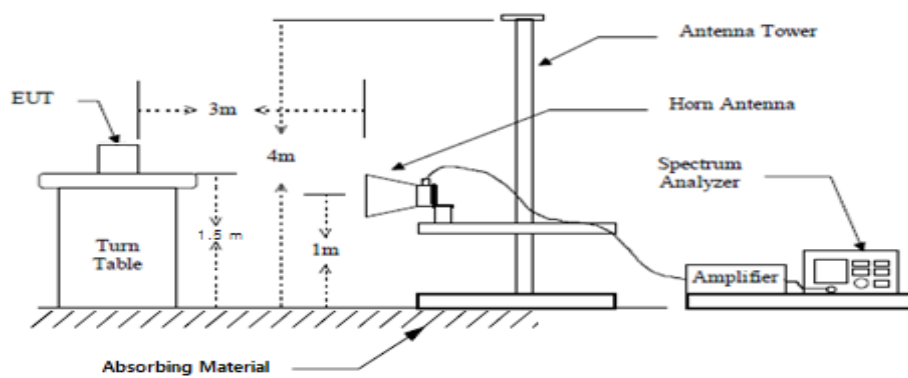

**Measurement Data: Complies**


- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.

**Minimum Standard: FCC Part 15.209(a)**

<b>Frequency (MHz)</b>	<b>Limit (uV/m) @ 3 m</b>
0.009 ~ 0.490	2400/F(kHz) (@ 30 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

**Radiated Emissions – 802.11 b**

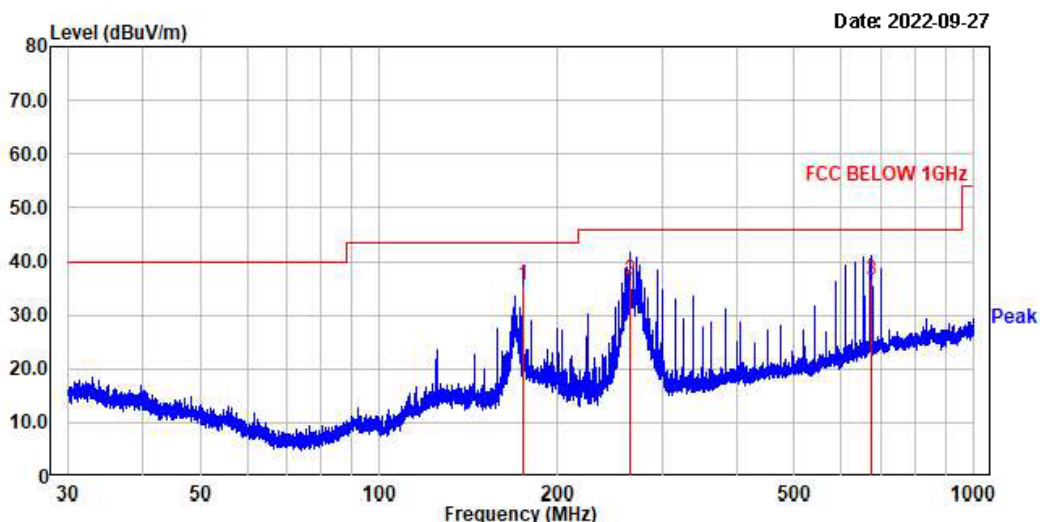


Trace:									
No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	175.04	44.79	-9.07	35.72	43.50	7.78	222	360	horizontal
2.	264.98	47.30	-10.77	36.53	46.00	9.47	100	153	horizontal
3.	672.25	39.21	-2.54	36.67	46.00	9.33	131	360	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

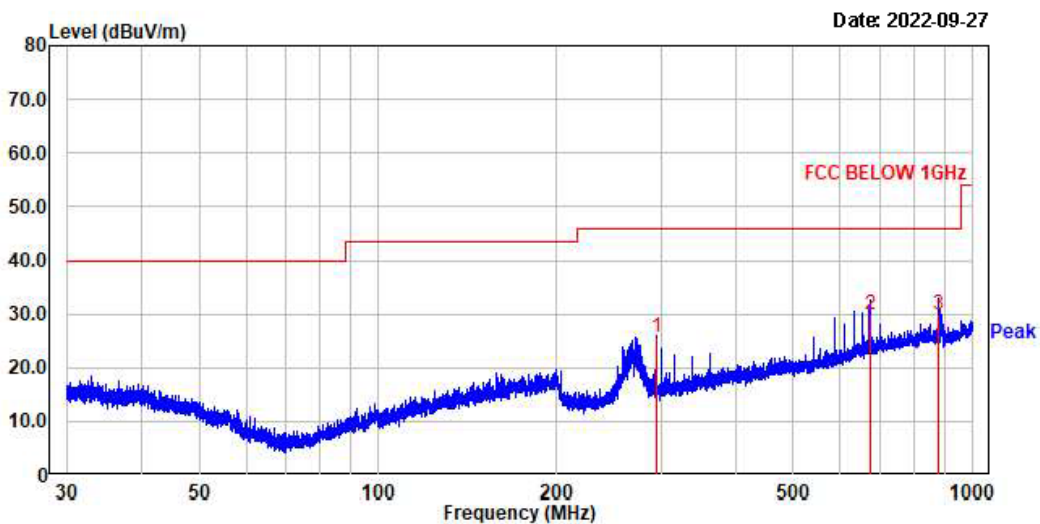

Trace:									
No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	293.60	35.70	-10.10	25.60	46.00	20.40	100	56	vertical
2.	672.25	32.71	-2.69	30.02	46.00	15.98	100	124	vertical
3.	876.78	30.10	-0.17	29.93	46.00	16.07	100	22	vertical


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

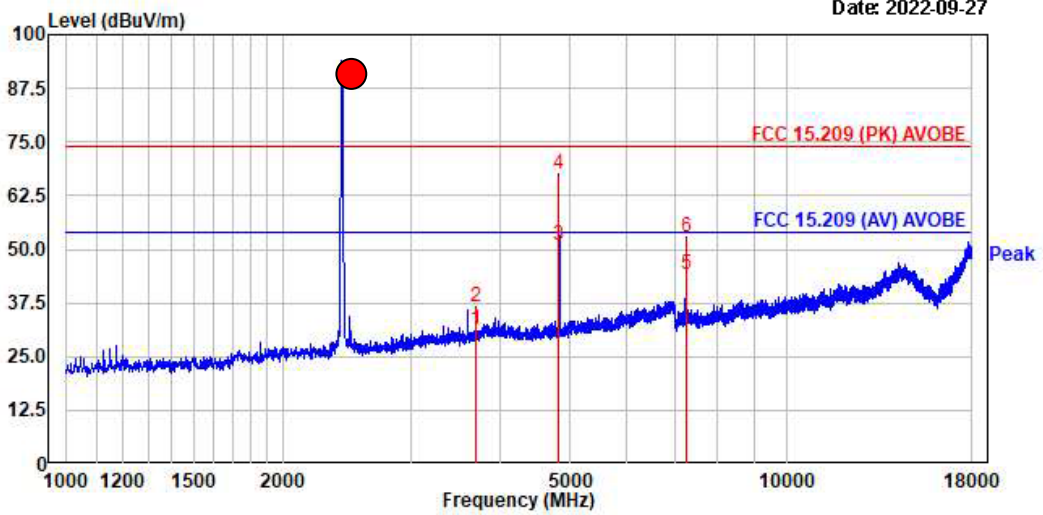

Date: 2022-09-27

No.	Freq MHz	RD		C.F dB	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBμV	AV dBμV		PK dBμV	AV dBμV	PK dB	AV dB					
2.	3698.75	34.47	29.40	1.97	36.44	31.37	74.00	54.00	37.56	22.63	100	356	horizontal
4.	4822.88	63.92	47.30	3.71	67.63	51.81	74.00	54.00	6.37	2.99	100	76	horizontal
6.	7234.75	44.15	35.20	8.80	52.95	44.00	74.00	54.00	21.05	10.00	100	76	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

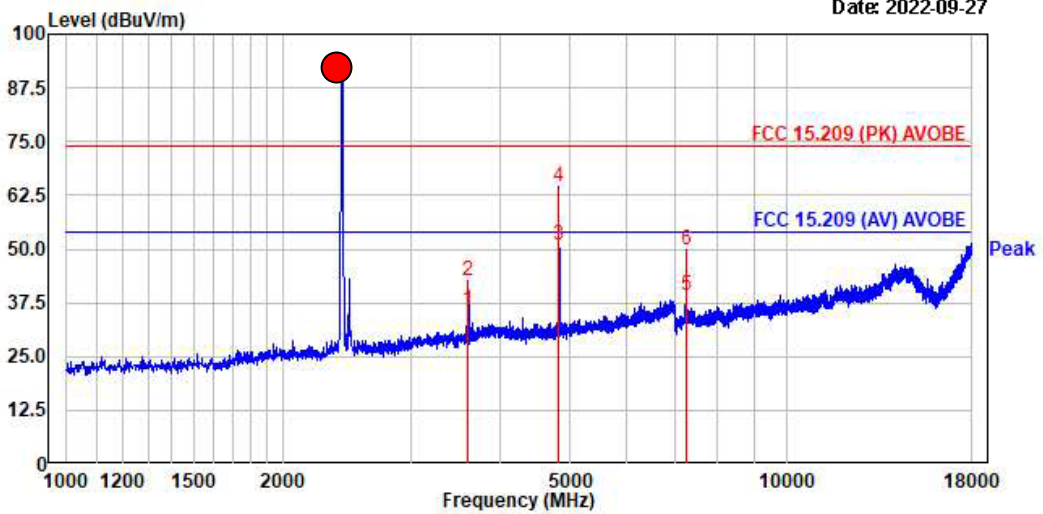


Date: 2022-09-27

No.	Freq MHz	RD		C.F dB	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBμV	AV dBμV		PK dBμV	AV dBμV	PK dB	AV dB					
2.	3607.38	41.21	34.30	1.37	42.58	35.67	74.00	54.00	31.42	18.33	100	360	vertical
4.	4822.88	60.73	47.40	3.71	64.44	51.11	74.00	54.00	9.56	2.89	100	202	vertical
6.	7234.75	41.04	30.50	8.80	49.84	39.30	74.00	54.00	24.16	14.70	100	202	vertical


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



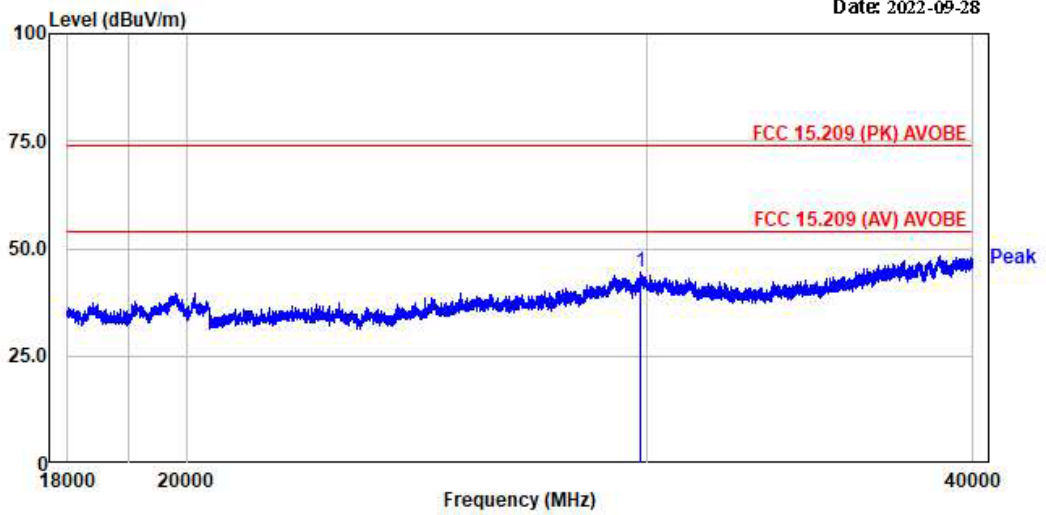

No.	Freq MHz	RD PK dBμV	RD AV dBμV	C.F dB	Result PK dBμV	Result AV dBμV	Limit PK dBμV	Limit AV dBμV	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
1.	29838.75	22.51	-----	21.90	44.41	-----	74.00	-----	29.59	-----	194	201	horizontal


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

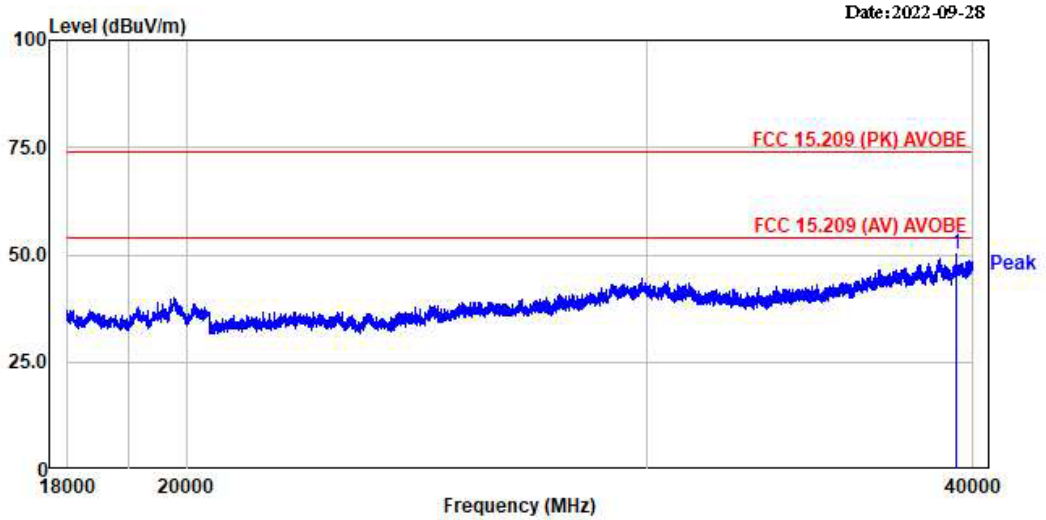

No.	Freq MHz	RD PK dBμV	RD AV dBμV	C.F dB	Result PK dBμV	Result AV dBμV	Limit PK dBμV	Limit AV dBμV	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
1.	39444.50	27.37	-----	22.74	50.11	-----	74.00	-----	23.89	-----	360	360	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


**Radiated Emissions – 802.11 g**

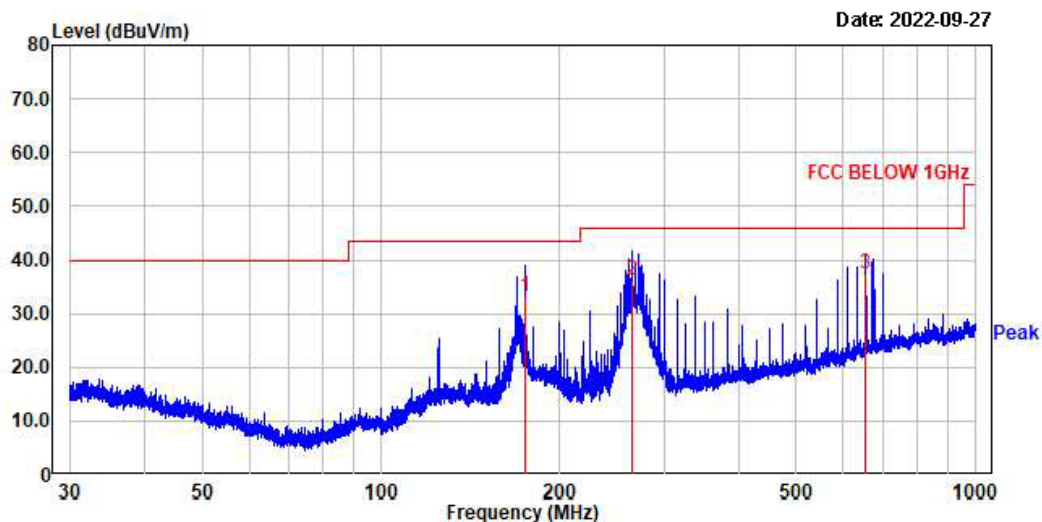

Trace:

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	175.04	42.39	-9.07	33.32	43.50	10.18	226	360	horizontal
2.	264.86	47.00	-10.78	36.22	46.00	9.78	100	168	horizontal
3.	654.81	40.70	-3.27	37.43	46.00	8.57	163	360	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

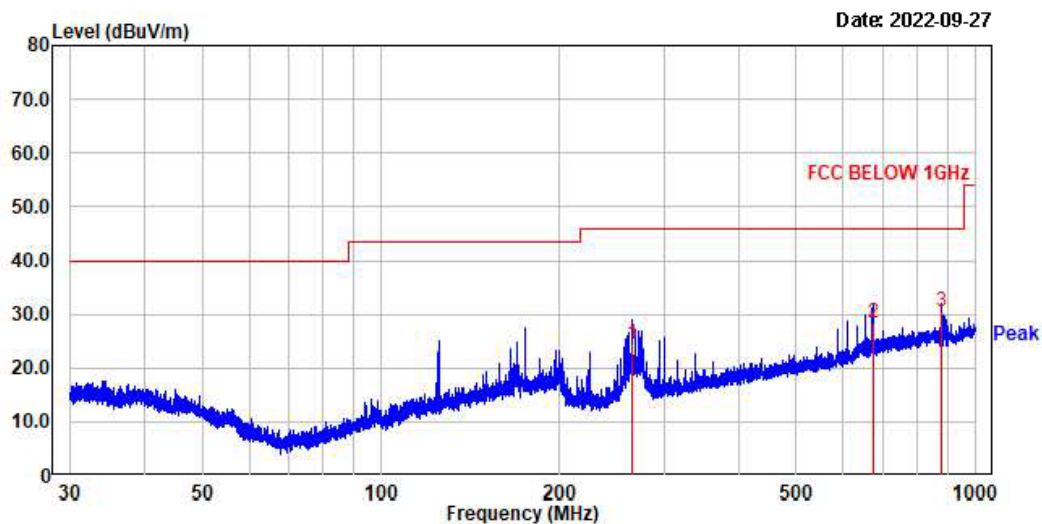


Trace:

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	264.86	35.40	-11.07	24.33	46.00	21.67	100	43	vertical
2.	672.25	31.01	-2.69	28.32	46.00	17.68	100	125	vertical
3.	876.01	30.60	-0.17	30.43	46.00	15.57	100	3	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2022-09-27

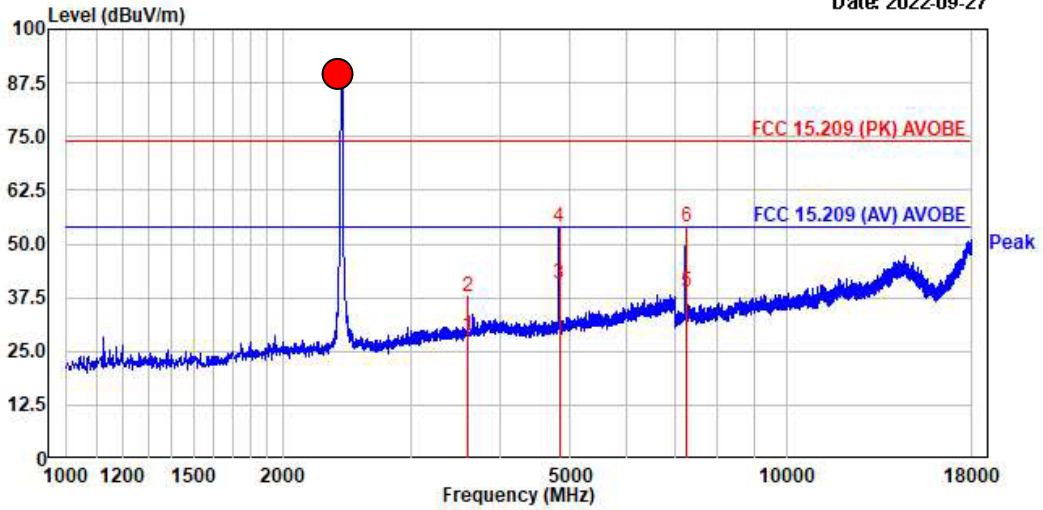

No.	Freq MHz	RD PK dBμV	RD AV dBμV	C.F dB	Result PK dBμV	Result AV dBμV	Limit PK dBμV	Limit AV dBμV	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
2.	3681.88	36.38	27.21	1.33	37.71	28.54	74.88	54.88	36.29	25.46	188	91	horizontal
4.	4829.25	58.18	36.91	3.72	53.98	48.63	74.88	54.88	28.18	13.37	188	91	horizontal
6.	7236.88	45.38	29.98	8.88	54.18	38.78	74.88	54.88	19.98	15.38	188	91	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2022-09-27

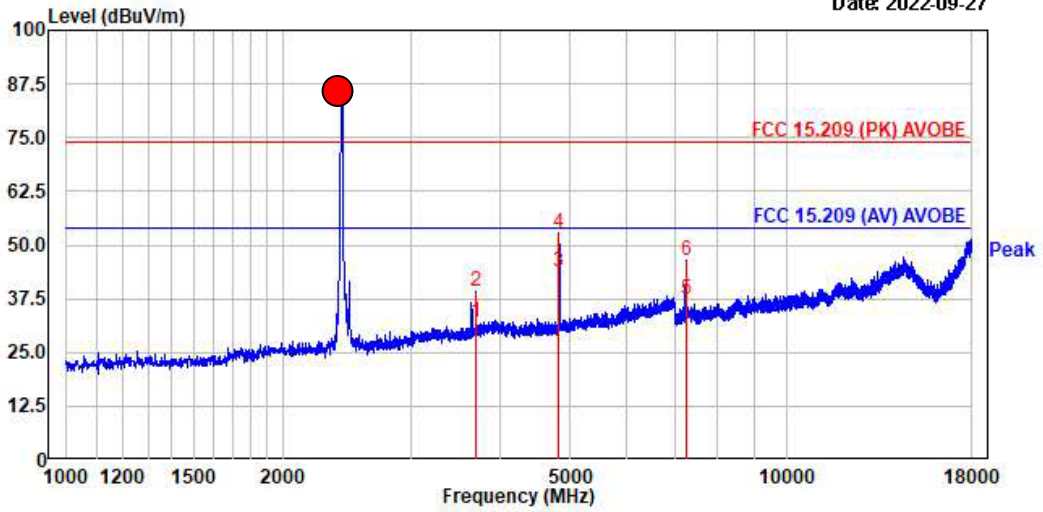

No.	Freq MHz	RD PK dBμV	RD AV dBμV	C.F dB	Result PK dBμV	Result AV dBμV	Limit PK dBμV	Limit AV dBμV	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
2.	3696.63	37.42	38.28	1.96	39.38	32.16	74.88	54.88	34.62	21.84	188	61	vertical
4.	4825.88	48.96	48.28	3.71	52.67	43.91	74.88	54.88	21.33	18.89	188	282	vertical
6.	7234.75	37.88	28.78	8.88	46.68	37.58	74.88	54.88	27.48	16.58	188	189	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2022-09-29

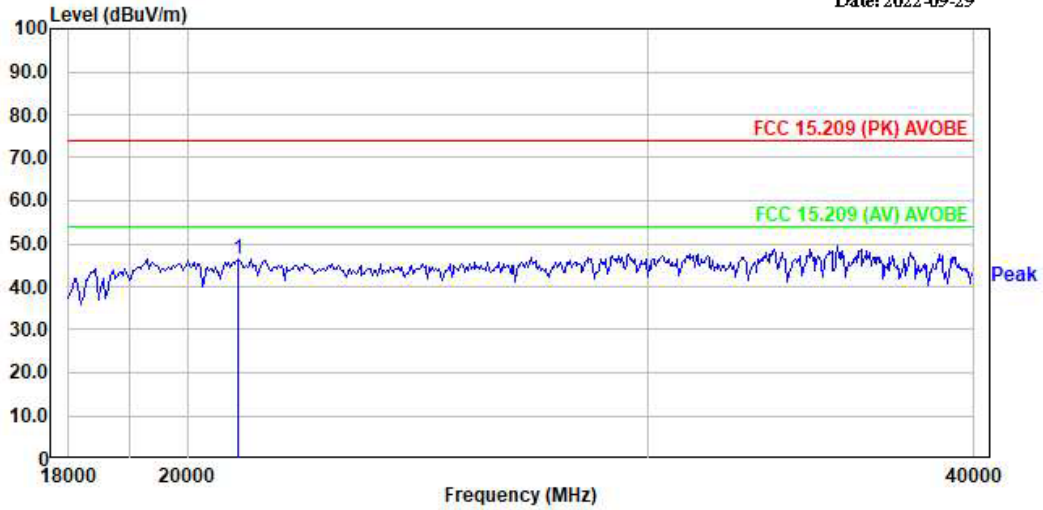

No.	Freq MHz	RD PK dBμV	RD AV dBμV	C.F dB	Result PK dBμV	Result AV dBμV	Limit PK dBμV	Limit AV dBμV	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
1.	20981.45	37.93	-----	8.64	46.57	-----	74.00	-----	27.43	-----	223	219	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Date: 2022-09-29

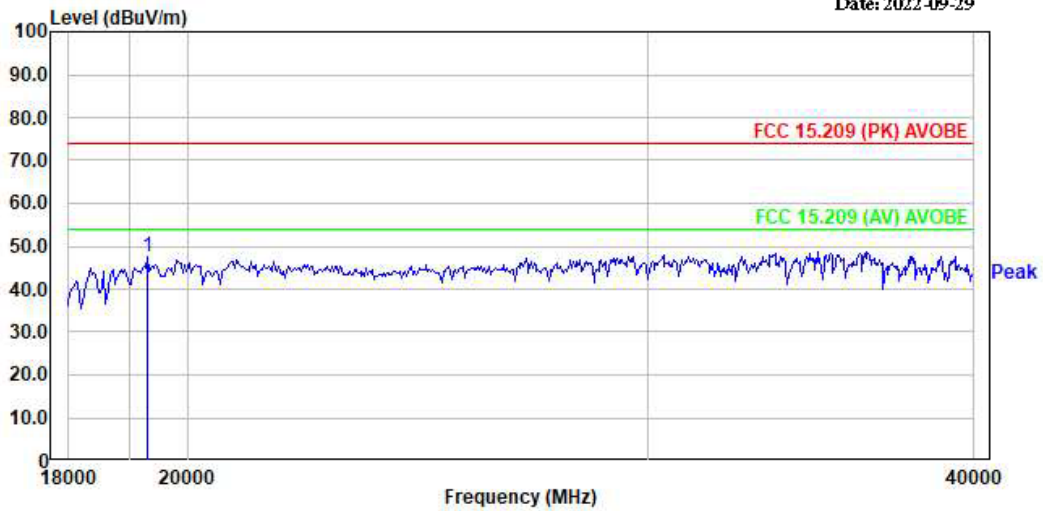


No.	Freq MHz	RD PK dBμV	RD AV dBμV	C.F dB	Result PK dBμV	Result AV dBμV	Limit PK dBμV	Limit AV dBμV	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
1.	19387.25	38.14	-----	9.23	47.37	-----	74.00	-----	26.63	-----	0	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


**Radiated Emissions – 802.11 n**

Date: 2022-09-27

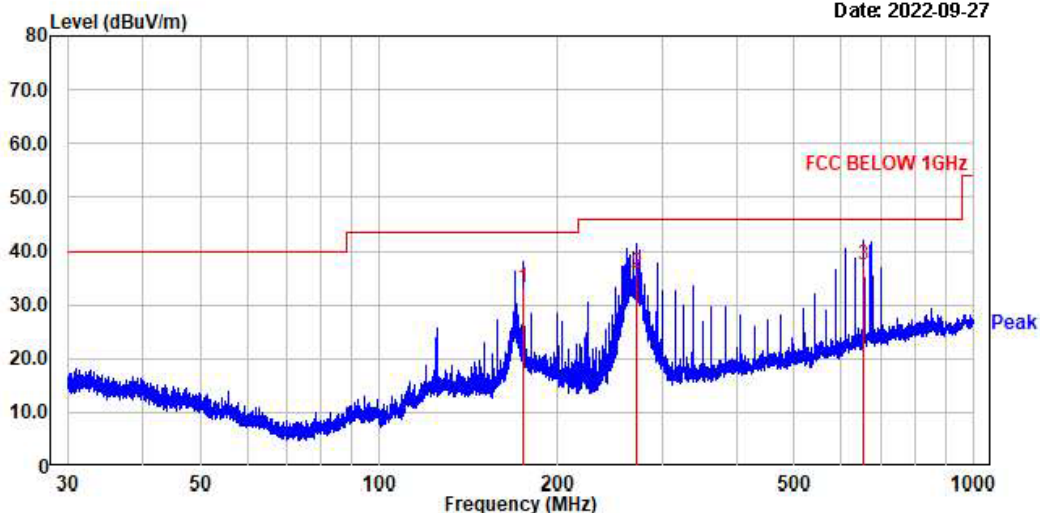

Trace:									
No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	175.04	42.39	-9.07	33.32	43.50	10.18	262	360	horizontal
2.	270.97	46.30	-10.47	35.83	46.00	10.17	100	16	horizontal
3.	654.81	40.70	-3.27	37.43	46.00	8.57	161	360	horizontal


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

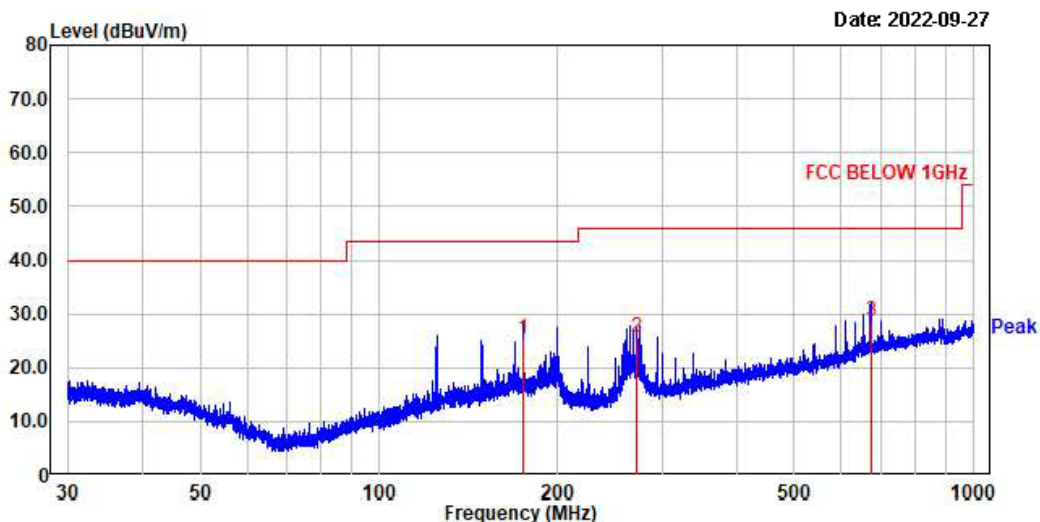

Trace:									
No.	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
1.	175.04	35.00	-9.78	25.22	43.50	18.28	100	78	vertical
2.	270.97	36.70	-10.95	25.75	46.00	20.25	100	227	vertical
3.	672.25	31.41	-2.69	28.72	46.00	17.28	100	144	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2022-09-27

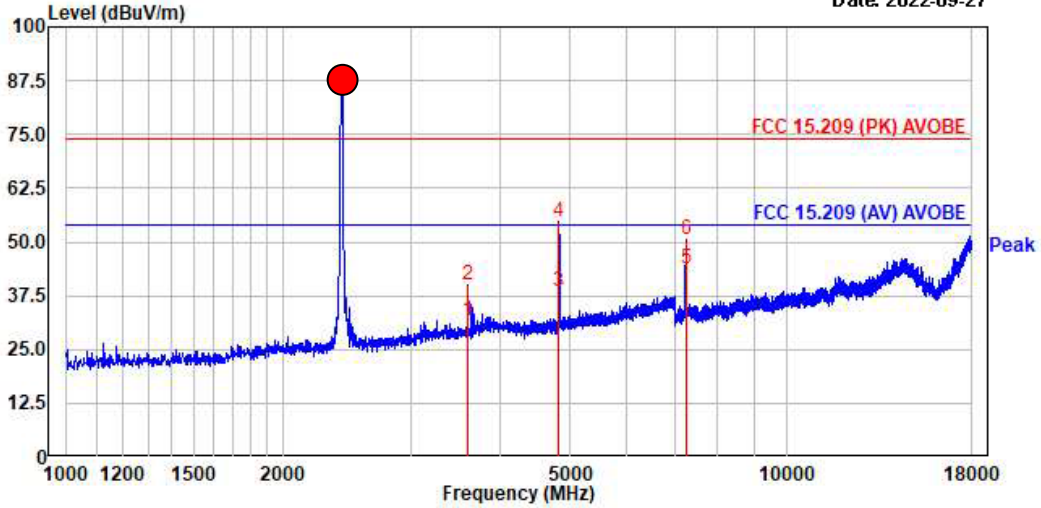

No.	Freq MHz	RD		C.F dB	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBµV	AV dBµV		PK dBµV	AV dBµV	PK dB	AV dB	PK dB	AV dB			
2.	3681.88	38.49	38.41	1.33	39.82	31.74	74.88	54.88	34.18	22.26	188	8	horizontal
4.	4818.63	51.18	34.69	3.78	54.88	38.39	74.88	54.88	19.12	15.61	188	75	horizontal
6.	7232.63	41.95	34.89	8.88	58.75	43.69	74.88	54.88	23.25	18.31	188	75	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2022-09-27

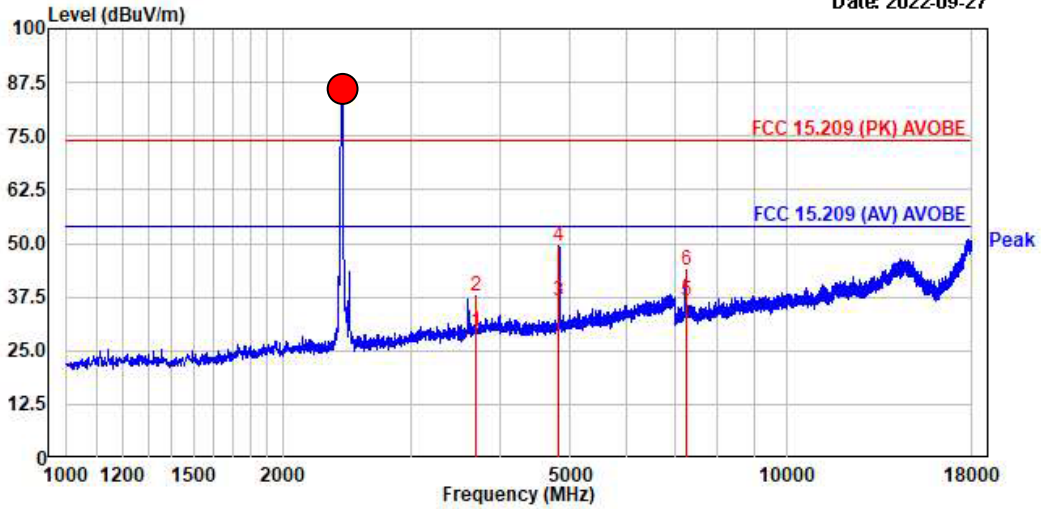

No.	Freq MHz	RD		C.F dB	Result		Limit		Margin		Height cm	Angle deg	Polarity
		PK dBµV	AV dBµV		PK dBµV	AV dBµV	PK dB	AV dB	PK dB	AV dB			
2.	3694.58	35.94	27.48	1.94	37.88	29.34	74.88	54.88	36.12	24.66	188	234	vertical
4.	4825.88	45.57	32.98	3.71	49.28	36.61	74.88	54.88	24.72	17.39	188	282	vertical
6.	7234.75	35.13	27.78	8.88	43.93	36.58	74.88	54.88	38.87	17.58	188	282	vertical


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



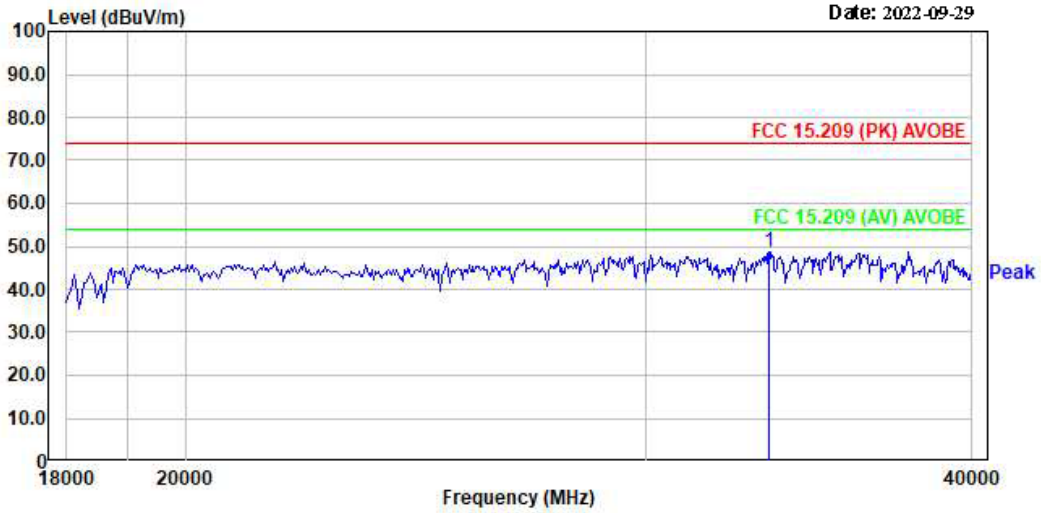

No.	Freq MHz	RD PK dB $\mu$ V	RD AV dB $\mu$ V	C.F dB	Result PK dB $\mu$ V	Result AV dB $\mu$ V	Limit PK dB $\mu$ V	Limit AV dB $\mu$ V	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
1.	33463.77	36.11	-----	12.75	48.86	-----	74.00	-----	25.14	-----	297	292	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

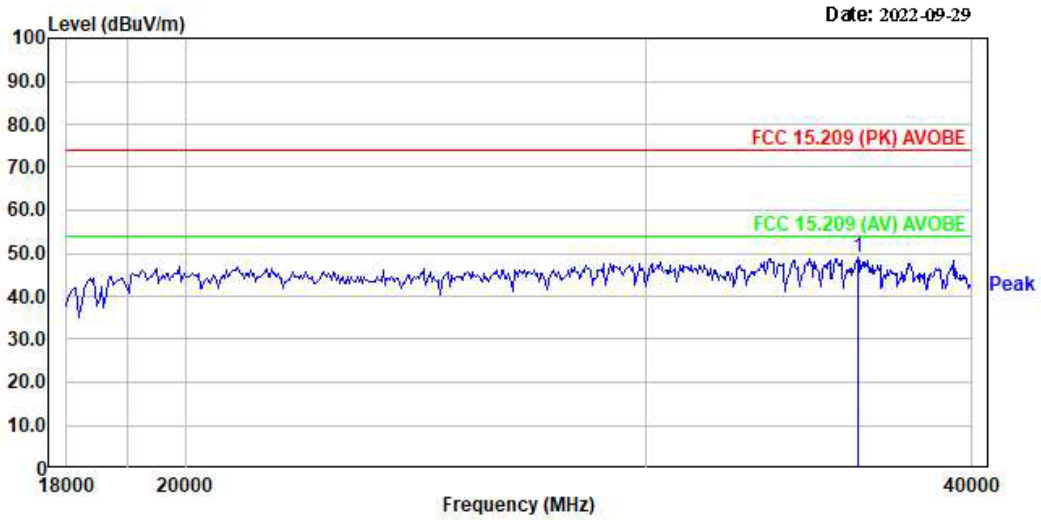

No.	Freq MHz	RD PK dB $\mu$ V	RD AV dB $\mu$ V	C.F dB	Result PK dB $\mu$ V	Result AV dB $\mu$ V	Limit PK dB $\mu$ V	Limit AV dB $\mu$ V	Margin PK dB	Margin AV dB	Height cm	Angle deg	Polarity
1.	36285.80	35.00	-----	13.97	48.97	-----	74.00	-----	25.03	-----	185	193	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.2.7 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

**Minimum Standard: FCC Part 15.207(a) / EN 55022**

**Measurement Data: N/A**

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency



**APPENDIX**  
**TEST EQUIPMENT USED FOR TESTS**

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2023-09-06
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2023-03-16
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2023-03-16
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2023-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2023-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2023-09-06
7	■	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2023-09-06
8	■	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2023-03-16
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2024-09-10
10	■	DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2024-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2024-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2023-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2023-03-16
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2023-03-16
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2023-09-06
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2023-09-06
20		Modulation Analyzer	8901B	3749A05878	HP	1 year	2023-09-06
21		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2023-09-06
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2024-03-18
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2023-03-16
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2023-03-16
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2023-03-16
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2023-03-16
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2023-03-16
28		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2023-03-16
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2023-03-16
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2023-03-16
31	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2023-09-07