

FCC TEST REPORT

FOR

Apulsetech Co., Ltd.

RFID Handheld Reader

Test Model: a811

Additional Model: α811

Prepared for : Apulsetech Co., Ltd.  
Address : C-1211, Gwangmyeongtechnopark, 60, Haan-ro, Gwangmyeong-si, Gyeonggi-do 14322, Republic of Korea

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Dec 20, 2017  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : Dec 20, 2017~Jan 16, 2018  
Date of Report : Feb 19, 2019

**FCC TEST REPORT  
FCC CFR 47 PART 15 C (15.225)**

**Report Reference No.** ..... : **LCS190130003AED**

**Date of Issue** ..... : Feb 19, 2019

**Testing Laboratory Name** ..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

**Address** ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

**Testing Location/ Procedure**..... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name**..... : **Apulsetech Co., Ltd.**

**Address** ..... : C-1211, Gwangmyeongtechnopark, 60, Haan-ro,  
Gwangmyeong-si, Gyeonggi-do 14322, Republic of Korea

**Test Specification**

**Standard**..... : FCC CFR 47 PART 15 C(15.225)

**Test Report Form No.**..... : LCSEMC-1.0


**TRF Originator** ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

**Master TRF** ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.** ..... : **RFID Handheld Reader**

**Trade Mark**..... :  Apulsetech

**Test Model** ..... : a811

**Ratings** ..... : DC 3.7V by Li-ion battery(6800mAh)  
Recharged by DC 5V/2A Adapter

**Result** ..... : **Positive**

**Compiled by:**

*Calvin Weng*

Calvin Weng/ Administrators

**Supervised by:**

*Leo Lee*

Calvin Weng/Technique principal

**Approved by:**

*Gavin Liang*

Gavin Liang/ Manager

### FCC -- TEST REPORT

<b>Test Report No. :</b> LCS190130003AED	Feb 19, 2019 Date of issue
--	-------------------------------

Test Model.....	: a811
EUT.....	: RFID Handheld Reader
<b>Applicant.....</b>	<b>: Apulsetech Co., Ltd.</b>
Address.....	: C-1211, Gwangmyeongtechnopark, 60, Haan-ro, Gwangmyeong-si, Gyeonggi-do 14322, Republic of Korea
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Apulsetech Co., Ltd.</b>
Address.....	: C-1211, Gwangmyeongtechnopark, 60, Haan-ro, Gwangmyeong-si, Gyeonggi-do 14322, Republic of Korea
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Apulsetech Co., Ltd.</b>
Address.....	: C-1211, Gwangmyeongtechnopark, 60, Haan-ro, Gwangmyeong-si, Gyeonggi-do 14322, Republic of Korea
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
000	Feb 19, 2019	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1 Description of Device (EUT) .....	6
1.2 Host System Configuration List and Details .....	7
1.3 External I/O .....	7
1.4 Description of Test Facility .....	7
1.5 Statement of The Measurement Uncertainty .....	7
1.6 Measurement Uncertainty .....	7
1.7 Description of Test Modes .....	8
<b>2. TEST METHODOLOGY .....</b>	<b>8</b>
2.1. EUT Configuration .....	8
2.2. EUT Exercise .....	8
2.3 General Test Procedures .....	8
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
3.1. Justification .....	9
3.2. EUT Exercise Software .....	9
3.3. Special Accessories .....	9
3.4. Block Diagram/Schematics .....	9
3.5. Equipment Modifications .....	9
3.6. Test Setup .....	9
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>5. RADIATED MEASUREMENT .....</b>	<b>11</b>
5.1. Radiated Emission .....	11
5.2. Field Strength of Fundamental Emissions and Mask Measurement .....	19
<b>6. BANDWIDTH OF THE OPERATING FREQUENCY .....</b>	<b>22</b>
6.1. Standard Applicable .....	22
6.2. Test Result .....	22
<b>7. FREQUENCY STABILITY MEASUREMENT .....</b>	<b>23</b>
7.1 Standard Applicable .....	23
7.2 Test Result .....	23
<b>8. LINE CONDUCTED EMISSIONS .....</b>	<b>24</b>
8.1. Standard Applicable .....	24
8.2. Block Diagram of Test Setup .....	24
8.3. Test Results .....	24
<b>9. ANTENNA REQUIREMENTS .....</b>	<b>26</b>
9.1 Standard Applicable .....	26
9.2 Antenna Connected Construction .....	26
<b>10. LIST OF MEASURING EQUIPMENTS .....</b>	<b>27</b>
<b>11. TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>28</b>
<b>12. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>28</b>
<b>13. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>28</b>

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

Name of EUT	RFID Handheld Reader
Model Number	a811, a811
Modulation Type	GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS
Antenna Gain	0.3dBi (max.) For GSM 850; 0.3dBi (max.) For GSM 900; 0.3dBi (max.) For DCS 1800; 0.3dBi (max.) For PCS 1900; 0.5dBi (max.) For WCDMA Band II; 0.5dBi (max.) For WCDMA Band V; 0dBi (max.) For BT, 2.4G WLAN & 5G WLAN 0dBi (max.) For NFC, RFID
Hardware version	ZH811F_Rev0.2
Software version	a811AV093T171208ALKRSTD
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
UMTS Operation Frequency Band	UMTS FDD Band II/V
LTE Operation Frequency Band	Not supported
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM Release Version	R99
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
GPRS operation mode	Class B
WCDMA Release Version	R99
HSDPA Release Version	Release 8
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
LTE Release Version	Not Supported
LTE/UMTS Power Class	Class 3
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20:OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40:OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20:OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT40:OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT80:OFDM (64QAM, 16QAM, QPSK,BPSK)
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz,5180-5240MHz,5745-5825MHz IEEE 802.11n HT40:2422-2452MHz,5190-5230MHz,5755-5795MHz IEEE 802.11a:5180-5240MHz, 5745-5825MHz IEEE 802.11ac VHT20:5180-5240MHz, 5745-5825MHz IEEE 802.11ac VHT40:5190-5230MHz, 5755-5795MHz IEEE 802.11ac VHT80:5210MHz
Antenna Type	PIFA Antenna for BT/WIFI/2G/3G/GPS/NFC, PCB antenna for RFID
BT Modulation Type	GFSK,8-DPSK, $\pi/4$ -DQPSK(BT V4.1)
Extreme temp. Tolerance	-30°C to +50°C
GPS function	Support and only RX

NFC Function	Support, 13.56MHz
RFID function	Support, 902.75MHz~927.25MHz(50 channels, spacing: 0.5MHz)
Extreme vol. Limits	3.20VDC to 4.20VDC (nominal: 3.70VDC)

## 1.2 Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

## 1.3 External I/O

I/O Port Description	Quantity	Cable
USB Port	4	N/A
Earphone	1	N/A
RJ45 Port	1	N/A
RS232 Port	1	N/A

## 1.4 Description of Test Facility

FCC Registration Number is 254912.

Industry Canada Registration Number is 9642A-1.

ESMD Registration Number is ARCB0108.

UL Registration Number is 100571-492.

TUV SUD Registration Number is SCN1081.

TUV RH Registration Number is UA 50296516-001

NVLAP Registration Code is 600167-0

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case;

AC conducted emission pre-test at both at power adapter and power from PC modes, recorded worst case;

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode.

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the RFID tag provided by client to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.225 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The sample will be controlled by Nfcutil.apk to enter RF test mode to control to TX for the purpose of the measurements.

#### 3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	PC	Lenovo	Ideapad	A131101550	/	/	DOC
2	Power adapter	Lenovo	CPA-A090	36200414	1.00m	unshielded	DOC

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
Test Items	FCC Rules	Result
Line Conducted Emissions	§15.207(a)	PASS
Field Strength of Fundamental Emissions	§15.225(a)(b)(c)	PASS
Radiated Emissions	§15.225(d) & §15.209	PASS
20dB Bandwidth	§ 2.1049	PASS
Frequency Stability	§15.225(e)	PASS
Antenna Requirement	§15.203	PASS

## 5. RADIATED MEASUREMENT

### 5.1. Radiated Emission

#### 5.1.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 5.1.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>m</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 5.1.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.1.4. Test Setup Layout

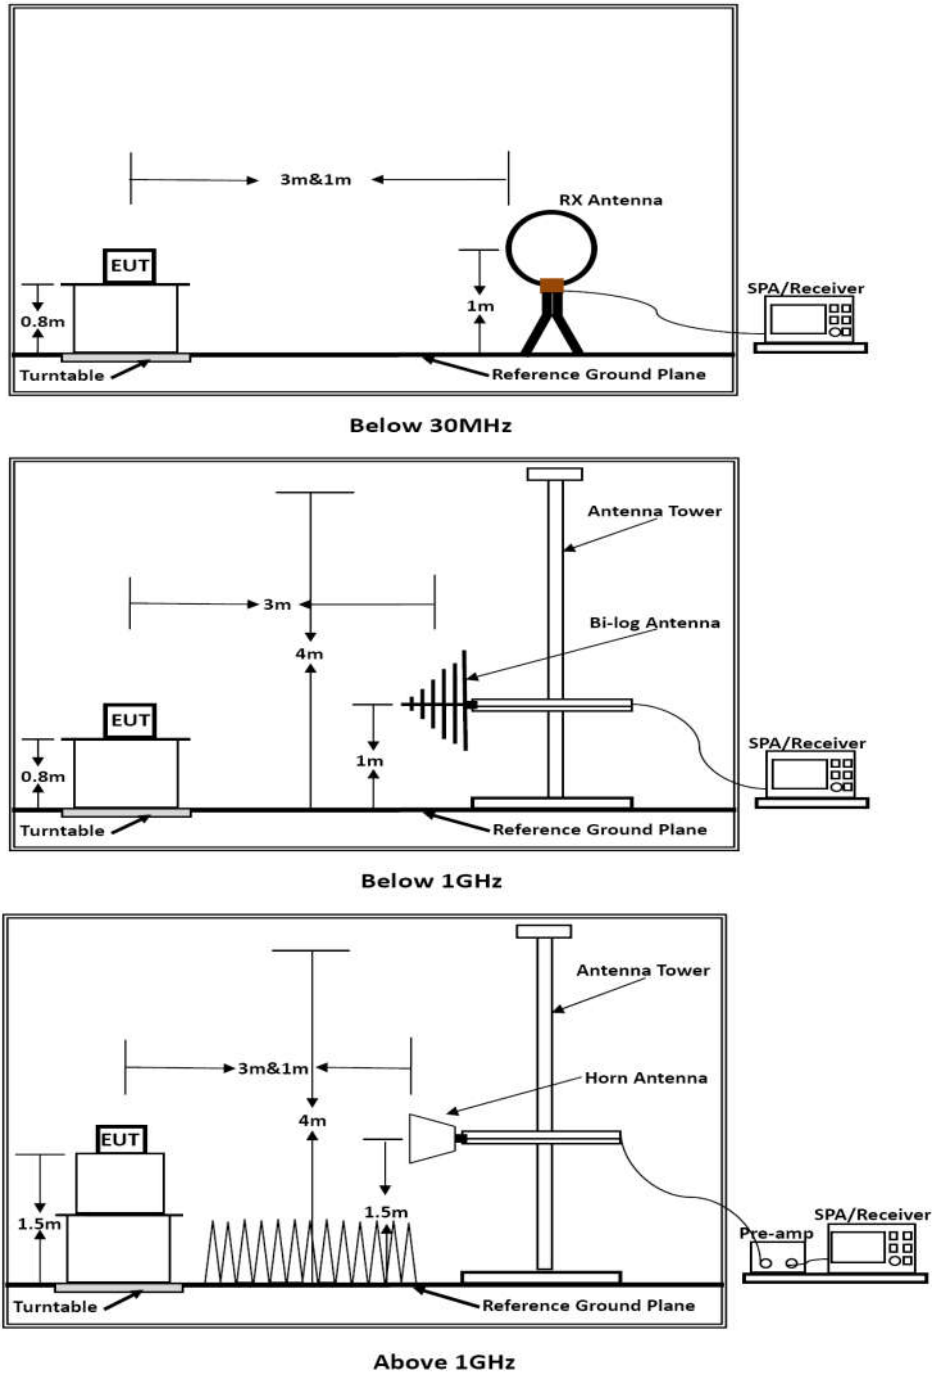

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.1.5. Test Results

PASS.

The test data please refer to following page:



**9 KHz~30MHz**

Note: Only recorded the worst test result.

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.36	--	--	--	96.57	--	--
0.54	--	--	--	72.94	--	--
5.06	32.32	20.30	52.62	69.5	-16.88	QP
10.76	30.51	20.32	50.83	69.5	-18.67	QP
13.56	30.55	20.18	50.73	124	-73.27	QP
17.54	31.51	20.12	51.63	69.5	-17.87	QP
20.45	33.49	19.94	53.43	69.5	-16.07	QP
24.92	34.44	19.95	54.39	69.5	-15.11	QP


\*Note: Emission Level= Reading Level + Antenna Factor + Cable Loss

Margin = Emission Limit – Emission Values

“--” means noise floor.

**30MHz ~ 1GHz**


Horizontal:

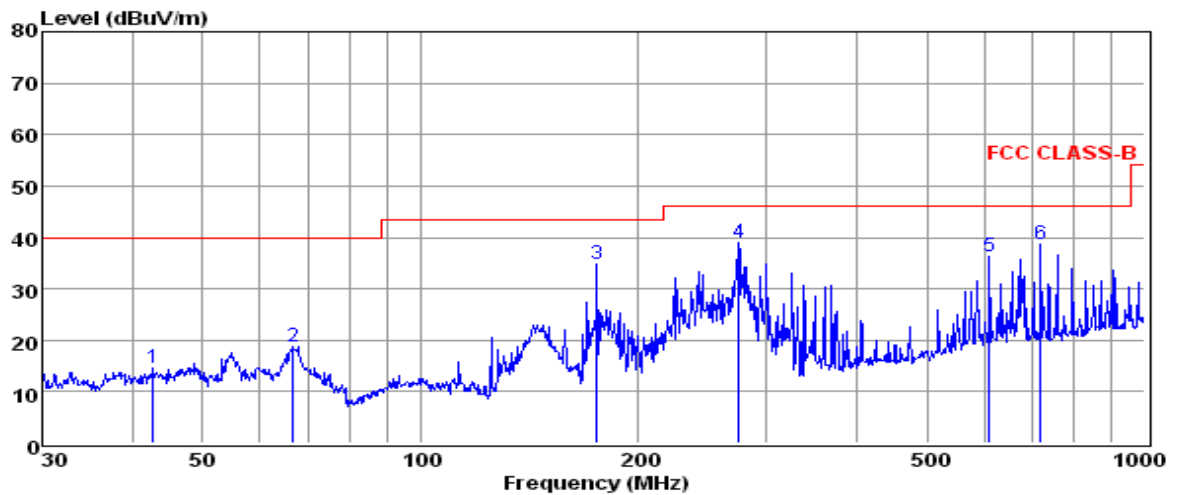

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	42.75	0.58	0.50	13.56	14.64	40.00	-25.36	QP
2	66.73	8.09	0.52	10.00	18.61	40.00	-21.39	QP
3	175.04	24.86	0.73	9.33	34.92	43.50	-8.58	QP
4	275.16	25.50	1.00	12.52	39.02	46.00	-6.98	QP
5	609.92	16.35	1.45	18.49	36.29	46.00	-9.71	QP
6	719.20	17.72	1.75	19.05	38.52	46.00	-7.48	QP

- Note: 1. All readings are Quasi-peak values.
- 2. Measured= Reading + Antenna Factor + Cable Loss
- 3. The emission that are 20db below the official limit are not reported

Vertical:

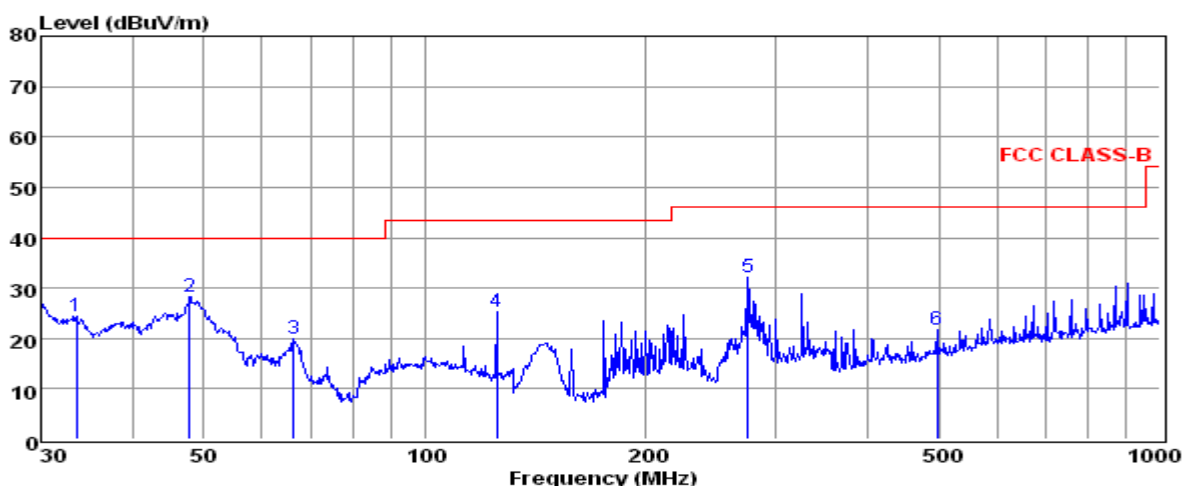

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	33.56	11.73	0.37	12.31	24.41	40.00	-15.59	QP
2	47.83	14.40	0.35	13.38	28.13	40.00	-11.87	QP
3	66.27	9.11	0.52	10.19	19.82	40.00	-20.18	QP
4	125.01	14.91	0.71	9.70	25.32	43.50	-18.18	QP
5	275.16	18.50	1.00	12.52	32.02	46.00	-13.98	QP
6	497.68	3.72	1.34	16.52	21.58	46.00	-24.42	QP

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that ate 20db blow the official limit are not reported

Note:


Pre-scan all modes and recorded the worst case results in this report.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

## 5.2. Field Strength of Fundamental Emissions and Mask Measurement

### 5.2.1. Block Diagram of Test Setup

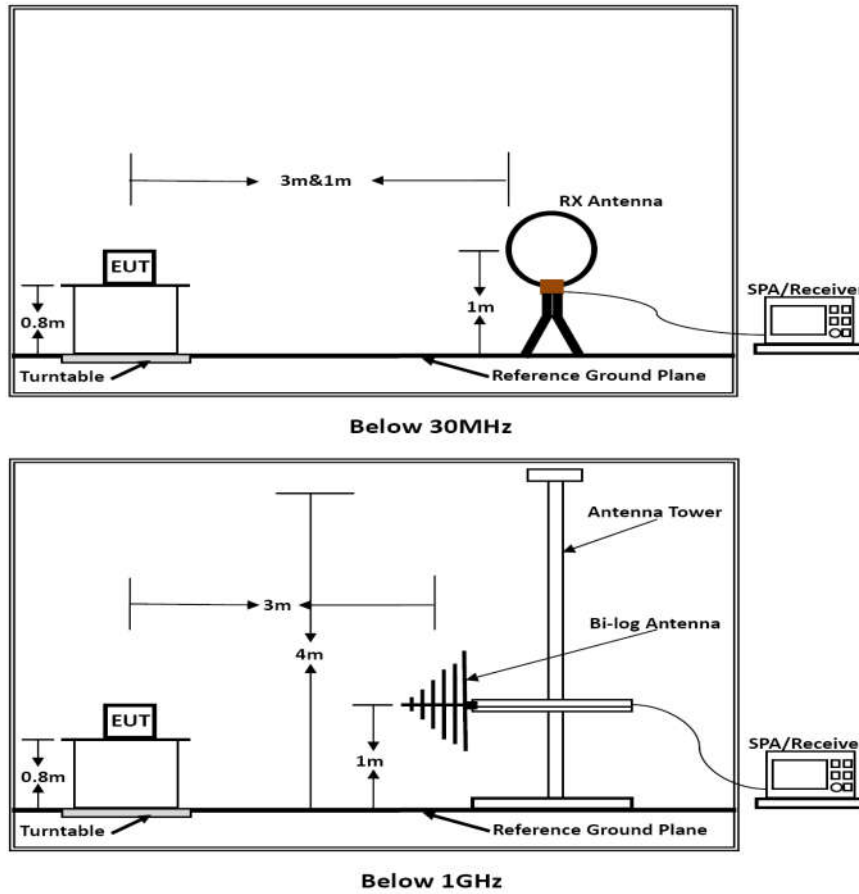

### 5.2.2. Field strength of fundamental emissions limit and Mask limit

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dB $\mu$ V/m) at 10m	Field Strength (dB $\mu$ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask Limit:


Frequency (MHz)	Limit (dB $\mu$ V/m)	Distance (m)
1.705-13.110	69.5	3
13.110-13.410	80.5	3
13.410-13.553	90.5	3
13.553-13.567	124.0	3
13.567-13.710	90.5	3
13.710-14.010	80.5	3
14.010-30.000	69.5	3

### 5.2.3. Test Results

PASS.

The test data please refer to following page:

90 Degree

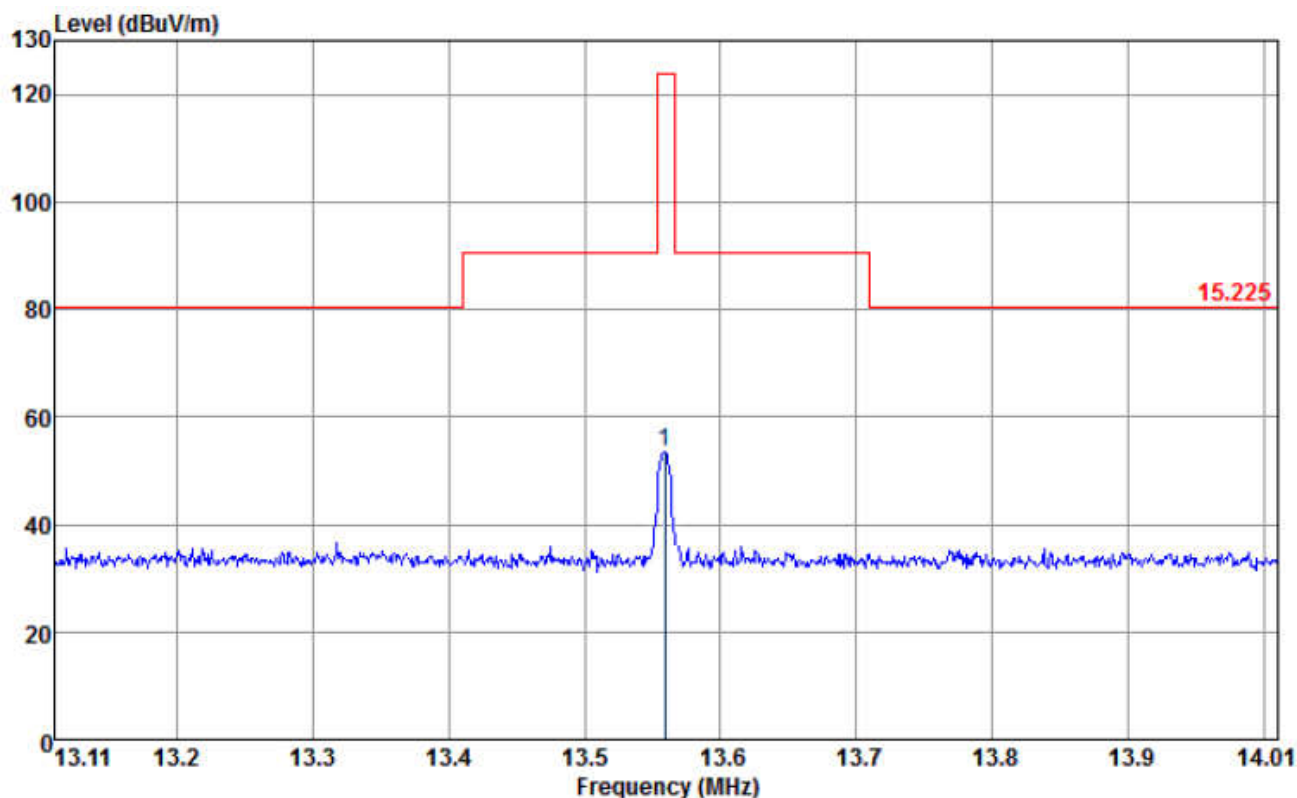

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Pol.	Remark
1	13.56	43.46	20.86	64.32	124	H	QP


\*Note: Factor= Antenna Factor + Cable Loss

Emission level (dBμV/m) = 20 log Emission level (μV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

0 Degree

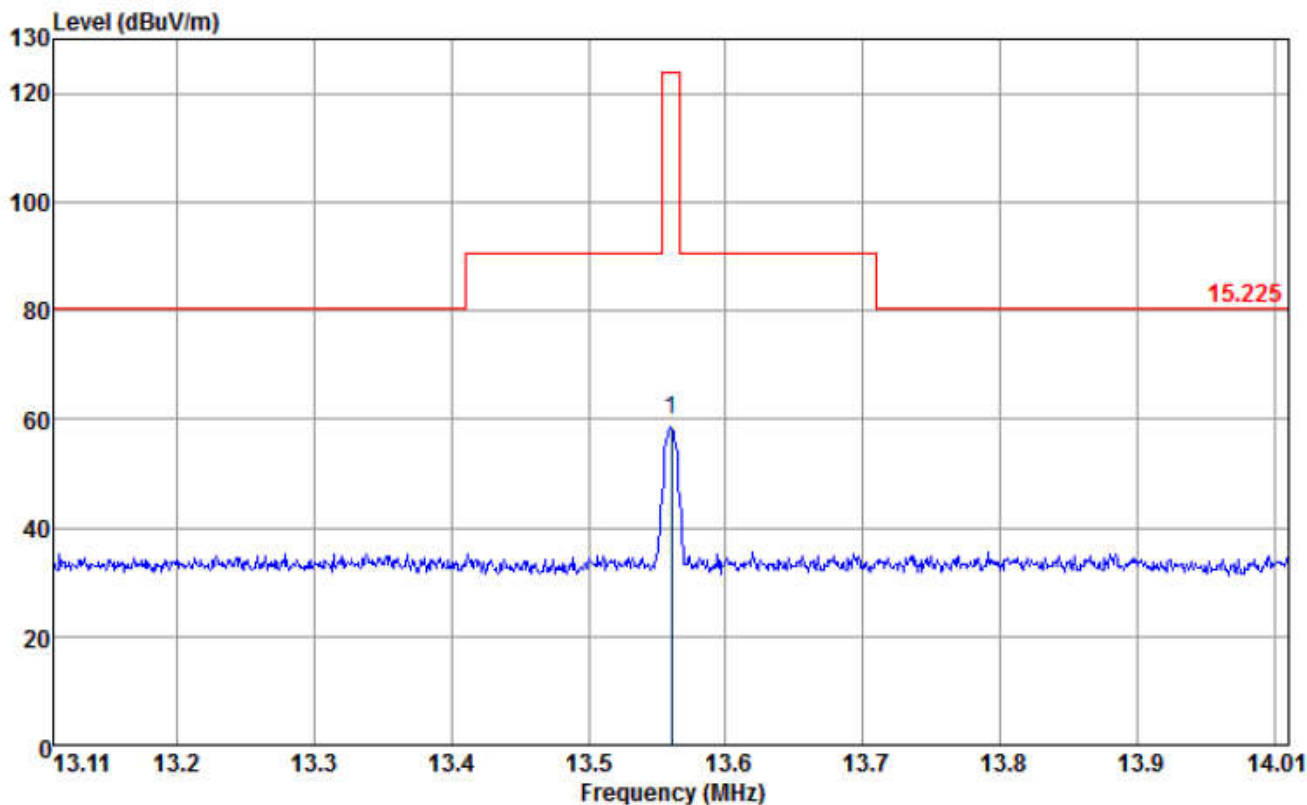

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Pol.	Remark
1	13.56	58.05	10.86	68.91	124	H	QP

\*Note: Factor= Antenna Factor + Cable Loss

Emission level (dBµV/m) = 20 log Emission level (µV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

## 6. BANDWIDTH OF THE OPERATING FREQUENCY


### 6.1. Standard Applicable

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

### 6.2. Test Result

EUT	RFID Handheld Reader
RBW	100Hz
VBW	100Hz
SPAN	500Hz
Carrier Frequency (MHz)	20dB Bandwidth (KHz)
13.56	0.247

Please refer to the test plot:

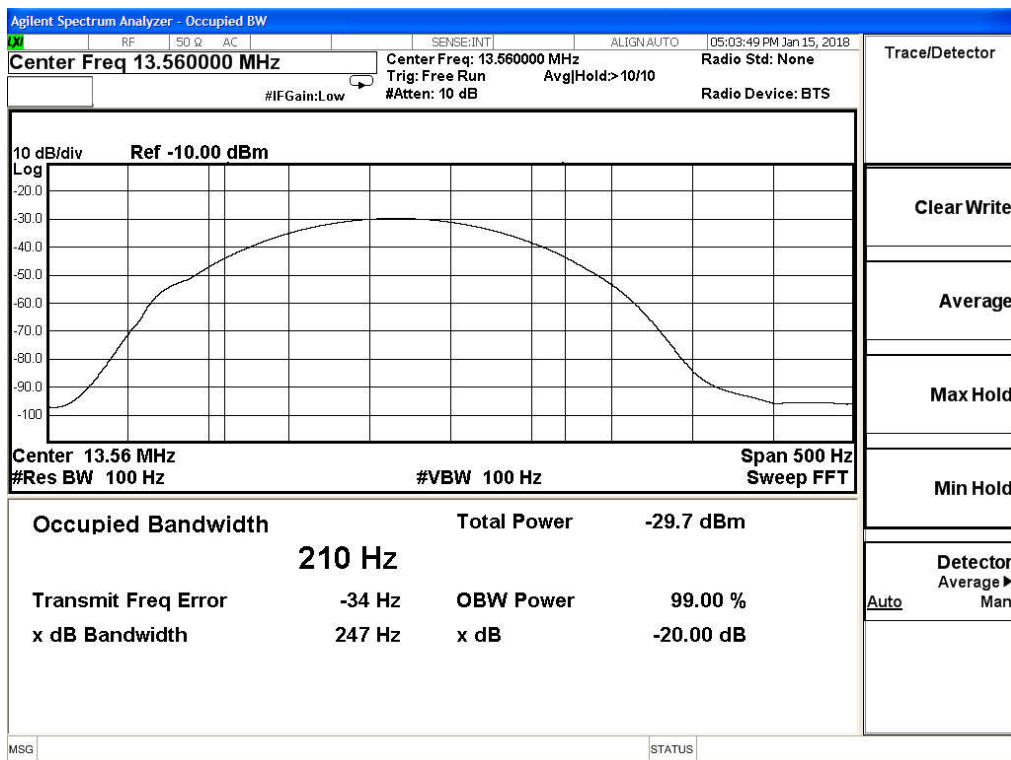

## 7. FREQUENCY STABILITY MEASUREMENT

### 7.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a full charged battery.

### 7.2 Test Result

#### Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)
AC 3.70V	13.56035
AC 3.40V	13.56031
AC 4.20V	13.56030
Max. Deviation (MHz)	0.00035
Max. Deviation (ppm)	35.8112

#### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-20	13.56031
-10	13.56028
0	13.56035
10	13.56033
20	13.56039
30	13.56031
40	13.56038
50	13.56035
Max. Deviation (MHz)	0.00039
Max. Deviation (ppm)	28.7611

## 8. LINE CONDUCTED EMISSIONS


### 8.1. Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 8.2. Block Diagram of Test Setup

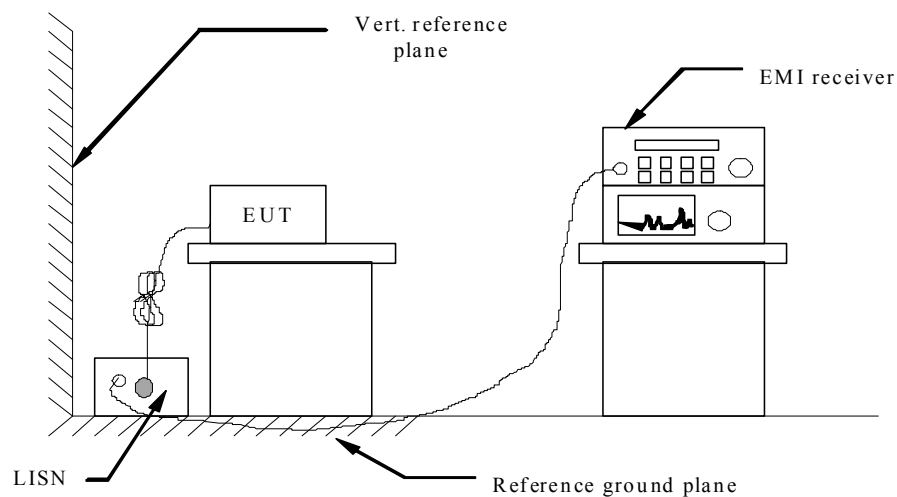

### 8.3. Test Results


**PASS.**

The test data please refer to following page.



**AC Conducted Emission of power adapter @ AC 120V/60Hz (worst case)**


Line

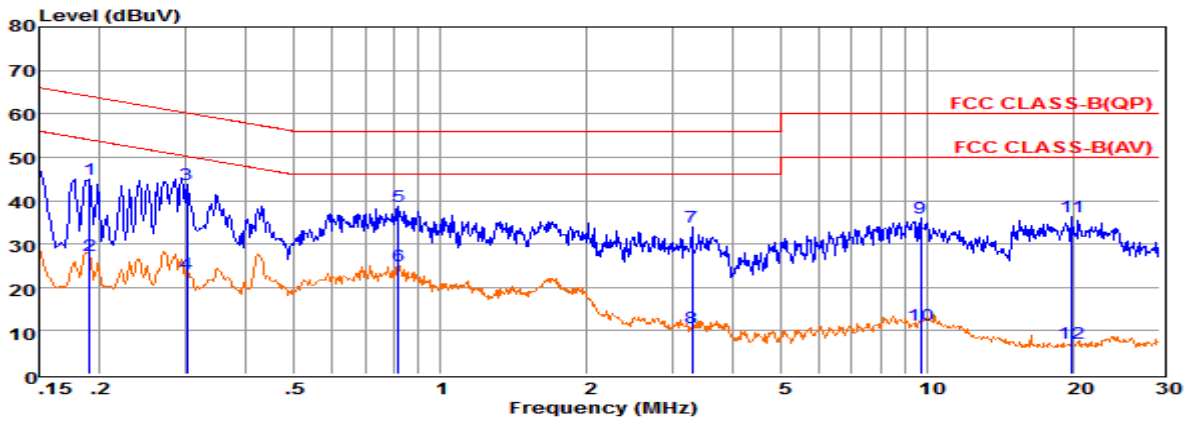

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	25.36	9.62	0.02	10.00	45.00	64.02	-19.02	QP
2	0.19	7.62	9.62	0.02	10.00	27.26	54.02	-26.76	Average
3	0.30	24.06	9.63	0.03	10.00	43.72	60.19	-16.47	QP
4	0.30	3.52	9.63	0.03	10.00	23.18	50.19	-27.01	Average
5	0.82	18.95	9.64	0.04	10.00	38.63	56.00	-17.37	QP
6	0.82	5.17	9.64	0.04	10.00	24.85	46.00	-21.15	Average
7	3.29	14.05	9.65	0.06	10.00	33.76	56.00	-22.24	QP
8	3.29	-8.92	9.65	0.06	10.00	10.79	46.00	-35.21	Average
9	9.71	16.29	9.69	0.08	10.00	36.06	60.00	-23.94	QP
10	9.71	-8.43	9.69	0.08	10.00	11.34	50.00	-38.66	Average
11	19.84	16.49	9.76	0.12	10.00	36.37	60.00	-23.63	QP
12	19.85	-12.64	9.76	0.12	10.00	7.24	50.00	-42.76	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral

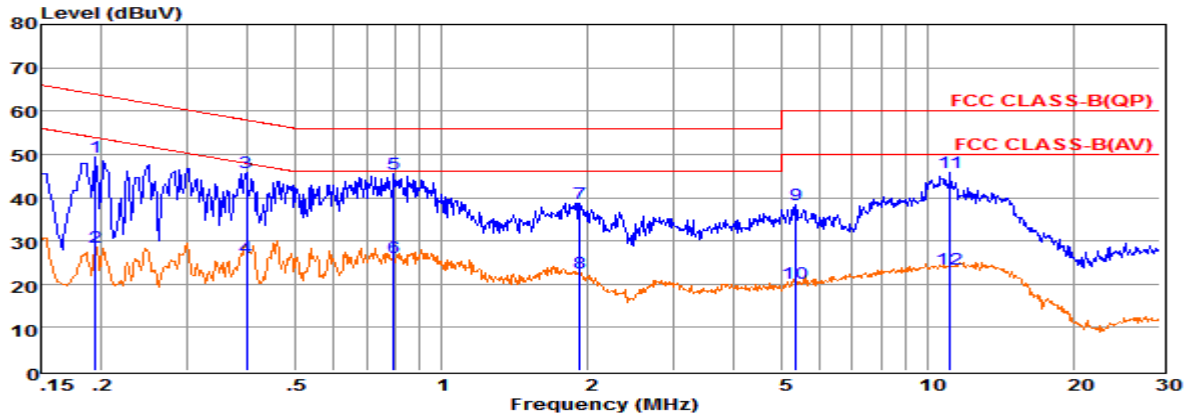

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.19	29.82	9.60	0.02	10.00	49.44	63.84	-14.40	QP
2	0.19	8.78	9.60	0.02	10.00	28.40	53.84	-25.44	Average
3	0.40	26.21	9.61	0.04	10.00	45.86	57.90	-12.04	QP
4	0.40	6.40	9.61	0.04	10.00	26.05	47.90	-21.85	Average
5	0.80	25.75	9.63	0.04	10.00	45.42	56.00	-10.58	QP
6	0.80	6.55	9.63	0.04	10.00	26.22	46.00	-19.78	Average
7	1.93	19.11	9.63	0.05	10.00	38.79	56.00	-17.21	QP
8	1.93	2.84	9.63	0.05	10.00	22.52	46.00	-23.48	Average
9	5.36	18.54	9.67	0.06	10.00	38.27	60.00	-21.73	QP
10	5.36	0.54	9.67	0.06	10.00	20.27	50.00	-29.73	Average
11	11.14	25.85	9.73	0.09	10.00	45.67	60.00	-14.33	QP
12	11.14	3.80	9.73	0.09	10.00	23.62	50.00	-26.38	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 9. ANTENNA REQUIREMENTS

### 9.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 9.2 Antenna Connected Construction

#### 9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 0dBi, and the antenna is a Loop antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 9.2.3. Results: Compliance.

**10. LIST OF MEASURING EQUIPMENTS**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R & S	NRVS	100444	2017-06-17	2018-06-16
2	Power Sensor	R & S	NRV-Z81	100458	2017-06-17	2018-06-16
3	Power Sensor	R & S	NRV-Z32	10057	2017-06-17	2018-06-16
4	EPM Series Power Meter	Agilent	E4419B	MY45104493	2017-06-17	2018-06-16
5	E-SERIES AVG POWER SENSOR	Agilent	E9301H	MY41495234	2017-06-17	2018-06-16
6	ESA-E SERIES SPECTRUM ANALYZER	Agilent	E4407B	MY41440754	2017-11-18	2018-11-17
7	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2017-06-17	2018-06-16
8	SPECTRUM ANALYZER	R&S	FSP	100503	2017-06-17	2018-06-16
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2017-06-17	2018-06-16
10	Positioning Controller	MF	MF-7082	/	2017-06-17	2018-06-16
11	EMI Test Software	AUDIX	E3	N/A	2017-06-17	2018-06-16
12	EMI Test Receiver	R & S	ESR 7	101181	2017-06-17	2018-06-16
13	AMPLIFIER	QuieTek	QTK-A2525G	CHM10809065	2017-11-18	2018-11-17
14	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2017-06-23	2018-06-22
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2017-05-02	2018-05-01
16	Horn Antenna	EMCO	3115	6741	2017-06-23	2018-06-22
17	RF Cable-R03m	Jye Bao	RG142	CB021	2017-06-17	2018-06-16
18	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2017-06-17	2018-06-16
19	TEST RECEIVER	R&S	ESCI	101142	2017-06-17	2018-06-16
20	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	2017-06-17	2018-06-16
21	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-0032	2017-06-17	2018-06-16
22	Artificial Mains	R&S	ENV216	101288	2017-06-17	2018-06-16
23	X-series USB Peak and Average Power Sensor Agilent	Agilent	U2021XA	MY54080022	2017-10-27	2018-10-26
24	4 CH. Simultaneous Sampling 14 Bits 2MS/s	Agilent	U2531A	MY54080016	2017-10-27	2018-10-26
25	Test Software	Ascentest	AT890-SW	20160630	N/A	N/A
26	RF Control Unit	Ascentest	AT890-RFB	N/A	2017-06-17	2018-06-16
27	Universal Radio Communication Tester	R&S	CMU 200	105788	2017-06-17	2018-06-16
28	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2017-06-17	2018-06-16
29	RF Control Unit	Tonscend	JS0806-1	N/A	2017-06-17	2018-06-16
30	DC Power Supply	Agilent	E3642A	N/A	2017-11-18	2018-11-17
31	LTE Test Software	Tonscend	JS1120-1	N/A	N/A	N/A

## **11. Test Setup Photographs of eut**

Please refer to separate file for test setup photographs.

## **12. Exterior Photographs of the eut**

Please refer to separate file for exterior photographs of eut.

## **13. Interior Photographs of the eut**

Please refer to separate file for interior photographs of eut.

-----THE END OF REPORT-----