

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

TZUMI Electronics,LLC

ionvac UltraClean UV sanitizing robo vac (Robotic Vacuum Cleaner)

Model Number: 8063

Additional Model: 8063WM

FCC ID: 2AON7-WJ8063TZUMI

Prepared for:	TZUMI Electronics,LLC
	16 EAST 34TH STREET 16TH FLOOR, New York 10016, United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808



Report Number:	ESTE-R2101074
Date of Test:	Dec. 25, 2020~Jan. 18, 2021
Date of Report:	Jan. 20, 2021

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Antenna Information.....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty.....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram.....	8
2.6. Test Mode.....	9
2.7. Power Setting of Test Software.....	10
2.8. Duty Cycle.....	10
2.9. Channel List.....	13
2.10. Test Equipment List.....	14
3. 6DB BANDWIDTH.....	15
3.1. Limit.....	15
3.2. Test Setup.....	15
3.3. Spectrum Analyzer Setting.....	15
3.4. Test Procedure.....	15
3.5. Test Result.....	16
4. MAXIMUM PEAK OUTPUT POWER.....	23
4.1. Limit.....	23
4.2. Test Setup.....	23
4.3. Spectrum Analyzer Setting.....	23
4.4. Test Procedure.....	23
4.5. Test Result.....	24
5. POWER SPECTRAL DENSITY.....	31
5.1. Limit.....	31
5.2. Test Setup.....	31
5.3. Spectrum Analyzer Setting.....	31
5.4. Test Procedure.....	31
5.5. Test Result.....	32
6. CONDUCTED BAND EDGE.....	39
6.1. Limit.....	39
6.2. Test Setup.....	39
6.3. Spectrum Analyzer Setting.....	39
6.4. Test Procedure.....	39
6.5. Test Result.....	40
7. CONDUCTED SPURIOUS EMISSIONS.....	41
7.1. Limit.....	41
7.2. Test Setup.....	41
7.3. Spectrum Analyzer Setting.....	41
7.4. Test Procedure.....	41

- 7.5. Test Result..... 42
- 8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE44
 - 8.1. Limit..... 44
 - 8.2. Test setup..... 45
 - 8.3. Spectrum Analyzer Setting..... 46
 - 8.4. Test Procedure..... 47
 - 8.5. Test Result..... 48
- 9. AC POWER LINE CONDUCTED EMISSIONS 60
 - 9.1. Limit..... 60
 - 9.2. Test Setup..... 60
 - 9.3. Spectrum Analyzer Setting..... 60
 - 9.4. Test Procedure..... 60
 - 9.5. Test Result..... 61
- 10. ANTENNA REQUIREMENTS 65
 - 10.1. Limit..... 65
 - 10.2. Test Result..... 65
- 11. TEST SETUP PHOTO 66
- 12. EUT PHOTO..... 68

EST Technology Co., Ltd.

Applicant:	TZUMI Electronics,LLC		
Address:	16 EAST 34TH STREET 16TH FLOOR, New York 10016, United States		
Manufacturer:	TZUMI Electronics,LLC		
Address:	16 EAST 34TH STREET 16TH FLOOR, New York 10016, United States		
E.U.T:	ionvac UltraClean UV sanitizing robo vac (Robotic Vacuum Cleaner)		
Model Number:	8063		
Additional Model:	8063WM Note: They are identical except model name only.		
Power Supply:	DC 19V From Adapter Input AC 100-240V~50/60Hz; DC 14.4V From Battery		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Dec. 25, 2020	Date of Test:	Dec. 25, 2020~Jan. 18, 2021
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
Prepared by:	Reviewed by:	Date: Jan. 20, 2021	
 Ring Yang / Assistant	 Seven Wang / Engineer	 Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	ionvac UltraClean UV sanitizing robo vac
Model Number	:	8063
Software Version	:	J090_V1.0.5 TestUse.bin
Hardware Version	:	J090_V1.1_20201211
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b: 11 Channels IEEE 802.11g: 11 Channels IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b: 15.71dBm IEEE 802.11g: 20.11dBm IEEE 802.11n HT20: 20.61dBm IEEE 802.11n HT40: 17.52dBm
Modulation Type	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	PCB	-	2.5

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth	15.247(a)(2)	PASS
4	Maximum Peak Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	PASS
10	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.:C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 25GHz)	±4.96dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	-	NLB060190W1A5S58	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.1 meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.



(EUT: ionvac UltraClean UV sanitizing robo vac)

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Maximum Peak Output Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Power Spectral Density	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Conducted Band Edge	IEEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS0	Low/ High
	IEEE 802.11n HT40	MCS0	Low/ High
Conducted Spurious Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Band Edge	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X, Y, Z), the worst case was found when positioned on **X-plane**.

2.7. Power Setting of Test Software

Software Name	UI_mptool_1V16		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	Default	Default	60
IEEE 802.11g Setting	Default	Default	Default
IEEE 802.11n HT20 Setting	Default	Default	Default
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	Default	Default	Default


2.8. Duty Cycle

Temperature	21.8°C	Relative Humidity	51%	Test Voltage	AC 120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle(%)	Duty Factor(dB)
IEEE 802.11b	2437	12.4928	12.5507	99.54	0.00
IEEE 802.11g	2437	2.1014	2.2029	95.39	0.20
IEEE 802.11n HT20	2437	1.9478	2.0522	94.91	0.23
IEEE 802.11n HT40	2437	0.9565	1.0783	88.71	0.52


Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle \geq 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).


IEEE 802.11b 2437MHz

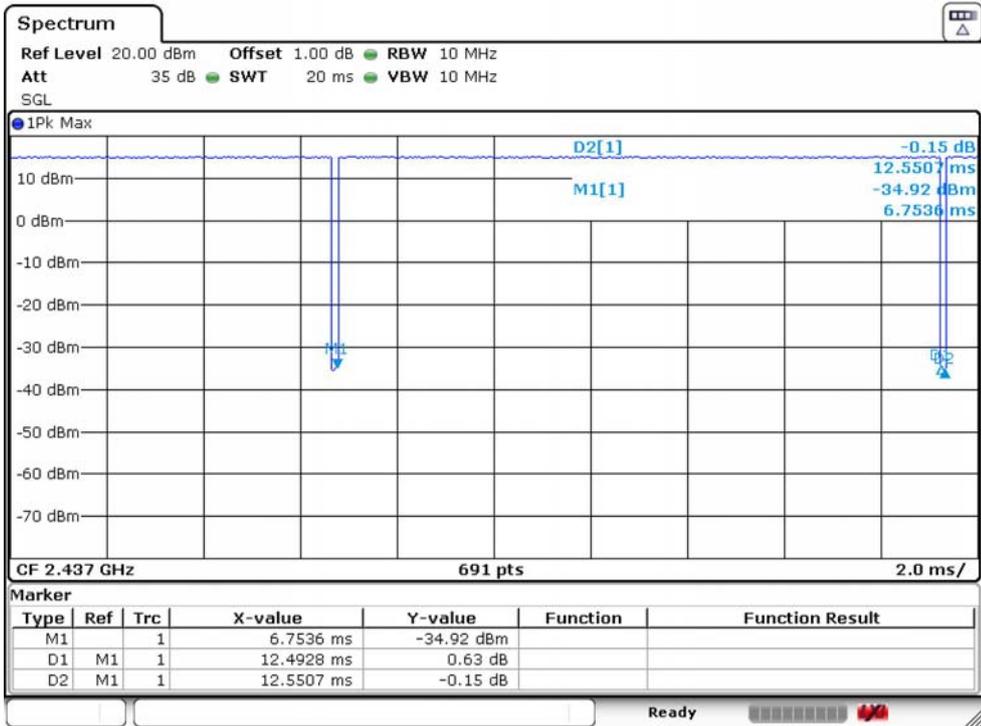


IEEE 802.11g 2437MHz

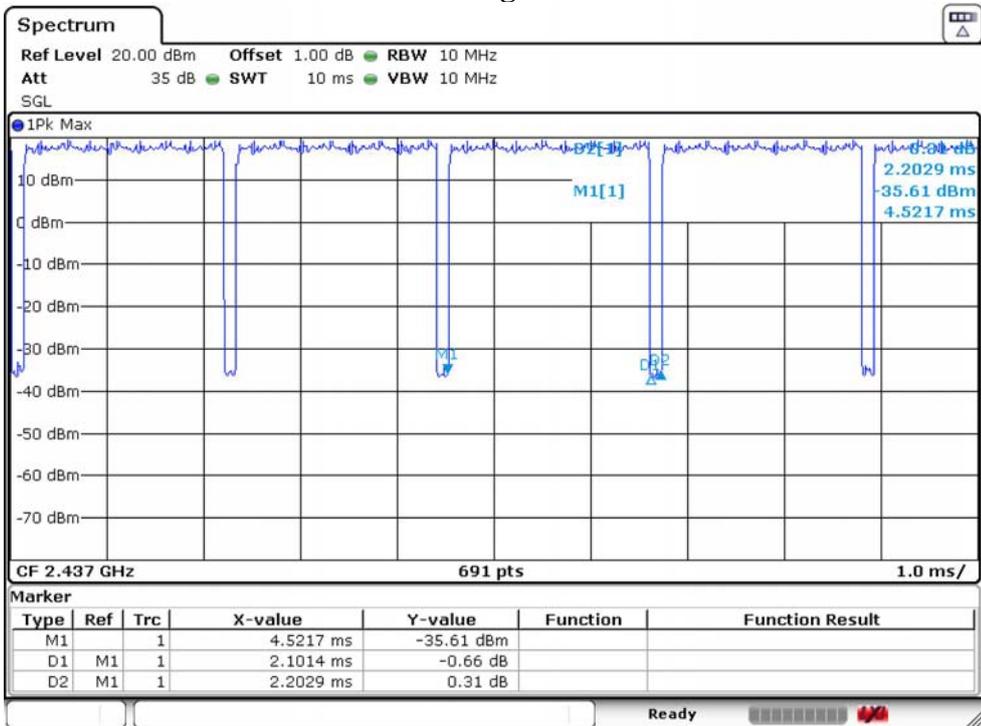

IEEE 802.11n HT20 2437MHz

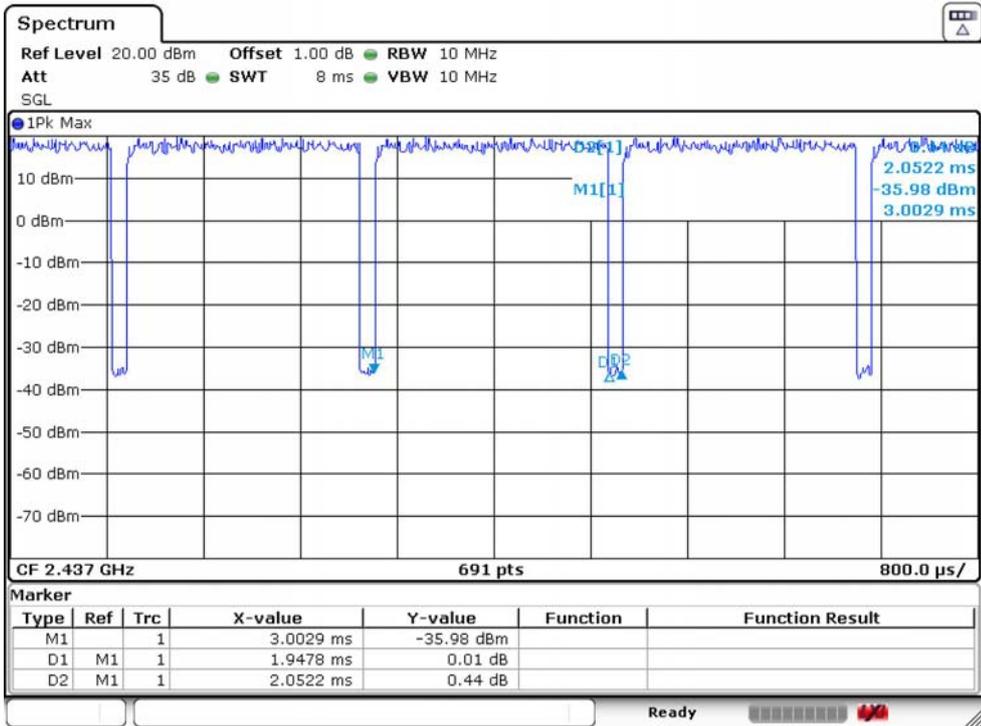

IEEE 802.11n HT40 2437MHz

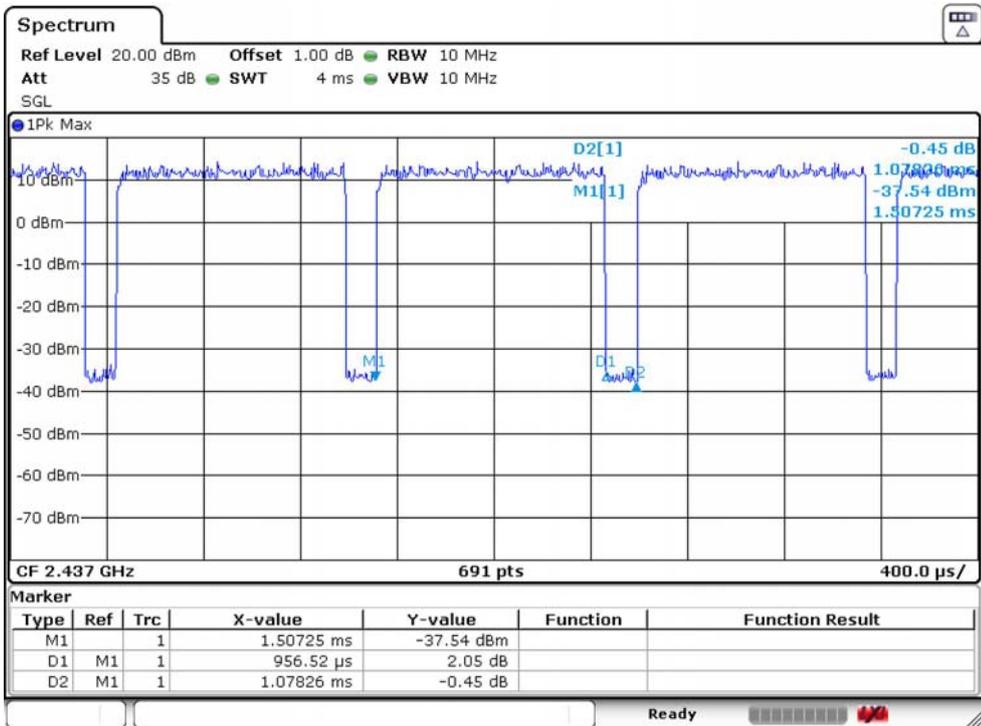

2.9. Channel List

IEEE 802.11b/802.11g/802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,20	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,20	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Active Loop Antenna	SCHWARZECK	FMZB 1519B	EST-E054	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZECK	BBHA9120D	EST-E031	LISAI	June 13,20	1 Year
Signal Amplifier	SCHWARZECK	BBV9718	EST-E032	LISAI	June 13,20	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year

3. 6dB BANDWIDTH

3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


3.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


3.5. Test Result

Temperature	21.8°C	Relative Humidity	51%	
Test Voltage	AC 120V/60Hz			
Mode	Freq (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	2412	10.056	≥ 0.5	PASS
	2437	10.052	≥ 0.5	PASS
	2462	10.052	≥ 0.5	PASS
IEEE 802.11g	2412	16.540	≥ 0.5	PASS
	2437	16.552	≥ 0.5	PASS
	2462	16.552	≥ 0.5	PASS
IEEE 802.11n HT20	2412	17.744	≥ 0.5	PASS
	2437	17.744	≥ 0.5	PASS
	2462	17.740	≥ 0.5	PASS
IEEE 802.11n HT40	2422	36.336	≥ 0.5	PASS
	2437	36.336	≥ 0.5	PASS
	2452	36.344	≥ 0.5	PASS


IEEE 802.11b 2412MHz

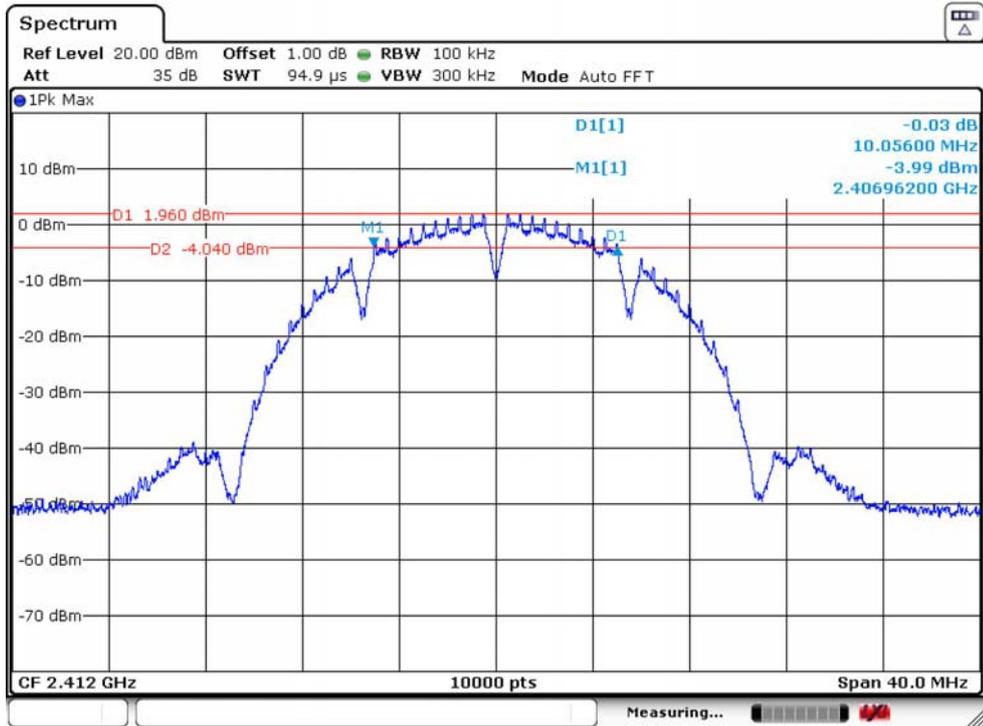


IEEE 802.11b 2437MHz

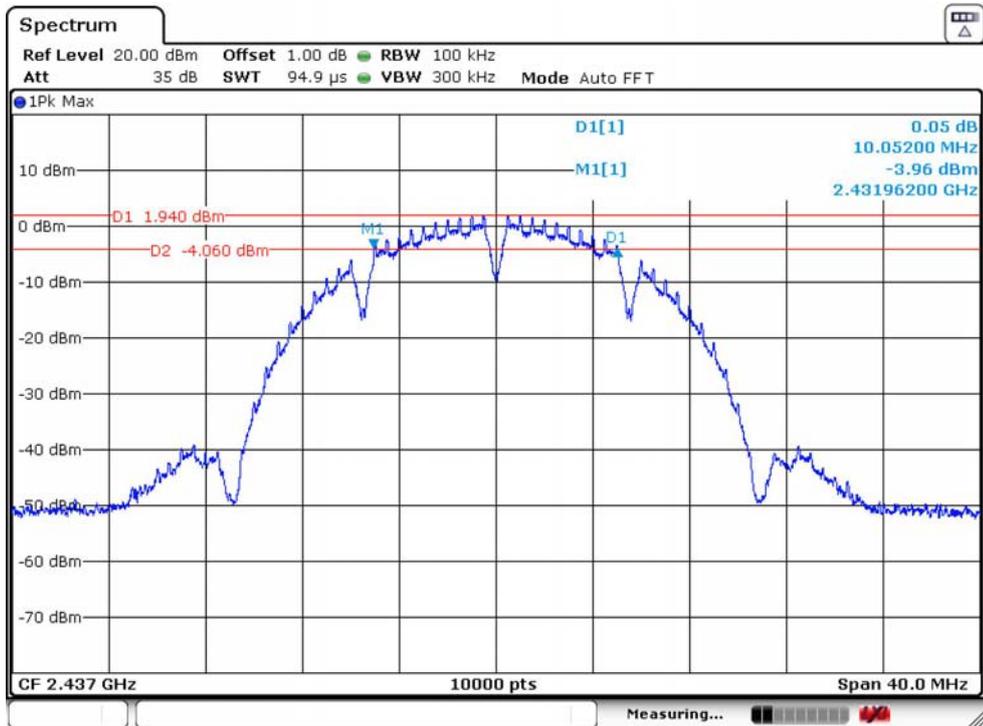


IEEE 802.11b 2462MHz

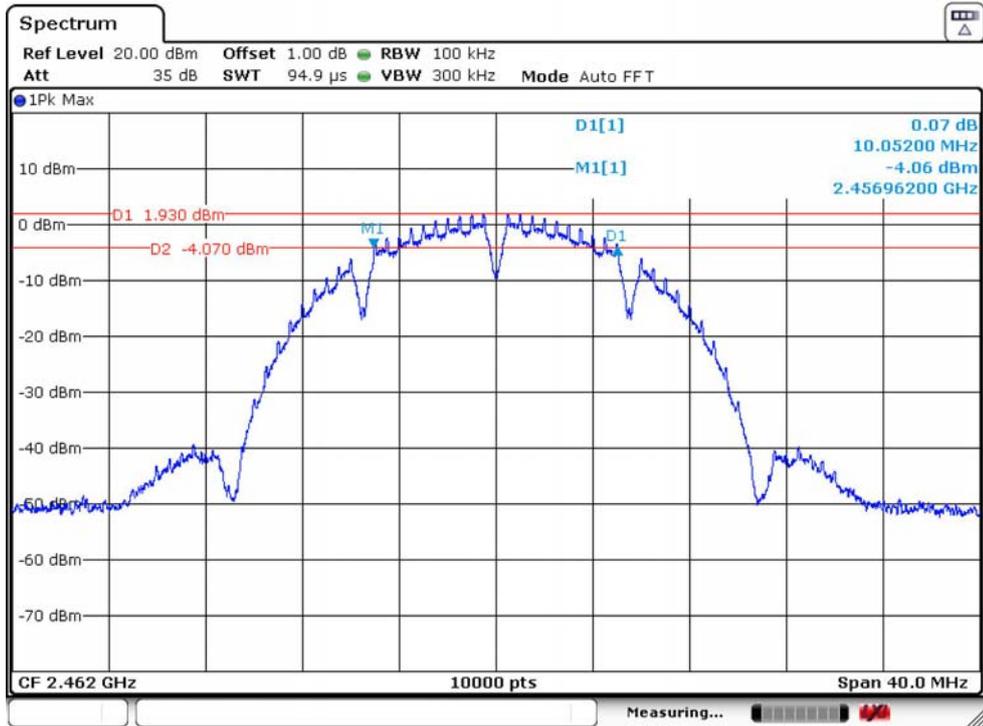


IEEE 802.11g 2412MHz

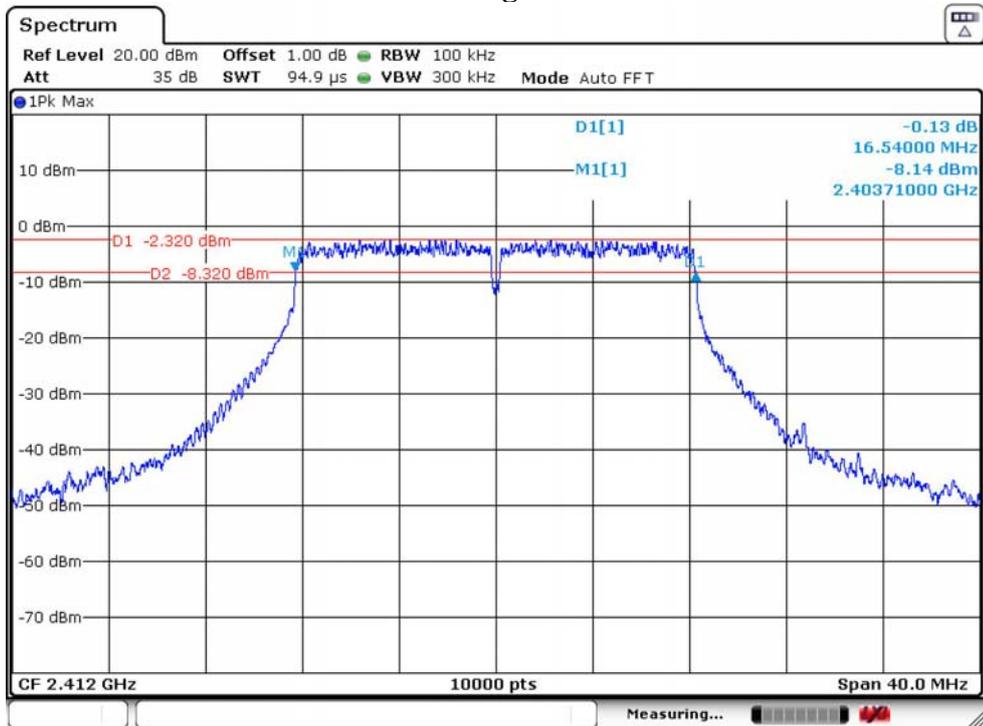


IEEE 802.11g 2437MHz

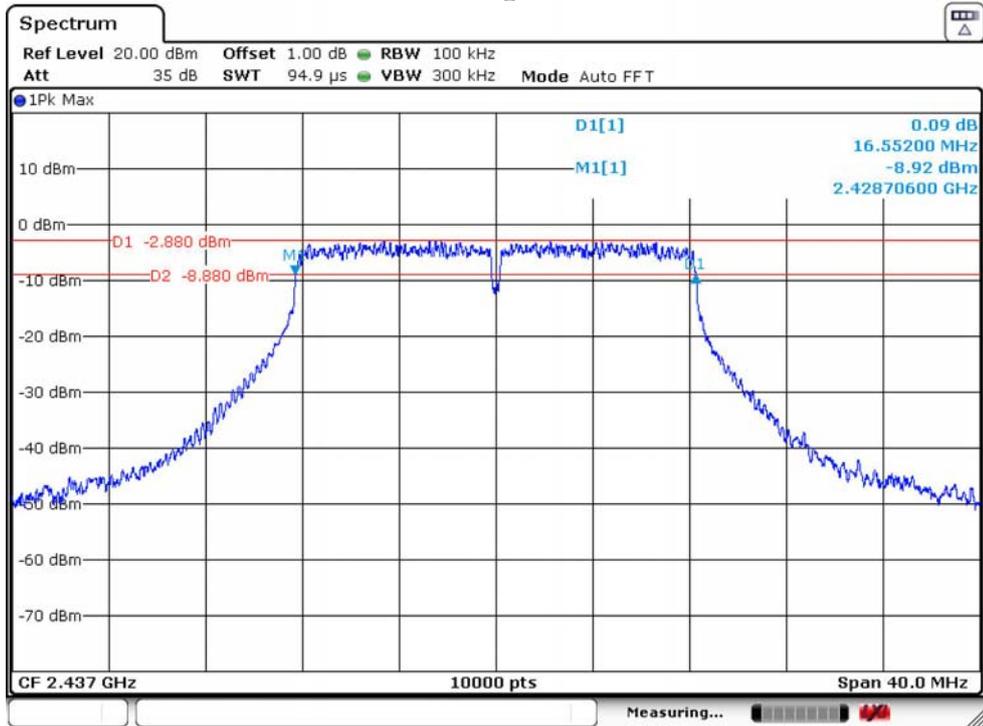


IEEE 802.11g 2462MHz

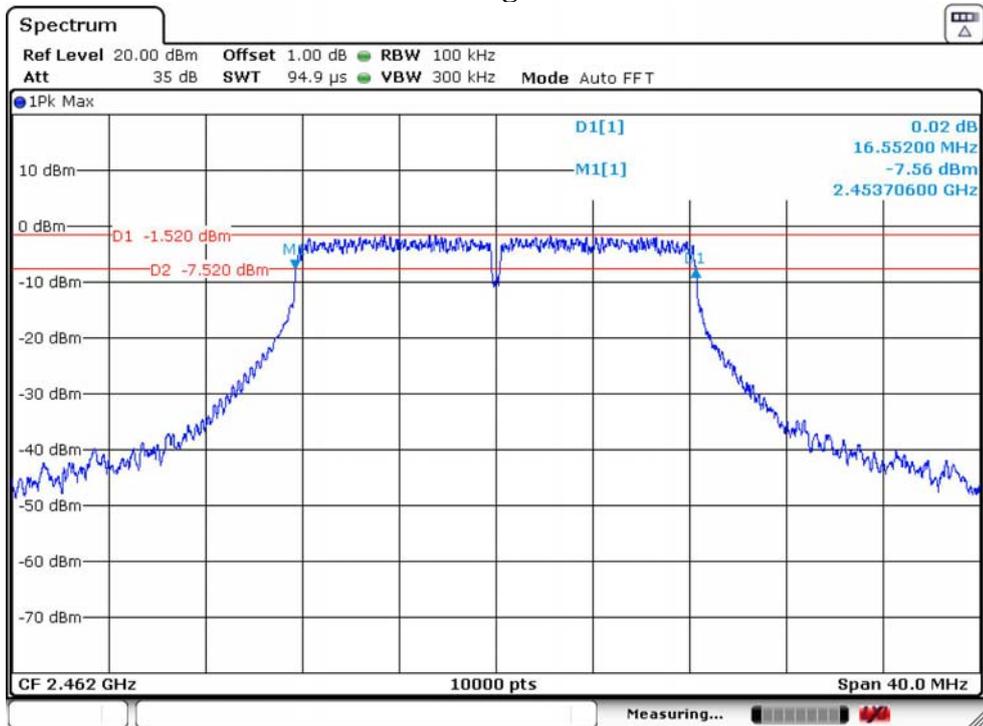


IEEE 802.11n HT20 2412MHz

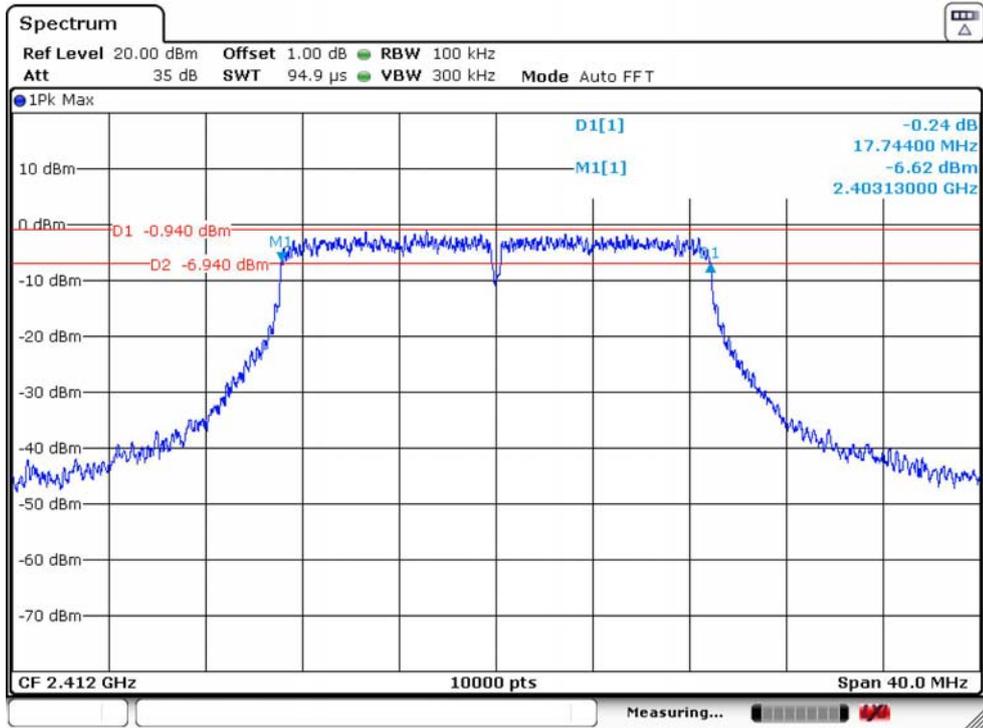


IEEE 802.11n HT20 2437MHz

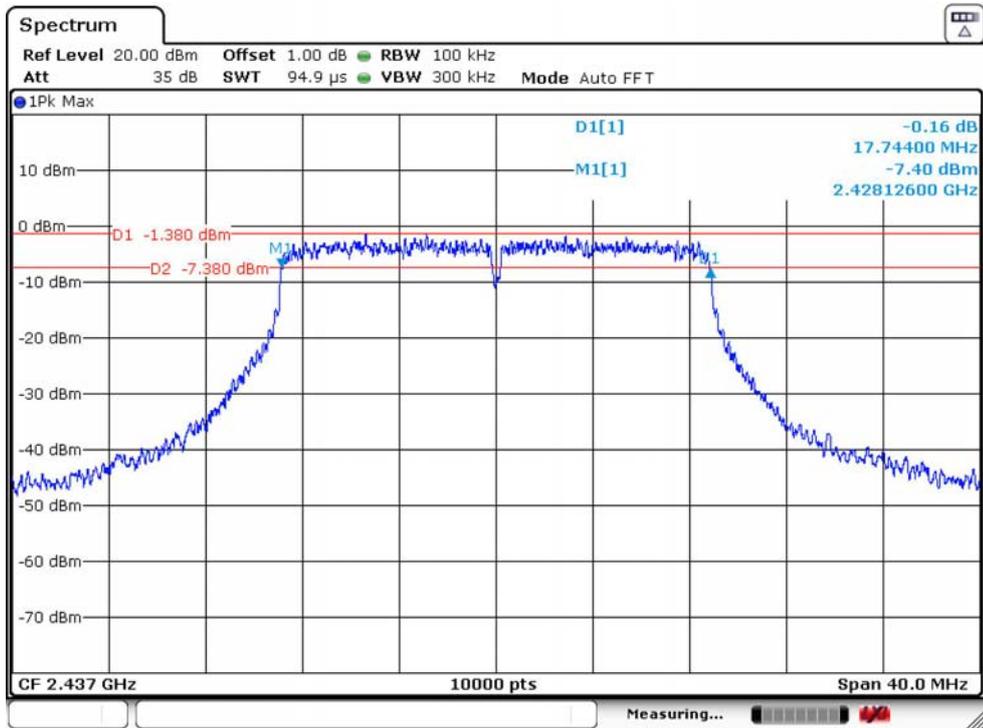


IEEE 802.11n HT20 2462MHz

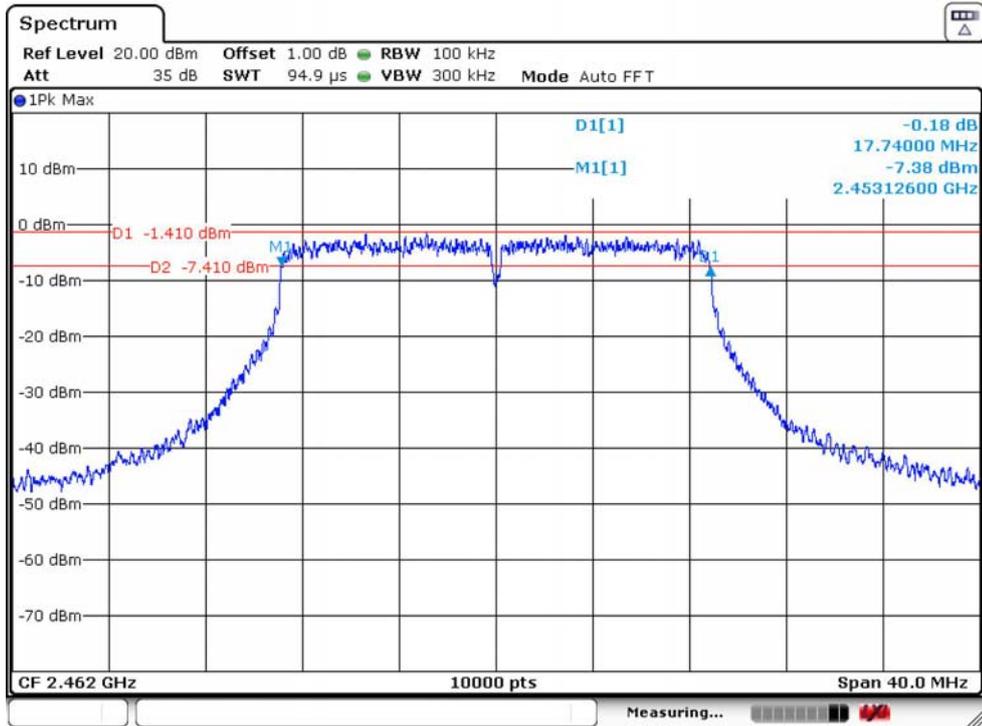


IEEE 802.11n HT40 2422MHz

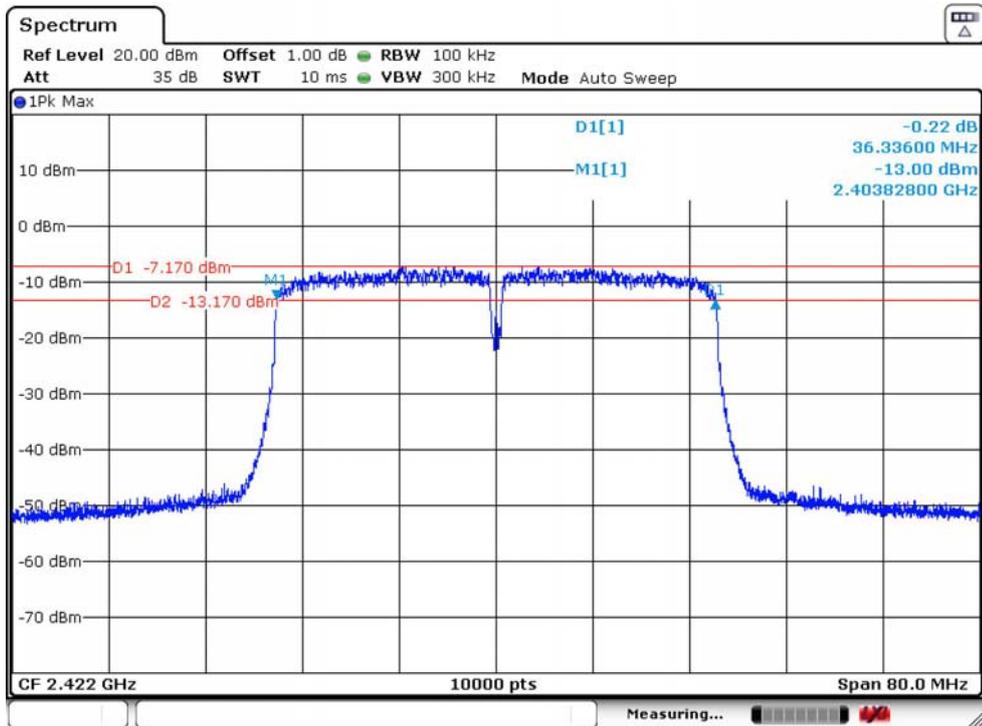

IEEE 802.11n HT40 2437MHz

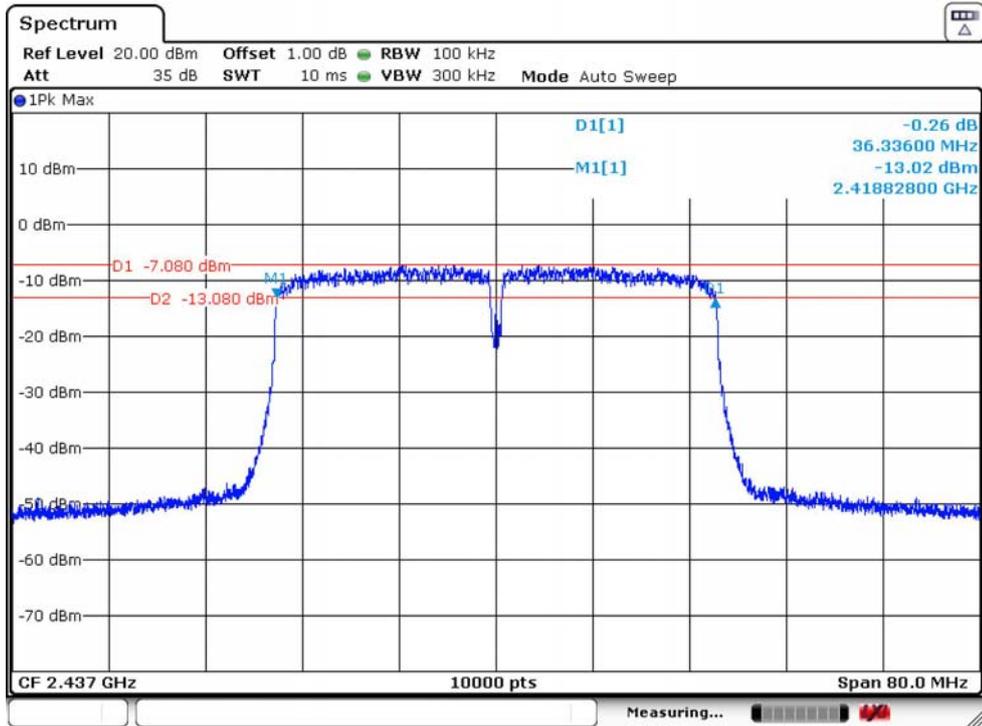

IEEE 802.11n HT40 2452MHz

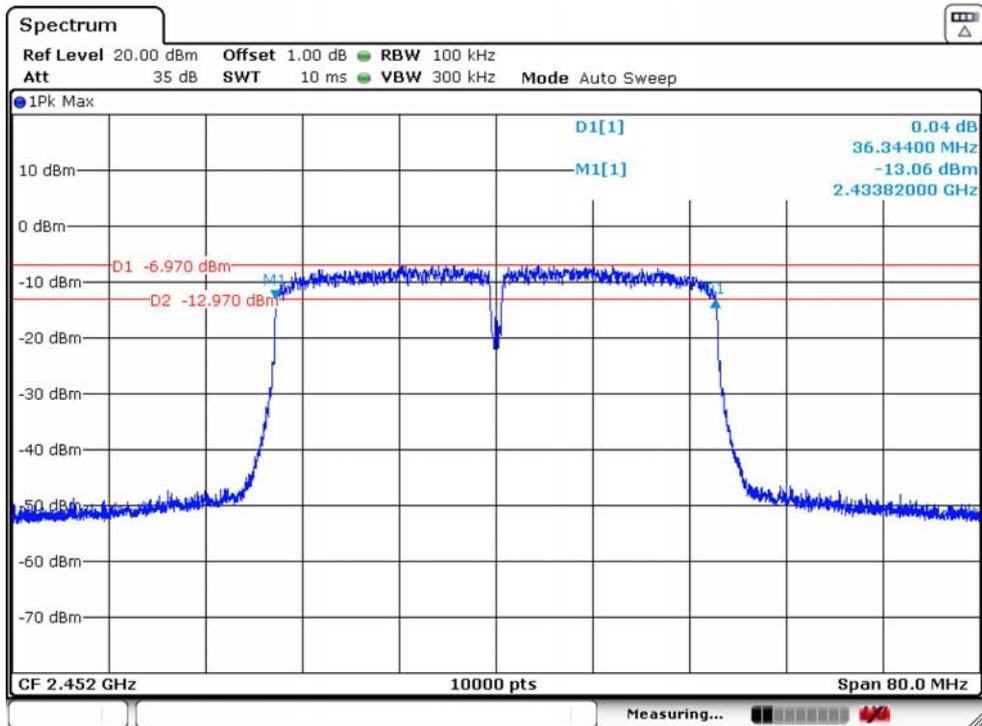

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

4.2. Test Setup



4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	3MHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


4.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 4.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


4.5. Test Result

Temperature	21.8°C	Relative Humidity	51%	Test Voltage		AC 120V/60Hz
Mode	Freq (MHz)	Peak Output Power		Limit		Result
		dBm	W	dBm	W	
IEEE 802.11b	2412	15.71	0.0372	30.00	1.0000	PASS
	2437	15.63	0.0366	30.00	1.0000	PASS
	2462	15.51	0.0356	30.00	1.0000	PASS
IEEE 802.11g	2412	20.11	0.1026	30.00	1.0000	PASS
	2437	20.00	0.1000	30.00	1.0000	PASS
	2462	19.99	0.0998	30.00	1.0000	PASS
IEEE 802.11n HT20	2412	20.04	0.1009	30.00	1.0000	PASS
	2437	20.61	0.1151	30.00	1.0000	PASS
	2462	20.16	0.1038	30.00	1.0000	PASS
IEEE 802.11n HT40	2422	17.51	0.0564	30.00	1.0000	PASS
	2437	17.47	0.0558	30.00	1.0000	PASS
	2452	17.52	0.0565	30.00	1.0000	PASS


IEEE 802.11b 2412MHz

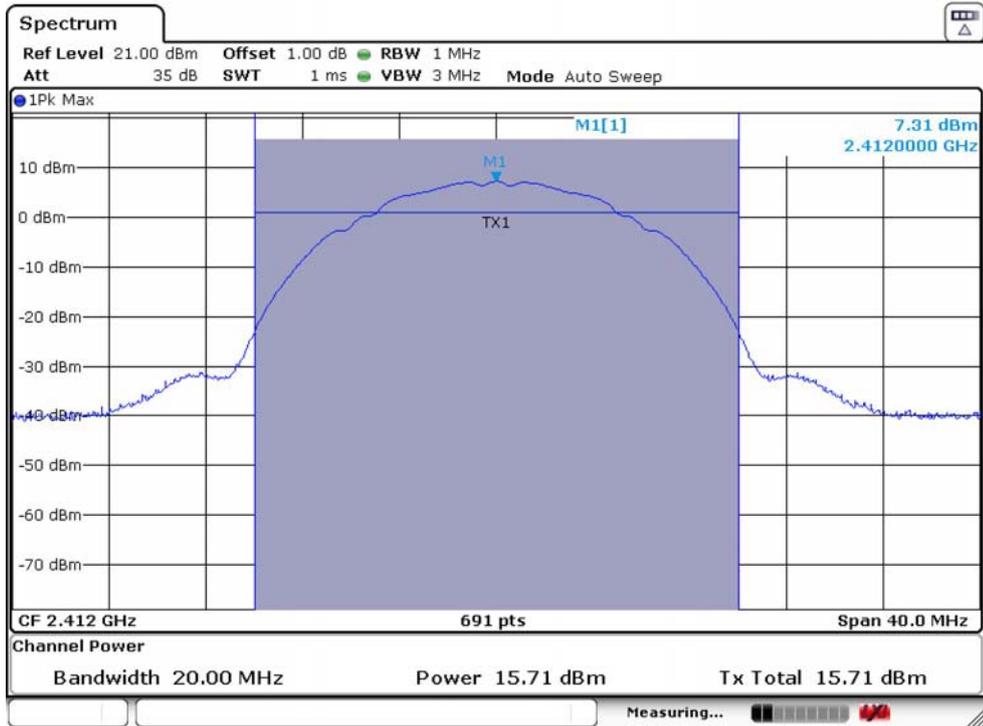


IEEE 802.11b 2437MHz

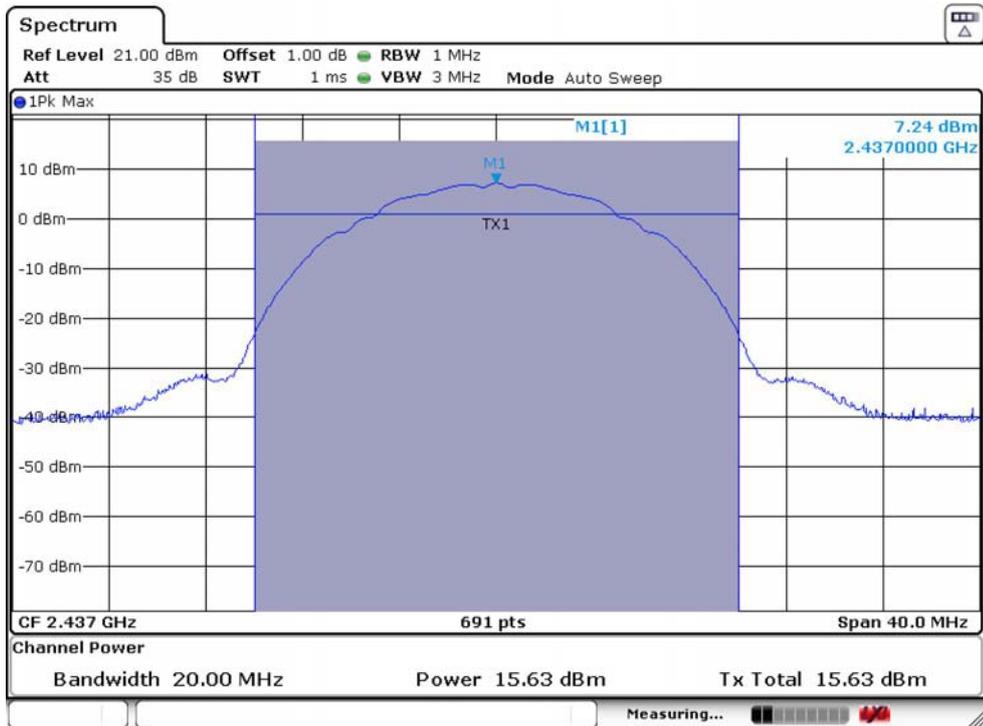


IEEE 802.11b 2462MHz

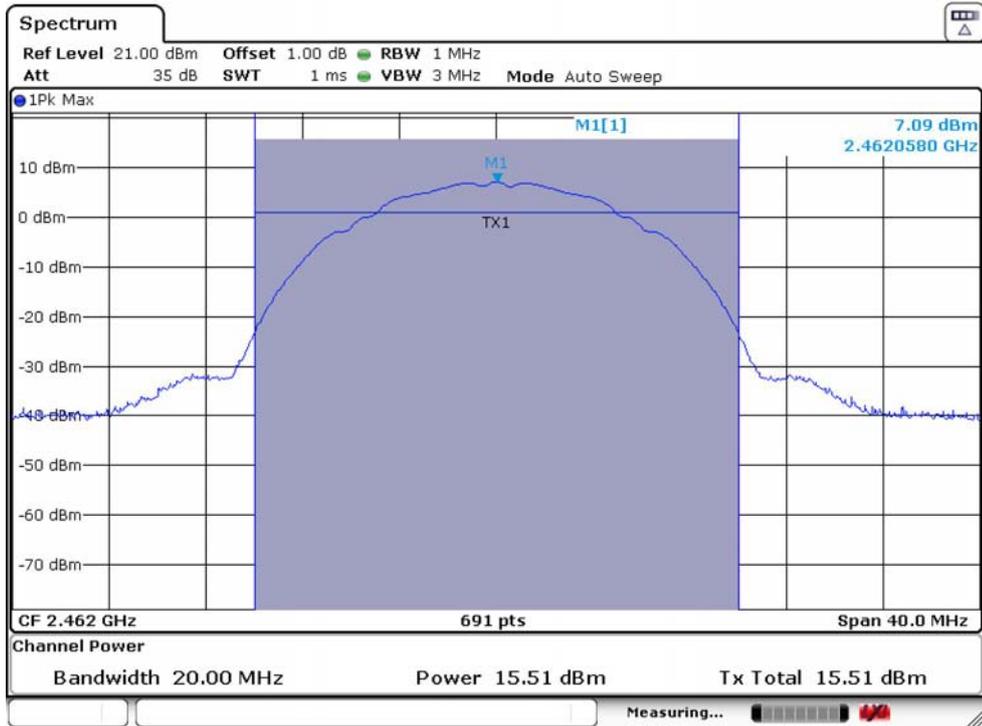


IEEE 802.11g 2412MHz

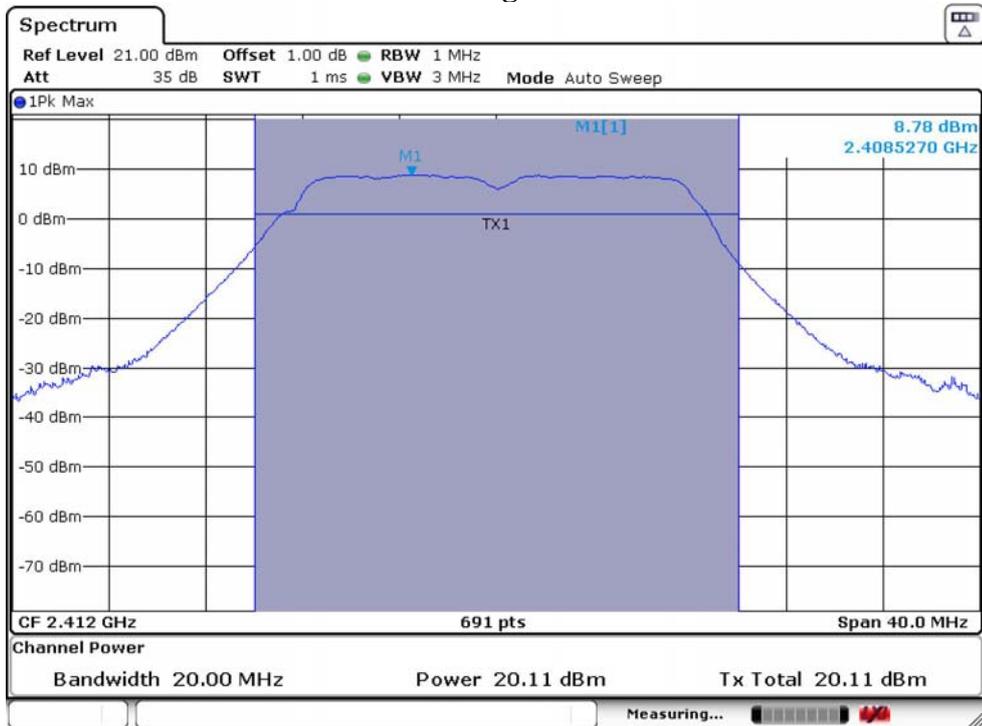


IEEE 802.11g 2437MHz

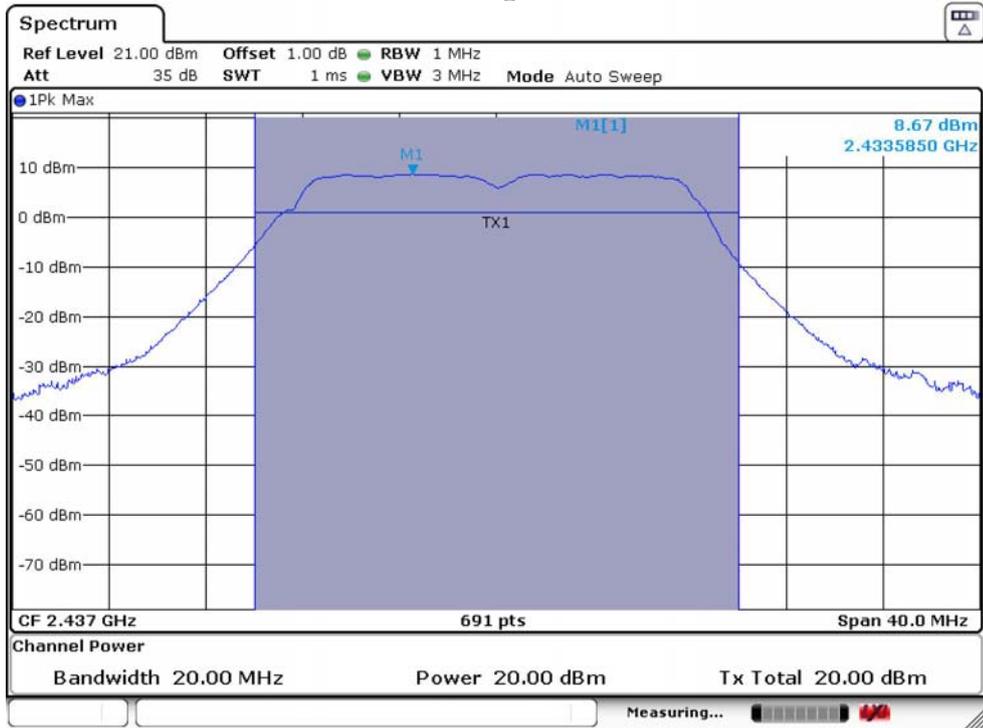


IEEE 802.11g 2462MHz

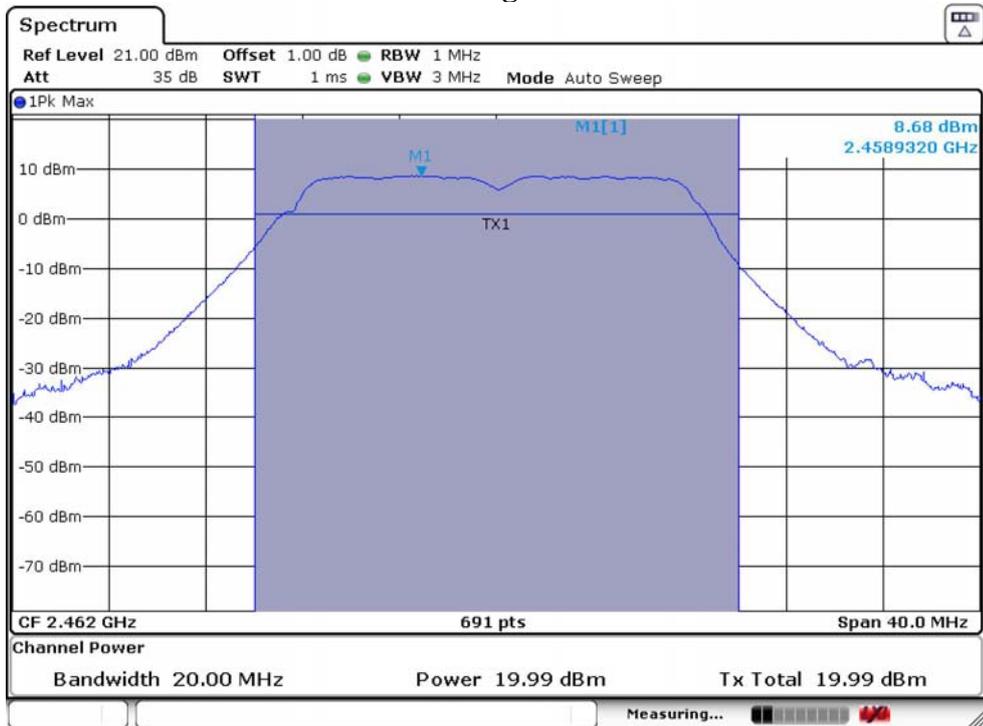


IEEE 802.11n HT20 2412MHz

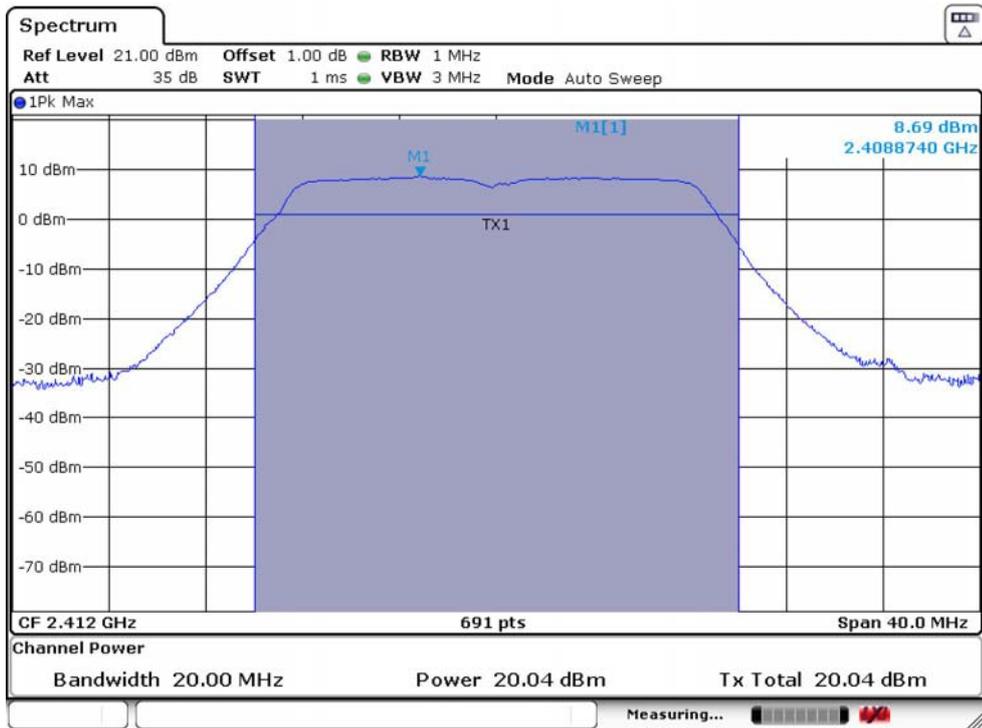


IEEE 802.11n HT20 2437MHz

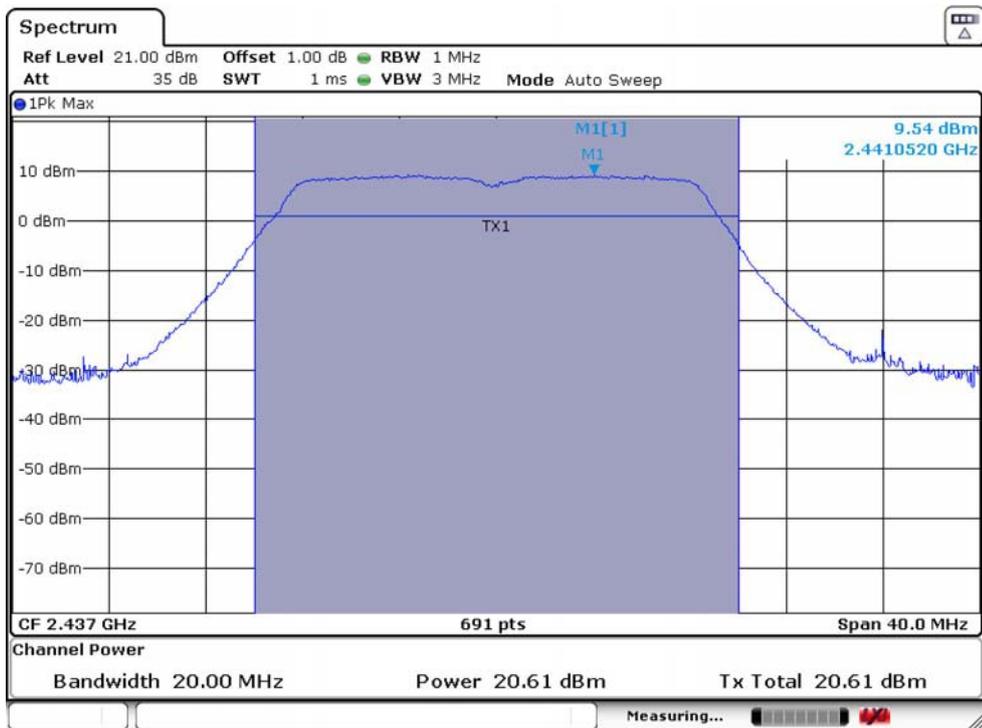


IEEE 802.11n HT20 2462MHz

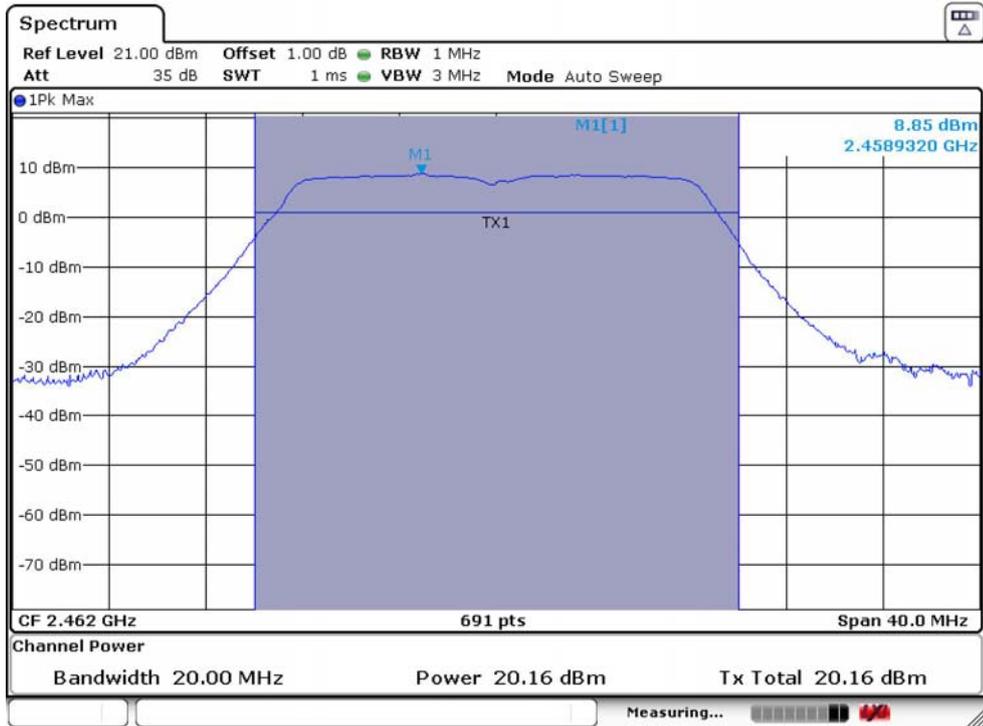


IEEE 802.11n HT40 2422MHz

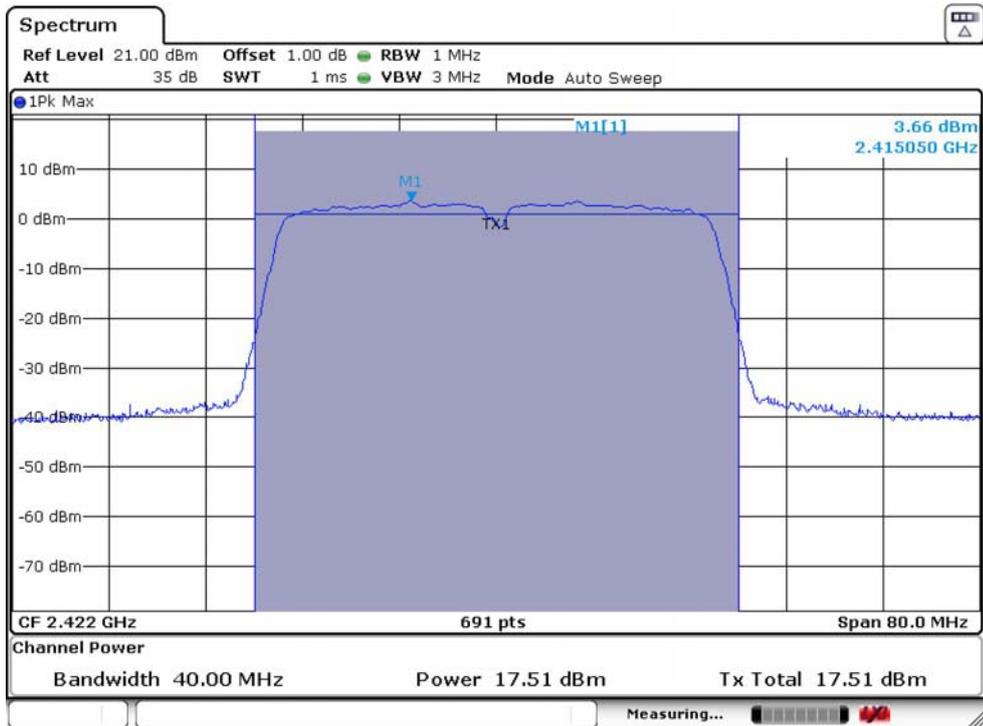

IEEE 802.11n HT40 2437MHz

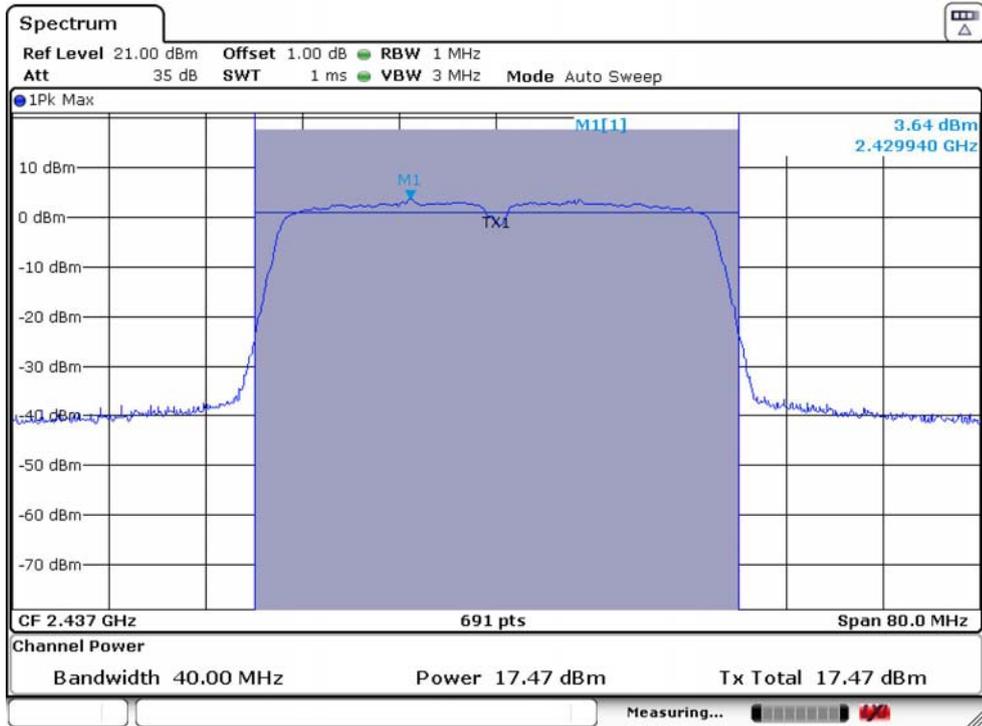

IEEE 802.11n HT40 2452MHz

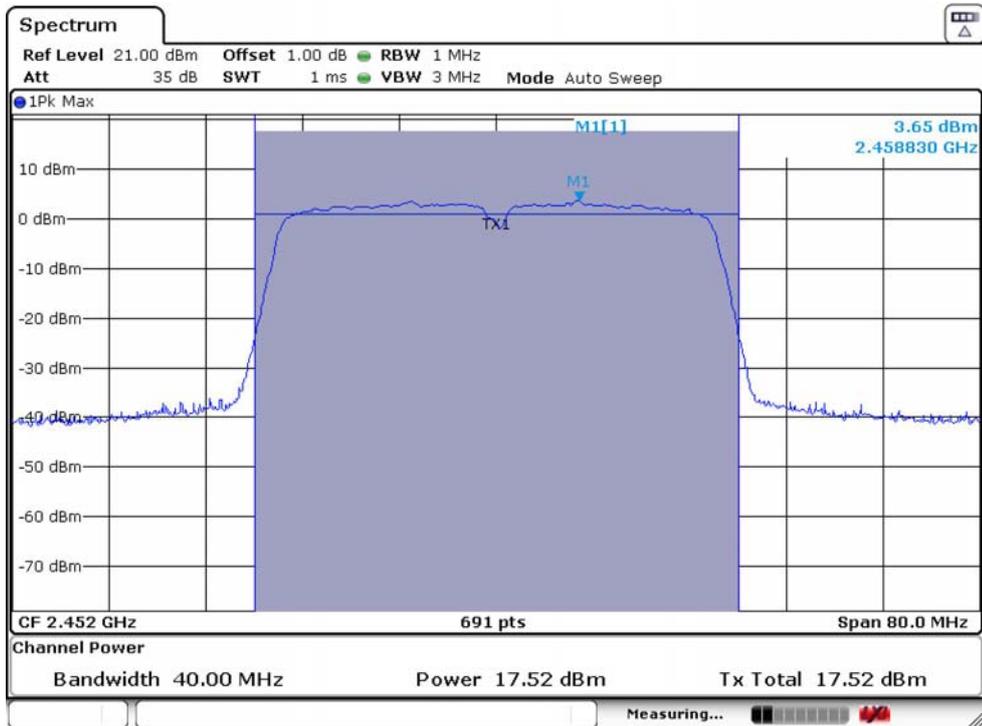

5. POWER SPECTRAL DENSITY

5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2. Test Setup



5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

5.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 5.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

5.5. Test Result

Temperature	21.8°C	Relative Humidity	51%	Test Voltage	AC 120V/60Hz
Mode	Freq (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result	
IEEE 802.11b	2412	-18.57	8.00	PASS	
	2437	-18.43	8.00	PASS	
	2462	-18.44	8.00	PASS	
IEEE 802.11g	2412	-17.01	8.00	PASS	
	2437	-16.84	8.00	PASS	
	2462	-15.74	8.00	PASS	
IEEE 802.11n HT20	2412	-16.26	8.00	PASS	
	2437	-16.36	8.00	PASS	
	2462	-15.35	8.00	PASS	
IEEE 802.11n HT40	2422	-18.76	8.00	PASS	
	2437	-18.83	8.00	PASS	
	2452	-18.91	8.00	PASS	

IEEE 802.11b 2412MHz




IEEE 802.11b 2437MHz




IEEE 802.11b 2462MHz




IEEE 802.11g 2412MHz

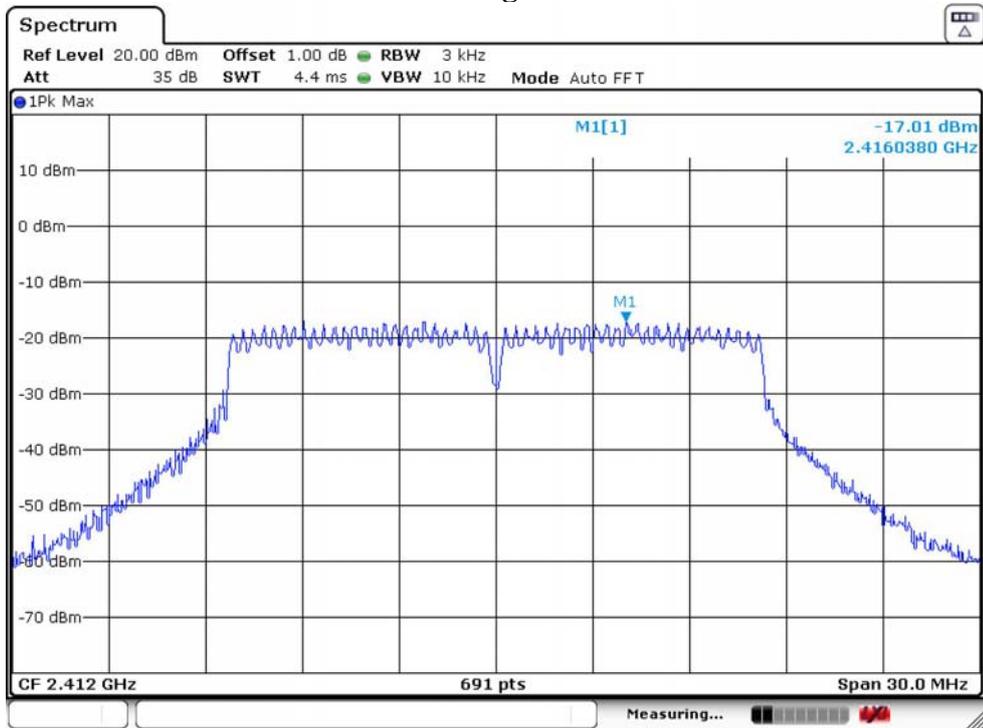


IEEE 802.11g 2437MHz

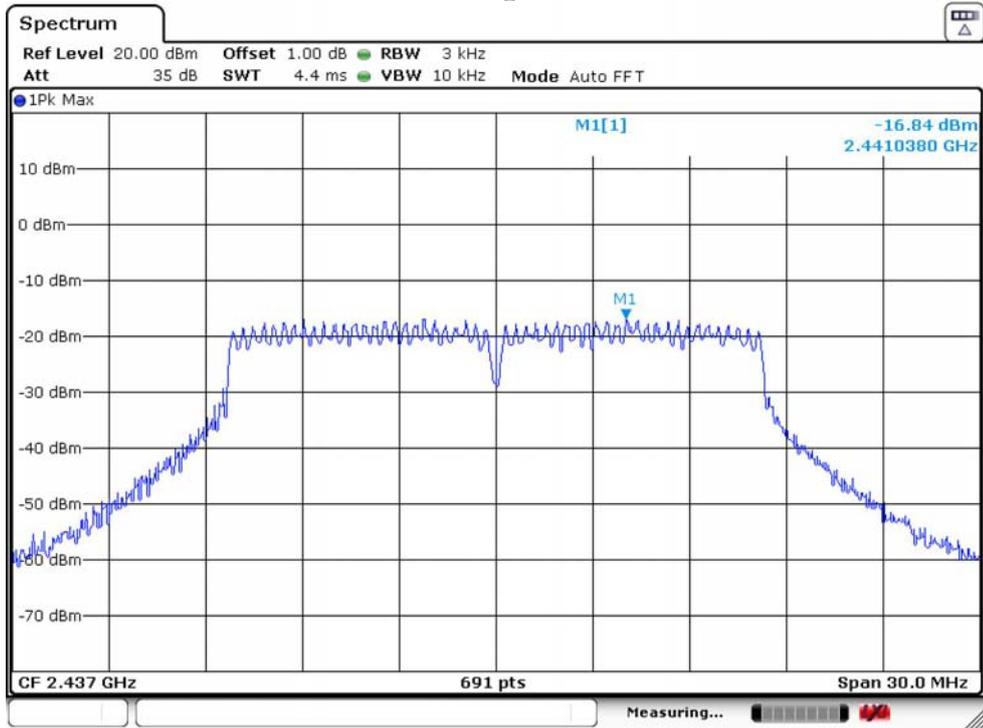


IEEE 802.11g 2462MHz

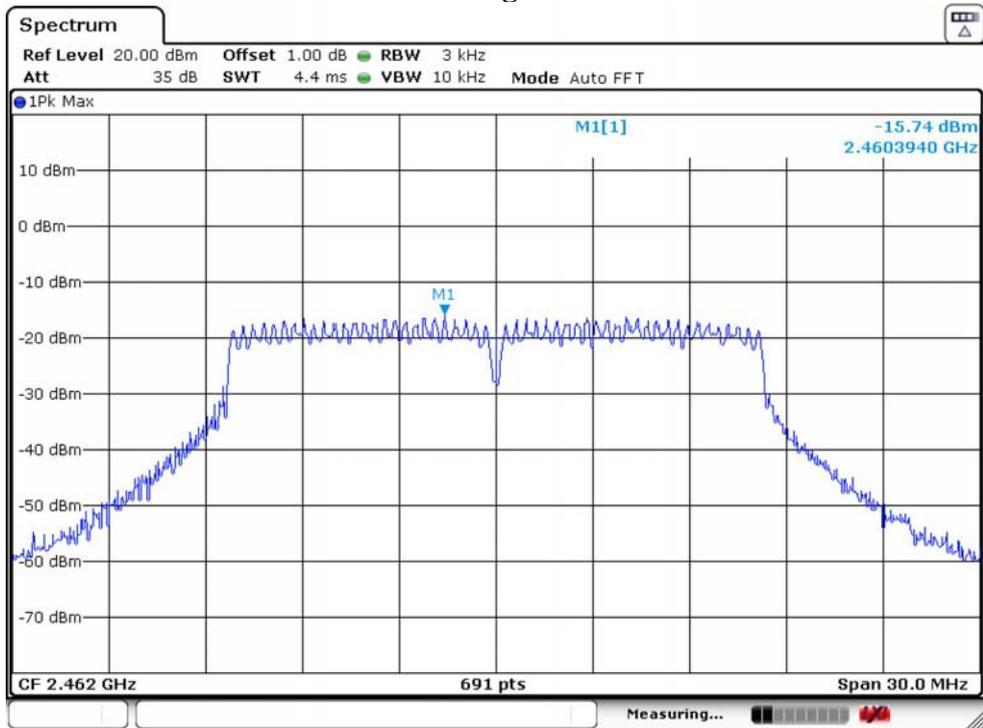


IEEE 802.11n HT20 2412MHz

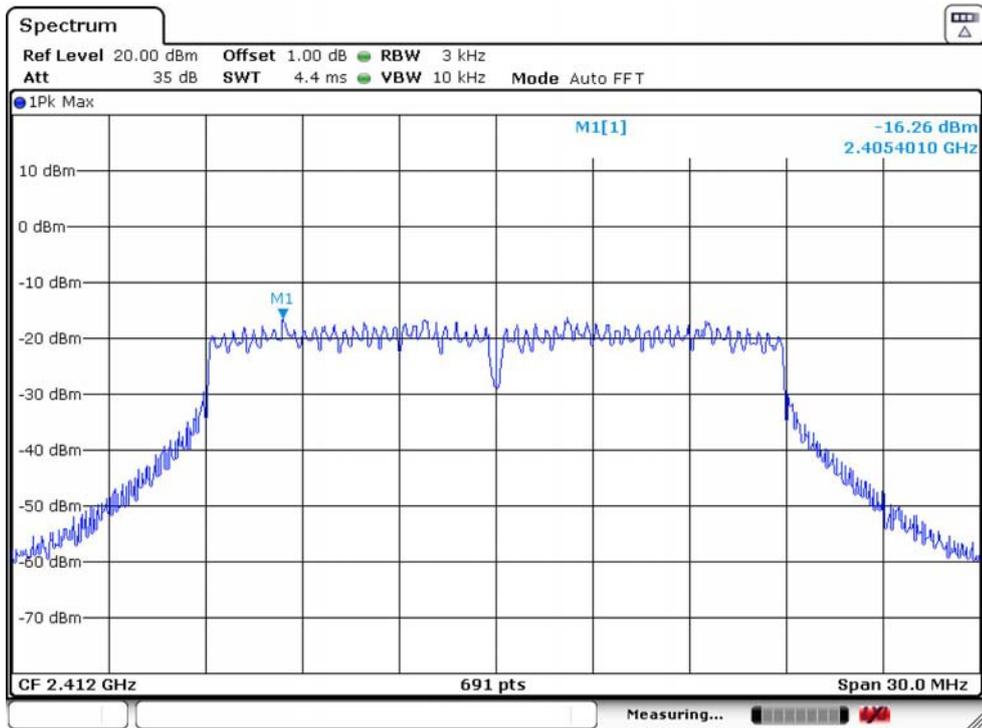


IEEE 802.11n HT20 2437MHz

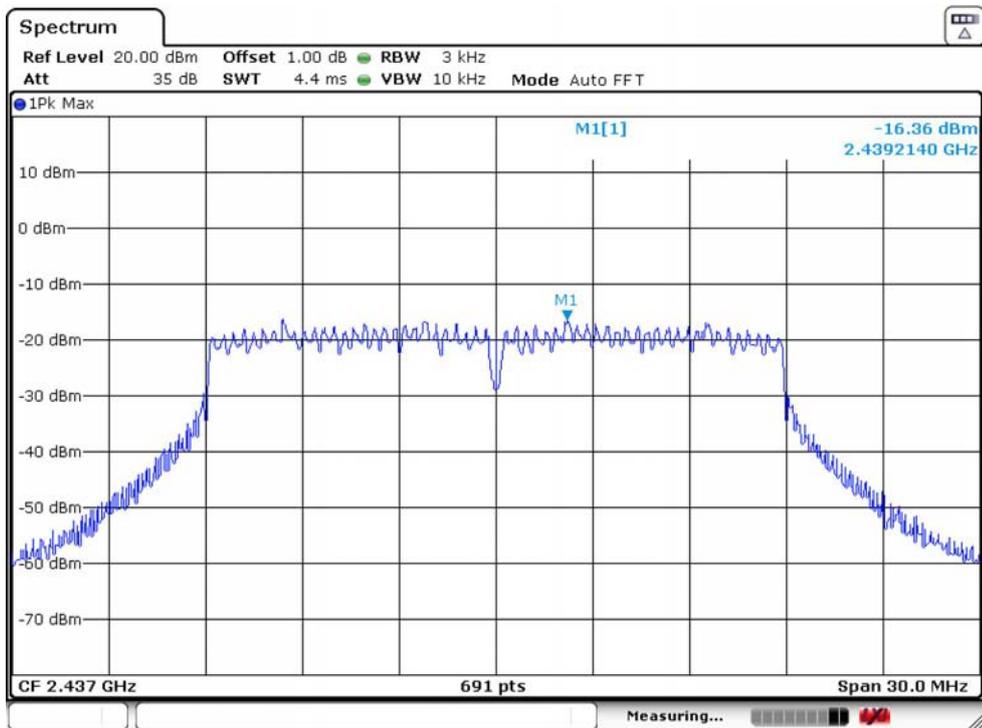


IEEE 802.11n HT20 2462MHz

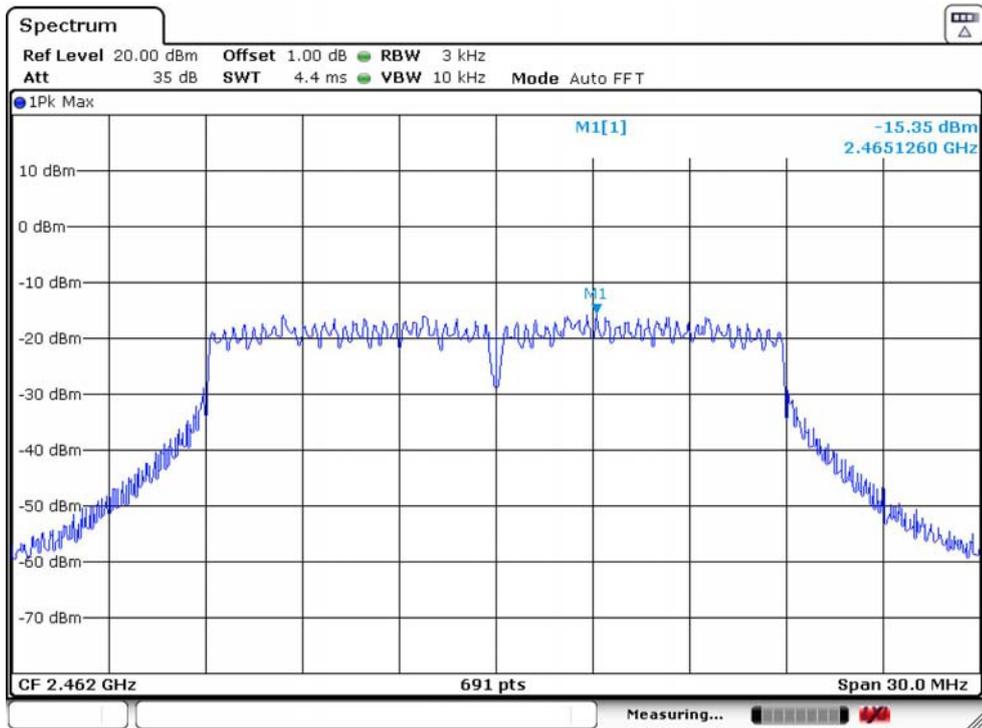


IEEE 802.11n HT40 2422MHz

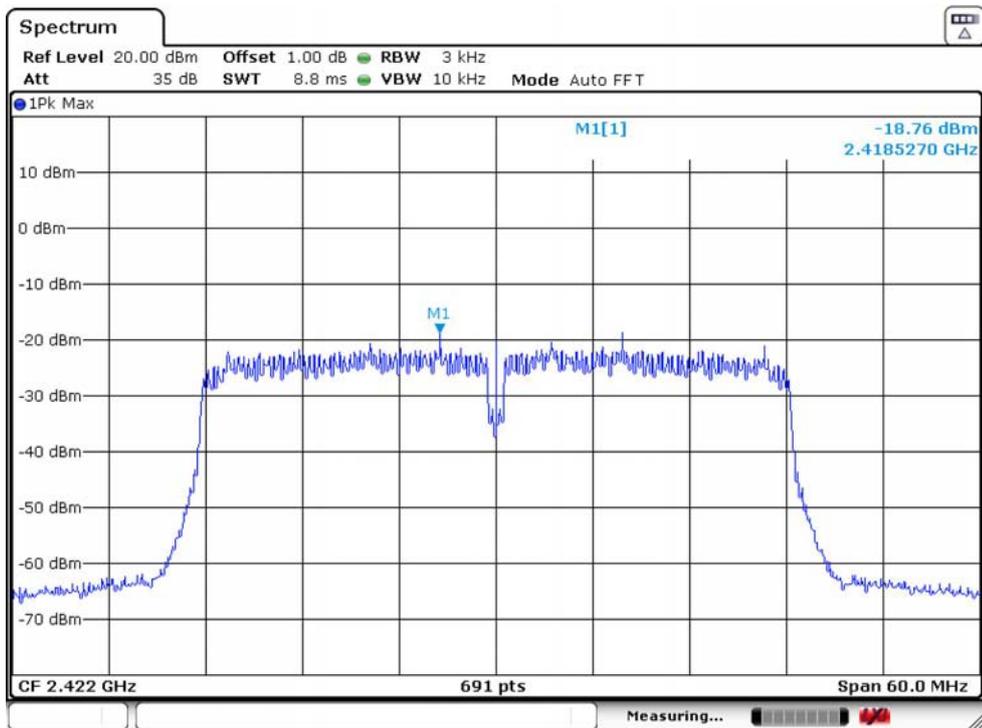

IEEE 802.11n HT40 2437MHz

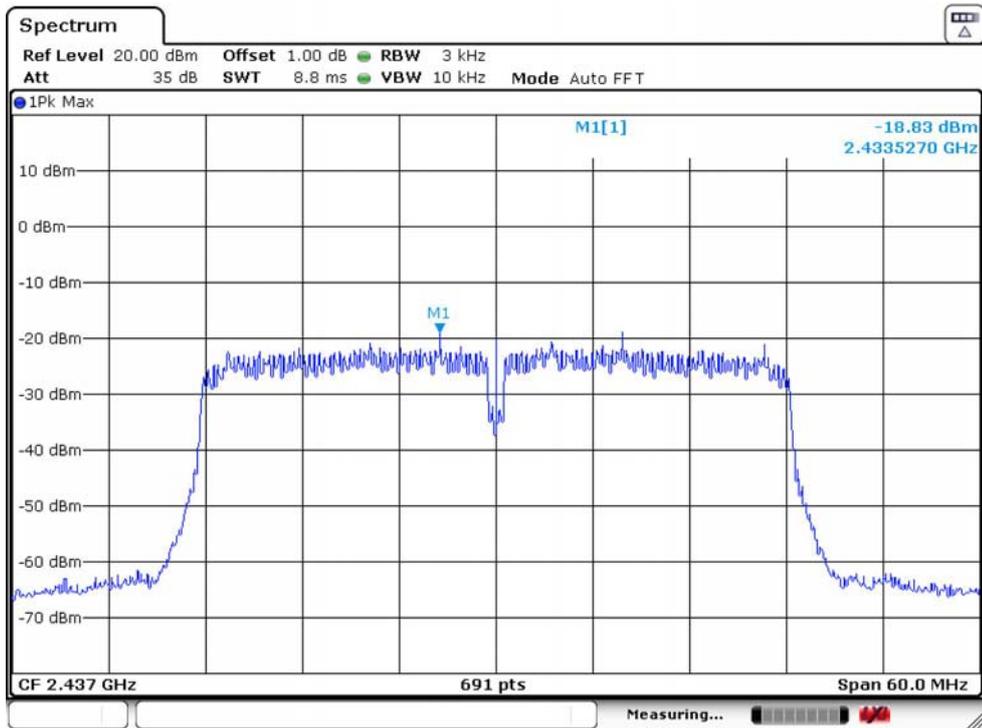

IEEE 802.11n HT40 2452MHz

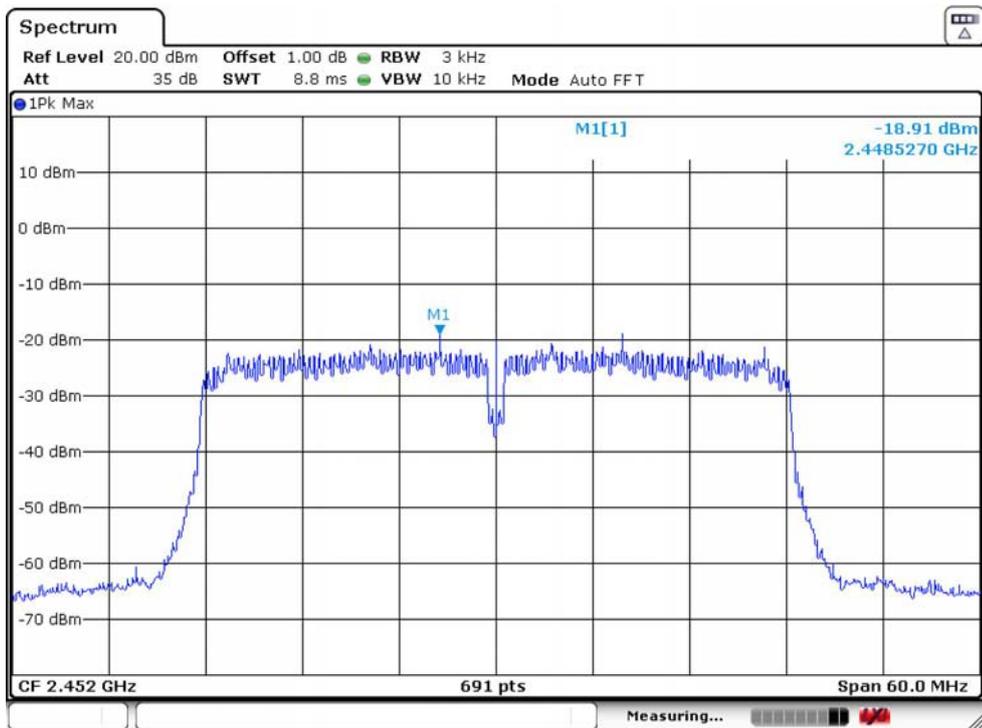

6. CONDUCTED BAND EDGE

6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2. Test Setup



6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


6.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 6.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


6.5. Test Result

Temperature	21.8°C	Relative Humidity	51%	Test Voltage	AC 120V/60Hz
Result	PASS				

IEEE 802.11n HT20 2412MHz

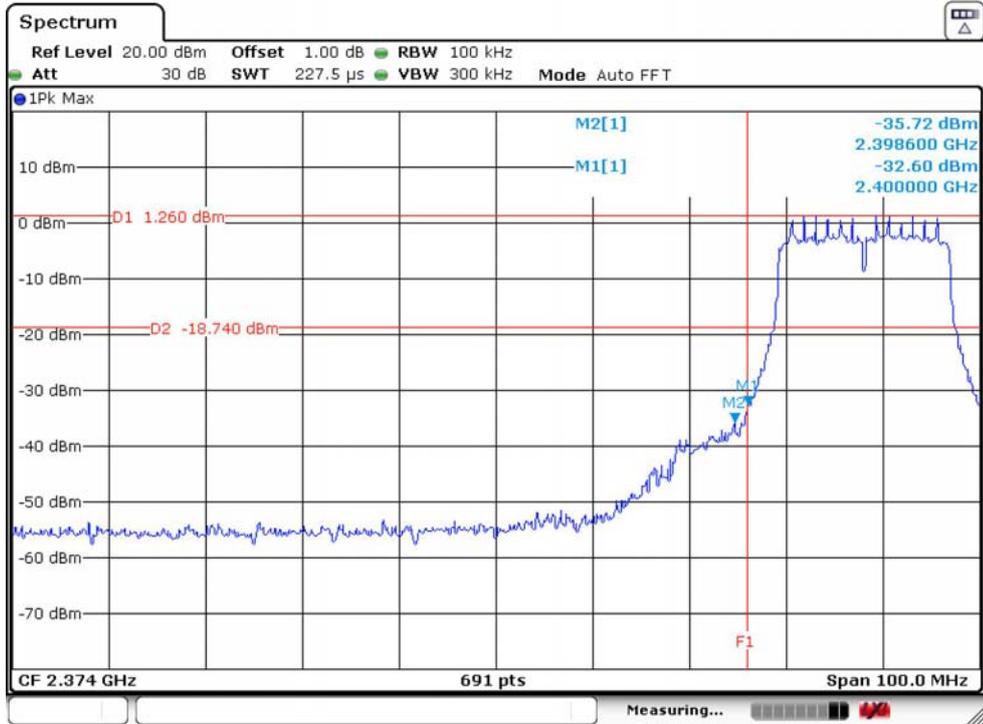

IEEE 802.11n HT20 2462MHz

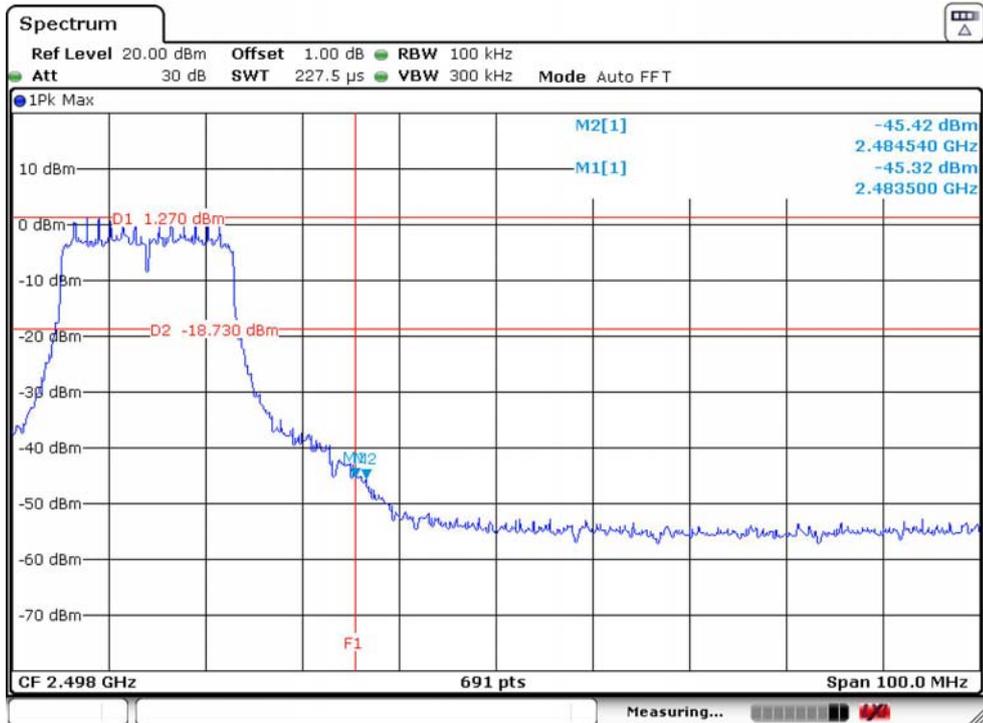


All modulations are all tested ,only worse case is reported.

7. CONDUCTED SPURIOUS EMISSIONS

7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2. Test Setup

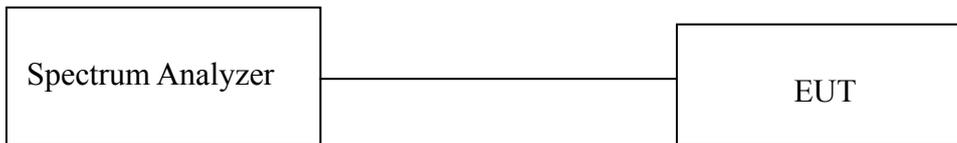

7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


7.4. Test Procedure

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 7.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.


7.5. Test Result

Temperature	21.8°C	Relative Humidity	51%	Test Voltage	AC 120V/60Hz
Result	PASS				


IEEE 802.11n HT20 2412MHz

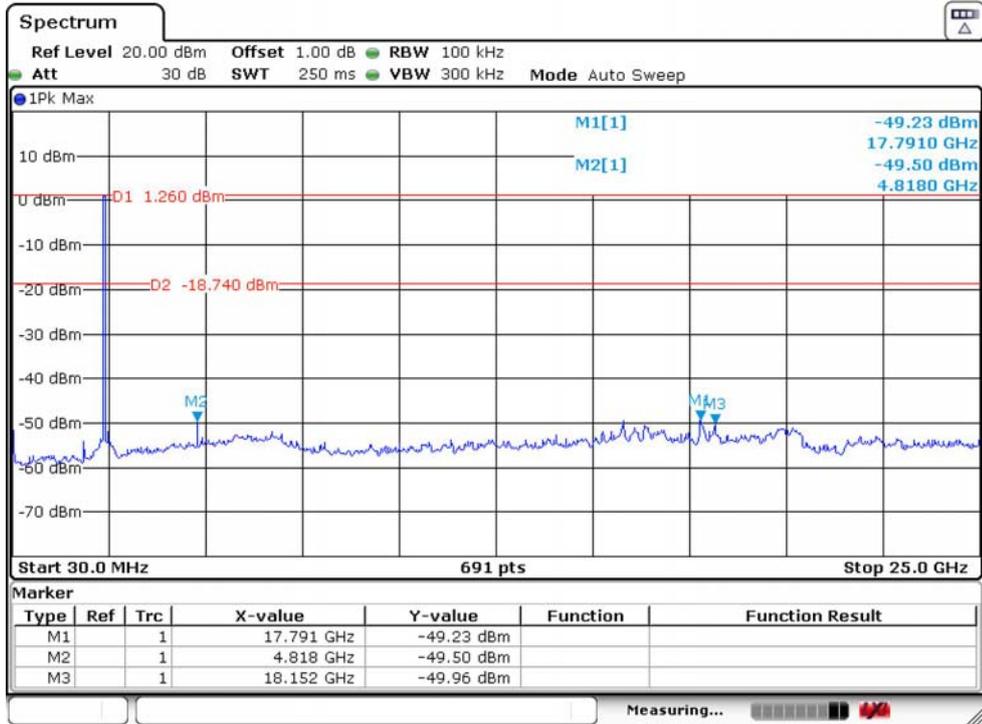

IEEE 802.11n HT20 2437MHz

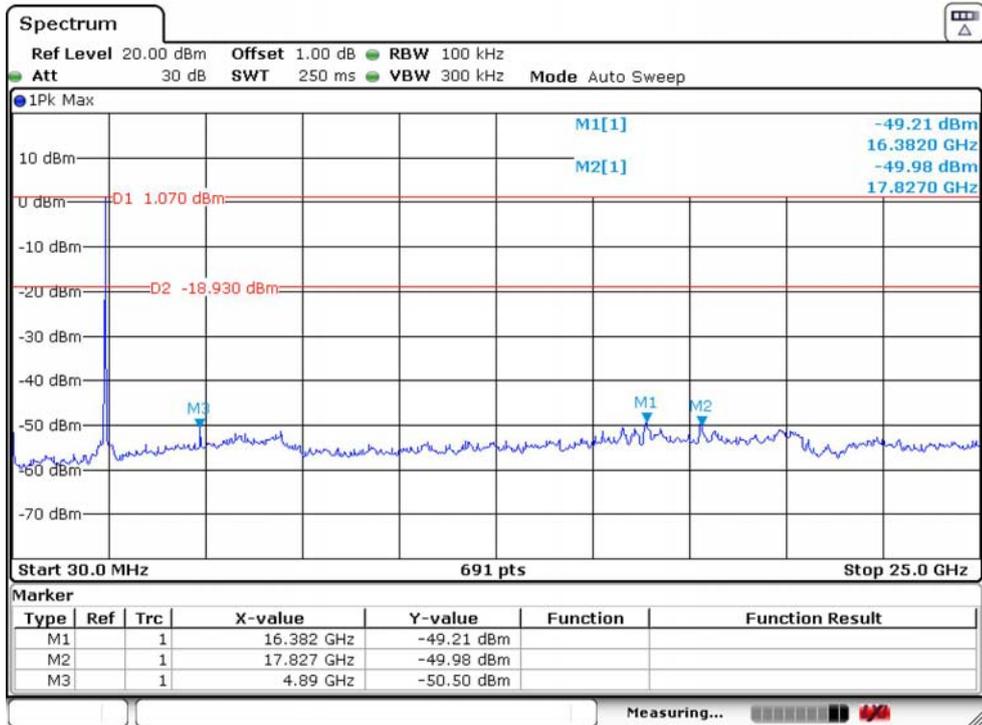

IEEE 802.11n HT20 2462MHz

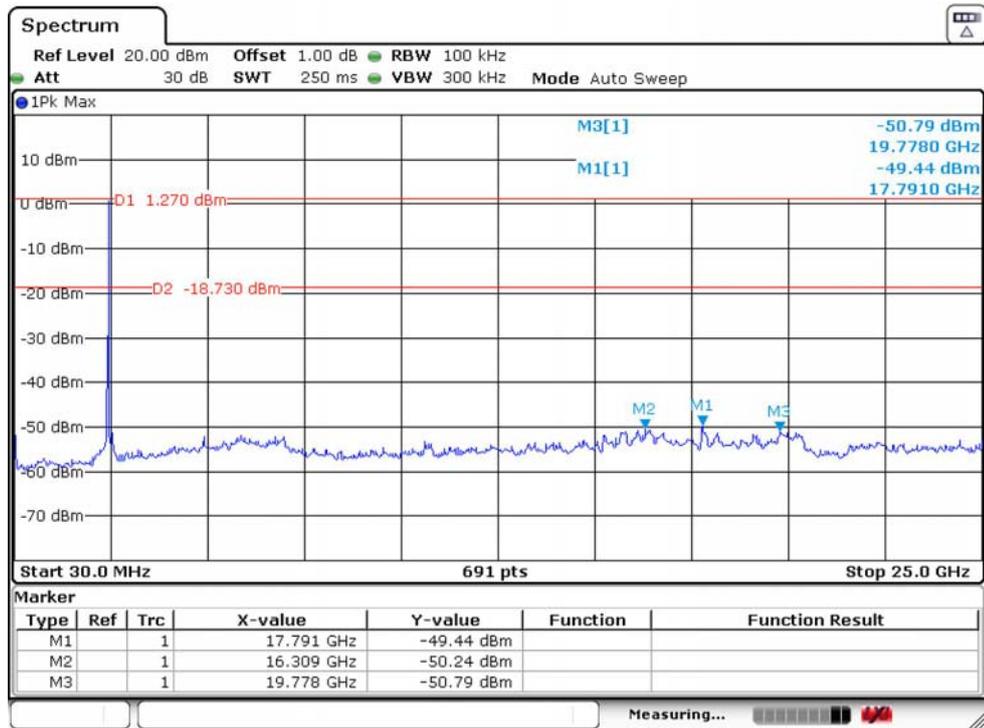

All modulations are all tested ,only worse case is reported.