

FCC TEST REPORT

For

Shenzhen Pilot Technology Co., Ltd

Wireless Charger

Model No.: WX07

Prepared For : Shenzhen Pilot Technology Co., Ltd
Address : A1 Building, No.7 Shankeng Road, Shankeng Industrial Park, Shanxia
Community, Pinghu Street, Longgang District, Shenzhen, China

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW180705002-01

Date of Receipt : Jul. 05, 2018

Date of Test : Jul. 05~Aug. 13, 2018

Date of Report : Aug. 13, 2018

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	23
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	25
APPENDIX III -- INTERNAL PHOTOGRAPH.....	29

TEST REPORT

Applicant : Shenzhen Pilot Technology Co., Ltd
Manufacturer : Shenzhen Pilot Technology Co., Ltd
Product Name : Wireless Charger
Model No. : WX07
Trade Mark : N/A
Rating(s) : Input: DC 5V, 2A/ DC 9V, 2A
Output (Wireless): 5W/ 7.5W/ 10W

Test Standard(s) : FCC Part15 Subpart C 2017, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Jul. 05~Aug. 13, 2018

Prepared by




(Engineer / Oliay Yang)

Reviewer



(Supervisor / Calvin Liu)

Approved & Authorized Signer

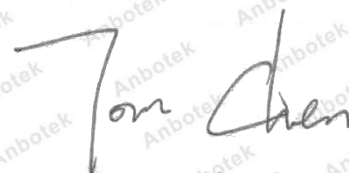

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Shenzhen Pilot Technology Co., Ltd
Address	:	A1 Building, No.7 Shankeng Road, Shankeng Industrial Park, Shanxia Community, Pinghu Street, Longgang District, Shenzhen, China
Manufacturer	:	Shenzhen Pilot Technology Co., Ltd
Address	:	A1 Building, No.7 Shankeng Road, Shankeng Industrial Park, Shanxia Community, Pinghu Street, Longgang District, Shenzhen, China

1.2. Description of Device (EUT)

Product Name	:	Wireless Charger	
Model No.	:	WX07	
Trade Mark	:	N/A	
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Test Sample No.	:	S1, S2	
Product Description	:	Operation Frequency:	111-205KHz
		Number of Channel:	20 Channels
		Modulation Type:	MSK
		Antenna Type:	Loop Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: A2013 Input: 100-240V 50-60Hz 0.7A Output: 3.6-6.5V --- 3A/ 6.5-9V --- 2A/ 9-12V --- 1.5A
Mobile Phone	:	Samsung

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH20
Mode 4	Keeping TX+Charging mode



For Conducted Emission	
Final Test Mode	Description
Mode 4	Keeping TX+Charging mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH10
Mode 3	CH20
Mode 4	Keeping TX+Charging mode

1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	0.110	6	0.135	11	0.160	16	0.185
2	0.115	7	0.140	12	0.165	17	0.190
3	0.120	8	0.145	13	0.170	18	0.195
4	0.125	9	0.150	14	0.175	19	0.200
5	0.130	10	0.155	15	0.180	20	0.205

1.6. Description Of Test Setup

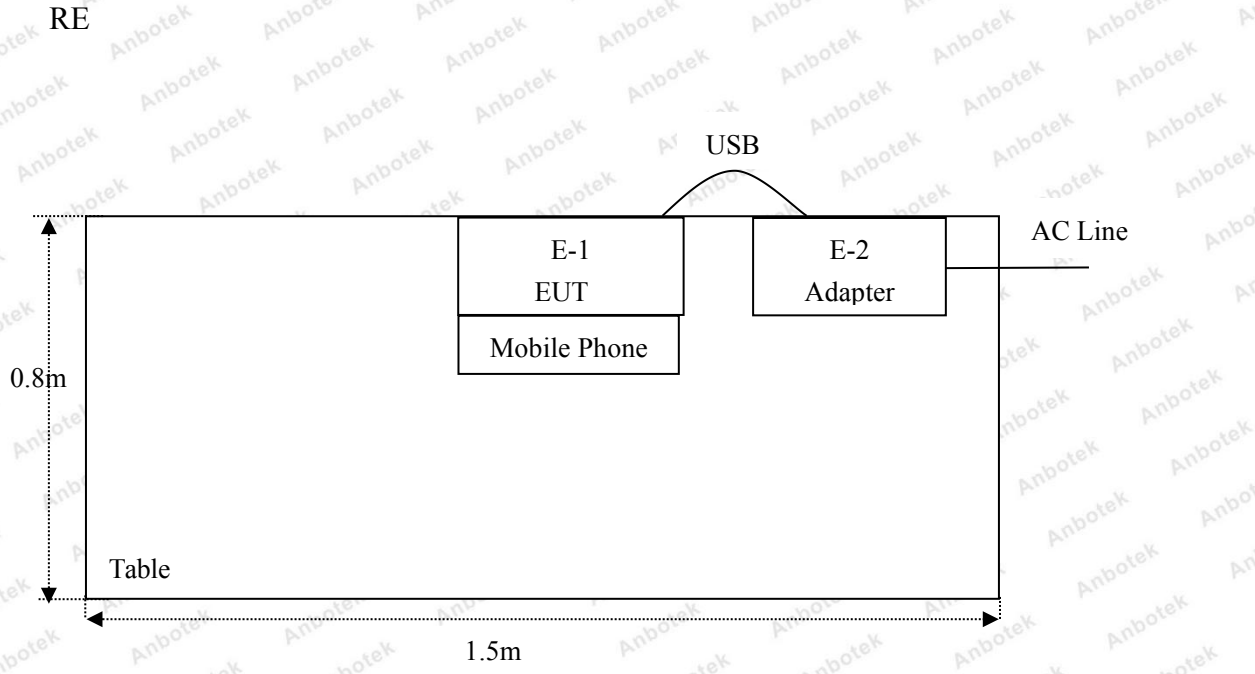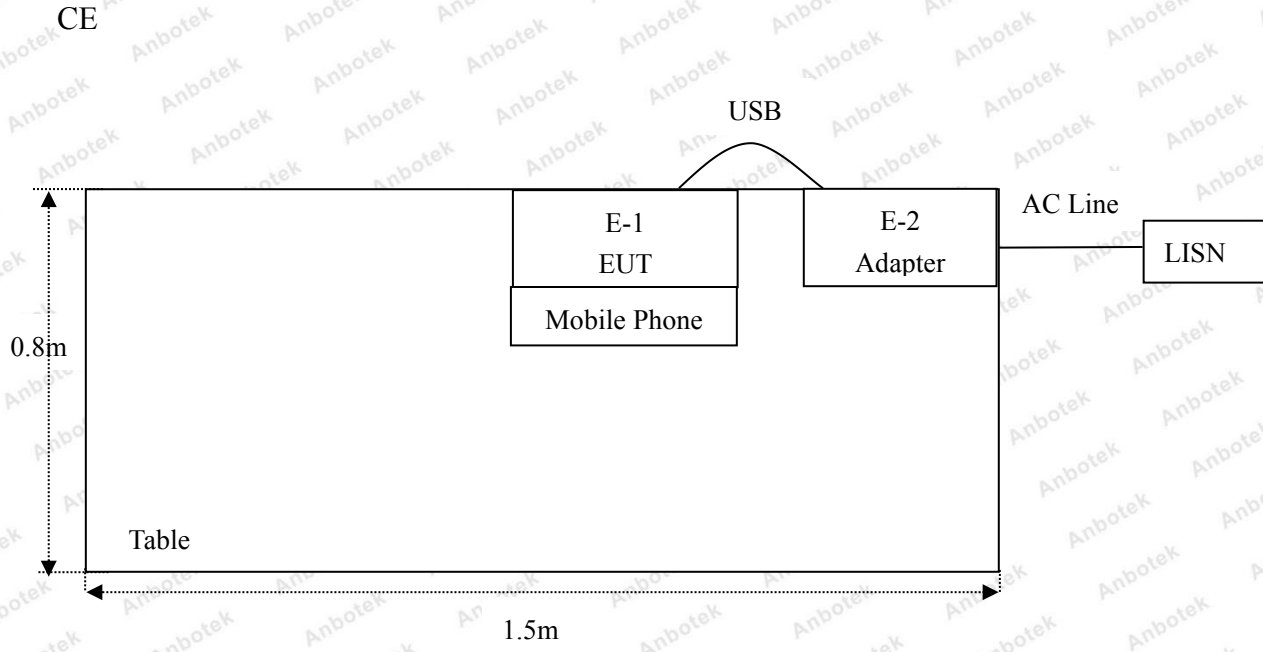

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 17, 2017	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 17, 2017	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 17, 2017	1 Year
5.	Spectrum Analysis	Agilent	N9038A	MY53227295	Nov. 17, 2017	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 17, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Nov. 17, 2017	1 Year
8.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2017	1 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 20, 2017	1 Year
10.	Loop Antenna	Schwarzbeck	HFH2-Z2	100047	Nov. 17, 2017	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA9170	9170-375	Nov. 17, 2017	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Nov. 17, 2017	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 18, 2017	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 17, 2017	1 Year
16.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 17, 2017	1 Year
17.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 18, 2017	1 Year
18.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 18, 2017	1 Year
19.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 18, 2017	1 Year
20.	DC Power Supply	LW	TPR-6410D	349315	Nov. 01, 2017	1 Year
21.	Constant Temperature Humidity Chamber	Sertep	ZJ-HWHS80B	ZJ-17042804	Nov. 01, 2017	1 Year

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

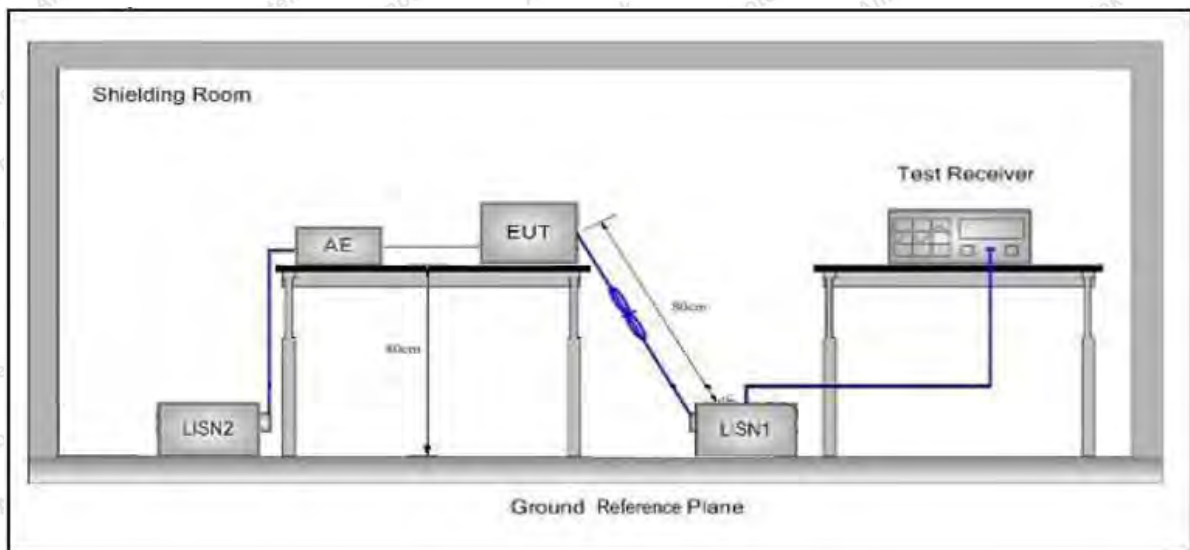

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 22.2°C Hum.: 60%

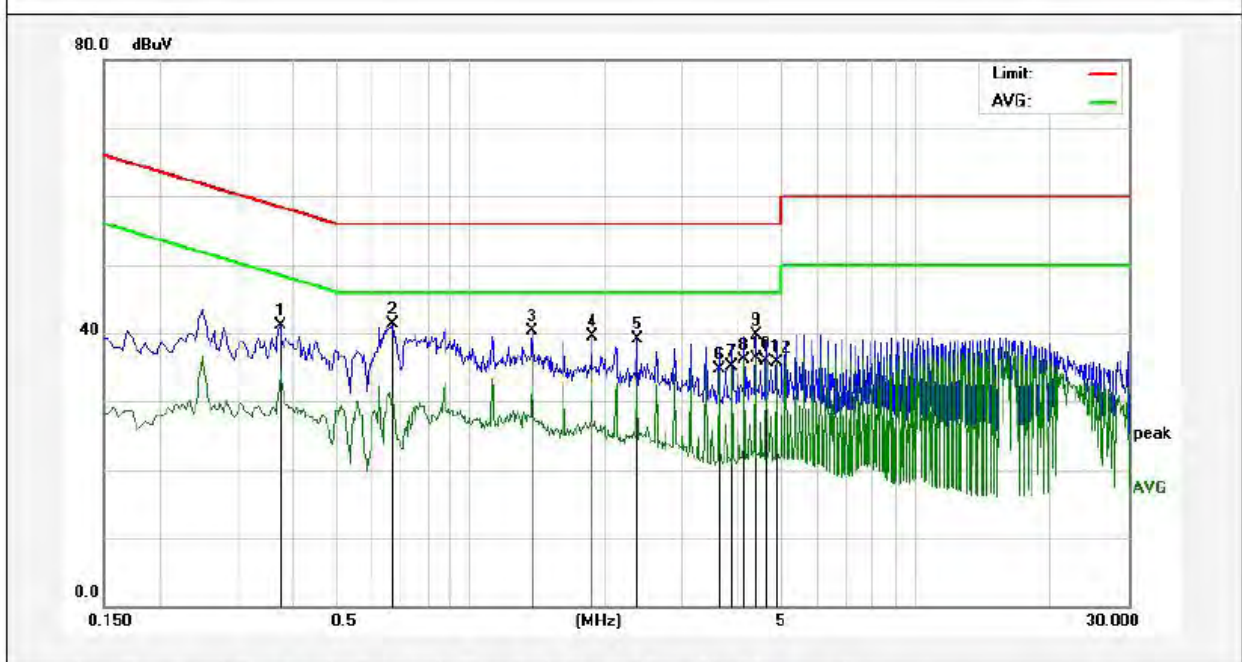

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3740	21.13	19.92	41.05	58.41	-17.36	QP	
2	0.6700	21.30	20.03	41.33	56.00	-14.67	QP	
3	1.3740	20.19	20.13	40.32	56.00	-15.68	QP	
4	1.8700	19.39	20.14	39.53	56.00	-16.47	QP	
5	2.3699	18.86	20.15	39.01	56.00	-16.99	QP	
6	3.6180	14.59	20.17	34.76	46.00	-11.24	AVG	
7	3.8660	14.86	20.18	35.04	46.00	-10.96	AVG	
8	4.1180	15.95	20.18	36.13	46.00	-9.87	AVG	
9	4.3659	19.44	20.19	39.63	56.00	-16.37	QP	
10	4.3659	16.05	20.19	36.24	46.00	-9.76	AVG	
11	4.6180	15.75	20.20	35.95	46.00	-10.05	AVG	
12	4.8659	15.41	20.20	35.61	46.00	-10.39	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 22.2°C Hum.: 60%

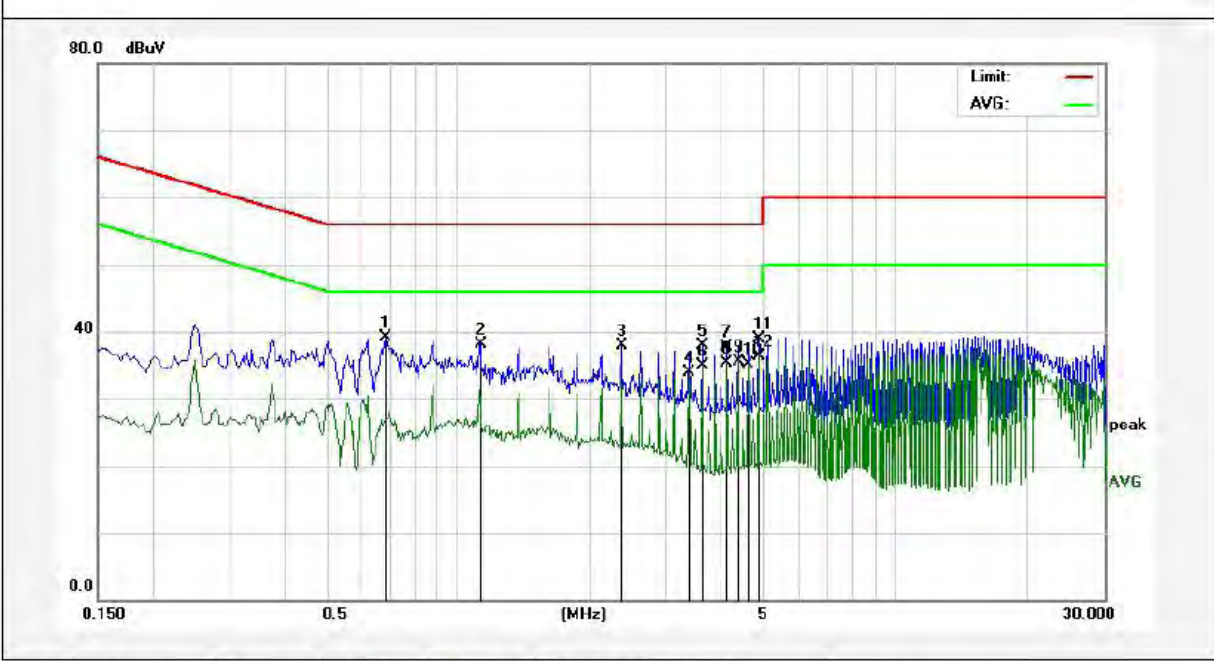

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6860	19.02	20.04	39.06	56.00	-16.94	QP	
2	1.1260	18.08	20.12	38.20	56.00	-17.80	QP	
3	2.3699	17.76	20.15	37.91	56.00	-18.09	QP	
4	3.3700	13.78	20.17	33.95	46.00	-12.05	AVG	
5	3.6180	17.82	20.17	37.99	56.00	-18.01	QP	
6	3.6180	14.65	20.17	34.82	46.00	-11.18	AVG	
7	4.1260	17.59	20.18	37.77	56.00	-18.23	QP	
8	4.1260	15.13	20.18	35.31	46.00	-10.69	AVG	
9	4.3659	15.41	20.19	35.60	46.00	-10.40	AVG	
10	4.6180	14.87	20.20	35.07	46.00	-10.93	AVG	
11	4.8659	18.73	20.20	38.93	56.00	-17.07	QP	
12	4.8659	16.14	20.20	36.34	46.00	-9.66	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 22.2°C Hum.: 60%

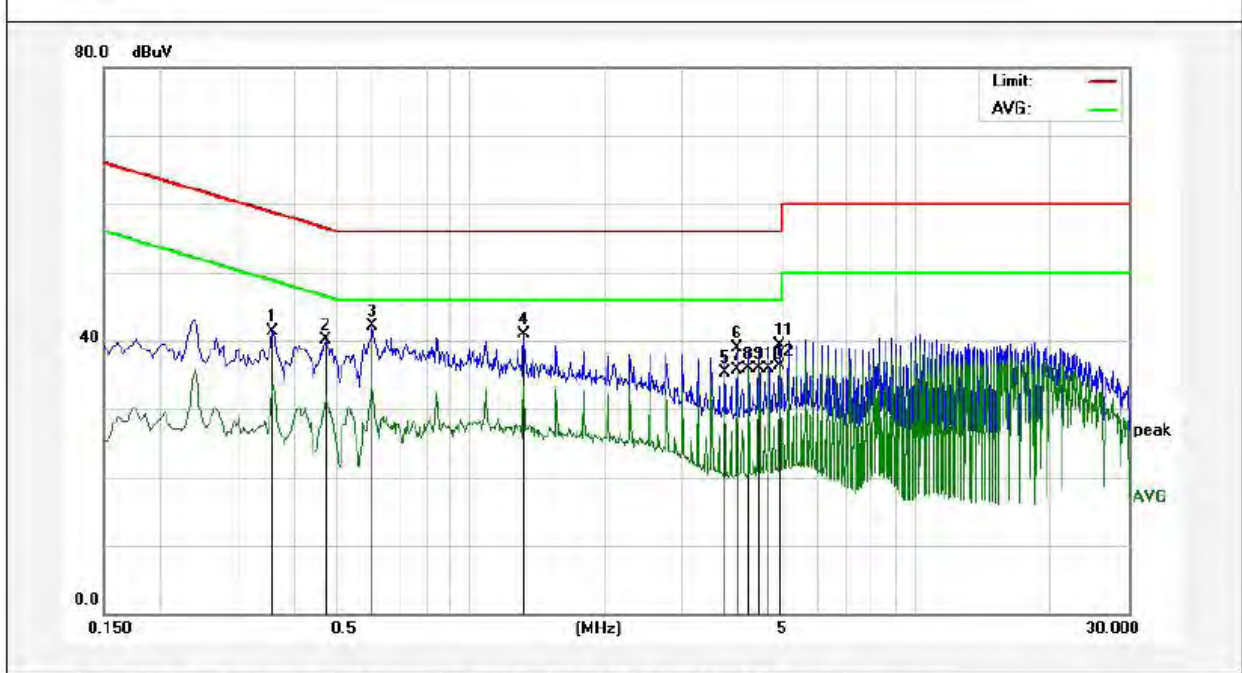

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3580	21.38	19.92	41.30	58.77	-17.47	QP	
2	0.4740	20.13	19.97	40.10	56.44	-16.34	QP	
3	0.6020	22.15	20.01	42.16	56.00	-13.84	QP	
4	1.3180	20.80	20.13	40.93	56.00	-15.07	QP	
5	3.7300	15.08	20.17	35.25	46.00	-10.75	AVG	
6	3.9700	18.70	20.18	38.88	56.00	-17.12	QP	
7	3.9700	15.54	20.18	35.72	46.00	-10.28	AVG	
8	4.2100	15.62	20.19	35.81	46.00	-10.19	AVG	
9	4.4500	15.74	20.19	35.93	46.00	-10.07	AVG	
10	4.6900	15.71	20.20	35.91	46.00	-10.09	AVG	
11	4.9340	19.18	20.20	39.38	56.00	-16.62	QP	
12	4.9340	16.15	20.20	36.35	46.00	-9.65	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Keeping TX+Charging mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 22.2°C Hum.: 60%

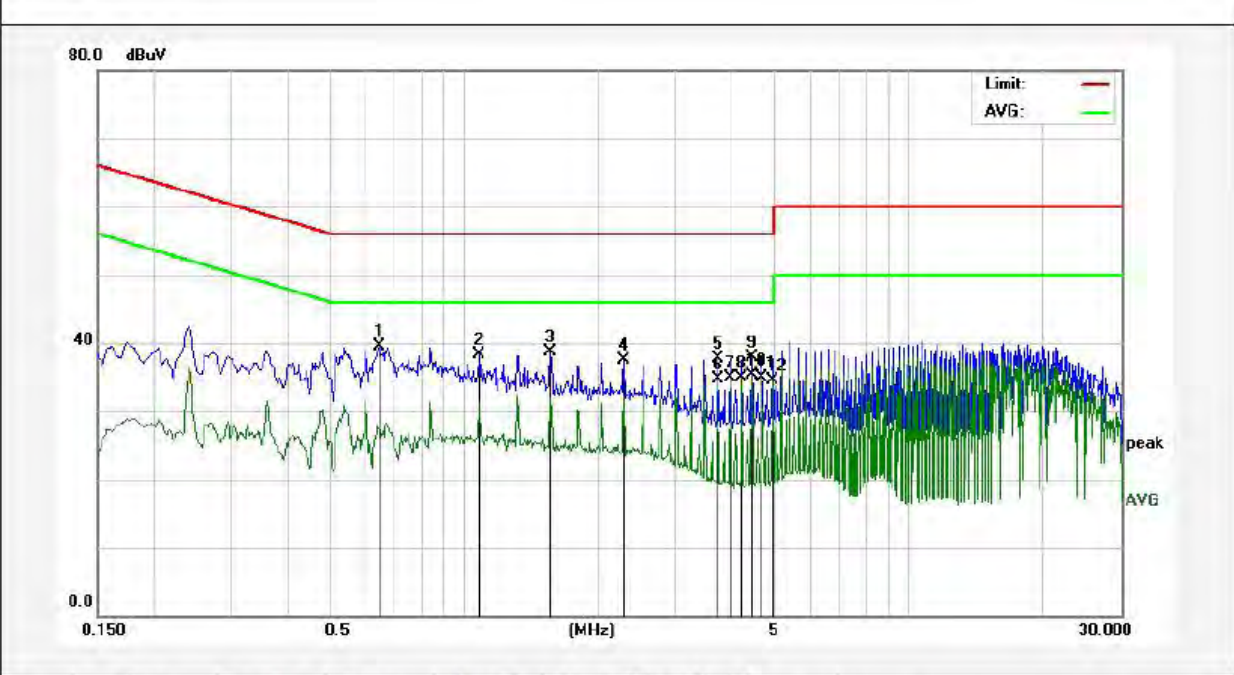

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6460	19.52	20.02	39.54	56.00	-16.46	QP	
2	1.0859	18.28	20.12	38.40	56.00	-17.60	QP	
3	1.5660	18.51	20.13	38.64	56.00	-17.36	QP	
4	2.2860	17.38	20.15	37.53	56.00	-18.47	QP	
5	3.7300	17.55	20.17	37.72	56.00	-18.28	QP	
6	3.7300	14.44	20.17	34.61	46.00	-11.39	AVG	
7	3.9700	14.68	20.18	34.86	46.00	-11.14	AVG	
8	4.2100	14.73	20.19	34.92	46.00	-11.08	AVG	
9	4.4500	17.71	20.19	37.90	56.00	-18.10	QP	
10	4.4500	15.09	20.19	35.28	46.00	-10.72	AVG	
11	4.6940	14.80	20.20	35.00	46.00	-11.00	AVG	
12	4.9340	14.31	20.20	34.51	46.00	-11.49	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	-	74.0	Peak

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

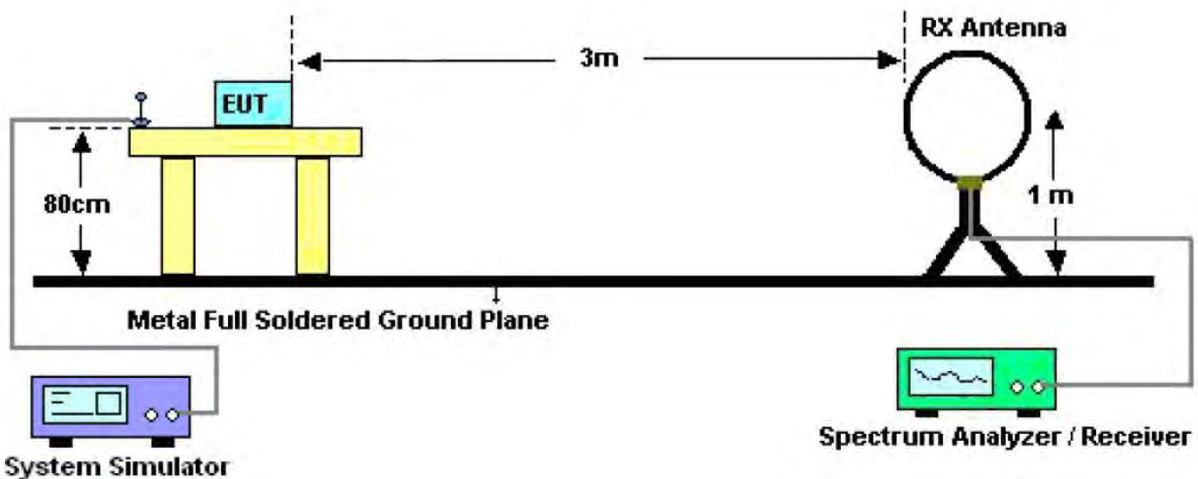


Figure 1. Below 30MHz

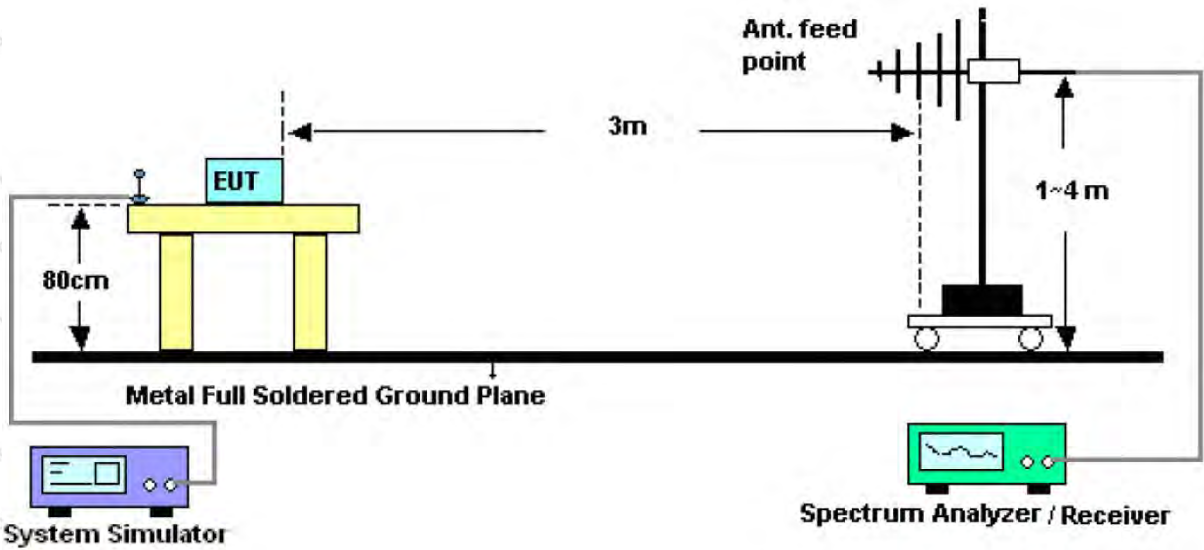


Figure 2. 30MHz to 1GHz

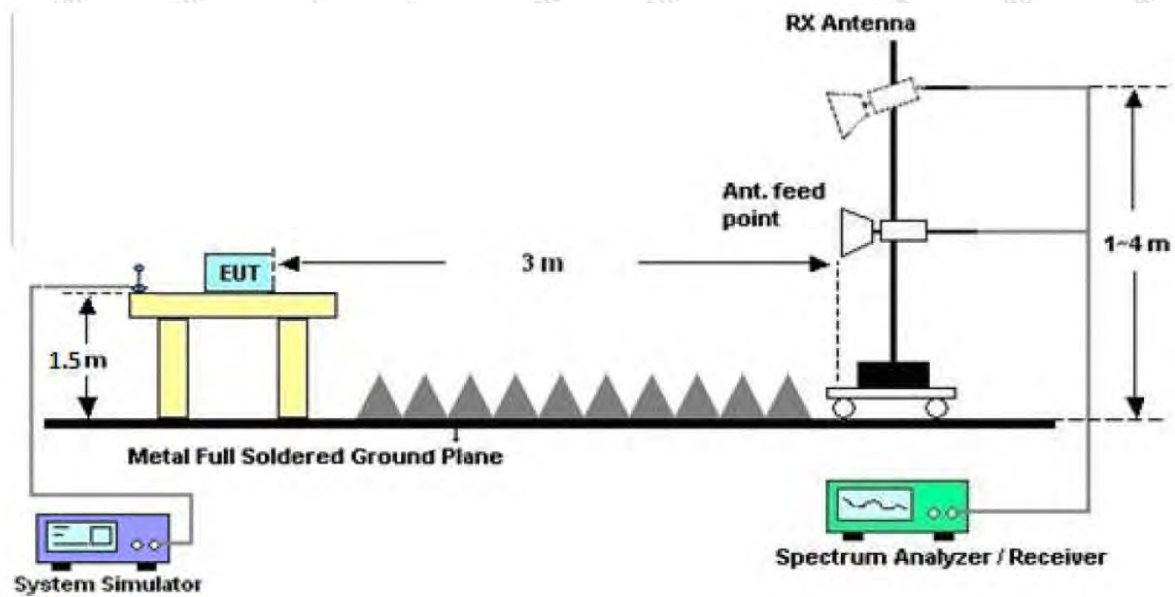


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

Test Results

(Between 9KHz – 30MHz)

Job No.:	SZAWW180705002-01	Power Source:	AC 120V, 60Hz for adapter
Standard:	FCC PART15 C_3m	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test item:	Radiation Test	Distance:	3m
Test Mode:	Mode 4		

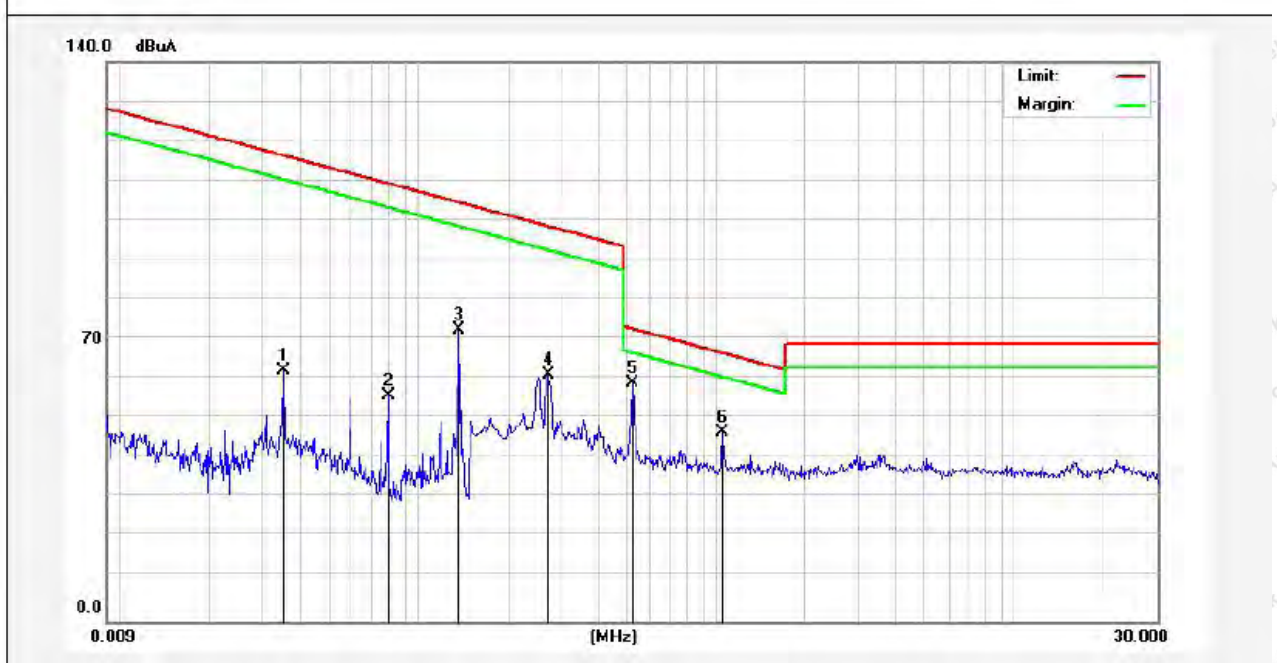

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree (dgc)
0.0352	47.60	19.28	2.53	0	69.41	136.55	-67.14	Peak	11
0.0352	41.03	19.28	2.53	0	62.84	116.55	-53.71	AV	11
0.0792	54.35	19.32	2.55	0	76.22	129.54	-53.32	Peak	45
0.0792	34.65	19.32	2.55	0	56.52	109.54	-53.02	AV	45
0.1373	58.23	19.36	2.62	0	80.21	124.79	-44.58	Peak	247
0.1373	51.13	19.36	2.62	0	73.11	104.79	-31.68	AV	247
0.2716	53.20	19.38	2.63	0	75.21	118.90	-43.69	Peak	120
0.2716	39.90	19.38	2.63	0	61.91	98.90	-36.99	AV	120
0.5260	37.76	19.40	2.64	0	59.80	73.18	-13.38	QP	180
1.0500	25.32	19.50	2.65	0	47.47	67.18	-19.71	QP	0

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz -1000 MHz)

Job No.:	SZAWW180705002-01	Polarization:	Horizontal
Standard:	FCC PART15 C_3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	Mode 4	Distance:	3m




No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.1054	48.26	-18.52	29.74	40.00	-10.26	QP	300	0	
2	60.9176	40.31	-17.34	22.97	40.00	-17.03	QP	300	65	
3	148.4410	49.23	-21.36	27.87	43.50	-15.63	QP	300	132	
4	181.2834	51.79	-19.86	31.93	43.50	-11.57	QP	300	176	
5	208.5803	48.63	-19.06	29.57	43.50	-13.93	QP	300	224	
6	230.9068	43.81	-18.32	25.49	46.00	-20.51	QP	300	360	

Job No.: SZAWW180705002-01 **Polarization:** Vertical
Standard: FCC PART15 C_3m **Power Source:** AC 120V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 24.3(C)/55%RH
Test Mode: Mode 4 **Distance:** 3m



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0700	48.09	-17.53	30.56	40.00	-9.44	QP	300	0	
2	58.8185	47.18	-15.93	31.25	40.00	-8.75	QP	300	65	
3	119.4361	47.53	-15.29	32.24	43.50	-11.26	QP	300	124	
4	151.0663	51.46	-17.30	34.16	43.50	-9.34	QP	300	176	
5	193.0945	46.23	-14.91	31.32	43.50	-12.18	QP	300	255	
6	225.3080	45.14	-14.09	31.05	46.00	-14.95	QP	300	360	

Job No.:	SZAWW180705002-01	Polarization:	Horizontal
Standard:	FCC PART15 C_3m	Power Source:	AC 240V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	Mode 4	Distance:	3m

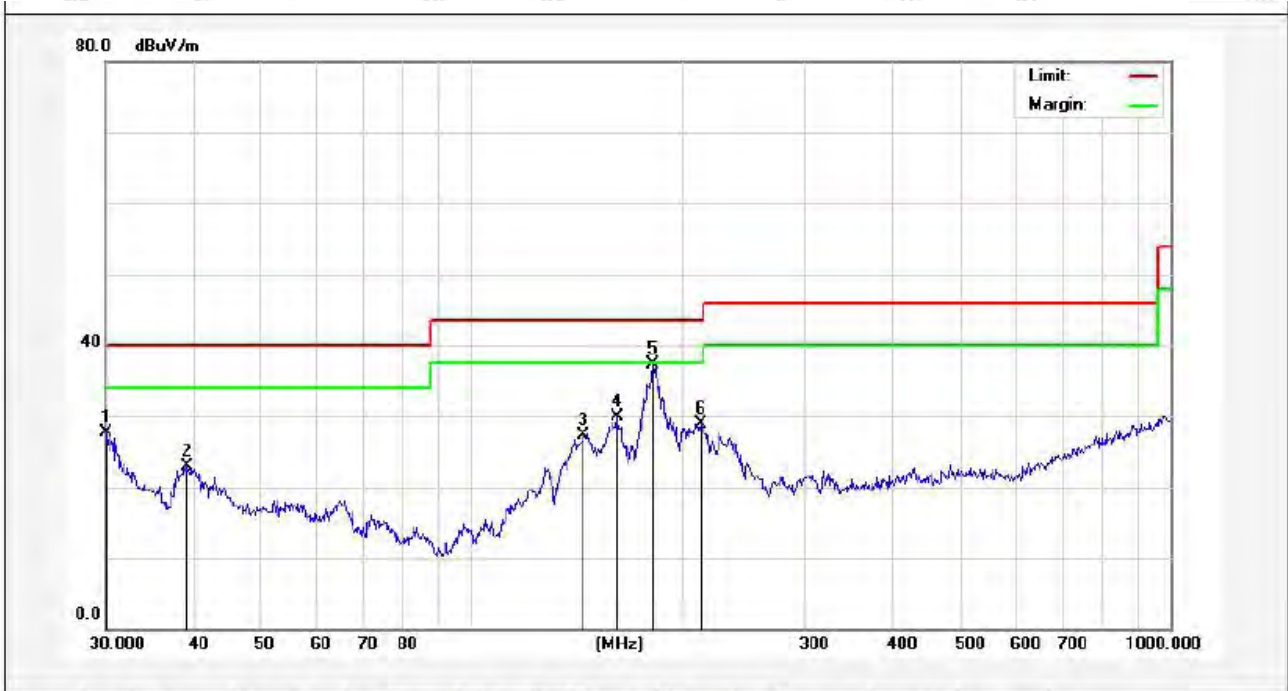

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	46.16	-18.55	27.61	40.00	-12.39	QP	300	0	
2	39.1616	37.82	-14.82	23.00	40.00	-17.00	QP	300	76	
3	144.8418	48.69	-21.42	27.27	43.50	-16.23	QP	300	135	
4	161.4742	50.57	-20.68	29.89	43.50	-13.61	QP	300	196	
5	181.9199	57.12	-19.86	37.26	43.50	-6.24	QP	300	265	
6	213.0151	48.10	-19.15	28.95	43.50	-14.55	QP	300	360	

Job No.:	SZAWW180705002-01	Polarization:	Vertical
Standard:	FCC PART15 C_3m	Power Source:	AC 240V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	Mode 4	Distance:	3m




No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.3173	46.74	-17.45	29.29	40.00	-10.71	QP	300	0	
2	40.4172	44.68	-13.44	31.24	40.00	-8.76	QP	300	96	
3	64.8865	41.36	-17.83	23.53	40.00	-16.47	QP	300	165	
4	74.9191	45.03	-20.59	24.44	40.00	-15.56	QP	300	211	
5	153.7385	46.57	-17.17	29.40	43.50	-14.10	QP	300	296	
6	182.5592	52.41	-15.61	36.80	43.50	-6.70	QP	300	360	

APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement





Photo of Radiation Emission Test


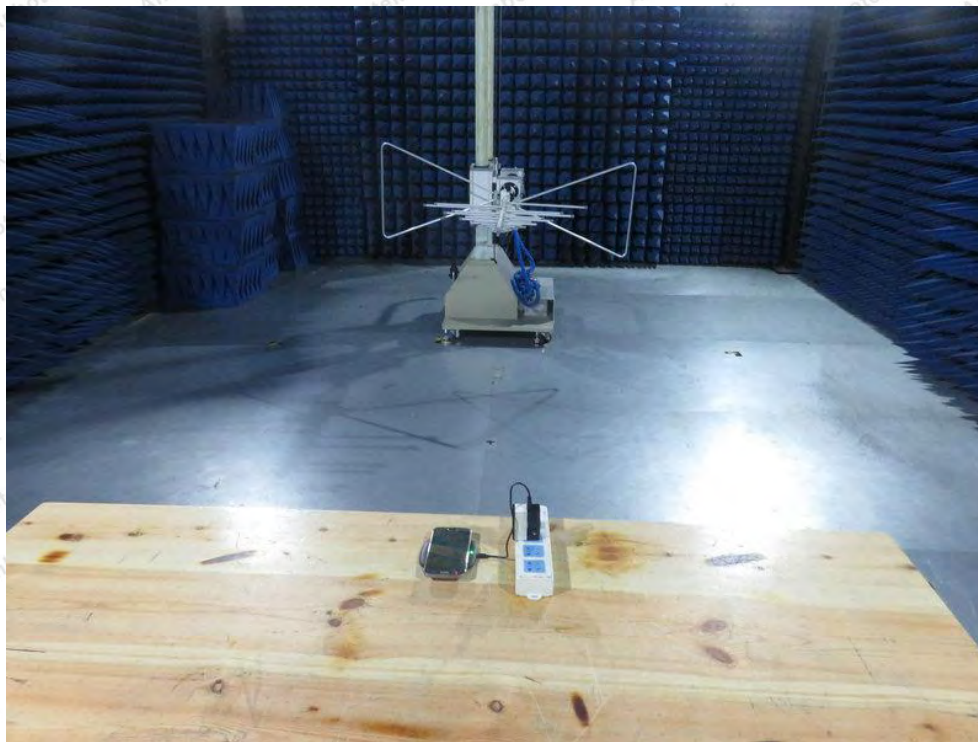





APPENDIX II -- EXTERNAL PHOTOGRAPH


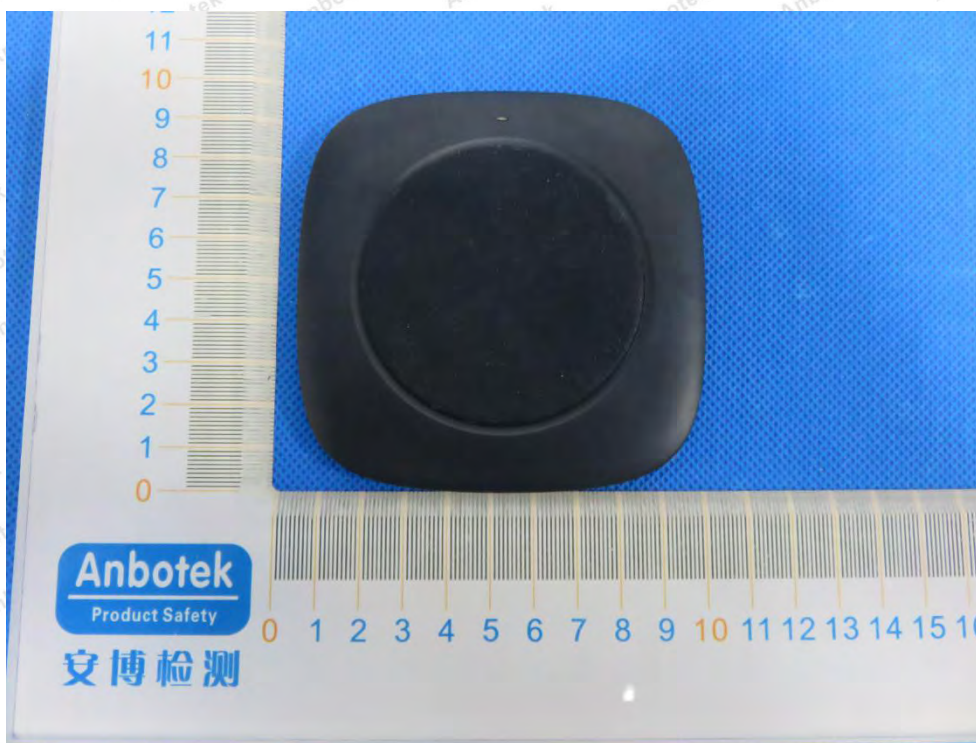



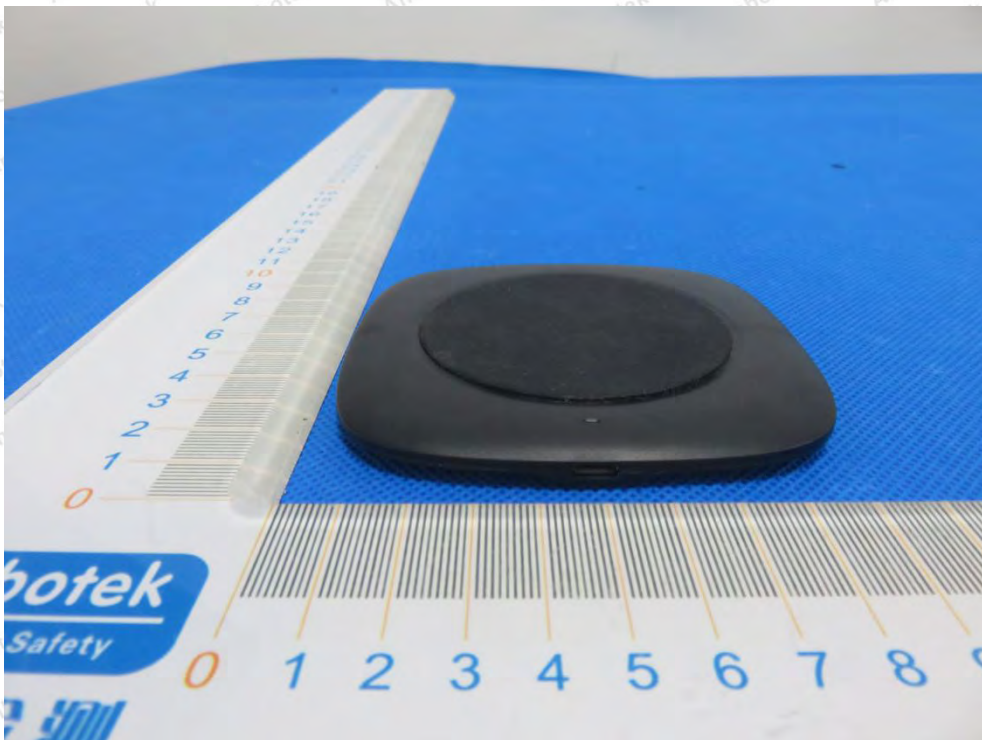


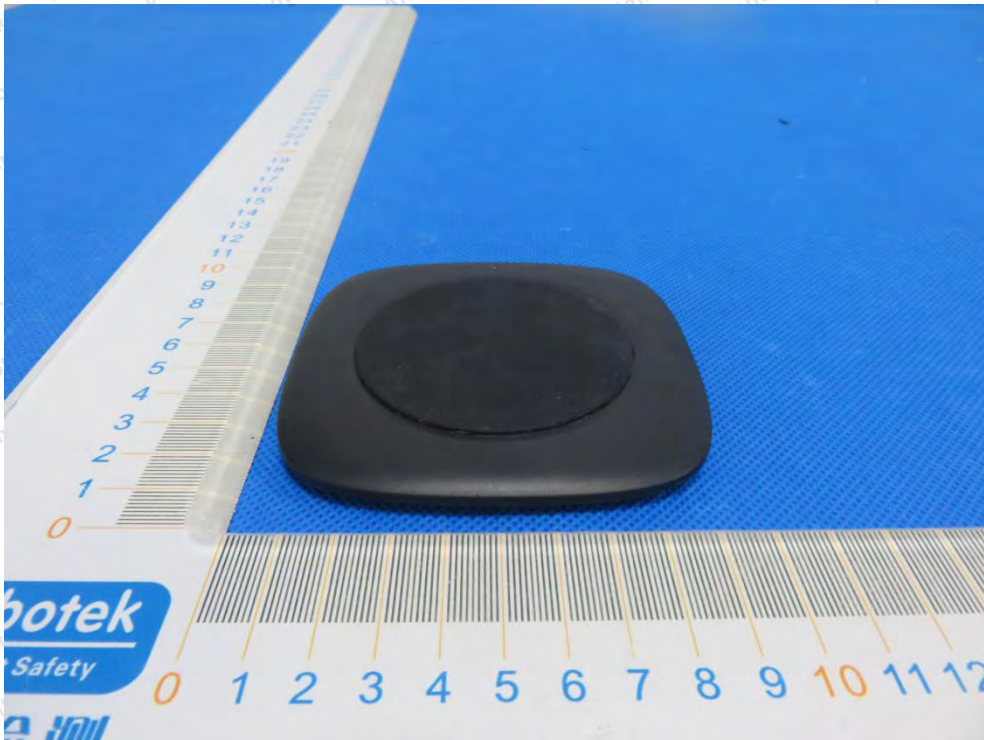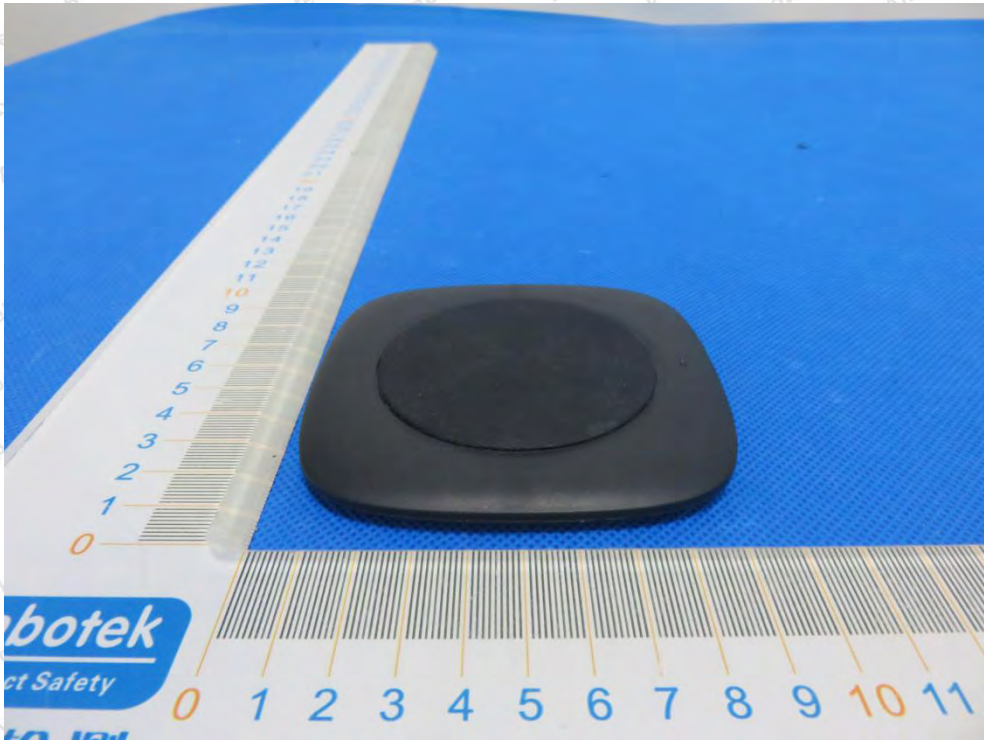

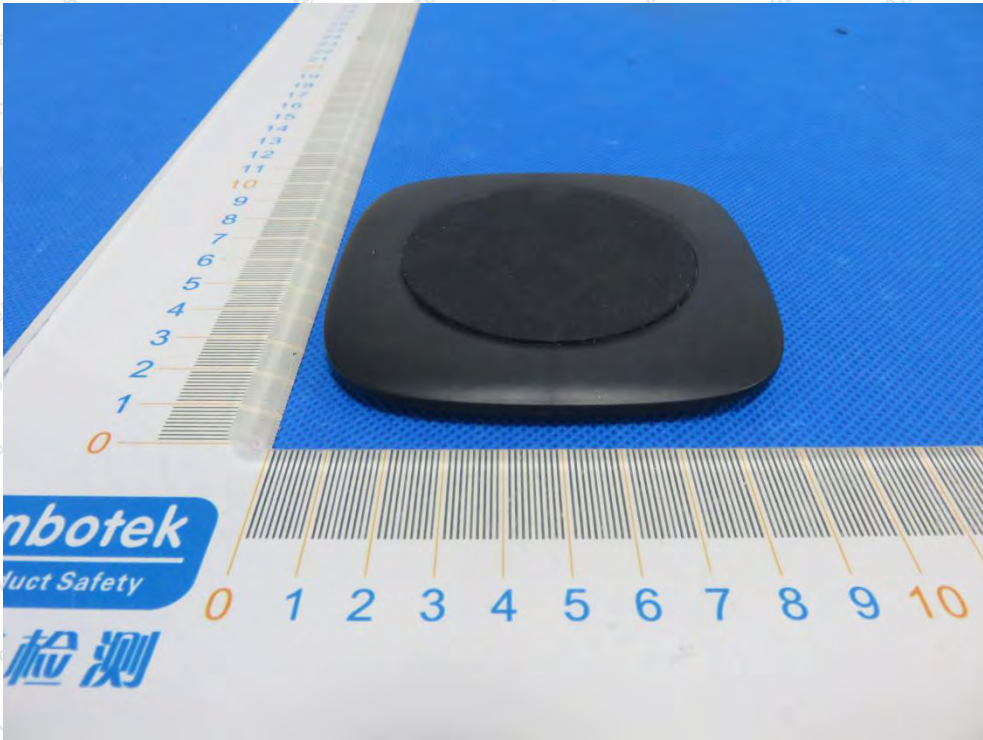

APPENDIX III -- INTERNAL PHOTOGRAPH

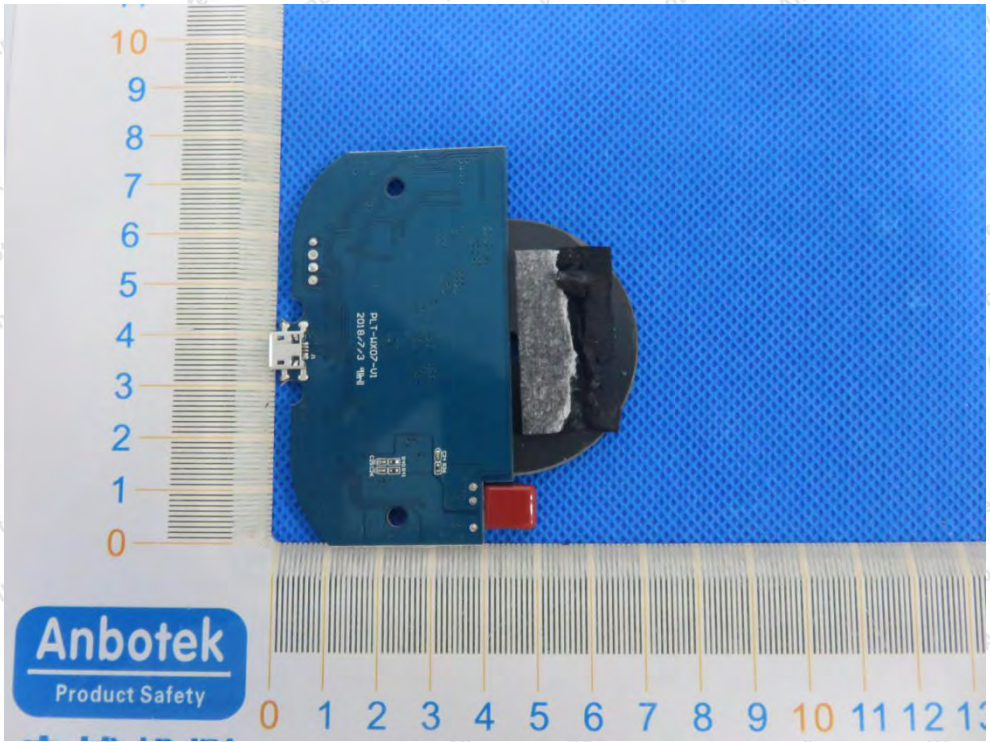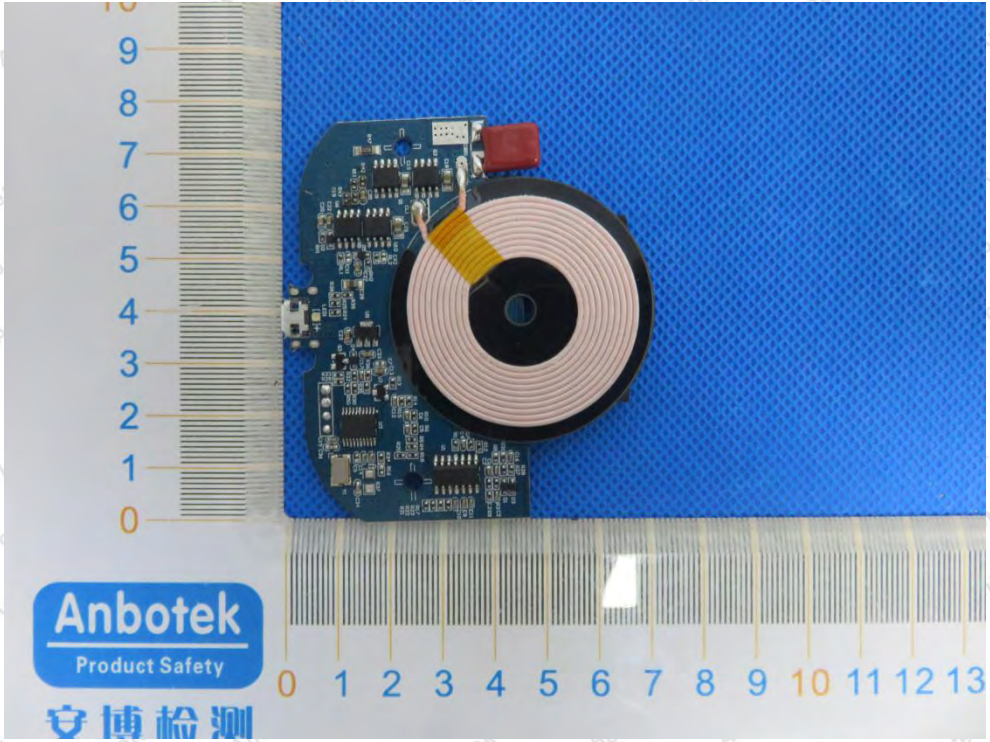

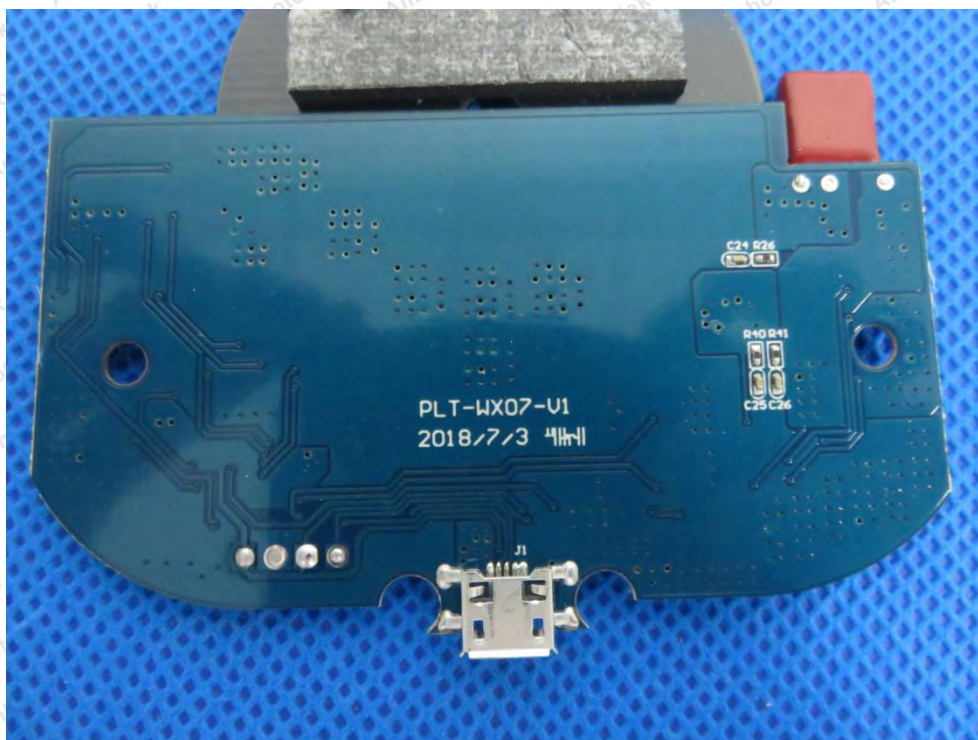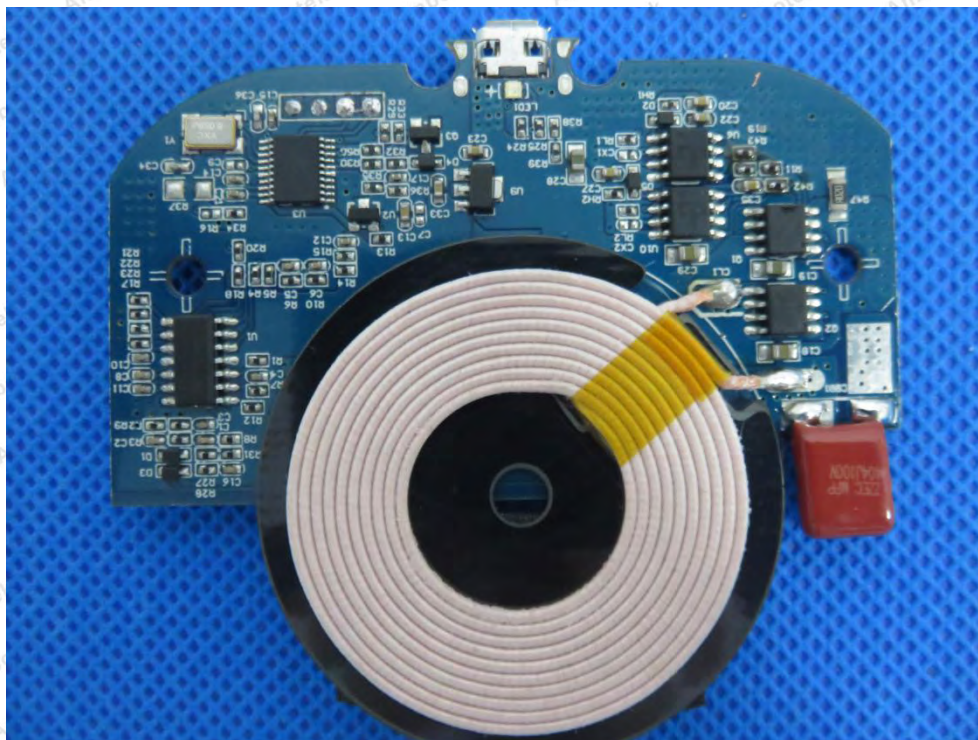

----- End of Report -----