

RF Exposure Evaluation

Applicant: Shenzhen Pilot Technology Co.,Ltd

Address of Applicant: 101 A1 Industrial Park, building a1, No.7, Shankeng Road, Shanxia Community, Pinghu Street, Longgang District, Shenzhen City China.

Manufacturer/Factory: Shenzhen Pilot Technology Co.,Ltd

Address of Manufacturer/Factory: 101 A1 Industrial Park, building a1, No.7, Shankeng Road, Shanxia Community, Pinghu Street, Longgang District, Shenzhen City China.

Equipment Under Test (EUT)

Product Name: Power Bank

Model No.: WX1710PDS

Test sample(s) ID: GTSL202103000251-1

Sample(s) Status: Engineer sample

Modulation type: MSK

Antenna Type: Inductive loop coil Antenna

Antenna gain: 0dBi

Power supply: Micro Input:5V2A,9V2A
USB-A:5V3A
Output::9V2A,12V1.5A
Wireless Output:10W
USB-C:5V3A
Input(PD):9V2A
USB-C:5V3A
Output(PD):9V1.2A,12V1.67A
Total Outout:15W(Max)

FCC ID: 2AONA-WX1710PDS

Applicable standards: KDB 680106 D01 RF Exposure Wireless Charging Apps v03

Date of sample receipt: 2021-03-15

Date of Test: 2021-03-15~2021-03-17

Date of report issued: 2021-03-18

1 Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging Apps v03

2 Requirements

According to the item 5 of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

(1) Power transfer frequency is less than 1MHz.

The device operate in the frequency range 115KHz~205KHz.

(2) Output power from each primary coil is less than or equal to 15 watts.

The maximum output power for each primary coil is 15W.

(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

The transfer system includes 1 primary coils.

(4) Client device is placed directly in contact with the transmitter.

Client device is placed directly in contact with the transmitter

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Mobile exposure conditions only.

(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Remark: Meet all the above requirements.

Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 * =Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3 Test Setup

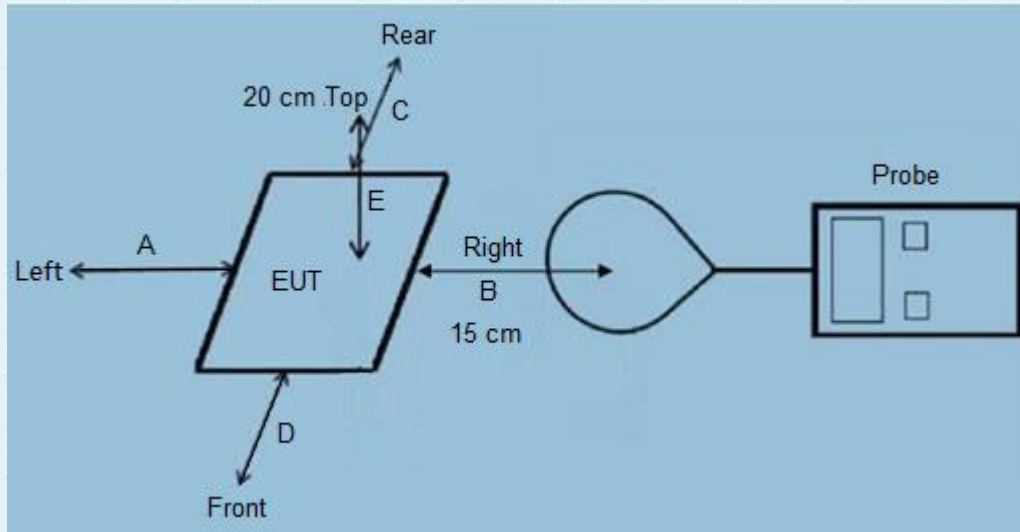

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (15 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01v03.

Remark: The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

5 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	June. 25 2020	June. 24 2021
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	June. 25 2020	June. 24 2021

6 Test Support Equipment list

Equipment	Manufacturer	Model No.	SN.	Remark
Adapter	Salcom	V2323	N/A	N/A
Mobile phone	Huawei	Mate 30	N/A	N/A
Mobile phone	Apple	iphone X	N/A	N/A

7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

8 Test Result

H-Filed Strength at 15 cm from the edges surrounding the EUT (A/m)

Test Mode	Unit	Charging Battery Level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	50% Limits (A/m)	Limits (A/m)
Mate 30	uT	1%	0.115-0.205	0.35	0.30	0.31	0.20	0.31	--	--
	A/m			0.22	0.22	0.24	0.11	0.25	0.815	1.63
	uT	50%	0.115-0.205	0.27	0.24	0.30	0.18	0.27	--	--
	A/m			0.21	0.21	0.25	0.14	0.21	0.815	1.63
	uT	99%	0.115-0.205	0.21	0.34	0.27	0.14	0.32	--	--
	A/m			0.15	0.25	0.20	0.11	0.24	0.815	1.63
iPhone X	uT	1%	0.115-0.205	0.25	0.26	0.25	0.19	0.24	--	--
	A/m			0.18	0.17	0.18	0.15	0.18	0.815	1.63
	uT	50%	0.115-0.205	0.21	0.19	0.20	0.15	0.20	--	--
	A/m			0.16	0.15	0.16	0.12	0.15	0.815	1.63
	uT	99%	0.115-0.205	0.18	0.19	0.18	0.14	0.21	--	--
	A/m			0.13	0.14	0.14	0.10	0.16	0.815	1.63

Note:A/m=uT/1.25

H-Filed Strength at 20 cm from the top of the EUT (A/m)

Test Mode	Unit	Charging Battery Level	Frequency Range (MHz)	Test Position E	50% Limits (A/m)	Limits (A/m)
Mate 30	uT	1%	0.115-0.205	0.25	--	--
	A/m			0.18	0.815	1.63
	uT	50%	0.115-0.205	0.19	--	--
	A/m			0.15	0.815	1.63
	uT	99%	0.115-0.205	0.19	--	--
	A/m			0.13	0.815	1.63
iphone X	uT	1%	0.115-0.205	0.23	--	--
	A/m			0.16	0.815	1.63
	uT	50%	0.115-0.205	0.17	--	--
	A/m			0.12	0.815	1.63
	uT	99%	0.115-0.205	0.13	--	--
	A/m			0.10	0.815	1.63


Note: A/m = uT / 1.25

E-Filed Strength at 15 cm from the edges surrounding the EUT (V/m)


Test Mode	Unit	Charging Battery Level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	50% Limits (V/m)	Limits (V/m)
Mate 30	V/m	1%	0.115-0.205	90.55	86.68	97.24	55.50	90.82	307.0	614.0
	V/m	50%	0.115-0.205	78.69	75.42	89.47	49.45	86.57	307.0	614.0
	V/m	99%	0.115-0.205	63.69	98.77	82.54	37.72	94.27	307.0	614.0
iphone X	V/m	1%	0.115-0.205	68.17	64.85	71.68	56.55	67.85	307.0	614.0
	V/m	50%	0.115-0.205	61.49	57.25	60.52	49.36	60.69	307.0	614.0
	V/m	99%	0.115-0.205	50.78	52.21	52.72	40.78	60.33	307.0	614.0

Note: V/m = A/m * 377

Test Engineer:



Reviewer:



9 Test Set-up Photo

